

**47 CFR PART 15 SUBPART C TEST REPORT**  
**for**  
**Wireless charging pad**  
**Model No.: PG-156**  
**FCC ID: 2A2BCPG-156**

of


Applicant: iBASE GAMING INC.  
Address: 24F., No. 93, Sec. 1, Xintai 5th Rd., Xizhi Dist.,  
New Taipei City 221416, Taiwan (R.O.C.)

Tested and Prepared  
by  
**Worldwide Testing Services (Taiwan) Co., Ltd.**  
**FCC Registration No.: TW1477, TW0020, TW1072**  
**Industry Canada filed test laboratory Reg. No. 20037**



**Report No.: W6M22105-20884-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877      FAX: 886-2-66068879      E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION</b>	<b>2</b>
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS	3
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS	4
<b>2</b>	<b>TECHNICAL TEST</b>	<b>5</b>
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST	6
2.4	GENERAL TEST PROCEDURE	9
<b>3</b>	<b>TEST RESULTS (ENCLOSURE)</b>	<b>10</b>
3.1	PEAK OUTPUT POWER	10
3.2	SPURIOUS EMISSIONS RADIATED – TRANSMITTER OPERATING	13
3.3	OCCUPIED BANDWIDTH	15
3.4	ANTENNA REQUIREMENT	16
3.5	RADIATED EMISSIONS FROM RECEIVER SECTION OF RECEIVER PART	19
3.6	POWER LINE CONDUCTED EMISSION	21
<b>APPENDIX</b>		<b>24</b>



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### Tester:

August 16, 2021

Kent Lin

Date

WTS-Lab.

Name

Signature

### Technical responsibility for area of testing:

August 16, 2021


Kevin Wang

Date

WTS

Name

Signature



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS

No.5-1, Shuang Sing Village,  
LiShuei Rd., Wanli Dist.,  
New Taipei City 207, Taiwan (R.O.C.)  
Company  
Worldwide Testing Services(Taiwan) Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.  
Tel : 886-2-66068877  
Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.  
Accredited number: ./.  
Street: ./.  
Town: ./.  
Country: ./.  
Telephone: ./.  
Fax: ./.


## **1.3 Details of approval holder**

Name: iBASE GAMING INC.  
Street: 24F., No. 93, Sec. 1, Xintai 5th Rd., Xizhi Dist.,  
Town: New Taipei City 221416,  
Country: Taiwan (R.O.C.)  
Telephone: ./.  
Fax: ./.

## **1.4 Application details**

Date of receipt of test item: May 05, 2021

Date of test: From May 06, 2021 to June 10, 2021



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1  
FCC ID: 2A2BCPG-156

## **1.5 General information of Test item**

Type of test item: Wireless charging pad

Model No. : PG-156

Brand name: ./.

Multi-listing Model No. : ./.

Photos: see Appendix

### Technical data

Transmitting Frequency: 205kHz

Operation modes: Duplex

Modulation Type: FSK

Antenna Type: Coil Antenna


Power supply: 120Va.c.

## **Manufacturer: (if different from Approval Holder)**

Name: Powergene Technology Co., Ltd. Taiwan Branch  
Street: 1F-5., No.1, Wuquan 1st Rd., Xinzhuang Dist.,  
Town: New Taipei City 24892,  
Country: Taiwan (R.O.C.)  
Additional information: ./.

## **1.6 Test standards**

Technical standard :  
47 CFR PART 15 SUBPART C § 2.1049, § 15.203, § 15.209 (2019-10)



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1  
FCC ID: 2A2BCPG-156

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations were ascertained in the course of the tests performed.

### **2.2 Test environment**

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Details of power supply 120Va.c.

Extreme conditions parameters: test voltage : -- extreme  
min : -- V  
max : -- V

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty: AMN: 1.05 dB Voltage probe: 1.05 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty: 0.009-30 MHz: 2.13 dB 30-1000 MHz: 3.53 dB 1-18 GHz: 4.19 dB 18-40 GHz: 4.09 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty: 0.41 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement Frequency stability	Expanded Uncertainty: 6.11 Hz

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## 2.3 Test Equipment List


No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2021/6/4	2022/6/3
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2020/11/6	2021/11/5
ETSTW-CE 006	IMPULSBEGRÄNZER PULSE LIMITER	ESH3-Z2	100226	R&S	2020/9/22	2021/9/21
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2020/7/22	2021/7/21
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2020/10/26	2021/10/25
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2020/7/29	2021/7/28
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2021/6/4	2022/6/3
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2020/9/14	2021/9/13
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2020/7/30	2021/7/29
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2021/5/5	2022/5/4
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2020/7/8	2021/7/7
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2021/5/5	2022/5/4
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2021/3/18	2022/3/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2021/5/21	2022/5/20
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2020/8/3	2021/8/2
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2021/2/19	2022/2/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2021/3/16	2022/3/15
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2021/2/19	2022/2/18
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2021/5/5	2022/5/4
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2020/10/15	2021/10/14
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2020/9/17	2021/9/16
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2021/5/27	2022/5/26
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2021/2/19	2022/2/18



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1  
FCC ID: 2A2BCPG-156

ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2021/1/6	2022/1/5
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2020/12/25	2021/12/24
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2021/6/4	2022/6/3
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2020/8/7	2021/8/6
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2020/8/7	2021/8/6
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2021/2/19	2022/2/18
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2020/8/7	2021/8/6
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2020/8/7	2021/8/6
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2021/5/5	2022/5/4
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2021/6/4	2022/6/3
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2021/4/7	2022/4/6
ETSTW-RE 148	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04006	ETC	2020/7/9	2021/7/8
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2020/10/1	2021/9/30
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2021/6/4	2022/6/3
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2021/6/2	2022/6/1
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2021/3/16	2022/3/15
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2021/4/27	2022/4/26
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2020/11/10	2021/11/9
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40/12+9SS	3	WI	2021/1/6	2022/1/5
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2021/1/6	2022/1/5
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2021/1/6	2022/1/5
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2021/1/6	2022/1/5
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2020/9/8	2021/9/7
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2021/4/1	2022/3/31
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2020/8/7	2021/8/6
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2021/2/19	2022/2/18
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2020/7/1	2021/6/30
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2021/5/5	2022/5/4
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2020/9/17	2021/9/16
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2020/9/17	2021/9/16




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 ( S_Cable 9 )	279067	HUBER+SUHNER	2021/2/19	2022/2/18
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2021/5/5	2022/5/4
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2020/7/3	2021/7/2
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2021/6/4	2022/6/3
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2021/5/5	2022/5/4
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2021/6/4	2022/6/3
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2021/5/5	2022/5/4
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2021/5/5	2022/5/4
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMCA	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2020/9/23	2021/9/22
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2020/12/3	2021/12/2



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $\text{dB}\mu\text{V}$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	$20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} @3\text{m}$

**ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm height and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the centre of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**ANSI STANDARD C63.10-2013 B.2.7:** Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## 3 Test results (enclosure)

Test case	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.209	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.209	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Receiver operating	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Occupied bandwidth	2.1049	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	FCC 15.203	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	FCC 15.207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156


## 3.1 Peak Output Power

FCC Rules: 15.209

The power was measured with modulation (declared by the applicant).

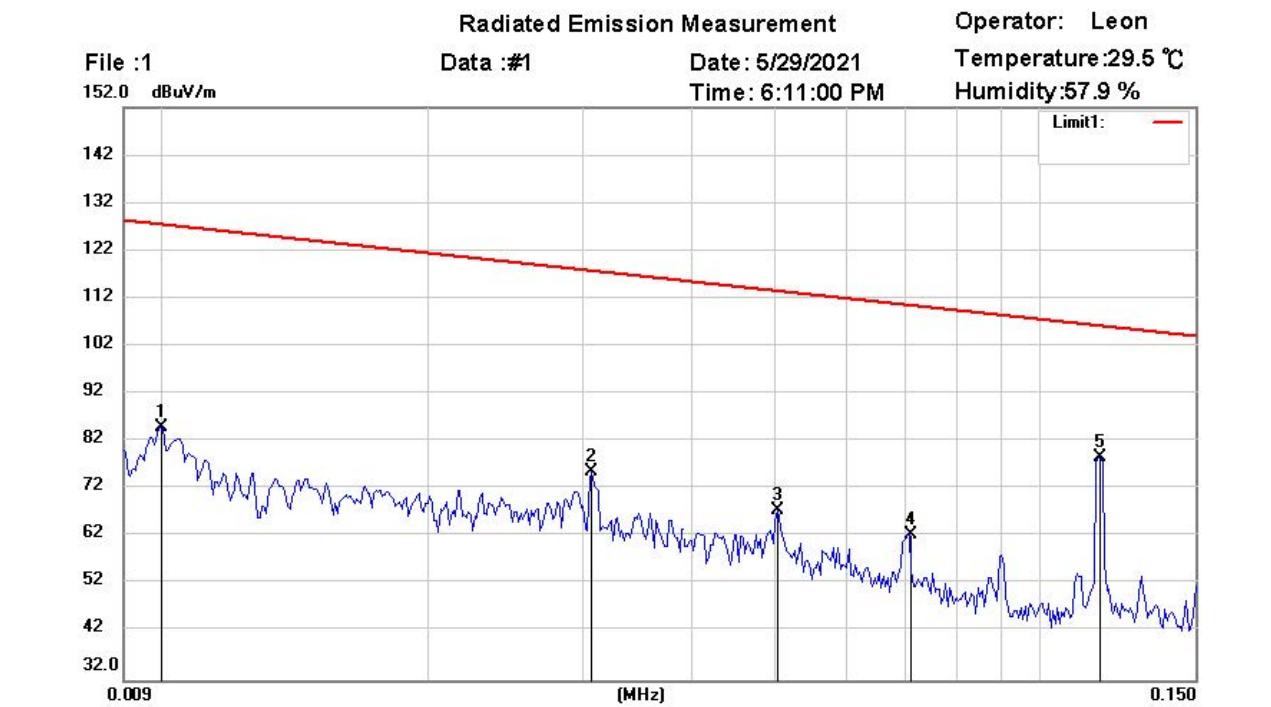

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0100	1.09	peak	83.92	85.01	127.60	100	245	-42.59	
	0.0308	-0.47	peak	76.13	75.66	117.83	100	73	-42.17	
	0.0502	-4.28	peak	71.68	67.40	113.58	100	96	-46.18	
*	0.0710	-6.29	peak	68.77	62.48	110.57	100	155	-48.09	
*	0.1170	14.78	peak	63.96	78.74	106.24			-27.50	RF Power



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

Limits: 15.209

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

The test was performed in the anechoic OATS at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:


DF (distance factor) =  $40 \log (D_1/D_2) = 80 \text{ dB}$ , where

D<sub>1</sub> is the 300 meter specified measurement distance,  
D<sub>2</sub> is the 3 meter test measurement distance.

For 205 kHz frequency the calculated limit is:

$$\text{Limit}_{3m} = \text{Limit}_{300m} + DF = 26.24 \text{ dBuV/m} + 80 \text{ dB} = 106.24 \text{ dBuV/m}$$

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 055.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## **3.2 Spurious Emissions radiated – Transmitter operating**

FCC Rules: 15.209

The field strength of any emission appearing outside of the specific band shall not exceed the general radiated emission limits in 15.209.

Model:	PG-156		Date:	--				
Mode:	--		Temperature:	-- °C		Engineer:	--	
Polarization:	Horizontal		Humidity:	-- %				
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

### **Note**

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in the Appendix.


All other not noted test plots do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Limits: 15.209

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

\* In the emission table above, the tighter limit applies at the band edges.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

$DF = 40 \log(D_1/D_2) = 80 \text{ dB}$ , where

For  $D_1$  is the 300 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 80 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

For  $D_1$  is the 30 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 40 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

If the frequency between 9 – 490 kHz,

Limit =  $20\log(2400/f(\text{kHz})) + 80$

If the frequency between 490 – 1705 kHz,

Limit =  $20\log(2400/f(\text{kHz})) + 40$

If the frequency between 1705 – 30000 kHz,

Limit =  $20\log 30 + 40$

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 055,  
ETSTW-RE 146, ETSTW-RE 148.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

### 3.3 Occupied Bandwidth

FCC Rules: 2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated are each equal to 0.5% of the total mean power radiated by a given emission.

The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth specifications are given, the following guidelines are used:

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1 kHz
30 MHz to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz


Test date: June 07, 2021

Temperature: 23.2 °C


Humidity: 53.2 %

Tester: Kent

### Test result:

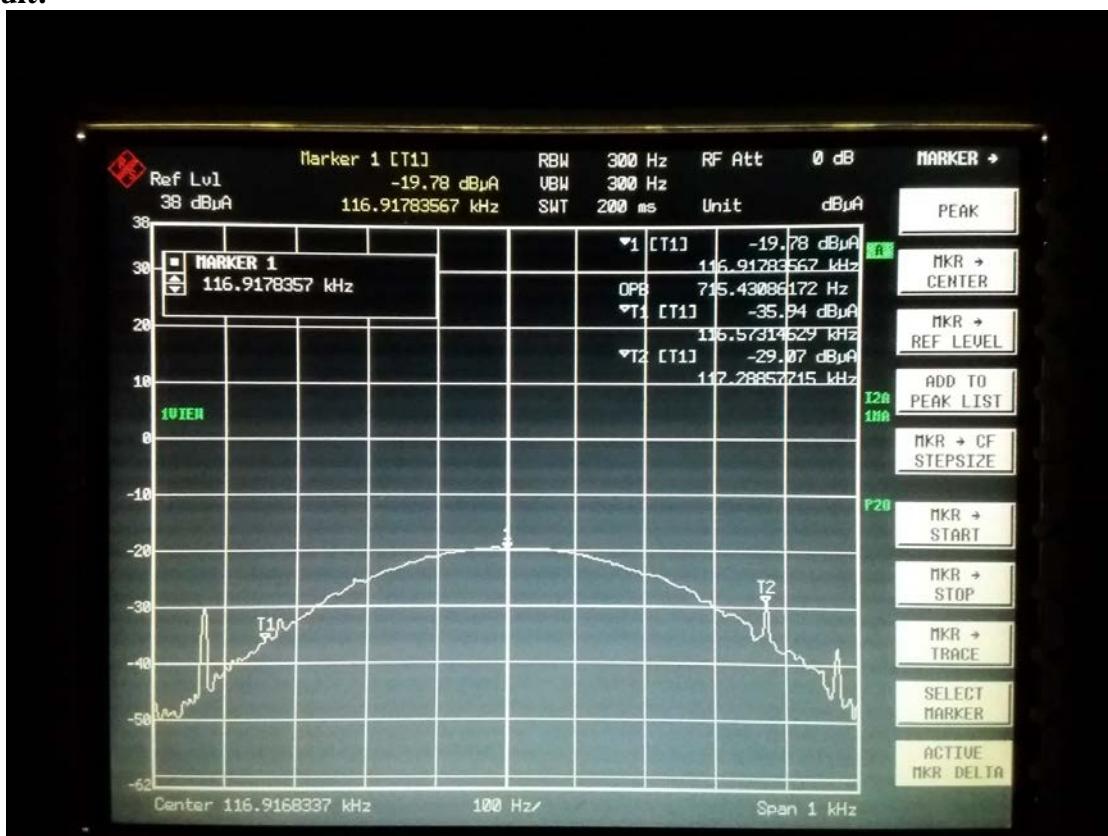

Test equipment: ETSTW-RE 055



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## **3.4 Antenna requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This antenna is Coil Antenna which passes antenna requirement.

The equipment meets the requirements	yes <input checked="" type="checkbox"/>	no <input type="checkbox"/>
--------------------------------------	--	--------------------------------



Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

### 3.5 RF Exposure Compliance Requirements

Test standard : FCC KDB Publication  
680106 D01 RF Exposure Wireless Charging App v03r01

Probe from EUT Side

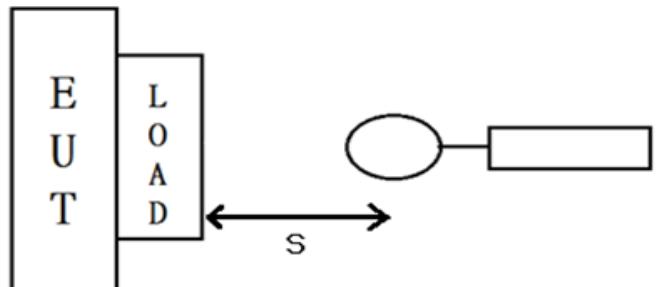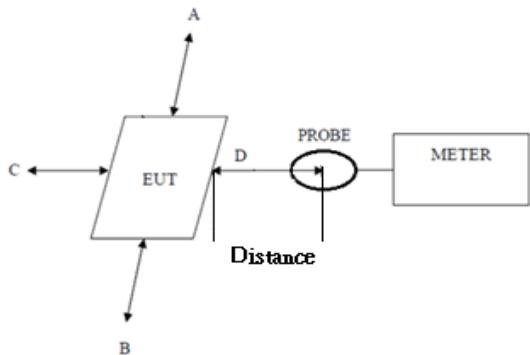

All of the following requirements as below:

- (1) Power transfer frequency is less than 1 MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

Test Result:


PG-156				
Operation Frequency (MHz)	Test Distance (cm)	Probe from EUT Side	E-Field strength (V/m)	H-Field strength (A/m)
QI	15	A	1.093	0.02
QI	15	B	1.723	0.051
QI	15	C	1.869	0.033
QI	15	D	1.747	0.044
QI	20	S	1.24	0.036
Limit			614	1.63

Note: The test compliance with RF exposure requirements.

Limit:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz  
\*=Plane-wave equivalent power density  
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules.  
The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## **3.6 Radiated Emissions from Receiver Section of Receiver Part**

### **For the frequency from 9 kHz to 30 MHz:**

FCC Rule: 15.209

The field strength of any emission appearing outside of the specific band shall not exceed the general radiated emission limits in 15.209.

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

\* In the emission table above, the tighter limit applies at the band edges.

Note: The above field strength limits are specified at a distance of 3 meters.

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

$$DF = 40 \log(D_1/D_2) = 80 \text{ dB, where}$$

For  $D_1$  is the 300 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 80 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

For  $D_1$  is the 30 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 40 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.


If the frequency between 9 – 490 kHz, limit =  $20\log(2400/f(\text{kHz})) + 80$

If the frequency between 490 – 1705 kHz, limit =  $20\log(2400/f(\text{kHz})) + 40$

If the frequency between 1705 – 30000 kHz, limit =  $20\log 30 + 40$

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 055, ETSTW-RE 146, ETSTW-RE 148

Explanation: This test is not required because the EUT has TX only.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## **For the frequency from 30 MHz to 1000 MHz.:**

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Model: PG-156

Date: --

Mode: --

Temperature: --

°C

Engineer: --

Polarization:

Horizontal

Humidity: --

%

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 064, ETSTW-RE 142, ETSTW-RE 147

### **Note**

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. This test is not required because the EUT has TX only.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156


## 3.7 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

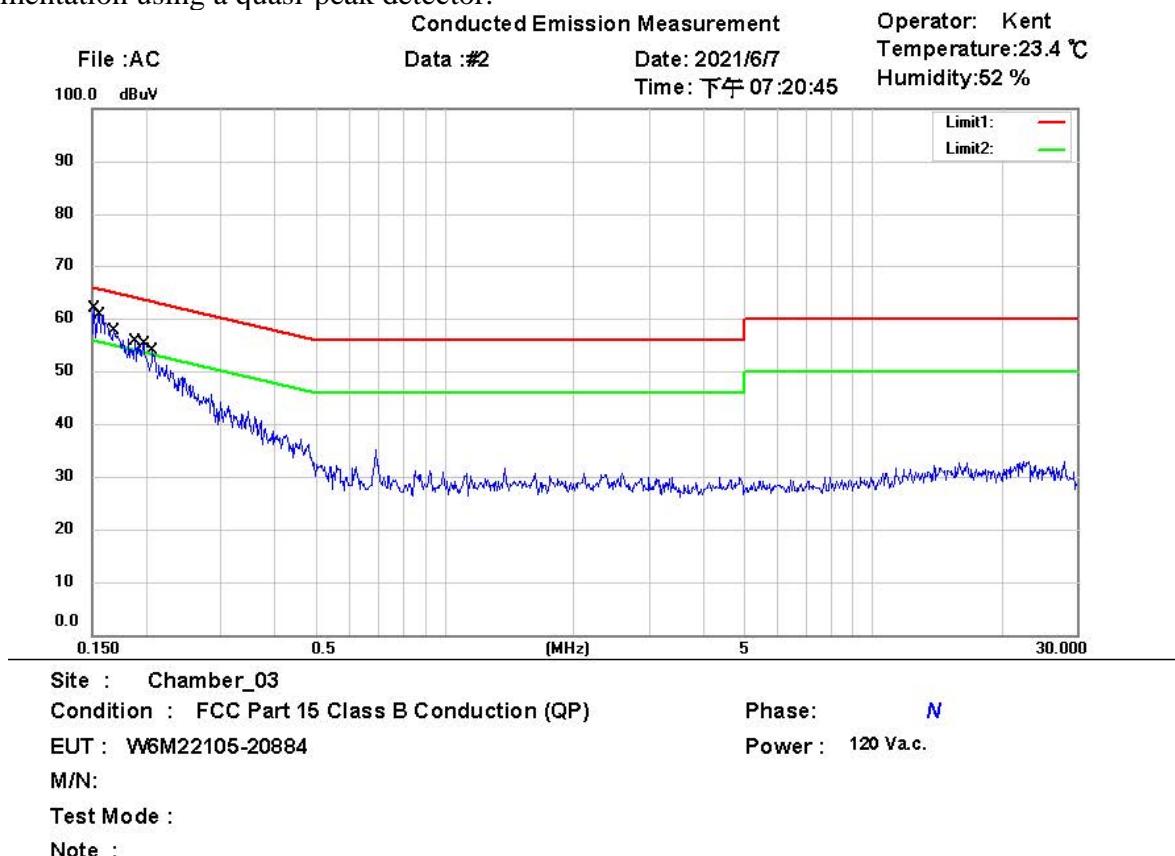


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1510	39.88	QP	9.66	49.54	65.94	-16.40	
	0.1510	20.26	AVG	9.66	29.92	55.94	-26.02	
	0.1550	40.27	QP	9.66	49.93	65.73	-15.80	
	0.1550	22.11	AVG	9.66	31.77	55.73	-23.96	
*	0.1690	44.59	QP	9.65	54.24	65.01	-10.77	
	0.1690	26.25	AVG	9.65	35.90	55.01	-19.11	
	0.1878	35.33	QP	9.64	44.97	64.13	-19.16	
	0.1878	18.13	AVG	9.64	27.77	54.13	-26.36	
	0.1966	39.28	QP	9.64	48.92	63.75	-14.83	
	0.1966	22.06	AVG	9.64	31.70	53.75	-22.05	
	0.2065	33.49	QP	9.64	43.13	63.34	-20.21	
	0.2065	14.42	AVG	9.64	24.06	53.34	-29.28	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

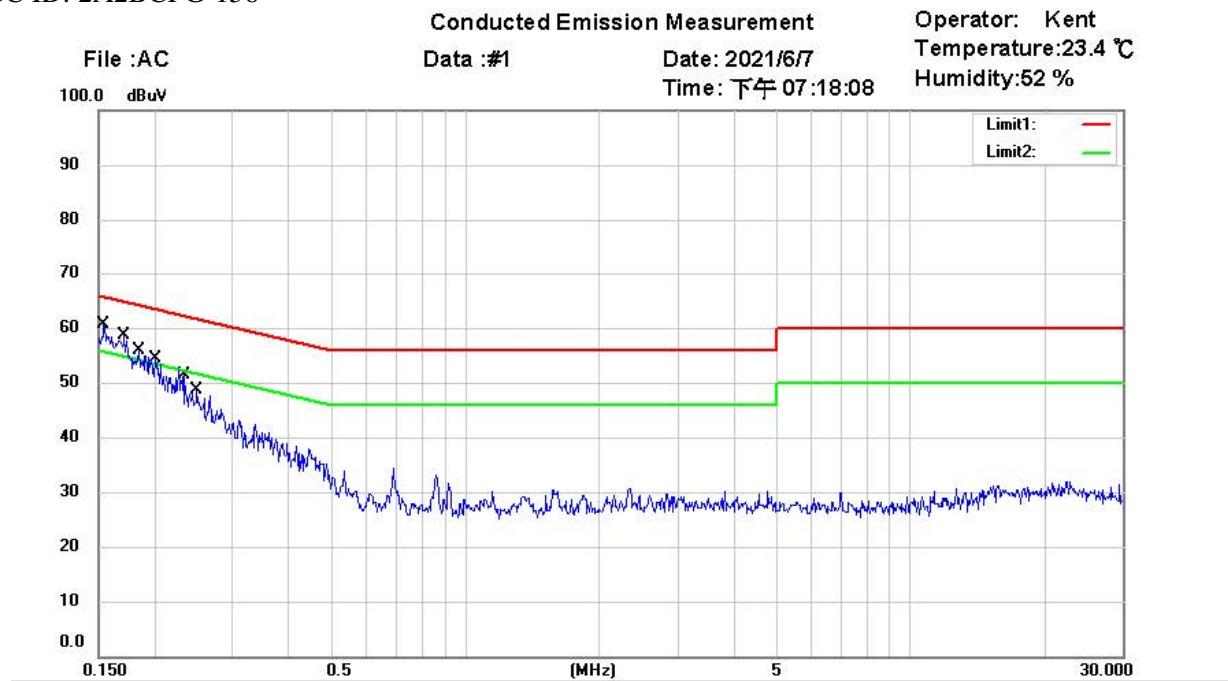

Site : Chamber\_03

Condition : FCC Part 15 Class B Conduction (QP)

Phase: L1

EUT : W6M22105-20884

Power : 120 V.a.c.

M/N:


Test Mode :

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1538	39.90	QP	9.67	49.57	65.79	-16.22	
	0.1538	20.51	AVG	9.67	30.18	55.79	-25.61	
*	0.1705	43.00	QP	9.66	52.66	64.94	-12.28	
	0.1705	23.61	AVG	9.66	33.27	54.94	-21.67	
	0.1841	36.03	QP	9.66	45.69	64.30	-18.61	
	0.1841	18.63	AVG	9.66	28.29	54.30	-26.01	
	0.2000	35.57	QP	9.65	45.22	63.61	-18.39	
	0.2000	17.47	AVG	9.65	27.12	53.61	-26.49	
	0.2345	30.42	QP	9.65	40.07	62.29	-22.22	
	0.2345	14.62	AVG	9.65	24.27	52.29	-28.02	
	0.2501	27.94	QP	9.64	37.58	61.75	-24.17	
	0.2501	14.76	AVG	9.64	24.40	51.75	-27.35	

## Note

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22105-20884-C-1

FCC ID: 2A2BCPG-156

## Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22105-20884-C-1  
FCC ID: 2A2BCPG-156

## Appendix

### **Photos**


1. EUT Photos
2. Set Up Photo of Radiated Emission
3. Set Up Photo of RF Exposure
4. Set Up Photo of Conducted Emission

### **Measurement diagrams**

Spurious Emissions Radiated



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879

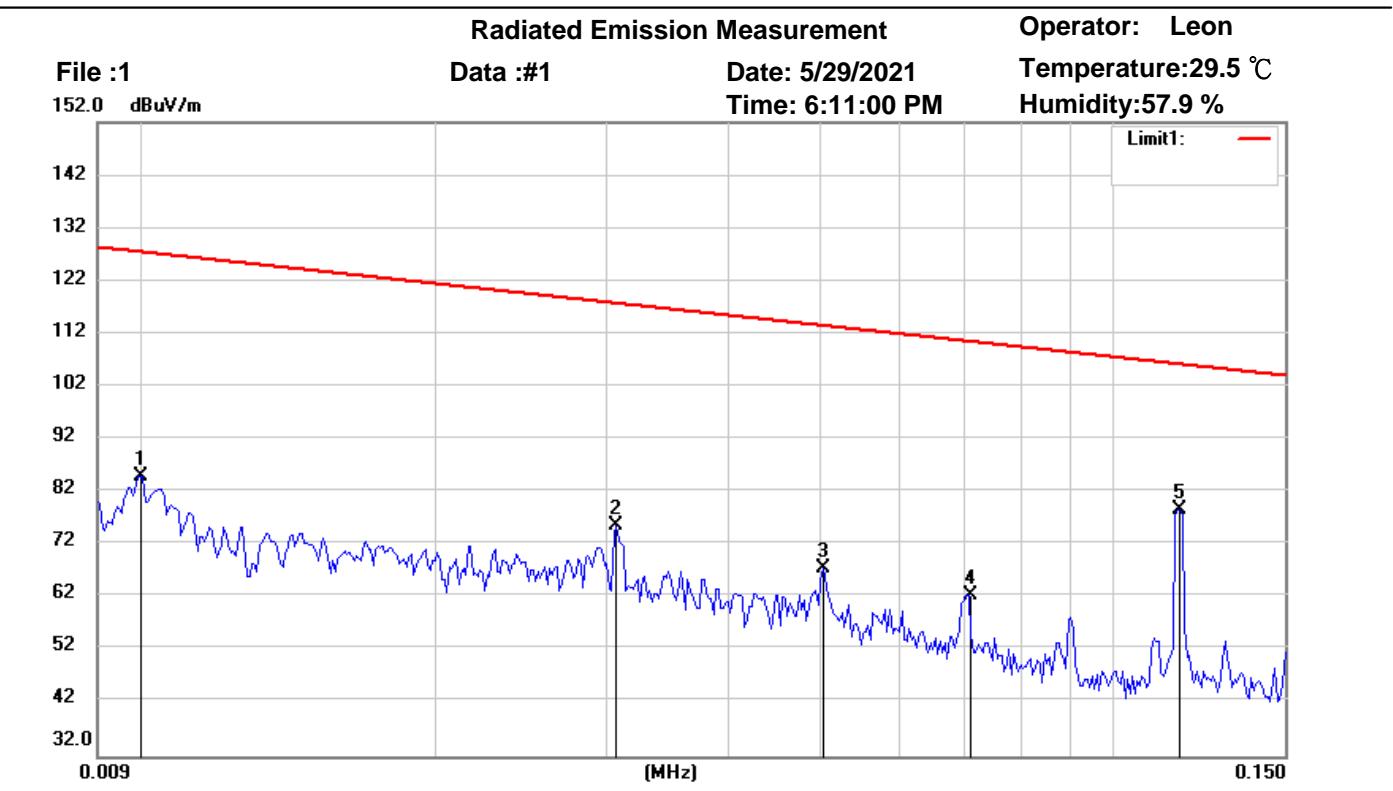

Site : 966 Chamber

Condition : FCC\_15.209 RE (9k-30M) (3M)

Polarization:

EUT : W6M22105-20884

Power : 120V.a.c.

M/N:

Distance: 3m

Test Mode :

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0100	1.09	peak	83.92	85.01	127.60	100	245	-42.59	
	0.0308	-0.47	peak	76.13	75.66	117.83	100	73	-42.17	
	0.0502	-4.28	peak	71.68	67.40	113.58	100	96	-46.18	
	0.0710	-6.29	peak	68.77	62.48	110.57	100	155	-48.09	
*	0.1170	14.78	peak	63.96	78.74	106.24			-27.50	RF Power



**Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
Tel:+886-2-6606-8877  
Fax:+886-2-6606-8879**

**Radiated Emission Measurement**

**File :2** **Data :#1** **Date: 5/29/2021** **Time: 6:14:52 PM** **Operator: Leon**  
**132.0 dB $\mu$ V/m** **Temperature:29.5 °C** **Humidity:57.9 %**

The graph displays the measured radiated emission (blue line) against the frequency (MHz) on the x-axis. The y-axis represents the measured value in dB $\mu$ V/m. A red line represents the limit. Four specific peaks are marked with 'X' and labeled 1, 2, 3, and 4 from left to right. The x-axis ranges from 0.150 to 30.000 MHz, and the y-axis ranges from 12.0 to 122 dB $\mu$ V/m.

**Site : 966 Chamber**

Condition : FCC\_15.209 RE (9k-30M) (3M)

## Polarization:

EUT : W6M22105-20884

**Power :** 120V.a.c.

**M/N:**

**Distance:** 3m

## Test Mode :

### Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.5837	-5.52	peak	50.78	45.26	72.28	100	189	-27.02	
	1.0470	-6.40	peak	45.86	39.46	67.20	100	236	-27.74	
	3.7042	4.91	peak	36.63	41.54	69.54	100	215	-28.00	
	16.7301	6.24	peak	32.96	39.20	69.54	100	85	-30.34	

\*:Maximum data    x:Over limit    !:over margin