



**SLOVENSKA
AKREDITACIJA**
SIST EN ISO/IEC 17025
LP-009

Test report

Number: T251-0651/21 **Project file:** C20211124
Date: 2022-09-01 **Pages:** 72

Product: Smart Key Device

Type reference: SKD

Ratings: Battery powered: 1x Alkaline CR2032 3 Vdc
Protection class: III

Trademark:



Applicant: RIMAC Automobili d.o.o.,
Ljubljanska 7, 10431 Sveta Nedelja, HR-Croatia

Manufacturer: RIMAC Automobili d.o.o.,
Ljubljanska 7, 10431 Sveta Nedelja, HR-Croatia

Place of manufacture: RIMAC Automobili d.o.o.,
Ljubljanska 7, 10431 Sveta Nedelja, HR-Croatia

Summary of testing

Testing method: ANSI C63.10:2013 (Clause 6.3, 6.4, 6.5, 6.6, 6.9)

Testing location: SIQ Ljubljana, Mašera-Spasićeva ulica 10, SI-1000 Ljubljana, Slovenia

Remarks: Date of receipt of test items: 2021-04-09
Number of items tested: 1
Date of performance of tests: 2021-05-27 - 2021-07-08
The test results presented in this report relate only to the items tested.

The product complies with the requirements of the testing methods.

The product also complies with: 47 CFR Part 15, Subpart C (§15.203, §15.207 (a), §15.205; §15.209; §15.215; §15.249) RSS-210 Issue 10 with Amendment (Clause 7.2), RSS-Gen, Issue 5 with Amendment 1 & 2 (Clause 6.7, 8.8, 8.9, 8.10).

Tested by: Luka Cvajnar

Approved by: Marjan Mak

The report shall not be reproduced except in full.

CONTENTS

	page
1 <u>GENERAL</u>	3
1.1 EQUIPMENT UNDER TEST	3
1.2 OCCUPIED BANDWIDTH MEASUREMENT	5
1.3 QUASI-PEAK DETECTOR	5
1.4 PEAK, RMS, AND AVERAGE DETECTORS	5
2 <u>LIMITS</u>	6
2.1 SUBPART C: INTENTIONAL RADIATORS	6
3 <u>ALL TEST EQUIPMENT AND THEIR DESCRIPTION</u>	7
3.1 GENERAL INFORMATION	7
3.2 OTHER INSTRUMENT INFORMATION AND AUXILIARY EQUIPMENT	8
4 <u>CONVERSION FACTORS AND ALL OTHER FORMULAS</u>	40
5 <u>GENERAL AND SPECIAL CONDITIONS DESCRIPTION</u>	41
5.1 GENERAL CONDITION DESCRIPTION	41
5.2 SPECIAL CONDITION DESCRIPTION	44
6 <u>MEASUREMENT UNCERTAINTY</u>	45
6.1 APPLICATION OF DECISION RULE	46
7 <u>TEST SUMMARY</u>	47
7.1 OPERATING VOLTAGES/FREQUENCIES USED FOR TESTING	47
8 <u>EMISSION TESTS</u>	48
8.1 47 CFR § 15.203 ANTENNA REQUIREMENTS	48
8.2 47 CFR § 15.207 CONDUCTED EMISSION MEASUREMENT (INTENTIONAL RADIATOR)	49
8.3 47 CFR § 15.205, § 15.209, § 15.249 RADIATED EMISSION MEASUREMENT (INTENTIONAL RADIATOR)	50
8.4 OCCUPIED BANDWIDTH	64
8.5 20 dB EMISSION BANDWIDTH(15.215 (C))	68

1 GENERAL

History sheet			
Date	Report No.	Change	Revision
2022-09-01	T251-0651/21	Initial Test Report issued.	--

Environmental conditions:

Ambient temperature: 15 °C to 35 °C

Relative humidity: 30 % to 60 %

Atmospheric pressure: 860 mbar to 1060 mbar

1.1 Equipment under test

Smart Key System

Type: SKD

FCC ID: 2A2HN-RIM1404

IC: 28731-RIM1404


General product information

The SKM unit represents the main unit of the vehicle access system and is installed in the vehicle. Its function is communication, identification and awakening of SKD modules by RKE, PEPS and Immobilizer protocols. Through CAN and LIN buses, it provides secure communication with in-vehicle systems. The integrated Power Management system ensures that the SKM is always in power efficient mode and only raises the sub-systems that are essentially needed for the current system functionality.

Channel	Operating frequency (MHz)
Low	914.20
Middle	914.70
High	915.40

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

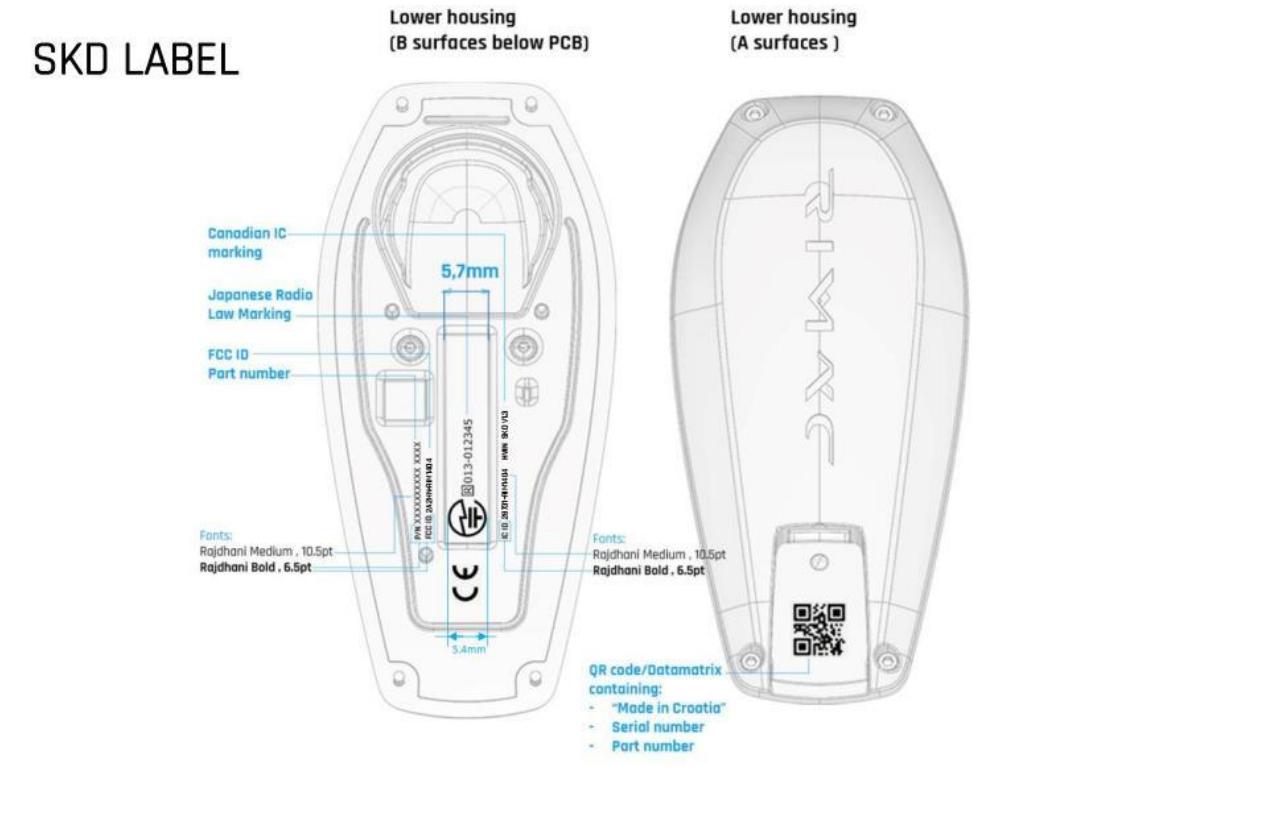

1.2 Occupied bandwidth measurement

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1 kHz
30 to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz

1.3 Quasi-peak detector

Frequency range	Bandwidth (-6dB)
10 Hz to 20 kHz	Full range (wideband)
10 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz

1.4 Peak, rms, and average detectors

Frequency range	Bandwidth (-6dB)
10 Hz to 20 kHz	10, 100, 1000 Hz
10 kHz to 150 kHz	1 and 10 kHz
150 kHz to 30 MHz	1 and 10 kHz
30 MHz to 1 GHz	10 and 100 kHz
1 GHz to 40 GHz	0.1, 1.0 and 10 MHz

2 LIMITS

2.1 Subpart C: Intentional Radiators

2.1.1 Section 15.207; Conducted emission limits:

CLASS B limits:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 – 56*	56 – 46*
0.5 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

The shown limits in table shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.
- Carrier current systems operating below 30 MHz are also subject to the radiated emission limits as appropriate.

2.1.2 Section 15.209; Radiated emission limits:

CLASS B limits:

Frequency Range (MHz)	Limits (dB μ V/m)	Test distance (m)
0,009 to 0,490	$20 \log(2400/F(\text{kHz}))$	Quasi Peak 300
0,490 to 1,705	$20 \log(24000/F(\text{kHz}))$	Quasi Peak 30
1,705 to 30,0	29.5	Quasi Peak 30
30 to 88	40**	Quasi Peak 3
88 to 216	43.5**	Quasi Peak 3
216 to 960	46**	Quasi Peak 3
960 to 1000	54	Quasi Peak 3
above 1000	54	Average 3
above 1000	74	Peak 3

** Except as provided in paragraph below, fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

NOTE: For special limits refer to standard

3 ALL TEST EQUIPMENT AND THEIR DESCRIPTION

3.1 General information

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, EMI receiver	ESW	109875	2019-12	2021-12	24 months	
Rohde-Schwarz, RFI receiver	ESU8	105187	2020-07	2022-07	24 months	
Rohde-Schwarz, RFI receiver	ESU26	106897	2020-06	2022-06	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2020-06	2022-06	24 months	X
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 109843)	109063	2020-07	2022-07	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	109064	2020-08	2022-08	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS002	2020-06	2022-06	24 months	X
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	109056	2020-07	2022-07	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	109057	2020-08	2022-08	24 months	
Horn Antenna, EMCO	3116	/	2020-09	2022-09	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck Active loop antenna	FMZB 1519B	/	2021-04	2022-10	18 months	X

3.2 Other instrument information and auxiliary equipment

Description	Model No.	Bandwidth	Detector functions	Antenna factors	Cable loss	Range
Rohde-Schwarz, AMN	ENV216	/	/	/	/	9 kHz – 30 MHz
Rohde & Schwarz, Artificial main network	ESH 2-Z5	/	/	/	/	9 kHz – 30 MHz
Rohde-Schwarz, RFI receiver	ESU8	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 8 GHz
Rohde-Schwarz, EMI receiver	ESW	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 8 GHz
Rohde-Schwarz, RFI receiver	ESU26	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 26.5 GHz
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	/	/	/	/	30 MHz – 18 GHz
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 109843)	/	/	See section 3.2.2	/	30 MHz – 6 GHz
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	/	/	See section 3.2.2	/	0.8 GHz – 18 GHz
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	/	/	/	/	30 MHz – 18 GHz
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	/	/	See section 3.2.2	/	30 MHz – 6 GHz
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	/	/	See section 3.2.2	/	0.8 GHz – 18 GHz
Horn Antenna, EMCO	3116	/	/	See section 3.2.2	/	18 GHz – 40 GHz
Schwarzbeck Active loop antenna	FMZB 1519B	/		See section 3.2.2	/	9 kHz – 30 MHz

3.2.1 Cable loss and attenuation of radiated emission

3.2.1.1 Conducted emission cable (SIQ-K115)

Frequency (9kHz-30MHz)	Cable length (meters)	Loss (dB)
0.009000	4	0.0
0.010000	4	0.0
0.020000	4	0.0
0.030000	4	0.0
0.040000	4	0.0
0.050000	4	0.0
0.060000	4	0.0
0.070000	4	0.0
0.080000	4	0.0
0.090000	4	0.0
0.100000	4	0.0
0.200000	4	0.1
0.300000	4	0.0
0.400000	4	0.0
0.500000	4	0.0
0.600000	4	0.0
0.700000	4	0.0
0.800000	4	0.0
0.900000	4	0.0
1.000000	4	0.0
2.000000	4	0.1
3.000000	4	0.1
4.000000	4	0.1
5.000000	4	0.1
6.000000	4	0.1
7.000000	4	0.2
8.000000	4	0.2
9.000000	4	0.2
10.000000	4	0.2
20.000000	4	0.3
30.000000	4	0.3

3.2.1.2 Radiated emission attenuation

SAC1		SAC2	
Frequency (30 MHz – 6 GHz)	Attenuation (dB)	Frequency (30 MHz – 6 GHz)	Attenuation (dB)
30,00	0,40	30,00	0,41
35,00	0,43	35,00	0,44
40,00	0,46	40,00	0,47
45,00	0,49	45,00	0,50
50,00	0,52	50,00	0,53
55,00	0,55	55,00	0,55
60,00	0,57	60,00	0,58
65,00	0,59	65,00	0,60
70,00	0,62	70,00	0,63
75,00	0,64	75,00	0,65
80,00	0,66	80,00	0,67
85,00	0,68	85,00	0,70
90,00	0,71	90,00	0,72
95,00	0,73	95,00	0,73
100,00	0,75	100,00	0,76
125,00	0,84	125,00	0,85
150,00	0,93	150,00	0,94
175,00	1,00	175,00	1,01
200,00	1,07	200,00	1,09
225,00	1,14	225,00	1,18
250,00	1,20	250,00	1,23
275,00	1,27	275,00	1,31
300,00	1,33	300,00	1,38
325,00	1,37	325,00	1,48
350,00	1,43	350,00	1,51
375,00	1,49	375,00	1,58
400,00	1,54	400,00	1,62
425,00	1,59	425,00	1,69
450,00	1,65	450,00	1,74
475,00	1,68	475,00	1,82
500,00	1,72	500,00	1,85
525,00	1,79	525,00	1,93
550,00	1,85	550,00	1,98
575,00	1,85	575,00	2,03
600,00	1,95	600,00	2,05
625,00	1,97	625,00	2,16
650,00	2,00	650,00	2,15
675,00	2,05	675,00	2,33
700,00	2,10	700,00	2,25
725,00	2,13	725,00	2,30
750,00	2,19	750,00	2,34
775,00	2,21	775,00	2,44
800,00	2,27	800,00	2,50
825,00	2,31	825,00	2,56
850,00	2,34	850,00	2,55
875,00	2,36	875,00	2,56
900,00	2,41	900,00	2,63
925,00	2,43	925,00	2,70
950,00	2,54	950,00	2,76
975,00	2,52	975,00	2,78
1000,00	2,55	1000,00	2,84
1050,00	2,59	1050,00	2,87
1100,00	2,69	1100,00	2,96
1150,00	2,74	1150,00	3,14

1200,00	2,84	1200,00	3,08
1250,00	2,88	1250,00	3,16
1300,00	2,98	1300,00	3,33
1350,00	3,11	1350,00	3,38
1400,00	3,12	1400,00	3,33
1450,00	3,20	1450,00	3,56
1500,00	3,25	1500,00	3,57
1600,00	3,39	1600,00	3,71
1650,00	3,42	1650,00	3,70
1700,00	3,60	1700,00	3,78
1750,00	3,53	1750,00	3,81
1800,00	3,59	1800,00	3,93
1850,00	3,66	1850,00	4,07
1900,00	3,67	1900,00	4,00
1950,00	3,72	1950,00	4,18
2000,00	3,77	2000,00	4,08
2050,00	3,91	2050,00	4,16
2100,00	3,87	2100,00	4,26
2150,00	3,89	2150,00	4,27
2200,00	3,99	2200,00	4,31
2250,00	3,99	2250,00	4,39
2300,00	4,02	2300,00	4,49
2350,00	4,10	2350,00	4,55
2400,00	4,20	2400,00	4,57
2450,00	4,40	2450,00	4,62
2500,00	4,20	2500,00	4,74
2550,00	4,24	2550,00	4,72
2600,00	4,30	2600,00	4,84
2650,00	4,37	2650,00	4,77
2700,00	4,40	2700,00	4,81
2750,00	4,47	2750,00	4,90
2800,00	4,50	2800,00	5,00
2850,00	4,52	2850,00	4,98
2900,00	4,59	2900,00	5,06
2950,00	4,77	2950,00	5,07
3000,00	4,65	3000,00	5,15
3050,00	4,72	3050,00	5,23
3100,00	4,78	3100,00	5,34
3150,00	4,80	3150,00	5,25
3200,00	4,83	3200,00	5,33
3250,00	4,91	3250,00	5,38
3300,00	4,98	3300,00	5,48
3350,00	4,87	3350,00	5,48
3400,00	4,98	3400,00	5,52
3450,00	5,01	3450,00	5,76
3500,00	5,14	3500,00	5,55
3550,00	5,18	3550,00	5,60
3600,00	5,15	3600,00	5,64
3650,00	5,20	3650,00	5,78
3700,00	5,29	3700,00	5,74
3750,00	5,40	3750,00	5,86
3800,00	5,33	3800,00	5,82
3850,00	5,32	3850,00	5,88
3900,00	5,37	3900,00	5,89
3950,00	5,41	3950,00	5,95
4000,00	5,65	4000,00	6,02
4050,00	5,84	4050,00	6,07
4100,00	5,69	4100,00	6,01
4150,00	5,65	4150,00	6,10

4200,00	5,71	4200,00	6,17
4250,00	5,65	4250,00	6,19
4300,00	5,75	4300,00	6,27
4350,00	5,59	4350,00	6,32
4400,00	5,96	4400,00	6,41
4450,00	5,81	4450,00	6,53
4500,00	6,02	4500,00	6,51
4550,00	5,93	4550,00	6,46
4600,00	5,90	4600,00	6,61
4650,00	6,03	4650,00	6,82
4700,00	5,96	4700,00	6,60
4750,00	6,47	4750,00	6,63
4800,00	6,07	4800,00	6,78
4850,00	6,36	4850,00	6,69
4900,00	6,05	4900,00	6,77
4950,00	6,81	4950,00	6,95
5000,00	6,25	5000,00	6,96
5050,00	6,41	5050,00	6,88
5100,00	6,67	5100,00	6,92
5150,00	6,65	5150,00	6,99
5200,00	6,31	5200,00	6,98
5250,00	7,40	5250,00	7,05
5300,00	6,48	5300,00	7,26
5350,00	6,68	5350,00	7,22
5400,00	7,07	5400,00	7,44
5450,00	6,86	5450,00	7,19
5500,00	6,65	5500,00	7,29
5550,00	6,71	5550,00	7,32
5600,00	6,72	5600,00	7,48
5650,00	6,69	5650,00	7,37
5700,00	6,87	5700,00	7,43
5750,00	6,89	5750,00	7,35
5800,00	6,92	5800,00	7,52
5850,00	6,90	5850,00	7,48
5900,00	6,89	5900,00	7,53
5950,00	6,95	5950,00	7,58
6000,00	7,00	6000,00	7,69

Frequency (1 GHz – 40 GHz)	Attenuation (dB)
1006,354025	0,8
1056,671726	0,8
1109,505312	0,8
1164,980578	0,8
1223,229607	0,9
1284,391087	0,9
1348,610641	0,9
1416,041173	0,9
1486,843232	1,0
1561,185394	1,0
1639,244663	1,0
1721,206896	1,0
1807,267241	1,1
1897,630603	1,1
1992,512134	1,1
2092,137740	1,2
2196,744627	1,2
2306,581859	1,2
2421,910951	1,3
2543,006499	1,3
2670,156824	1,3
2803,664665	1,4
2943,847898	1,4
3091,040293	1,4
3245,592308	1,5
3407,871923	1,5
3578,265520	1,5
3757,178796	1,6
3945,037735	1,6
4142,289622	1,7
4349,404103	1,7
4566,874308	1,8
4795,218024	1,8
5034,978925	1,9
5286,727871	1,9
5551,064265	2,0
5828,617478	2,0
6120,048352	2,1
6426,050770	2,1
6747,353308	2,2
7084,720973	2,4
7438,957022	2,4
7810,904873	2,5
8201,450117	2,5
8611,522623	2,6
9042,098754	2,7
9494,203692	2,8
9968,913876	2,8
10467,359570	2,9
10990,727549	3,1
11540,263926	3,1
12117,277122	3,2
12723,140978	3,3
13359,298027	3,4
14027,262929	3,6
14728,626075	3,8
15465,057379	3,9

16238,310248	3,9
17050,225760	4,1
17902,737048	4,2
18797,873901	5,0
19737,767596	4,8
20724,655975	4,7
21760,888774	4,8
22848,933213	4,9
23991,379873	5,3
25190,948867	5,4
26450,496311	5,8
27773,021126	5,9
29161,672182	6,5
30619,755791	6,2
32150,743581	6,6
33758,280760	8,5
35446,194798	7,3
37218,504538	8,5
39079,429765	7,5
40000,000000	8,1

3.2.2 Antenna factors

3.2.2.1 Antenna FMZB 1519

Frequency (MHz)	Antenna factor FMZB 1519 B
0,01	20,66
0,01	20,38
0,02	19,31
0,03	19,05
0,04	18,93
0,05	18,87
0,06	18,82
0,07	18,79
0,08	18,76
0,09	18,74
0,10	18,72
0,11	18,71
0,12	18,69
0,13	18,68
0,14	18,67
0,15	18,66
0,20	18,63
0,30	18,59
0,40	18,56
0,50	18,54
0,60	18,53
0,70	18,51
0,80	18,50
0,90	18,50
1,00	18,49
2,00	18,43
3,00	18,40
4,00	18,37
5,00	18,35
6,00	18,26
7,00	18,21
8,00	18,14
9,00	18,07
10,00	17,99
11,00	17,91
12,00	17,84
13,00	17,77
14,00	17,71
15,00	17,66
16,00	17,61
17,00	17,57
18,00	17,53
19,00	17,51
20,00	17,49
21,00	17,49
22,00	17,50
23,00	17,53
24,00	17,56
25,00	17,59

26,00	17,64
27,00	17,70
28,00	17,77
29,00	17,85
30,00	17,94

3.2.2.2 Antenna HL562E

Frequency (MHz)	Antenna factor HL562E (SN 100843)	Antenna factor HL562E (SN 100842)
30,00	18,86	18,95
31,00	18,27	18,43
32,00	17,68	17,88
33,00	17,11	17,33
34,00	16,57	16,79
35,00	16,00	16,23
36,00	15,41	15,67
37,00	14,84	15,10
38,00	14,25	14,53
39,00	13,65	13,94
40,00	13,04	13,34
41,00	12,40	12,72
42,00	11,77	12,07
43,00	11,09	11,42
44,00	10,41	10,72
45,00	9,71	10,02
46,00	9,00	9,30
47,00	8,28	8,58
48,00	7,57	7,84
49,00	6,87	7,13
50,00	6,22	6,44
51,00	5,60	5,81
52,00	5,07	5,26
53,00	4,64	4,83
54,00	4,35	4,54
55,00	4,19	4,41
56,00	4,17	4,45
57,00	4,30	4,59
58,00	4,54	4,79
59,00	4,84	5,07
60,00	5,17	5,38
61,00	5,50	5,66
62,00	5,79	5,88
63,00	6,06	6,15
64,00	6,33	6,53
65,00	6,59	6,89
66,00	6,85	7,18
67,00	7,09	7,41
68,00	7,32	7,63
69,00	7,55	7,82
70,00	7,75	7,99
71,00	7,93	8,15
72,00	8,10	8,27
73,00	8,24	8,37
74,00	8,38	8,48
75,00	8,51	8,63
76,00	8,62	8,78
77,00	8,74	8,90
78,00	8,85	9,00
79,00	8,96	9,09
80,00	9,05	9,18
81,00	9,14	9,24
82,00	9,21	9,29
83,00	9,27	9,36
84,00	9,33	9,41
85,00	9,39	9,46

86,00	9,43	9,51
87,00	9,48	9,57
88,00	9,49	9,60
89,00	9,52	9,63
90,00	9,54	9,68
91,00	9,57	9,73
92,00	9,60	9,77
93,00	9,63	9,82
94,00	9,66	9,87
95,00	9,70	9,92
96,00	9,74	9,97
97,00	9,79	10,03
98,00	9,85	10,10
99,00	9,92	10,18
100,00	9,99	10,25
101,00	10,05	10,33
102,00	10,16	10,42
103,00	10,23	10,50
104,00	10,32	10,58
105,00	10,40	10,65
106,00	10,48	10,73
107,00	10,53	10,79
108,00	10,55	10,84
109,00	10,55	10,87
110,00	10,54	10,89
111,00	10,53	10,91
112,00	10,54	10,93
113,00	10,54	10,94
114,00	10,53	10,93
115,00	10,52	10,90
116,00	10,49	10,87
117,00	10,48	10,84
118,00	10,44	10,78
119,00	10,38	10,72
120,00	10,32	10,63
121,00	10,26	10,52
122,00	10,21	10,41
123,00	10,16	10,30
124,00	10,02	10,26
125,00	10,06	10,21
126,00	10,01	10,10
127,00	9,93	9,98
128,00	9,71	9,86
129,00	9,74	9,89
130,00	9,70	9,87
131,00	9,61	9,78
132,00	9,52	9,68
133,00	9,44	9,58
134,00	9,35	9,47
135,00	9,25	9,36
136,00	9,16	9,26
137,00	9,07	9,16
138,00	8,97	9,05
139,00	8,88	8,95
140,00	8,79	8,85
141,00	8,70	8,74
142,00	8,60	8,65
143,00	8,51	8,55
144,00	8,42	8,46
145,00	8,34	8,38
146,00	8,26	8,31

147,00	8,18	8,23
148,00	8,11	8,17
149,00	8,04	8,11
150,00	7,97	8,06
151,00	7,92	8,02
152,00	7,88	8,00
153,00	7,84	7,97
154,00	7,82	7,98
155,00	7,83	8,03
156,00	7,87	8,07
157,00	7,88	8,05
158,00	7,89	8,05
159,00	7,88	8,06
160,00	7,87	8,08
161,00	7,88	8,12
162,00	7,89	8,14
163,00	7,91	8,17
164,00	7,94	8,19
165,00	7,98	8,22
166,00	8,03	8,24
167,00	8,09	8,24
168,00	8,14	8,37
169,00	8,21	8,46
170,00	8,31	8,54
171,00	8,39	8,64
172,00	8,48	8,71
173,00	8,59	8,81
174,00	8,76	8,92
175,00	8,95	9,06
176,00	9,17	9,23
177,00	9,37	9,42
178,00	9,42	9,50
179,00	9,24	9,39
180,00	8,88	9,09
181,00	8,48	8,70
182,00	8,16	8,37
183,00	7,94	8,14
184,00	7,82	8,01
185,00	7,74	7,93
186,00	7,70	7,89
187,00	7,69	7,89
188,00	7,69	7,91
189,00	7,72	7,97
190,00	7,78	8,05
191,00	7,81	8,01
192,00	7,78	7,97
193,00	7,77	7,97
194,00	7,80	8,01
195,00	7,85	8,07
196,00	7,91	8,14
197,00	7,98	8,21
198,00	8,05	8,26
199,00	8,14	8,25
200,00	8,22	8,49
202,00	8,41	8,65
204,00	8,56	8,77
206,00	8,68	8,88
208,00	8,79	8,98
210,00	8,85	9,06
212,00	8,84	9,02
214,00	8,80	8,96

216,00	8,67	8,83
218,00	8,40	8,56
220,00	8,28	8,41
222,00	8,43	8,55
224,00	8,69	8,79
226,00	8,91	9,04
228,00	9,09	9,21
230,00	9,25	9,36
232,00	9,39	9,48
234,00	9,52	9,60
236,00	9,68	9,71
238,00	9,76	9,82
240,00	9,83	9,91
242,00	9,83	9,93
244,00	9,83	9,94
246,00	9,86	9,97
248,00	9,91	10,01
250,00	10,00	10,03
252,00	10,04	10,16
254,00	10,13	10,25
256,00	10,22	10,34
258,00	10,31	10,42
260,00	10,39	10,51
262,00	10,48	10,60
264,00	10,50	10,61
266,00	10,54	10,63
268,00	10,61	10,70
270,00	10,67	10,77
272,00	10,73	10,82
274,00	10,79	10,89
276,00	10,85	10,95
278,00	10,92	11,02
280,00	11,00	11,07
282,00	11,08	11,16
284,00	11,14	11,23
286,00	11,20	11,28
288,00	11,26	11,33
290,00	11,30	11,37
292,00	11,37	11,40
294,00	11,43	11,44
296,00	11,46	11,49
298,00	11,52	11,54
300,00	11,64	11,65
302,00	11,77	11,82
304,00	11,81	11,91
306,00	11,83	11,93
308,00	11,87	11,95
310,00	11,91	11,99
312,00	11,97	12,03
314,00	12,02	12,12
316,00	12,09	12,20
318,00	12,16	12,26
320,00	12,21	12,33
322,00	12,27	12,39
324,00	12,34	12,46
326,00	12,38	12,49
328,00	12,39	12,48
330,00	12,41	12,49
332,00	12,46	12,57
334,00	12,54	12,67
336,00	12,58	12,65

338,00	12,66	12,69
340,00	12,72	12,78
342,00	12,76	12,82
344,00	12,81	12,87
346,00	12,87	12,93
348,00	12,93	12,99
350,00	13,01	13,05
352,00	13,09	13,13
354,00	13,17	13,20
356,00	13,23	13,27
358,00	13,28	13,34
360,00	13,32	13,38
362,00	13,38	13,41
364,00	13,44	13,44
366,00	13,49	13,49
368,00	13,55	13,55
370,00	13,63	13,64
372,00	13,73	13,75
374,00	13,78	13,80
376,00	13,82	13,83
378,00	13,85	13,87
380,00	13,89	13,90
382,00	13,93	13,95
384,00	14,00	14,02
386,00	14,06	14,09
388,00	14,13	14,14
390,00	14,22	14,17
392,00	14,23	14,27
394,00	14,29	14,33
396,00	14,35	14,40
398,00	14,41	14,47
400,00	14,45	14,50
402,00	14,50	14,51
404,00	14,54	14,51
406,00	14,57	14,52
408,00	14,62	14,56
410,00	14,68	14,63
412,00	14,73	14,74
414,00	14,79	14,86
416,00	14,84	14,94
418,00	14,86	14,98
420,00	14,88	14,99
422,00	14,89	15,01
424,00	14,93	15,04
426,00	14,97	15,07
428,00	15,01	15,11
430,00	15,06	15,16
432,00	15,11	15,20
434,00	15,16	15,26
436,00	15,21	15,28
438,00	15,26	15,36
440,00	15,31	15,40
442,00	15,36	15,45
444,00	15,41	15,49
446,00	15,47	15,54
448,00	15,54	15,60
450,00	15,57	15,66
452,00	15,62	15,70
454,00	15,66	15,73
456,00	15,72	15,78
458,00	15,79	15,84

460,00	15,89	15,95
462,00	15,99	16,10
464,00	16,08	16,19
466,00	16,12	16,20
468,00	16,15	16,21
470,00	16,16	16,22
472,00	16,16	16,22
474,00	16,17	16,23
476,00	16,19	16,25
478,00	16,22	16,28
480,00	16,27	16,31
482,00	16,31	16,36
484,00	16,37	16,41
486,00	16,45	16,48
488,00	16,50	16,59
490,00	16,55	16,63
492,00	16,60	16,68
494,00	16,63	16,72
496,00	16,64	16,75
498,00	16,65	16,78
500,00	16,66	16,77
502,00	16,67	16,77
504,00	16,66	16,77
506,00	16,65	16,75
508,00	16,65	16,73
510,00	16,66	16,73
512,00	16,69	16,78
514,00	16,75	16,88
516,00	16,84	16,96
518,00	16,89	17,00
520,00	16,91	16,99
522,00	16,92	16,97
524,00	16,92	16,95
526,00	16,93	16,95
528,00	16,94	16,97
530,00	16,95	16,99
532,00	16,97	17,00
534,00	16,98	17,01
536,00	17,00	17,02
538,00	17,01	17,04
540,00	17,04	17,06
542,00	17,06	17,09
544,00	17,10	17,11
546,00	17,14	17,18
548,00	17,17	17,21
550,00	17,20	17,25
552,00	17,25	17,29
554,00	17,30	17,34
556,00	17,33	17,39
558,00	17,36	17,44
560,00	17,39	17,47
562,00	17,42	17,51
564,00	17,45	17,52
566,00	17,47	17,54
568,00	17,51	17,57
570,00	17,57	17,63
572,00	17,64	17,69
574,00	17,75	17,79
576,00	17,86	17,90
578,00	17,96	17,99
580,00	18,02	18,04

582,00	18,04	18,07
584,00	18,04	18,08
586,00	18,04	18,08
588,00	18,04	18,09
590,00	18,04	18,09
592,00	18,06	18,10
594,00	18,07	18,10
596,00	18,08	18,11
598,00	18,10	18,13
600,00	18,13	18,15
602,00	18,17	18,18
604,00	18,20	18,20
606,00	18,23	18,22
608,00	18,26	18,24
610,00	18,28	18,24
612,00	18,31	18,25
614,00	18,33	18,27
616,00	18,35	18,34
618,00	18,36	18,35
620,00	18,37	18,36
622,00	18,38	18,37
624,00	18,39	18,37
626,00	18,40	18,37
628,00	18,40	18,37
630,00	18,41	18,37
632,00	18,43	18,39
634,00	18,43	18,42
636,00	18,45	18,45
638,00	18,48	18,47
640,00	18,52	18,51
642,00	18,57	18,57
644,00	18,65	18,66
646,00	18,73	18,79
648,00	18,79	18,93
650,00	18,86	19,08
652,00	18,91	19,17
654,00	18,96	19,22
656,00	18,98	19,19
658,00	18,99	19,17
660,00	18,99	19,13
662,00	18,99	19,10
664,00	18,98	19,09
666,00	18,98	19,08
668,00	18,99	19,08
670,00	19,01	19,09
672,00	19,00	19,10
674,00	19,00	19,11
676,00	18,99	19,13
678,00	19,00	19,14
680,00	19,02	19,16
682,00	19,04	19,19
684,00	19,07	19,21
686,00	19,09	19,24
688,00	19,10	19,26
690,00	19,12	19,28
692,00	19,14	19,30
694,00	19,15	19,34
696,00	19,18	19,38
698,00	19,20	19,42
700,00	19,22	19,44
702,00	19,25	19,44

704,00	19,28	19,44
706,00	19,30	19,44
708,00	19,35	19,45
710,00	19,40	19,46
712,00	19,46	19,48
714,00	19,51	19,49
716,00	19,55	19,51
718,00	19,59	19,56
720,00	19,63	19,61
722,00	19,70	19,68
724,00	19,78	19,76
726,00	19,86	19,84
728,00	19,94	19,93
730,00	20,02	20,04
732,00	20,06	20,12
734,00	20,08	20,16
736,00	20,07	20,15
738,00	20,04	20,09
740,00	20,01	20,05
742,00	19,99	19,99
744,00	19,98	19,97
746,00	19,97	19,94
748,00	19,95	19,94
750,00	19,94	19,93
752,00	19,93	19,92
754,00	19,93	19,93
756,00	19,95	19,94
758,00	19,95	19,96
760,00	19,98	19,97
762,00	20,00	19,98
764,00	20,02	19,99
766,00	20,04	20,01
768,00	20,09	20,02
770,00	20,13	20,04
772,00	20,18	20,06
774,00	20,22	20,10
776,00	20,22	20,17
778,00	20,24	20,20
780,00	20,25	20,22
782,00	20,27	20,24
784,00	20,27	20,24
786,00	20,28	20,24
788,00	20,28	20,23
790,00	20,30	20,24
792,00	20,31	20,25
794,00	20,32	20,25
796,00	20,32	20,26
798,00	20,35	20,29
800,00	20,39	20,32
802,00	20,43	20,39
804,00	20,48	20,45
806,00	20,52	20,56
808,00	20,57	20,65
810,00	20,66	20,77
812,00	20,74	20,87
814,00	20,80	20,94
816,00	20,83	20,95
818,00	20,84	20,96
820,00	20,85	20,93
822,00	20,84	20,90
824,00	20,81	20,89

826,00	20,82	20,86
828,00	20,81	20,86
830,00	20,81	20,87
832,00	20,82	20,86
834,00	20,84	20,86
836,00	20,85	20,86
838,00	20,86	20,87
840,00	20,86	20,88
842,00	20,85	20,88
844,00	20,85	20,90
846,00	20,84	20,91
848,00	20,86	20,93
850,00	20,89	20,93
852,00	20,91	20,94
854,00	20,94	20,95
856,00	20,96	20,96
858,00	20,98	20,98
860,00	21,01	20,99
862,00	21,04	21,02
864,00	21,08	21,05
866,00	21,12	21,09
868,00	21,14	21,12
870,00	21,14	21,14
872,00	21,16	21,19
874,00	21,19	21,23
876,00	21,23	21,28
878,00	21,25	21,31
880,00	21,29	21,34
882,00	21,33	21,36
884,00	21,37	21,38
886,00	21,40	21,41
888,00	21,45	21,43
890,00	21,49	21,44
892,00	21,51	21,45
894,00	21,55	21,46
896,00	21,58	21,46
898,00	21,61	21,48
900,00	21,65	21,51
902,00	21,70	21,55
904,00	21,76	21,61
906,00	21,83	21,70
908,00	21,90	21,78
910,00	21,95	21,87
912,00	21,98	21,92
914,00	21,98	21,94
916,00	21,97	21,93
918,00	21,96	21,90
920,00	21,94	21,88
922,00	21,92	21,84
924,00	21,88	21,80
926,00	21,85	21,79
928,00	21,82	21,77
930,00	21,81	21,77
932,00	21,80	21,78
934,00	21,79	21,77
936,00	21,79	21,75
938,00	21,78	21,74
940,00	21,80	21,73
942,00	21,80	21,74
944,00	21,82	21,75
946,00	21,84	21,75

948,00	21,86	21,76
950,00	21,88	21,77
952,00	21,91	21,78
954,00	21,93	21,80
956,00	21,96	21,80
958,00	22,00	21,81
960,00	22,03	21,81
962,00	22,07	21,81
964,00	22,12	21,83
966,00	22,15	21,86
968,00	22,16	21,95
970,00	22,16	22,00
972,00	22,18	22,01
974,00	22,20	22,01
976,00	22,23	22,02
978,00	22,26	22,03
980,00	22,29	22,04
982,00	22,32	22,07
984,00	22,35	22,09
986,00	22,39	22,13
988,00	22,42	22,15
990,00	22,43	22,20
992,00	22,42	22,27
994,00	22,44	22,36
996,00	22,46	22,42
998,00	22,48	22,47
1000,00	22,52	22,54

3.2.2.3 Antenna HF907

Frequency (GHz)	Antenna factor HF907 (SN 102494)	Antenna factor HF907 (SN 102508)
1.00	24,3	24,26
1.01	24,4	24,28
1.02	24,4	24,30
1.03	24,4	24,31
1.04	24,4	24,33
1.05	24,4	24,34
1.06	24,4	24,33
1.07	24,4	24,34
1.08	24,4	24,35
1.09	24,4	24,36
1.10	24,4	24,35
1.11	24,4	24,37
1.12	24,4	24,39
1.13	24,4	24,39
1.14	24,4	24,39
1.15	24,4	24,38
1.16	24,4	24,38
1.17	24,3	24,35
1.18	24,3	24,33
1.19	24,3	24,33
1.20	24,3	24,30
1.21	24,2	24,29
1.22	24,2	24,29
1.23	24,2	24,29
1.24	24,3	24,32
1.25	24,3	24,35
1.26	24,4	24,40
1.27	24,5	24,48
1.28	24,5	24,53
1.29	24,6	24,60
1.30	24,7	24,68
1.31	24,8	24,73
1.32	24,8	24,78
1.33	24,9	24,84
1.34	24,9	24,87
1.35	24,9	24,88
1.36	24,9	24,90
1.37	24,9	24,92
1.38	24,9	24,93
1.39	24,9	24,94
1.40	25,0	24,96
1.41	25,0	25,01
1.42	25,1	25,06
1.43	25,1	25,12
1.44	25,2	25,21
1.45	25,3	25,32
1.46	25,4	25,44
1.47	25,5	25,55
1.48	25,6	25,65
1.49	25,7	25,76
1.50	25,8	25,85
1.51	25,9	25,93
1.52	26,0	25,99
1.53	26,1	26,06
1.54	26,1	26,11

1.55	26,2	26,14
1.56	26,3	26,16
1.57	26,3	26,20
1.58	26,4	26,23
1.59	26,4	26,24
1.60	26,4	26,25
1.61	26,4	26,27
1.62	26,4	26,28
1.63	26,4	26,29
1.64	26,4	26,29
1.65	26,4	26,32
1.66	26,4	26,36
1.67	26,4	26,38
1.68	26,4	26,41
1.69	26,4	26,45
1.70	26,4	26,49
1.71	26,5	26,52
1.72	26,5	26,53
1.73	26,5	26,59
1.74	26,5	26,63
1.75	26,6	26,66
1.76	26,6	26,73
1.77	26,6	26,79
1.78	26,7	26,87
1.79	26,7	26,94
1.80	26,8	26,99
1.81	26,8	27,07
1.82	26,9	27,12
1.83	26,9	27,15
1.84	27,0	27,18
1.85	27,0	27,19
1.86	27,1	27,22
1.87	27,1	27,23
1.88	27,2	27,24
1.89	27,2	27,30
1.90	27,3	27,35
1.91	27,4	27,42
1.92	27,5	27,50
1.93	27,6	27,60
1.94	27,7	27,74
1.95	27,9	27,85
1.96	28,0	27,97
1.97	28,1	28,09
1.98	28,2	28,21
1.99	28,3	28,30
2.00	28,4	28,36
2.01	28,5	28,42
2.02	28,5	28,48
2.03	28,5	28,50
2.04	28,5	28,48
2.05	28,5	28,48
2.06	28,5	28,48
2.07	28,4	28,41
2.08	28,4	28,37
2.09	28,3	28,32
2.10	28,3	28,26
2.11	28,2	28,19
2.12	28,1	28,13
2.13	28,1	28,08
2.14	28,1	28,06
2.15	28,0	28,03

2.16	28,0	28,03
2.17	28,0	28,06
2.18	28,1	28,08
2.19	28,1	28,11
2.20	28,1	28,14
2.21	28,2	28,18
2.22	28,2	28,22
2.23	28,2	28,24
2.24	28,2	28,25
2.25	28,3	28,27
2.26	28,3	28,28
2.27	28,3	28,28
2.28	28,3	28,28
2.29	28,3	28,30
2.30	28,3	28,31
2.31	28,3	28,32
2.32	28,3	28,35
2.33	28,3	28,39
2.34	28,3	28,41
2.35	28,4	28,45
2.36	28,4	28,48
2.37	28,4	28,51
2.38	28,5	28,55
2.39	28,5	28,58
2.40	28,5	28,63
2.41	28,6	28,68
2.42	28,6	28,73
2.43	28,7	28,80
2.44	28,8	28,87
2.45	28,8	28,94
2.46	28,9	29,02
2.47	29,0	29,10
2.48	29,1	29,16
2.49	29,1	29,21
2.50	29,2	29,25
2.51	29,2	29,30
2.52	29,2	29,31
2.53	29,3	29,33
2.54	29,3	29,35
2.55	29,3	29,38
2.56	29,4	29,41
2.57	29,4	29,44
2.58	29,4	29,48
2.59	29,5	29,54
2.60	29,5	29,60
2.61	29,6	29,65
2.62	29,6	29,70
2.63	29,7	29,76
2.64	29,7	29,79
2.65	29,8	29,81
2.66	29,8	29,83
2.67	29,8	29,83
2.68	29,8	29,81
2.69	29,8	29,78
2.70	29,7	29,74
2.71	29,7	29,69
2.72	29,6	29,63
2.73	29,6	29,57
2.74	29,5	29,53
2.75	29,5	29,48
2.76	29,4	29,44

2.77	29,4	29,42
2.78	29,4	29,40
2.79	29,4	29,40
2.80	29,4	29,42
2.81	29,4	29,44
2.82	29,5	29,48
2.83	29,5	29,52
2.84	29,6	29,57
2.85	29,6	29,61
2.86	29,6	29,65
2.87	29,7	29,71
2.88	29,7	29,75
2.89	29,8	29,78
2.90	29,8	29,82
2.91	29,8	29,87
2.92	29,9	29,92
2.93	29,9	29,97
2.94	30,0	30,03
2.95	30,1	30,11
2.96	30,2	30,20
2.97	30,2	30,28
2.98	30,3	30,36
2.99	30,4	30,48
3.00	30,5	30,60
3.05	31,0	31,13
3.10	31,5	31,58
3.15	31,7	31,70
3.20	31,7	31,71
3.25	31,7	31,69
3.30	31,7	31,68
3.35	31,8	31,74
3.40	31,7	31,74
3.45	31,8	31,81
3.50	31,9	31,91
3.55	31,9	31,95
3.60	32,0	32,06
3.65	32,2	32,30
3.70	32,4	32,51
3.75	32,5	32,60
3.80	32,8	32,79
3.85	33,0	33,02
3.90	32,9	32,90
3.95	32,8	32,72
4.00	32,9	32,82
4.05	33,1	33,00
4.10	33,1	33,08
4.15	33,2	33,15
4.20	33,5	33,48
4.25	33,8	33,80
4.30	33,9	33,97
4.35	33,8	33,91
4.40	33,7	33,76
4.45	33,7	33,70
4.50	33,6	33,57
4.55	33,4	33,40
4.60	33,4	33,29
4.65	33,5	33,37
4.70	33,7	33,57
4.75	33,8	33,71
4.80	34,0	33,87
4.85	34,1	34,07

4.90	34,3	34,27
4.95	34,4	34,33
5.00	34,3	34,25
5.05	34,1	34,11
5.10	34,0	33,99
5.15	33,9	33,90
5.20	33,9	33,82
5.25	33,9	33,83
5.30	34,0	33,91
5.35	34,2	34,07
5.40	34,3	34,22
5.45	34,4	34,33
5.50	34,4	34,41
5.55	34,4	34,40
5.60	34,3	34,31
5.65	34,2	34,21
5.70	34,1	34,11
5.75	34,1	34,03
5.80	34,1	34,06
5.85	34,3	34,18
5.90	34,4	34,34
5.95	34,5	34,45
6.00	34,6	34,55
6.05	34,8	34,69
6.10	34,8	34,76
6.15	34,8	34,75
6.20	34,7	34,69
6.25	34,7	34,64
6.30	34,7	34,66
6.35	34,8	34,73
6.40	34,8	34,78
6.45	34,9	34,87
6.50	35,1	35,02
6.55	35,2	35,16
6.60	35,3	35,24
6.65	35,3	35,20
6.70	35,2	35,15
6.75	35,3	35,15
6.80	35,3	35,18
6.85	35,2	35,17
6.90	35,2	35,17
6.95	35,4	35,32
7.00	35,6	35,50
7.05	35,6	35,60
7.10	35,7	35,64
7.15	35,7	35,68
7.20	35,8	35,73
7.25	35,7	35,65
7.30	35,6	35,55
7.35	35,6	35,52
7.40	35,7	35,60
7.45	35,8	35,71
7.50	35,9	35,81
7.55	36,0	35,94
7.60	36,2	36,14
7.65	36,3	36,29
7.70	36,3	36,31
7.75	36,2	36,26
7.80	36,2	36,24
7.85	36,2	36,24
7.90	36,2	36,19

7.95	36,1	36,16
8.00	36,2	36,20
8.05	36,3	36,31
8.10	36,4	36,42
8.15	36,4	36,50
8.20	36,5	36,59
8.25	36,5	36,64
8.30	36,5	36,62
8.35	36,5	36,62
8.40	36,5	36,58
8.45	36,4	36,54
8.50	36,4	36,53
8.55	36,5	36,55
8.60	36,6	36,65
8.65	36,7	36,72
8.70	36,7	36,80
8.75	36,8	36,90
8.80	36,9	37,00
8.85	36,9	37,03
8.90	36,9	36,96
8.95	36,8	36,92
9.00	36,8	36,88
9.05	36,8	36,84
9.10	36,7	36,81
9.15	36,8	36,82
9.20	36,9	36,90
9.25	37,0	36,99
9.30	37,0	37,07
9.35	37,1	37,11
9.40	37,1	37,14
9.45	37,2	37,18
9.50	37,1	37,14
9.55	37,0	37,06
9.60	37,0	37,00
9.65	37,0	37,00
9.70	37,0	37,02
9.75	37,0	37,05
9.80	37,0	37,06
9.85	37,1	37,13
9.90	37,2	37,20
9.95	37,2	37,23
10.00	37,2	37,20
10.05	37,2	37,19
10.10	37,2	37,18
10.15	37,2	37,16
10.20	37,1	37,12
10.25	37,1	37,09
10.30	37,1	37,10
10.35	37,2	37,16
10.40	37,2	37,18
10.45	37,2	37,18
10.50	37,2	37,20
10.55	37,2	37,22
10.60	37,2	37,21
10.65	37,2	37,18
10.70	37,1	37,15
10.75	37,1	37,15
10.80	37,2	37,16
10.85	37,2	37,19
10.90	37,2	37,24
10.95	37,3	37,28

11.00	37,3	37,34
11.05	37,3	37,36
11.10	37,3	37,35
11.15	37,3	37,34
11.20	37,3	37,34
11.25	37,3	37,31
11.30	37,2	37,33
11.35	37,2	37,31
11.40	37,3	37,33
11.45	37,3	37,38
11.50	37,4	37,45
11.55	37,4	37,48
11.60	37,4	37,50
11.65	37,4	37,52
11.70	37,4	37,52
11.75	37,4	37,51
11.80	37,4	37,48
11.85	37,4	37,47
11.90	37,4	37,50
11.95	37,4	37,54
12.00	37,5	37,57
12.05	37,5	37,59
12.10	37,5	37,64
12.15	37,6	37,69
12.20	37,6	37,72
12.25	37,6	37,69
12.30	37,6	37,67
12.35	37,6	37,67
12.40	37,6	37,69
12.45	37,6	37,70
12.50	37,7	37,72
12.55	37,7	37,76
12.60	37,8	37,79
12.65	37,8	37,86
12.70	37,9	37,92
12.75	37,9	37,92
12.80	37,9	37,95
12.85	38,0	37,99
12.90	38,0	38,04
12.95	38,1	38,05
13.00	38,1	38,09
13.05	38,2	38,16
13.10	38,3	38,23
13.15	38,3	38,29
13.20	38,5	38,39
13.25	38,5	38,48
13.30	38,6	38,54
13.35	38,6	38,60
13.40	38,7	38,66
13.45	38,8	38,72
13.50	38,8	38,78
13.55	38,9	38,85
13.60	39,0	38,92
13.65	39,1	39,02
13.70	39,2	39,13
13.75	39,4	39,27
13.80	39,5	39,37
13.85	39,6	39,48
13.90	39,7	39,61
13.95	39,8	39,73
14.00	39,9	39,82

14.05	39,9	39,85
14.10	40,0	39,92
14.15	40,0	40,00
14.20	40,1	40,10
14.25	40,2	40,18
14.30	40,3	40,26
14.35	40,3	40,38
14.40	40,4	40,51
14.45	40,5	40,62
14.50	40,5	40,70
14.55	40,6	40,77
14.60	40,6	40,82
14.65	40,7	40,89
14.70	40,7	40,93
14.75	40,7	40,94
14.80	40,7	40,91
14.85	40,7	40,96
14.90	40,8	40,97
14.95	40,7	40,97
15.00	40,8	40,97
15.05	40,8	40,98
15.10	40,8	41,00
15.15	40,9	41,08
15.20	40,9	41,11
15.25	40,9	41,13
15.30	40,9	41,16
15.35	40,9	41,18
15.40	40,9	41,19
15.45	40,9	41,18
15.50	40,9	41,16
15.55	40,9	41,15
15.60	40,8	41,14
15.65	40,9	41,14
15.70	40,9	41,14
15.75	40,9	41,16
15.80	40,9	41,18
15.85	41,0	41,21
15.90	41,1	41,26
15.95	41,1	41,29
16.00	41,1	41,31
16.05	41,2	41,33
16.10	41,2	41,37
16.15	41,2	41,40
16.20	41,2	41,43
16.25	41,3	41,46
16.30	41,3	41,48
16.35	41,4	41,52
16.40	41,5	41,58
16.45	41,5	41,64
16.50	41,6	41,70
16.55	41,7	41,77
16.60	41,8	41,86
16.65	41,9	41,92
16.70	42,0	42,03
16.75	42,1	42,15
16.80	42,2	42,26
16.85	42,3	42,33
16.90	42,4	42,45
16.95	42,5	42,55
17.00	42,5	42,63
17.05	42,5	42,74

17.10	42,5	42,81
17.15	42,6	42,89
17.20	42,6	42,96
17.25	42,7	43,04
17.30	42,8	43,13
17.35	42,8	43,18
17.40	42,9	43,27
17.45	43,0	43,35
17.50	43,1	43,43
17.55	43,1	43,49
17.60	43,2	43,57
17.65	43,3	43,66
17.70	43,3	43,72
17.75	43,4	43,80
17.80	43,5	43,88
17.85	43,5	43,96
17.90	43,7	44,06
17.95	43,8	44,14
18.00	43,9	44,26

3.2.2.4 Horn Antenna EMCO 3116

Frequency (GHz)	Antenna factor EMCO 3116
18.000	44.86
18.100	44.88
18.200	44.94
18.300	44.97
18.400	44.95
18.500	44.86
18.600	44.90
18.700	45.04
18.800	45.11
18.900	45.20
19.000	45.23
19.100	45.24
19.200	45.07
19.300	45.01
19.400	45.02
19.500	45.07
19.600	44.96
19.700	44.94
19.800	45.00
19.900	44.83
20.000	44.72
20.100	44.70
20.200	44.68
20.300	44.53
20.400	44.44
20.500	44.48
20.600	44.54
20.700	44.37
20.800	44.25
20.900	44.36
21.000	44.42
21.100	44.35
21.200	44.38
21.300	44.34
21.400	44.30
21.500	44.20
21.600	44.22
21.700	44.25
21.800	44.31
21.900	44.31
22.000	44.44
22.100	44.67
22.200	44.68
22.300	44.68
22.400	44.87
22.500	44.79
22.600	44.68
22.700	44.84
22.800	44.91
22.900	44.84
23.000	44.95
23.100	44.97
23.200	45.14
23.300	45.20
23.400	45.35
23.500	45.45

23.600	45.55
23.700	45.70
23.800	45.75
23.900	45.77
24.000	45.83
24.100	45.85
24.200	45.73
24.300	45.92
24.400	45.83
24.500	45.81
24.600	45.98
24.700	46.12
24.800	46.23
24.900	46.34
25.000	46.36
25.100	46.43
25.200	46.53
25.300	46.49
25.400	46.33
25.500	46.40
25.600	46.34
25.700	46.12
25.800	46.27
25.900	46.19
26.000	46.16
26.100	46.33
26.200	46.32
26.300	46.55
26.400	46.70
26.500	46.68
26.600	46.76
26.700	46.70
26.800	46.57
26.900	46.74
27.000	46.56
27.100	46.40
27.200	46.60
27.300	46.61
27.400	46.69
27.500	46.71
27.600	46.82
27.700	46.84
27.800	46.85
27.900	47.02
28.000	47.07
28.100	47.02
28.200	46.99
28.300	47.02
28.400	47.06
28.500	46.94
28.600	46.88
28.700	47.06
28.800	47.00
28.900	46.96
29.000	47.03
29.100	46.94
29.200	46.95
29.300	46.86
29.400	46.90
29.500	47.05
29.600	46.90

29.700	46.80
29.800	46.95
29.900	46.79
30.000	46.78
30.100	46.76
30.200	46.78
30.300	46.76
30.400	46.80
30.500	46.90
30.600	46.99
30.700	46.97
30.800	46.99
30.900	47.06
31.000	47.18
31.100	47.26
31.200	47.28
31.300	47.32
31.400	47.35
31.500	47.47
31.600	47.54
31.700	47.64
31.800	47.69
31.900	47.74
32.000	47.93
32.100	48.23
32.200	48.17
32.300	48.32
32.400	48.51
32.500	48.50
32.600	48.56
32.700	48.80
32.800	48.90
32.900	49.28
33.000	49.46
33.100	49.76
33.200	49.83
33.300	50.07
33.400	50.49
33.500	50.68
33.600	50.81
33.700	50.89
33.800	51.11
33.900	51.15
34.000	51.22
34.100	51.46
34.200	51.56
34.300	51.79
34.400	51.81
34.500	51.93
34.600	52.17
34.700	52.19
34.800	52.45
34.900	52.66
35.000	52.59
35.100	52.55
35.200	52.41
35.300	52.30
35.400	52.27
35.500	52.05
35.600	52.00
35.700	51.94

35.800	51.94
35.900	51.68
36.000	51.64
36.100	51.51
36.200	51.28
36.300	51.18
36.400	51.29
36.500	51.19
36.600	51.05
36.700	50.78
36.800	50.80
36.900	50.68
37.000	50.57
37.100	50.65
37.200	50.76
37.300	50.73
37.400	50.86
37.500	50.98
37.600	51.16
37.700	51.29
37.800	51.57
37.900	51.58
38.000	51.98
38.100	52.34
38.200	52.34
38.300	52.66
38.400	52.86
38.500	52.96
38.600	53.24
38.700	53.66
38.800	53.81
38.900	53.92
39.000	54.09
39.100	54.02
39.200	53.93
39.300	53.75
39.400	53.75
39.500	53.62
39.600	53.36
39.700	53.54
39.800	53.28
39.900	53.27
40.000	53.34

4 CONVERSION FACTORS AND ALL OTHER FORMULAS

Unit	Conversion unit	Formula of conversion
dB μ V	dB μ V/m	dB μ V/m = dB\mu V + AF
μ V/m	dB μ V/m	dB μ V/m = 20log(X(\mu V/m)/1\mu V)

	Test distance stated in standard	Test distance of measurement	Conversion factor
Class B	3 m	3 m	/
Class A	10 m	3 m	20dB/decade

5 GENERAL AND SPECIAL CONDITIONS DESCRIPTION

5.1 General condition description

Interconnect and power cabling (or wiring)

5.1.1 Test arrangement for conducted emissions

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground-plane.

All other equipment powered from additional LISN(s).

Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

LISN at least 80 cm from nearest part of EUT chassis.

Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

Non-EUT components of EUT system being tested.

Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground-plane.

5.1.2 Test arrangement for conducted emissions- floor-standing equipment

Excess I/O cables shall be bundled in the center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling shall not exceed 40 cm in length.

Excess power cords shall be bundled in the center or shortened to appropriate length.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.

EUT and all cables shall be insulated, if required, from the ground-plane by up to 12 mm of insulating material.

EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, the ground-plane.

All other equipment powered from a second LISN or additional LISN(s).

Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

5.1.3 Test arrangement for radiated emissions tabletop equipment

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance. The total length shall not exceed 1 m.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground-plane.

Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

Non-EUT components of EUT system being tested.

Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

No vertical conducting plane used.

Power cords drape to the floor and are routed over to receptacle.

5.1.4 Test arrangement for radiated emissions floor-standing equipment

Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling not to exceed 40 cm in length.

Excess power cords shall be bundled in the center or shortened to appropriate length.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in a serpentine fashion.

EUT and all cables shall be insulated, if required, from the ground-plane by up to 12 mm of insulating material.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground plane.

Overhead cable trays and suspended ceilings

5.1.5 Test arrangement for floor-standing equipment

Only one vertical riser may be used where typical of system under test.

Excess power cord shall be bundled in the center or shortened to appropriate length.

EUT and cables shall be insulated from ground-plane by up to 12 mm. Where the manual has specified or there exists a code of practice for installation of the EUT, the test arrangement shall allow the use of this practice for the tests.

Power cords being measured connected to one LISN. All other system power cords powered through other LISN(s). A multiple receptacle strip may be used for other power cords.

For *conducted* tests, the LISNs may be placed on top of or immediately beneath and bonded directly to the ground-plane. For *radiated* tests, the LISN(s), if used, should be installed under, with the receptacle flush with the ground-plane.

5.1.6 Placement and manipulation of interconnect cabling (or wiring) of tabletop equipment

LISN(s) may have to be positioned to the side of the table to meet the criterion that the LISN receptacle shall be 80 cm away from the EUT. LISN(s) may be above ground-plane only for conducted emission measurements.

Accessories, such as ac power adapter, if typically table-mounted, shall occupy peripheral positions as is applicable.

Accessories, which are typically floor-mounted, shall occupy a floor position directly below the portion of the EUT to which they are typically connected. T

Table length may be extended beyond 1.5 m with peripherals aligned with the back edge. The table depth may be extended beyond 1 m. The 40 cm distance to the vertical conducting plane shall be maintained for conducted emission testing.

Placement of wall-mounted equipment

5.1.7 Test configuration/arrangement for combination floor-standing and tabletop equipment

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground-plane.

Cables of hand-operated devices, such as keyboards, mice, etc., have to be placed as for normal use.

Non-EUT components of EUT system being tested.

I/O cable to floor-standing unit drapes to the ground-plane and shortened or excess bundled. Cables not reaching the metal ground-plane are draped to the height of the connector or 40 cm, whichever is lower.

Power cords and signal cables shall drape to the floor. No extension cords shall be used to the power receptacles.

The floor-standing unit can be placed under the table if its height permits.

5.2 Special condition description

If for some reason the above measurement conditions can't be met, the description below should be used as an appropriate measurement condition and placement.

(Description is written additionally as the measurements differ – all is within test procedure)

6 MEASUREMENT UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the product, as specified in ETSI TR 100 028-2 and C63.23. This represents an expanded uncertainty expressed at 95% confidence level using a coverage factor k=2.

Measurements	U _{LAB}	U ETSI TR 100 028-2	U C63.23
AC Line Conducted Emission	3.2 dB	/	±4,13
Spurious emission 30 – 300 MHz	4.2 dB	±6	/
Spurious emission 300 – 1000 MHz	4.4 dB	±6	/
Spurious emission 1 GHz – 18 GHz	5.1 dB	±6	/
Occupied bandwidth (99% emission bandwidth)	< 2%	±5%	/


Note: Measurement uncertainty calculated in accordance with ETSI TR 100 028-2 and C63.23.

6.1 Application of decision rule

Application of decision rule and statement of conformity is defined in document TN023 Decision rule and measurement uncertainty.

As a general rule Pass/Fail decisions are based on simple acceptance rule and acceptance limits chosen based on simple acceptance ($w = 0$, $AL = TL$) except if a decision rule is governed by particular standard or guidance document.

Decision rule:

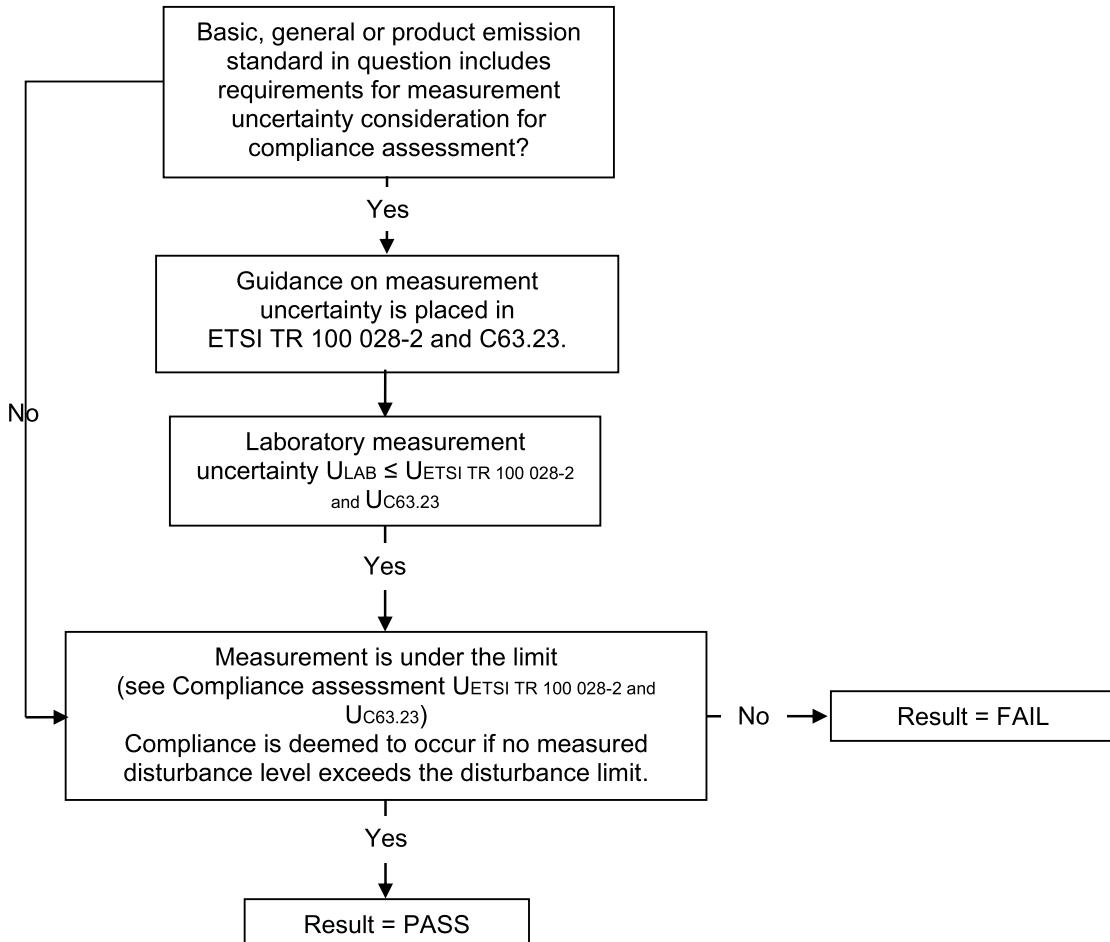

7 TEST SUMMARY

STANDARDS (details on first page)	Tested yes no	Sample pass not pass
ANSI C63.10-2013 (Clause 6.3, 6.4, 6.5, 6.6, 6.9); The product also complies with: 47 CFR Part 15, Subpart C: (§15.203, §15.207 (a), §15.205; §15.209; §15.215; §15.249;) RSS-210 Issue 10 (Clause 7.2), RSS-Gen, Issue 5 (Clause 6.7, 8.8, 8.9)	<input checked="" type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>

Test	Section within the report	47 CFR Part 15	RSS 210, Issue 10 (*1) or RSS-Gen, Issue 5 (*2)	Conclusion
Antenna requirement	8.1	15.203	-	PASS
Conducted emission	8.2	15.207	8.8 (*2)	N/A
Radiated emission	8.3	15.205, 15.209, 15.249(a)	8.9 (*2), 8.10(*2), 7.2 (*1)	PASS
99% Bandwidth	8.4	-	6.7 (*2)	PASS
20 dB Bandwidth	8.5	15.215(c)	-	PASS

*Note: Radiated measurements performed in laboratory recognized by ISED Canada:
– CAB identifier: SI0001
– ISED#: 21434

7.1 Operating voltages/frequencies used for testing

Section	Test	Operating conditions
8.3	Radiated emission	Battery operated (CR2032)
8.4	99% Bandwidth	Battery operated (CR2032)
8.5	20 dB Bandwidth	Battery operated (CR2032)

8 EMISSION TESTS

8.1 47 CFR § 15.203 Antenna requirements

Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion:

PASS

Note: Device has internal antenna integrated on PCB. The mounting of antenna is fixed to the radio module and no other antenna should be used.

8.2 47 CFR § 15.207 Conducted emission measurement (intentional radiator)

Test is not applicable due to battery power supply.

8.3 47 CFR § 15.205, § 15.209, § 15.249

Radiated emission measurement (intentional radiator)


8.3.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, EMI receiver	ESW	109875	2019-12	2021-12	24 months	
Rohde-Schwarz, RFI receiver	ESU8	105187	2020-07	2022-07	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	106897	2020-06	2022-06	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2019-06	2021-06	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 109843)	109063	2020-07	2022-07	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	109064	2020-08	2022-08	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS002	2019-06	2021-06	24 months	X
Rohde & Schwarz, Horn Antenna	HL562E (SN 100842)	109056	2020-07	2022-07	24 months	X
Rohde & Schwarz, Ultra Broadband Antenna	HF907 (SN 102508)	109057	2020-08	2022-08	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Horn Antenna, EMCO	3116	/	2020-09	2022-09	24 months	
Schwarzbeck Active loop antenna	FMZB 1519B	/	2021-04	2022-10	18 months	X

8.3.2 Test procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to PEAK and QUASI-PEAK Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The highest points would be re-tested one by one using the quasi-peak method.

8.3.3 Test setup

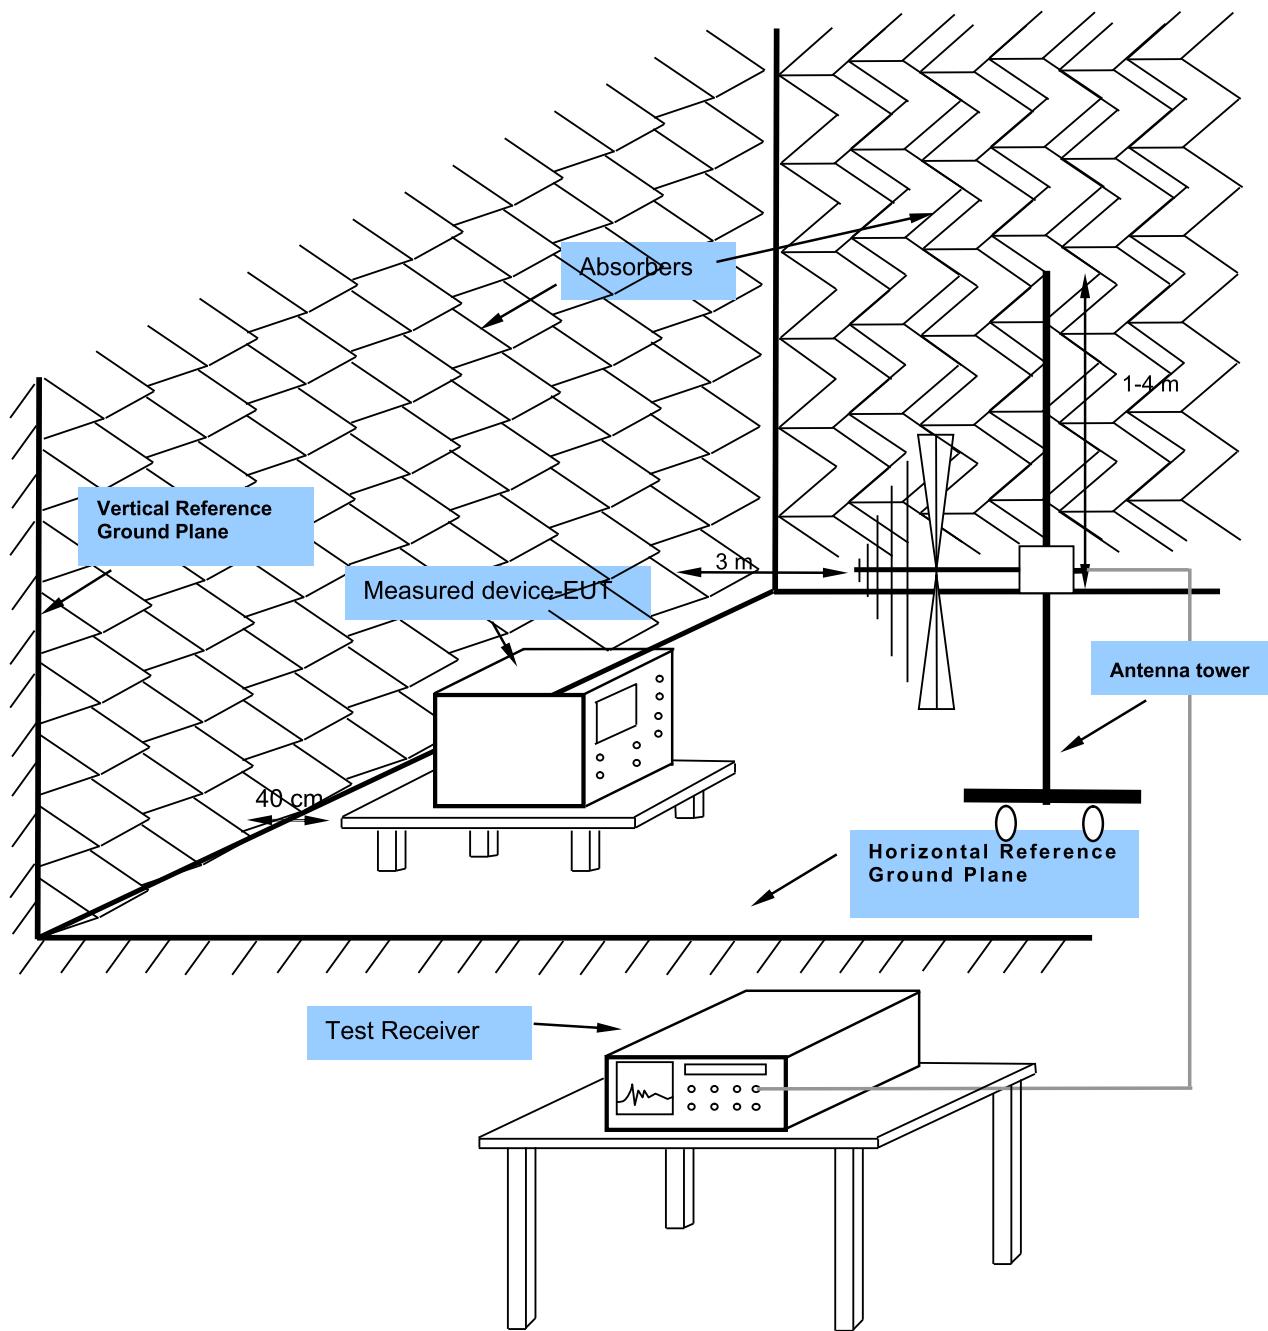

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.3.4 Test result

914.2 MHz

EUT Information


EUT

Operating mode:

RIMAC SKD

TX 914.2 MHz

Full Spectrum

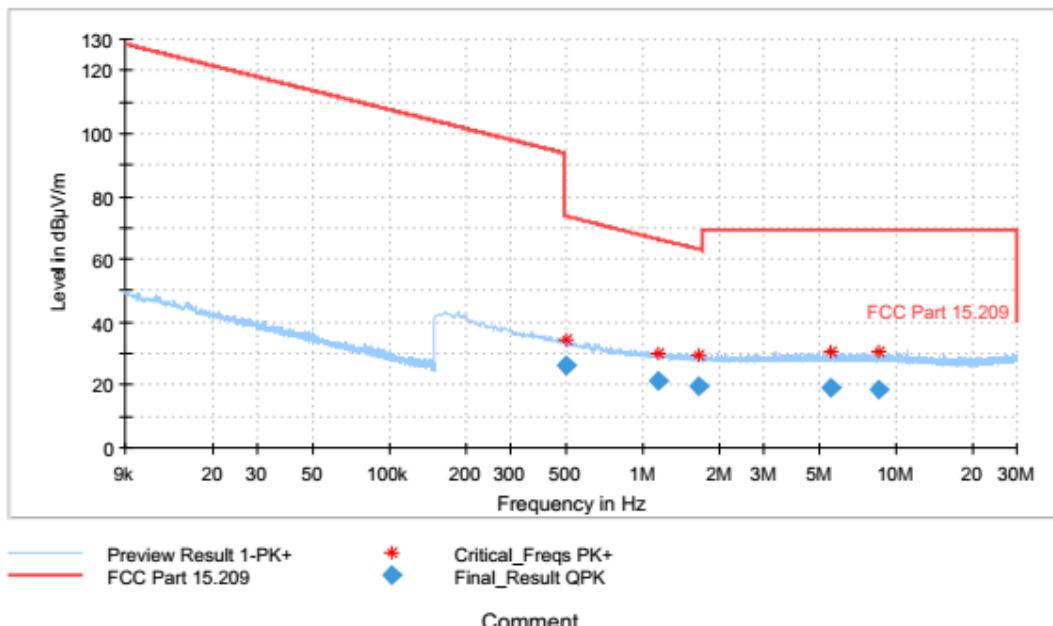

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
0.494250	26.23	73.73	47.50	100.0	H	163.0
1.146750	21.04	66.44	45.40	100.0	H	323.0
1.659750	19.90	63.23	43.34	100.0	H	169.0
5.514000	19.05	69.50	50.45	100.0	H	335.0
8.472750	18.80	69.50	50.70	100.0	H	137.0

EUT Information


EUT

Operating mode:

RIMAC SKD

TX 914.2 MHz

Full Spectrum

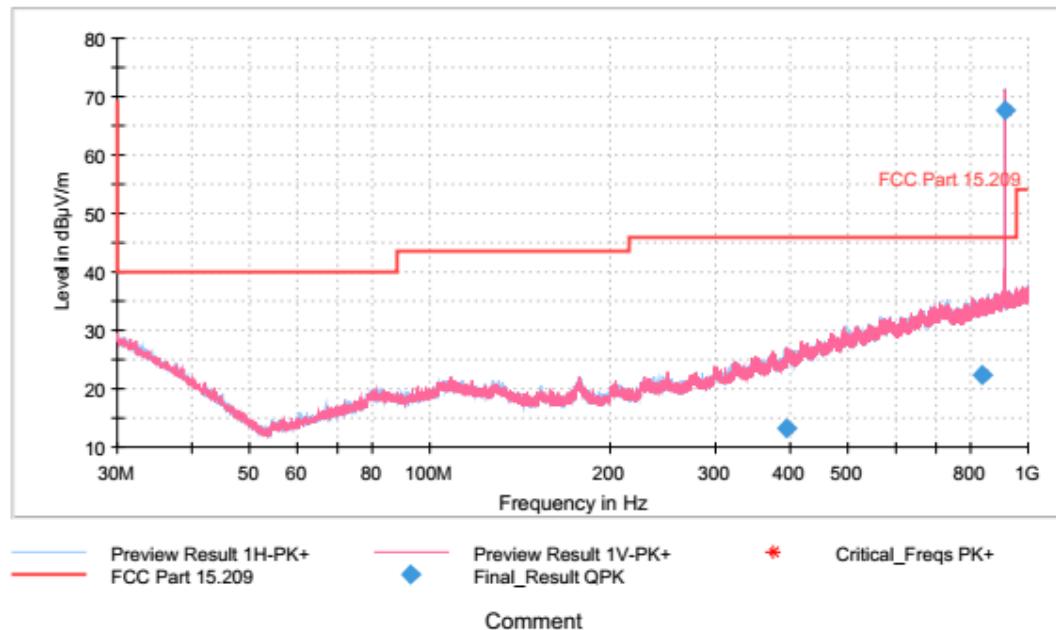


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
395.370000	13.30	46.00	32.70	103.0	H	2.0
836.160000	22.37	46.00	23.63	250.0	H	94.0
914.190000	67.72	46.00	-21.72	251.0	H	177.0

EUT Information

EUT

Operating mode:

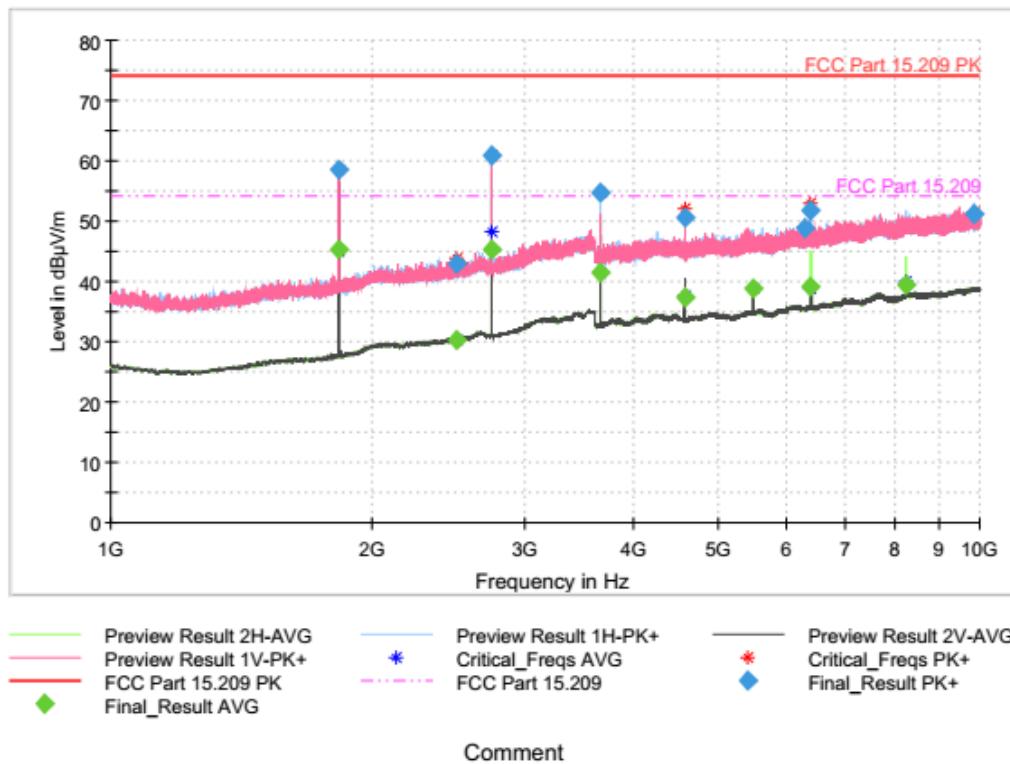RIMAC SKD
TX 914.2 MHz**Final Result**

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1828.500000	---	45.32	54.00	8.68	1000.0	1000.000	144.0	V	0.0	28.4
2742.500000	---	45.31	54.00	8.69	1000.0	1000.000	164.0	V	0.0	30.8
3656.750000	---	41.46	54.00	12.54	1000.0	1000.000	168.0	H	0.0	33.9
2742.500000	60.89	---	74.00	13.11	1000.0	1000.000	168.0	V	0.0	30.8
8227.750000	---	39.40	54.00	14.60	1000.0	1000.000	144.0	H	0.0	38.8
6399.250000	---	39.01	54.00	14.99	1000.0	1000.000	144.0	H	0.0	36.6
5485.250000	---	38.79	54.00	15.21	1000.0	1000.000	168.0	H	356.0	36.1
1828.500000	58.57	---	74.00	15.43	1000.0	1000.000	142.0	V	0.0	28.4
4571.000000	---	37.32	54.00	16.68	1000.0	1000.000	162.0	V	0.0	35.0
3656.750000	54.74	---	74.00	19.26	1000.0	1000.000	162.0	H	0.0	33.9
6399.250000	51.89	---	74.00	22.11	1000.0	1000.000	142.0	H	0.0	36.6
9871.750000	51.25	---	74.00	22.75	1000.0	1000.000	168.0	H	0.0	39.5
4571.000000	50.68	---	74.00	23.32	1000.0	1000.000	163.0	V	0.0	35.0
2505.250000	---	30.34	54.00	23.66	1000.0	1000.000	145.0	V	273.0	30.6
6277.000000	48.81	---	74.00	25.19	1000.0	1000.000	144.0	V	0.0	36.5
2505.250000	42.96	---	74.00	31.04	1000.0	1000.000	142.0	H	0.0	30.6

914.7 MHz

EUT Information


EUT

Operating mode:

RIMAC SKD

TX 914.7 MHz

Full Spectrum

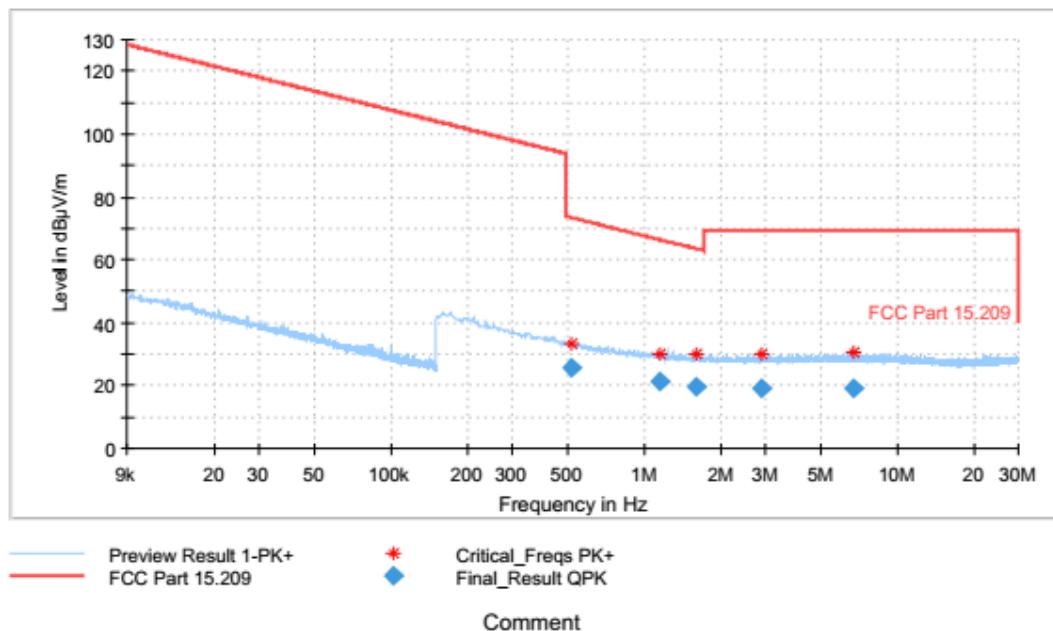

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
0.514500	25.68	73.38	47.69	100.0	H	159.0
1.149000	21.10	66.42	45.32	100.0	H	202.0
1.605750	19.93	63.52	43.59	100.0	H	98.0
2.892750	18.88	69.50	50.62	100.0	H	219.0
6.648000	19.00	69.50	50.50	100.0	H	184.0


EUT Information

EUT

Operating mode:

RIMAC SKD
TX 914.7 MHz

Full Spectrum

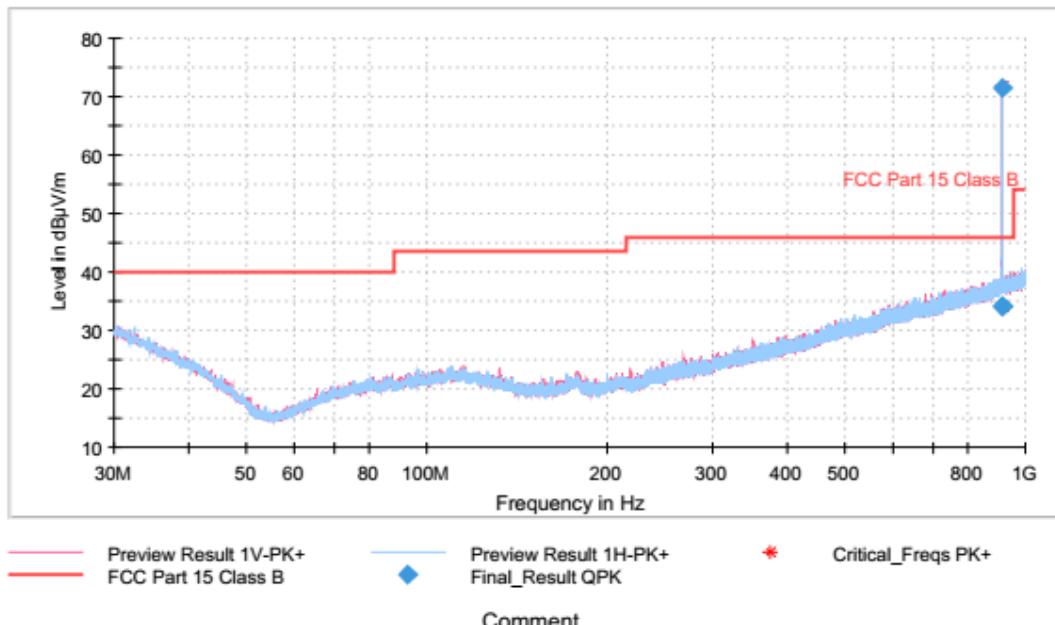

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
914.670000	71.40	46.00	-25.40	144.0	H	0.0
915.300000	34.11	46.00	11.89	150.0	H	0.0
915.450000	34.09	46.00	11.91	122.0	V	0.0


EUT Information

EUT

Operating mode:

RIMAC SKD

TX 914.7 MHz

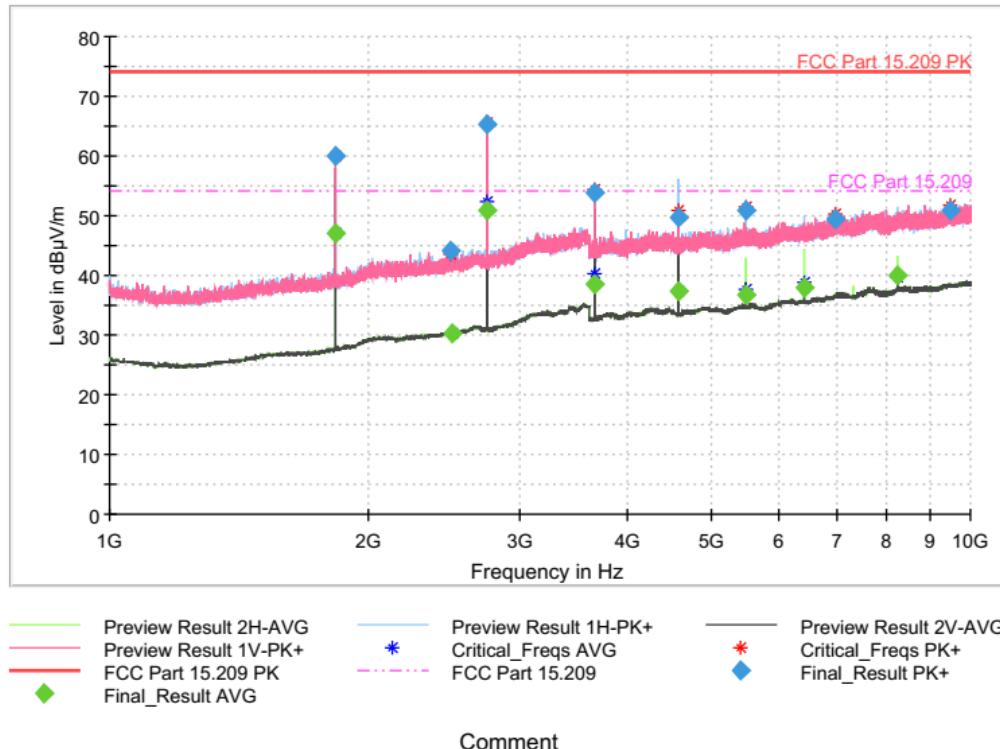

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azim uth (deg)	Corr. (dB/m)
1829.500000	---	47.15	54.00	6.85	1000.0	1000.000	142.0	V	0.0	28.4
1829.500000	60.04	---	74.00	13.96	1000.0	1000.000	142.0	V	0.0	28.4
2493.000000	44.12	---	74.00	29.88	1000.0	1000.000	168.0	H	0.0	30.5
2499.250000	---	30.38	54.00	23.62	1000.0	1000.000	144.0	V	0.0	30.6
2744.000000	65.43	---	74.00	8.57	1000.0	1000.000	154.0	H	0.0	30.8
2744.000000	---	50.96	54.00	3.04	1000.0	1000.000	168.0	H	0.0	30.8
3658.750000	53.95	---	74.00	20.05	1000.0	1000.000	153.0	V	0.0	33.9
3658.750000	---	38.48	54.00	15.52	1000.0	1000.000	144.0	V	0.0	33.9
4573.250000	49.61	---	74.00	24.39	1000.0	1000.000	153.0	H	87.0	35.0
4573.500000	---	37.48	54.00	16.52	1000.0	1000.000	142.0	H	87.0	35.0
5488.250000	50.83	---	74.00	23.17	1000.0	1000.000	142.0	H	0.0	36.1
5488.250000	---	36.76	54.00	17.24	1000.0	1000.000	142.0	H	0.0	36.1
6402.750000	---	37.91	54.00	16.09	1000.0	1000.000	142.0	H	0.0	36.6
6960.000000	49.47	---	74.00	24.53	1000.0	1000.000	144.0	V	0.0	37.3
8232.250000	---	39.88	54.00	14.12	1000.0	1000.000	142.0	H	0.0	38.8
9455.250000	50.93	---	74.00	23.07	1000.0	1000.000	162.0	H	0.0	39.4

915.4 MHz


EUT Information

EUT

Operating mode:

RIMAC SKD

TX 915.4 MHz

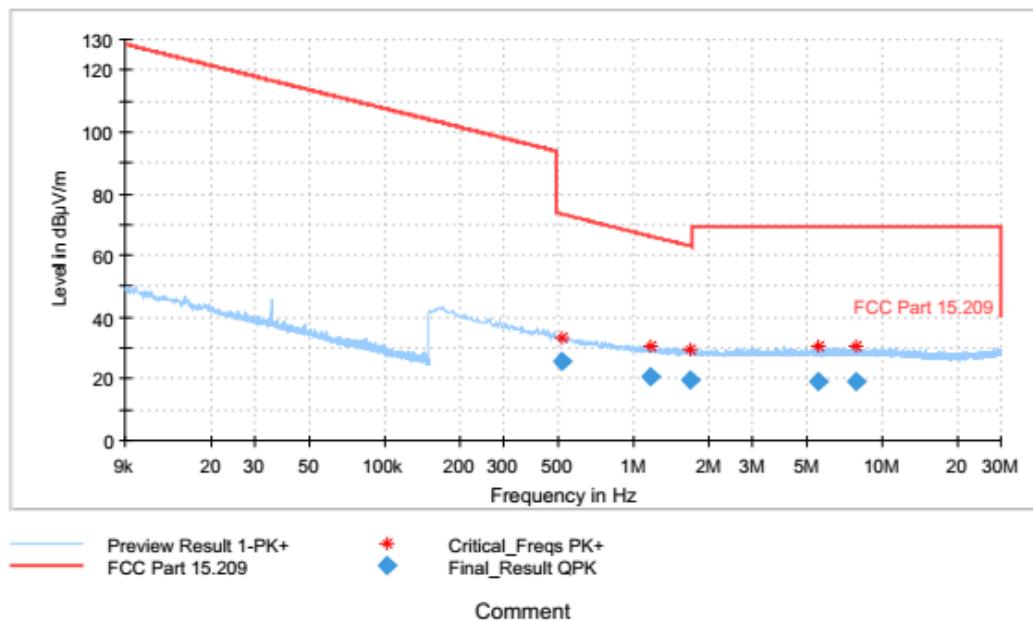Full Spectrum**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
0.516750	25.73	73.34	47.61	100.0	H	123.0
1.160250	20.97	66.33	45.37	100.0	H	54.0
1.675500	19.82	63.15	43.33	100.0	H	271.0
5.478000	19.11	69.50	50.39	100.0	H	79.0
7.775250	18.89	69.50	50.61	100.0	H	245.0

EUT Information


EUT

Operating mode:

RIMAC SKD

TX 915.4 MHz

Full Spectrum

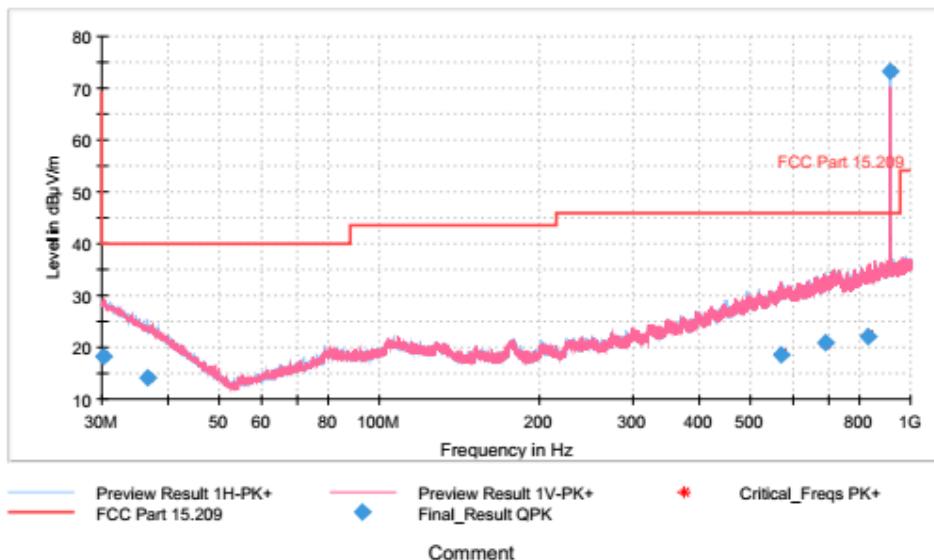


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
30.270000	18.23	40.00	21.77	122.0	V	156.0
36.660000	14.10	40.00	25.90	193.0	H	220.0
569.910000	18.58	46.00	27.42	122.0	V	119.0
690.060000	20.74	46.00	25.26	150.0	H	161.0
831.930000	22.20	46.00	23.80	124.0	V	231.0
915.360000	73.27	46.00	-27.27	150.0	H	174.0

EUT Information


EUT

Operating mode:

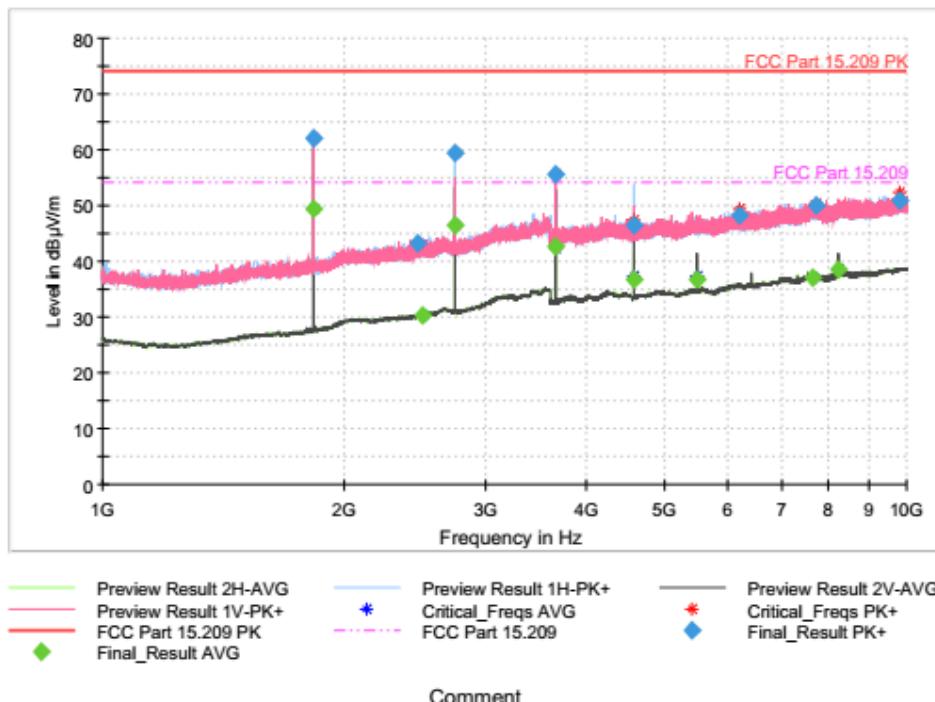
RIMAC SKD
TX 915.4 MHz**Final Result**

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Corr. (dB/m)
1830.750000	---	49.29	54.00	4.71	1000.0	1000.000	144.0	V	28.4
2746.250000	---	46.49	54.00	7.51	1000.0	1000.000	168.0	H	30.8
3661.500000	---	42.69	54.00	11.31	1000.0	1000.000	153.0	V	34.0
1830.750000	62.17	---	74.00	11.83	1000.0	1000.000	142.0	V	28.4
2746.250000	59.45	---	74.00	14.55	1000.0	1000.000	168.0	H	30.8
8238.500000	---	38.56	54.00	15.44	1000.0	1000.000	142.0	V	38.8
7649.750000	---	37.07	54.00	16.93	1000.0	1000.000	144.0	H	38.3
4577.000000	---	36.75	54.00	17.25	1000.0	1000.000	145.0	V	35.0
5492.250000	---	36.66	54.00	17.34	1000.0	1000.000	168.0	V	36.1
3661.500000	55.72	---	74.00	18.28	1000.0	1000.000	153.0	V	34.0
9801.500000	50.97	---	74.00	23.03	1000.0	1000.000	145.0	V	39.4
2499.500000	---	30.37	54.00	23.63	1000.0	1000.000	147.0	V	30.6
7704.500000	50.09	---	74.00	23.91	1000.0	1000.000	168.0	V	38.3
6187.500000	48.25	---	74.00	25.75	1000.0	1000.000	168.0	H	36.5
4577.000000	46.52	---	74.00	27.48	1000.0	1000.000	152.0	H	35.0
2466.500000	43.33	---	74.00	30.67	1000.0	1000.000	153.0	V	30.4


§ 15.249(a) Test results

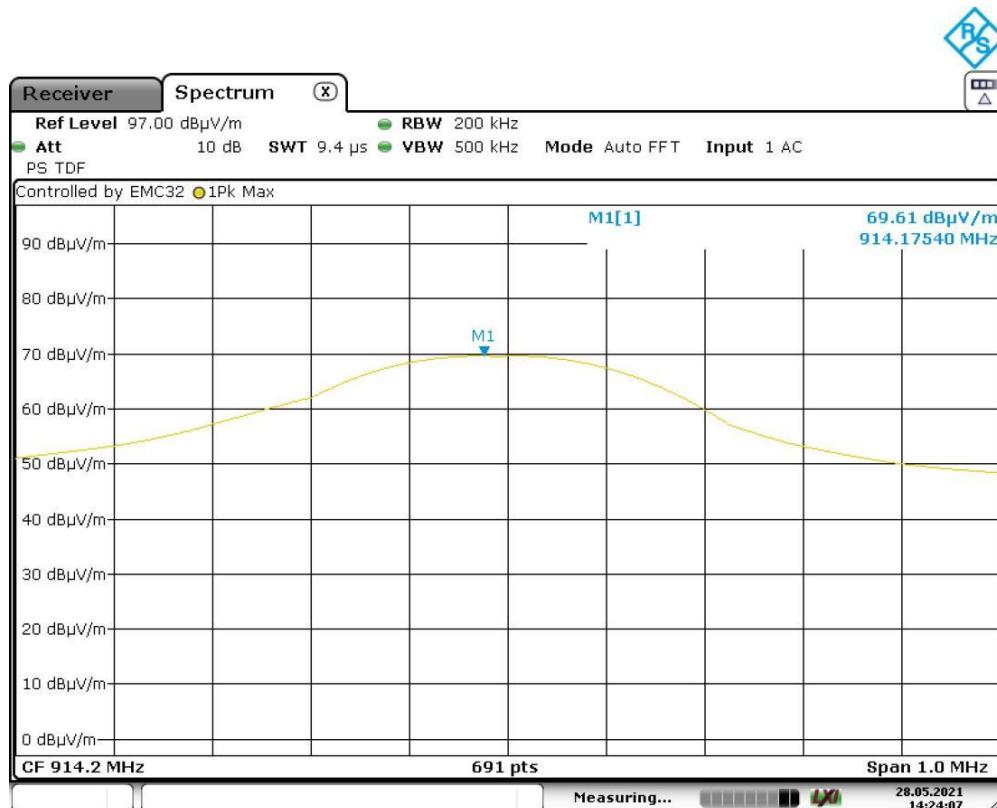

Date: 28.MAY.2021 14:24:06

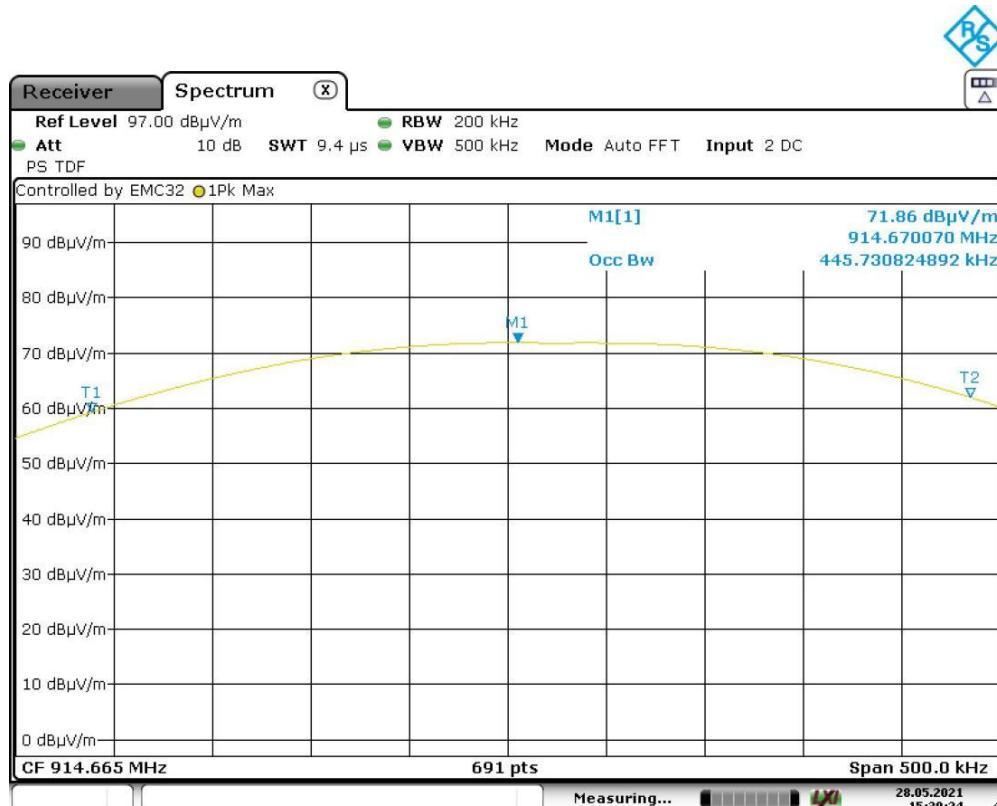

Date: 28.MAY.2021 15:39:24

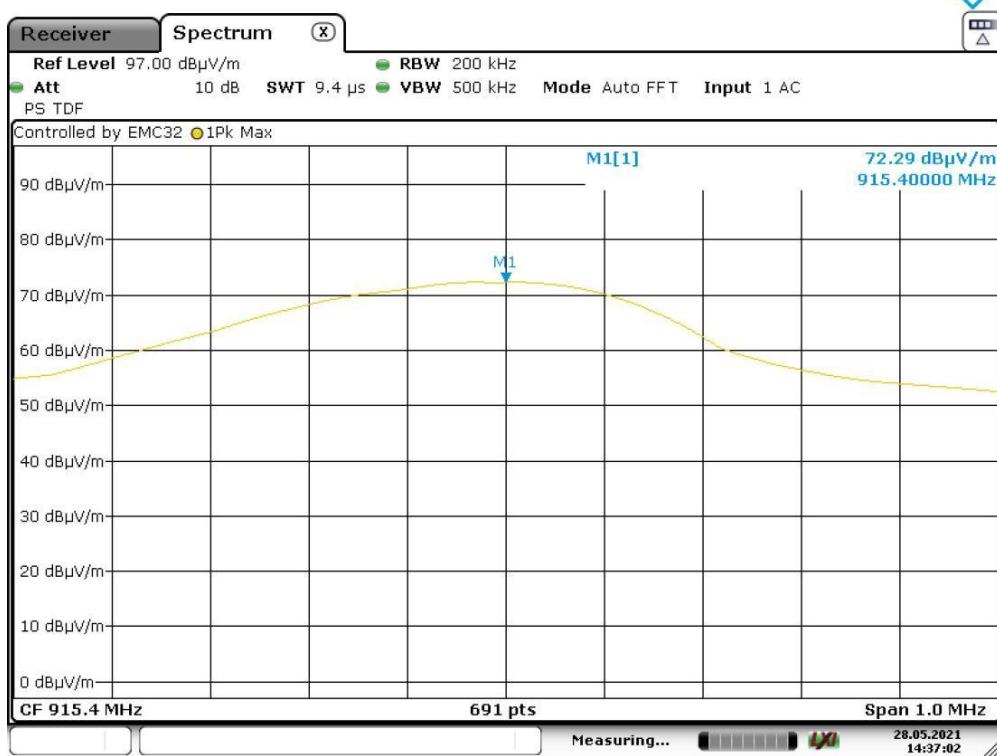

Date: 28.MAY.2021 14:37:02

DUT Frequency (MHz)	Max Level (dB μ V/m)	Limit (dB μ V/m)	Result
914.20	69.61	94.00	PASS
914.70	71.86	94.00	PASS
915.40	72.29	94.00	PASS

8.4 Occupied bandwidth

8.4.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, EMI receiver	ESW	109875	2019-12	2021-12	24 months	
Rohde-Schwarz, RFI receiver	ESU8	105187	2020-07	2022-07	24 months	
Rohde-Schwarz, RFI receiver	ESU26	106897	2020-06	2022-06	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2019-06	2022-06	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 109843)	109063	2020-07	2022-07	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	109064	2020-08	2022-08	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS002	2019-06	2022-06	24 months	X
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	109056	2020-07	2022-07	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	109057	2020-08	2022-08	24 months	
Horn Antenna, EMC	3116	/	2020-09	2022-09	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck Active loop antenna	FMZB 1519B	/	2021-04	2022-10	18 months	

8.4.2 Test procedure

The emission bandwidth (\times dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated \times dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3 \times the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 \times RBW.


Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.


The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.


8.4.3 Test results

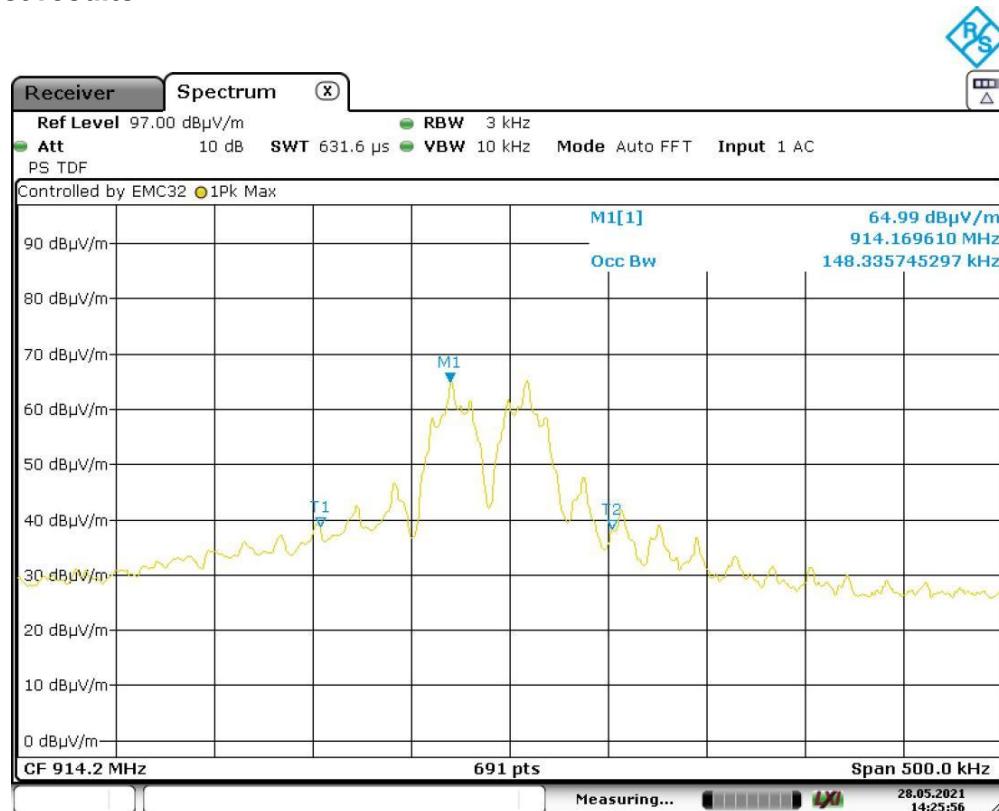

Date: 28.MAY.2021 14:25:56

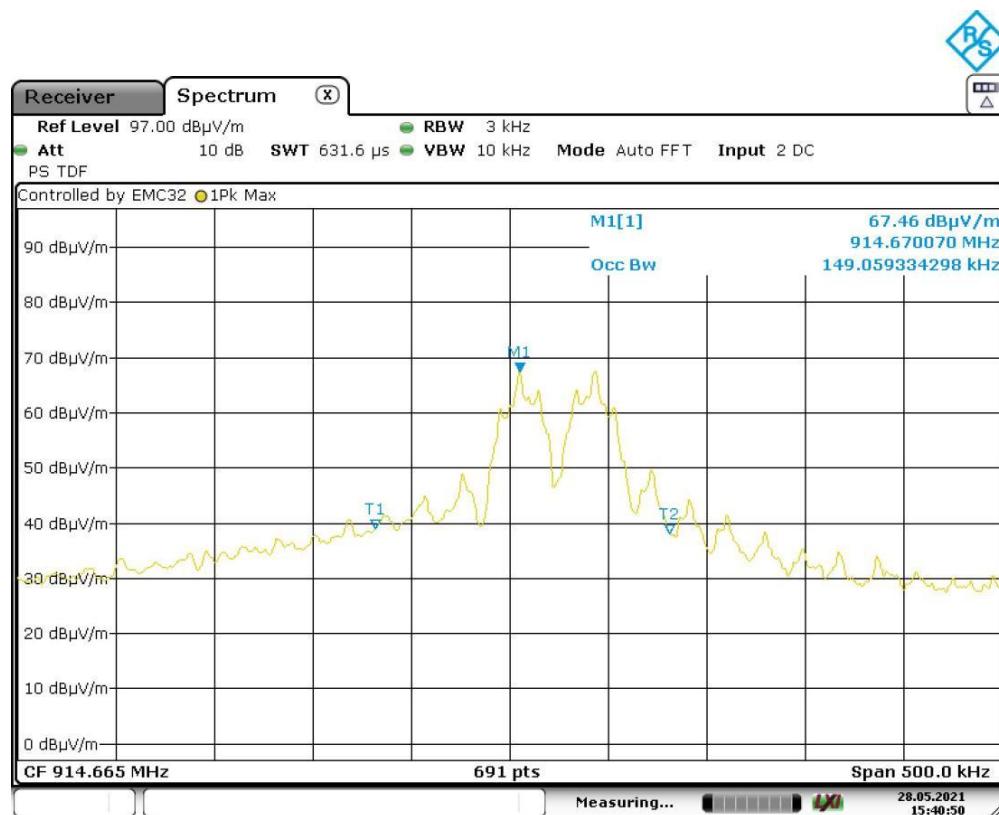

Date: 28.MAY.2021 15:40:50

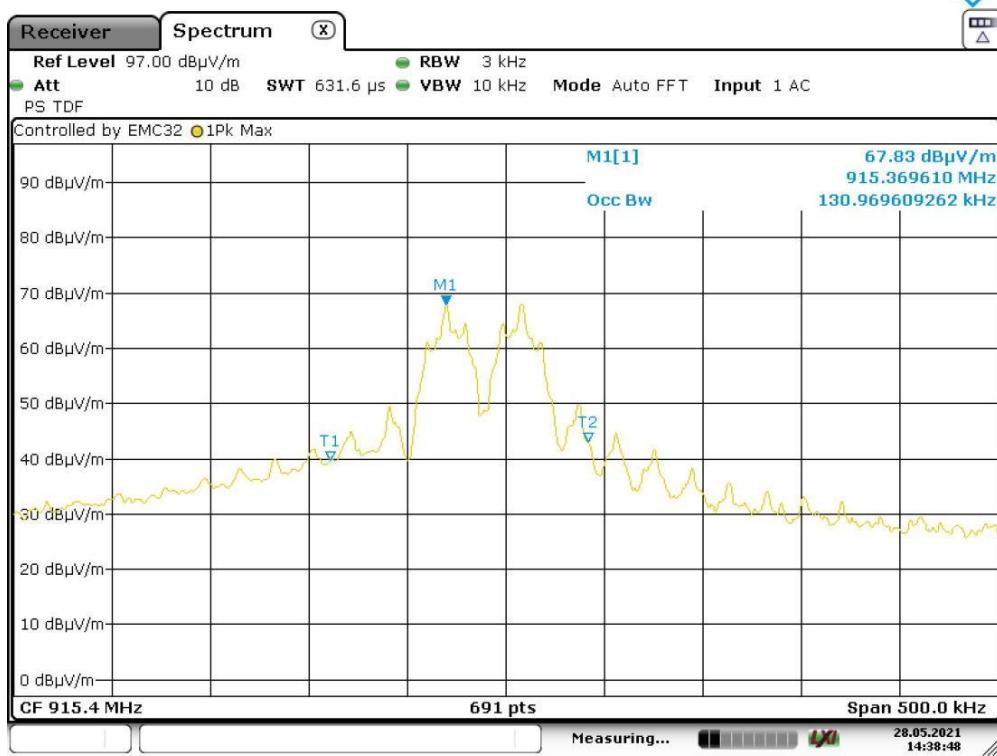

Date: 28.MAY.2021 14:38:48

Frequency (MHz)	99 % bandwidth (kHz)	PASS/FAIL
914.169	148.336	PASS
914.670	149.059	PASS
915.369	130.969	PASS

8.5 20 dB Emission Bandwidth(15.215 (c))

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

8.5.1 Test procedure


As per ANSI C63:10-2013:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyser marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyser and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


8.5.2 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, EMI receiver	ESW	109875	2019-12	2021-12	24 months	X
Rohde-Schwarz, RFI receiver	ESU8	105187	2020-07	2022-07	24 months	
Rohde-Schwarz, RFI receiver	ESU26	106897	2020-06	2022-06	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2019-06	2022-06	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 109843)	109063	2020-07	2022-07	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	109064	2020-08	2022-08	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS002	2019-06	2022-06	24 months	X
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	109056	2020-07	2022-07	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	109057	2020-08	2022-08	24 months	
Horn Antenna, EMCO	3116	/	2020-09	2022-09	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck Active loop antenna	FMZB 1519B	/	2021-04	2022-10	18 months	

8.5.3 Test results

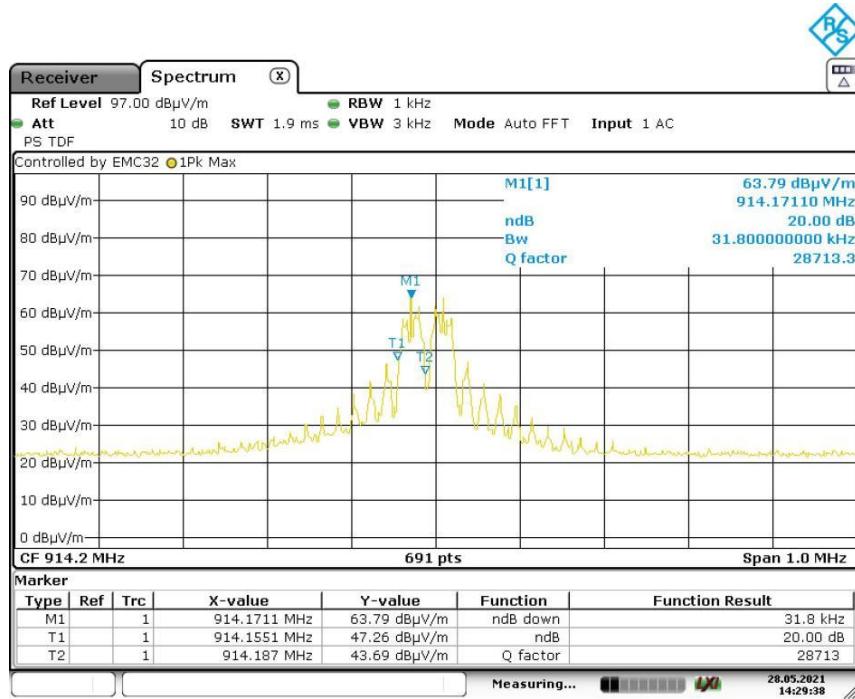


Date: 28.MAY.2021 14:29:37

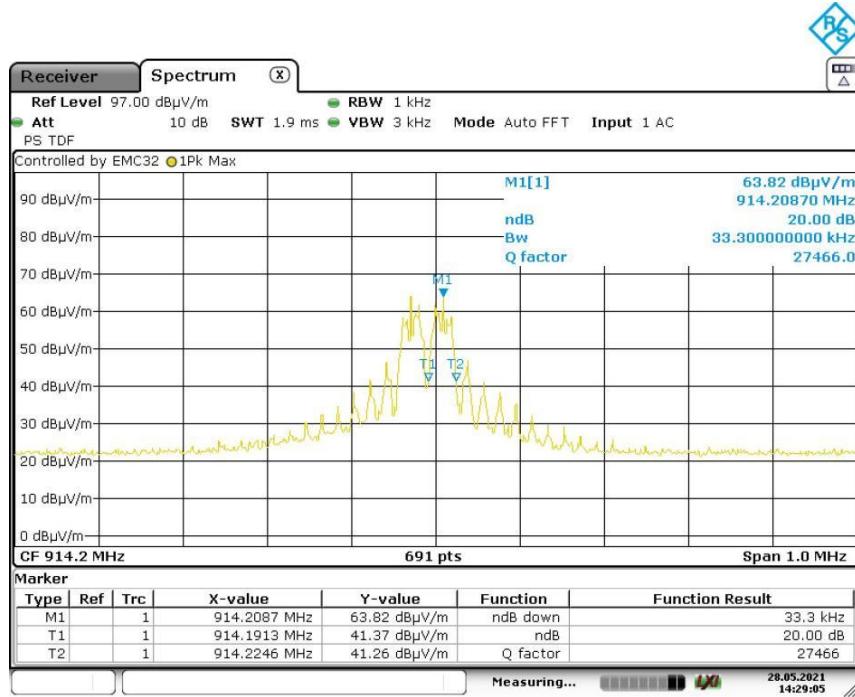

Date: 28.MAY.2021 14:29:05

DUT Frequency (MHz)	20 Db Bandwidth (kHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dB μ V/m)	Result
914.20	70	914.155	914.225	63.82	PASS

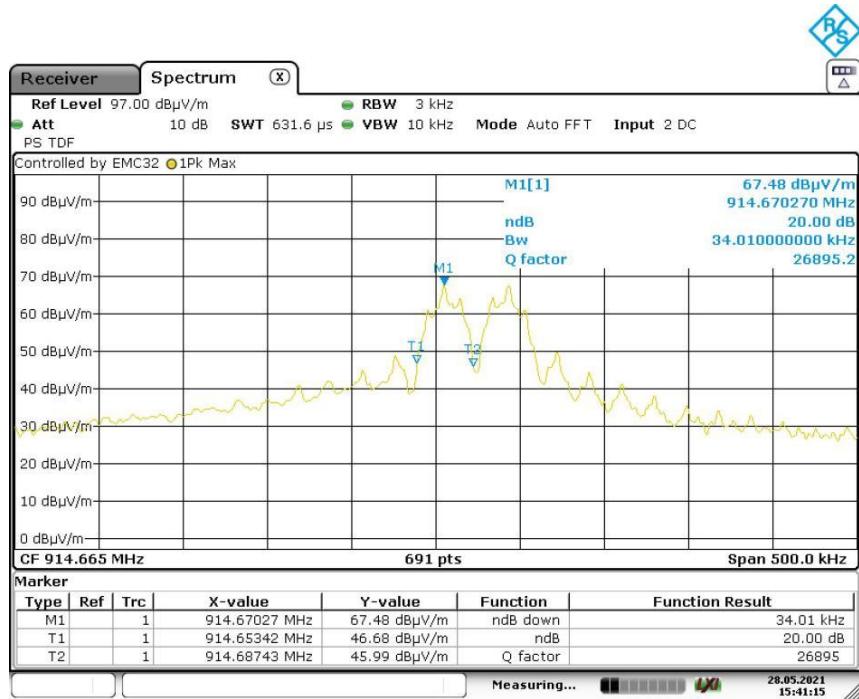


Date: 28.MAY.2021 15:41:15




Date: 28.MAY.2021 15:41:47

DUT Frequency (MHz)	20 Db Bandwidth (kHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBµV/m)	Result
914.70	71	914.653	914.724	67.48	PASS

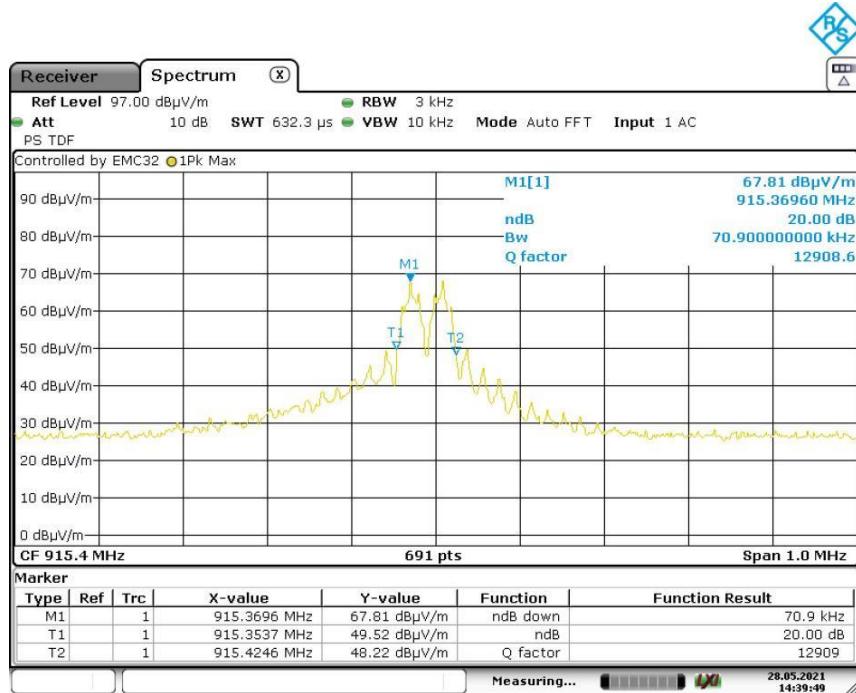

Date: 28.MAY.2021 14:39:49

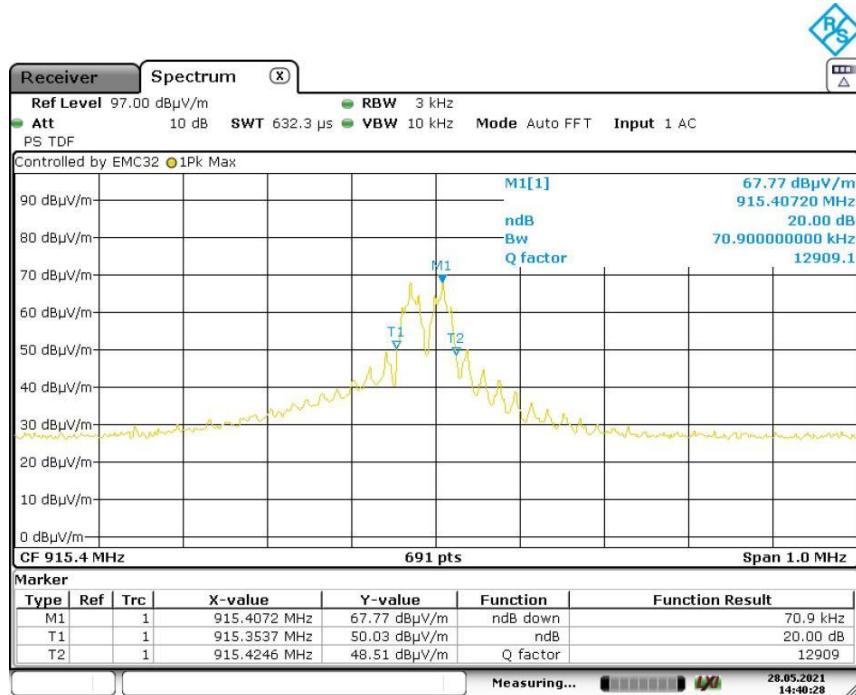

Date: 28.MAY.2021 14:40:28

DUT Frequency (MHz)	20 Db Bandwidth (kHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dB μ V/m)	Result
915.40	70.9	915.3537	915.4246	67.81	PASS