

Appendix RF Test Data for BT

Company: : Acer Gadget Inc.

EUT : Outdoor Mini Speaker

FCC ID: : 2A2P5-OSK248

Model Number : OSK248

Report No. : HTT202507780F01

Reviewed By : Heber He

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.881	3.751	76.81	1.15	0.03
		2441	DH5	2.880	3.751	76.78	1.15	0.04
		2480	DH5	2.881	3.751	76.81	1.15	0.03
Pi/4DQPSK	SISO	2402	2DH5	2.885	3.749	76.95	1.14	0.04
		2441	2DH5	2.886	3.750	76.96	1.14	0.03
		2480	2DH5	2.885	3.749	76.95	1.14	0.04

1.2 Test Graph


1.2.1 Ant1

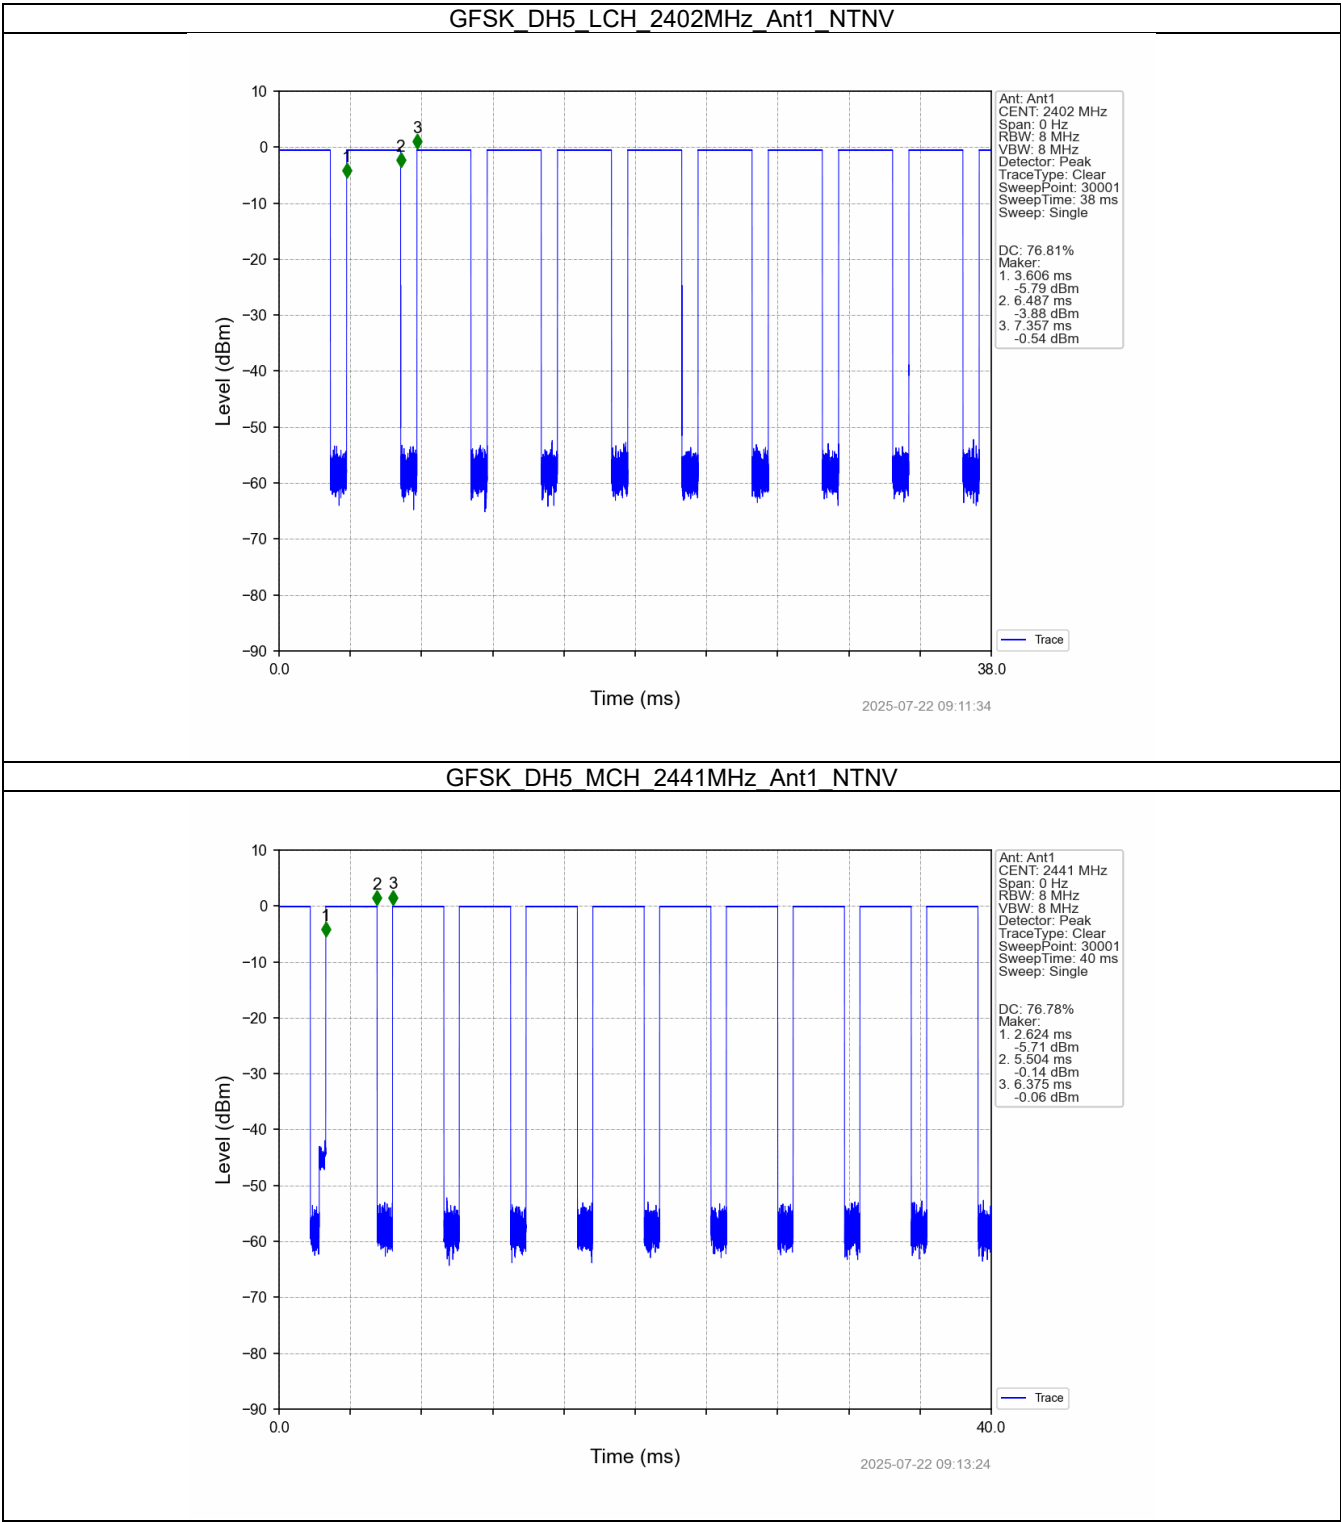


GFSK DH5_HCH_2480MHz_Ant1_NTNV

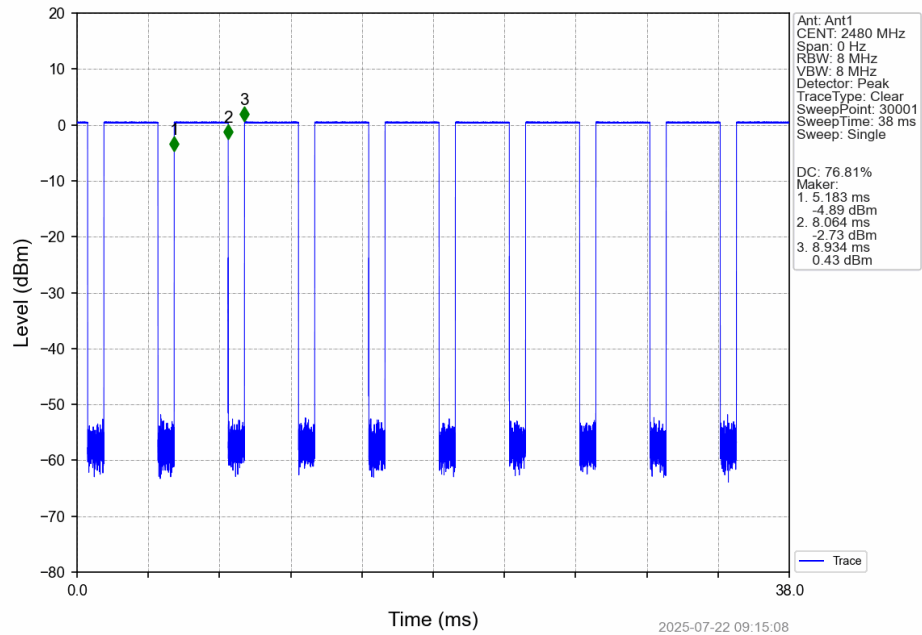


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

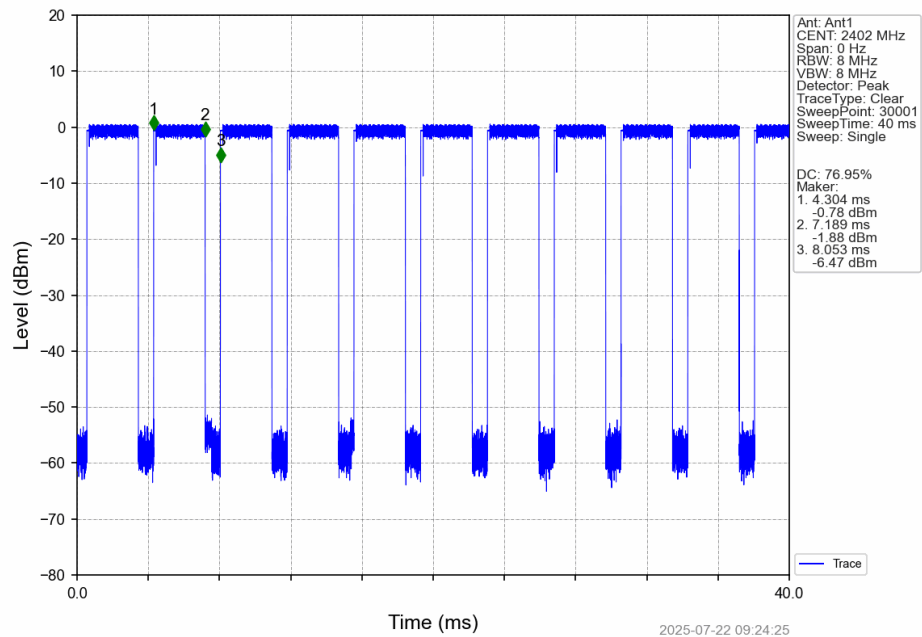

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

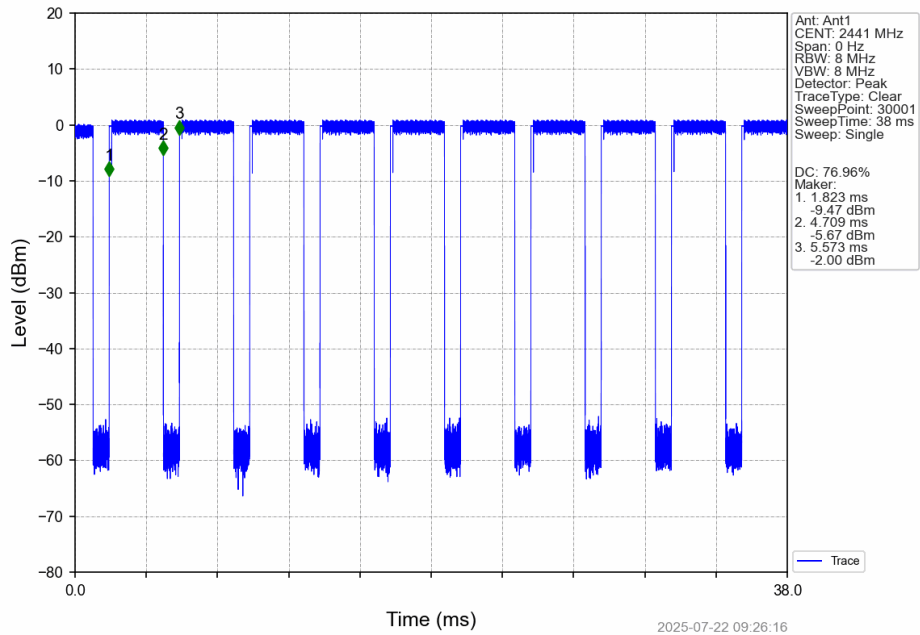

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

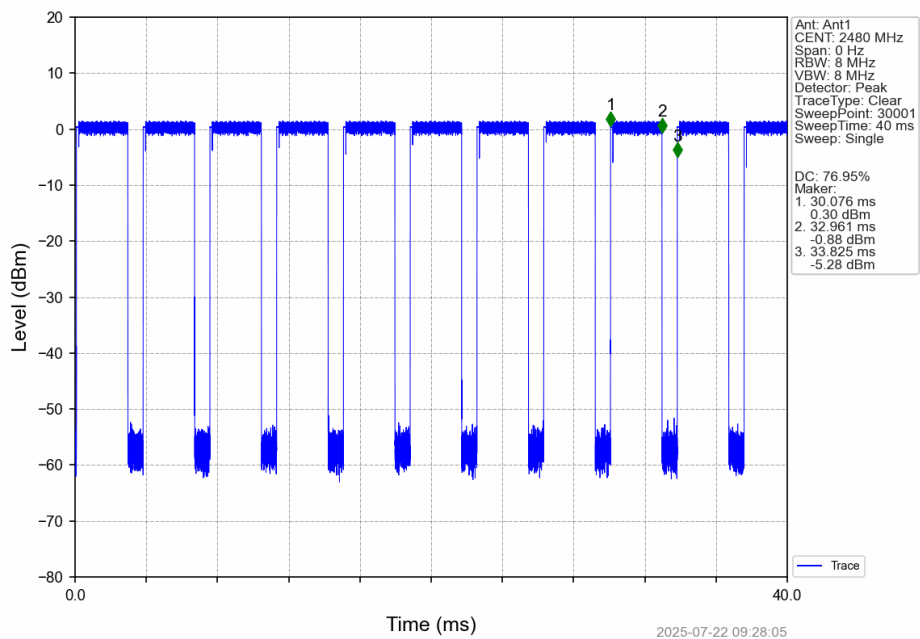

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.958	/	Pass
		2441	DH5	1	0.970	/	Pass
		2480	DH5	1	0.980	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.228	/	Pass
		2441	2DH5	1	1.244	/	Pass
		2480	2DH5	1	1.256	/	Pass

2.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.064	/	Pass
		2441	DH5	1	1.054	/	Pass
		2480	DH5	1	1.050	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.338	/	Pass
		2441	2DH5	1	1.353	/	Pass
		2480	2DH5	1	1.352	/	Pass

2.2 Test Graph


2.2.1 OBW

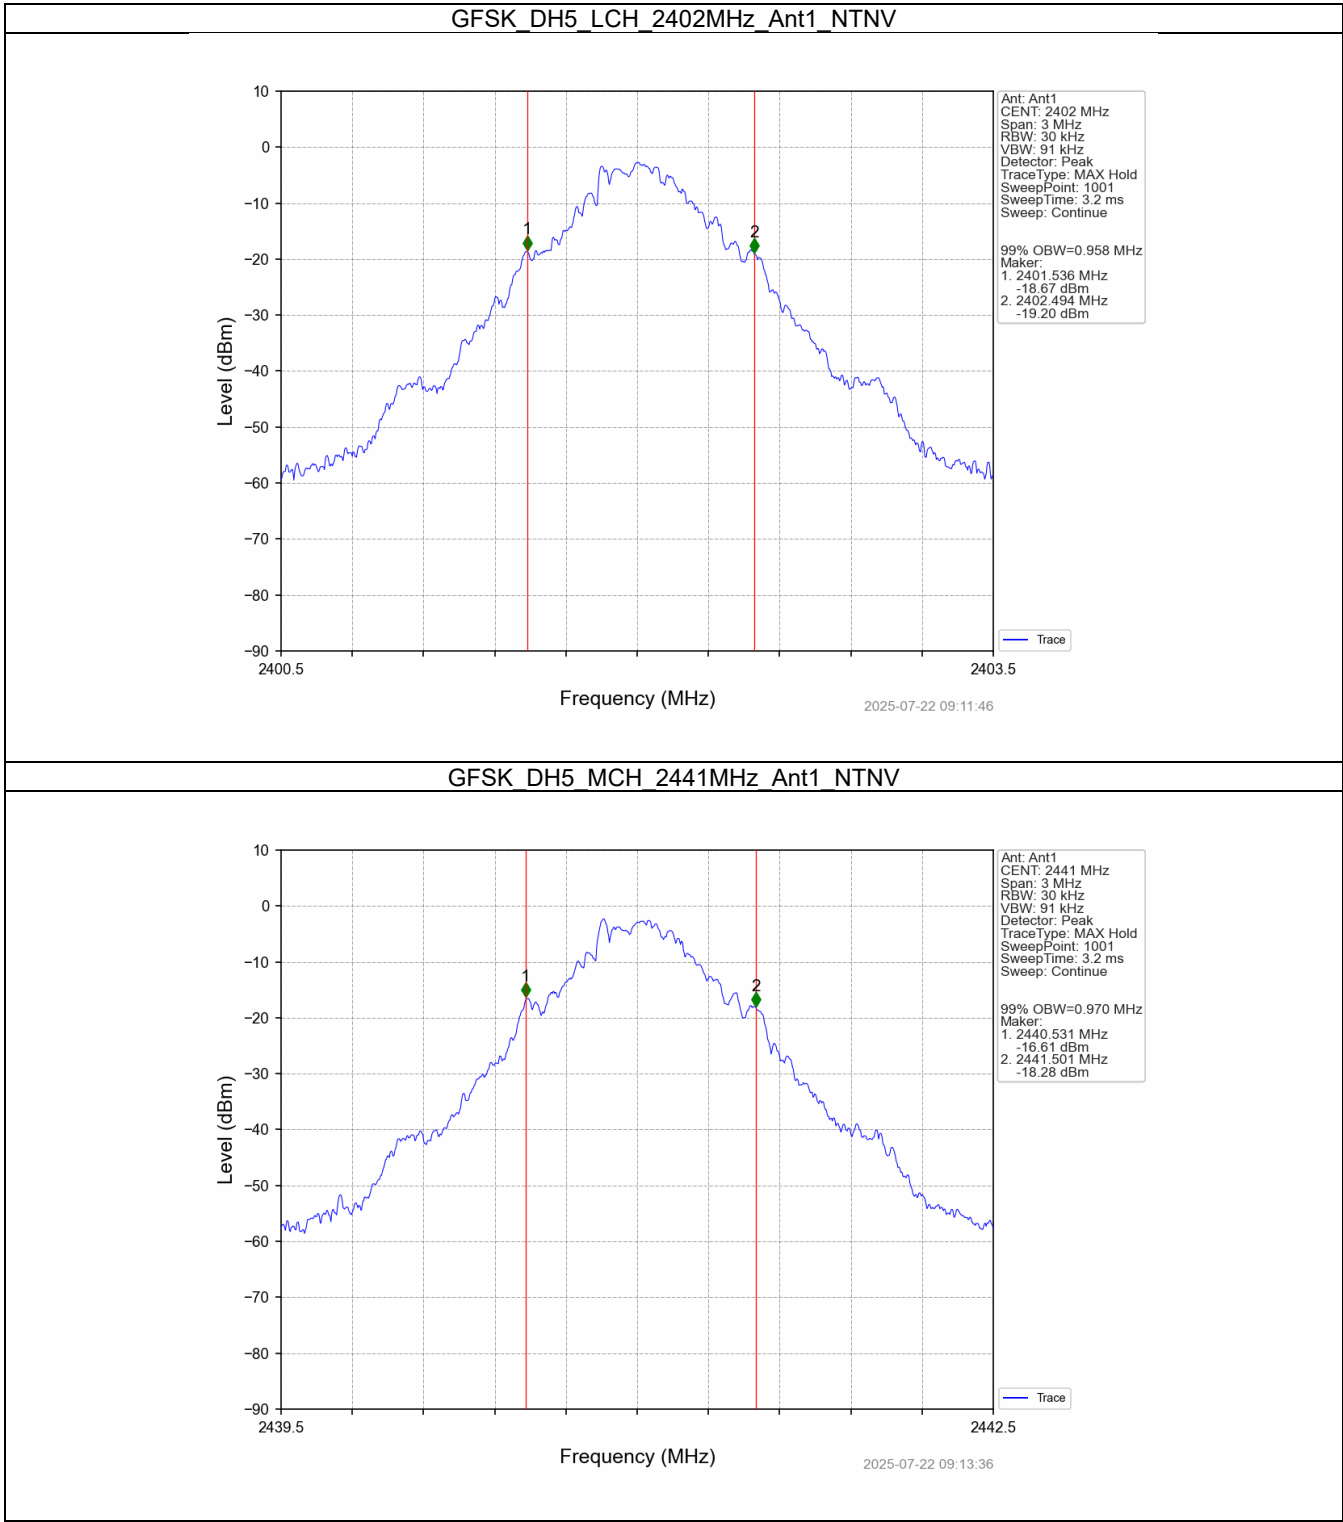


GFSK DH5_HCH_2480MHz_Ant1_NTNV

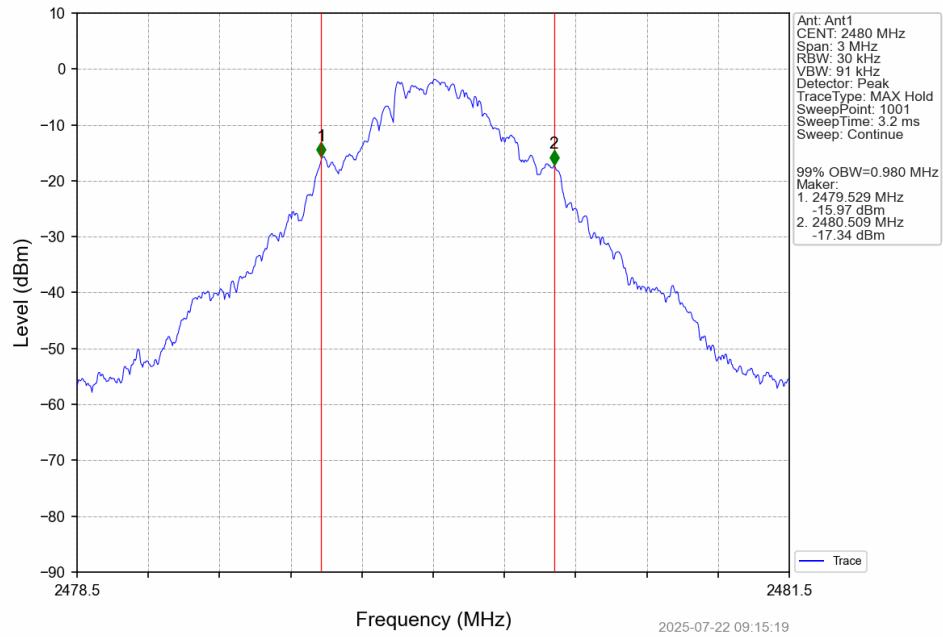


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

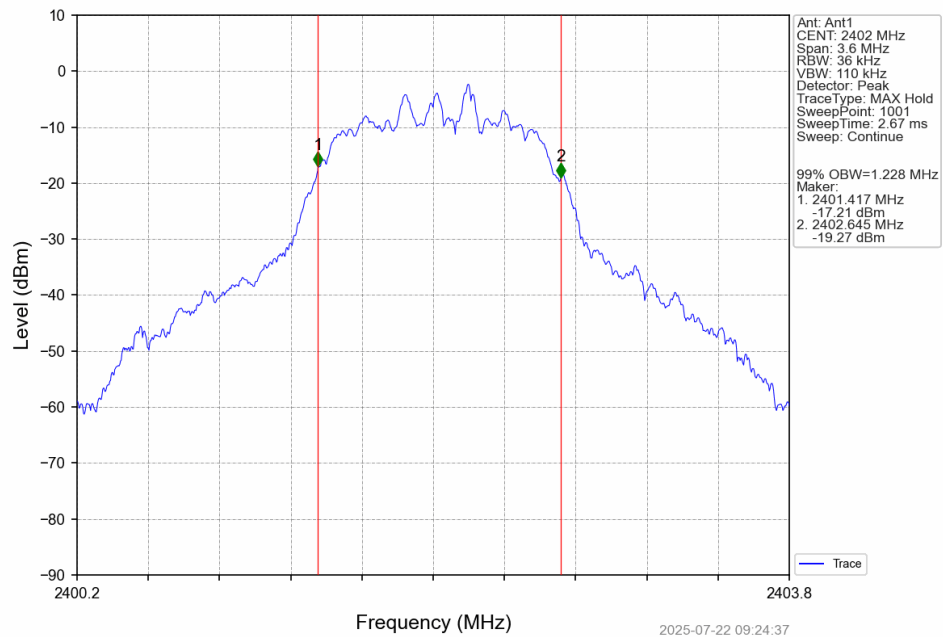


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

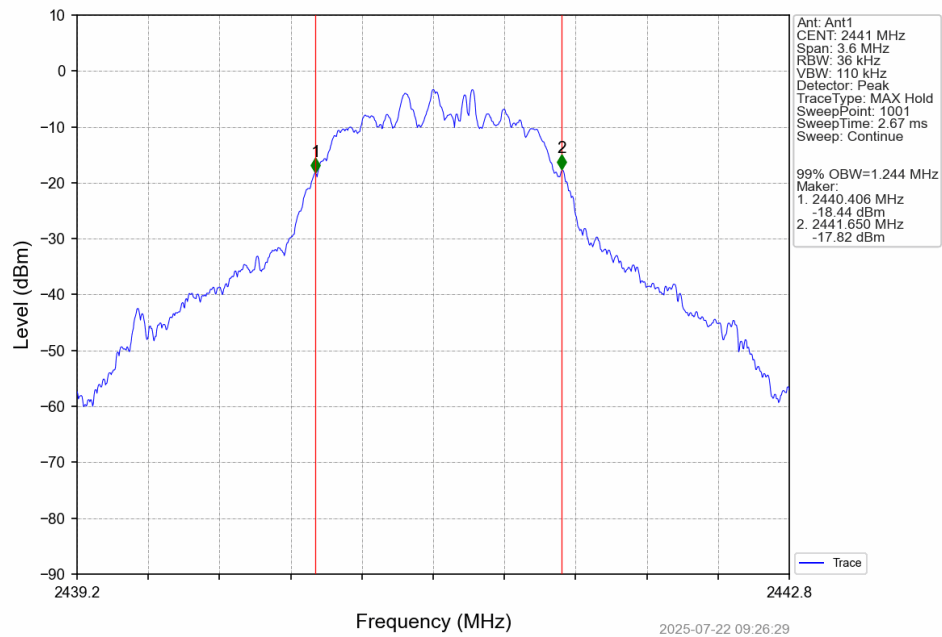


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

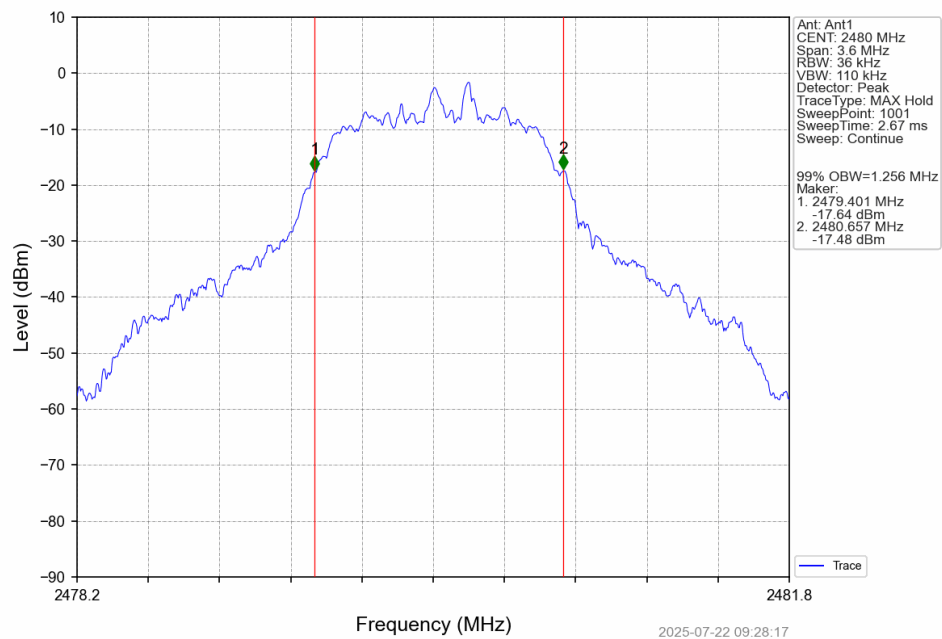


2.2.2 20dB BW

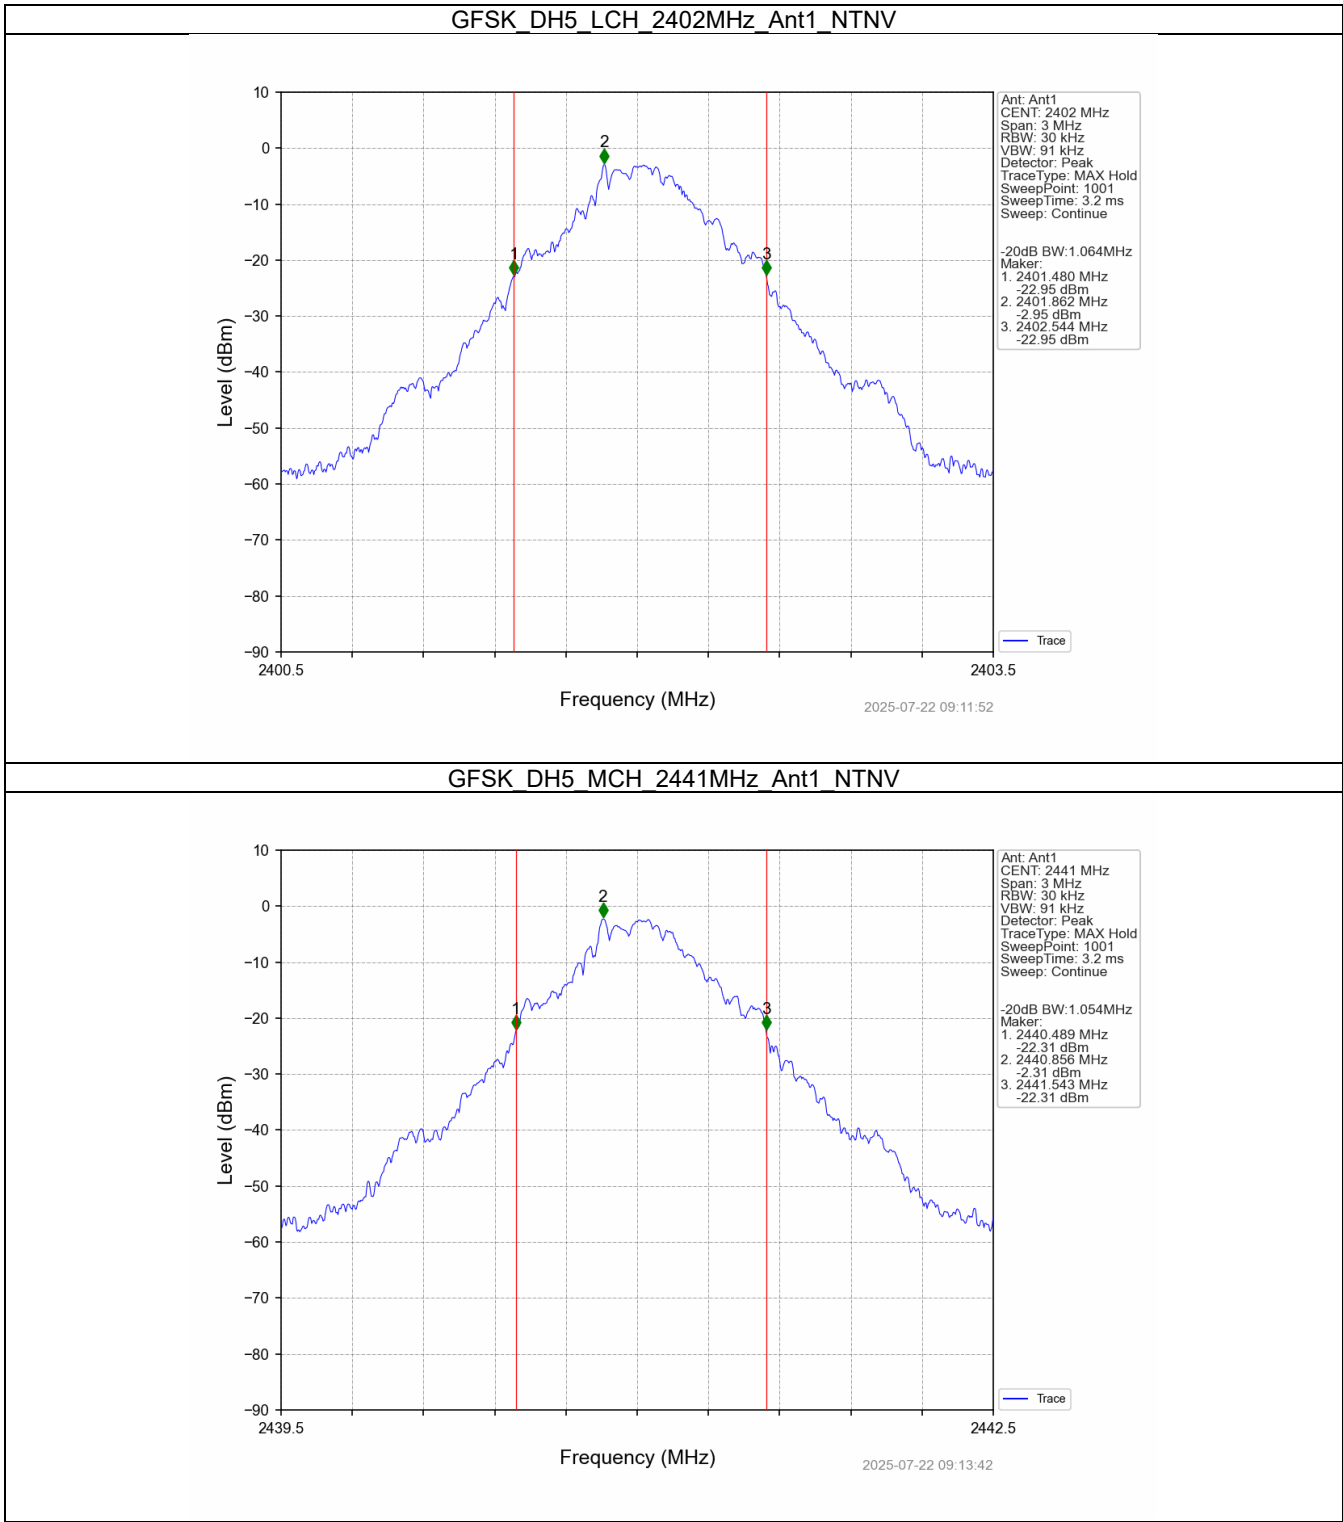


GFSK DH5_HCH_2480MHz_Ant1_NTNV

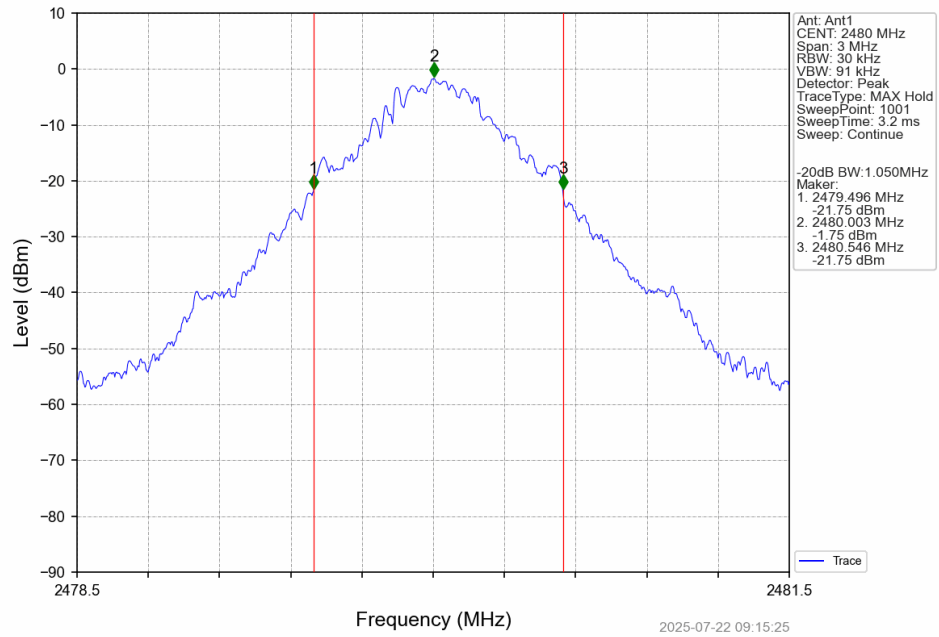


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

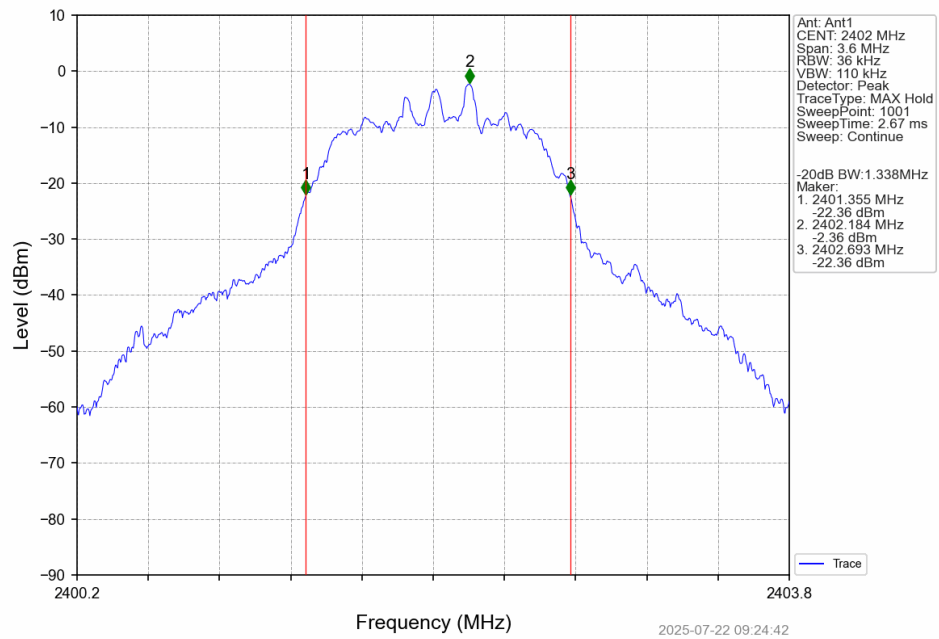

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

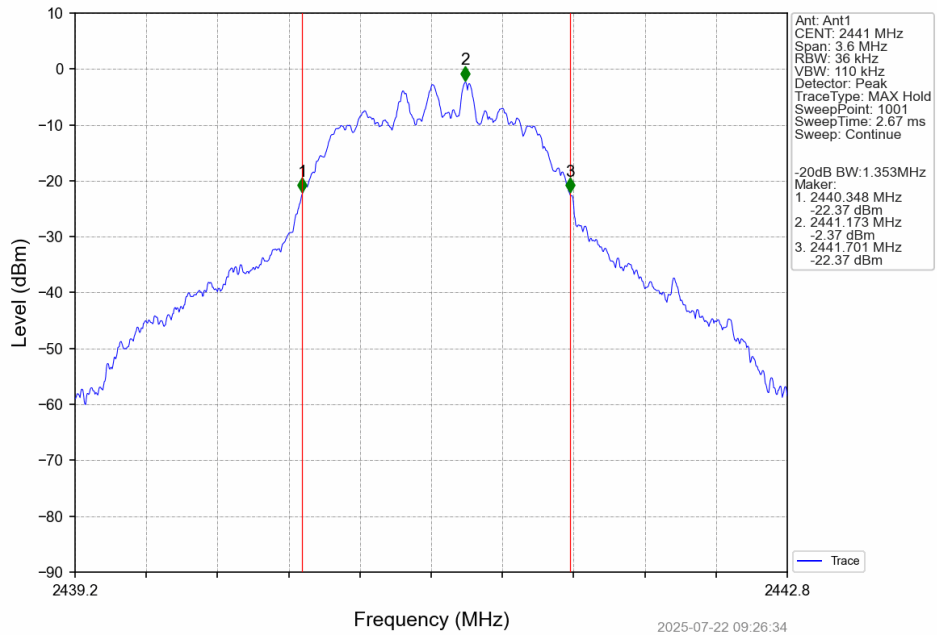

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

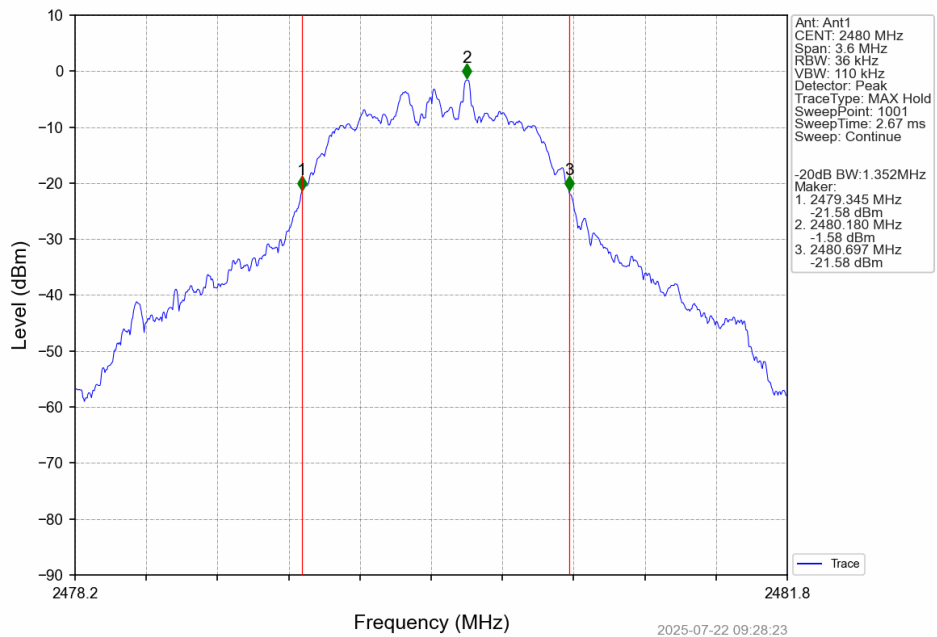

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-0.46	≤ 20.97	Pass
		2441	DH5	-0.07	≤ 20.97	Pass
		2480	DH5	0.49	≤ 20.97	Pass
Pi/4DQPSK	SISO	2402	2DH5	0.33	≤ 20.97	Pass
		2441	2DH5	0.68	≤ 20.97	Pass
		2480	2DH5	1.22	≤ 20.97	Pass

4. Carrier Frequency Separation


4.1 Test Result

4.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.966	1.064	≥ 0.709	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.353	≥ 0.902	Pass

4.2 Test Graph

4.2.1 Ant1

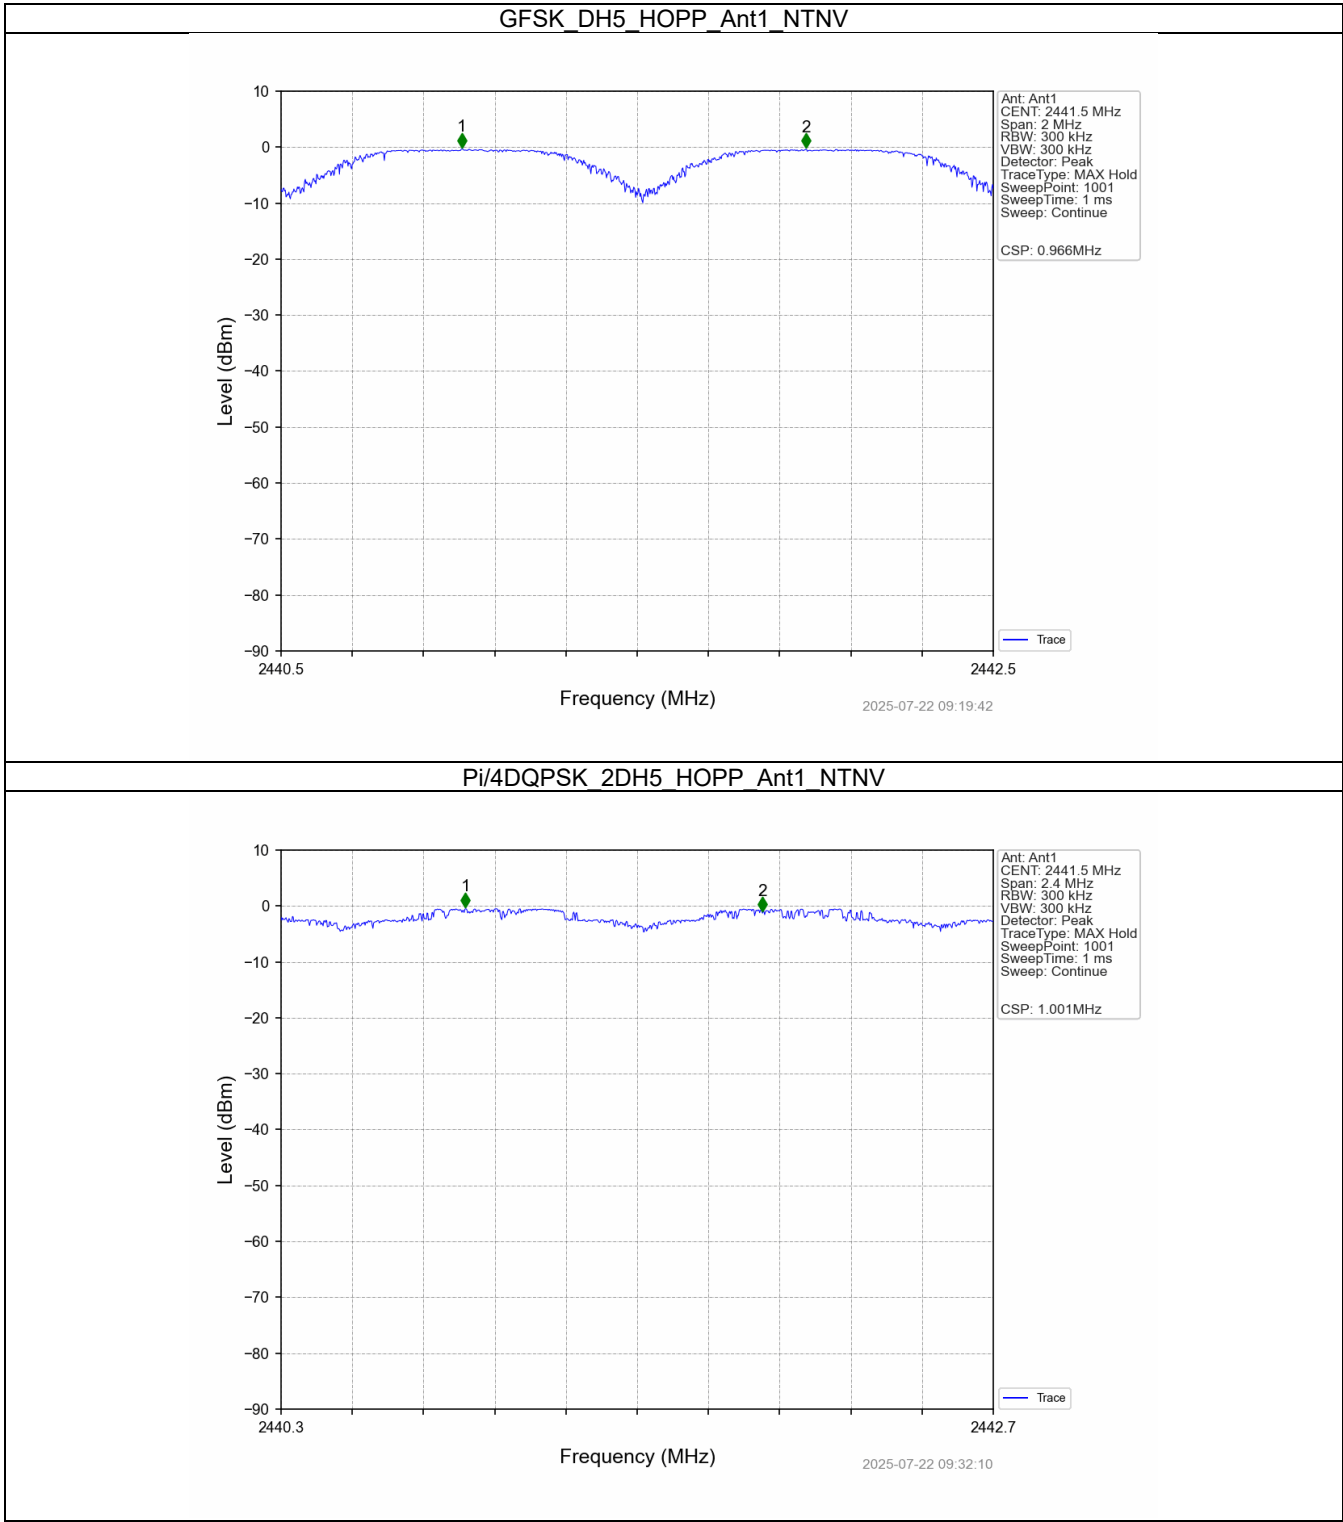

5. Number of Hopping Frequencies


5.1 Test Result

5.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass

5.2 Test Graph

5.2.1 HoppNum

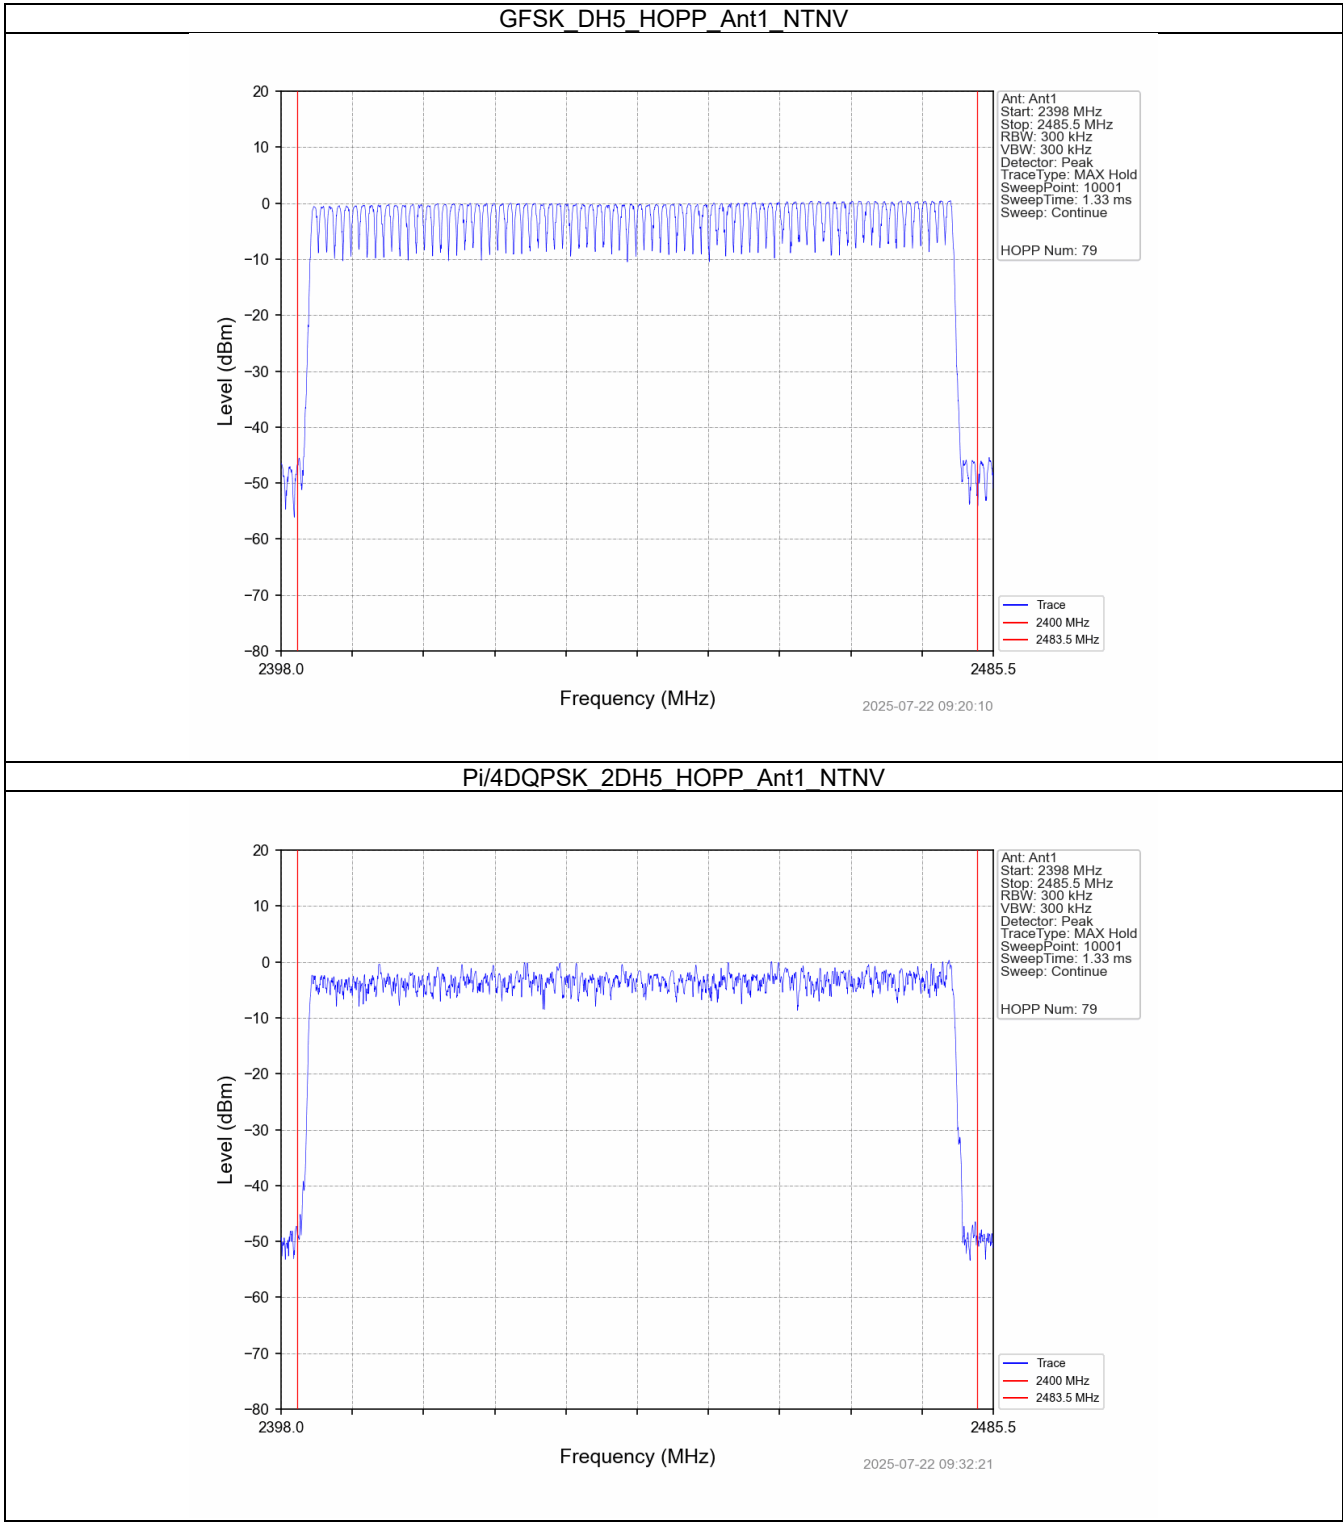

6. Time of Occupancy (Dwell Time)


6.1 Test Result

6.1.1 Ant1


Ant1									
Mode	Tx Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.380	31.600	319	121.220	<=400	Pass
			DH3	1.636	31.600	157	256.852	<=400	Pass
			DH5	2.890	31.600	119	343.910	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.390	31.600	319	124.410	<=400	Pass
			2DH3	1.642	31.600	161	264.362	<=400	Pass
			2DH5	2.892	31.600	117	338.364	<=400	Pass

6.2 Test Graph


6.2.1 Ant1

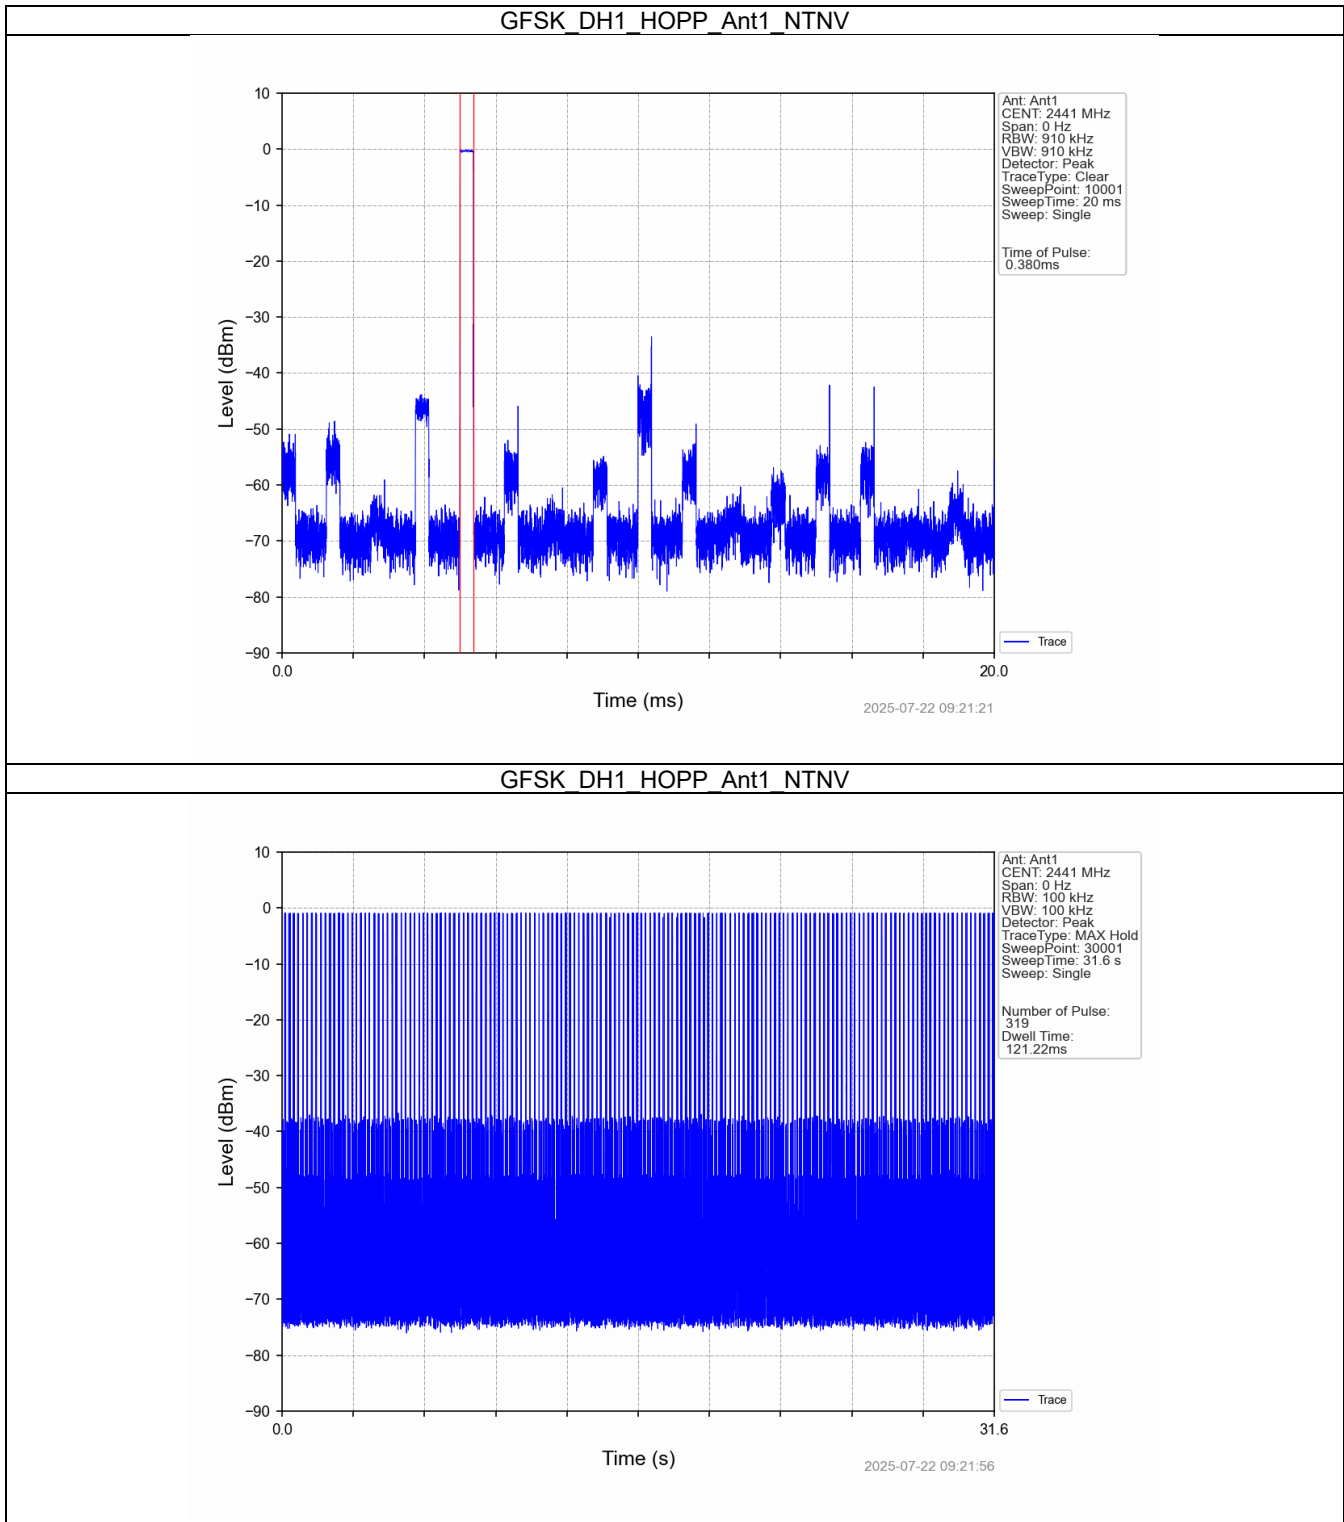


GFSK_DH3_HOPP_Ant1_NTNV

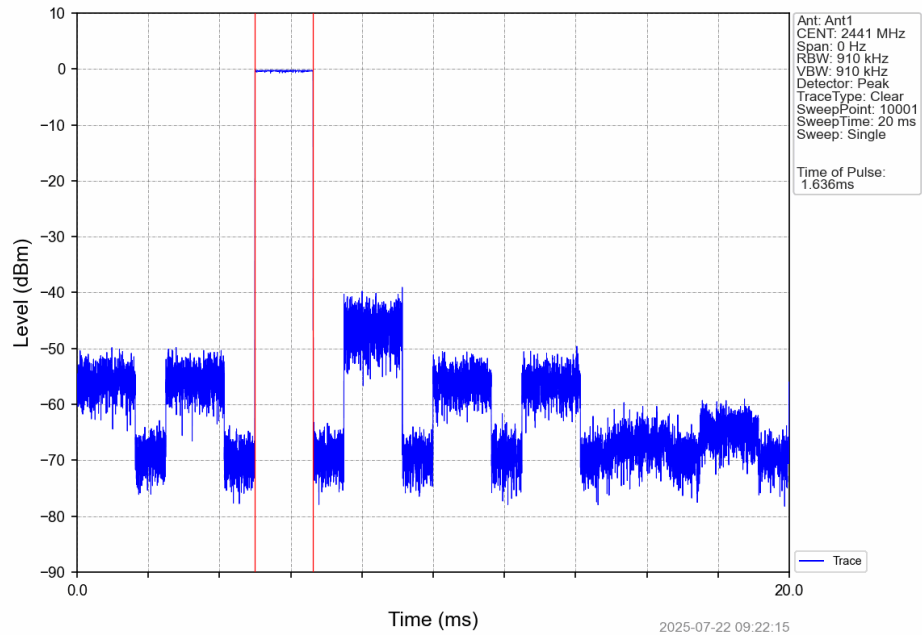


GFSK_DH3_HOPP_Ant1_NTNV

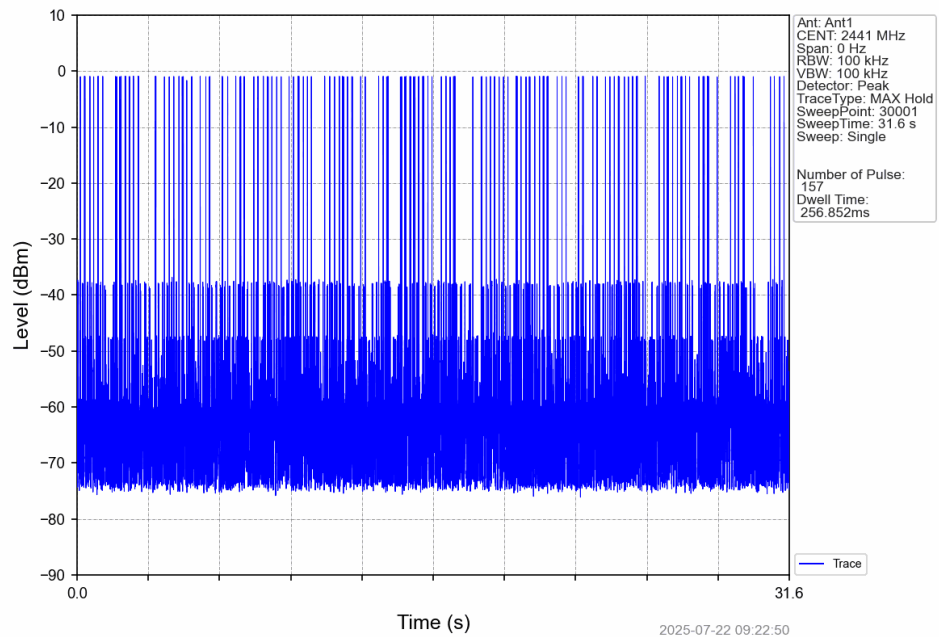


GFSK_DH5_HOPP_Ant1_NTNV

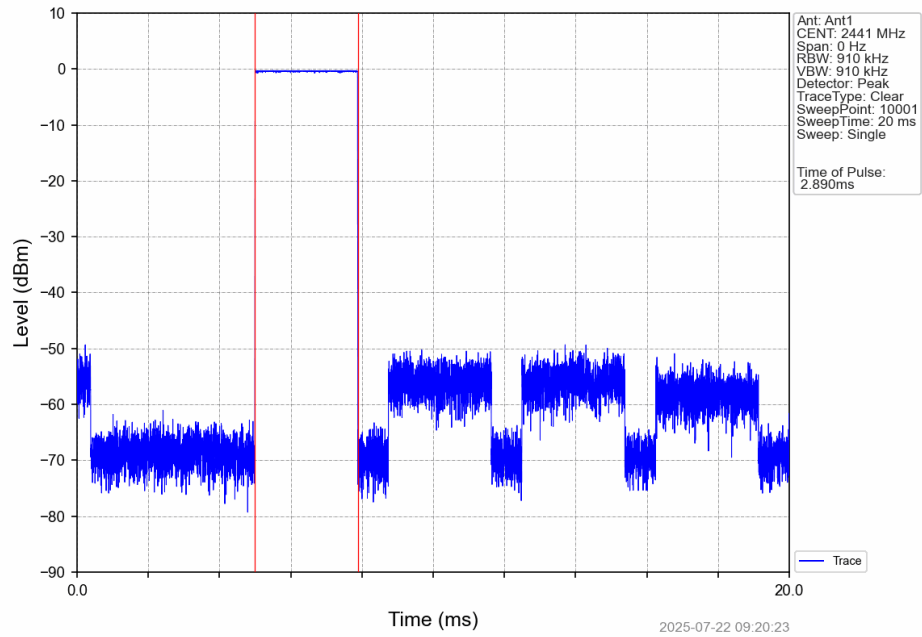


GFSK_DH5_HOPP_Ant1_NTNV

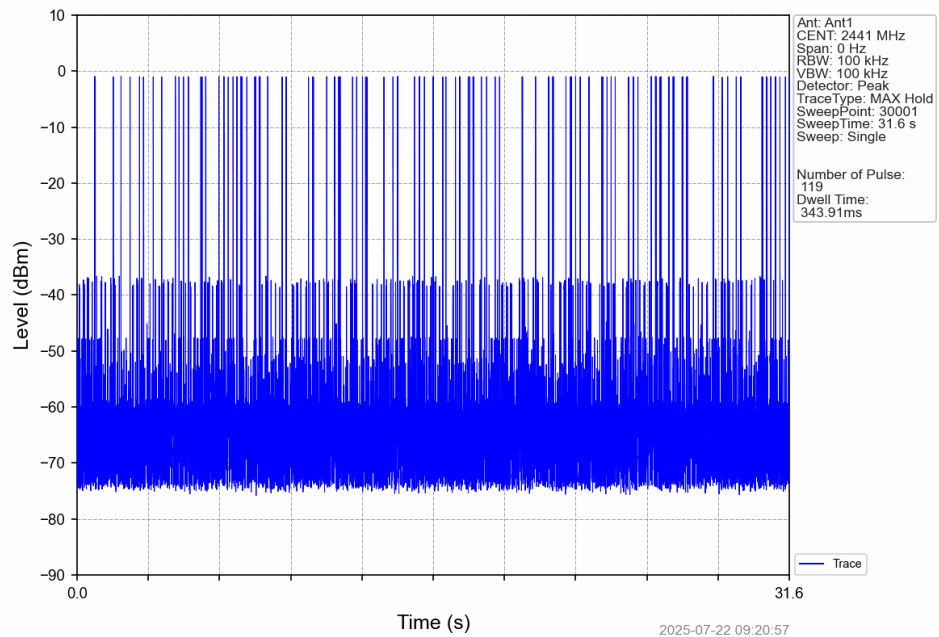


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

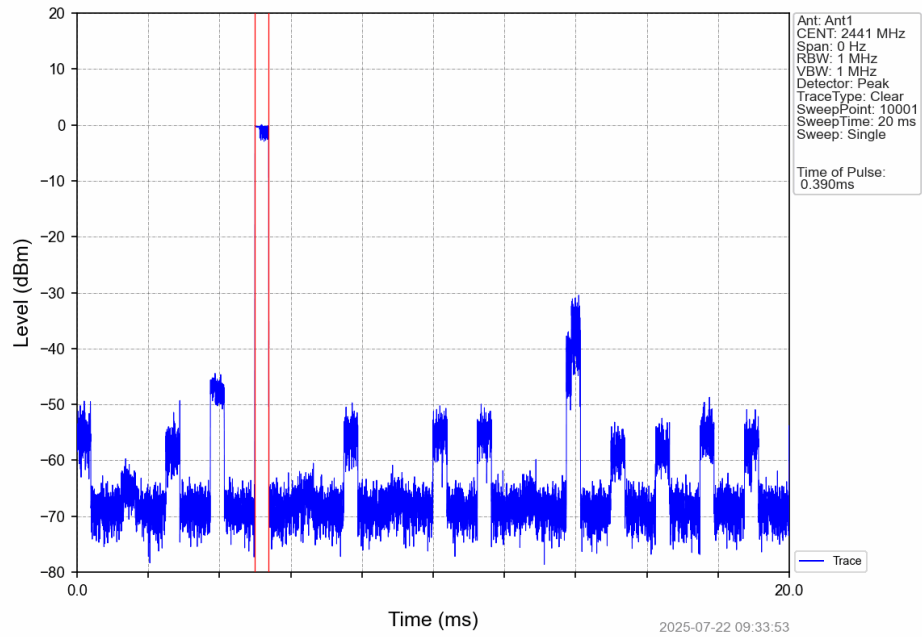


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

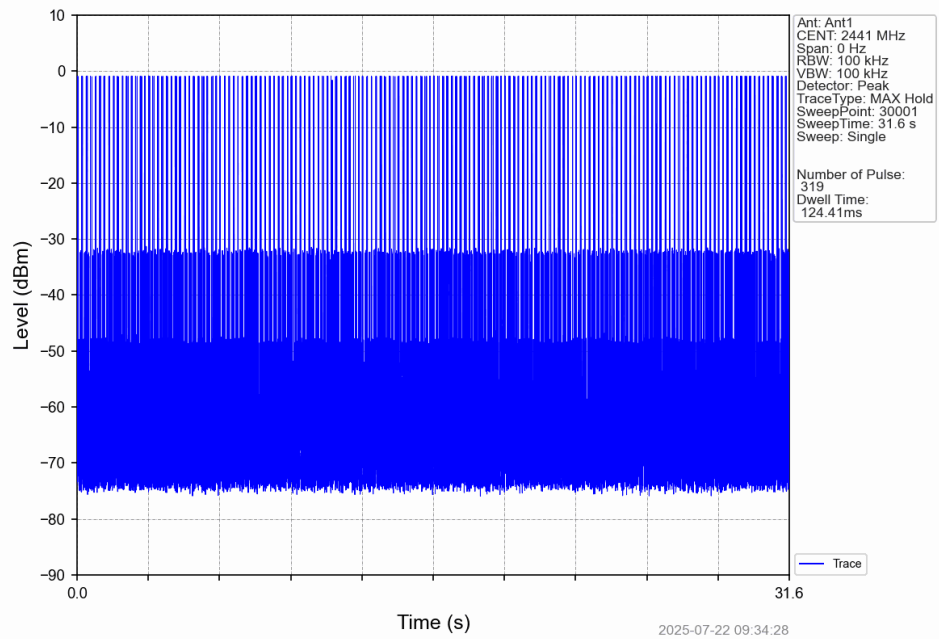


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

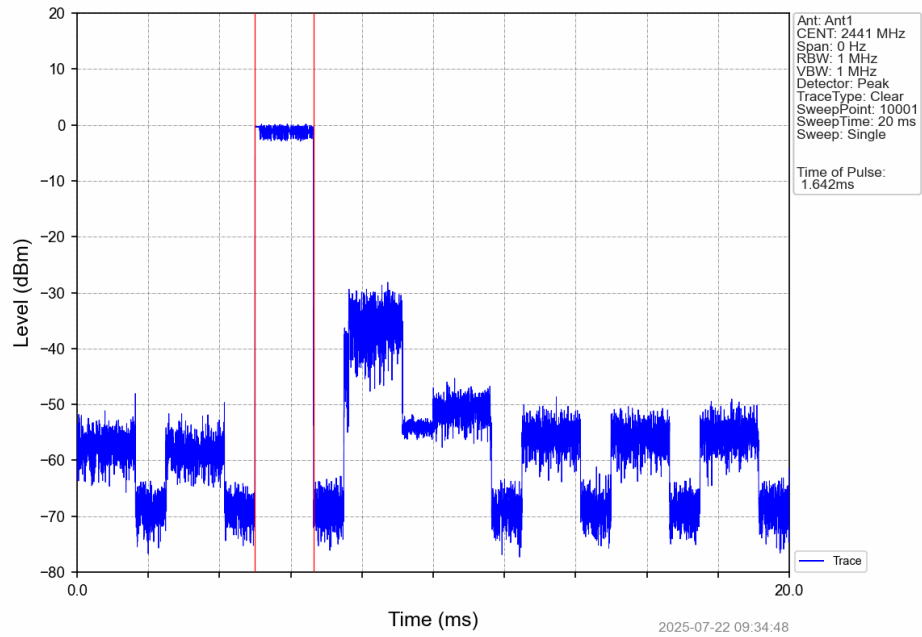


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

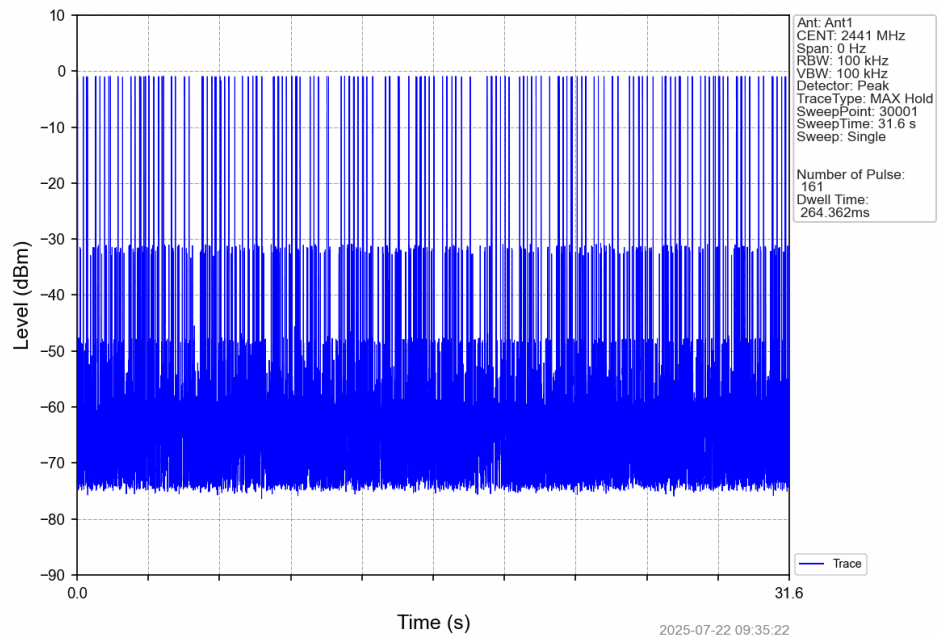

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

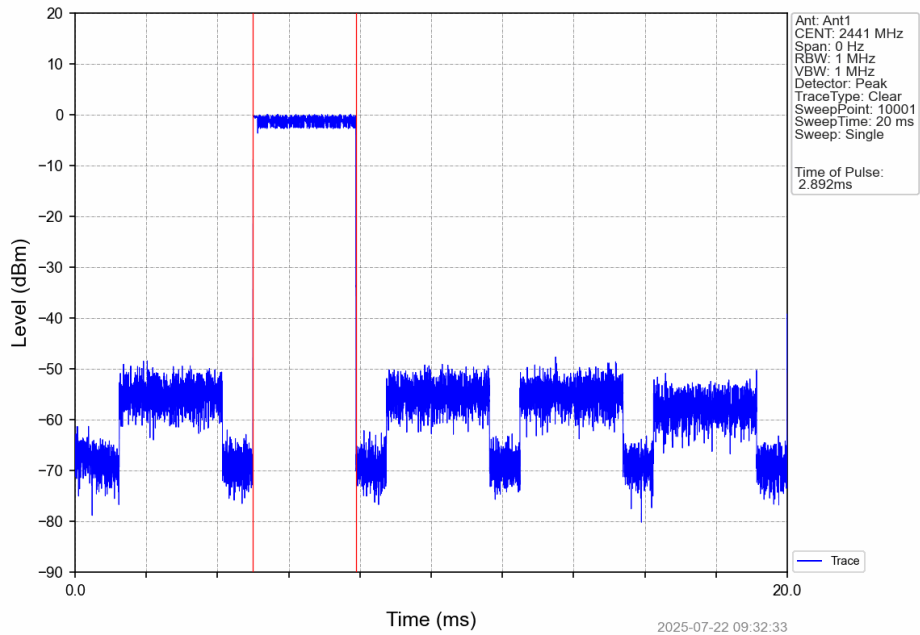

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

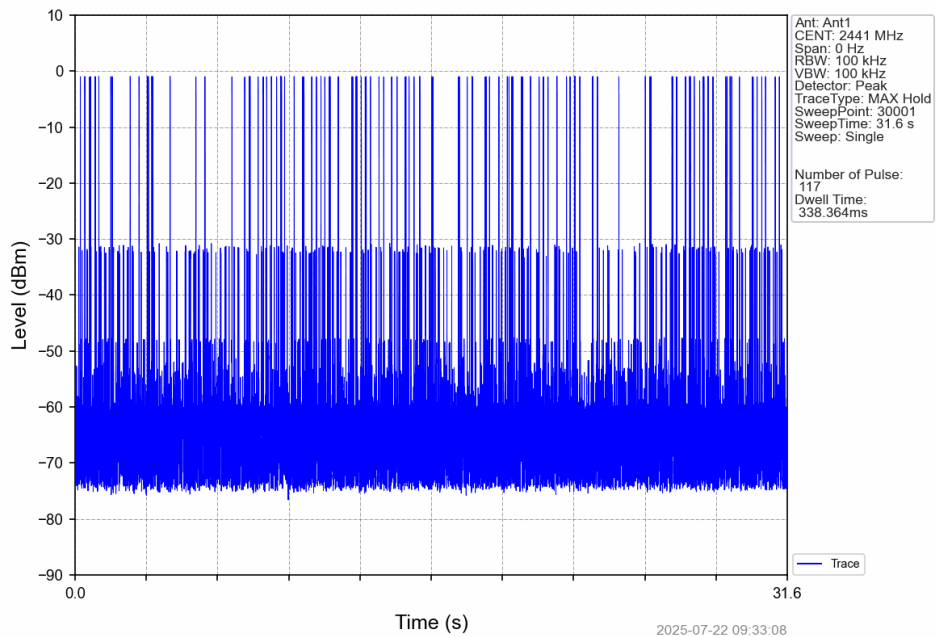

7. Unwanted Emissions In Non-restricted Frequency Bands

7.1 Test Result

7.1.1 Ref


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-0.78
		2441	DH5	1	-0.61
		2480	DH5	1	0.05
Pi/4DQPSK	SISO	2402	2DH5	1	-0.92
		2441	2DH5	1	-0.57
		2480	2DH5	1	-0.13
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.					

7.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.05	-19.95	Pass
		2441	DH5	1	0.05	-19.95	Pass
		2480	DH5	1	0.05	-19.95	Pass
		HOPP	DH5	1	0.05	-19.95	Pass
					0.05	-19.95	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-0.13	-20.13	Pass
		2441	2DH5	1	-0.13	-20.13	Pass
		2480	2DH5	1	-0.13	-20.13	Pass
		HOPP	2DH5	1	-0.13	-20.13	Pass
					-0.13	-20.13	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							

7.2 Test Graph


7.2.1 Ref

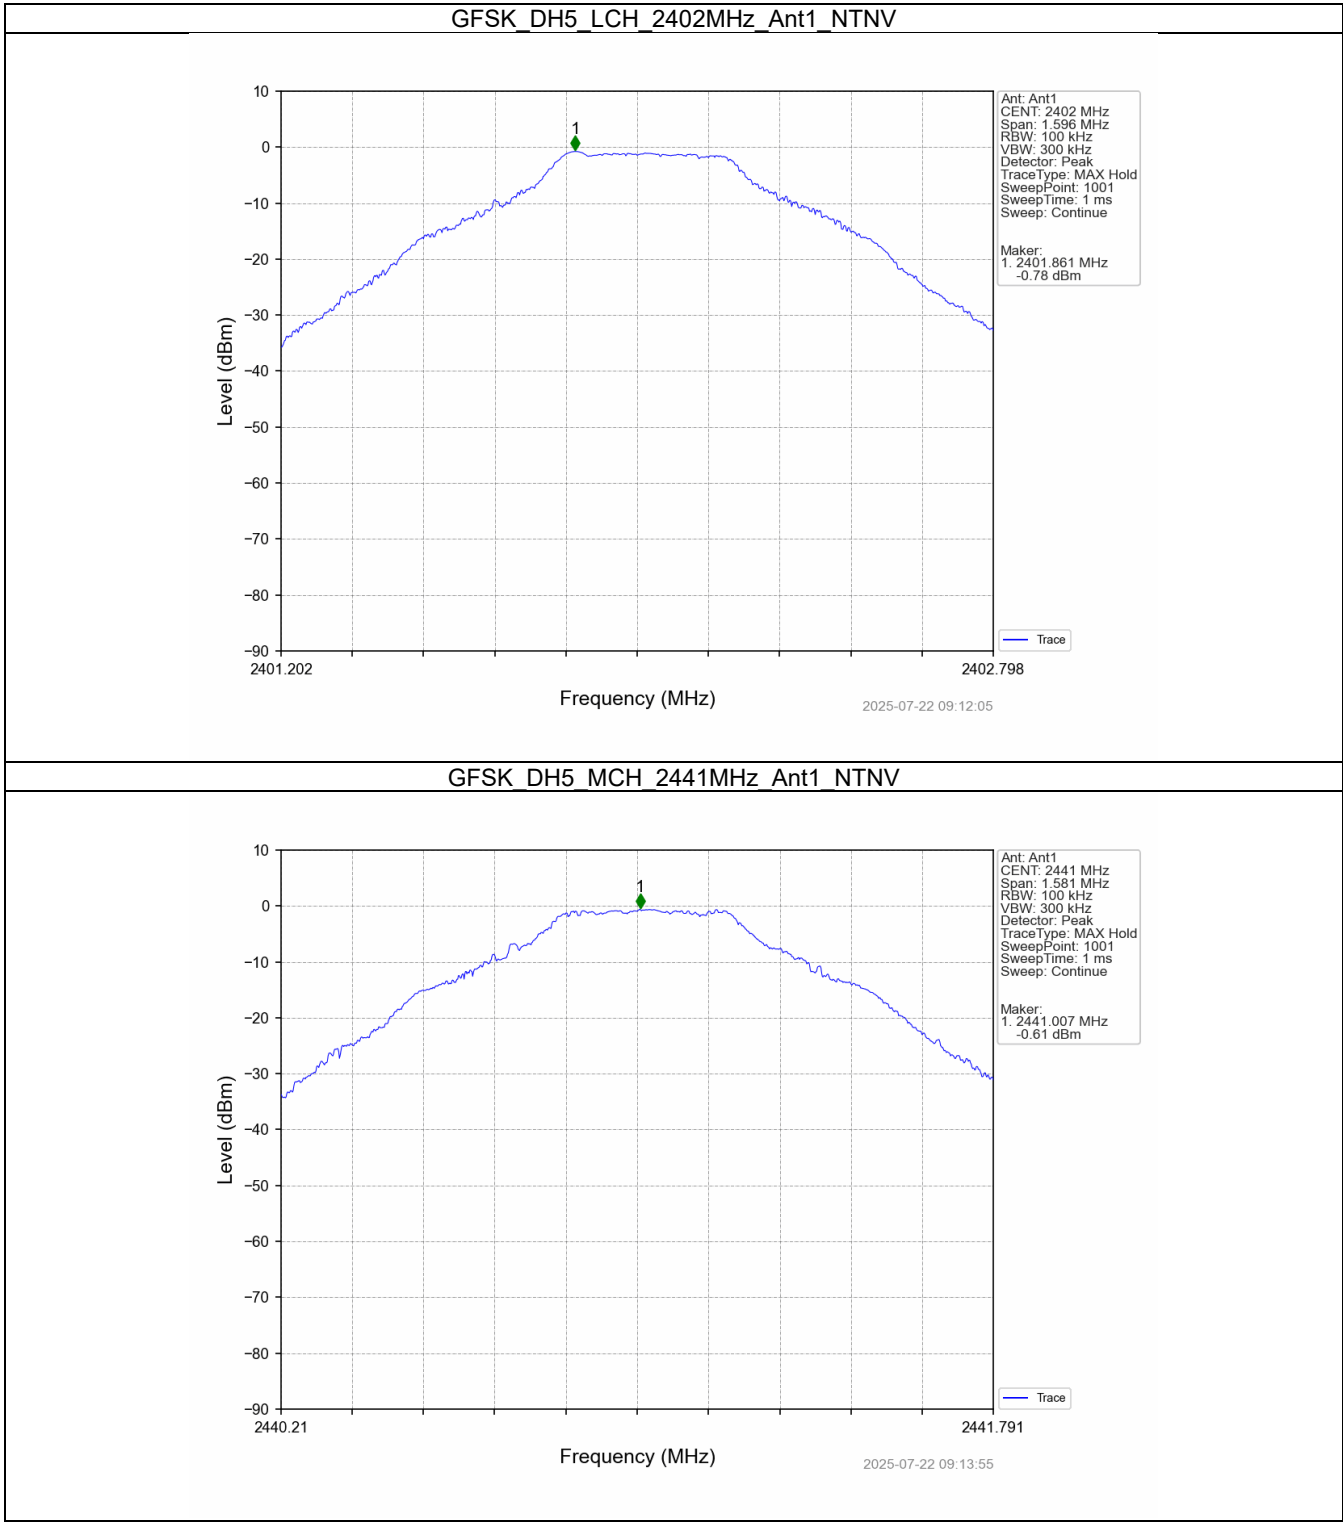


GFSK DH5_HCH_2480MHz_Ant1_NTNV

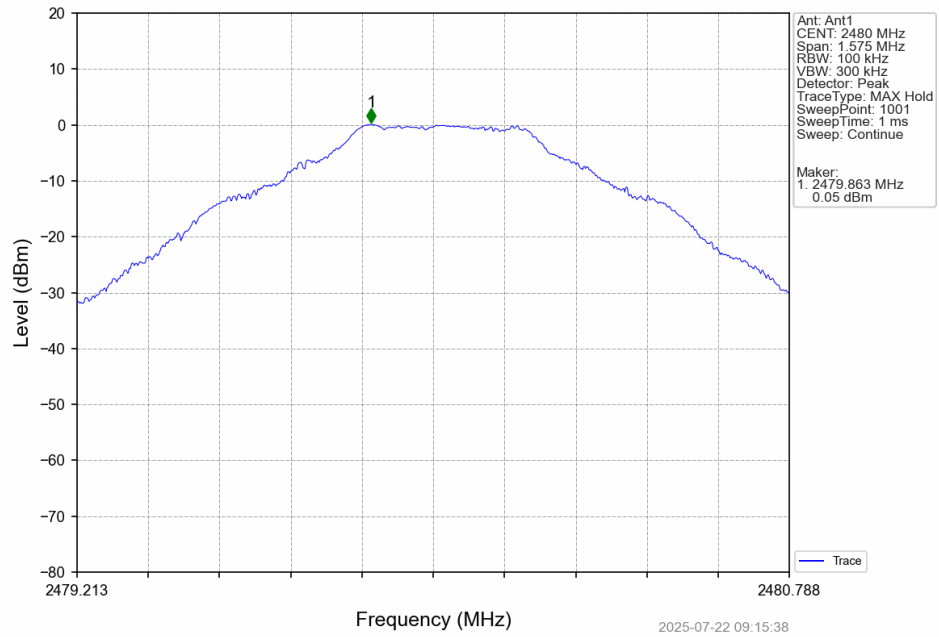


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

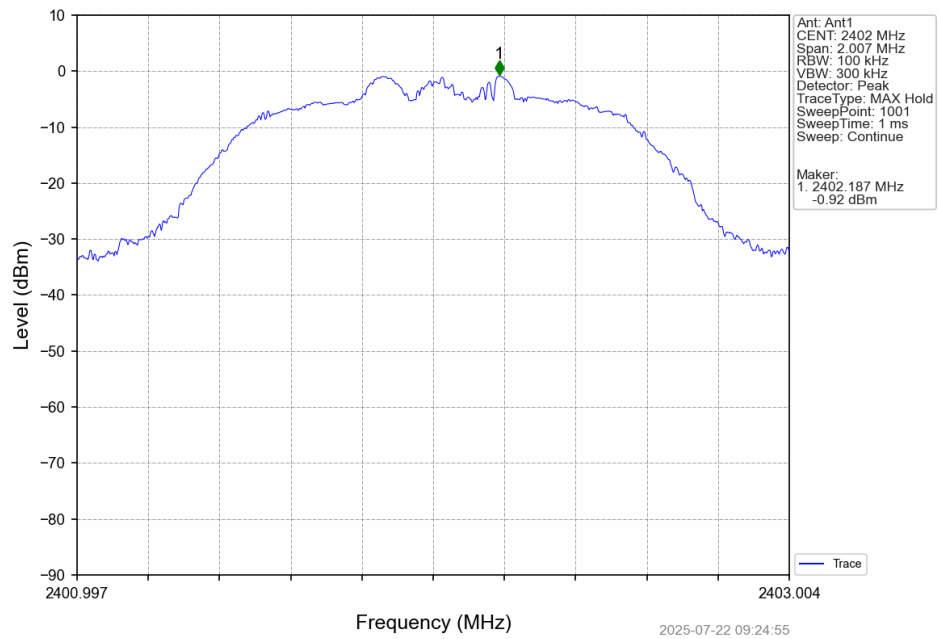


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

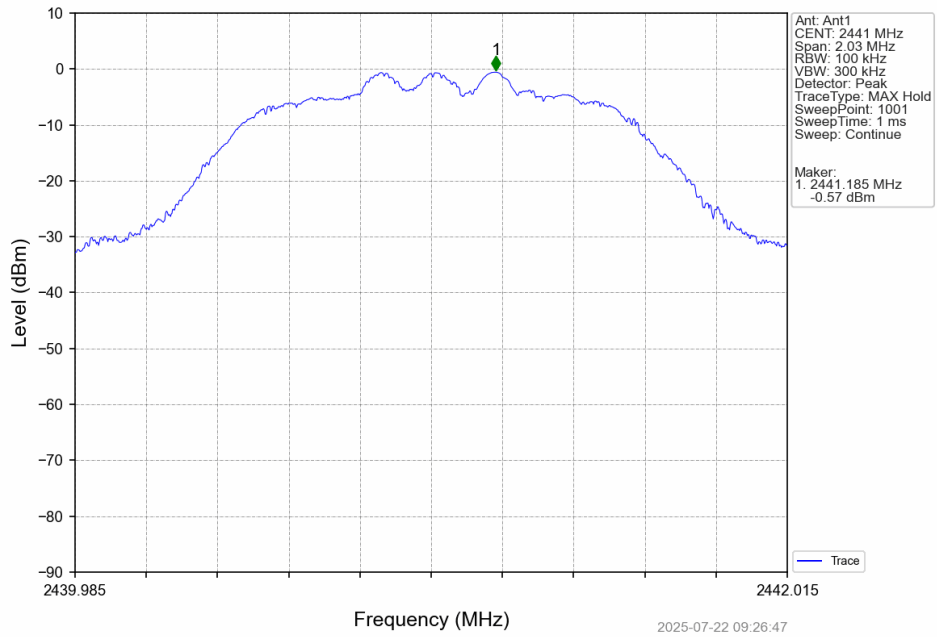


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

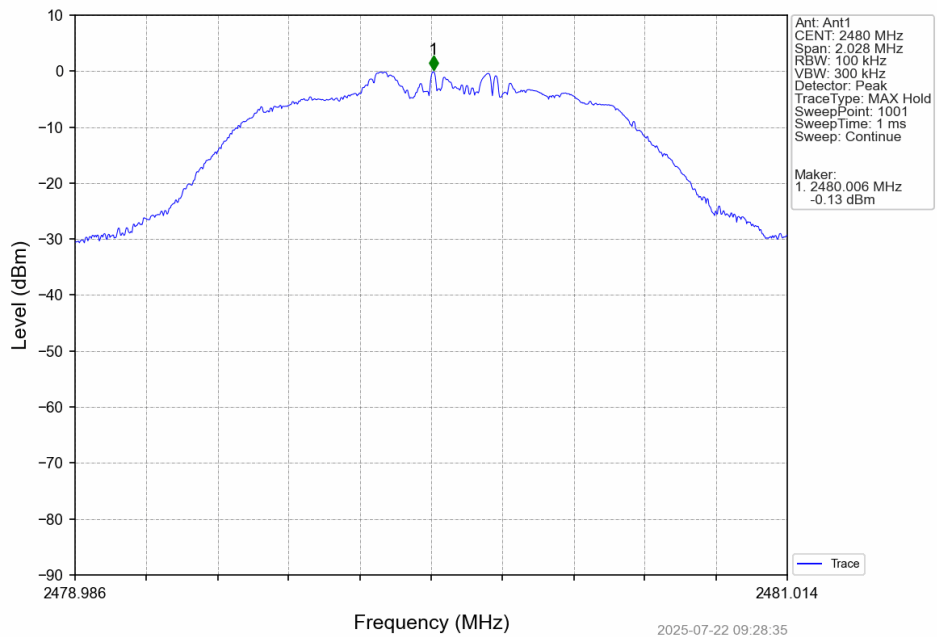


7.2.2 CSE

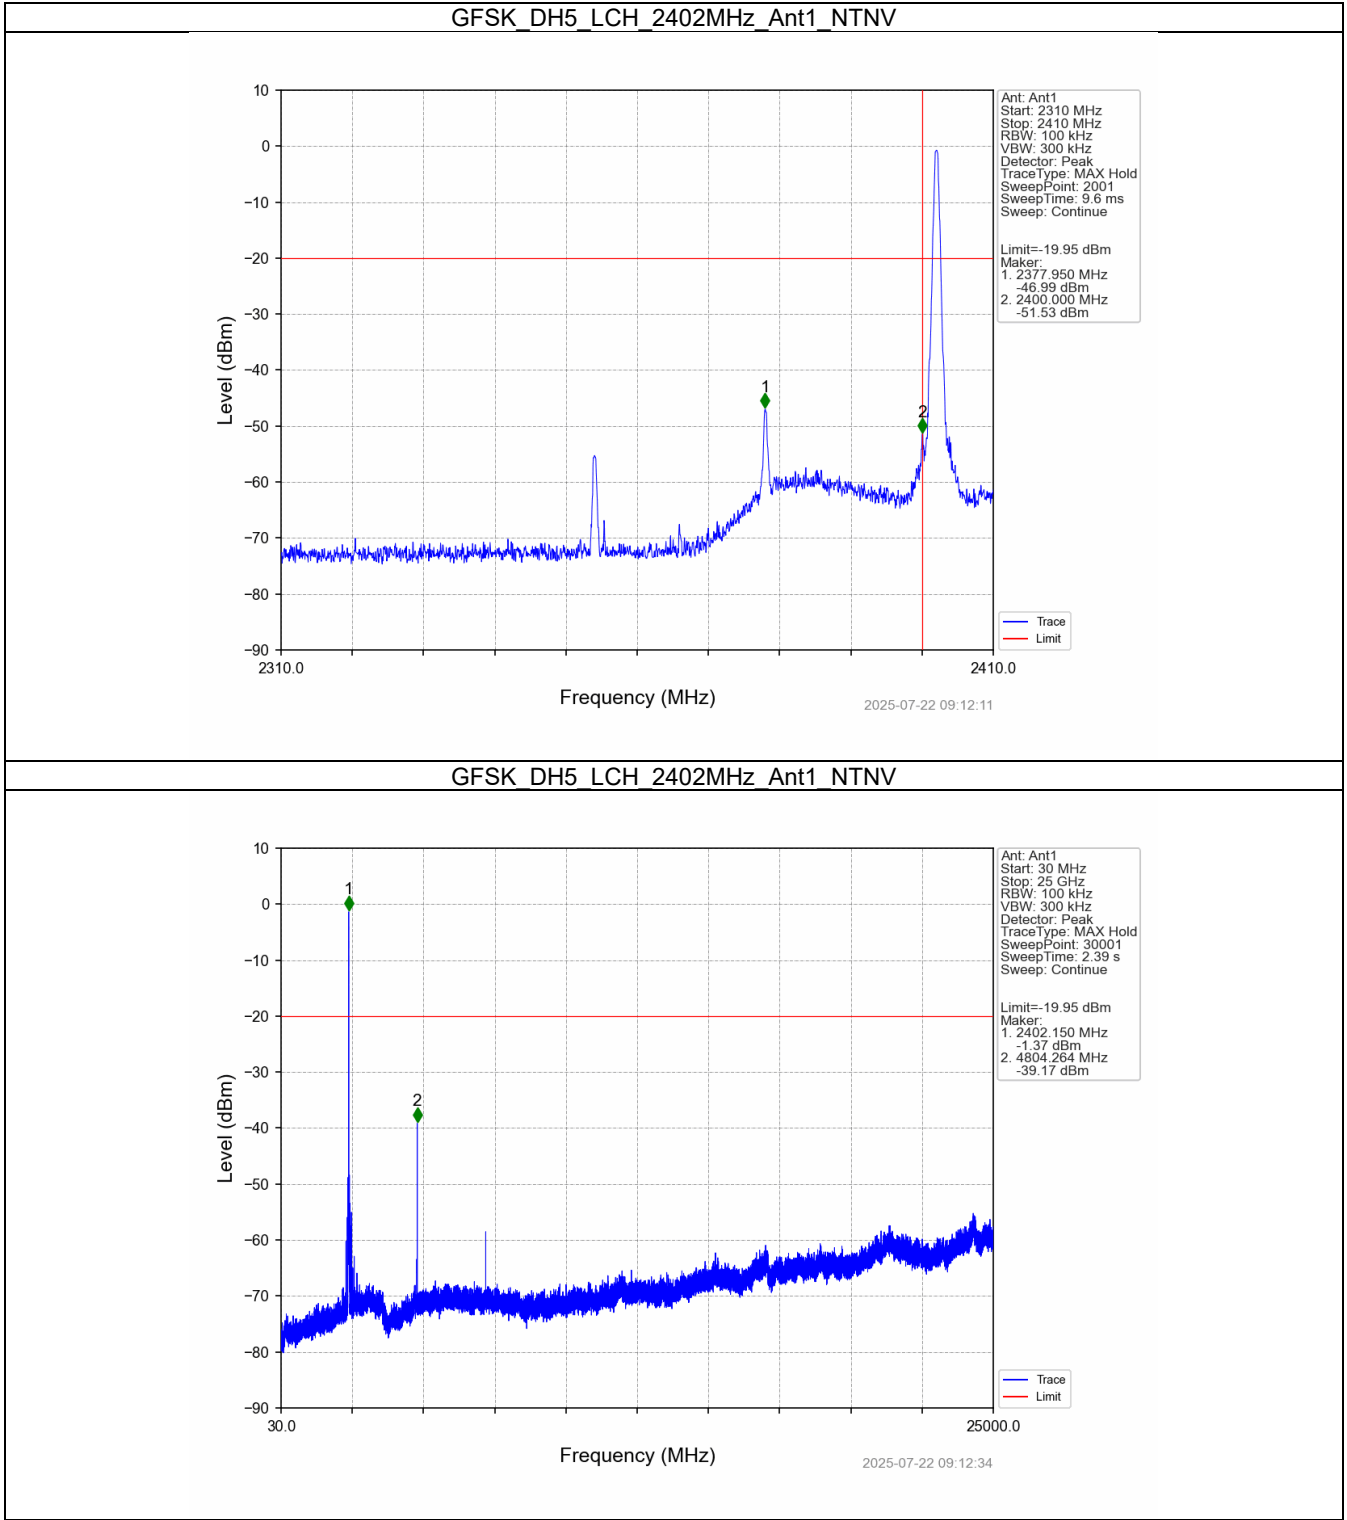


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

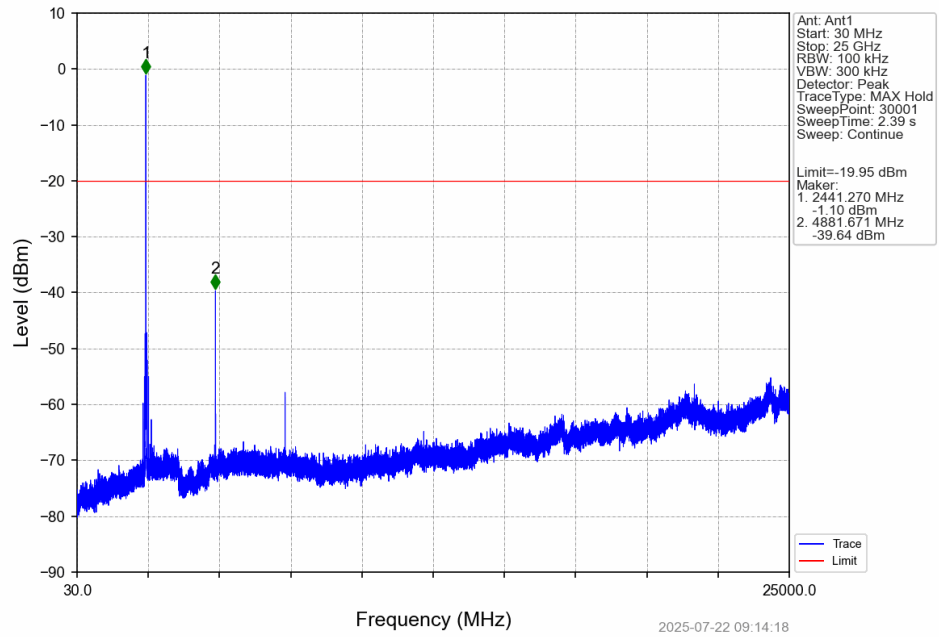


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

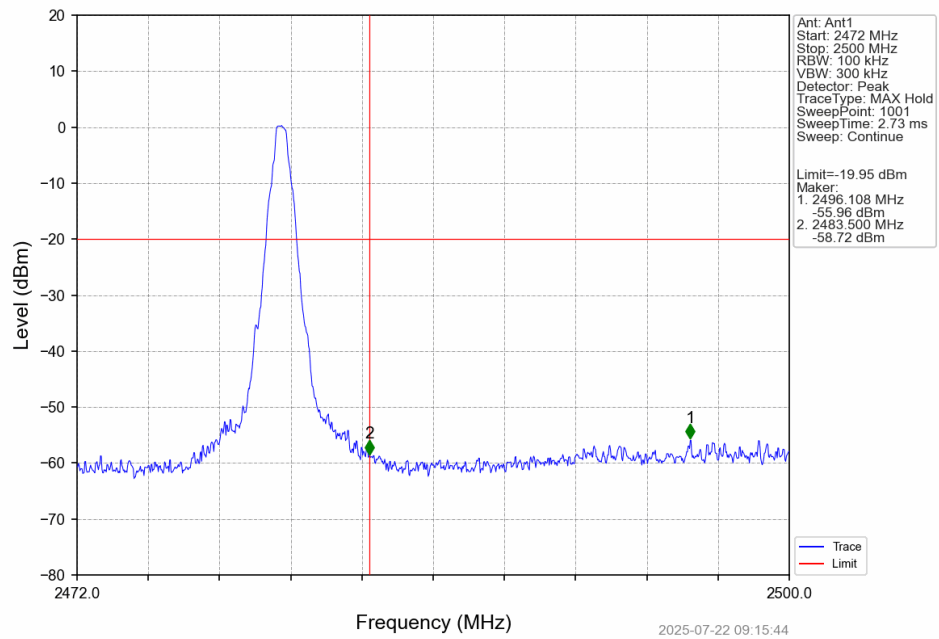


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

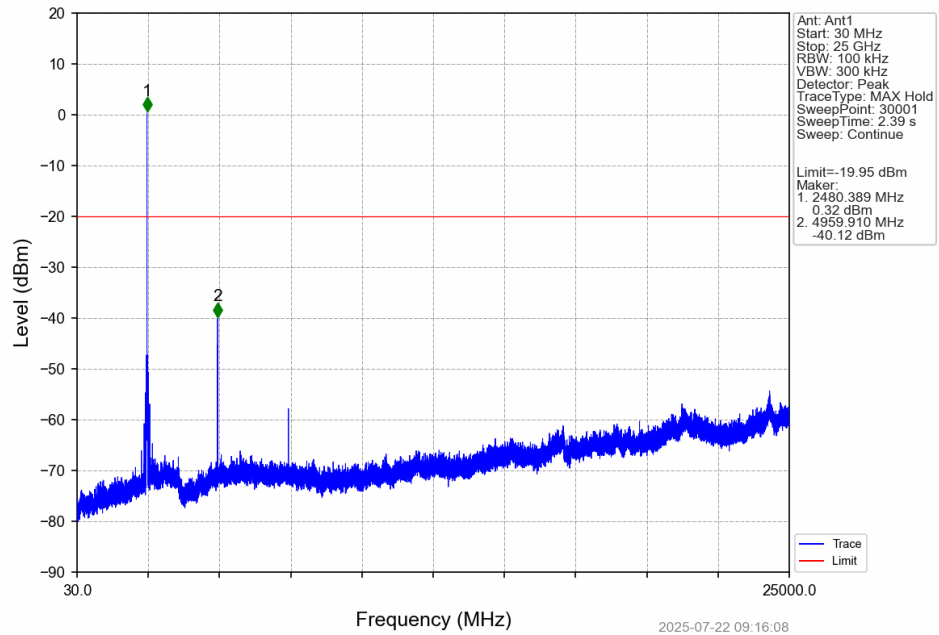


GFSK_DH5_HOPP_Ant1_NTNV

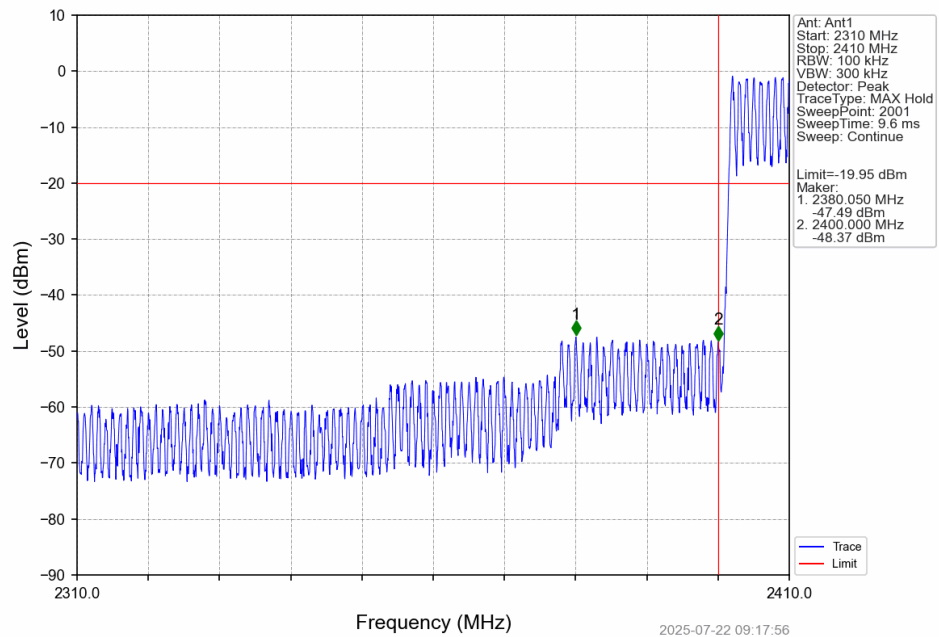


GFSK_DH5_HOPP_Ant1_NTNV

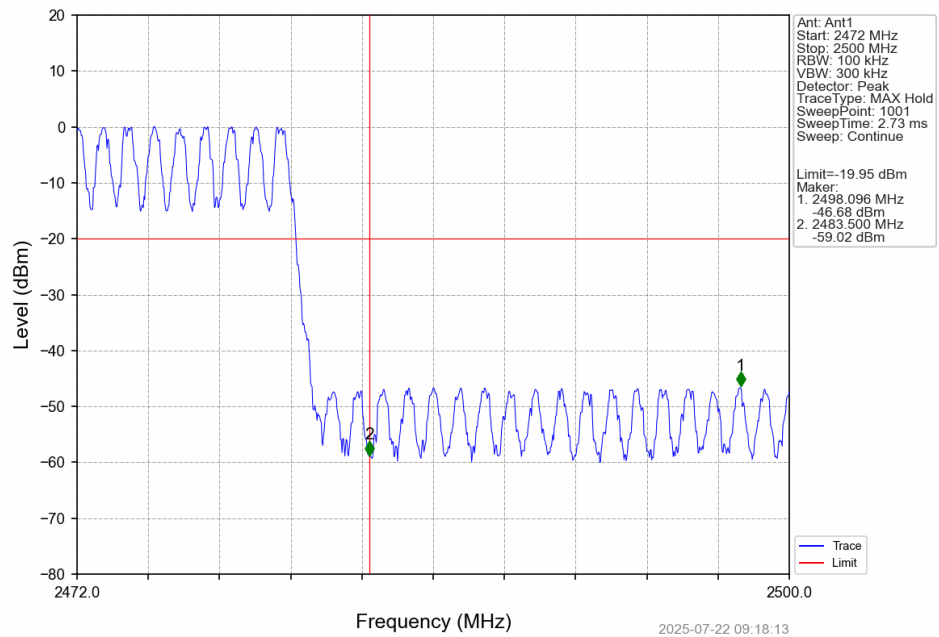


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

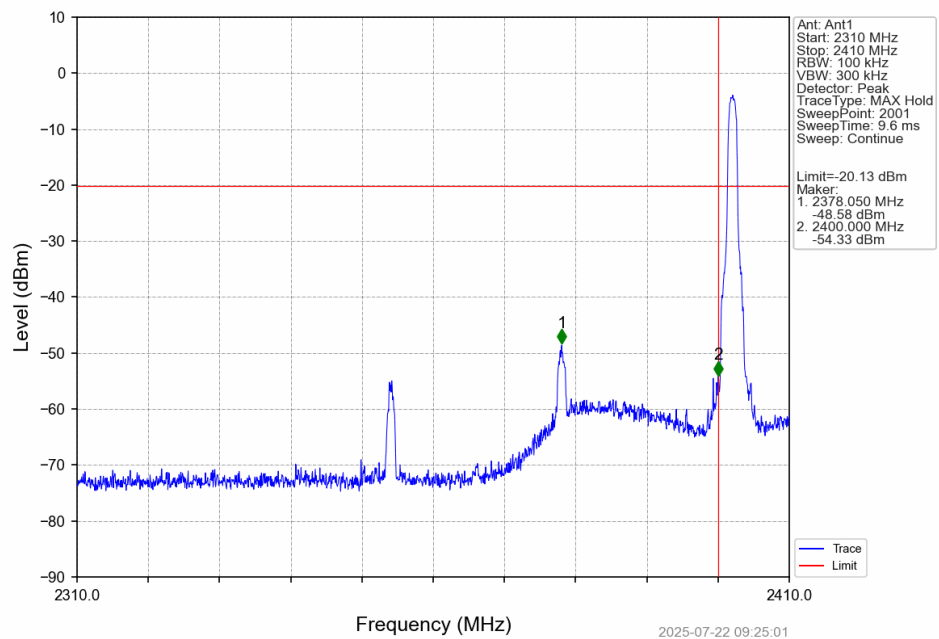


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

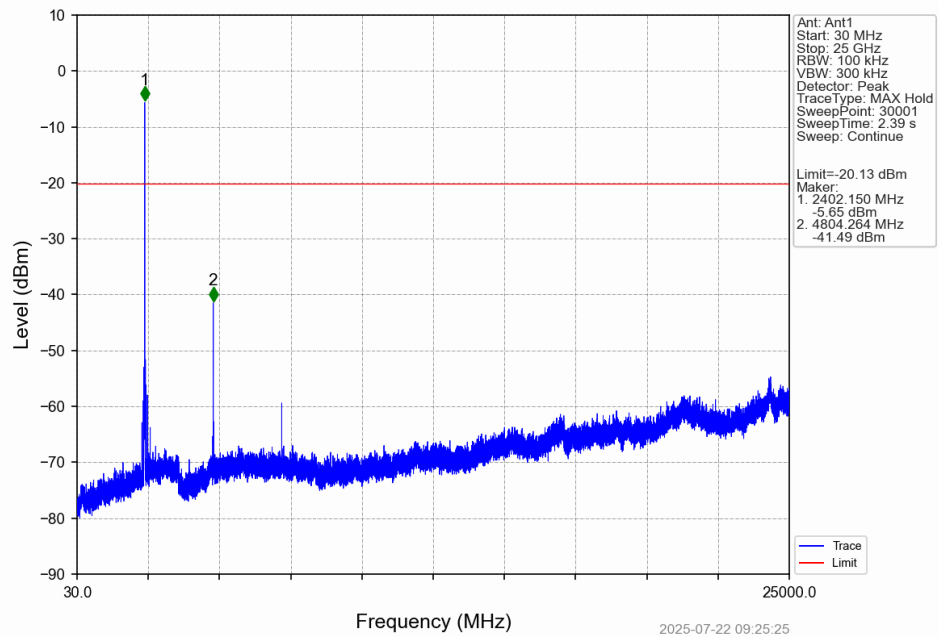


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

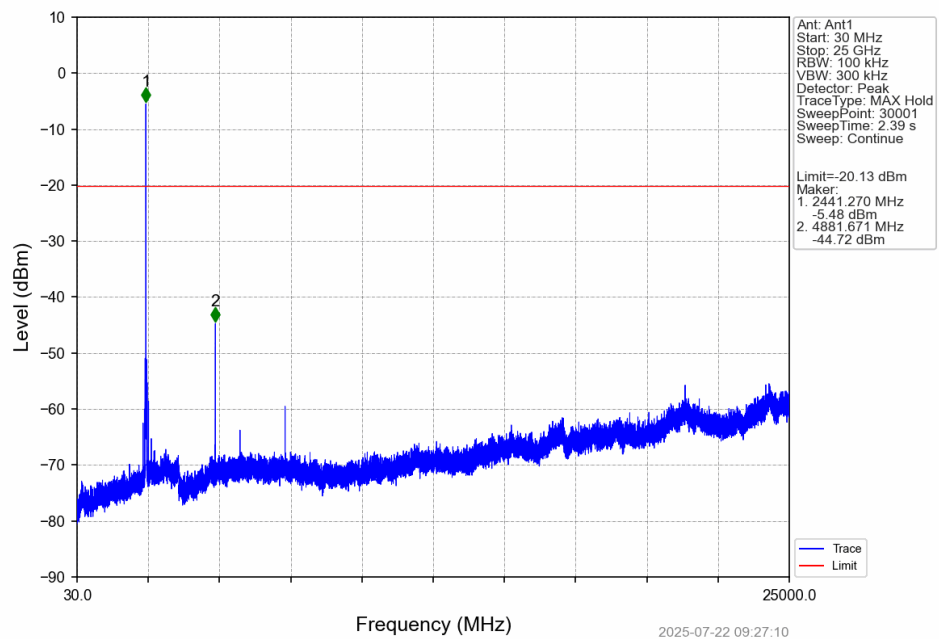


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

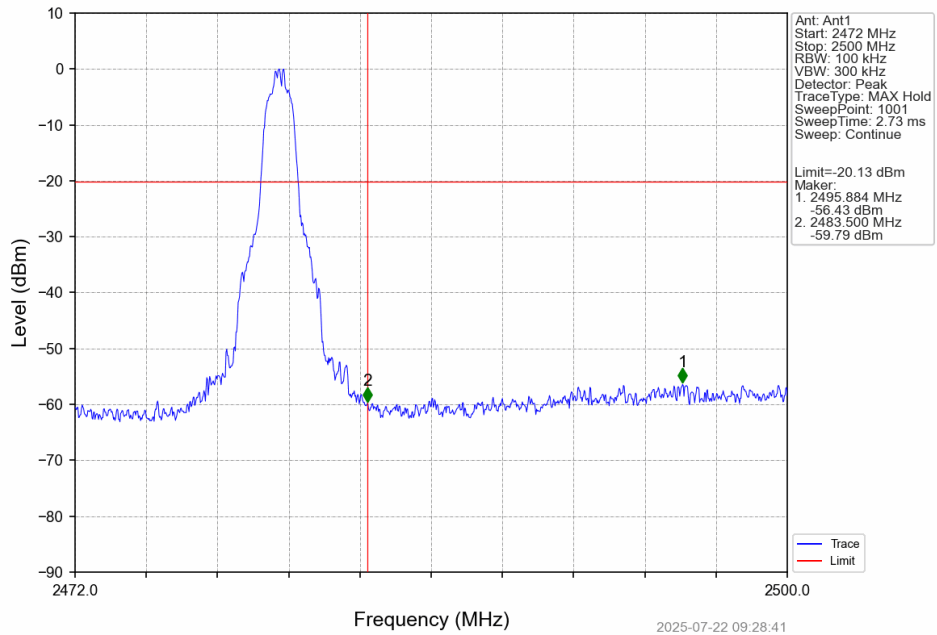

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

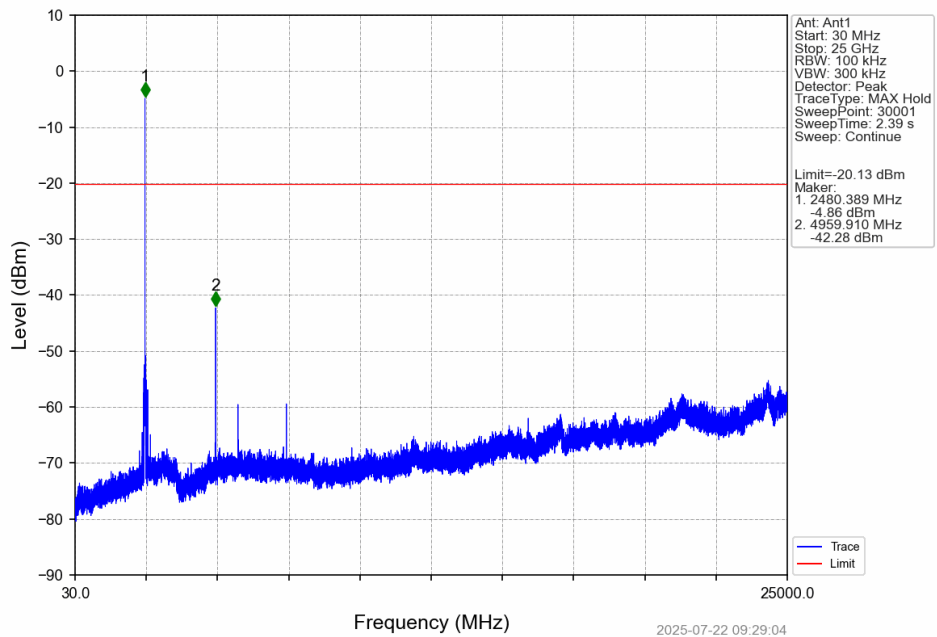

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

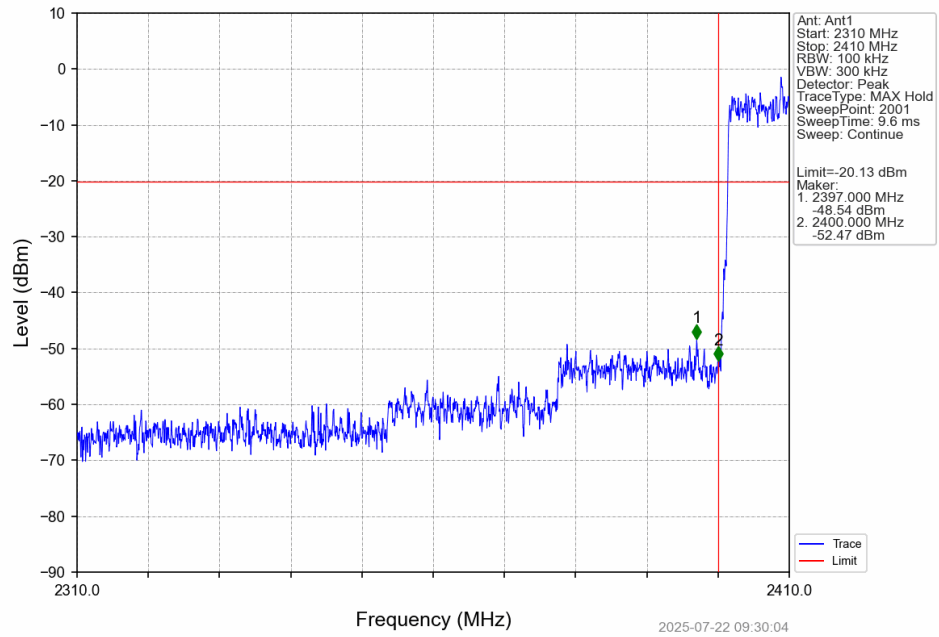

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

