

Antenna test report

Test Laboratory	Shenzhen Morlab CommunicationsTechnology Co., Ltd.
Address	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China
Contact:	Devyn Deng +86 755 36698555
Model	On-board Antenna

Manufacturer	Dongguan Youbi Electronics Co., LTD
Address	Building 79, New Sun Industrial City, Lincun Community, Tangxia Town, Dongguan City, Guangdong Province

1. Test procedures

Standards	Description of Test Item	Result
ANSI/ IEEE 149-2021	IEEE Recommended Practice for AntennaMeasurements	Compliant

2. Test Items and Equipment

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (AgilentE5071B)
The whole machine ofPassive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (6m*6m*6m) 2.Network analyzer (Agilent E5071B)

3. Test Equipment

Equipement Name	Serial No.	Type	Manufacture	Cal.Date	Cal.Due Date
Network Analyzer	MY46110140	E5071C	Agilent	2024.05.30	2025.05.29
OTACHamber	TJ2235-Q1793	AMS-8923-150	ETS	2022-11-30	2025-11-29
Antenna Measurement System	1685	EMQuestEMQ-100V1.13Build21267	ETS	N/A	N/A

4. Name of commercial test software


Software Name	Serial No.	Version	Manufacturer
Antenna Measurement System	1685	"EMQuest EMQ-100 V 1.13 Build 21267"	ETS

5. The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO. When the test result is a critical value, we will use the measurement uncertainty to give the judgment result based on the 95% Confidence intervals.

6. DUT Setup Photo



7. PCBAntenna PhysicalSize (unit: mm)

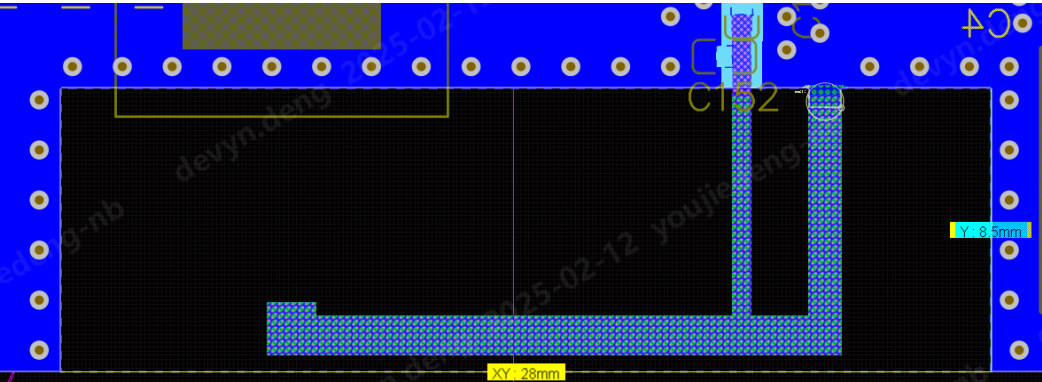

8. Antenna Electrical Specification


Freq	2.4~2.5GHz
Gain	6.63dBi
VSWR	<2
Impedance	50 ohm
Polarization	Linear
Type of Antenna	PCB Antenna
Outline Dimensions	28mm*8.5mm*1.5mm
Manufacture	EcoFlow
Efficiency	≥59.21%
Connector Type	Microstrip lines
Operating Temperature	-40℃~+85℃
Storage Temp	-40℃~+85℃

9. 2.4G Antenna Type &Gain


Frequency	Gain(dBi)	Efficiency(%)
2400MHz	6. 56	65. 11
2405MHz	6. 63	65. 18
2410MHz	6. 57	63. 94
2415MHz	6. 43	61. 70
2420MHz	6. 33	61. 05
2425MHz	6. 14	60. 01
2430MHz	5. 89	59. 65
2435MHz	5. 58	59. 21
2440MHz	5. 38	60. 66
2445MHz	5. 19	61. 42
2450MHz	5. 08	62. 44
2455MHz	5. 12	63. 81
2460MHz	5. 13	64. 02
2465MHz	5. 14	63. 91
2470MHz	5. 10	63. 12
2475MHz	5. 09	63. 64
2480MHz	4. 92	63. 29
2485MHz	4. 68	61. 91
2490MHz	4. 53	62. 44
2495MHz	4. 44	62. 06
2500MHz	4. 39	62. 83

10. Patternand Gain


PHI=0DEG

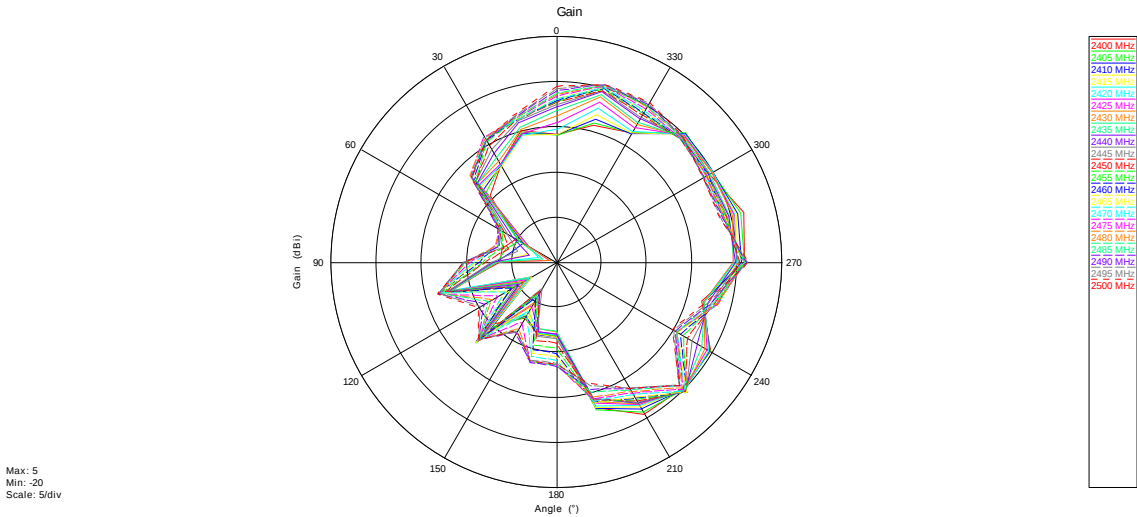

PHI=90DEG

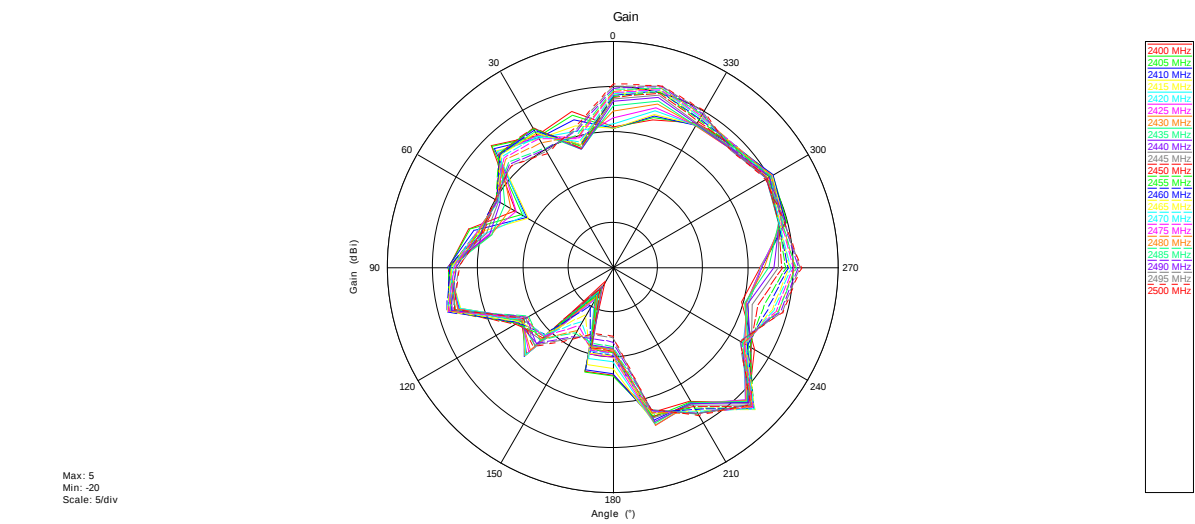

THETA=90DEG

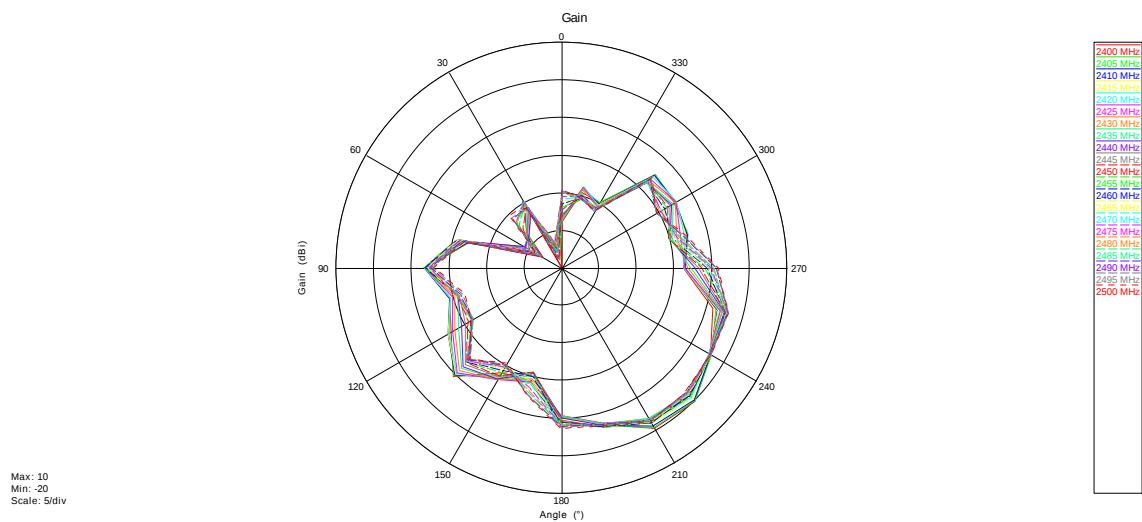

Tester by: Devyn Deng