


Inverted F Antenna Specification

Summary


ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency dBi	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-3.20	-2.77	-0.58	-9.34	-9.11	-8.64
MAX. Gain	-0.58dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	10.81mm					
Manufacture	Taisons International Co.					
Address	6 Bldg, GaoXinJian Industrial zone, HePing village, Fuyong town, Bao' an district, Shenzhen 518000, China					

Antenna Photo & Length (mm)

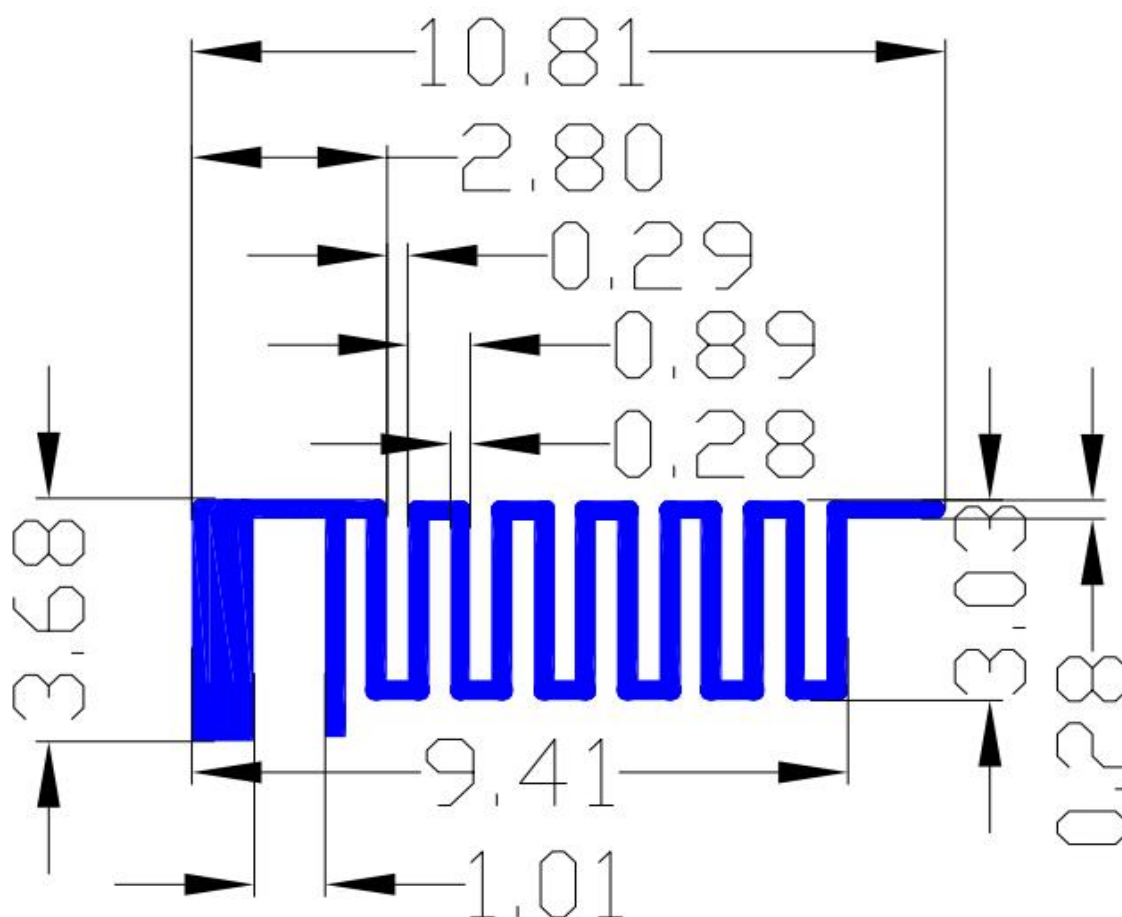

Horizontal: 2400 MHz 2450 MHz 2500 MHz


Max: 0 Min: -40 Scale: 5/div

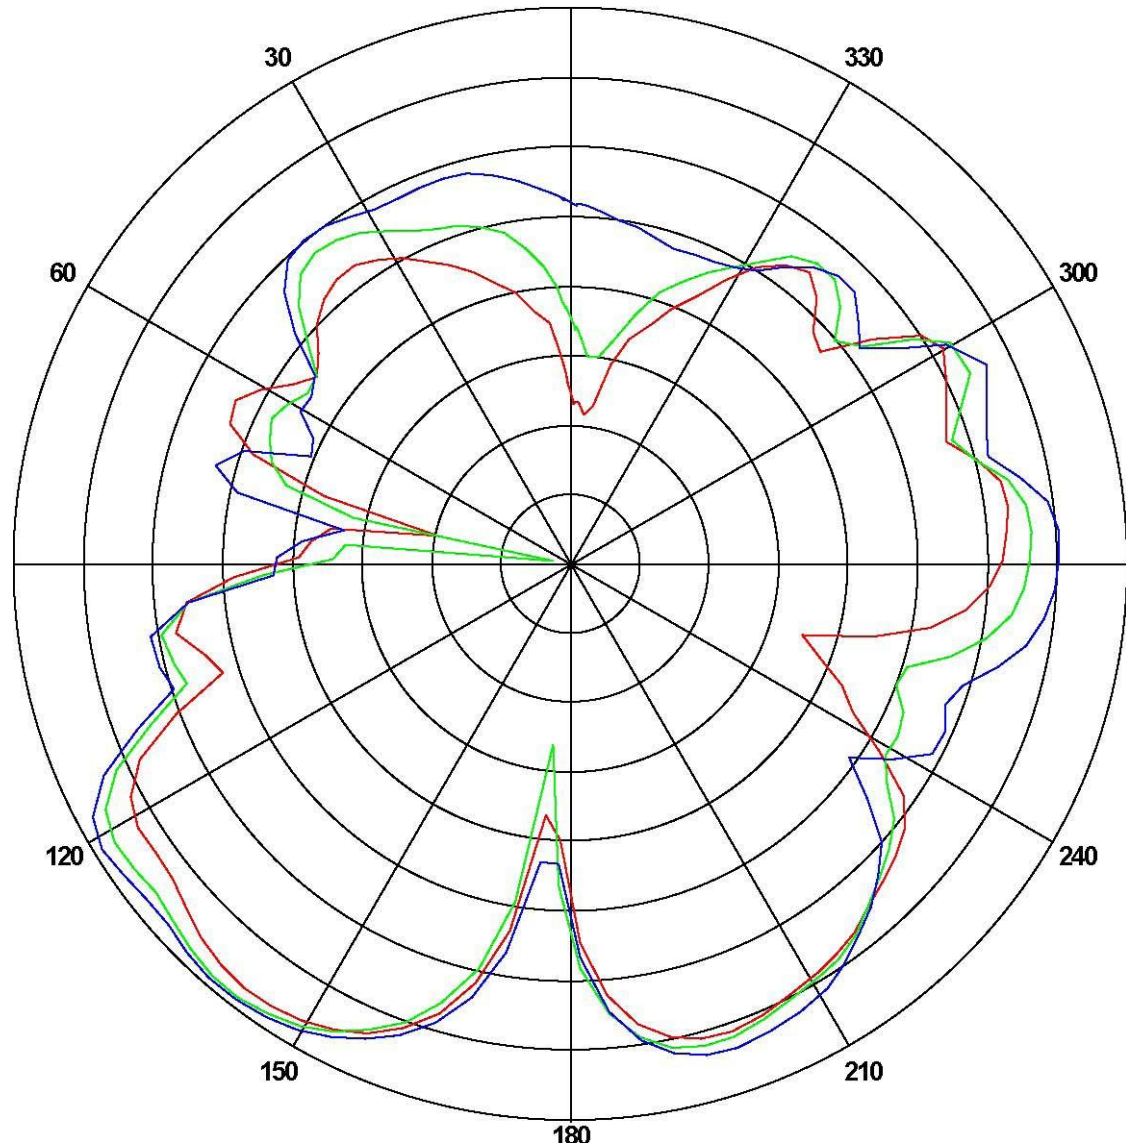

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-3.02	-30.0801	-7.18716
2450	-2.77	-36.5604	-7.48023
2500	-0.58	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Max: 0 Min: -30 Scale: 5/div

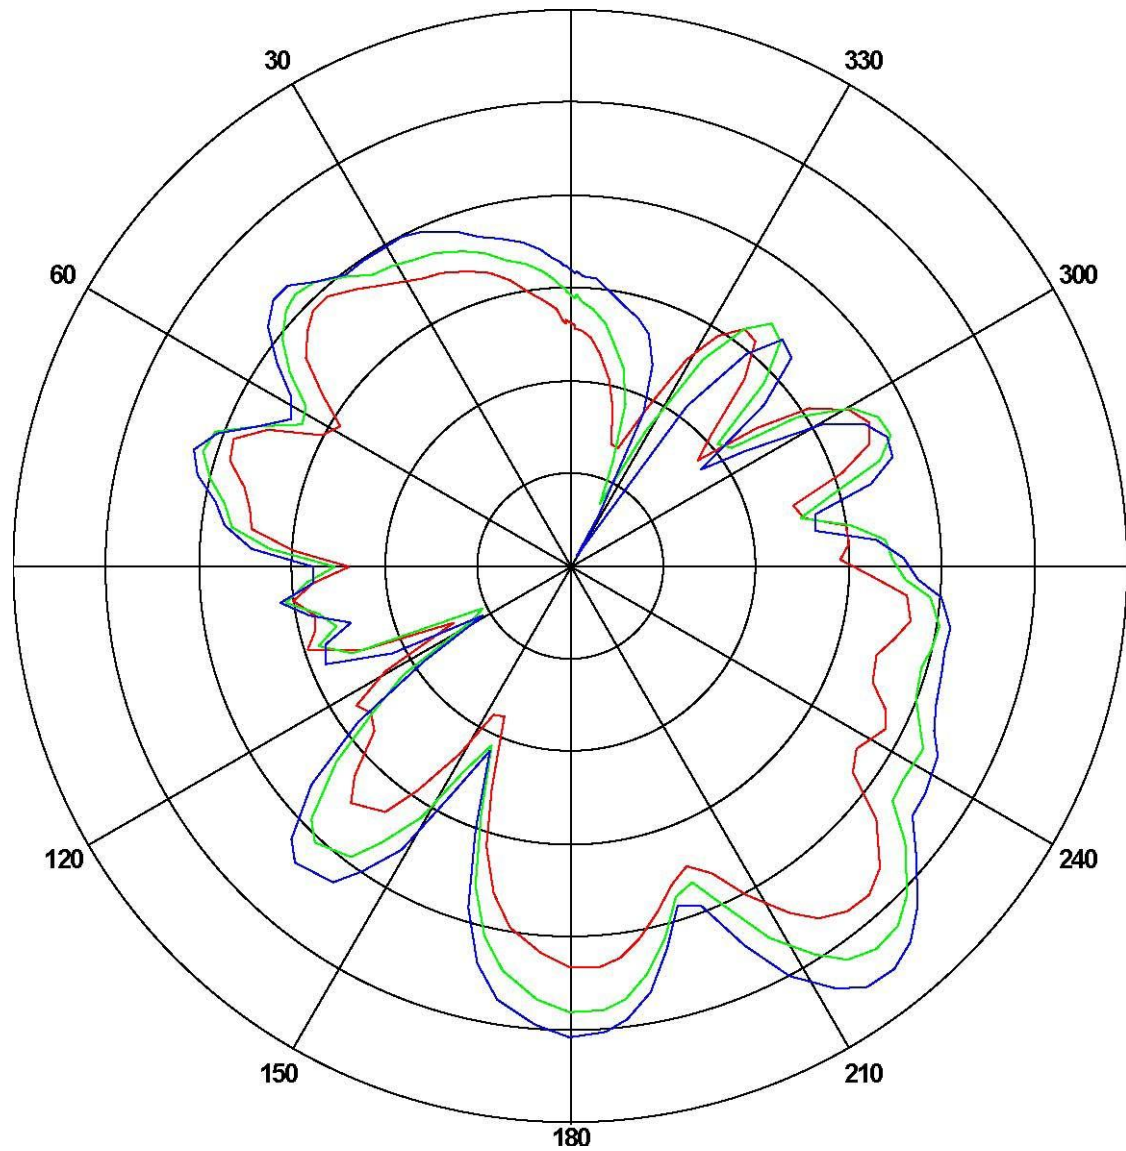

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-9.34	-22.1424	-12.4294
2450	-9.11	-24.5837	-10.4702
2500	-8.64	-29.5214	-9.20432

ANT Test Labs: Attestation of Global Compliance Co., Ltd.