



# FCC Part 15C Test Report

## FCC ID:2A2V4-NY41S

**Applicant:** Shenzhen Wuhao Electronic Intelligent Technology Co., Ltd.

**Address:** 308, 3/F, Building C, No. 663 Bulong Road, Dafapu Community, Bantian Street, Longgang Dist, Shenzhen, China

**Manufacturer:** QUTHC Limited

**Address:** 7th Floor, Building C, Longsheng Industrial Park, No. 11 of Qiuchang Xihu Village, Huiyang District, Huizhou City, Guangdong province (516211) P.R.China

**EUT:** NY41S

**Trade Mark:** AWOW

**Model Number:** NY41S

**Date of Receipt:** Jan. 03, 2022

**Test Date:** Jan. 03, 2022 - Jan. 15, 2022

**Date of Report:** Jan. 15, 2022

**Prepared By:** Shenzhen DL Testing Technology Co., Ltd.

**Address:** 101-201, Building C, Shuanghuan, No. 8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

**Applicable Standards:** FCC PART 15 C 15.407  
ANSI C63.10:2013

**Test Result:** Pass

**Report Number:** DL-20220115001-3E

**Prepared (Test Engineer):** Pxing Huang

**Reviewer (Supervisor):** Jack Bu

**Approved (Manager):** Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



| Table of Contents                                           | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 . SUMMARY OF TEST RESULTS</b>                          | <b>4</b>  |
| 1.1 MEASUREMENT UNCERTAINTY                                 | 4         |
| <b>2 . GENERAL INFORMATION</b>                              | <b>5</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT                              | 5         |
| 2.2 DESCRIPTION OF TEST MODES                               | 7         |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 8         |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 8         |
| 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING            | 8         |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 9         |
| <b>3 . EMC EMISSION TEST</b>                                | <b>11</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                          | 11        |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS                  | 11        |
| 3.1.2 TEST PROCEDURE                                        | 11        |
| 3.1.3 DEVIATION FROM TEST STANDARD                          | 11        |
| 3.1.4 TEST SETUP                                            | 12        |
| 3.1.5 EUT OPERATING CONDITIONS                              | 12        |
| 3.1.6 TEST RESULTS                                          | 12        |
| 3.2 RADIATED EMISSION MEASUREMENT                           | 15        |
| 3.2.1 RADIATED EMISSION LIMITS                              | 15        |
| 3.2.2 TEST PROCEDURE                                        | 16        |
| 3.2.3 DEVIATION FROM TEST STANDARD                          | 16        |
| 3.2.4 TEST SETUP                                            | 16        |
| 3.2.5 EUT OPERATING CONDITIONS                              | 17        |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)                  | 18        |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)                   | 19        |
| 3.2.8 TEST RESULTS (1GHZ~40GHZ)                             | 21        |
| 3.3 RADIATED BAND EMISSION MEASUREMENT                      | 33        |
| 3.3.1 TEST REQUIREMENT:                                     | 33        |
| 3.3.2 TEST PROCEDURE                                        | 33        |
| 3.3.3 DEVIATION FROM TEST STANDARD                          | 33        |
| 3.3.4 TEST SETUP                                            | 33        |
| 3.3.5 EUT OPERATING CONDITIONS                              | 33        |
| <b>4 . PEAK OUTPUT POWER</b>                                | <b>43</b> |
| 4.1 APPLIED PROCEDURES / LIMIT                              | 43        |
| 4.1.1 TEST PROCEDURE                                        | 43        |
| 4.1.2 DEVIATION FROM STANDARD                               | 43        |
| 4.1.3 TEST SETUP                                            | 43        |



| Table of Contents                       | Page |
|-----------------------------------------|------|
| 4.1.4 EUT OPERATION CONDITIONS          | 43   |
| 4.1.5 TEST RESULTS                      | 44   |
| 5 . POWER SPECTRAL DENSITY TEST         | 45   |
| 5.1 APPLIED PROCEDURES / LIMIT          | 45   |
| 5.1.1 TEST PROCEDURE                    | 45   |
| 5.1.2 DEVIATION FROM STANDARD           | 45   |
| 5.1.3 TEST SETUP                        | 45   |
| 5.1.4 EUT OPERATION CONDITIONS          | 45   |
| 5.1.5 TEST RESULTS                      | 46   |
| 6 . 6DB&26DB&99% BANDWIDTH TEST         | 60   |
| 6.1 APPLIED PROCEDURES / LIMIT          | 60   |
| 6.1.1 TEST PROCEDURE                    | 60   |
| 6.1.2 DEVIATION FROM STANDARD           | 60   |
| 6.1.3 TEST SETUP                        | 60   |
| 6.1.4 EUT OPERATION CONDITIONS          | 61   |
| 6.1.5 TEST RESULTS                      | 61   |
| 7 . DUTY CYCLE TEST SIGNAL              | 75   |
| 7.1 APPLIED PROCEDURES / LIMIT          | 75   |
| 7.1.1 TEST PROCEDURE                    | 75   |
| 7.1.2 DEVIATION FROM STANDARD           | 75   |
| 7.1.3 TEST SETUP                        | 75   |
| 7.1.4 EUT OPERATION CONDITIONS          | 75   |
| 7.1.5 TEST RESULTS                      | 76   |
| 8 . FREQUENCY STABILITY                 | 81   |
| 8.1 APPLIED PROCEDURES / LIMIT          | 81   |
| 8.1.1 TEST PROCEDURE                    | 81   |
| 8.1.2 DEVIATION FROM STANDARD           | 81   |
| 8.1.3 TEST SETUP                        | 81   |
| 8.1.4 EUT OPERATION CONDITIONS          | 81   |
| 8.1.5 TEST RESULTS                      | 82   |
| 9 . TRANSMISSION IN THE ABSENCE OF DATA | 86   |
| 9.1 STANDARD REQUIREMENT                | 86   |
| 9.2 TEST RESULT                         | 86   |
| 10 . ANTENNA REQUIREMENT                | 86   |
| 10.1 STANDARD REQUIREMENT               | 86   |
| 10.2 EUT ANTENNA                        | 86   |
| 11 . TEST SEUUP PHOTO                   | 87   |
| 12 . EUT PHOTO                          | 87   |



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.407) , Subpart C |                                                                         |          |        |
|---------------------------------|-------------------------------------------------------------------------|----------|--------|
| Standard Section                | Test Item                                                               | Judgment | Remark |
| 15.207                          | Conducted Emission                                                      | PASS     |        |
| 15.407(b), 15.209               | Radiated Spurious Emission                                              | PASS     |        |
| 15.407 (b)                      | Band Edge Emission                                                      | PASS     |        |
| 15.407 (a)                      | Peak Output Power                                                       | PASS     |        |
| 15.407 (a)                      | Power Spectral Density                                                  | PASS     |        |
| 15.403(i)<br>15.407(e)          | 26dB bandwidth and 99%dB Bandwidth<br>6dB bandwidth and 99%dB Bandwidth | PASS     |        |
| 15.407(g)                       | Frequency Stability                                                     | PASS     |        |
| 15.407(c)                       | Transmission in case of Absence of Information                          | PASS     |        |
| 15.203                          | Antenna Requirement                                                     | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  providing a level of confidence of approximately 95 %.

| No. | Item                         | Uncertainty               |
|-----|------------------------------|---------------------------|
| 1   | Conducted Emission Test      | $\pm 2.56\text{dB}$       |
| 2   | RF power,conducted           | $\pm 0.42\text{dB}$       |
| 3   | Spurious emissions,conducted | $\pm 2.76\text{dB}$       |
| 4   | All emissions,radiated(<1G)  | $\pm 3.65\text{dB}$       |
| 5   | All emissions,radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Temperature                  | $\pm 0.5^{\circ}\text{C}$ |
| 7   | Humidity                     | $\pm 2\%$                 |



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                        |                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Product Name:          | NY41S                                                                                                                          |
| Trademark              | AWOW                                                                                                                           |
| Model No.:             | NY41S                                                                                                                          |
| Model Difference       | N/A                                                                                                                            |
| Operation Frequency:   | 5180-5240, 5745-5825MHz(802.11a/n/ac(HT20))<br>5190-5230, 5755-5795MHz(802.11n/ac(HT40))<br>5210MHz , 5775MHz (802.11ac(HT80)) |
| Channel numbers:       | See channel list                                                                                                               |
| Channel separation:    | 20MHz                                                                                                                          |
| Modulation technology: | 64QAM, 16QAM, QPSK, BPSK for OFDM                                                                                              |
| Rate of Transmitter    | 802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps<br>802.11n: Up to 500Mbps                                 |
| Antenna Type:          | Internal antenna                                                                                                               |
| Antenna gain:          | 2dBi                                                                                                                           |
| Power supply:          | DC 5V from adapter                                                                                                             |
| Adapter:               | SWITCHING ADAPTER:<br>Model: FJ-SW126G050300N<br>Input: 100-240V, 50/60Hz, 0.6A<br>Output: 5.0V/3.0A                           |

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



## 2. Channel List

| Channel List for 802.11a/n(HT20)/ac(HT20) |                 |         |                 |
|-------------------------------------------|-----------------|---------|-----------------|
| Channel                                   | Frequency (MHz) | Channel | Frequency (MHz) |
| 36                                        | 5180            | 44      | 5220            |
| 40                                        | 5200            | 48      | 5240            |

| Channel List for 802.11a/n(HT20)/ac(HT20) |                 |         |                 |
|-------------------------------------------|-----------------|---------|-----------------|
| Channel                                   | Frequency (MHz) | Channel | Frequency (MHz) |
| 149                                       | 5745            | 161     | 5805            |
| 153                                       | 5765            | 165     | 5825            |
| 157                                       | 5785            |         |                 |

| Channel List for 802.11n(HT40)/ac(HT40) |                 |         |                 |
|-----------------------------------------|-----------------|---------|-----------------|
| Channel                                 | Frequency (MHz) | Channel | Frequency (MHz) |
| 38                                      | 5190            | 46      | 5230            |

| Channel List for 802.11n(HT40)/ac(HT40) |                 |         |                 |
|-----------------------------------------|-----------------|---------|-----------------|
| Channel                                 | Frequency (MHz) | Channel | Frequency (MHz) |
| 151                                     | 5755            | 159     | 5795            |

| Channel List for 802.11ac(HT80) |                 |         |                 |
|---------------------------------|-----------------|---------|-----------------|
| Channel                         | Frequency (MHz) | Channel | Frequency (MHz) |
| 42                              | 5210            | /       | /               |

| Channel List for 802.11ac(HT80) |                 |         |                 |
|---------------------------------|-----------------|---------|-----------------|
| Channel                         | Frequency (MHz) | Channel | Frequency (MHz) |
| 155                             | 5775            | /       | /               |



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Description  |                  |                  |                     |
|--------------|------------------|------------------|---------------------|
| Pretest Mode | Channel          | Band 1           | Band 4              |
| Mode 1       | 802.11a/n/acHT20 | CH36, CH44, CH48 | CH149, CH157, CH165 |
| Mode 2       | 802.11n/acHT40   | CH38, CH46       | CH151, CH159        |
| Mode 3       | 802.11acHT80     | CH42             | CH155               |
| Mode 4       | Other            | Link Mode        |                     |


| For Radiated Emission |                  |                  |                     |
|-----------------------|------------------|------------------|---------------------|
| Pretest Mode          | Channel          | Band 1           | Band 4              |
| Mode 1                | 802.11a/n/acHT20 | CH36, CH44, CH48 | CH149, CH157, CH165 |
| Mode 2                | 802.11n/acHT40   | CH38, CH46       | CH151, CH159        |
| Mode 3                | 802.11acHT80     | CH42             | CH155               |
| Mode 4                | Other            | Link Mode        |                     |

Note: 1. The measurements are performed at the highest, middle, lowest available channels.  
2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Radiated Spurious Emission Test

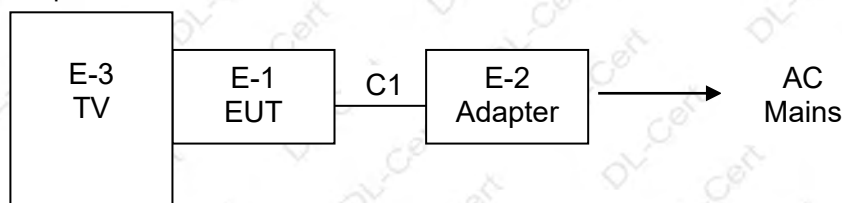

#### Conducted Spurious Emission Test

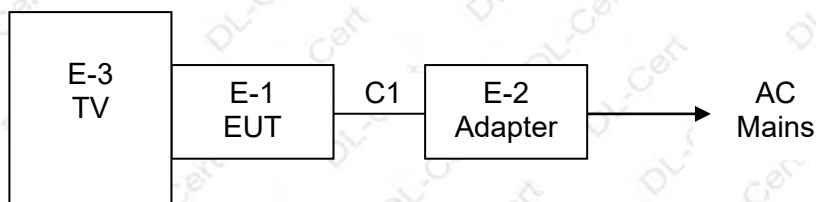

### 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment      | Model/Type No.   | Series No. | Note |
|------|----------------|------------------|------------|------|
| E-1  | NY41S          | NY41S            | N/A        | EUT  |
| E-2  | Adapter        | FJ-SW126G050300N | N/A        |      |
| E-3  | TV(Chang Hong) | CH023YBG020      | N/A        |      |

| Item | Shielded Type | Ferrite Core | Length | Note          |
|------|---------------|--------------|--------|---------------|
| C1   | No            | No           | 0.5m   | Mini USB Line |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

### 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

| Max output power Setting  |                           |              |              |                         |
|---------------------------|---------------------------|--------------|--------------|-------------------------|
| Test software Version     | Test program: AXDN-0002.0 |              |              |                         |
| Mode                      | 802.11a                   | 802.11n HT20 | 802.11n HT40 | 802.11ac HT20/HT40/HT80 |
| Data Rate                 | 6Mbps                     | MSC0         | MSC0         | MSC0                    |
| Power Setting of Software | 60                        | 60           | 66           | 66                      |



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

| Item | Equipment                           | Manufacturer    | Type No.  | Serial No. | Last calibration | Calibrated until |
|------|-------------------------------------|-----------------|-----------|------------|------------------|------------------|
| 1    | Spectrum Analyzer<br>(9kHz-26.5GHz) | Agilent         | E4408B    | MY50140780 | Nov. 06, 2021    | Nov. 05, 2022    |
| 2    | Test Receiver<br>(9kHz-7GHz)        | R&S             | ESRP7     | 101393     | Nov. 06, 2021    | Nov. 05, 2022    |
| 3    | Bilog Antenna<br>(30MHz-1GHz)       | R&S             | VULB9162  | 00306      | Nov. 06, 2021    | Nov. 05, 2022    |
| 4    | Horn Antenna<br>(1GHz-18GHz)        | Schwarzbeck     | BBHA9120D | 02139      | Nov. 06, 2021    | Nov. 05, 2022    |
| 5    | Horn Antenna<br>(18GHz-40GHz)       | A.H. Systems    | SAS-574   | 588        | Nov. 06, 2021    | Nov. 05, 2022    |
| 6    | Amplifier<br>(9KHz-6GHz)            | Schwarzbeck     | BBV9743B  | 00153      | Nov. 06, 2021    | Nov. 05, 2022    |
| 7    | Amplifier<br>(1GHz-18GHz)           | EMEC            | EM01G8GA  | 00270      | Nov. 06, 2021    | Nov. 05, 2022    |
| 8    | Amplifier<br>(18GHz-40GHz)          | Quanjuda        | DLE-161   | 97         | Nov. 06, 2021    | Nov. 05, 2022    |
| 9    | Loop Antenna<br>(9KHz-30MHz)        | Schwarzbeck     | FMZB1519B | 00014      | Nov. 06, 2021    | Nov. 05, 2022    |
| 10   | RF cables1<br>(9kHz-1GHz)           | ChengYu         | 966       | 004        | Nov. 06, 2021    | Nov. 05, 2022    |
| 11   | RF cables2<br>(1GHz-40GHz)          | ChengYu         | 966       | 003        | Nov. 06, 2021    | Nov. 05, 2022    |
| 12   | Antenna connector                   | Florida RF Labs | N/A       | RF 01#     | Nov. 06, 2021    | Nov. 05, 2022    |
| 13   | Power probe                         | KEYSIGHT        | U2021XA   | MY55210018 | Nov. 06, 2021    | Nov. 05, 2022    |
| 14   | Signal Analyzer<br>9kHz-26.5GHz     | Agilent         | N9020A    | MY55370280 | Nov. 06, 2021    | Nov. 05, 2022    |
| 15   | Test Receiver<br>20kHz-40GHz        | R&S             | ESU 40    | 100376     | Nov. 06, 2021    | Nov. 05, 2022    |
| 16   | D.C. Power Supply                   | LongWei         | PS-305D   | 010964729  | Nov. 06, 2021    | Nov. 05, 2022    |
| 17   | Power Meter                         | Anritsu         | ML2495A   | GTS540     | Nov. 06, 2021    | Nov. 05, 2022    |
| 18   | Power Sensor                        | Anritsu         | MA2411B   | GTS541     | Nov. 06, 2021    | Nov. 05, 2022    |



## Conduction Test equipment

| Item | Equipment         | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1    | 843 Shielded Room | ChengYu      | 843 Room | 843        | Nov. 25, 2019    | Nov. 24, 2022    |
| 2    | EMI Receiver      | R&S          | ESR      | 101421     | Nov. 06, 2021    | Nov. 05, 2022    |
| 3    | LISN              | R&S          | ENV216   | 102417     | Nov. 06, 2021    | Nov. 05, 2022    |
| 4    | 843 Cable 1#      | ChengYu      | CE Cable | 001        | Nov. 06, 2021    | Nov. 05, 2022    |

## Other

| Item | Name                         | Manufacturer | Model   | Software version |
|------|------------------------------|--------------|---------|------------------|
| 1    | EMC Conduction Test System   | FALA         | EZ EMC  | EMC-CON 3A1.1    |
| 2    | EMC radiation test system    | FALA         | EZ EMC  | FA-03A2          |
| 3    | RF test system               | MAIWEI       | MTS8310 | 2.0.0.0          |
| 4    | RF communication test system | MAIWEI       | MTS8200 | 2.0.0.0          |



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 - 0.5      | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.5 - 5.0       | 56.00        | 46.00     | FCC      |
| 5.0 - 30.0      | 60.00        | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

##### 3.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation



### 3.1.4 TEST SETUP

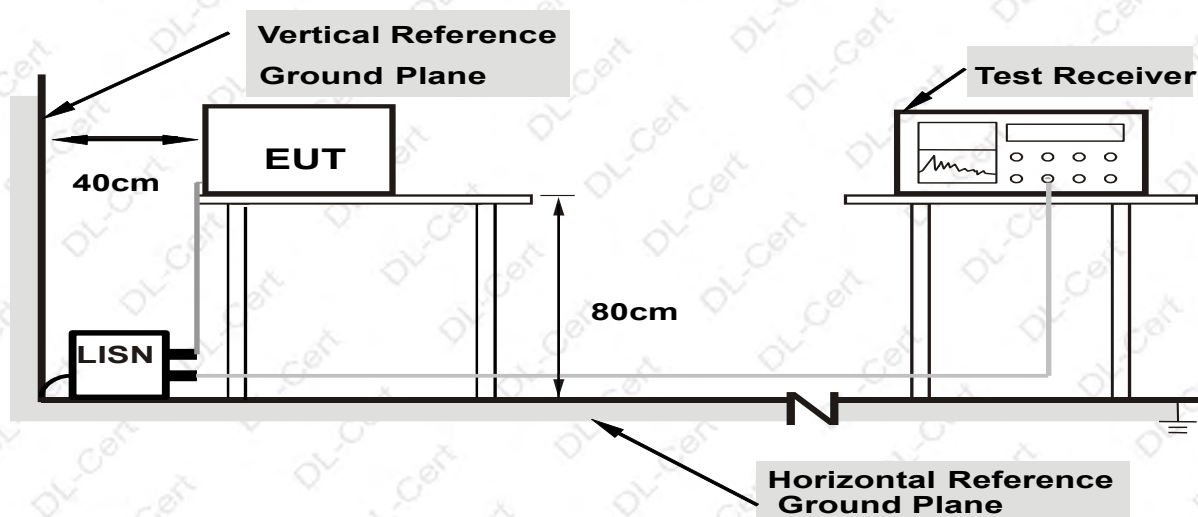

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

### 3.1.6 TEST RESULTS



|                |              |                    |        |
|----------------|--------------|--------------------|--------|
| Temperature:   | 25 °C        | Relative Humidity: | 54%    |
| Pressure:      | 1010hPa      | Phase :            | L      |
| Test Voltage : | AC 120V/60Hz | Test Mode:         | Mode 4 |

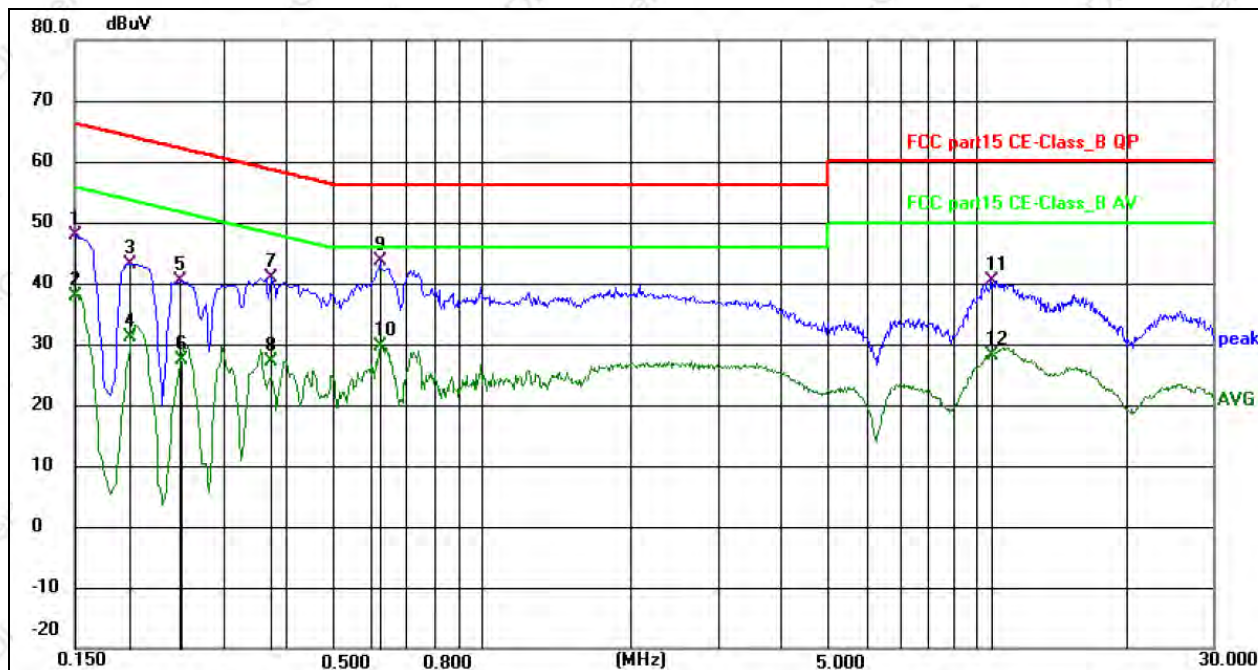


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.1500          | 37.22          | 10.68       | 47.90        | 66.00        | 18.10       | QP       | P   |        |
| 2   | 0.1500          | 27.23          | 10.68       | 37.91        | 56.00        | 18.09       | AVG      | P   |        |
| 3   | 0.1949          | 33.49          | 9.75        | 43.24        | 63.83        | 20.59       | QP       | P   |        |
| 4   | 0.1949          | 21.39          | 9.75        | 31.14        | 53.83        | 22.69       | AVG      | P   |        |
| 5   | 0.2445          | 30.81          | 9.53        | 40.34        | 61.94        | 21.60       | QP       | P   |        |
| 6   | 0.2455          | 17.79          | 9.53        | 27.32        | 51.91        | 24.59       | AVG      | P   |        |
| 7   | 0.3750          | 31.63          | 9.28        | 40.91        | 58.39        | 17.48       | QP       | P   |        |
| 8   | 0.3750          | 17.96          | 9.28        | 27.24        | 48.39        | 21.15       | AVG      | P   |        |
| 9 * | 0.6224          | 34.03          | 9.51        | 43.54        | 56.00        | 12.46       | QP       | P   |        |
| 10  | 0.6224          | 20.17          | 9.51        | 29.68        | 46.00        | 16.32       | AVG      | P   |        |
| 11  | 10.7250         | 30.40          | 10.03       | 40.43        | 60.00        | 19.57       | QP       | P   |        |
| 12  | 10.7250         | 18.02          | 10.03       | 28.05        | 50.00        | 21.95       | AVG      | P   |        |



|                |              |                    |        |
|----------------|--------------|--------------------|--------|
| Temperature:   | 25 °C        | Relative Humidity: | 54%    |
| Pressure:      | 1010hPa      | Phase :            | N      |
| Test Voltage : | AC 120V/60Hz | Test Mode:         | Mode 4 |

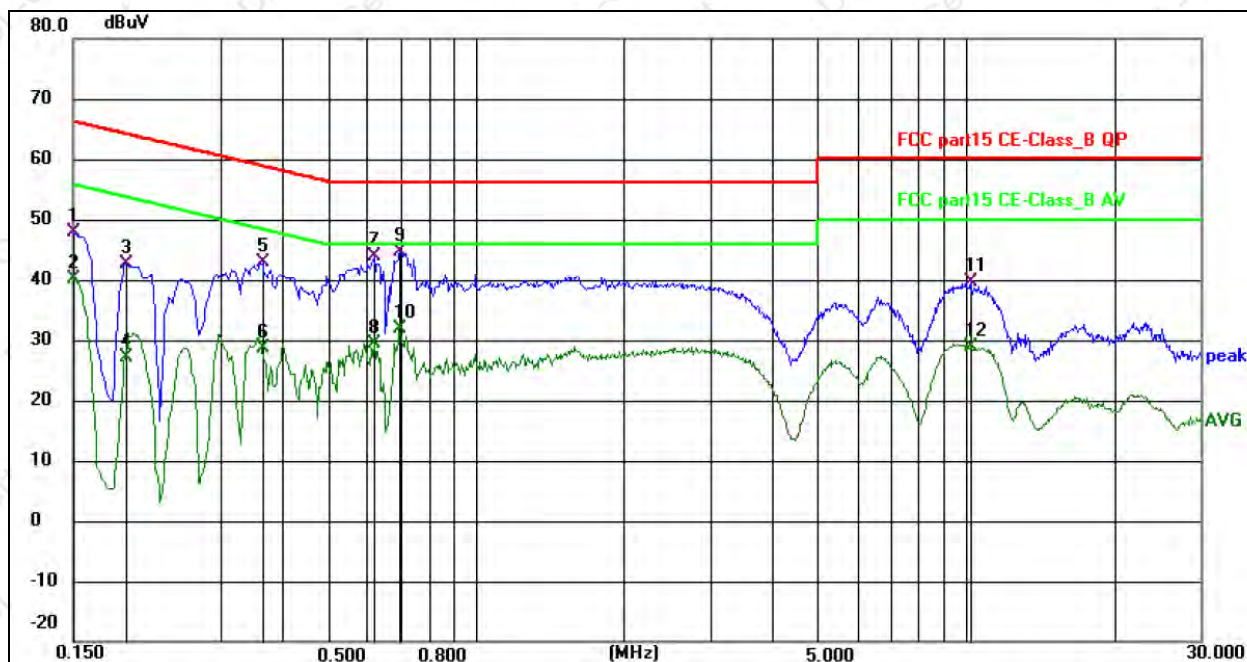

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.1500          | 37.31          | 10.53       | 47.84        | 66.00        | 18.16       | QP       | P   |        |
| 2   | 0.1500          | 29.69          | 10.53       | 40.22        | 56.00        | 15.78       | AVG      | P   |        |
| 3   | 0.1913          | 33.33          | 9.29        | 42.62        | 63.98        | 21.36       | QP       | P   |        |
| 4   | 0.1913          | 17.74          | 9.29        | 27.03        | 53.98        | 26.95       | AVG      | P   |        |
| 5   | 0.3660          | 33.46          | 9.35        | 42.81        | 58.59        | 15.78       | QP       | P   |        |
| 6   | 0.3660          | 19.38          | 9.35        | 28.73        | 48.59        | 19.86       | AVG      | P   |        |
| 7   | 0.6179          | 34.41          | 9.41        | 43.82        | 56.00        | 12.18       | QP       | P   |        |
| 8   | 0.6179          | 19.90          | 9.41        | 29.31        | 46.00        | 16.69       | AVG      | P   |        |
| 9 * | 0.6988          | 35.37          | 9.36        | 44.73        | 56.00        | 11.27       | QP       | P   |        |
| 10  | 0.6988          | 22.59          | 9.36        | 31.95        | 46.00        | 14.05       | AVG      | P   |        |
| 11  | 10.1850         | 29.35          | 10.20       | 39.55        | 60.00        | 20.45       | QP       | P   |        |
| 12  | 10.1850         | 18.59          | 10.20       | 28.79        | 50.00        | 21.21       | AVG      | P   |        |



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 25GHz                                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

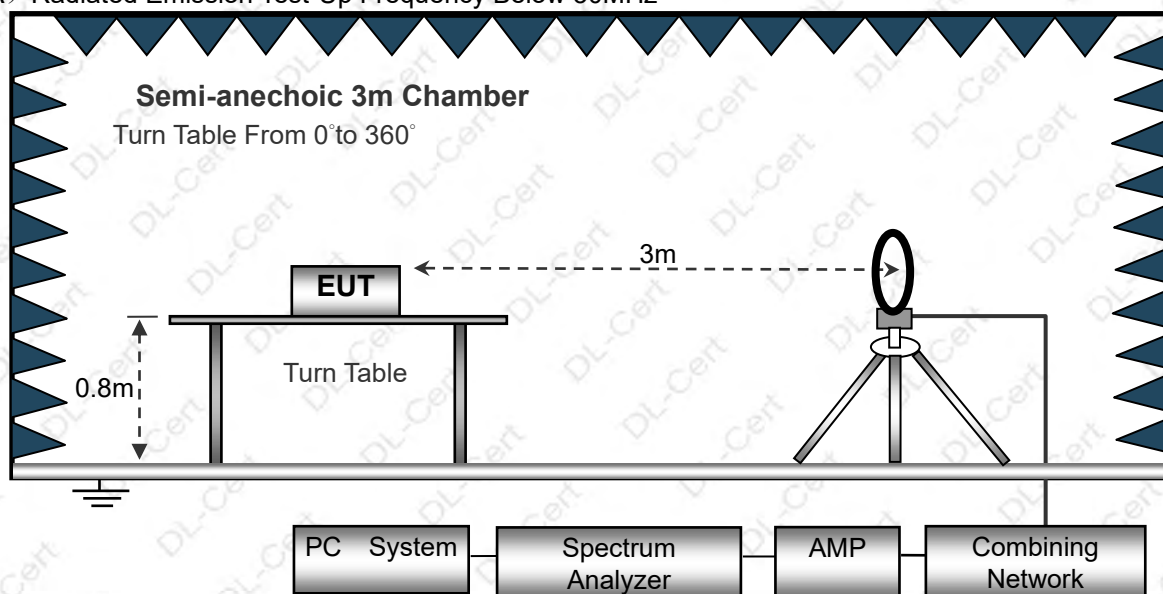

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

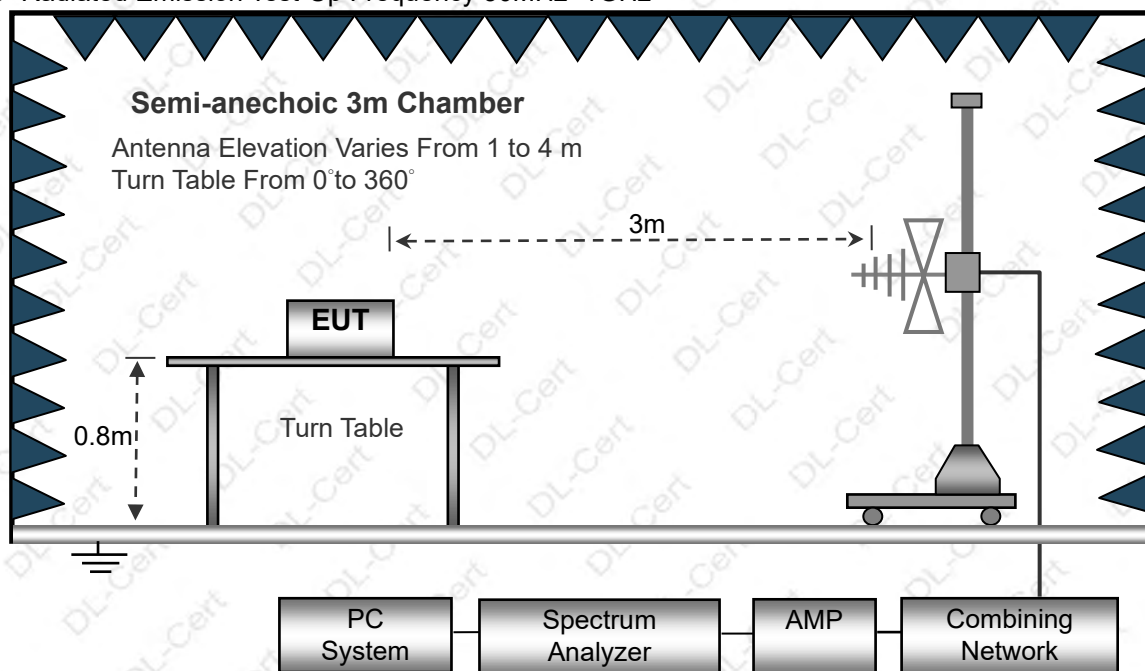

### (C) Radiated Emission Test-Up Frequency Above 1GHz

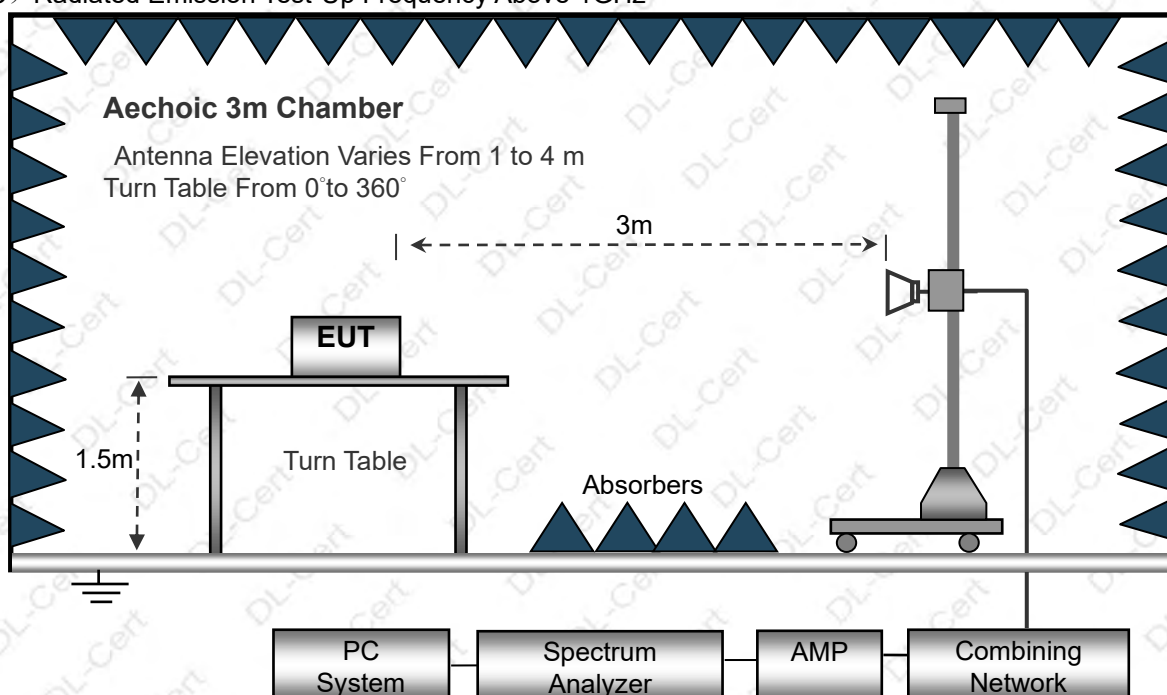

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

We pretest all antenna, the ant 1 was worst mode, and the data recording in the report.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

|              |          |                    |              |
|--------------|----------|--------------------|--------------|
| Temperature: | 20℃      | Relative Humidity: | 48%          |
| Pressure:    | 1010 hPa | Test Voltage :     | AC 120V/60Hz |
| Test Mode :  | Mode 4   | Polarization :     | --           |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

|                |              |                    |            |
|----------------|--------------|--------------------|------------|
| Temperature:   | 26°C         | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa     | Polarization :     | Horizontal |
| Test Voltage : | AC 120V/60Hz |                    |            |
| Test Mode :    | Mode 4       |                    |            |

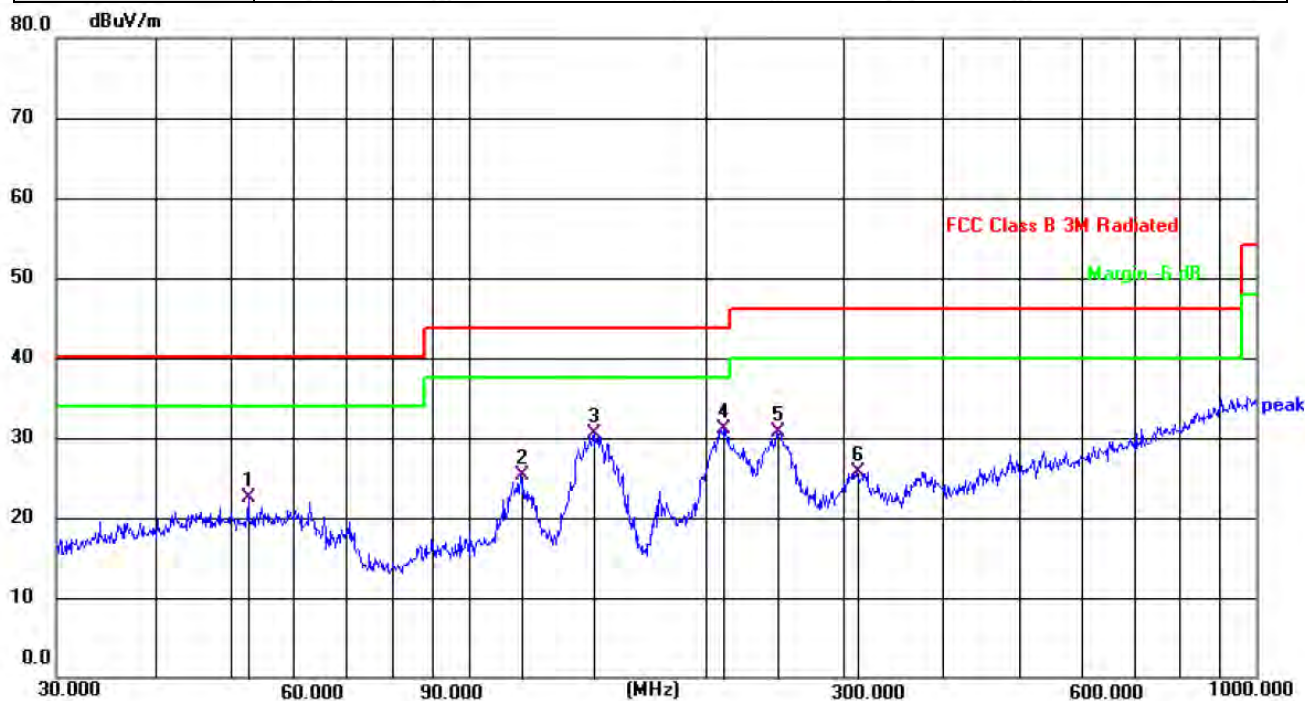

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over  |
|-----|-----|----------|---------------|----------------|-------------|-------|-------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB    |
| 1   |     | 52.5753  | 36.06         | -13.52         | 22.54       | 40.00 | 17.46 |
| 2   |     | 116.5401 | 43.15         | -17.91         | 25.24       | 43.50 | 18.26 |
| 3   |     | 144.3348 | 49.41         | -18.93         | 30.48       | 43.50 | 13.02 |
| 4   | *   | 210.7860 | 46.59         | -15.55         | 31.04       | 43.50 | 12.46 |
| 5   |     | 246.8149 | 44.74         | -14.04         | 30.70       | 46.00 | 15.30 |
| 6   |     | 311.0867 | 38.07         | -12.32         | 25.75       | 46.00 | 20.25 |


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



|                |             |                    |          |
|----------------|-------------|--------------------|----------|
| Temperature:   | 26℃         | Relative Humidity: | 54%      |
| Pressure:      | 1010 hPa    | Polarization :     | Vertical |
| test voltage : | AC120V/60Hz |                    |          |
| Test Mode :    | Mode 4      |                    |          |

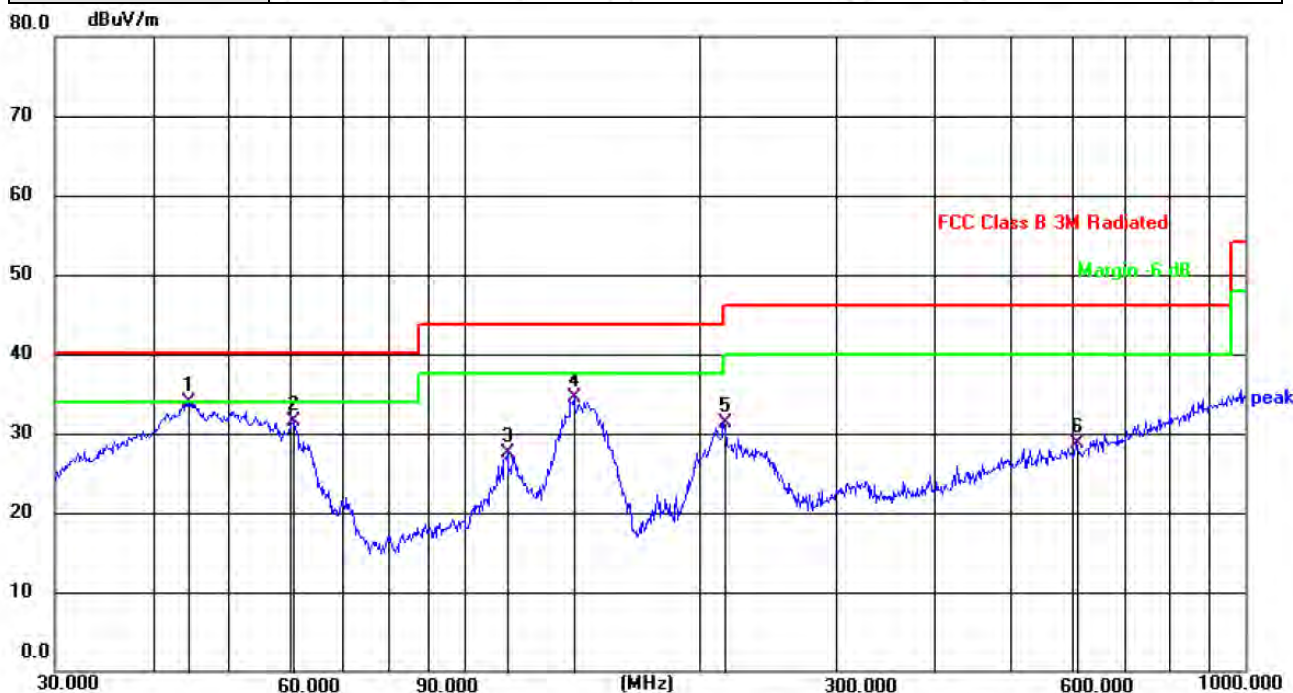

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over  |          |
|-----|-----|----------|---------------|----------------|-------------|-------|-------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB    | Detector |
| 1   | *   | 44.4308  | 47.71         | -13.86         | 33.85       | 40.00 | 6.15  | QP       |
| 2   |     | 60.4919  | 45.86         | -14.33         | 31.53       | 40.00 | 8.47  | QP       |
| 3   |     | 113.7143 | 45.36         | -17.86         | 27.50       | 43.50 | 16.00 | QP       |
| 4   |     | 138.3873 | 53.12         | -18.70         | 34.42       | 43.50 | 9.08  | QP       |
| 5   |     | 215.2678 | 46.75         | -15.36         | 31.39       | 43.50 | 12.11 | QP       |
| 6   |     | 607.7867 | 35.23         | -6.56          | 28.67       | 46.00 | 17.33 | QP       |

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 1

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5180 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10360     | 56.36            | 49.05             | 15.3          | 37.39             | 60.16             | 74       | -13.84 | PK               |
| V                        | 10360     | 45.04            | 49.05             | 15.3          | 37.39             | 48.81             | 54       | -5.19  | AV               |
| V                        | 15540     | 56.20            | 49.16             | 15.27         | 40.45             | 62.92             | 74       | -11.08 | PK               |
| V                        | 15540     | 43.39            | 49.16             | 15.27         | 40.45             | 50.07             | 54       | -3.93  | AV               |
| H                        | 10360     | 55.87            | 49.05             | 15.3          | 37.39             | 59.67             | 74       | -14.33 | PK               |
| H                        | 10360     | 45.35            | 49.05             | 15.3          | 37.39             | 49.12             | 54       | -4.88  | AV               |
| H                        | 15540     | 58.97            | 49.16             | 15.27         | 40.45             | 65.7              | 74       | -8.30  | PK               |
| H                        | 15540     | 42.94            | 49.16             | 15.27         | 40.45             | 49.62             | 54       | -4.38  | AV               |
| operation frequency:5200 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10400     | 57.31            | 49.09             | 15.34         | 37.42             | 61.14             | 74       | -12.86 | PK               |
| V                        | 10400     | 45.20            | 49.09             | 15.34         | 37.42             | 49                | 54       | -5.00  | AV               |
| V                        | 15600     | 59.29            | 49.18             | 15.29         | 40.47             | 66.04             | 74       | -7.96  | PK               |
| V                        | 15600     | 43.03            | 49.18             | 15.29         | 40.47             | 49.73             | 54       | -4.27  | AV               |
| H                        | 10400     | 56.46            | 49.09             | 15.34         | 37.42             | 60.29             | 74       | -13.71 | PK               |
| H                        | 10400     | 45.62            | 49.09             | 15.34         | 37.42             | 49.42             | 54       | -4.58  | AV               |
| H                        | 15600     | 59.27            | 49.18             | 15.29         | 40.47             | 66.02             | 74       | -7.98  | PK               |
| H                        | 15600     | 43.24            | 49.18             | 15.29         | 40.47             | 49.94             | 54       | -4.06  | AV               |
| operation frequency:5240 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10480     | 58.35            | 49.11             | 15.37         | 37.46             | 62.23             | 74       | -11.77 | PK               |
| V                        | 10480     | 45.22            | 49.11             | 15.37         | 37.46             | 49.07             | 54       | -4.93  | AV               |
| V                        | 15720     | 58.99            | 49.21             | 15.34         | 40.51             | 65.8              | 74       | -8.20  | PK               |
| V                        | 15720     | 43.25            | 49.21             | 15.34         | 40.51             | 50.01             | 54       | -3.99  | AV               |
| H                        | 10480     | 56.90            | 49.11             | 15.37         | 31.31             | 54.63             | 74       | -19.37 | PK               |
| H                        | 10480     | 45.40            | 49.11             | 15.37         | 31.31             | 43.1              | 54       | -10.90 | AV               |
| H                        | 15720     | 57.29            | 49.21             | 15.34         | 40.51             | 64.09             | 74       | -9.91  | PK               |
| H                        | 15720     | 42.42            | 49.21             | 15.34         | 40.51             | 49.18             | 54       | -4.82  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5180 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10360     | 56.57            | 49.05             | 15.3          | 37.39             | 60.37             | 74       | -13.63 | PK               |
| V                        | 10360     | 45.55            | 49.05             | 15.3          | 37.39             | 49.32             | 54       | -4.68  | AV               |
| V                        | 15540     | 56.10            | 49.16             | 15.27         | 40.45             | 62.82             | 74       | -11.18 | PK               |
| V                        | 15540     | 43.20            | 49.16             | 15.27         | 40.45             | 49.88             | 54       | -4.12  | AV               |
| H                        | 10360     | 56.49            | 49.05             | 15.3          | 37.39             | 60.29             | 74       | -13.71 | PK               |
| H                        | 10360     | 45.20            | 49.05             | 15.3          | 37.39             | 48.97             | 54       | -5.03  | AV               |
| H                        | 15540     | 53.99            | 49.16             | 15.27         | 40.45             | 60.7              | 74       | -13.30 | PK               |
| H                        | 15540     | 44.27            | 49.16             | 15.27         | 40.45             | 50.95             | 54       | -3.05  | AV               |
| operation frequency:5200 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10400     | 56.11            | 49.09             | 15.34         | 37.42             | 59.94             | 74       | -14.06 | PK               |
| V                        | 10400     | 44.66            | 49.09             | 15.34         | 37.42             | 48.46             | 54       | -5.54  | AV               |
| V                        | 15600     | 55.22            | 49.18             | 15.29         | 40.47             | 61.96             | 74       | -12.04 | PK               |
| V                        | 15600     | 43.33            | 49.18             | 15.29         | 40.47             | 50.03             | 54       | -3.97  | AV               |
| H                        | 10400     | 55.40            | 49.09             | 15.34         | 37.42             | 59.23             | 74       | -14.77 | PK               |
| H                        | 10400     | 43.22            | 49.09             | 15.34         | 37.42             | 47.01             | 54       | -6.99  | AV               |
| H                        | 15600     | 54.92            | 49.18             | 15.29         | 40.47             | 61.65             | 74       | -12.35 | PK               |
| H                        | 15600     | 43.11            | 49.18             | 15.29         | 40.47             | 49.81             | 54       | -4.19  | AV               |
| operation frequency:5240 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10480     | 56.99            | 49.11             | 15.37         | 37.46             | 60.87             | 74       | -13.13 | PK               |
| V                        | 10480     | 44.52            | 49.11             | 15.37         | 37.46             | 48.36             | 54       | -5.64  | AV               |
| V                        | 15720     | 54.21            | 49.21             | 15.34         | 40.51             | 61                | 74       | -13.00 | PK               |
| V                        | 15720     | 43.36            | 49.21             | 15.34         | 40.51             | 50.12             | 54       | -3.88  | AV               |
| H                        | 10480     | 57.01            | 49.11             | 15.37         | 31.31             | 54.74             | 74       | -19.26 | PK               |
| H                        | 10480     | 44.53            | 49.11             | 15.37         | 31.31             | 42.23             | 54       | -11.77 | AV               |
| H                        | 15720     | 55.20            | 49.21             | 15.34         | 40.51             | 61.99             | 74       | -12.01 | PK               |
| H                        | 15720     | 44.14            | 49.21             | 15.34         | 40.51             | 50.9              | 54       | -3.10  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5190 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10380     | 56.61            | 49.07             | 15.33         | 37.41             | 60.28             | 74       | -13.72 | PK               |
| V                        | 10380     | 45.62            | 49.07             | 15.33         | 37.41             | 49.29             | 54       | -4.71  | AV               |
| V                        | 15570     | 56.08            | 49.17             | 15.28         | 40.46             | 62.65             | 74       | -11.35 | PK               |
| V                        | 15570     | 43.27            | 49.17             | 15.28         | 40.46             | 49.84             | 54       | -4.16  | AV               |
| H                        | 10380     | 56.51            | 49.07             | 15.33         | 37.41             | 60.18             | 74       | -13.82 | PK               |
| H                        | 10380     | 45.21            | 49.07             | 15.33         | 37.41             | 48.88             | 54       | -5.12  | AV               |
| H                        | 15570     | 54.50            | 49.17             | 15.28         | 40.46             | 61.07             | 74       | -12.93 | PK               |
| H                        | 15570     | 44.12            | 49.17             | 15.28         | 40.46             | 50.69             | 54       | -3.31  | AV               |
| operation frequency:5230 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10460     | 57.38            | 49.11             | 15.37         | 37.46             | 61.10             | 74       | -12.90 | PK               |
| V                        | 10460     | 44.41            | 49.11             | 15.37         | 37.46             | 48.13             | 54       | -5.87  | AV               |
| V                        | 15690     | 54.31            | 49.21             | 15.34         | 40.51             | 60.95             | 74       | -13.05 | PK               |
| V                        | 15690     | 43.24            | 49.21             | 15.34         | 40.51             | 49.88             | 54       | -4.12  | AV               |
| H                        | 10460     | 57.21            | 49.11             | 15.37         | 31.31             | 54.78             | 74       | -19.22 | PK               |
| H                        | 10460     | 44.72            | 49.11             | 15.37         | 31.31             | 42.29             | 54       | -11.71 | AV               |
| H                        | 15690     | 55.11            | 49.21             | 15.34         | 40.51             | 61.75             | 74       | -12.25 | PK               |
| H                        | 15690     | 43.92            | 49.21             | 15.34         | 40.51             | 50.56             | 54       | -3.44  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5180 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10360     | 56.61            | 49.05             | 15.3          | 37.39             | 60.25             | 74       | -13.75 | PK               |
| V                        | 10360     | 45.42            | 49.05             | 15.3          | 37.39             | 49.06             | 54       | -4.94  | AV               |
| V                        | 15540     | 56.00            | 49.16             | 15.27         | 40.45             | 62.56             | 74       | -11.44 | PK               |
| V                        | 15540     | 43.21            | 49.16             | 15.27         | 40.45             | 49.77             | 54       | -4.23  | AV               |
| H                        | 10360     | 56.42            | 49.05             | 15.3          | 37.39             | 60.06             | 74       | -13.94 | PK               |
| H                        | 10360     | 45.41            | 49.05             | 15.3          | 37.39             | 49.05             | 54       | -4.95  | AV               |
| H                        | 15540     | 54.21            | 49.16             | 15.27         | 40.45             | 60.77             | 74       | -13.23 | PK               |
| H                        | 15540     | 44.15            | 49.16             | 15.27         | 40.45             | 50.71             | 54       | -3.29  | AV               |
| operation frequency:5200 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10400     | 56.60            | 49.09             | 15.34         | 37.42             | 60.27             | 74       | -13.73 | PK               |
| V                        | 10400     | 44.73            | 49.09             | 15.34         | 37.42             | 48.40             | 54       | -5.60  | AV               |
| V                        | 15600     | 55.38            | 49.18             | 15.29         | 40.47             | 61.96             | 74       | -12.04 | PK               |
| V                        | 15600     | 43.24            | 49.18             | 15.29         | 40.47             | 49.82             | 54       | -4.18  | AV               |
| H                        | 10400     | 55.18            | 49.09             | 15.34         | 37.42             | 58.85             | 74       | -15.15 | PK               |
| H                        | 10400     | 43.43            | 49.09             | 15.34         | 37.42             | 47.10             | 54       | -6.90  | AV               |
| H                        | 15600     | 54.93            | 49.18             | 15.29         | 40.47             | 61.51             | 74       | -12.49 | PK               |
| H                        | 15600     | 43.14            | 49.18             | 15.29         | 40.47             | 49.72             | 54       | -4.28  | AV               |
| operation frequency:5240 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10480     | 57.27            | 49.11             | 15.37         | 37.46             | 60.99             | 74       | -13.01 | PK               |
| V                        | 10480     | 44.52            | 49.11             | 15.37         | 37.46             | 48.24             | 54       | -5.76  | AV               |
| V                        | 15720     | 54.19            | 49.21             | 15.34         | 40.51             | 60.83             | 74       | -13.17 | PK               |
| V                        | 15720     | 43.24            | 49.21             | 15.34         | 40.51             | 49.88             | 54       | -4.12  | AV               |
| H                        | 10480     | 57.02            | 49.11             | 15.37         | 31.31             | 54.59             | 74       | -19.41 | PK               |
| H                        | 10480     | 44.45            | 49.11             | 15.37         | 31.31             | 42.02             | 54       | -11.98 | AV               |
| H                        | 15720     | 55.10            | 49.21             | 15.34         | 40.51             | 61.74             | 74       | -12.26 | PK               |
| H                        | 15720     | 43.95            | 49.21             | 15.34         | 40.51             | 50.59             | 54       | -3.41  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11ac HT40

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5190 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10380     | 56.58            | 49.07             | 15.33         | 37.41             | 56.58             | 74       | -13.75 | PK               |
| V                        | 10380     | 45.10            | 49.07             | 15.33         | 37.41             | 45.10             | 54       | -5.23  | AV               |
| V                        | 15570     | 56.18            | 49.17             | 15.28         | 40.46             | 56.18             | 74       | -11.25 | PK               |
| V                        | 15570     | 43.65            | 49.17             | 15.28         | 40.46             | 43.65             | 54       | -3.78  | AV               |
| H                        | 10380     | 56.39            | 49.07             | 15.33         | 37.41             | 56.39             | 74       | -13.94 | PK               |
| H                        | 10380     | 45.30            | 49.07             | 15.33         | 37.41             | 45.30             | 54       | -5.03  | AV               |
| H                        | 15570     | 54.40            | 49.17             | 15.28         | 40.46             | 54.40             | 74       | -13.03 | PK               |
| H                        | 15570     | 44.29            | 49.17             | 15.28         | 40.46             | 44.29             | 54       | -13.75 | AV               |
| operation frequency:5230 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10460     | 57.19            | 49.11             | 15.37         | 37.46             | 60.91             | 74       | -13.09 | PK               |
| V                        | 10460     | 44.53            | 49.11             | 15.37         | 37.46             | 48.25             | 54       | -5.75  | AV               |
| V                        | 15690     | 54.33            | 49.21             | 15.34         | 40.51             | 60.97             | 74       | -13.03 | PK               |
| V                        | 15690     | 43.35            | 49.21             | 15.34         | 40.51             | 49.99             | 54       | -4.01  | AV               |
| H                        | 10460     | 56.98            | 49.11             | 15.37         | 31.31             | 54.55             | 74       | -19.45 | PK               |
| H                        | 10460     | 44.40            | 49.11             | 15.37         | 31.31             | 41.97             | 54       | -12.03 | AV               |
| H                        | 15690     | 55.22            | 49.21             | 15.34         | 40.51             | 61.86             | 74       | -12.14 | PK               |
| H                        | 15690     | 43.94            | 49.21             | 15.34         | 40.51             | 50.58             | 54       | -3.42  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11ac HT80

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5210 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 10420     | 56.05            | 49.07             | 15.33         | 37.41             | 59.88             | 74       | -14.12 | PK               |
| V                        | 10420     | 45.52            | 49.07             | 15.33         | 37.41             | 49.32             | 54       | -4.68  | AV               |
| V                        | 15630     | 55.99            | 49.17             | 15.28         | 40.46             | 62.72             | 74       | -11.28 | PK               |
| V                        | 15630     | 43.04            | 49.17             | 15.28         | 40.46             | 49.73             | 54       | -4.27  | AV               |
| H                        | 10420     | 56.22            | 49.07             | 15.33         | 37.41             | 60.05             | 74       | -13.95 | PK               |
| H                        | 10420     | 45.09            | 49.07             | 15.33         | 37.41             | 48.89             | 54       | -5.11  | AV               |
| H                        | 15630     | 53.92            | 49.17             | 15.28         | 40.46             | 60.64             | 74       | -13.36 | PK               |
| H                        | 15630     | 44.23            | 49.17             | 15.28         | 40.46             | 50.92             | 54       | -3.08  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11a band 4

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5745 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11490     | 57.20            | 49.05             | 15.3          | 37.39             | 60.84             | 74       | -13.16 | PK               |
| V                        | 11490     | 45.09            | 49.05             | 15.3          | 37.39             | 48.73             | 54       | -5.27  | AV               |
| V                        | 17235     | 56.32            | 49.16             | 15.27         | 40.45             | 62.88             | 74       | -11.12 | PK               |
| V                        | 17235     | 43.62            | 49.16             | 15.27         | 40.45             | 50.18             | 54       | -3.82  | AV               |
| H                        | 11490     | 55.60            | 49.05             | 15.3          | 37.39             | 59.24             | 74       | -14.76 | PK               |
| H                        | 11490     | 45.34            | 49.05             | 15.3          | 37.39             | 48.98             | 54       | -5.02  | AV               |
| H                        | 17235     | 59.18            | 49.16             | 15.27         | 40.45             | 65.74             | 74       | -8.26  | PK               |
| H                        | 17235     | 43.63            | 49.16             | 15.27         | 40.45             | 50.19             | 54       | -3.81  | AV               |
| operation frequency:5785 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11570     | 57.38            | 49.09             | 15.34         | 37.42             | 61.05             | 74       | -12.95 | PK               |
| V                        | 11570     | 45.13            | 49.09             | 15.34         | 37.42             | 48.80             | 54       | -5.20  | AV               |
| V                        | 17355     | 59.26            | 49.18             | 15.29         | 40.47             | 65.84             | 74       | -8.16  | PK               |
| V                        | 17355     | 42.93            | 49.18             | 15.29         | 40.47             | 49.51             | 54       | -4.49  | AV               |
| H                        | 11570     | 56.50            | 49.09             | 15.34         | 37.42             | 60.17             | 74       | -13.83 | PK               |
| H                        | 11570     | 45.21            | 49.09             | 15.34         | 37.42             | 48.88             | 54       | -5.12  | AV               |
| H                        | 17355     | 52.02            | 49.18             | 15.29         | 40.47             | 58.60             | 74       | -15.40 | PK               |
| H                        | 17355     | 43.53            | 49.18             | 15.29         | 40.47             | 50.11             | 54       | -3.89  | AV               |
| operation frequency:5825 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11650     | 58.00            | 49.11             | 15.37         | 37.46             | 61.72             | 74       | -12.28 | PK               |
| V                        | 11650     | 45.41            | 49.11             | 15.37         | 37.46             | 49.13             | 54       | -4.87  | AV               |
| V                        | 17475     | 59.30            | 49.21             | 15.34         | 40.51             | 65.94             | 74       | -8.06  | PK               |
| V                        | 17475     | 43.24            | 49.21             | 15.34         | 40.51             | 49.88             | 54       | -4.12  | AV               |
| H                        | 11650     | 56.99            | 49.11             | 15.37         | 31.31             | 54.56             | 74       | -19.44 | PK               |
| H                        | 11650     | 45.52            | 49.11             | 15.37         | 31.31             | 43.09             | 54       | -10.91 | AV               |
| H                        | 17475     | 57.20            | 49.21             | 15.34         | 40.51             | 63.84             | 74       | -10.16 | PK               |
| H                        | 17475     | 42.19            | 49.21             | 15.34         | 40.51             | 48.83             | 54       | -5.17  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5745 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11490     | 56.61            | 49.05             | 15.3          | 37.39             | 60.25             | 74       | -13.75 | PK               |
| V                        | 11490     | 45.62            | 49.05             | 15.3          | 37.39             | 49.26             | 54       | -4.74  | AV               |
| V                        | 17235     | 55.95            | 49.16             | 15.27         | 40.45             | 62.51             | 74       | -11.49 | PK               |
| V                        | 17235     | 43.24            | 49.16             | 15.27         | 40.45             | 49.80             | 54       | -4.20  | AV               |
| H                        | 11490     | 56.32            | 49.05             | 15.3          | 37.39             | 59.96             | 74       | -14.04 | PK               |
| H                        | 11490     | 45.49            | 49.05             | 15.3          | 37.39             | 49.13             | 54       | -4.87  | AV               |
| H                        | 17235     | 54.22            | 49.16             | 15.27         | 40.45             | 60.78             | 74       | -13.22 | PK               |
| H                        | 17235     | 44.13            | 49.16             | 15.27         | 40.45             | 50.69             | 54       | -3.31  | AV               |
| operation frequency:5785 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11570     | 56.58            | 49.09             | 15.34         | 37.42             | 60.25             | 74       | -13.75 | PK               |
| V                        | 11570     | 44.80            | 49.09             | 15.34         | 37.42             | 48.47             | 54       | -5.53  | AV               |
| V                        | 17355     | 55.49            | 49.18             | 15.29         | 40.47             | 62.07             | 74       | -11.93 | PK               |
| V                        | 17355     | 43.24            | 49.18             | 15.29         | 40.47             | 49.82             | 54       | -4.18  | AV               |
| H                        | 11570     | 55.12            | 49.09             | 15.34         | 37.42             | 58.79             | 74       | -15.21 | PK               |
| H                        | 11570     | 43.45            | 49.09             | 15.34         | 37.42             | 47.12             | 54       | -6.88  | AV               |
| H                        | 17355     | 54.91            | 49.18             | 15.29         | 40.47             | 61.49             | 74       | -12.51 | PK               |
| H                        | 17355     | 43.14            | 49.18             | 15.29         | 40.47             | 49.72             | 54       | -4.28  | AV               |
| operation frequency:5825 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11650     | 57.38            | 49.11             | 15.37         | 37.46             | 61.10             | 74       | -12.90 | PK               |
| V                        | 11650     | 44.25            | 49.11             | 15.37         | 37.46             | 47.97             | 54       | -6.03  | AV               |
| V                        | 17475     | 54.29            | 49.21             | 15.34         | 40.51             | 60.93             | 74       | -13.07 | PK               |
| V                        | 17475     | 43.36            | 49.21             | 15.34         | 40.51             | 50.00             | 54       | -4.00  | AV               |
| H                        | 11650     | 57.30            | 49.11             | 15.37         | 31.31             | 54.87             | 74       | -19.13 | PK               |
| H                        | 11650     | 44.62            | 49.11             | 15.37         | 31.31             | 42.19             | 54       | -11.81 | AV               |
| H                        | 17475     | 55.01            | 49.21             | 15.34         | 40.51             | 61.65             | 74       | -12.35 | PK               |
| H                        | 17475     | 43.92            | 49.21             | 15.34         | 40.51             | 50.56             | 54       | -3.44  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5755 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11510     | 56.42            | 49.07             | 15.33         | 37.41             | 60.09             | 74       | -13.91 | PK               |
| V                        | 11510     | 45.13            | 49.07             | 15.33         | 37.41             | 48.80             | 54       | -5.20  | AV               |
| V                        | 17265     | 55.99            | 49.17             | 15.28         | 40.46             | 62.56             | 74       | -11.44 | PK               |
| V                        | 17265     | 43.24            | 49.17             | 15.28         | 40.46             | 49.81             | 54       | -4.19  | AV               |
| H                        | 11510     | 56.27            | 49.07             | 15.33         | 37.41             | 59.94             | 74       | -14.06 | PK               |
| H                        | 11510     | 45.32            | 49.07             | 15.33         | 37.41             | 48.99             | 54       | -5.01  | AV               |
| H                        | 17265     | 54.24            | 49.17             | 15.28         | 40.46             | 60.81             | 74       | -13.19 | PK               |
| H                        | 17265     | 44.21            | 49.17             | 15.28         | 40.46             | 50.78             | 54       | -3.22  | AV               |
| operation frequency:5795 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11590     | 57.39            | 49.11             | 15.37         | 37.46             | 61.11             | 74       | -12.89 | PK               |
| V                        | 11590     | 44.52            | 49.11             | 15.37         | 37.46             | 48.24             | 54       | -5.76  | AV               |
| V                        | 17385     | 54.38            | 49.21             | 15.34         | 40.51             | 61.02             | 74       | -12.98 | PK               |
| V                        | 17385     | 43.04            | 49.21             | 15.34         | 40.51             | 49.68             | 54       | -4.32  | AV               |
| H                        | 11590     | 57.35            | 49.11             | 15.37         | 31.31             | 54.92             | 74       | -19.08 | PK               |
| H                        | 11590     | 44.64            | 49.11             | 15.37         | 31.31             | 42.21             | 54       | -11.79 | AV               |
| H                        | 17385     | 55.10            | 49.21             | 15.34         | 40.51             | 61.74             | 74       | -12.26 | PK               |
| H                        | 17385     | 43.94            | 49.21             | 15.34         | 40.51             | 50.58             | 54       | -3.42  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5745 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11490     | 56.42            | 49.05             | 15.3          | 37.39             | 60.06             | 74       | -13.94 | PK               |
| V                        | 11490     | 45.61            | 49.05             | 15.3          | 37.39             | 49.25             | 54       | -4.75  | AV               |
| V                        | 17235     | 56.47            | 49.16             | 15.27         | 40.45             | 63.03             | 74       | -10.97 | PK               |
| V                        | 17235     | 43.22            | 49.16             | 15.27         | 40.45             | 49.78             | 54       | -4.22  | AV               |
| H                        | 11490     | 56.36            | 49.05             | 15.3          | 37.39             | 60.00             | 74       | -14.00 | PK               |
| H                        | 11490     | 45.55            | 49.05             | 15.3          | 37.39             | 49.19             | 54       | -4.81  | AV               |
| H                        | 17235     | 54.18            | 49.16             | 15.27         | 40.45             | 60.74             | 74       | -13.26 | PK               |
| H                        | 17235     | 44.01            | 49.16             | 15.27         | 40.45             | 50.57             | 54       | -3.43  | AV               |
| operation frequency:5785 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11570     | 56.58            | 49.09             | 15.34         | 37.42             | 60.25             | 74       | -13.75 | PK               |
| V                        | 11570     | 44.83            | 49.09             | 15.34         | 37.42             | 48.50             | 54       | -5.50  | AV               |
| V                        | 17355     | 55.17            | 49.18             | 15.29         | 40.47             | 61.75             | 74       | -12.25 | PK               |
| V                        | 17355     | 43.32            | 49.18             | 15.29         | 40.47             | 49.90             | 54       | -4.10  | AV               |
| H                        | 11570     | 55.22            | 49.09             | 15.34         | 37.42             | 58.89             | 74       | -15.11 | PK               |
| H                        | 11570     | 43.41            | 49.09             | 15.34         | 37.42             | 47.08             | 54       | -6.92  | AV               |
| H                        | 17355     | 54.90            | 49.18             | 15.29         | 40.47             | 61.48             | 74       | -12.52 | PK               |
| H                        | 17355     | 43.12            | 49.18             | 15.29         | 40.47             | 49.70             | 54       | -4.30  | AV               |
| operation frequency:5825 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11650     | 57.16            | 49.11             | 15.37         | 37.46             | 60.88             | 74       | -13.12 | PK               |
| V                        | 11650     | 44.42            | 49.11             | 15.37         | 37.46             | 48.14             | 54       | -5.86  | AV               |
| V                        | 17475     | 54.51            | 49.21             | 15.34         | 40.51             | 61.15             | 74       | -12.85 | PK               |
| V                        | 17475     | 43.16            | 49.21             | 15.34         | 40.51             | 49.80             | 54       | -4.20  | AV               |
| H                        | 11650     | 57.18            | 49.11             | 15.37         | 31.31             | 54.75             | 74       | -19.25 | PK               |
| H                        | 11650     | 44.64            | 49.11             | 15.37         | 31.31             | 42.21             | 54       | -11.79 | AV               |
| H                        | 17475     | 55.20            | 49.21             | 15.34         | 40.51             | 61.84             | 74       | -12.16 | PK               |
| H                        | 17475     | 43.91            | 49.21             | 15.34         | 40.51             | 50.55             | 54       | -3.45  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11ac HT40

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5755 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11510     | 56.61            | 49.07             | 15.33         | 37.41             | 60.28             | 74       | -13.72 | PK               |
| V                        | 11510     | 45.62            | 49.07             | 15.33         | 37.41             | 49.29             | 54       | -4.71  | AV               |
| V                        | 17265     | 56.06            | 49.17             | 15.28         | 40.46             | 62.63             | 74       | -11.37 | PK               |
| V                        | 17265     | 43.22            | 49.17             | 15.28         | 40.46             | 49.79             | 54       | -4.21  | AV               |
| H                        | 11510     | 56.37            | 49.07             | 15.33         | 37.41             | 60.04             | 74       | -13.96 | PK               |
| H                        | 11510     | 45.53            | 49.07             | 15.33         | 37.41             | 49.20             | 54       | -4.80  | AV               |
| H                        | 17265     | 54.68            | 49.17             | 15.28         | 40.46             | 61.25             | 74       | -12.75 | PK               |
| H                        | 17265     | 44.26            | 49.17             | 15.28         | 40.46             | 50.83             | 54       | -3.17  | AV               |
| operation frequency:5795 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11590     | 57.48            | 49.11             | 15.37         | 37.46             | 61.20             | 74       | -12.80 | PK               |
| V                        | 11590     | 44.47            | 49.11             | 15.37         | 37.46             | 48.19             | 54       | -5.81  | AV               |
| V                        | 17385     | 54.28            | 49.21             | 15.34         | 40.51             | 60.92             | 74       | -13.08 | PK               |
| V                        | 17385     | 43.34            | 49.21             | 15.34         | 40.51             | 49.98             | 54       | -4.02  | AV               |
| H                        | 11590     | 57.37            | 49.11             | 15.37         | 31.31             | 54.94             | 74       | -19.06 | PK               |
| H                        | 11590     | 44.46            | 49.11             | 15.37         | 31.31             | 42.03             | 54       | -11.97 | AV               |
| H                        | 17385     | 55.07            | 49.21             | 15.34         | 40.51             | 61.71             | 74       | -12.29 | PK               |
| H                        | 17385     | 43.91            | 49.21             | 15.34         | 40.51             | 50.55             | 54       | -3.45  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11ac HT80

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:5775 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 11550     | 56.38            | 49.07             | 15.33         | 37.41             | 60.05             | 74       | -13.95 | PK               |
| V                        | 11550     | 45.62            | 49.07             | 15.33         | 37.41             | 49.29             | 54       | -4.71  | AV               |
| V                        | 17325     | 56.07            | 49.17             | 15.28         | 40.46             | 62.64             | 74       | -11.36 | PK               |
| V                        | 17325     | 43.26            | 49.17             | 15.28         | 40.46             | 49.83             | 54       | -4.17  | AV               |
| H                        | 11550     | 56.47            | 49.07             | 15.33         | 37.41             | 60.14             | 74       | -13.86 | PK               |
| H                        | 11550     | 45.32            | 49.07             | 15.33         | 37.41             | 48.99             | 54       | -5.01  | AV               |
| H                        | 17325     | 54.17            | 49.17             | 15.28         | 40.46             | 60.74             | 74       | -13.26 | PK               |
| H                        | 17325     | 44.22            | 49.17             | 15.28         | 40.46             | 50.79             | 54       | -3.21  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




For Conducted

During the test, pre-scan the all modulation, the modulation below were found to have the worst test results, as reflected in the report.

Ant1

Test channel:


Band 1/802.11a Lowest channel

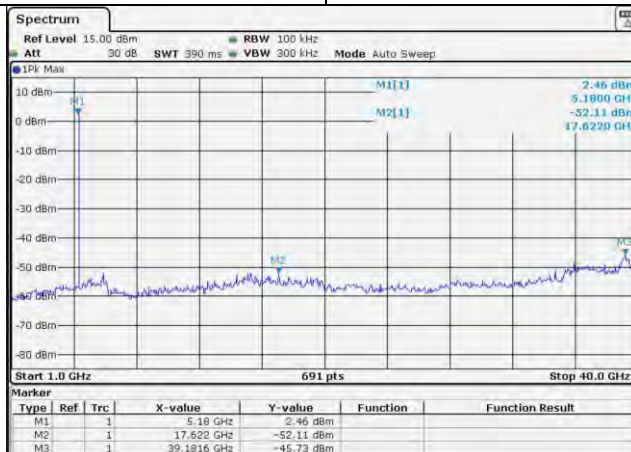

0.03Hz~40GHz

Test channel:


Band 1/802.11a Middle channel

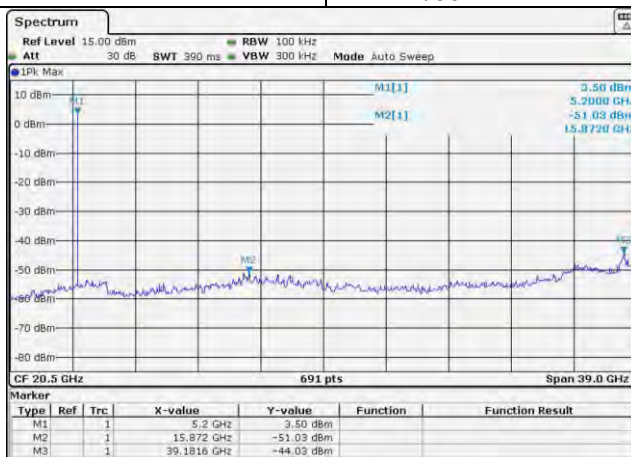

0.03GHz~40GHz

Test channel:

Band 1/802.11a Highest channel

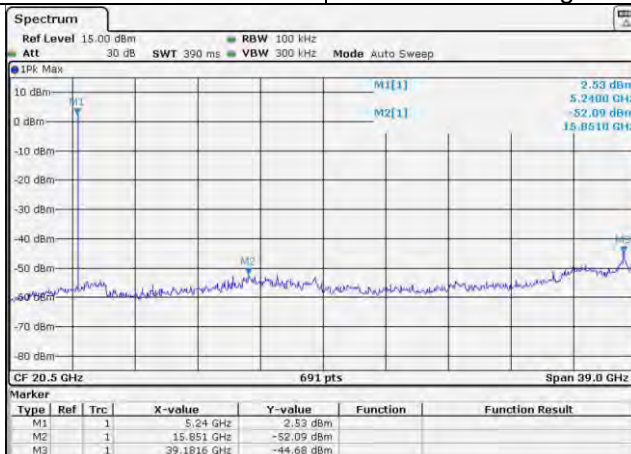


0.03GHz~40GHz



Test channel:


Band 4/802.11a Lowest channel

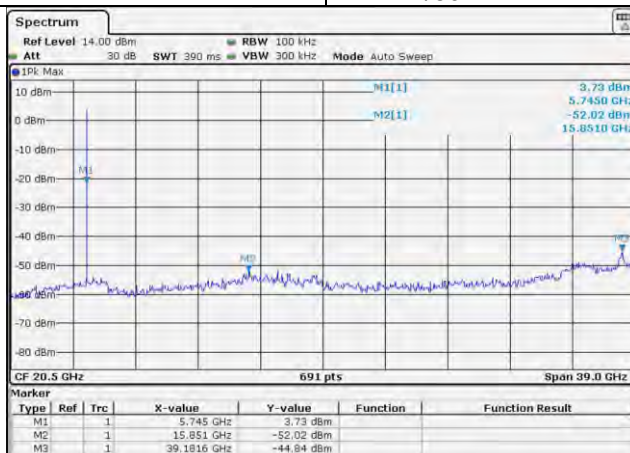

0.03GHz~40GHz

Test channel:


Band 4/802.11a Middle channel

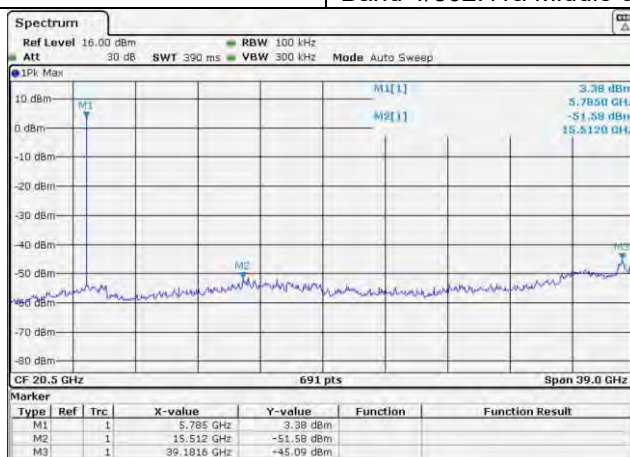

0.03GHz~40GHz

Test channel:

Band 4/802.11a Highest channel

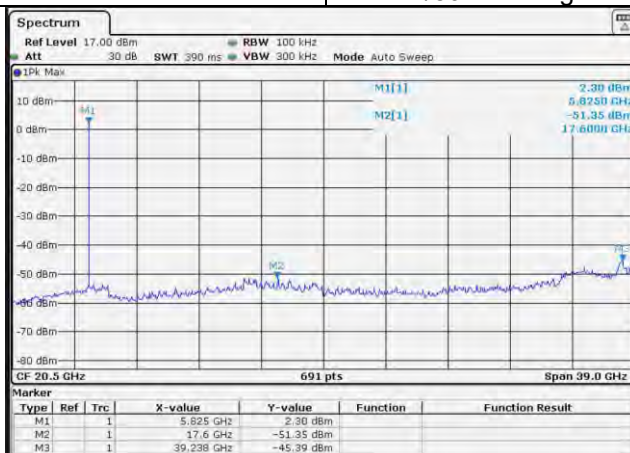

0.03GHz~40GHz



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

| Spectrum Parameter                    | Setting                                          |         |
|---------------------------------------|--------------------------------------------------|---------|
| Attenuation                           | Auto                                             |         |
| Start Frequency                       | 5150MHz                                          | 5725MHz |
| Stop Frequency                        | 5250MHz                                          | 5850MHz |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |         |

#### 3.3.2 TEST PROCEDURE


Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

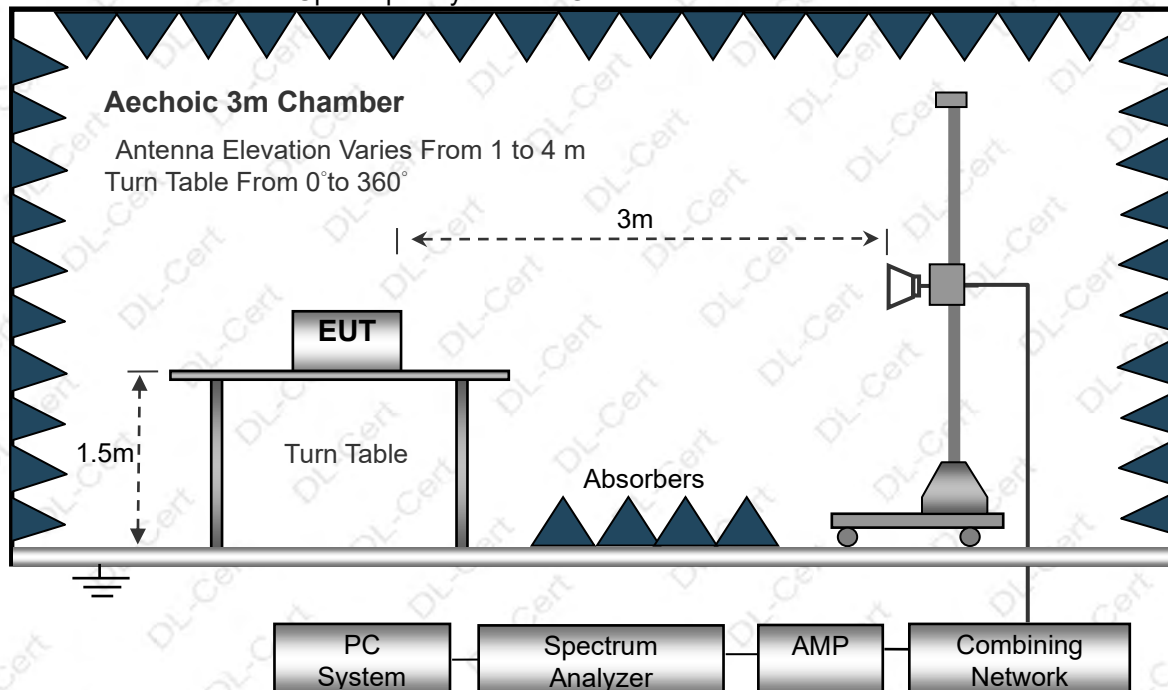

#### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

We pretest all antenna, the ant 1 was worst mode, and the data recording in the report.


**3.3.6 TEST RESULT**

| Modulation     | Test Frequency (MHz) | Max Level Frequency (MHz) | Max Level (dBμV/m) | EIRP (dBm) | Limit (dBm) | Result |
|----------------|----------------------|---------------------------|--------------------|------------|-------------|--------|
| 802.11a        | 5180                 | 5148.05                   | 51.50              | -43.70     | -27.00      | Pass   |
|                | 5240                 | 5255.37                   | 53.01              | -42.19     | -27.00      | Pass   |
|                | 5745                 | 5723.15                   | 52.49              | -42.71     | -27.00      | Pass   |
|                | 5825                 | 5853.63                   | 51.42              | -43.78     | -27.00      | Pass   |
| 802.11n(HT20)  | 5180                 | 5146.23                   | 52.00              | -43.20     | -27.00      | Pass   |
|                | 5240                 | 5253.19                   | 52.15              | -43.05     | -27.00      | Pass   |
|                | 5745                 | 5723.05                   | 51.45              | -43.75     | -27.00      | Pass   |
|                | 5825                 | 5853.44                   | 52.23              | -42.97     | -27.00      | Pass   |
| 802.11n(HT40)  | 5190                 | 5147.29                   | 51.34              | -43.86     | -27.00      | Pass   |
|                | 5230                 | 5253.38                   | 52.22              | -42.98     | -27.00      | Pass   |
|                | 5755                 | 5723.52                   | 51.21              | -43.99     | -27.00      | Pass   |
|                | 5795                 | 5853.33                   | 51.02              | -44.18     | -27.00      | Pass   |
| 802.11ac(HT20) | 5180                 | 5145.75                   | 52.41              | -42.79     | -27.00      | Pass   |
|                | 5240                 | 5256.53                   | 52.23              | -42.97     | -27.00      | Pass   |
|                | 5745                 | 5735.37                   | 51.75              | -43.45     | -27.00      | Pass   |
|                | 5825                 | 5849.52                   | 52.48              | -42.72     | -27.00      | Pass   |
| 802.11ac(HT40) | 5190                 | 5145.35                   | 50.92              | -44.28     | -27.00      | Pass   |
|                | 5230                 | 5252.26                   | 52.10              | -43.10     | -27.00      | Pass   |
|                | 5755                 | 5736.74                   | 53.42              | -41.78     | -27.00      | Pass   |
|                | 5795                 | 5856.52                   | 52.03              | -43.17     | -27.00      | Pass   |
| 802.11ac(HT80) | 5210                 | 5235.04                   | 54.05              | -41.15     | -27.00      | Pass   |
|                | 5775                 | 5769.17                   | 51.55              | -43.65     | -27.00      | Pass   |


Remark: 1. According to KDB 789033 D02 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:  $EIRP[dBm] = E[dBμV/m] - 95.2$

For Conducted  
Ant1

802.11a

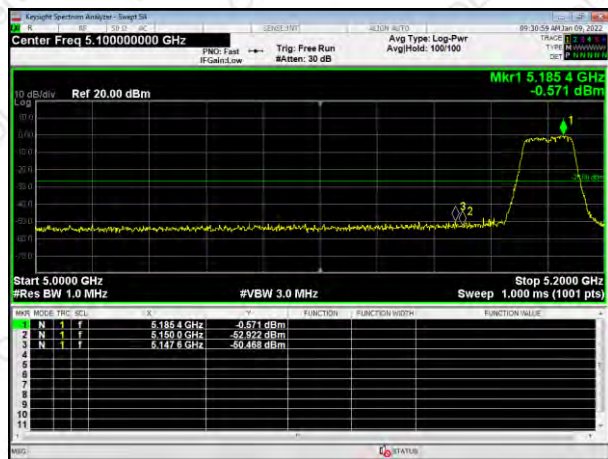


5180MHz

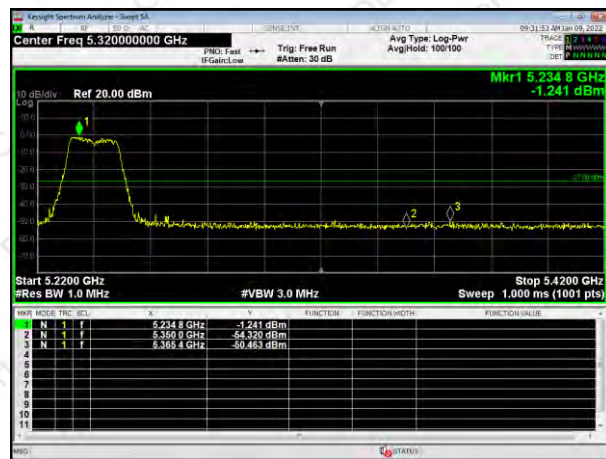


5240MHz

802.11n HT20

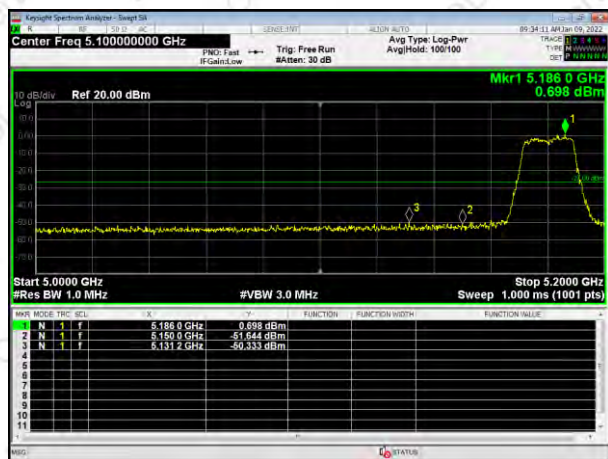


5180MHz

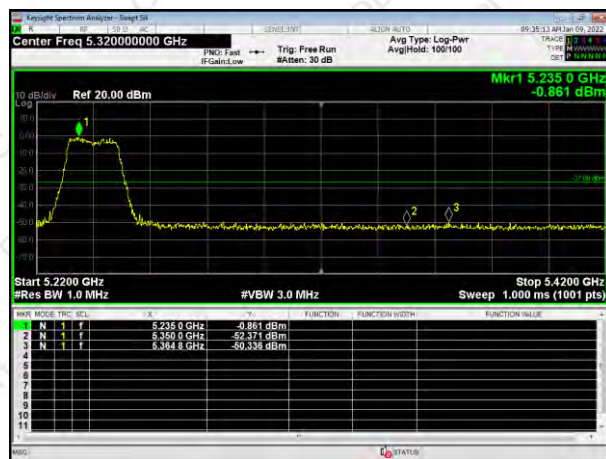


5240MHz

802.11n HT40

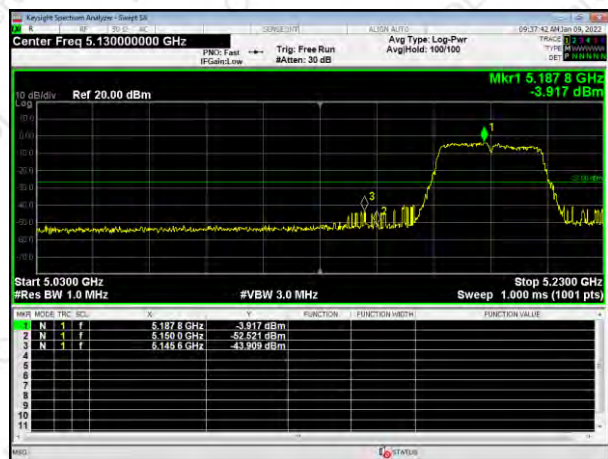


5190MHz

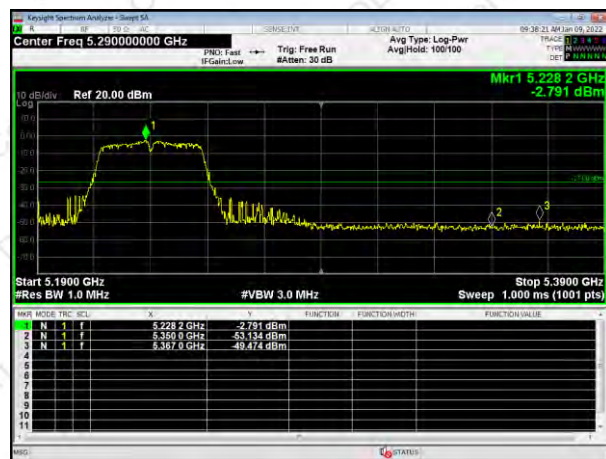


5230MHz



## 802.11ac HT20

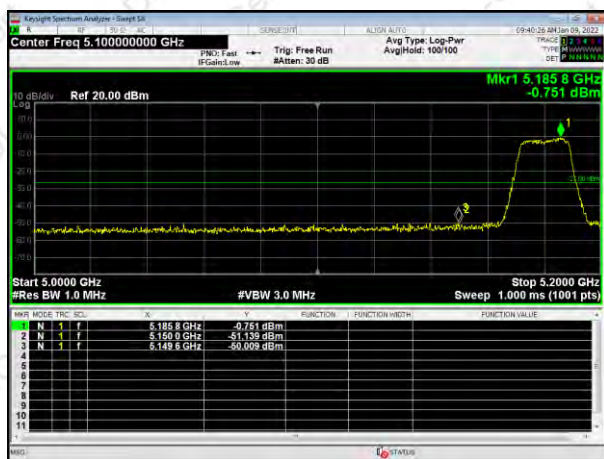


5180MHz

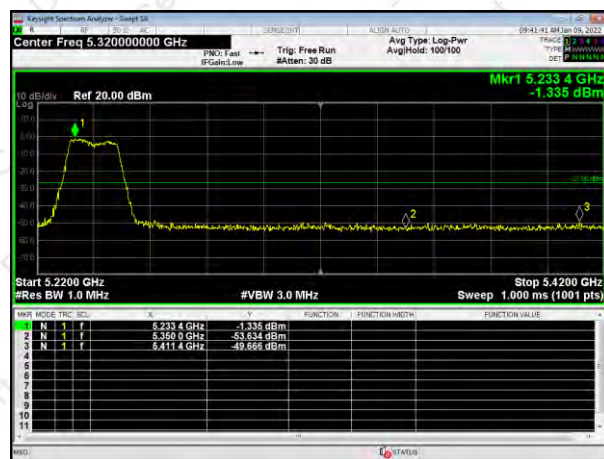


5240MHz

## 802.11ac HT40

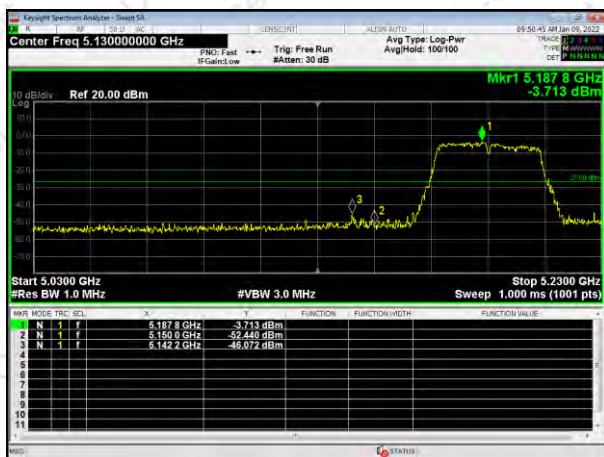


5190MHz

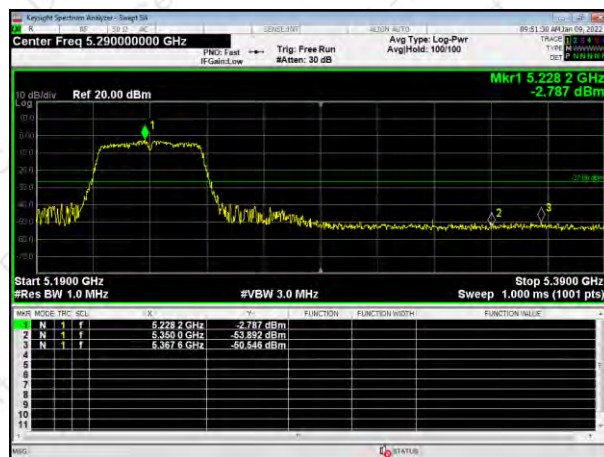

5230MHz

## 802.11ac HT80

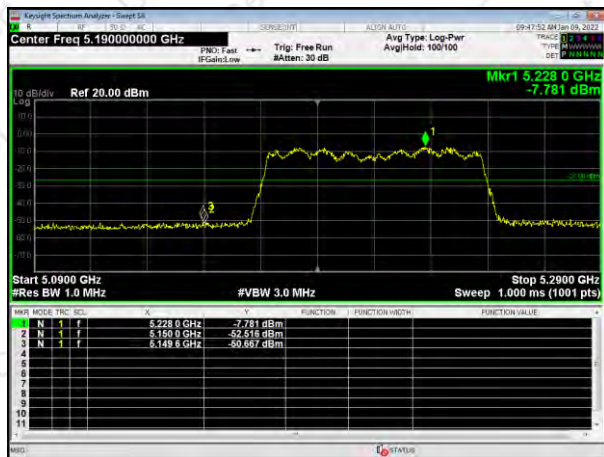

5210MHz



## 802.11a



5745MHz



5825MHz

## 802.11n HT20




5745MHz



5825MHz

## 802.11n HT40

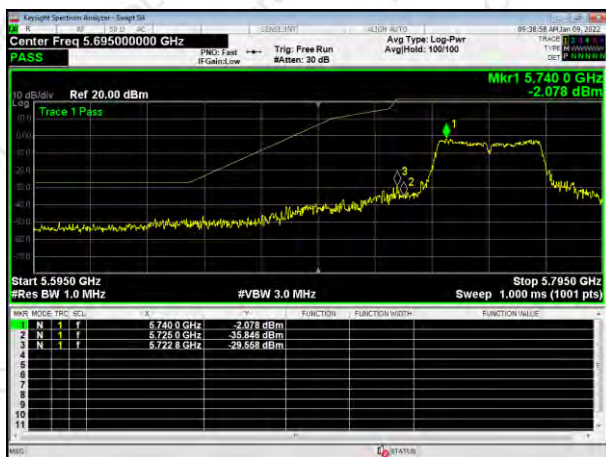

5755MHz



5795MHz



## 802.11ac HT20



5745MHz



5825MHz

## 802.11ac HT40



5755MHz



5795MHz

## 802.11ac HT80




5775MHz




Ant2

802.11a

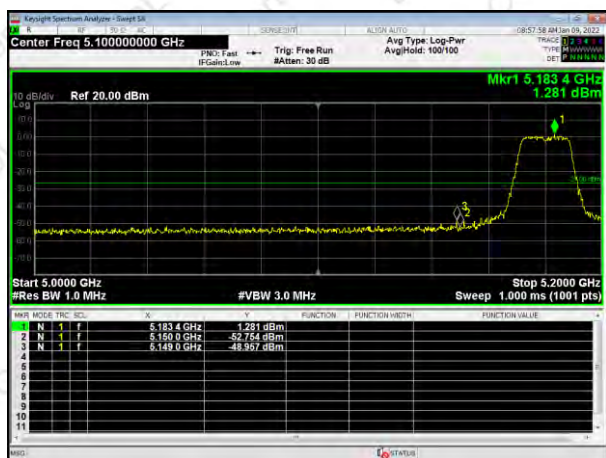


5180MHz

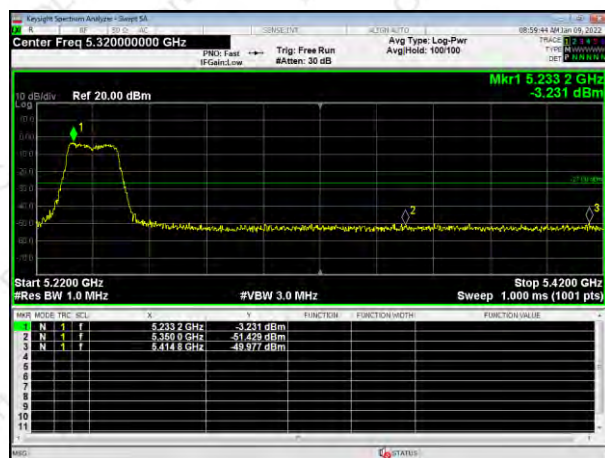


5240MHz

802.11n HT20

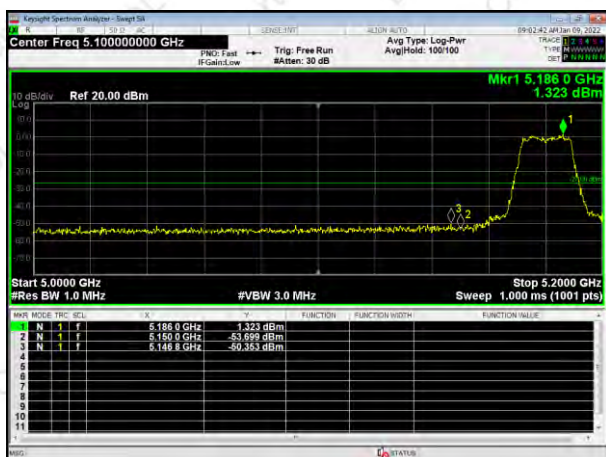


5180MHz

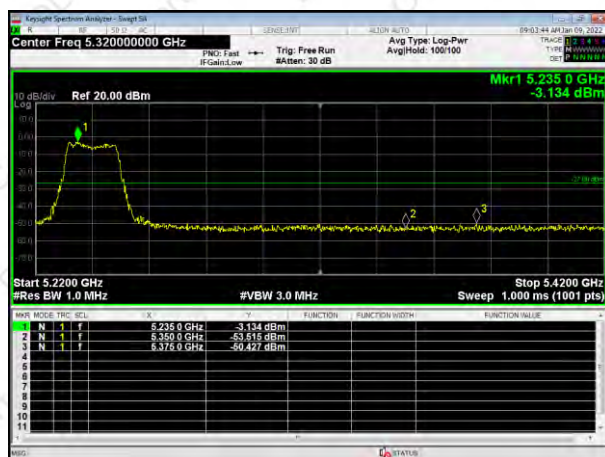


5240MHz

802.11n HT40

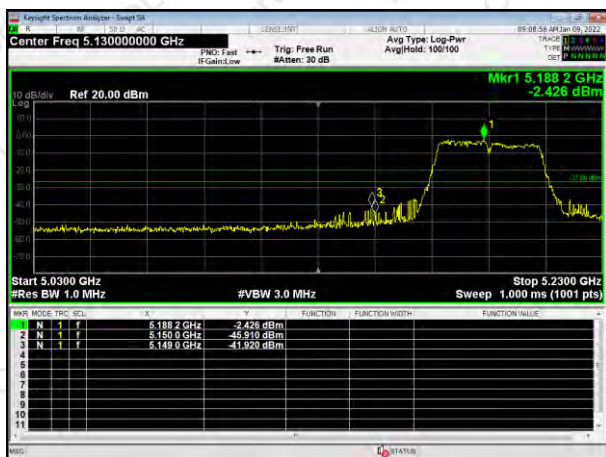


5190MHz

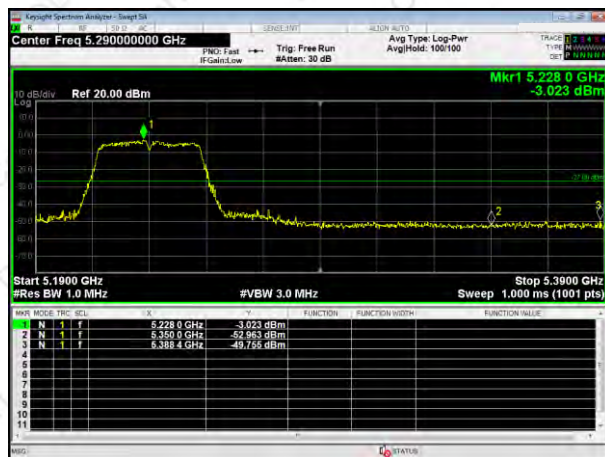


5230MHz



## 802.11ac HT20

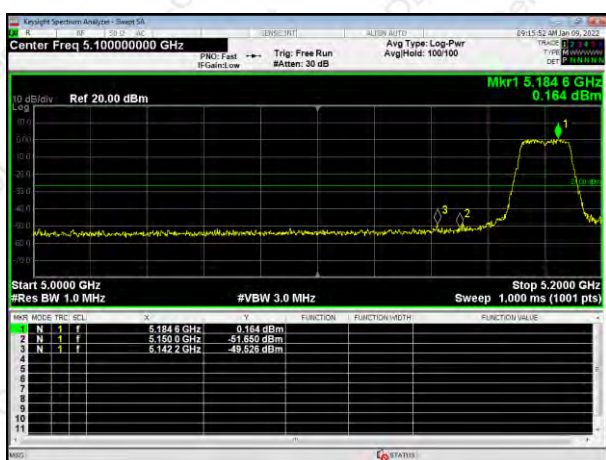


5180MHz

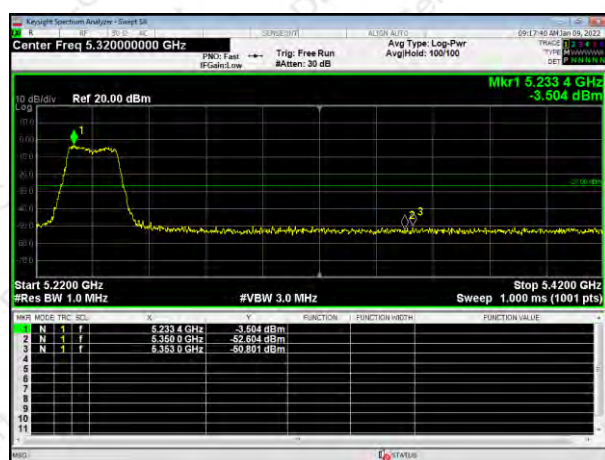


5240MHz

## 802.11ac HT40

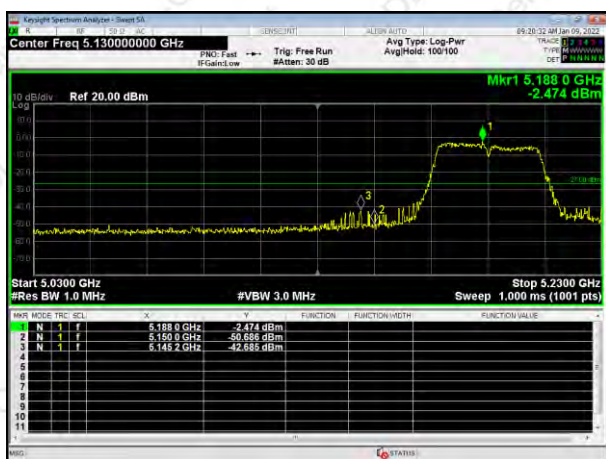


5190MHz

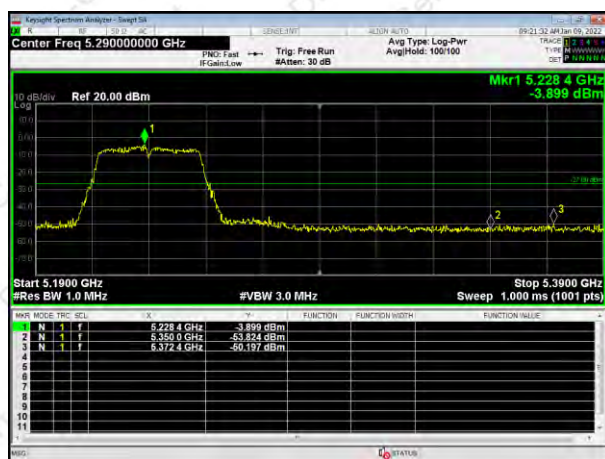

5230MHz

## 802.11ac HT80

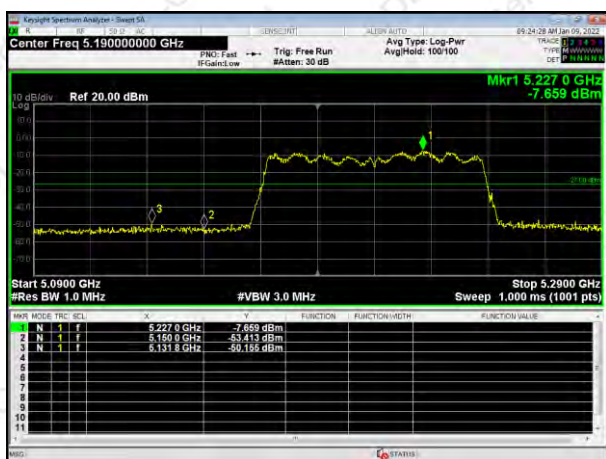

5210MHz



## 802.11a



5745MHz



5825MHz

## 802.11n HT20



5745MHz



5825MHz

## 802.11n HT40



5755MHz



5795MHz



## 802.11ac HT20



5745MHz

5825MHz


## 802.11ac HT40



5755MHz

5795MHz

## 802.11ac HT80

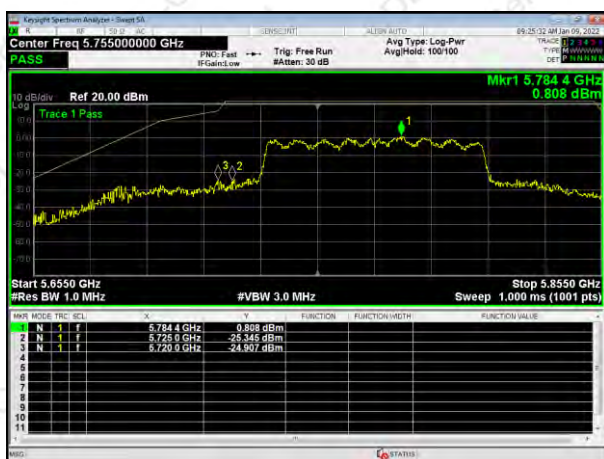

5775MHz



#### 4. PEAK OUTPUT POWER

##### 4.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


##### 4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP

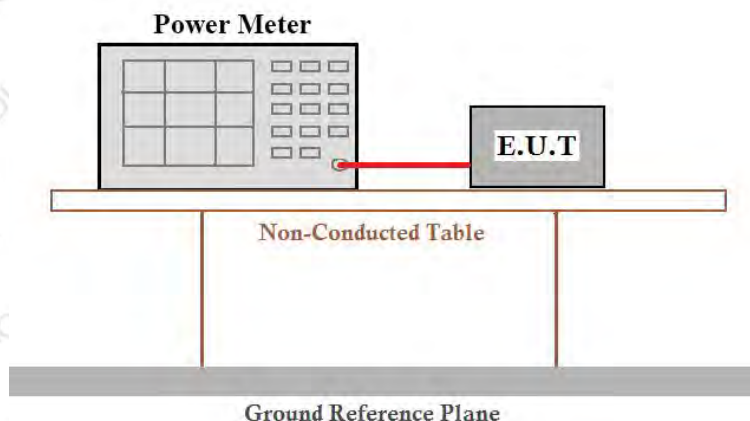

##### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.1.5 TEST RESULTS

| Band   | Mode          | Test Channel | Peak Output Power (dBm) |       | Total output power (dBm) | LIMIT (dBm) |
|--------|---------------|--------------|-------------------------|-------|--------------------------|-------------|
|        |               |              | ANT1                    | ANT2  |                          |             |
| Band 1 | 802.11a       | Low          | 12.38                   | 12.25 | /                        | 23.98       |
|        |               | Moddle       | 12.86                   | 12.32 | /                        | 23.98       |
|        |               | High         | 12.21                   | 12.17 | /                        | 23.98       |
|        | 802.11n HT20  | Low          | 11.32                   | 11.18 | 14.26                    | 23.98       |
|        |               | Moddle       | 11.62                   | 11.21 | 14.43                    | 23.98       |
|        |               | High         | 11.32                   | 11.09 | 14.22                    | 23.98       |
|        | 802.11n HT40  | Low          | 11.13                   | 10.89 | 14.02                    | 23.98       |
|        |               | High         | 11.75                   | 11.12 | 14.46                    | 23.98       |
|        | 802.11ac HT20 | Low          | 11.36                   | 11.14 | 14.26                    | 23.98       |
|        |               | Moddle       | 11.65                   | 11.22 | 14.45                    | 23.98       |
|        |               | High         | 11.31                   | 11.17 | 14.25                    | 23.98       |
|        | 802.11ac HT40 | Low          | 11.12                   | 10.85 | 14.00                    | 23.98       |
|        |               | High         | 11.68                   | 11.21 | 14.46                    | 23.98       |
|        | 802.11ac HT80 | /            | 8.13                    | 8.05  | 11.10                    | 23.98       |

| Band   | Mode          | Test Channel | Peak Output Power (dBm) |       | Total output power (dBm) | LIMIT (dBm) |
|--------|---------------|--------------|-------------------------|-------|--------------------------|-------------|
|        |               |              | ANT1                    | ANT2  |                          |             |
| Band 4 | 802.11a       | Low          | 12.32                   | 12.13 | /                        | 30          |
|        |               | Moddle       | 12.29                   | 12.17 | /                        | 30          |
|        |               | High         | 12.26                   | 12.04 | /                        | 30          |
|        | 802.11n HT20  | Low          | 11.38                   | 11.27 | 14.34                    | 30          |
|        |               | Moddle       | 11.32                   | 11.19 | 14.27                    | 30          |
|        |               | High         | 11.23                   | 11.15 | 14.20                    | 30          |
|        | 802.11n HT40  | Low          | 11.28                   | 11.08 | 14.19                    | 30          |
|        |               | High         | 11.30                   | 11.12 | 14.22                    | 30          |
|        | 802.11ac HT20 | Low          | 11.25                   | 11.05 | 14.16                    | 30          |
|        |               | Moddle       | 10.86                   | 10.25 | 13.58                    | 30          |
|        |               | High         | 10.96                   | 10.39 | 13.69                    | 30          |
|        | 802.11ac HT40 | Low          | 10.77                   | 10.24 | 13.52                    | 30          |
|        |               | High         | 10.22                   | 9.96  | 13.10                    | 30          |
|        | 802.11ac HT80 | /            | 8.11                    | 8.15  | 11.14                    | 30          |



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

|                                                                                                  |
|--------------------------------------------------------------------------------------------------|
| In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. |
| In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.     |

| Spectrum Parameters | Setting                                                    |
|---------------------|------------------------------------------------------------|
| Attenuation         | Auto                                                       |
| Span Frequency      | = the frequency band of operation                          |
| RB                  | RBW $\geq$ 1MHz for band 1<br>RBW $\geq$ 510KHz for band 4 |
| VB                  | VBW $\geq$ 3RBW                                            |
| Detector            | Peak                                                       |
| Trace               | Max Hold                                                   |
| Sweep Time          | Auto                                                       |

#### 5.1.1 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:  
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)  
For U-NII-3 Band:  
Set RBW=510 kHz, VBW=3\*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. Use the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add 10 log(1/duty cycle).  
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
7. Duty factor Reference is made to the test results in Section 7.1.5.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS****ANT1**

|       | Mode       | Test Channel | Reading Level (dBm) | Duty factor (dB) | PSD (dBm/MHz) | Limit (dBm) | Result |
|-------|------------|--------------|---------------------|------------------|---------------|-------------|--------|
| Band1 | 802.11a    | Low          | 2.175               | 0.15             | 2.325         | 11.00       | PASS   |
|       |            | Moddle       | 2.015               | 0.15             | 2.165         | 11.00       | PASS   |
|       |            | High         | 2.058               | 0.15             | 2.208         | 11.00       | PASS   |
|       | 802.11n20  | Low          | 1.991               | 0.48             | 2.471         | 11.00       | PASS   |
|       |            | Moddle       | 1.799               | 0.48             | 2.279         | 11.00       | PASS   |
|       |            | High         | 1.842               | 0.48             | 2.322         | 11.00       | PASS   |
|       | 802.11n40  | Low          | -0.989              | 0.26             | -0.729        | 11.00       | PASS   |
|       |            | High         | 0.057               | 0.26             | 0.317         | 11.00       | PASS   |
|       | 802.11ac20 | Low          | 2.069               | 0.14             | 2.209         | 11.00       | PASS   |
|       |            | Moddle       | 1.884               | 0.14             | 2.024         | 11.00       | PASS   |
|       |            | High         | 1.951               | 0.14             | 2.091         | 11.00       | PASS   |
|       | 802.11ac40 | Low          | -1.22               | 0.27             | -0.95         | 11.00       | PASS   |
|       |            | High         | 0.236               | 0.27             | 0.506         | 11.00       | PASS   |
|       | 802.11ac80 | /            | -5.451              | 0.51             | -4.941        | 11.00       | PASS   |

**ANT1**

|       | Mode       | Test Channel | Reading Level (dBm) | Duty factor (dB) | PSD (dBm/500kHz) | Limit (dBm) | Result |
|-------|------------|--------------|---------------------|------------------|------------------|-------------|--------|
| Band4 | 802.11a    | Low          | 2.02                | 0.14             | 2.16             | 30.00       | PASS   |
|       |            | Moddle       | 2.819               | 0.14             | 2.959            | 30.00       | PASS   |
|       |            | High         | 2.731               | 0.14             | 2.871            | 30.00       | PASS   |
|       | 802.11n20  | Low          | 1.501               | 0.48             | 1.981            | 30.00       | PASS   |
|       |            | Moddle       | 2.355               | 0.48             | 2.835            | 30.00       | PASS   |
|       |            | High         | 2.893               | 0.48             | 3.373            | 30.00       | PASS   |
|       | 802.11n40  | Low          | -2.497              | 0.26             | -2.237           | 30.00       | PASS   |
|       |            | High         | -1.146              | 0.26             | -0.886           | 30.00       | PASS   |
|       | 802.11ac20 | Low          | 1.294               | 0.14             | 1.434            | 30.00       | PASS   |
|       |            | Moddle       | 2.343               | 0.14             | 2.483            | 30.00       | PASS   |
|       |            | High         | 2.338               | 0.14             | 2.478            | 30.00       | PASS   |
|       | 802.11ac40 | Low          | -2.397              | 0.27             | -2.127           | 30.00       | PASS   |
|       |            | High         | -1.065              | 0.27             | -0.795           | 30.00       | PASS   |
|       | 802.11ac80 | /            | -4.705              | 0.51             | -4.195           | 30.00       | PASS   |



## ANT2


|       | Mode       | Test Channel | Reading Level (dBm) | Duty factor (dB) | PSD (dBm/MHz) | Limit (dBm) | Result |
|-------|------------|--------------|---------------------|------------------|---------------|-------------|--------|
| Band1 | 802.11a    | Low          | 3.461               | 0.13             | 3.591         | 11.00       | PASS   |
|       |            | Moddle       | 0.817               | 0.13             | 0.947         | 11.00       | PASS   |
|       |            | High         | 0.271               | 0.13             | 0.401         | 11.00       | PASS   |
|       | 802.11n20  | Low          | 2.642               | 0.47             | 3.112         | 11.00       | PASS   |
|       |            | Moddle       | 0.421               | 0.47             | 0.891         | 11.00       | PASS   |
|       |            | High         | -0.92               | 0.47             | -0.45         | 11.00       | PASS   |
|       | 802.11n40  | Low          | -0.269              | 0.26             | -0.009        | 11.00       | PASS   |
|       |            | High         | -1.665              | 0.26             | -1.405        | 11.00       | PASS   |
|       | 802.11ac20 | Low          | 2.958               | 0.14             | 3.098         | 11.00       | PASS   |
|       |            | Moddle       | 0.491               | 0.14             | 0.631         | 11.00       | PASS   |
|       |            | High         | -0.43               | 0.14             | -0.29         | 11.00       | PASS   |
|       | 802.11ac40 | Low          | -0.371              | 0.27             | -0.101        | 11.00       | PASS   |
|       |            | High         | -2.08               | 0.27             | -1.81         | 11.00       | PASS   |
|       | 802.11ac80 | /            | -4.743              | 0.52             | -4.223        | 11.00       | PASS   |

## ANT2

|       | Mode       | Test Channel | Reading Level (dBm) | Duty factor (dB) | PSD (dBm/500kHz) | Limit (dBm) | Result |
|-------|------------|--------------|---------------------|------------------|------------------|-------------|--------|
| Band4 | 802.11a    | Low          | 6.546               | 0.13             | 6.676            | 30.00       | PASS   |
|       |            | Moddle       | 6.587               | 0.13             | 6.717            | 30.00       | PASS   |
|       |            | High         | 5.374               | 0.13             | 5.504            | 30.00       | PASS   |
|       | 802.11n20  | Low          | 6.12                | 0.47             | 6.59             | 30.00       | PASS   |
|       |            | Moddle       | 6.898               | 0.47             | 7.368            | 30.00       | PASS   |
|       |            | High         | 4.956               | 0.47             | 5.426            | 30.00       | PASS   |
|       | 802.11n40  | Low          | 2.223               | 0.26             | 2.483            | 30.00       | PASS   |
|       |            | High         | 2.684               | 0.26             | 2.944            | 30.00       | PASS   |
|       | 802.11ac20 | Low          | 6.205               | 0.14             | 6.345            | 30.00       | PASS   |
|       |            | Moddle       | 6.815               | 0.14             | 6.955            | 30.00       | PASS   |
|       |            | High         | 5.245               | 0.14             | 5.385            | 30.00       | PASS   |
|       | 802.11ac40 | Low          | 1.902               | 0.29             | 2.192            | 30.00       | PASS   |
|       |            | High         | 2.617               | 0.29             | 2.907            | 30.00       | PASS   |
|       | 802.11ac80 | /            | 0.171               | 0.51             | 0.681            | 30.00       | PASS   |



## ANT1

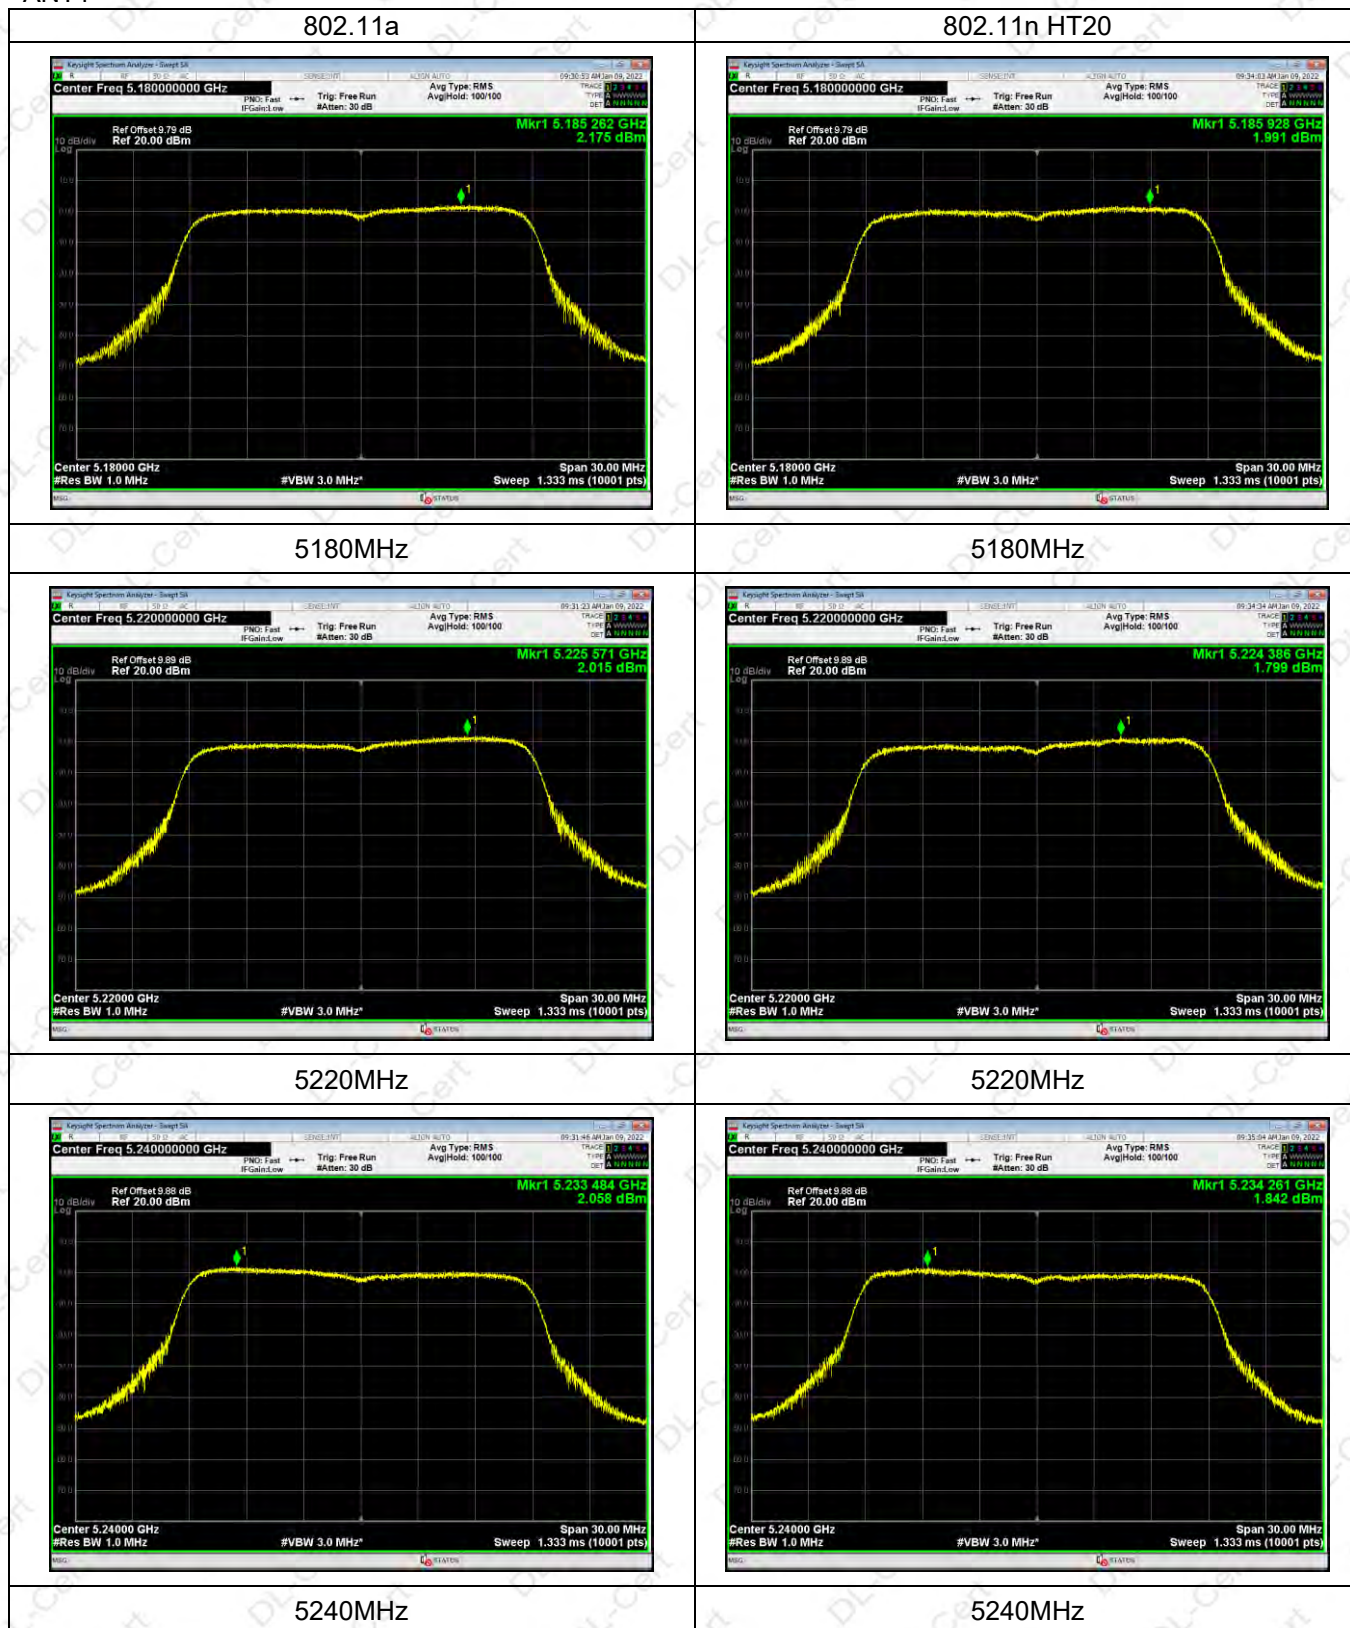



## ANT1


802.11n HT40



802.11ac HT20



5190MHz

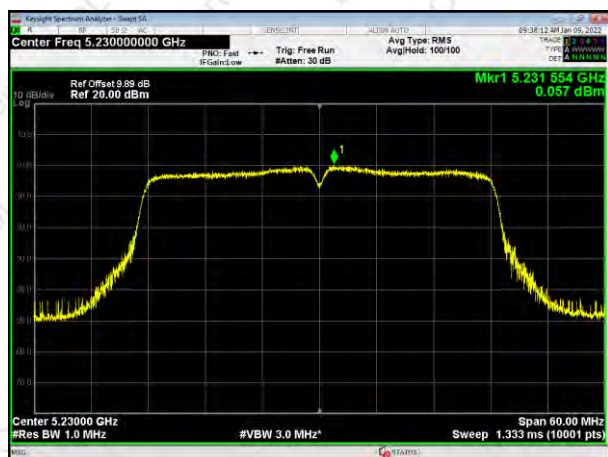

5180



5230MHz



5220

5240



## ANT1

