

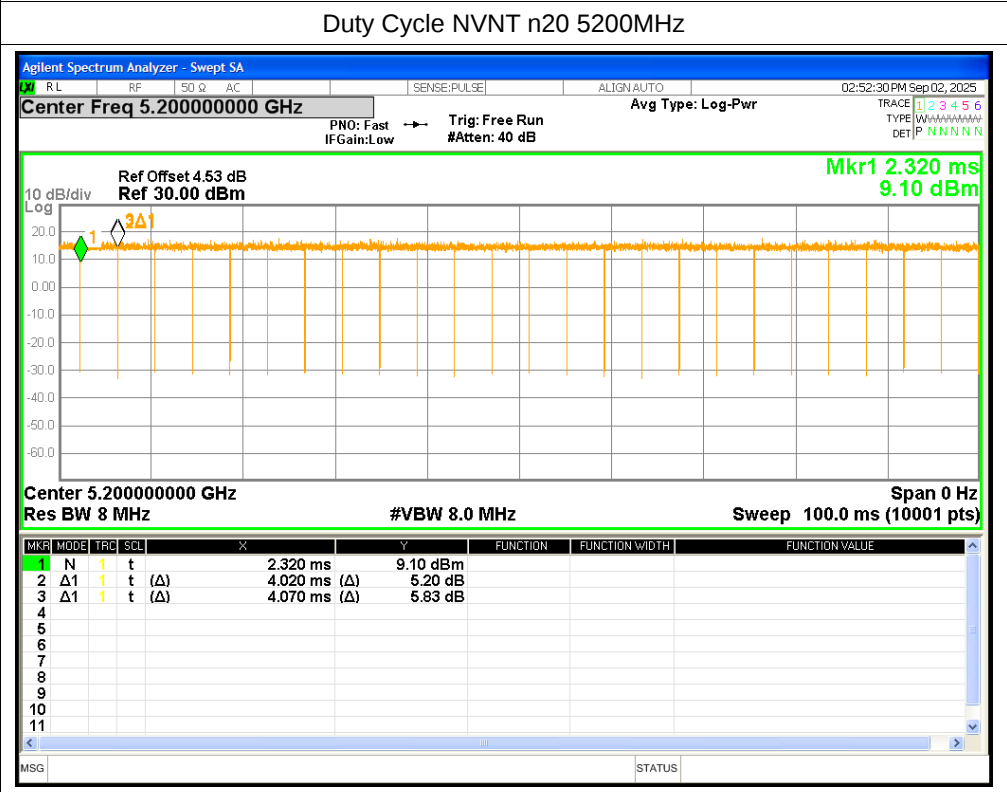


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	n20	5180	4.02	4.06	99.01	0.04	0.25
NVNT	n20	5200	4.02	4.07	98.77	0.05	0.25
NVNT	n20	5240	4.01	4.06	98.77	0.05	0.25

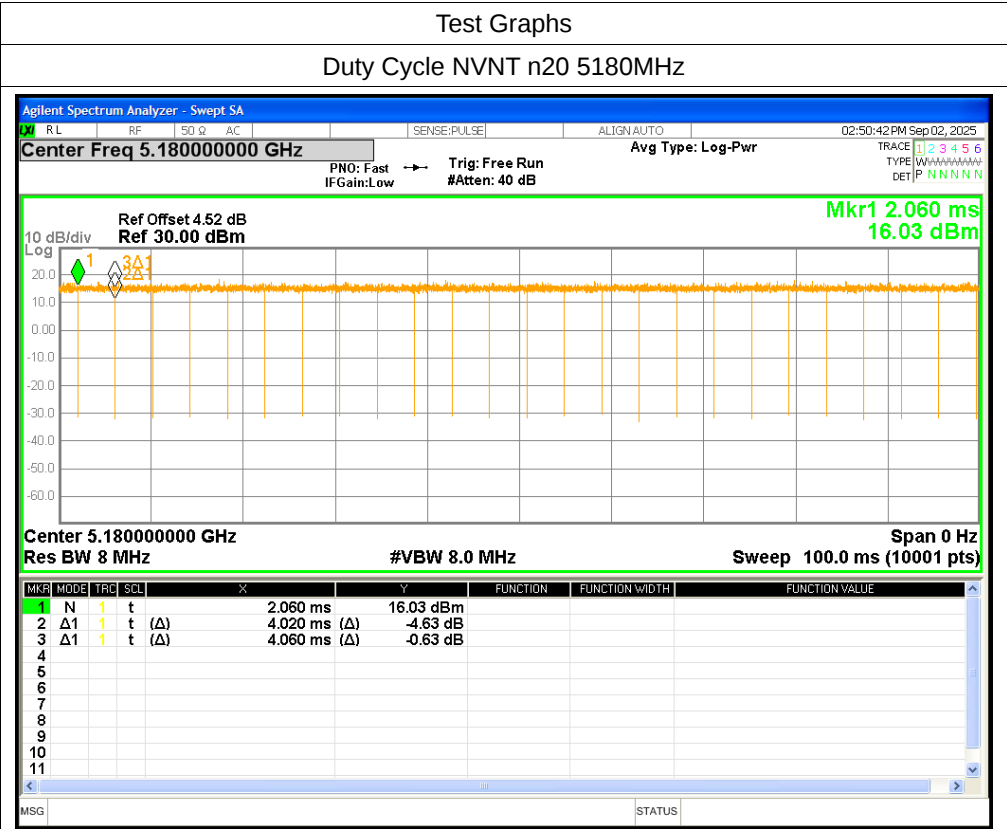


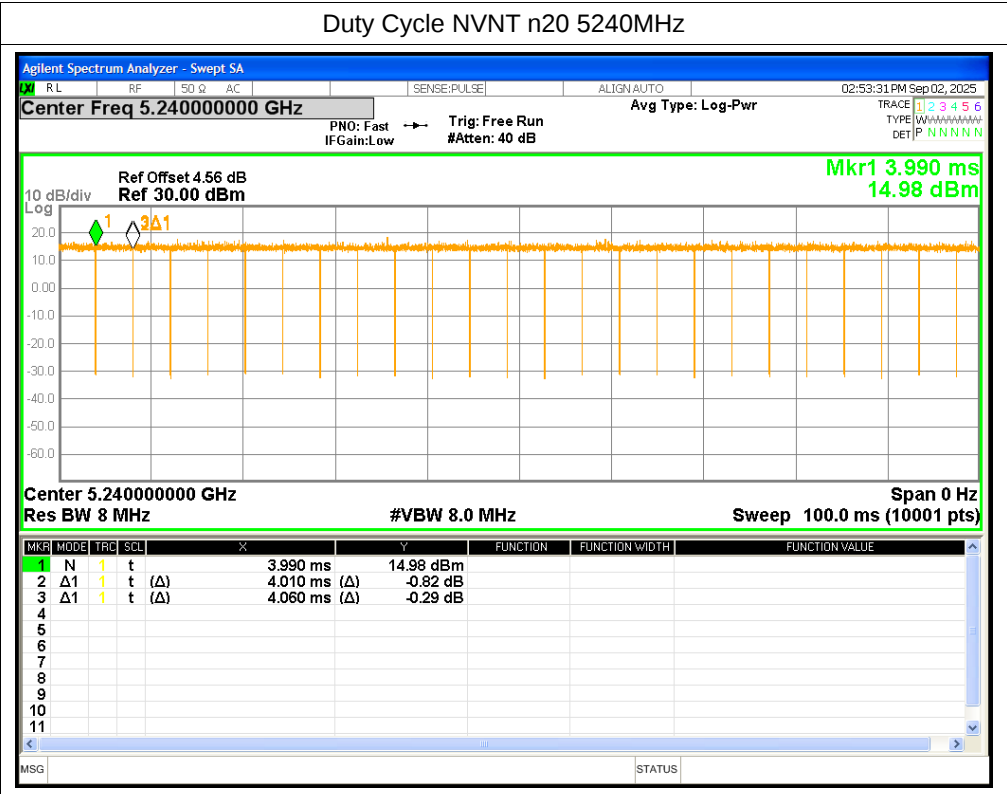

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	n20	5180	12.1	12.1	<=24	Pass
NVNT	n20	5200	11.7	11.7	<=24	Pass
NVNT	n20	5240	12.79	12.79	<=24	Pass

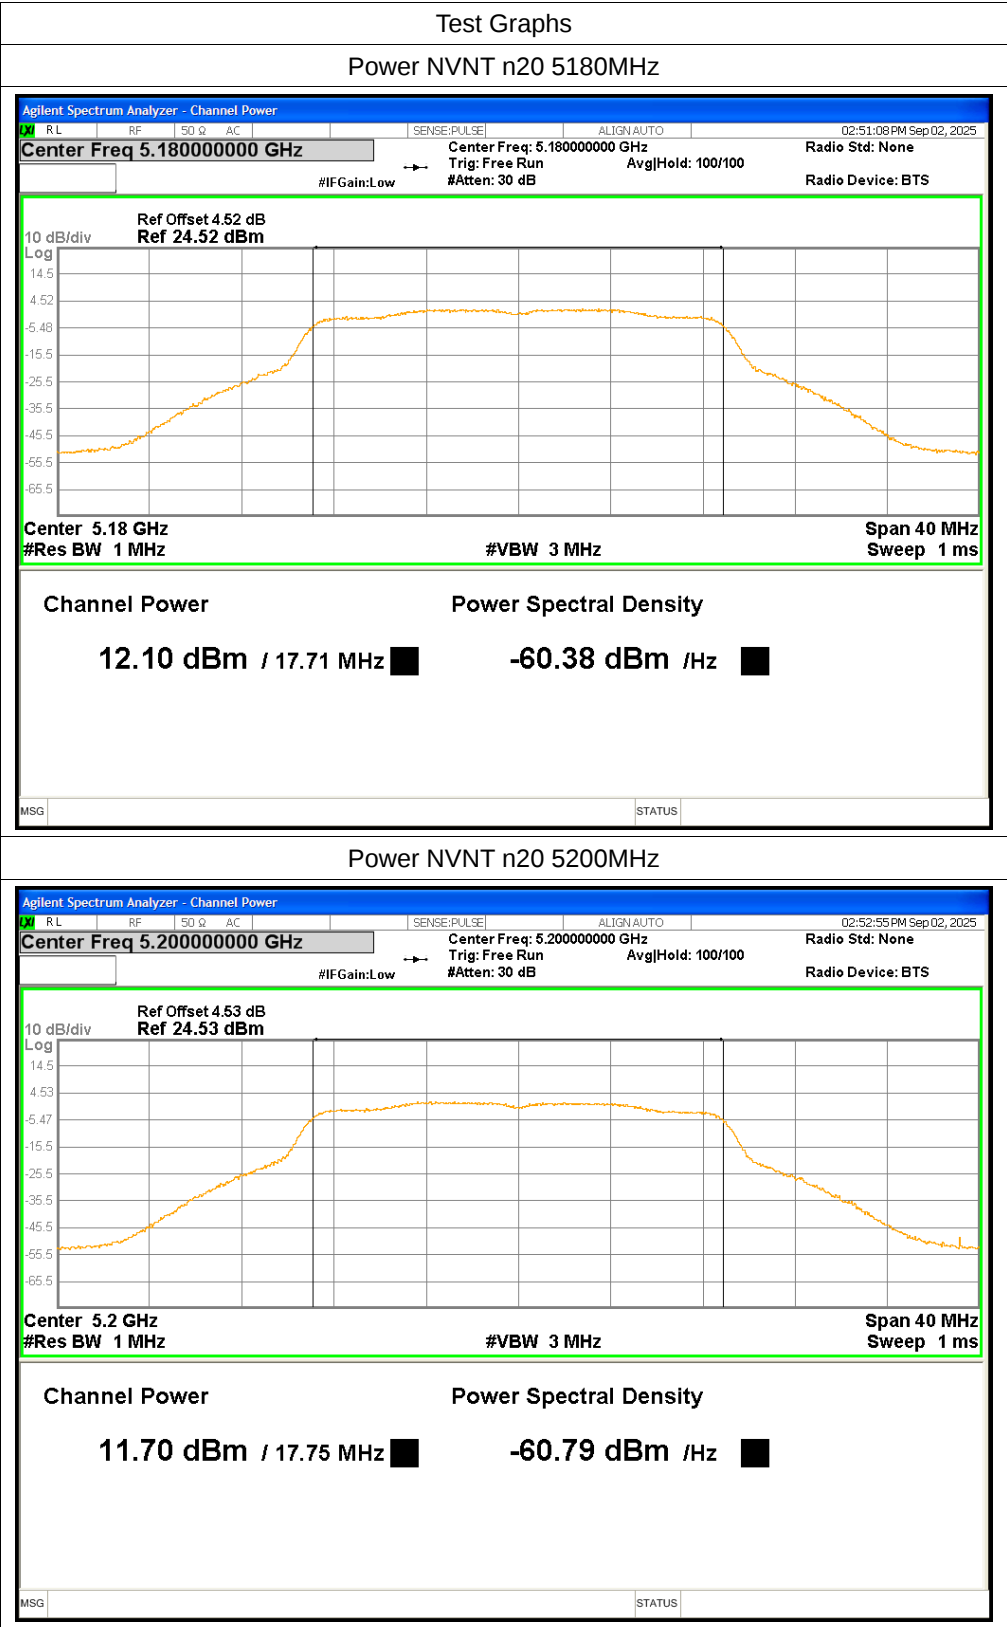

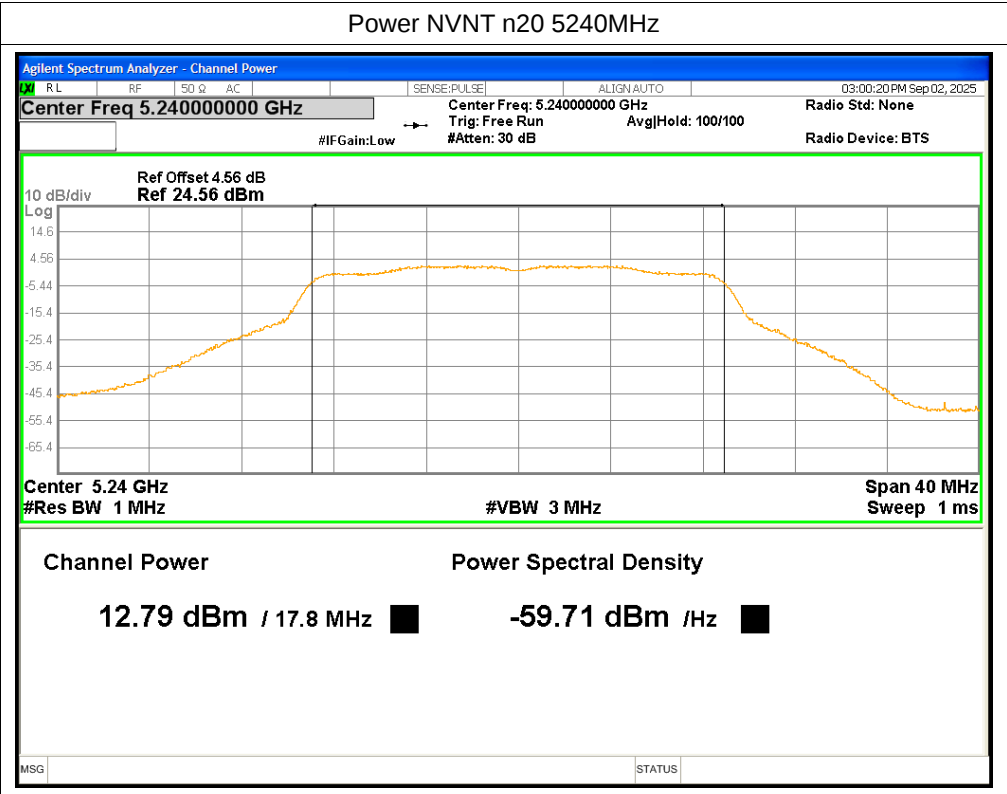


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	n20	5180	23.96	Pass
NVNT	n20	5200	24.26	Pass
NVNT	n20	5240	24.63	Pass


Test Graphs

-26dB Bandwidth NVNT n20 5180MHz

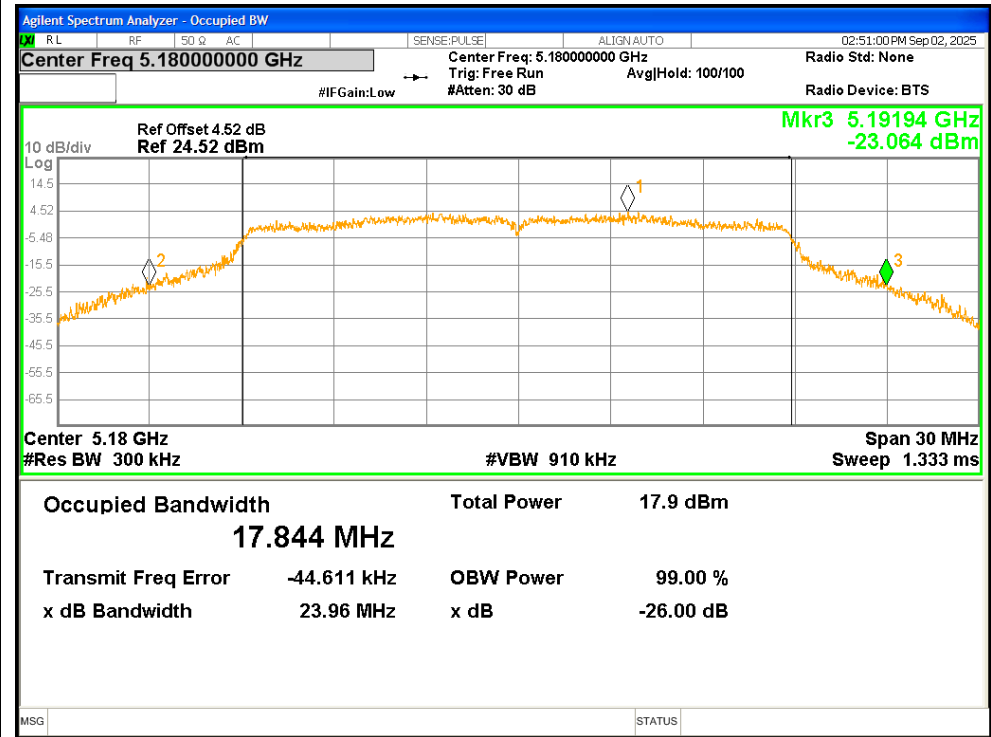

-26dB Bandwidth NVNT n20 5200MHz

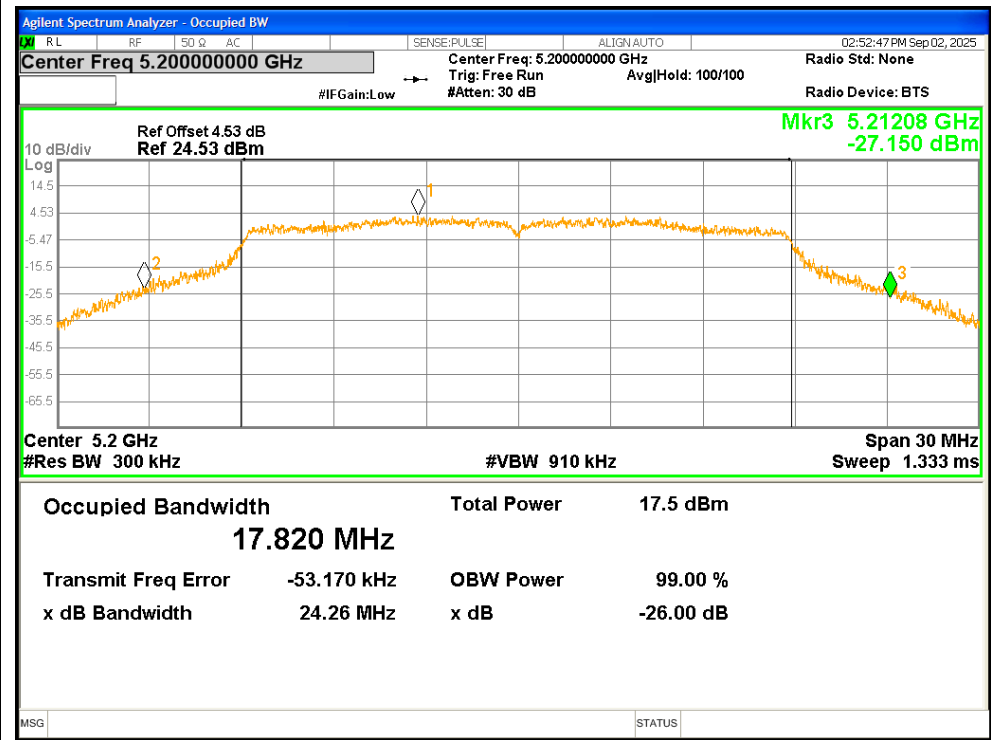

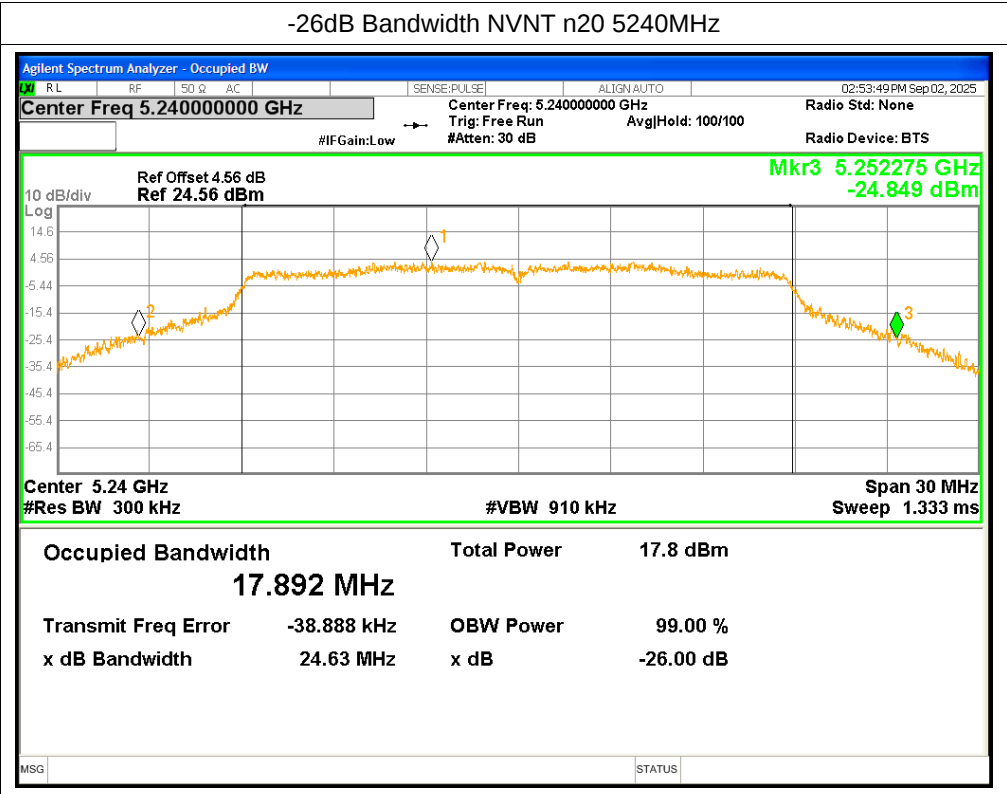


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	n20	5180	17.707
NVNT	n20	5200	17.751
NVNT	n20	5240	17.797


Test Graphs

OBW NVNT n20 5180MHz

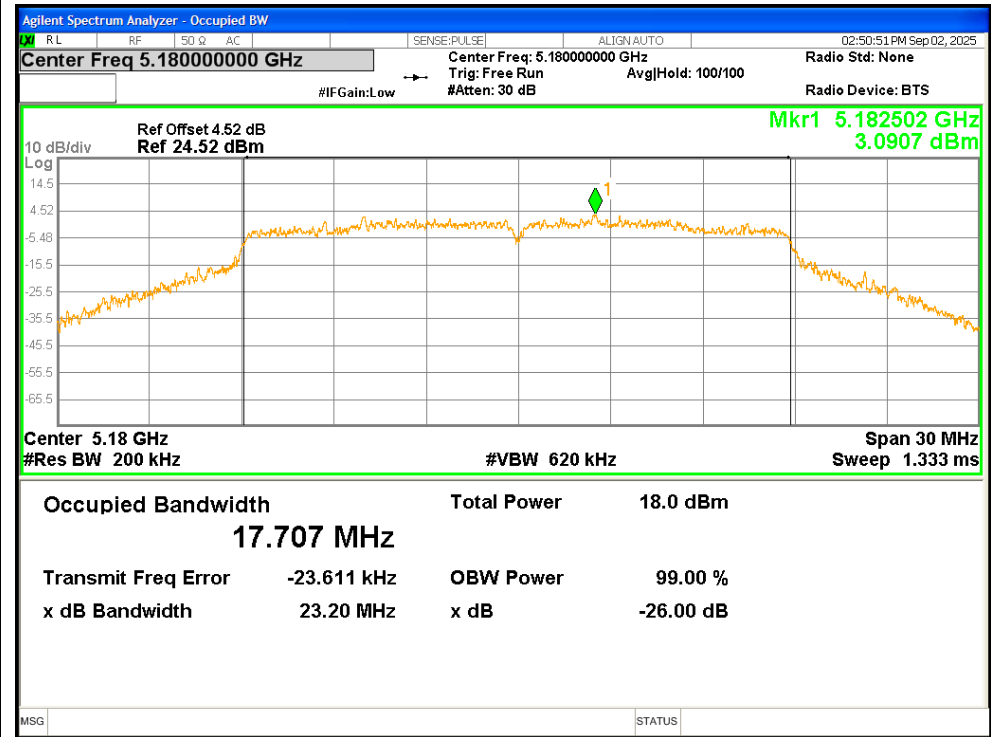

OBW NVNT n20 5200MHz

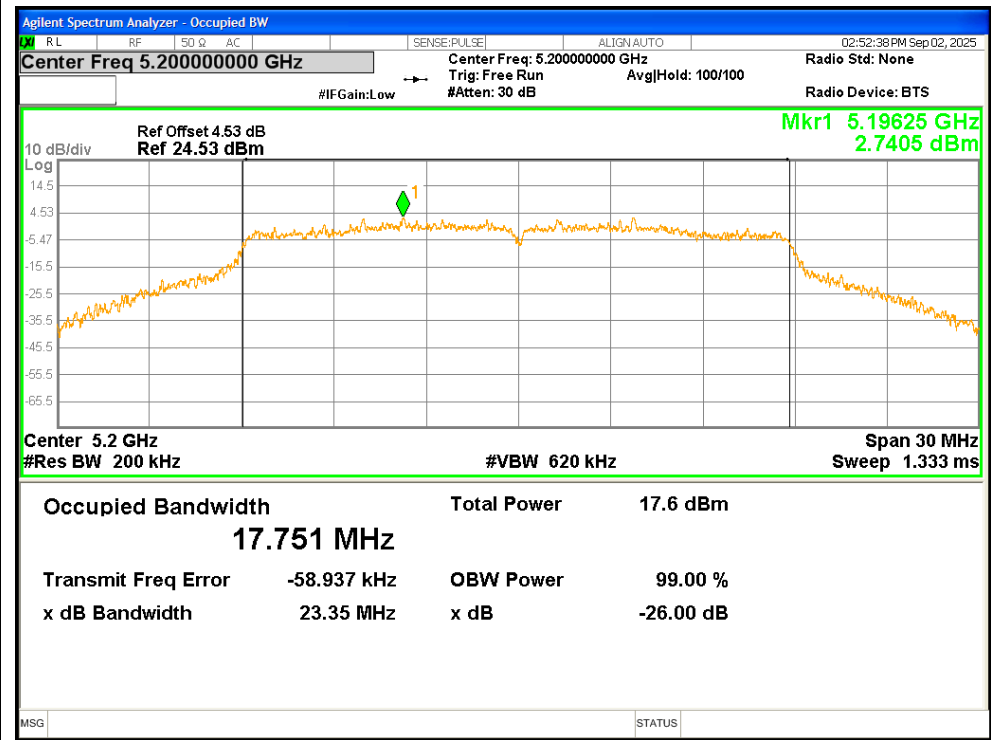

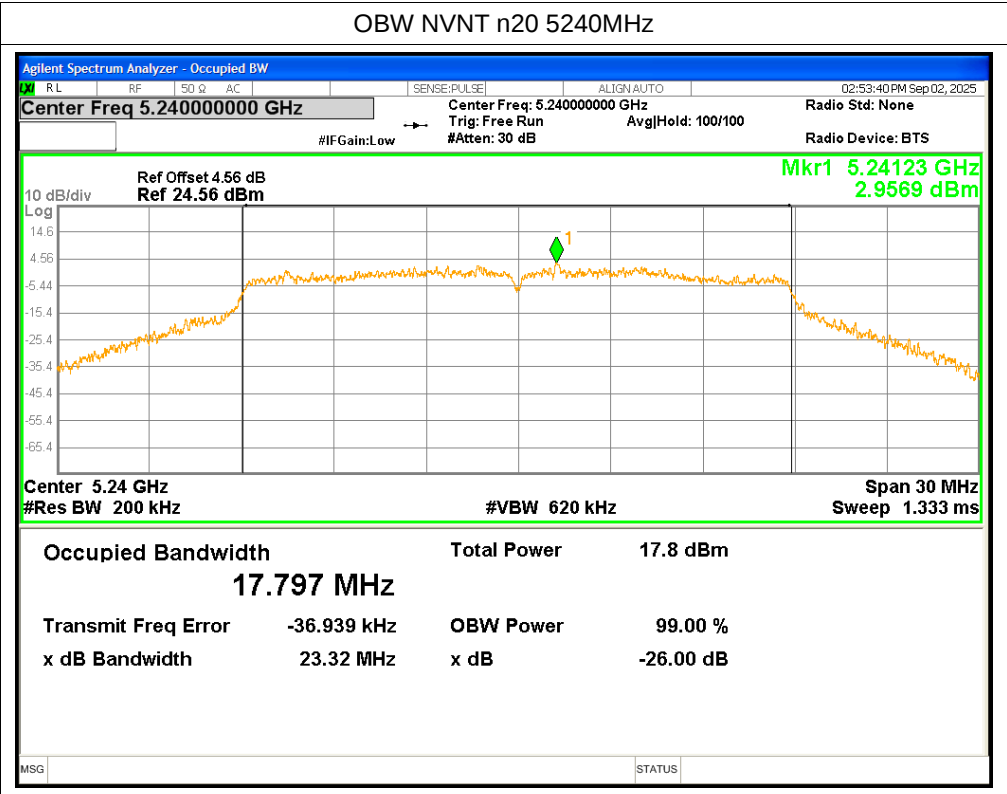


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	n20	5180	2.13	2.13	<=11	Pass
NVNT	n20	5200	1.829	1.829	<=11	Pass
NVNT	n20	5240	2.708	2.708	<=11	Pass

Test Graphs

PSD NVNT n20 5180MHz

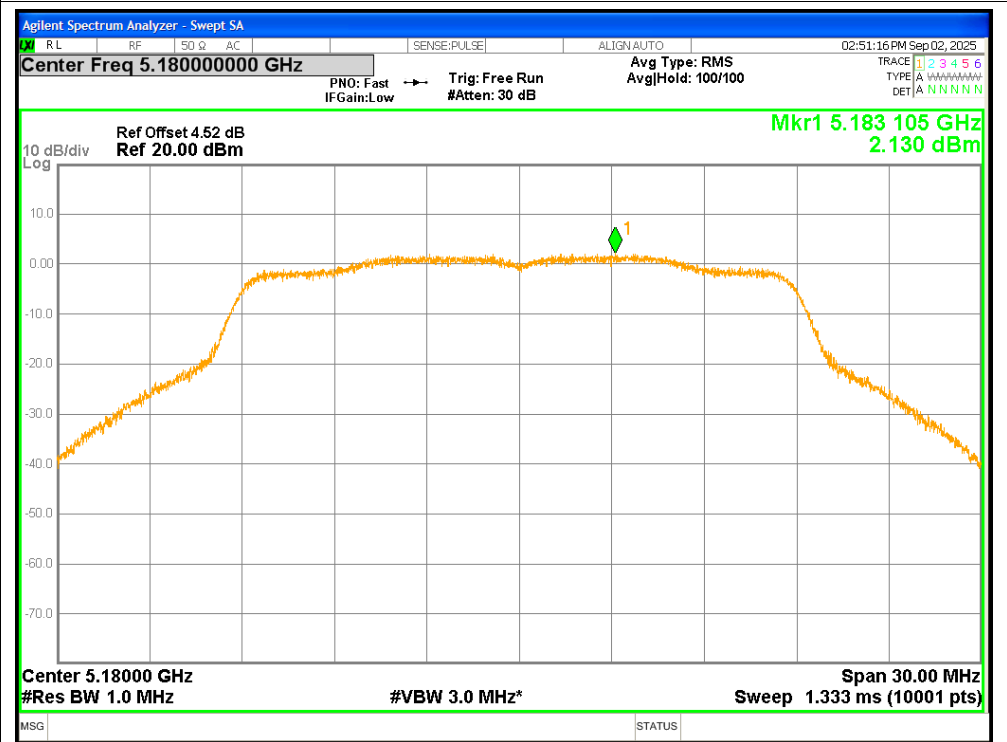

PSD NVNT n20 5200MHz

