

RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	Wireless Headset
Test Model:	MI09
Sample ID:	HC-C-202505-0160-01-01#
Environmental Conditions	
Temperature:	25℃
Relative Humidity:	55%
Test Voltage:	DC 5V
Test Engineer:	Lily Zhang
Note: For a more detailed features description, please refer to the report TBR-C-202505-0160-1 The report only show the worst case data.	

Contents

1.Duty Cycle.....3

2.Maximum Conducted Output Power6

3.-6dB Bandwidth.....9

4.Occupied Channel Bandwidth.....12

5.Maximum Power Spectral Density Level.....15

6.Band Edge18


7.Conducted RF Spurious Emission.....21

1.Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	88.4	0.54	0.45
NVNT	BLE 1Mbps	2440	Ant1	88.4	0.54	0.45
NVNT	BLE 1Mbps	2480	Ant1	88.4	0.54	0.45


Test Graphs

Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

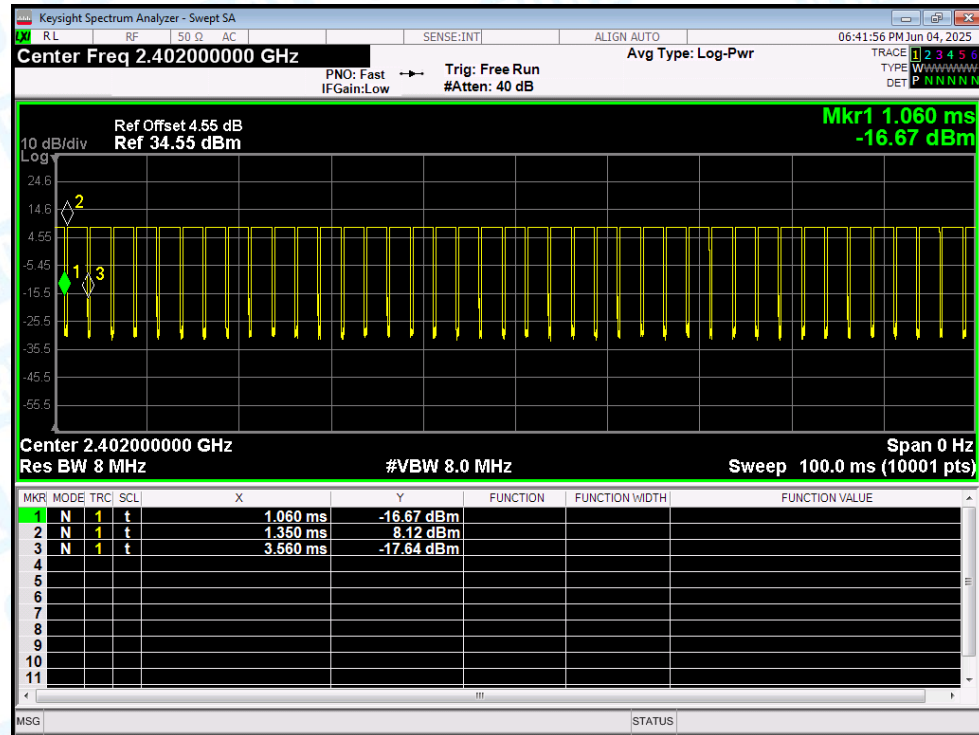

Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

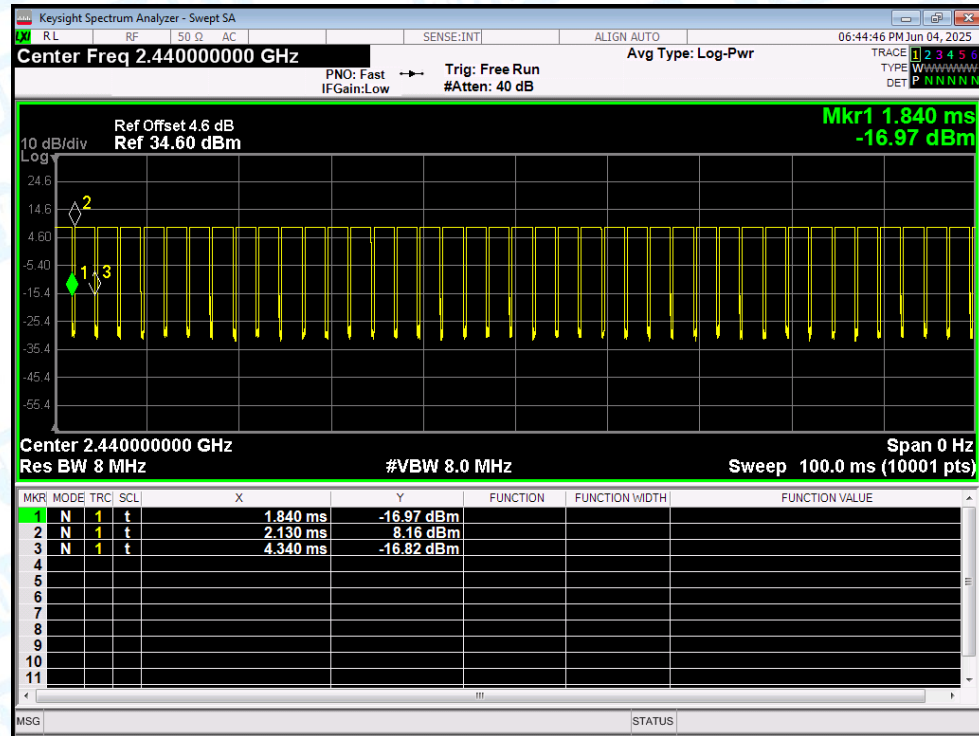

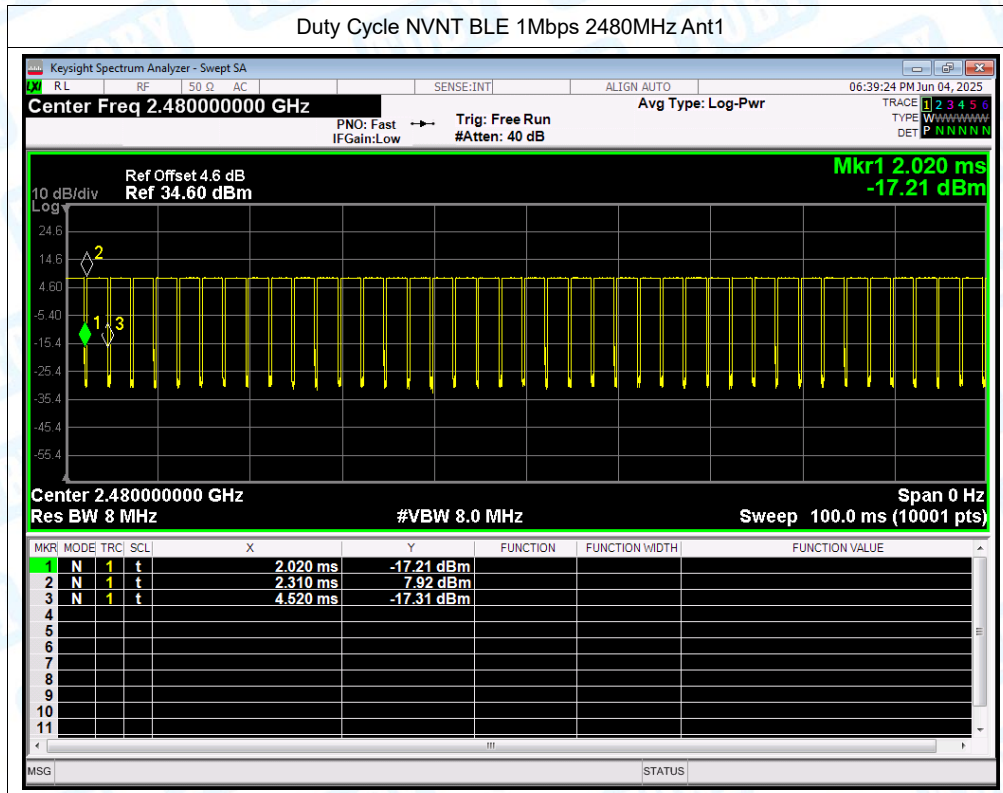


2.Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	8.164	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	8.163	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	7.948	30	Pass


Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

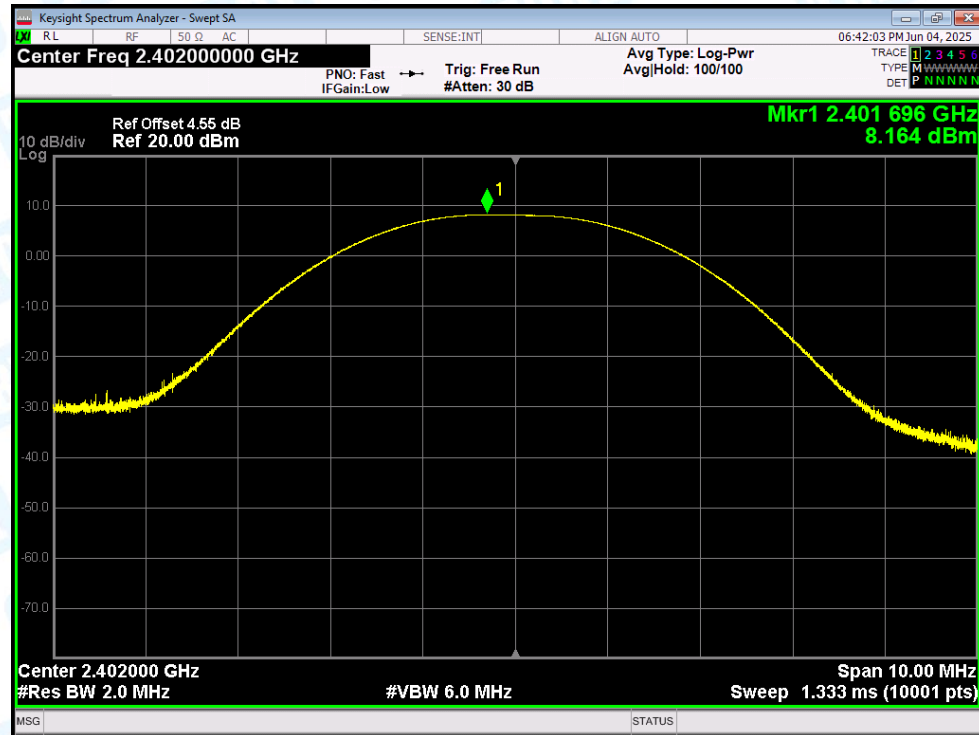

Power NVNT BLE 1Mbps 2440MHz Ant1

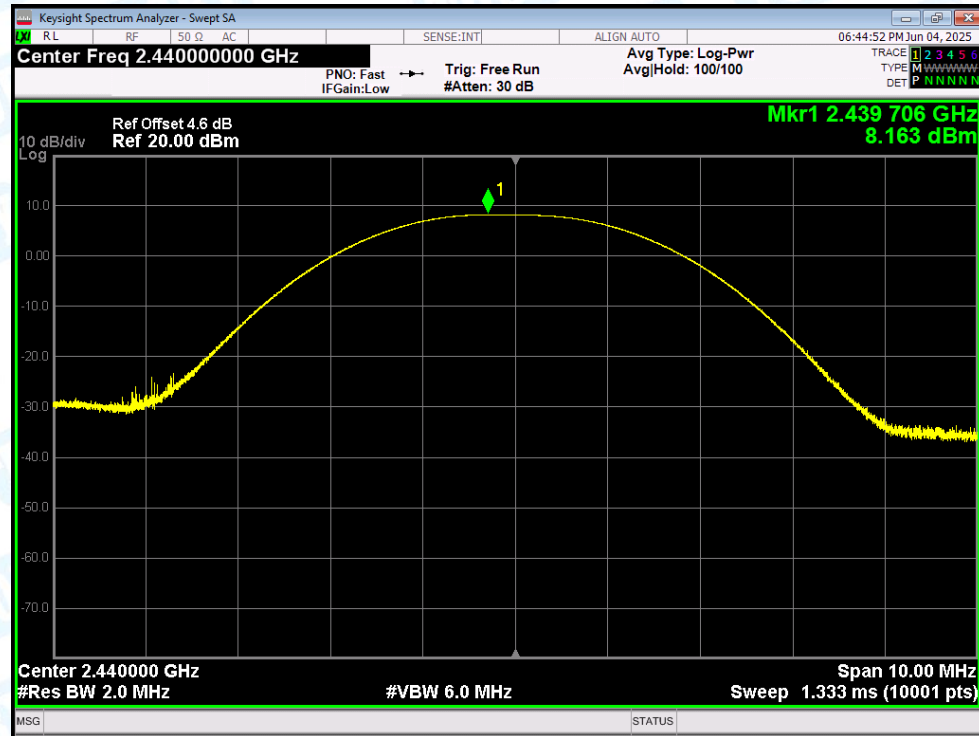

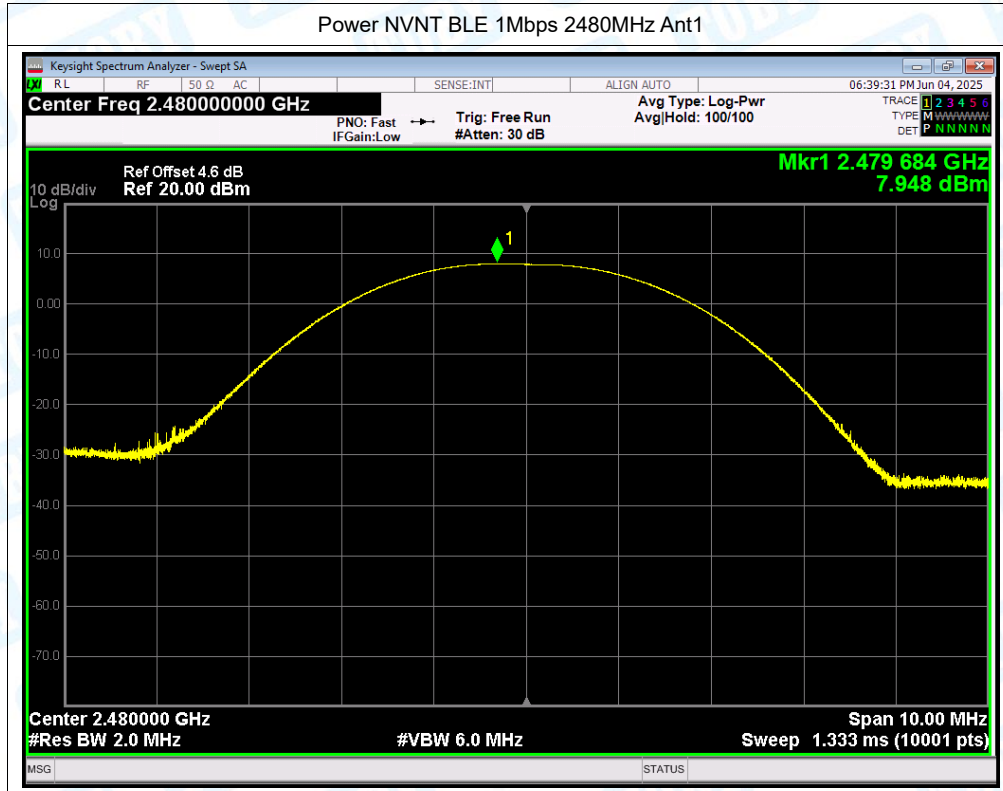


3.-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.65	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.65	0.5	Pass


Test Graphs

-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

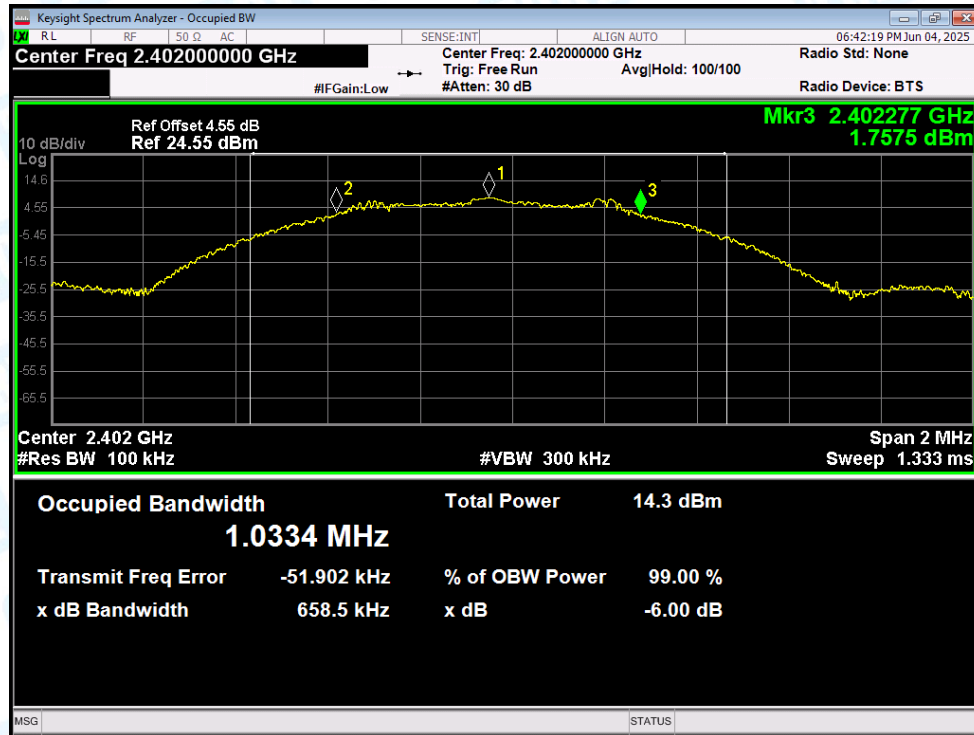

-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

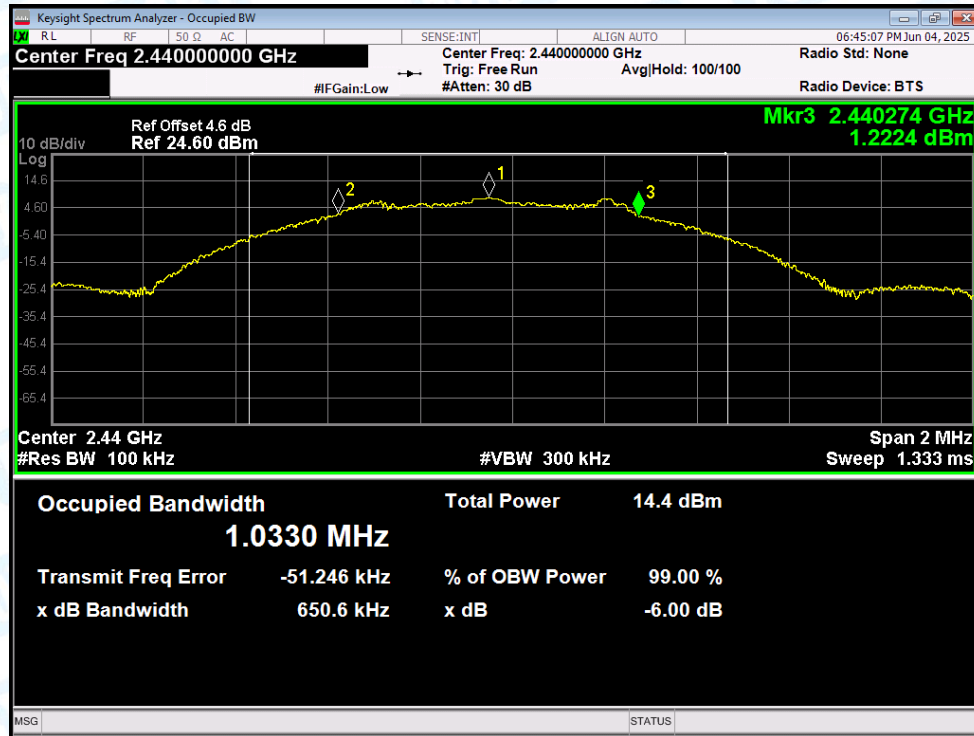

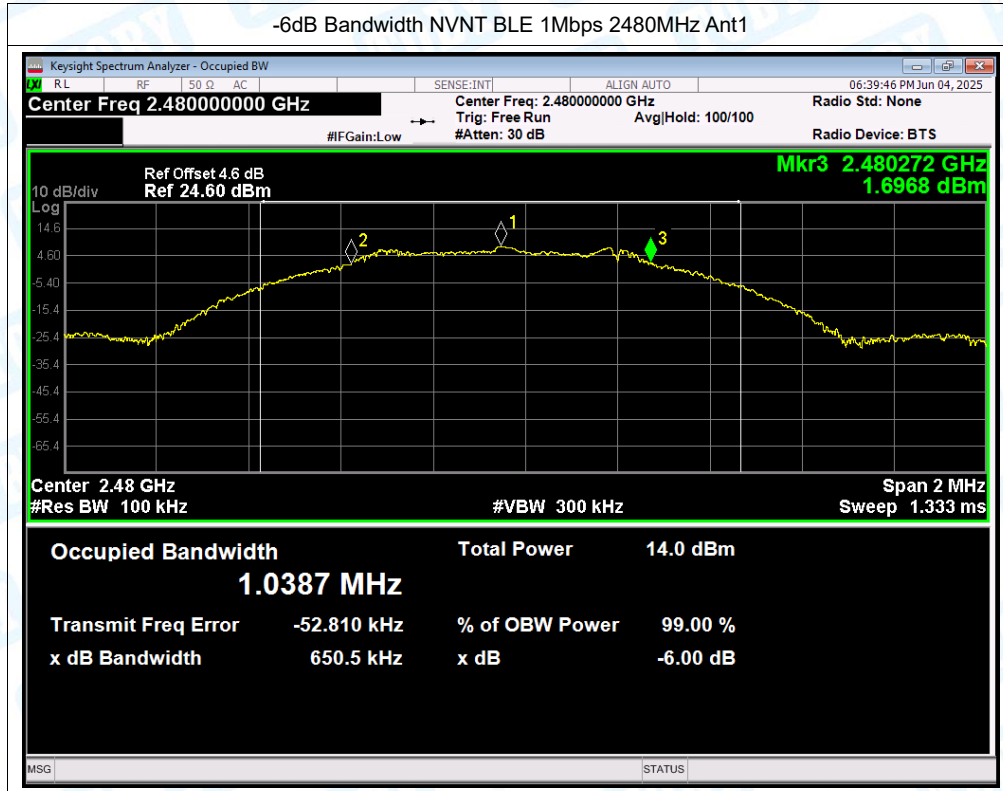


4.Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.021
NVNT	BLE 1Mbps	2440	Ant1	1.033
NVNT	BLE 1Mbps	2480	Ant1	1.014


Test Graphs

OBW NVNT BLE 1Mbps 2402MHz Ant1

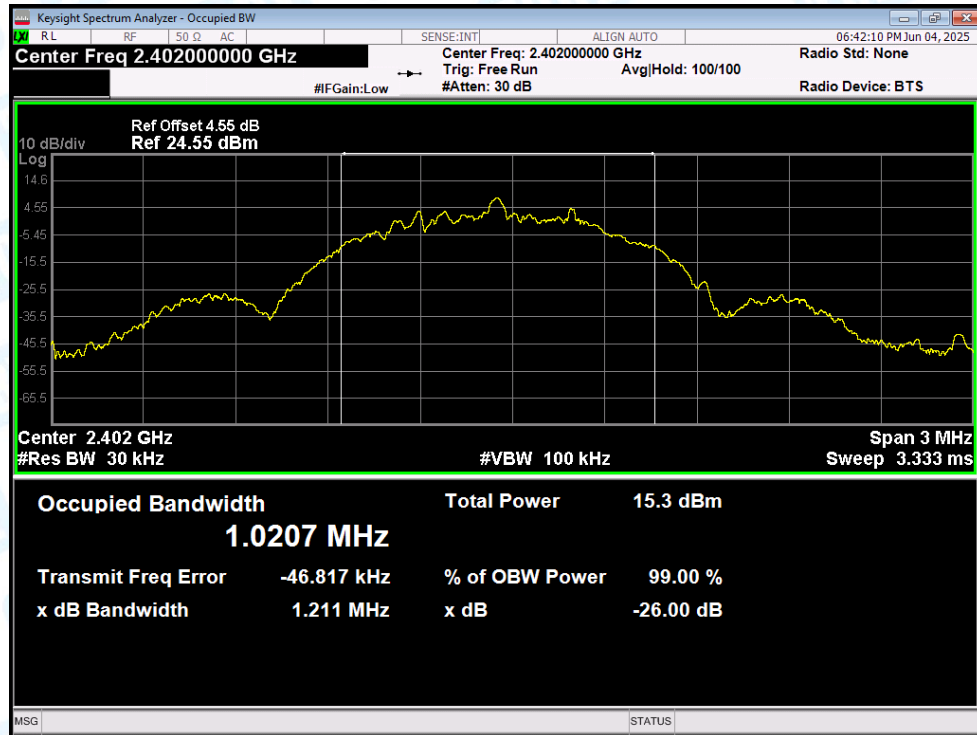

OBW NVNT BLE 1Mbps 2440MHz Ant1

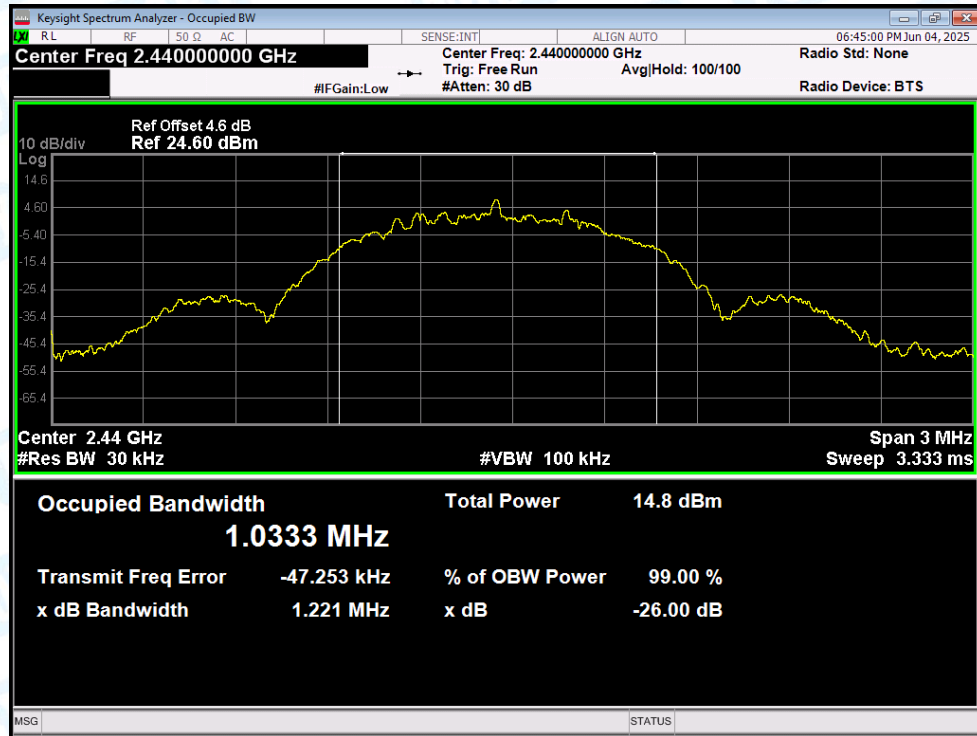

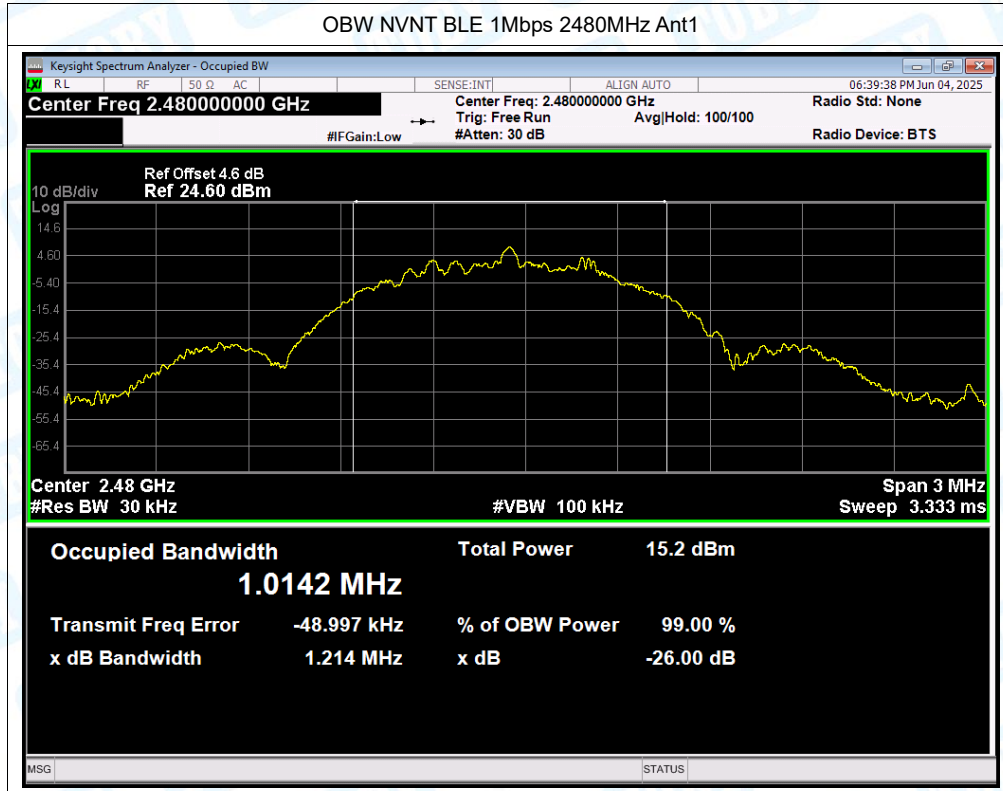


5.Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-2.209	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-2.478	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-2.409	8	Pass


Test Graphs

PSD NVNT BLE 1Mbps 2402MHz Ant1

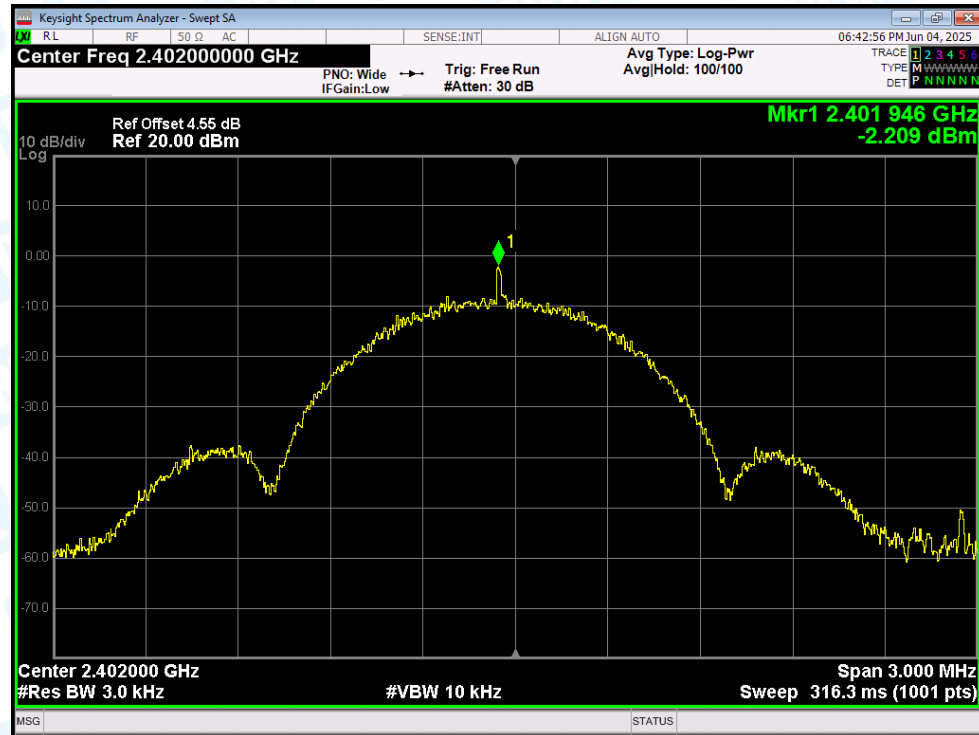

PSD NVNT BLE 1Mbps 2440MHz Ant1

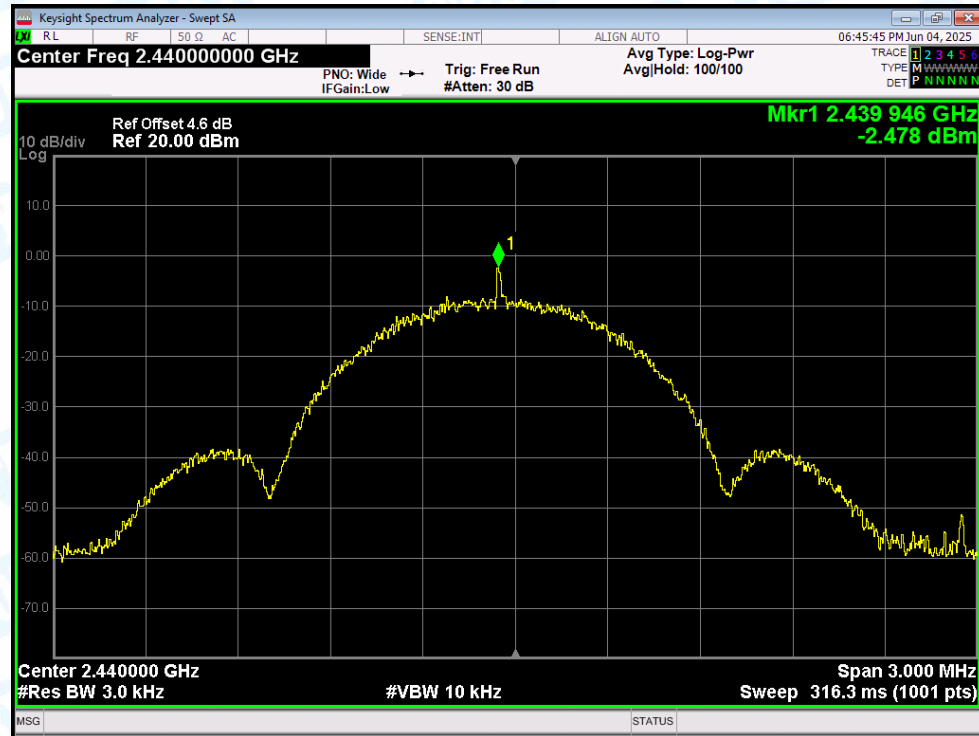

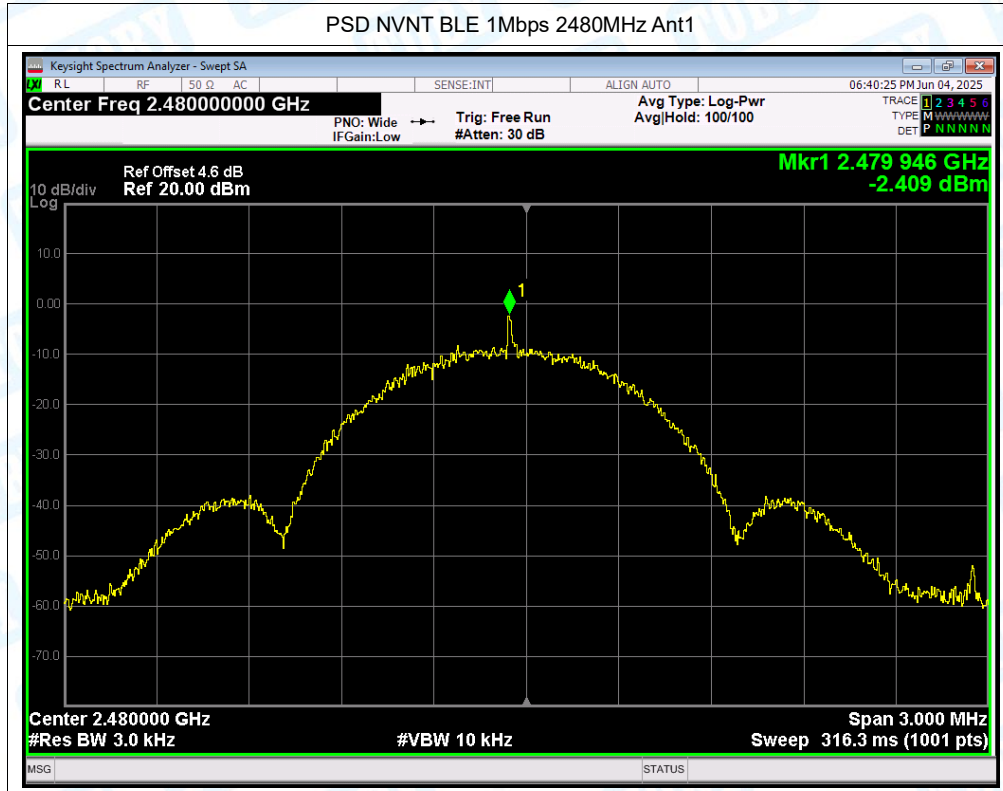


6.Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-61.3	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-47.24	-20	Pass

Test Graphs

Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

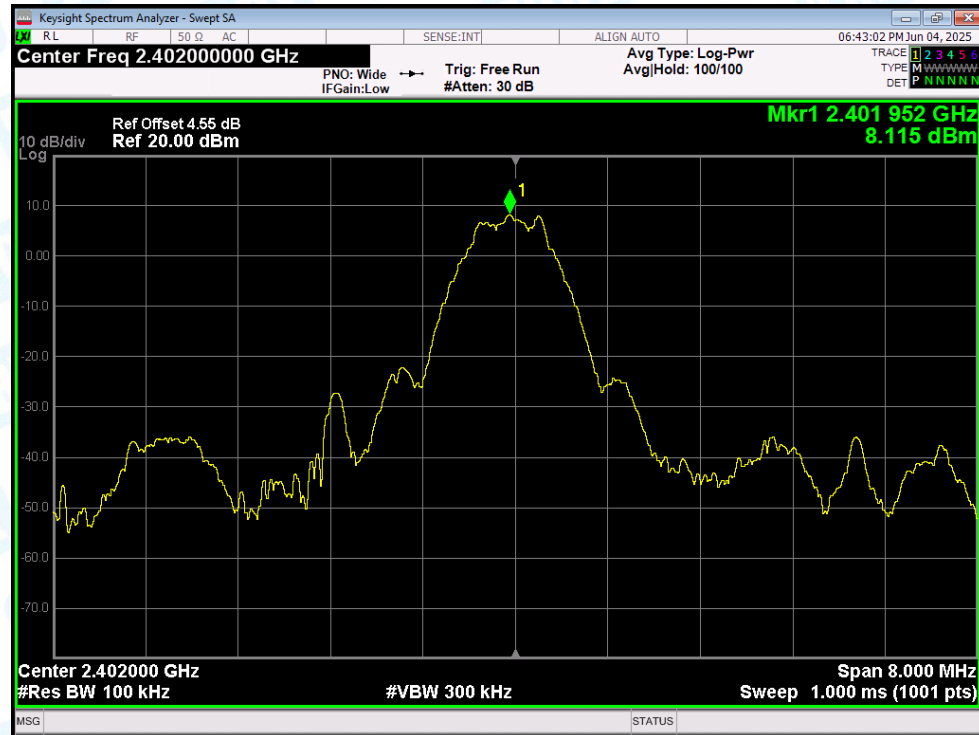


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

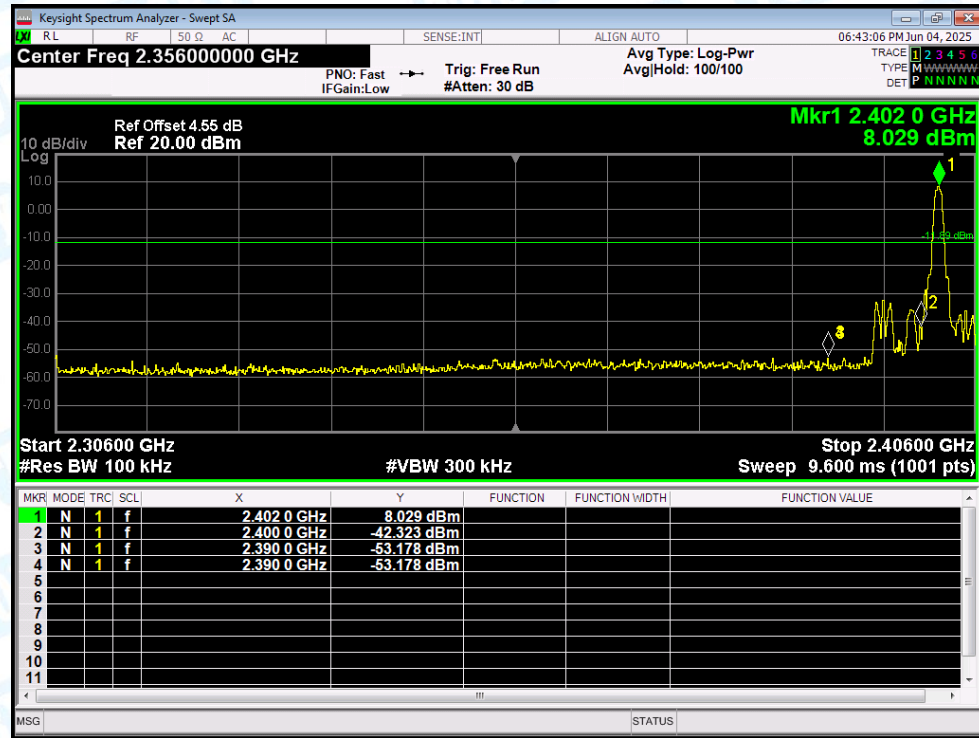

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref



Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

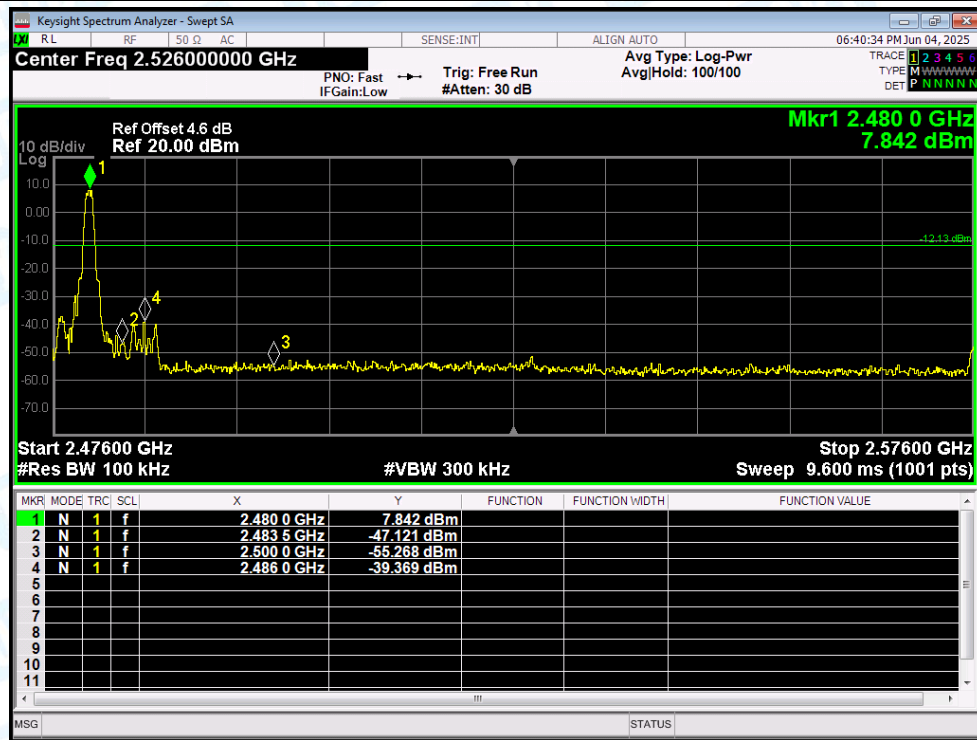


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-38.65	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-38.86	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-38.51	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

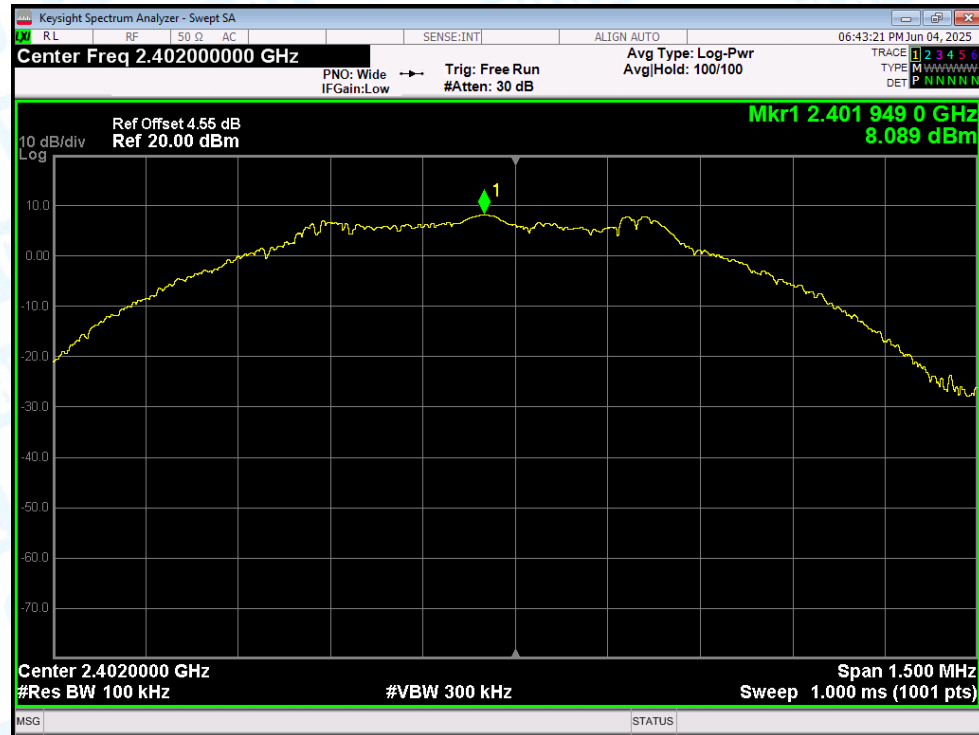


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

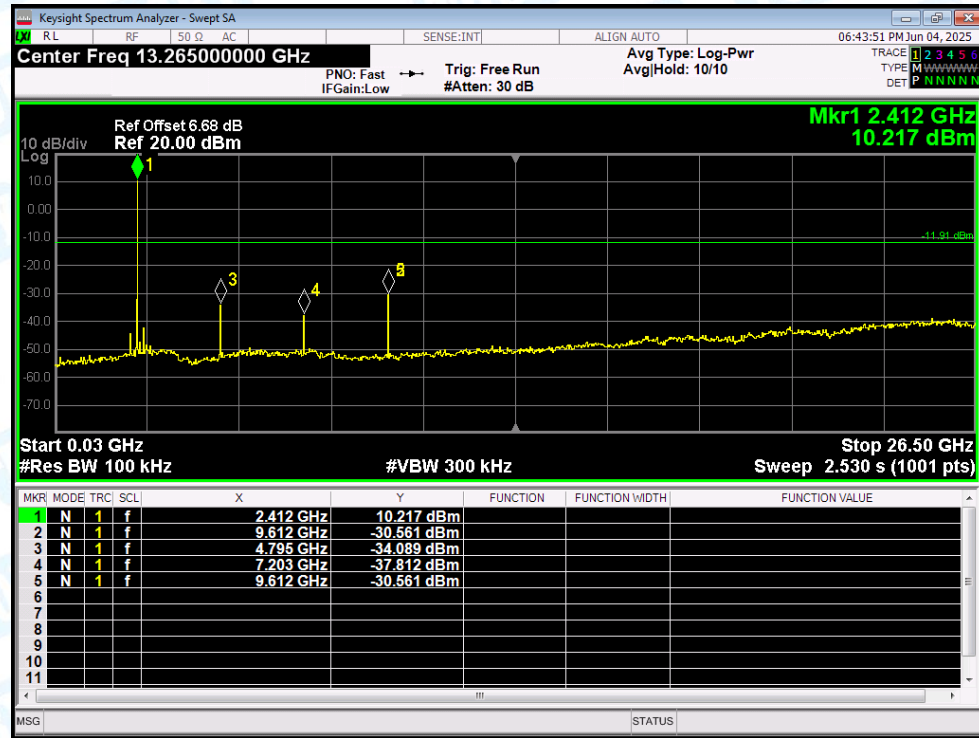

Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Ref

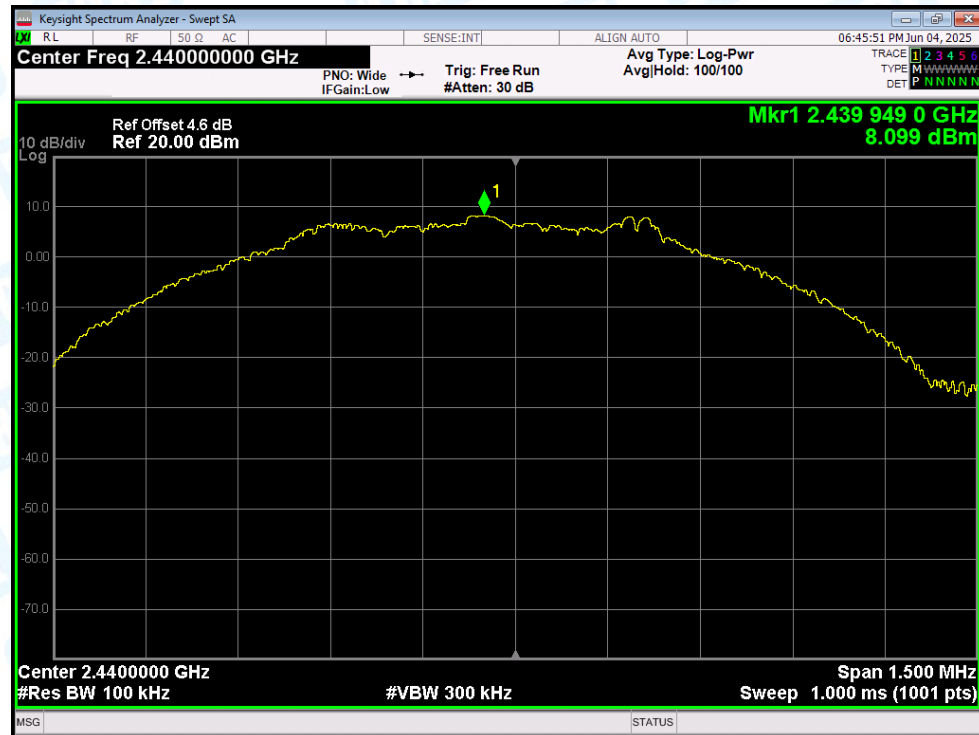


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Emission

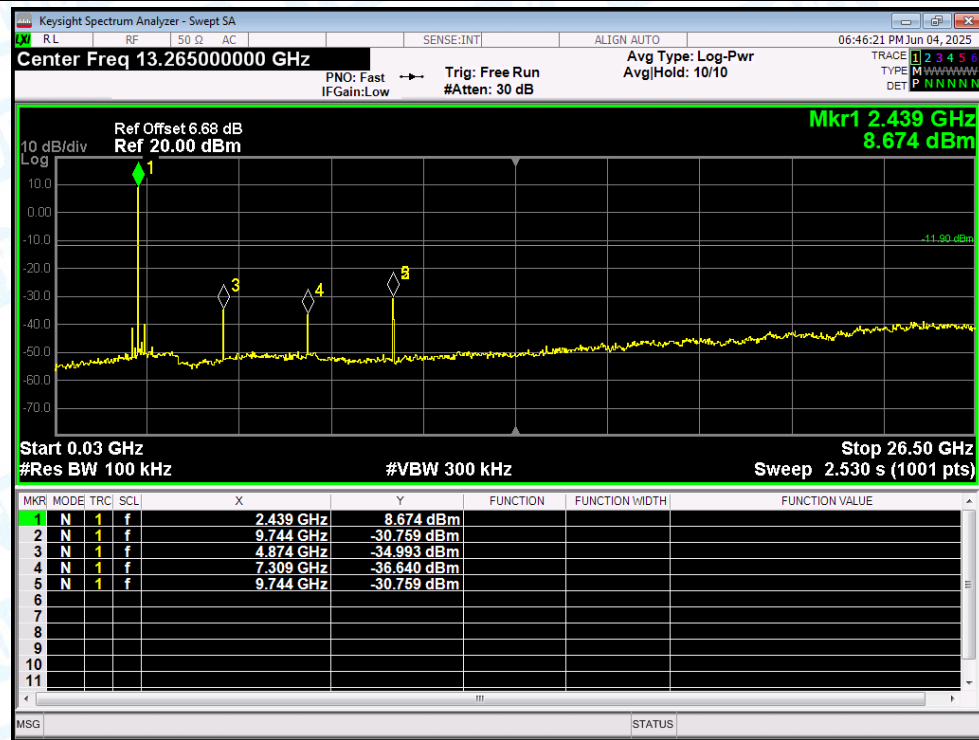

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

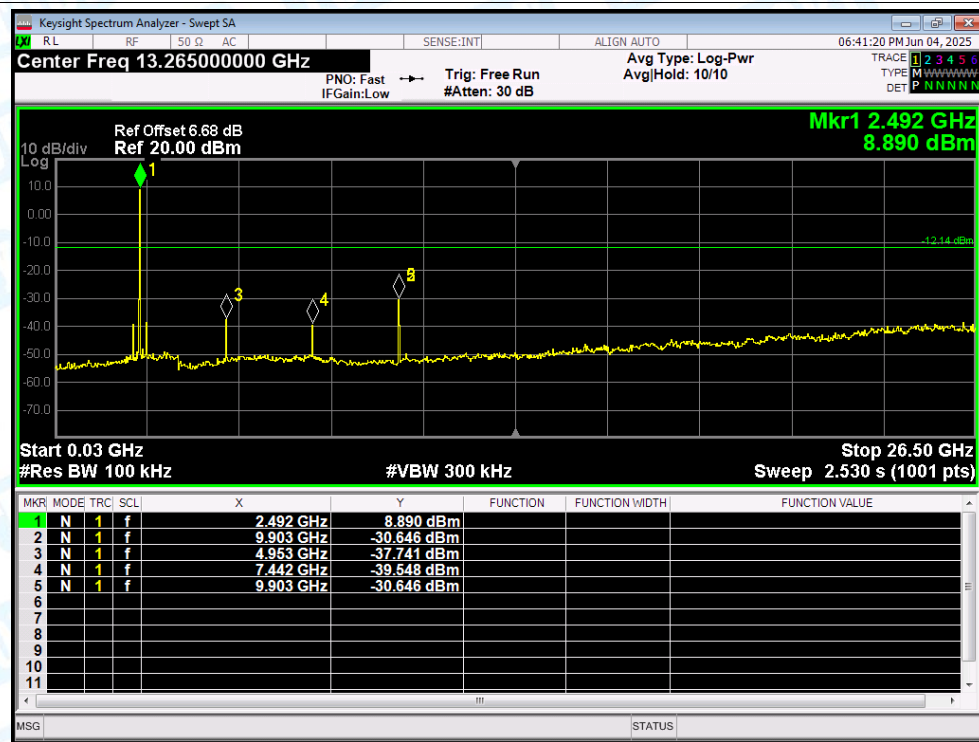

-----END OF REPORT-----