

TEST REPORT

Report No.: BCTC2203084212-5E

Applicant: Emdoor Information Co.,Ltd.

Product Name: Rugged Tablet

Model/Type
reference: EM-I86H

Tested Date: 2022-03-31 to 2022-04-11

Issued Date: 2022-04-11



Shenzhen BCTC Testing Co., Ltd.



FCC ID:2A37Q-EM-I86H

Product Name: Rugged Tablet

Trademark: Emdoor

Model/Type reference: EM-I86H
EM-I86HH, EM-I86, W86H, W86, W86HH

Prepared For: Emdoor Information Co., Ltd.

Address: 3/F, Bldg 5th, Wonderful Life Wisdom Valley TechnoPark, No.83 Dabao Rd, Xin'an Sub-district, Bao'an District, Shenzhen 518101, Guangdong Province, China

Manufacturer: Emdoor Information Co., Ltd.

Address: 3/F, Bldg 5th, Wonderful Life Wisdom Valley TechnoPark, No.83 Dabao Rd, Xin'an Sub-district, Bao'an District, Shenzhen 518101, Guangdong Province, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2022-03-31

Sample tested Date: 2022-03-31 to 2022-04-11

Issue Date: 2022-04-11


Report No.: BCTC2203084212-5E

Test Standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L
ANSI/ TIA/ EIA-603-D-2010
FCC KDB 971168 D01 Power Meas. License Digital Systems v02v02

Test Results: PASS

Remark: This is WCDMA radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	9
5. Test Facility And Test Instrument Used	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. RF Output Power	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	14
7. Peak-to-average Ratio(PAR) of Transmitter	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	18
7.3 Test procedure	18
7.4 Test Result	18
8. Emission Bandwidth	24
8.1 Block Diagram Of Test Setup	24
8.2 Limit	24
8.3 Test procedure	24
8.4 Test Result	24
9. Out of Band Emissions at Antenna Terminal	30
9.1 Block Diagram Of Test Setup	30
9.2 Limit	30
9.3 Test procedure	30
9.4 Test Result	30
10. Spurious Radiated Emissions	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	40
10.3 Test procedure	40
10.4 Test Result	41
11. Frequency Stability	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	44
12. EUT Photographs	45
13. EUT Test Setup Photographs	46

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2203084212-5E	2022-04-11	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	RF Exposure	§1.1307,§2.1093	PASS
2	RF Output Power	§22.913 (a), §24.232 (c), §27.50 (d),	PASS
3	Peak-to-average Ratio(PAR) of Transmitter	§24.232(d),§22.913, §27.50(d),	PASS
4	Emission Bandwidth	§22.917 (b), §24.238(b), §27.53(g)	PASS
5	Spurious Emissions at Antenna Terminal	§22.917 (a), §24.238 (a), §27.53(g),§27.53(h)	PASS
6	Spurious Radiation Emissions	§22.917 (a), §24.238 (a), §27.53(g),§27.53(h)	PASS
7	Out of Band Emissions	§22.917 (a), §24.238 (a), §27.53(g),§27.53(h)	PASS
8	Frequency Stability	§22.355, §24.235, §27.54	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type reference:	EM-I86H EM-I86HH,EM-I86,W86H,W86,W86HH
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	WCDMA Band II: TX: 1852.40~1907.60MHz; Rx: 1932.60~1987.40MHz; WCDMA Band IV: TX: 1712.40~1752.60MHz; RX: 2112.60 – 2452.40MHz WCDMA Band V: TX: 826.40~846.60MHz; RX: 871.40~ 891.60MHz;
GPRS Class:	Class 12
MaxRF Output Power:	WCDMA Band II: 22.34dBm WCDMA Band IV:22.64dBm WCDMA Band V: 22.58dBm
Type of Modulation:	WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Type of Emission:	WCDMA Band II: 4M15F9W WCDMA Band IV: 4M16F9W WCDMA Band V: 4M19F9W
Antenna installation:	Internal antenna
Antenna Gain:	WCDMA Band II:1.5 dBi WCDMA Band IV:1.5 dBi WCDMA Band V: 0.5 dBi
Connecting I/O Port(s)	Please refer to the User's Manual
Ratings:	AC 120V/60Hz/DC 3.7V
Adapter:	Model:AW018WR-0500300UH Inout:100-240V~50/60 0.5A Output:DC 5V 3A

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission




4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Rugged Tablet	Emdoor	EM-I86H	EM-I86HH	EUT
E-2	Adapter	N/A	AW018WR-0500300UH	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.3M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

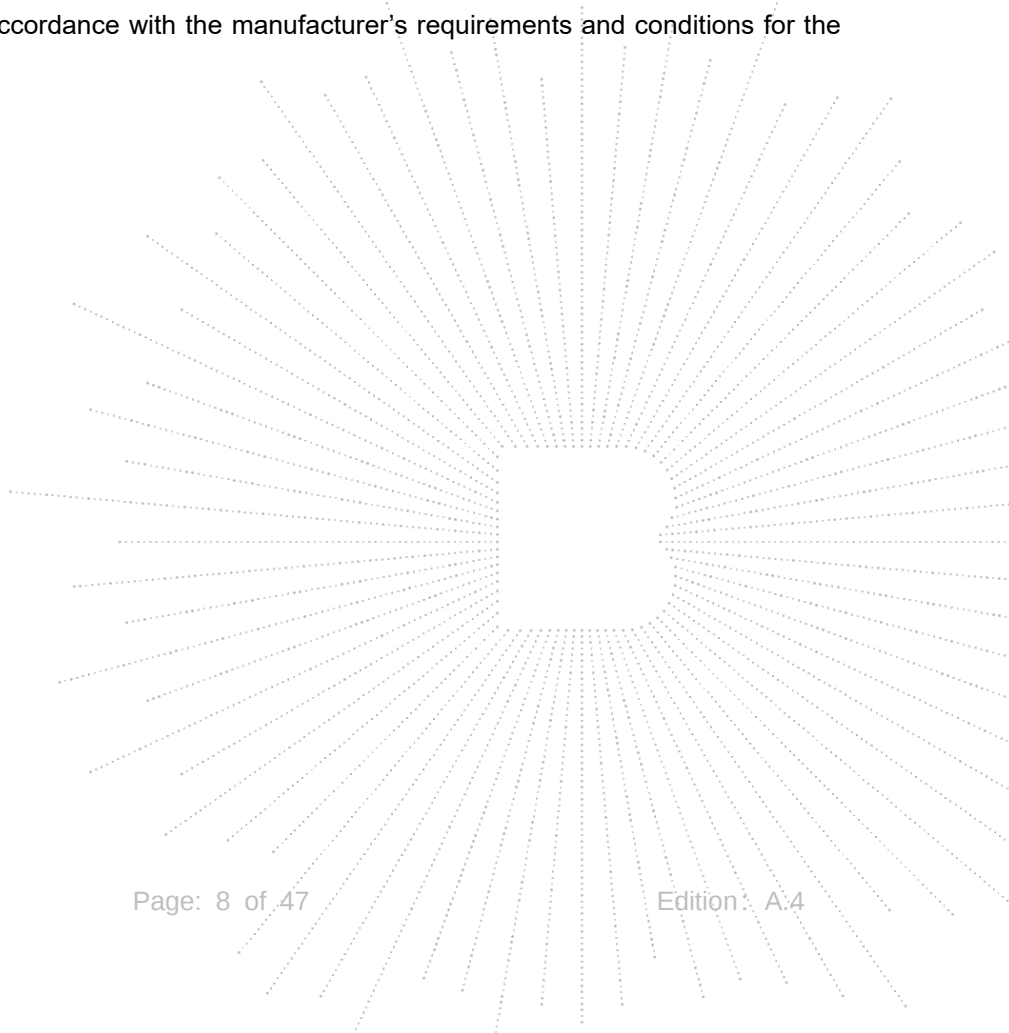

4.5 Test Mode

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
WCDMA Band II	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
WCDMA Band IV	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1740 MHz	1450
		1752.6 MHz	1513
WCDMA Band V	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.4 MHz	4182
		846.6 MHz	4233
Note: the transmitter has been tested on the communications mode of WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5G Hz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022

Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	Jun. 01, 2021	May 31, 2022
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenn (18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	Jun. 15, 2021	Jun. 14, 2022
Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5G Hz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. RF Output Power


6.1 Block Diagram Of Test Setup

Conducted output power test method:

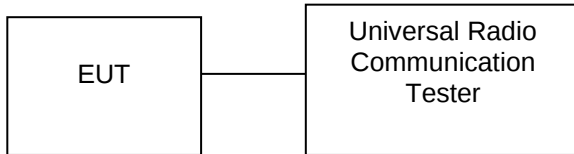


Radiated power test method:


(A) Radiated Emission Test-Up Frequency Below 30MHz

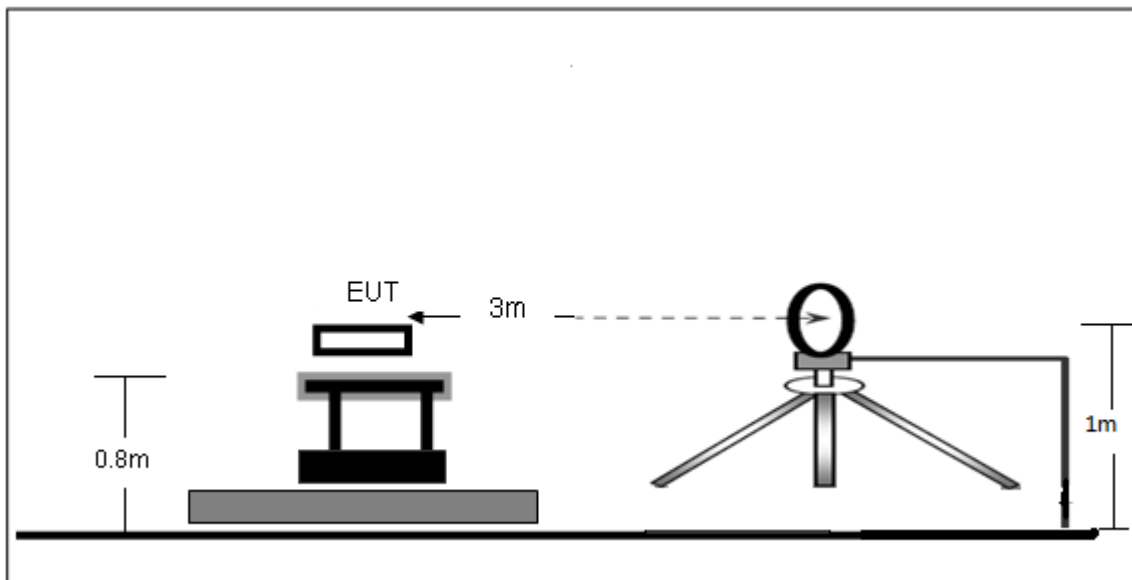

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

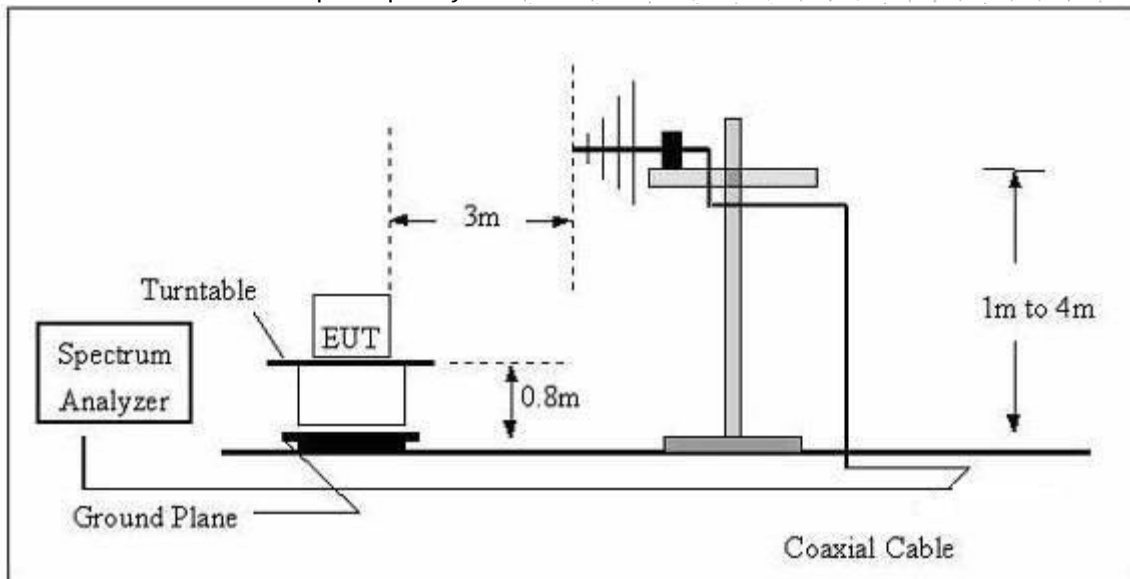

(C) Radiated Emission Test-Up Frequency Above 1GHz

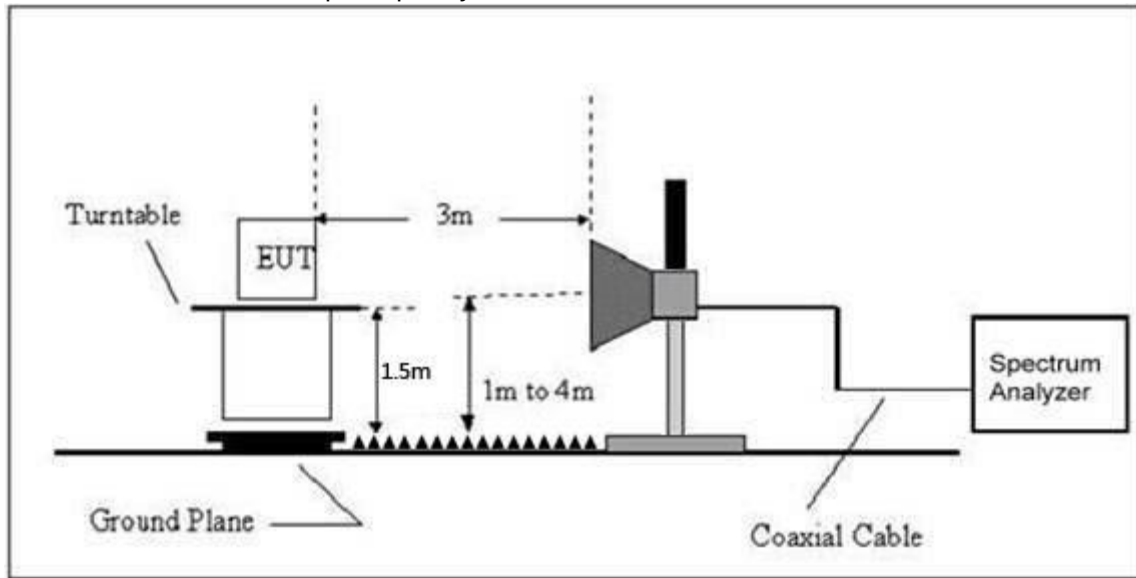

6.2 Limit

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

6.3 Test procedure

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.4 Test Result

EIRP For WCDMA Mode Band II

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel								
1852.4	H	1.5	0	41.13	-22.25	18.88	33.00	PASS
1852.4	V	1.5	0	40.55	-22.25	18.30	33.00	PASS
Middle Channel								
1880	H	1.5	0	41.40	-22.16	19.24	33.00	PASS
1880	V	1.5	0	40.39	-22.16	18.23	33.00	PASS
High Channel								
1907.6	H	1.5	0	41.59	-22.06	19.53	33.00	PASS
1907.6	V	1.5	0	40.38	-22.06	18.32	33.00	PASS

EIRP For HSDPA Mode Band II

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel								
1852.4	H	1.5	0	41.46	-22.25	19.21	33.00	PASS
1852.4	V	1.5	0	40.26	-22.25	18.01	33.00	PASS
Middle Channel								
1880	H	1.5	0	41.39	-22.16	19.23	33.00	PASS
1880	V	1.5	0	40.26	-22.16	18.10	33.00	PASS
High Channel								
1907.6	H	1.5	0	41.51	-22.06	19.45	33.00	PASS
1907.6	V	1.5	0	40.43	-22.06	18.37	33.00	PASS

EIRP For HSUPA Mode Band II

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel								
1852.4	H	1.5	0	41.76	-22.25	19.51	33.00	PASS
1852.4	V	1.5	0	40.45	-22.25	18.20	33.00	PASS
Middle Channel								
1880	H	1.5	0	40.39	-22.16	18.23	33.00	PASS
1880	V	1.5	0	40.80	-22.16	18.64	33.00	PASS
High Channel								
1907.6	H	1.5	0	41.29	-22.06	19.23	33.00	PASS
1907.6	V	1.5	0	40.47	-22.06	18.41	33.00	PASS

EIRP For WCDMA Mode Band IV

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 27L Limits (dBm)	Result
Low Channel								
1712.4	H	1.5	0	41.85	-22.71	19.14	33.00	PASS
1712.4	V	1.5	0	40.70	-22.71	17.99	33.00	PASS
Middle Channel								
1740	H	1.5	0	41.80	-22.67	19.13	33.00	PASS
1740	V	1.5	0	40.02	-22.67	17.35	33.00	PASS
High Channel								
1752.6	H	1.5	0	40.56	-22.60	17.96	33.00	PASS
1752.6	V	1.5	0	40.63	-22.60	18.03	33.00	PASS

EIRP For HSDPA Mode Band IV

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 27L Limits (dBm)	Result
Low Channel								
1712.4	H	1.5	0	41.43	-22.71	18.72	33.00	PASS
1712.4	V	1.5	0	40.04	-22.71	17.33	33.00	PASS
Middle Channel								
1740	H	1.5	0	40.89	-22.67	18.22	33.00	PASS
1740	V	1.5	0	40.91	-22.67	18.24	33.00	PASS
High Channel								
1752.6	H	1.5	0	41.66	-22.60	19.06	33.00	PASS
1752.6	V	1.5	0	40.47	-22.60	17.87	33.00	PASS

EIRP For HSUPA Mode Band IV

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 27L Limits (dBm)	Result
Low Channel								
1712.4	H	1.5	0	41.88	-22.71	19.17	33.00	PASS
1712.4	V	1.5	0	39.93	-22.71	17.22	33.00	PASS
Middle Channel								
1740	H	1.5	0	40.94	-22.67	18.27	33.00	PASS
1740	V	1.5	0	40.02	-22.67	17.35	33.00	PASS
High Channel								
1752.6	H	1.5	0	40.95	-22.60	18.35	33.00	PASS
1752.6	V	1.5	0	40.69	-22.60	18.09	33.00	PASS

ERP For WCDMA Mode Band V

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel								
826.4	H	1.5	0	18.96	-1.33	17.63	38.45	PASS
826.4	V	1.5	0	18.79	-1.33	17.46	38.45	PASS
Middle Channel								
836.4	H	1.5	0	18.39	-1.10	17.29	38.45	PASS
836.4	V	1.5	0	18.87	-1.10	17.77	38.45	PASS
High Channel								
846.6	H	1.5	0	18.50	-0.87	17.63	38.45	PASS
846.6	V	1.5	0	18.08	-0.87	17.21	38.45	PASS

ERP For HSDPA Mode Band V

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel								
826.4	H	1.5	0	19.62	-1.33	18.29	38.45	PASS
826.4	V	1.5	0	18.15	-1.33	16.82	38.45	PASS
Middle Channel								
836.4	H	1.5	0	18.05	-1.10	16.95	38.45	PASS
836.4	V	1.5	0	18.85	-1.10	17.75	38.45	PASS
High Channel								
846.6	H	1.5	0	19.51	-0.87	18.64	38.45	PASS
846.6	V	1.5	0	18.72	-0.87	17.85	38.45	PASS

ERP For HSUPA Mode Band V

Frequency (MHz)	Polar (H/V)	Height (Meter)	Table (Degree)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel								
826.4	H	1.5	0	19.38	-1.33	18.05	38.45	PASS
826.4	V	1.5	0	18.04	-1.33	16.71	38.45	PASS
Middle Channel								
836.4	H	1.5	0	19.84	-1.10	18.74	38.45	PASS
836.4	V	1.5	0	18.42	-1.10	17.32	38.45	PASS
High Channel								
846.6	H	1.5	0	19.46	-0.87	18.59	38.45	PASS
846.6	V	1.5	0	18.34	-0.87	17.47	38.45	PASS

Max. Conducted Output Power


Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency(MHz)	1852.4	1880.0	1907.6
WCDMA RMC 12.2K	22.10	22.34	22.24
HSDPA Subtest-1	21.24	21.31	21.38
HSDPA Subtest-2	21.12	21.12	21.31
HSDPA Subtest-3	20.22	20.17	20.32
HSDPA Subtest-4	19.84	20.11	20.14
HSUPA Subtest-1	20.55	20.70	20.62
HSUPA Subtest-2	21.22	21.33	21.30
HSUPA Subtest-3	20.82	20.79	20.91
HSUPA Subtest-4	21.17	21.34	21.49
HSUPA Subtest-5	20.76	20.58	20.81

Band	WCDMA Band IV		
Channel	1312	1450	1513
Frequency(MHz)	1712.4	1740	1752.6
WCDMA RMC 12.2K	22.43	22.53	22.64
HSDPA Subtest-1	21.50	21.50	21.64
HSDPA Subtest-2	21.43	21.16	21.52
HSDPA Subtest-3	20.53	20.25	20.37
HSDPA Subtest-4	20.09	20.13	20.35
HSUPA Subtest-1	20.82	20.67	20.90
HSUPA Subtest-2	21.57	21.54	21.58
HSUPA Subtest-3	21.08	21.05	21.16
HSUPA Subtest-4	21.68	21.32	21.50
HSUPA Subtest-5	20.91	20.63	20.97

Band	WCDMA Band V		
Channel	4132	4182	4233
Frequency(MHz)	826.4	836.4	846.6
WCDMA RMC 12.2K	22.33	22.49	22.58
HSDPA Subtest-1	21.35	21.43	21.66
HSDPA Subtest-2	21.37	21.34	21.31
HSDPA Subtest-3	20.26	20.47	20.45
HSDPA Subtest-4	20.45	20.21	20.21
HSUPA Subtest-1	20.61	20.75	20.92
HSUPA Subtest-2	21.49	21.48	21.53
HSUPA Subtest-3	20.91	20.92	20.95
HSUPA Subtest-4	21.36	21.54	21.38
HSUPA Subtest-5	20.96	20.65	20.70

7. Peak-to-average Ratio(PAR) of Transmitter

7.1 Block Diagram Of Test Setup

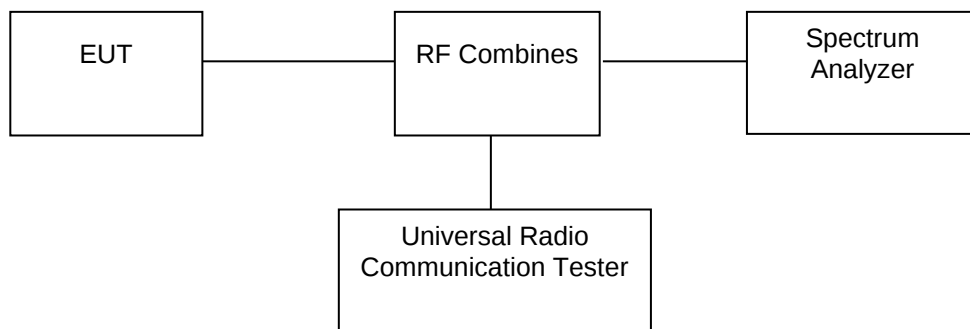

7.2 Limit

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.3 Test procedure


The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

7.4 Test Result


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
WCDMA Band2	9262	1852.4	3.06	13	PASS
WCDMA Band2	9400	1880	2.98	13	PASS
WCDMA Band2	9538	1907.6	3.06	13	PASS
WCDMA Band4	1312	1712.4	3.03	13	PASS
WCDMA Band4	1450	1740	3.28	13	PASS
WCDMA Band4	1513	1752.6	3.16	13	PASS
WCDMA Band5	4132	826.4	2.87	13	PASS
WCDMA Band5	4182	836.4	2.91	13	PASS
WCDMA Band5	4233	846.6	2.84	13	PASS

Note: In WCDMA, RMC, HSDPA and HSUPA all three tests only reflect the worst mode RMC.


WCDMA Band2 Channel=9262

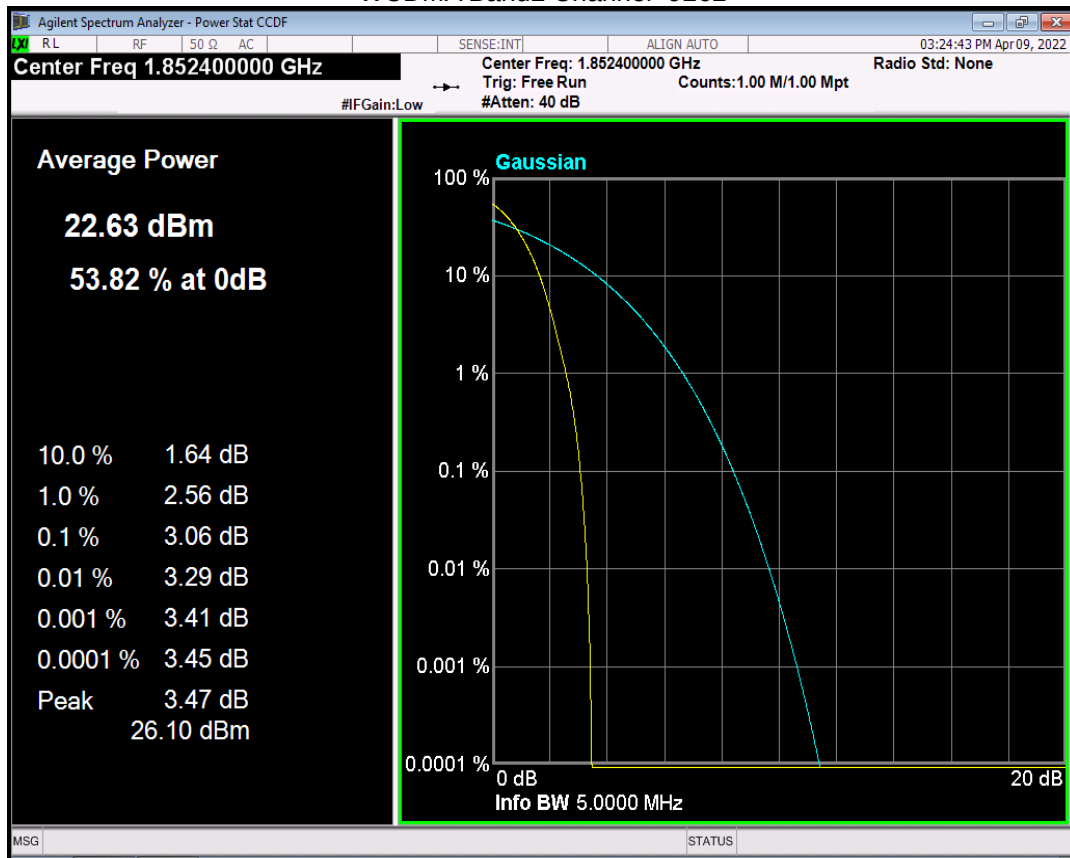


WCDMA Band2 Channel=9400

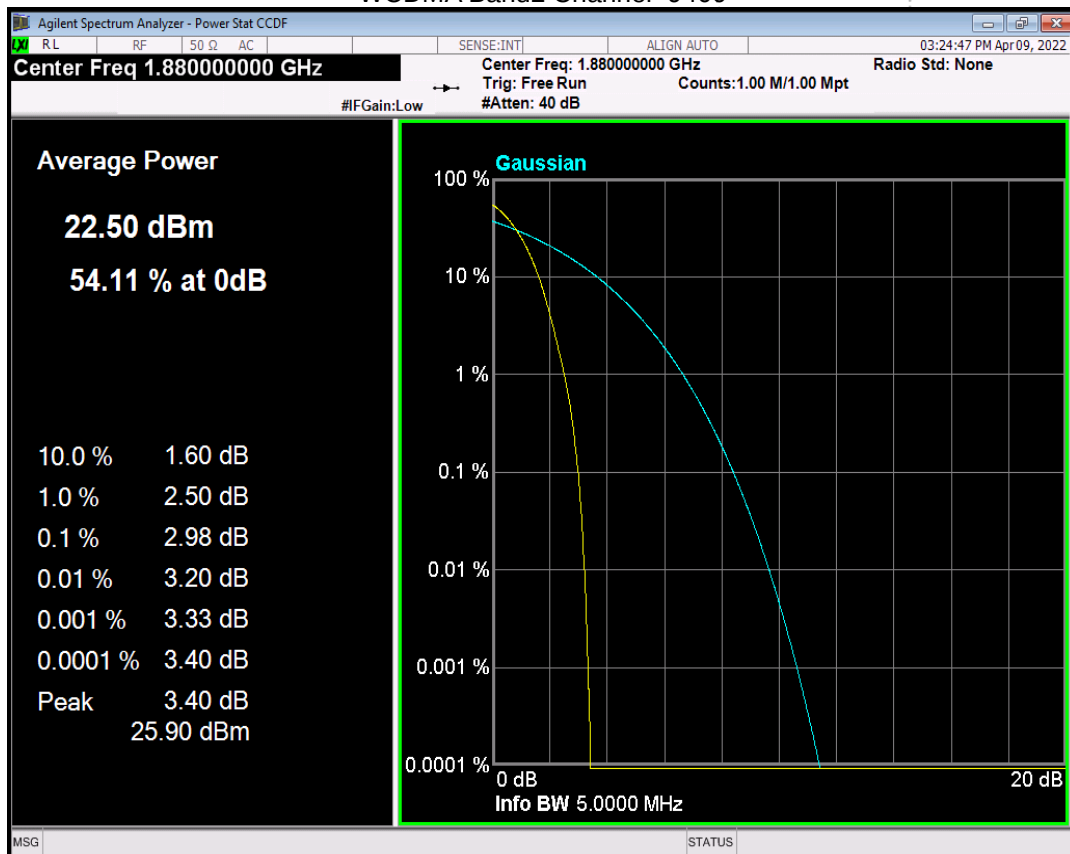


WCDMA Band2 Channel=9538

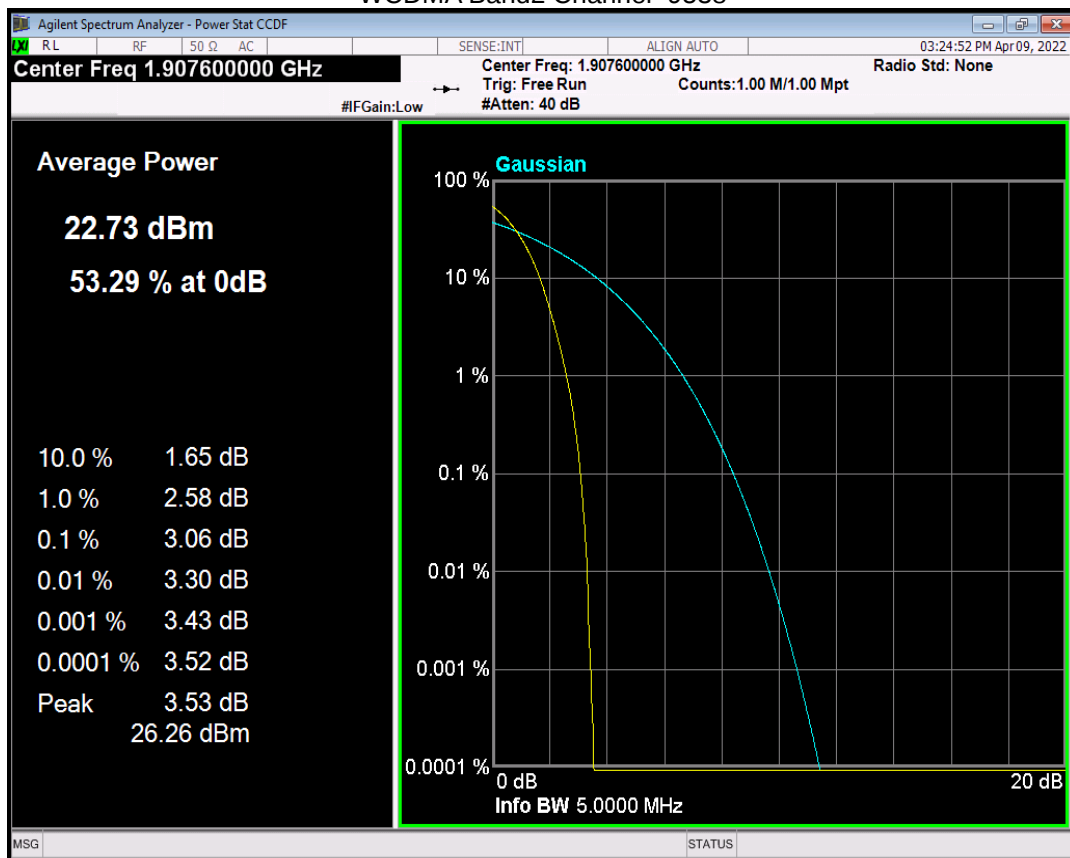


WCDMA Band4 Channel=1312

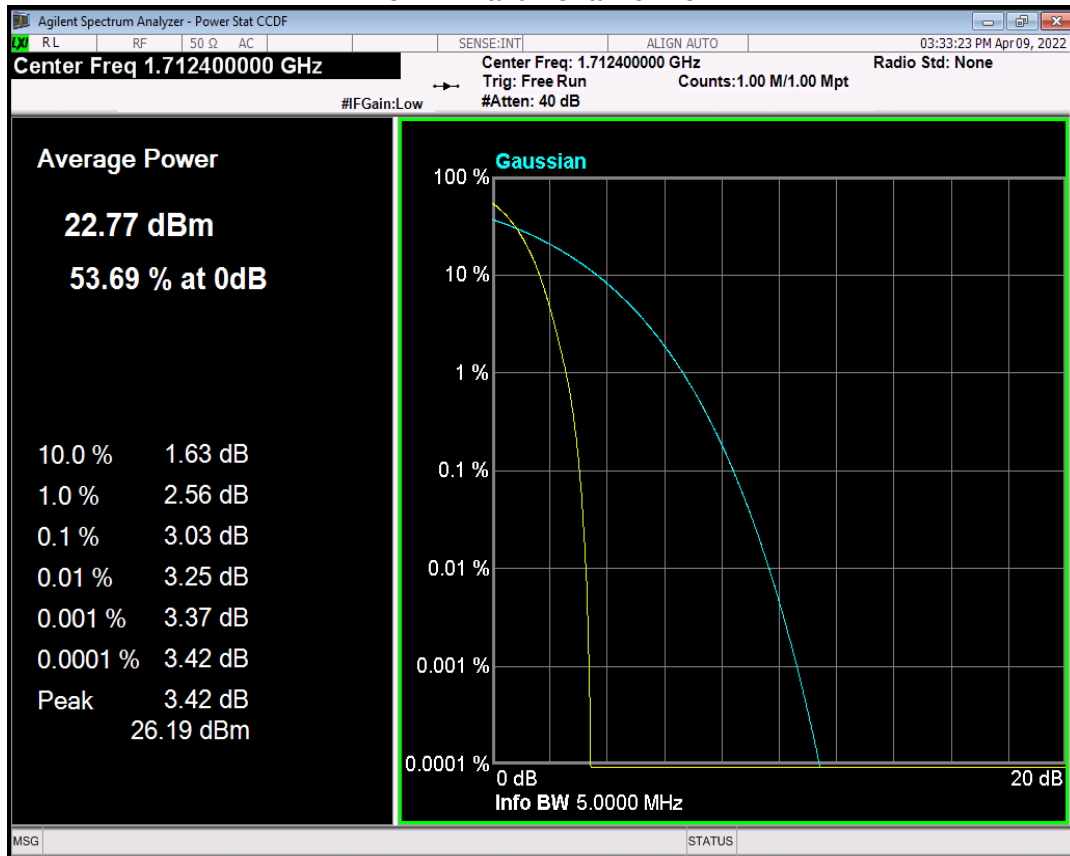


WCDMA Band4 Channel=1513

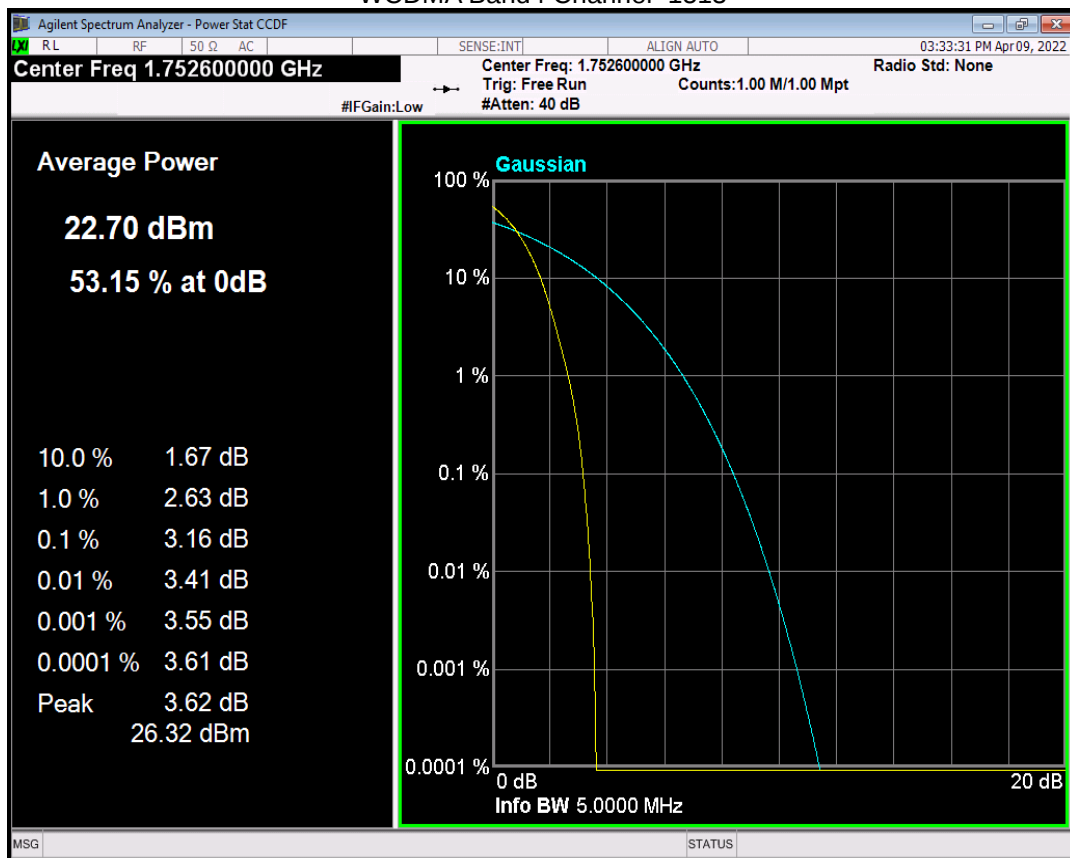


WCDMA Band4 Channel=1450

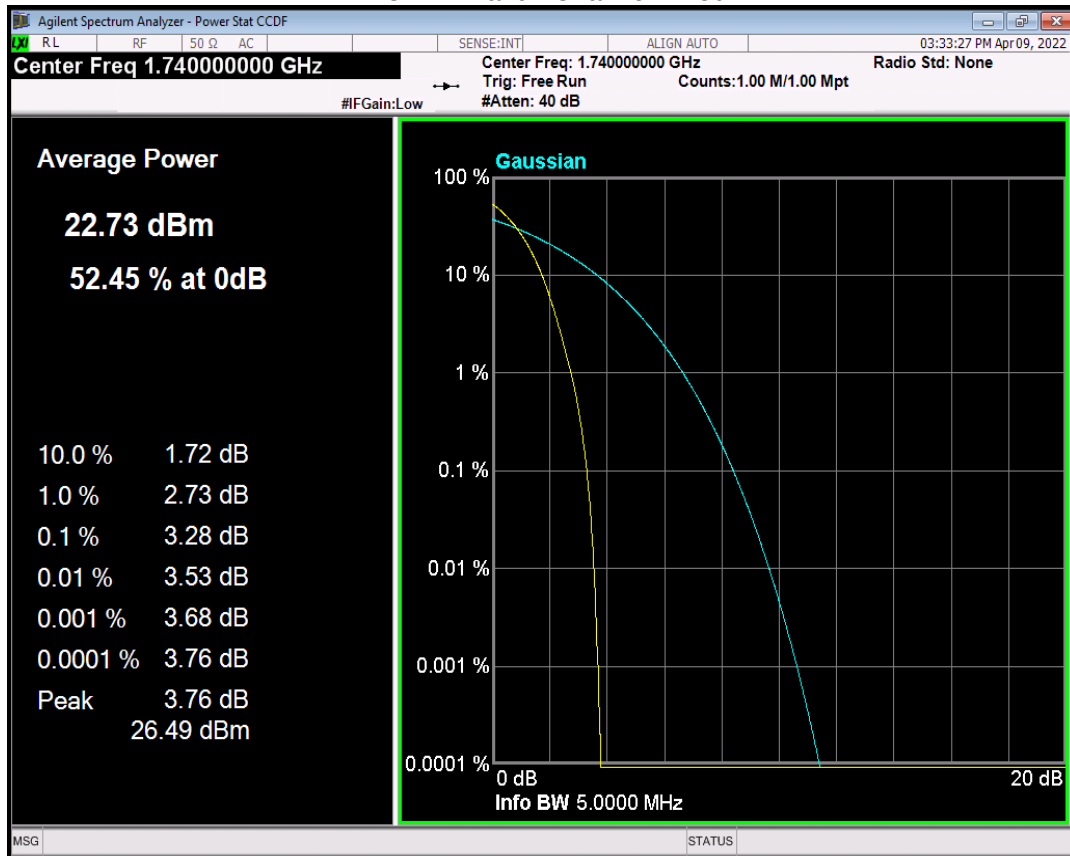



WCDMA Band5 Channel=4132

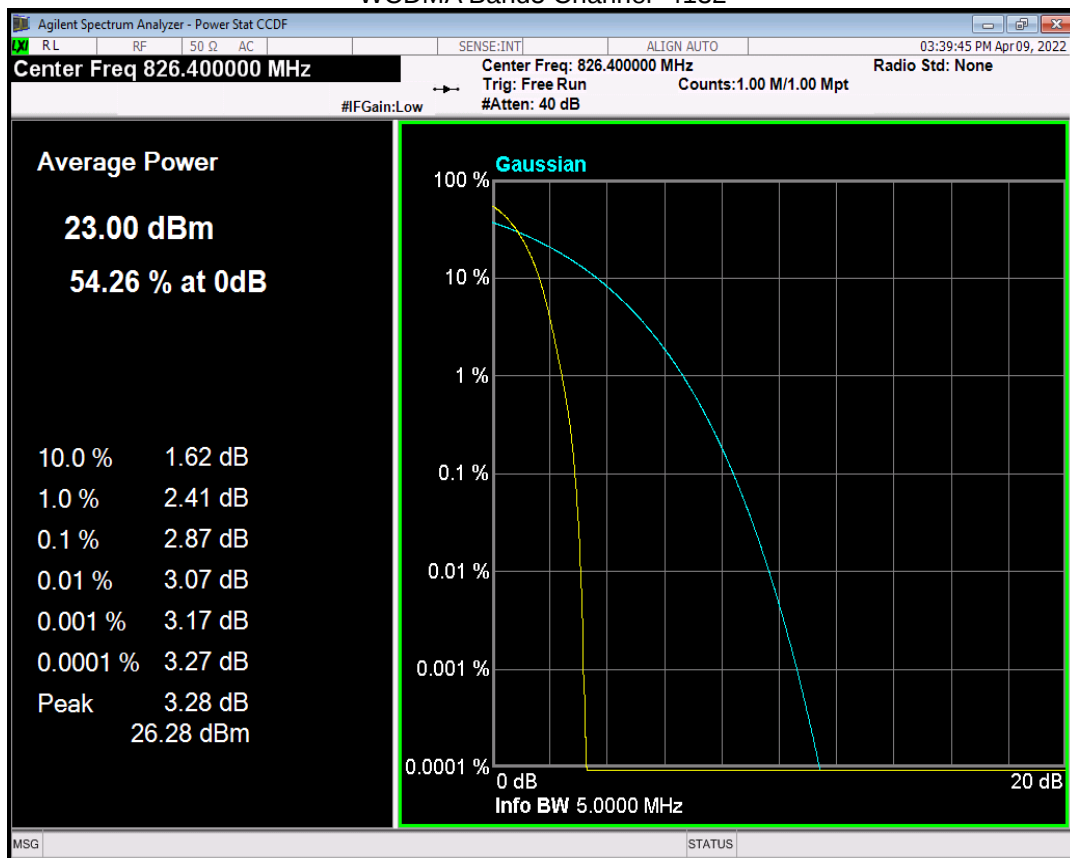

WCDMA Band5 Channel=4182

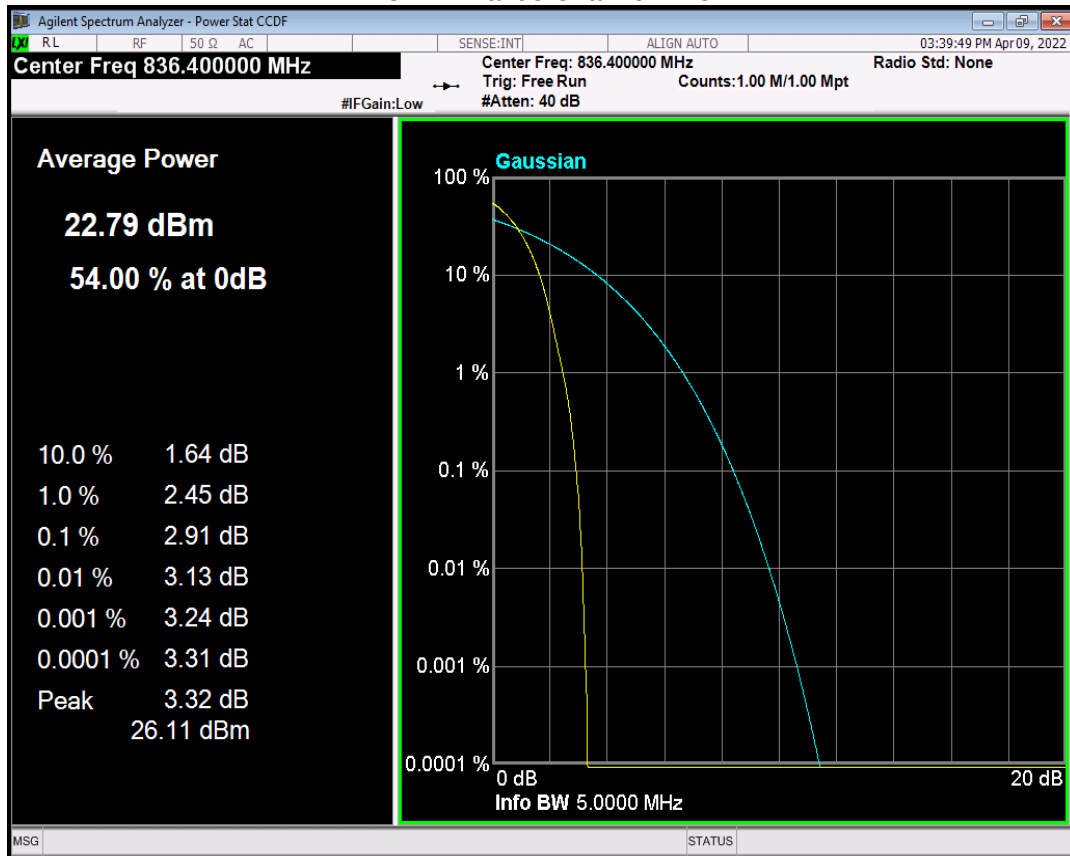


WCDMA Band5 Channel=4233

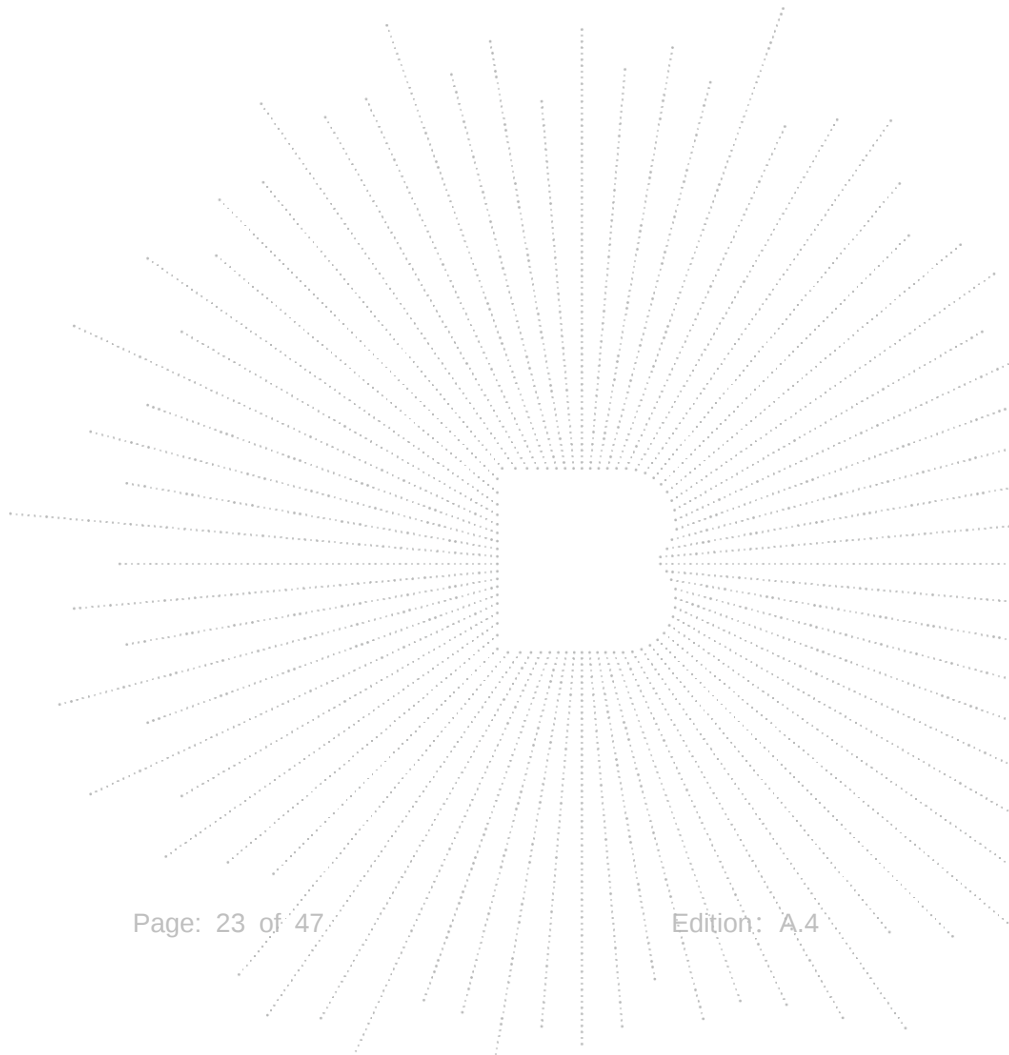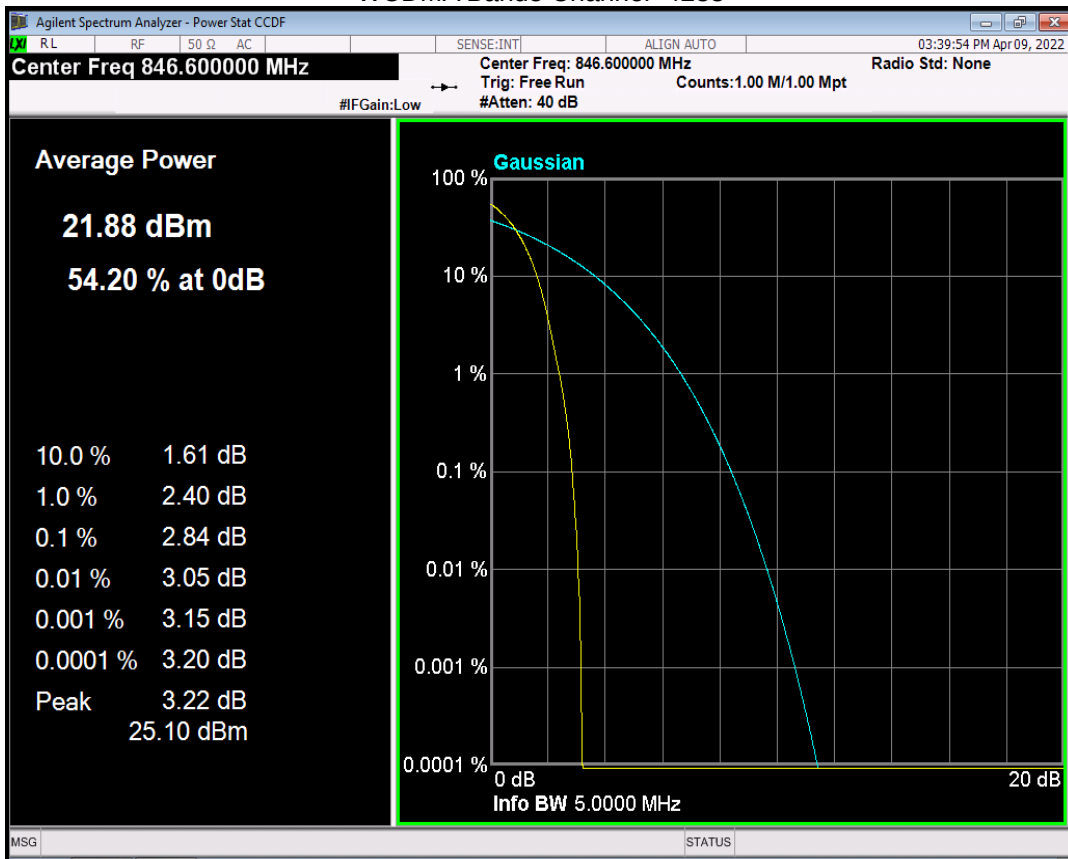

8. Emission Bandwidth

8.1 Block Diagram Of Test Setup

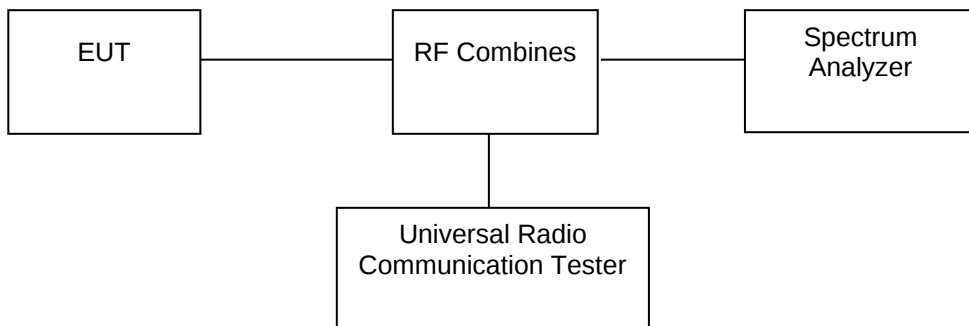

8.2 Limit

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.3 Test procedure


The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

8.4 Test Result


Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
WCDMA Band2	9262	1852.4	4146.212	4701.109	PASS
WCDMA Band2	9400	1880	4144.388	4740.277	PASS
WCDMA Band2	9538	1907.6	4136.193	4719.176	PASS
WCDMA Band4	1312	1712.4	4131.308	4706.300	PASS
WCDMA Band4	1450	1740	4153.885	4735.805	PASS
WCDMA Band4	1513	1752.6	4136.643	4703.749	PASS
WCDMA Band5	4132	826.4	4155.538	4698.647	PASS
WCDMA Band5	4182	836.4	4185.055	4731.490	PASS
WCDMA Band5	4233	846.6	4148.923	4743.140	PASS

Note: In WCDMA, RMC, HSDPA and HSUPA all three tests only reflect the worst mode RMC.


WCDMA Band2 Channel=9400

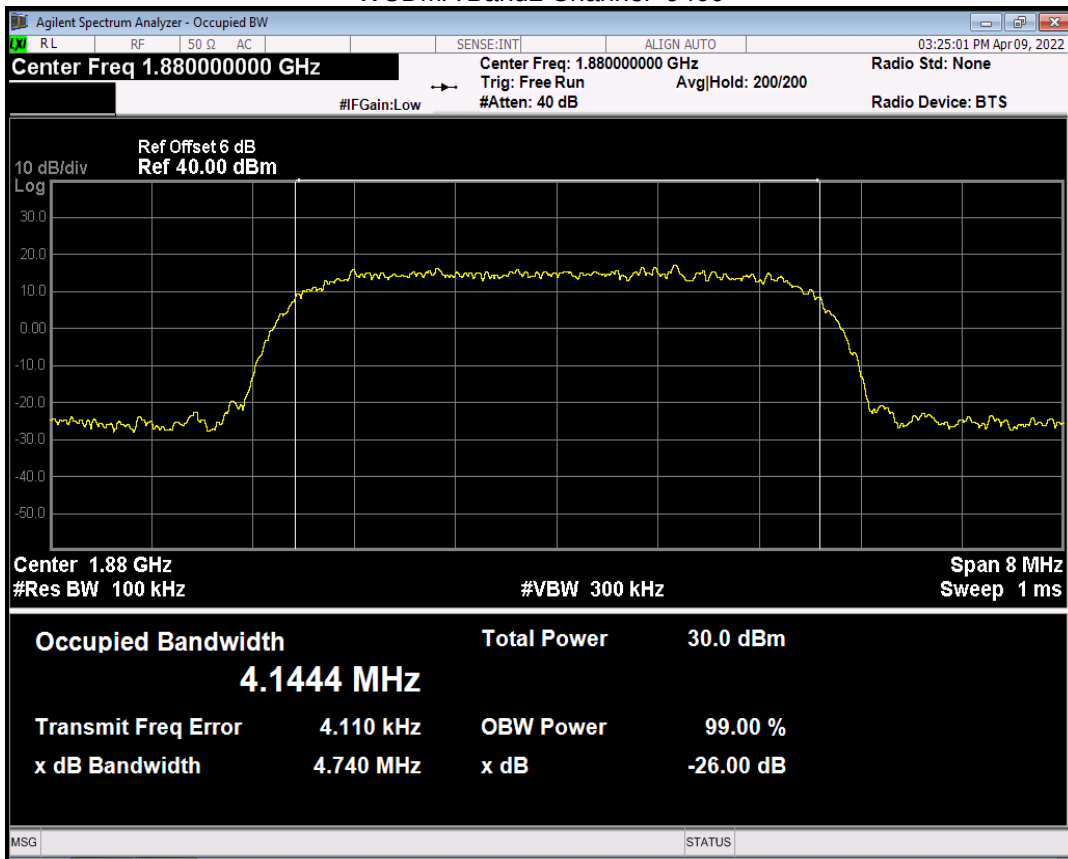


WCDMA Band2 Channel=9262

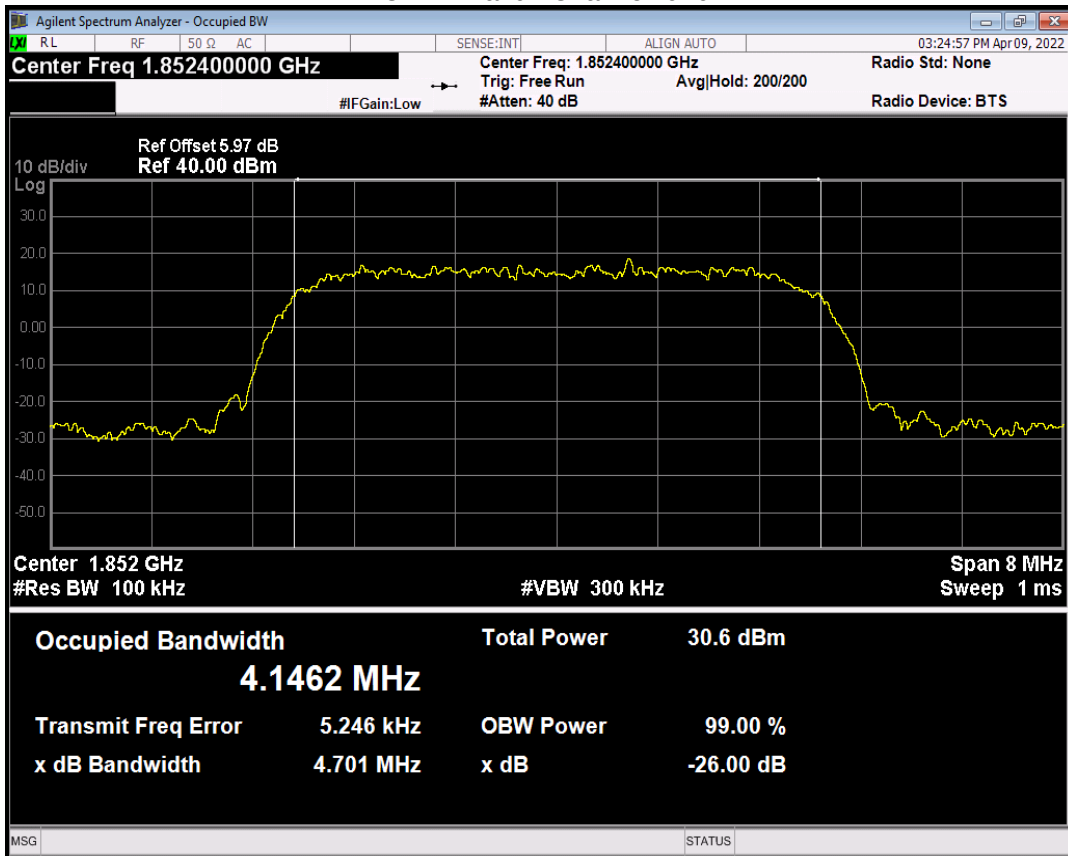


WCDMA Band2 Channel=9538

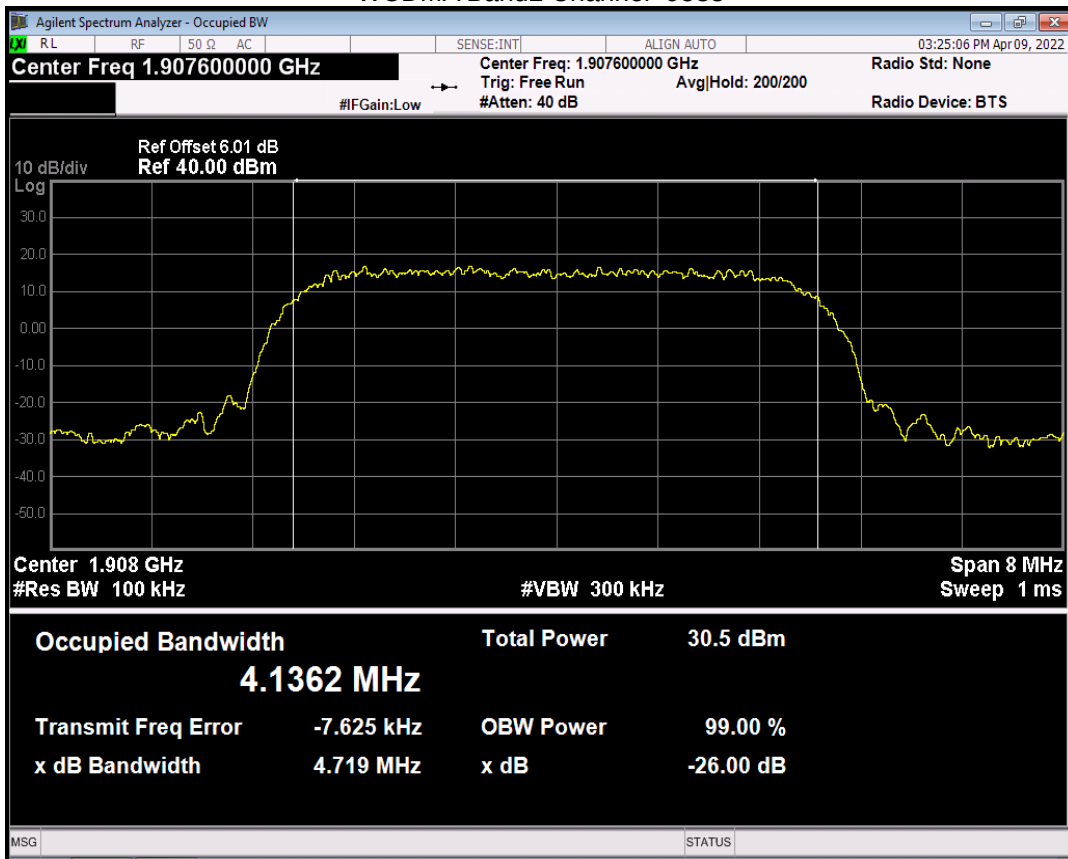


WCDMA Band4 Channel=1312

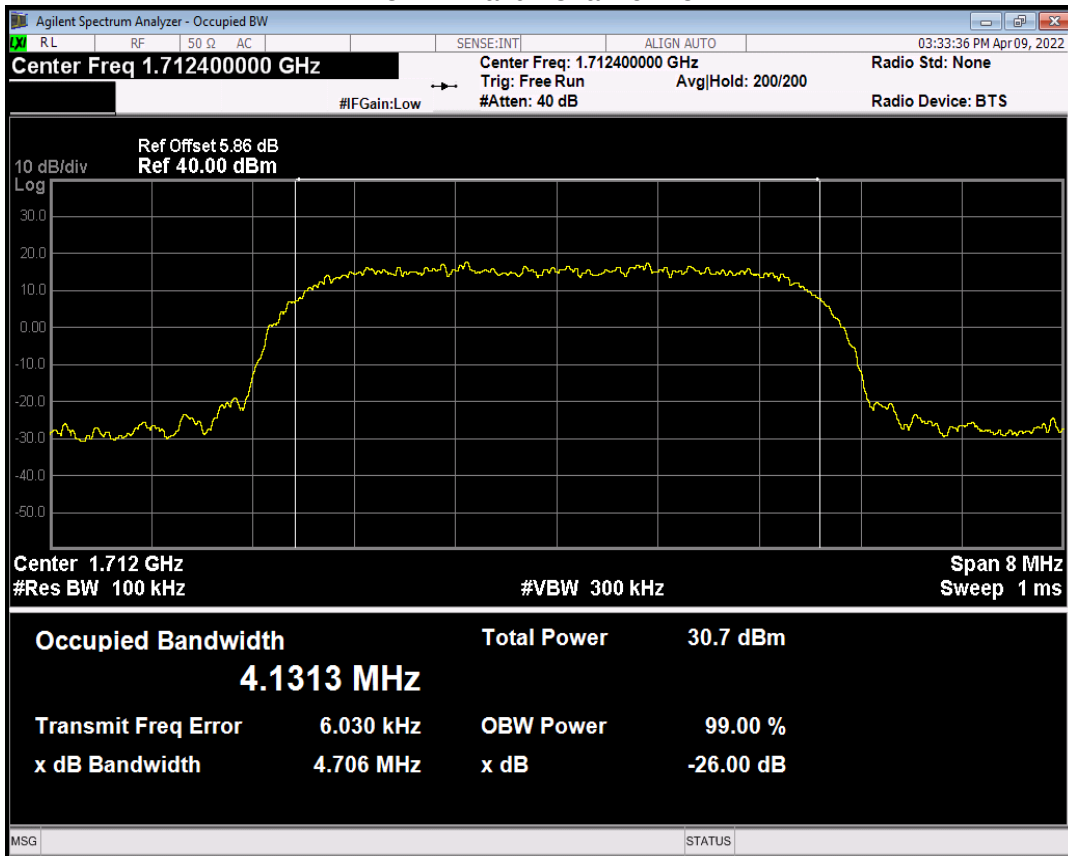


WCDMA Band4 Channel=1513

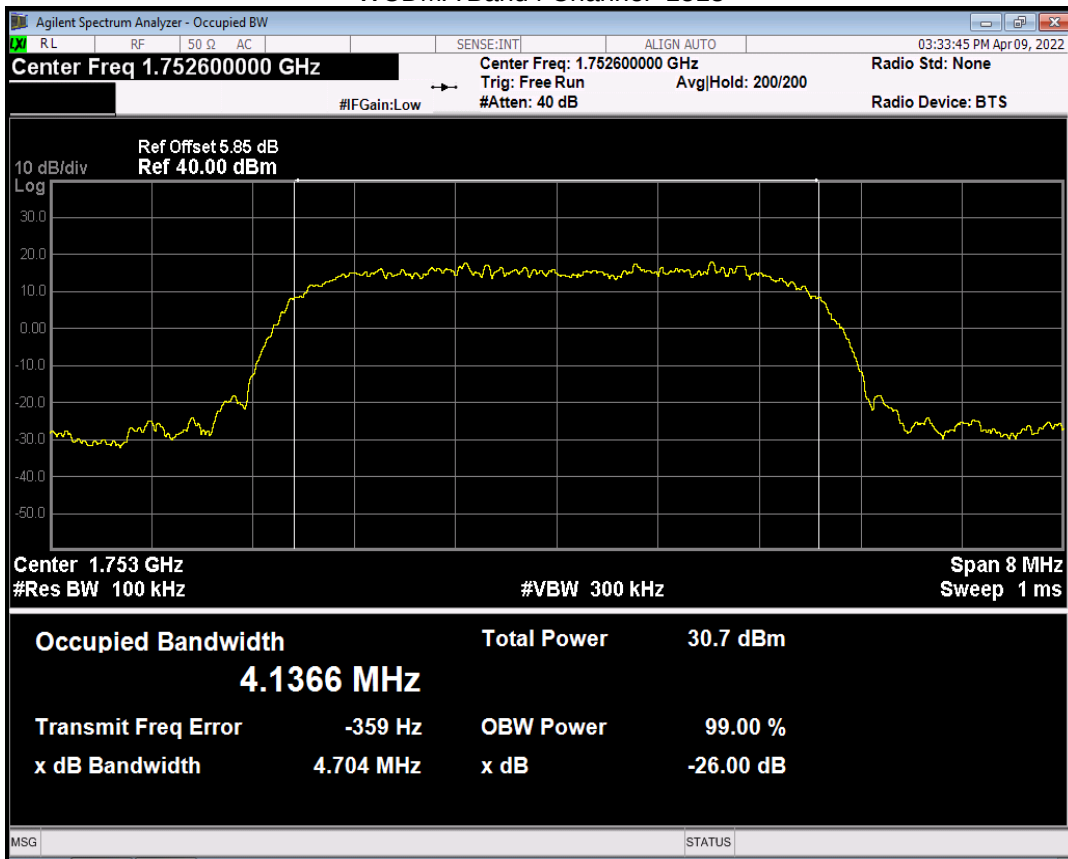


WCDMA Band4 Channel=1450

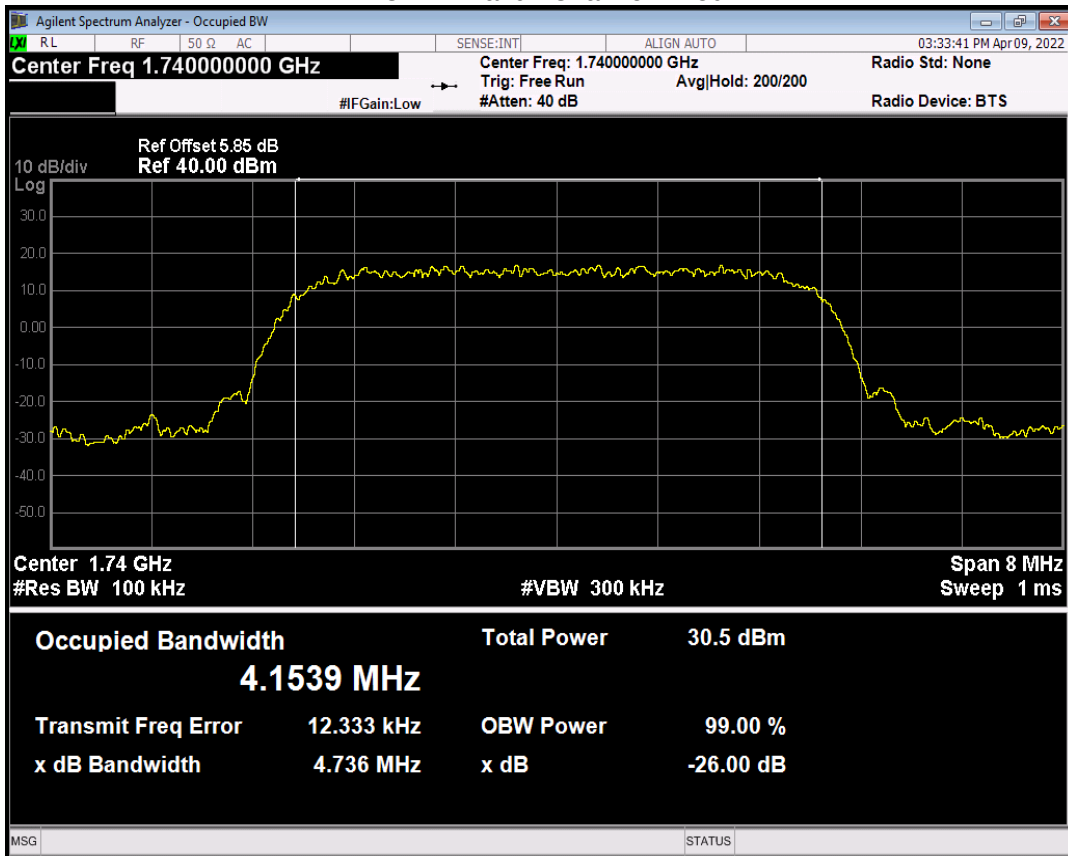



WCDMA Band5 Channel=4132

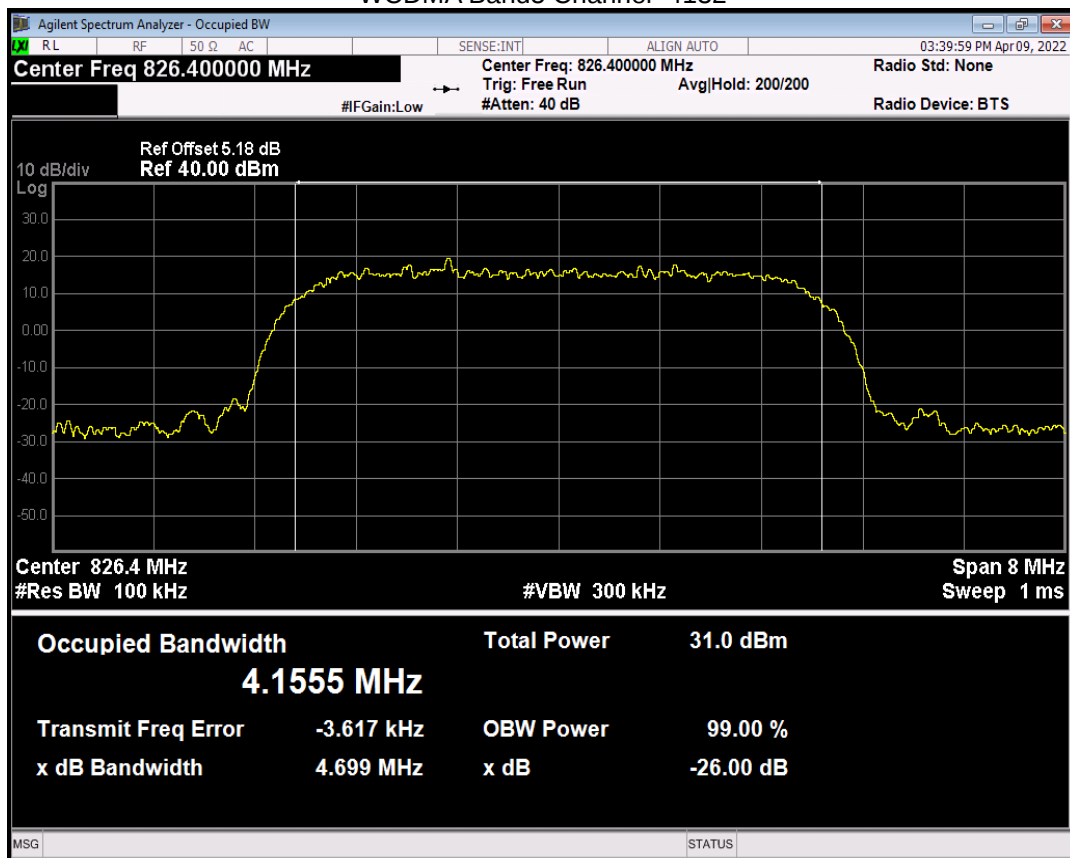

WCDMA Band5 Channel=4233

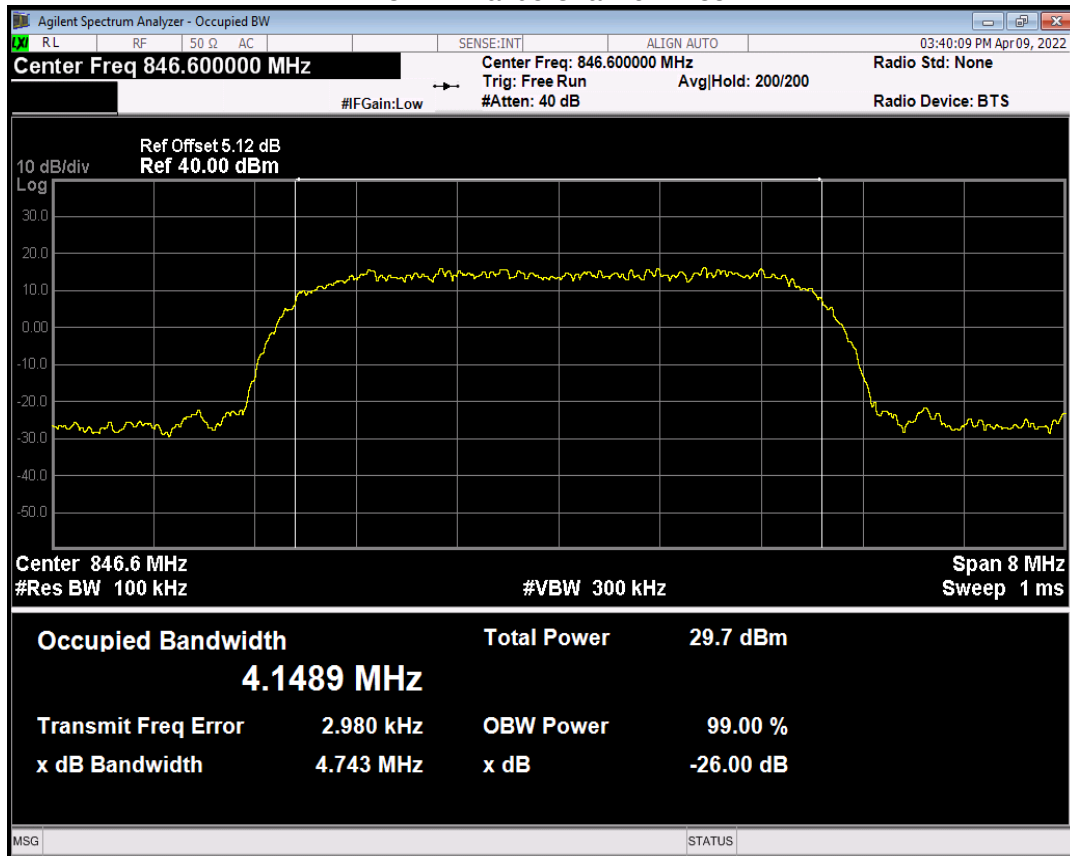


WCDMA Band5 Channel=4182

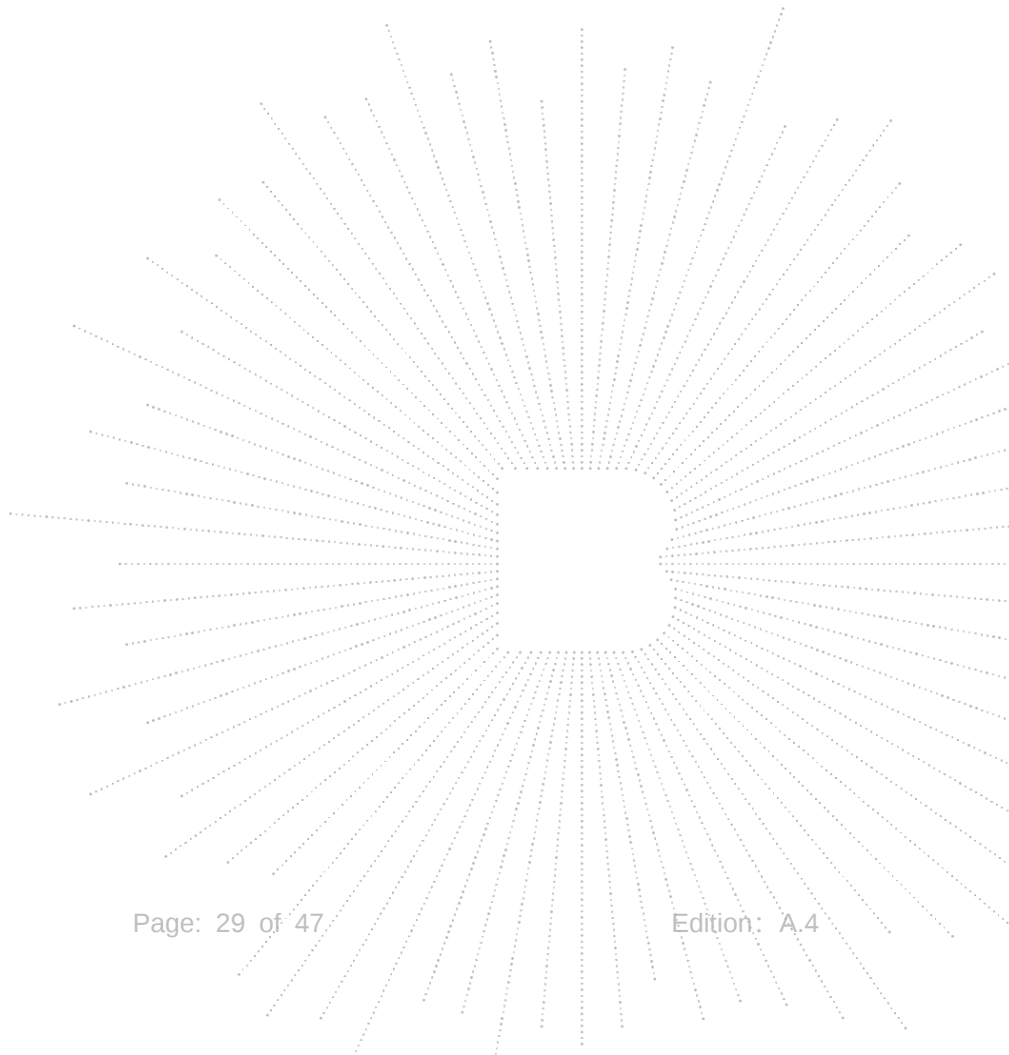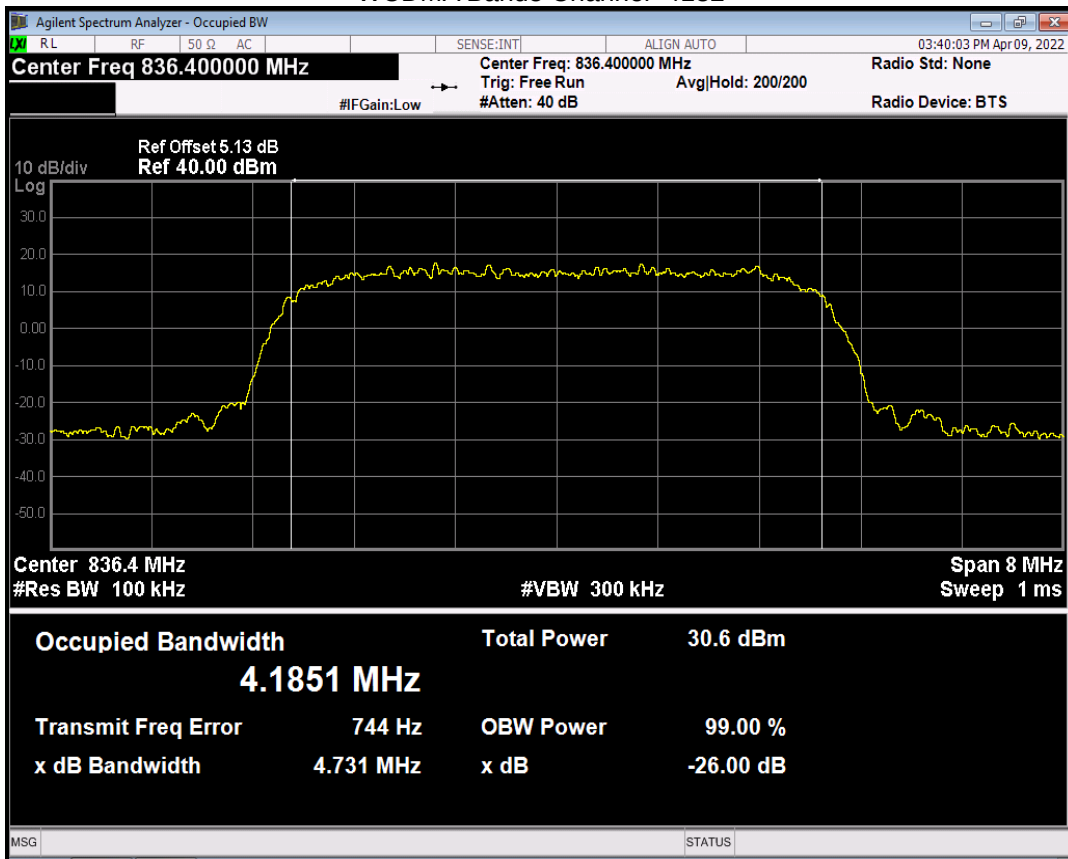

9. Out of Band Emissions at Antenna Terminal

9.1 Block Diagram Of Test Setup

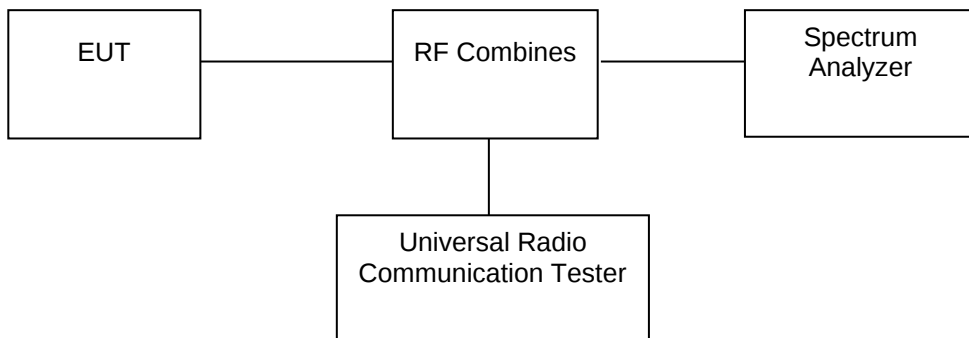

9.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

9.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic


9.4 Test Result

Note: In WCDMA, RMC, HSDPA and HSUPA all three tests only reflect the worst mode RMC.


WCDMA Band2 Channel=9538



WCDMA Band2 Channel=9262

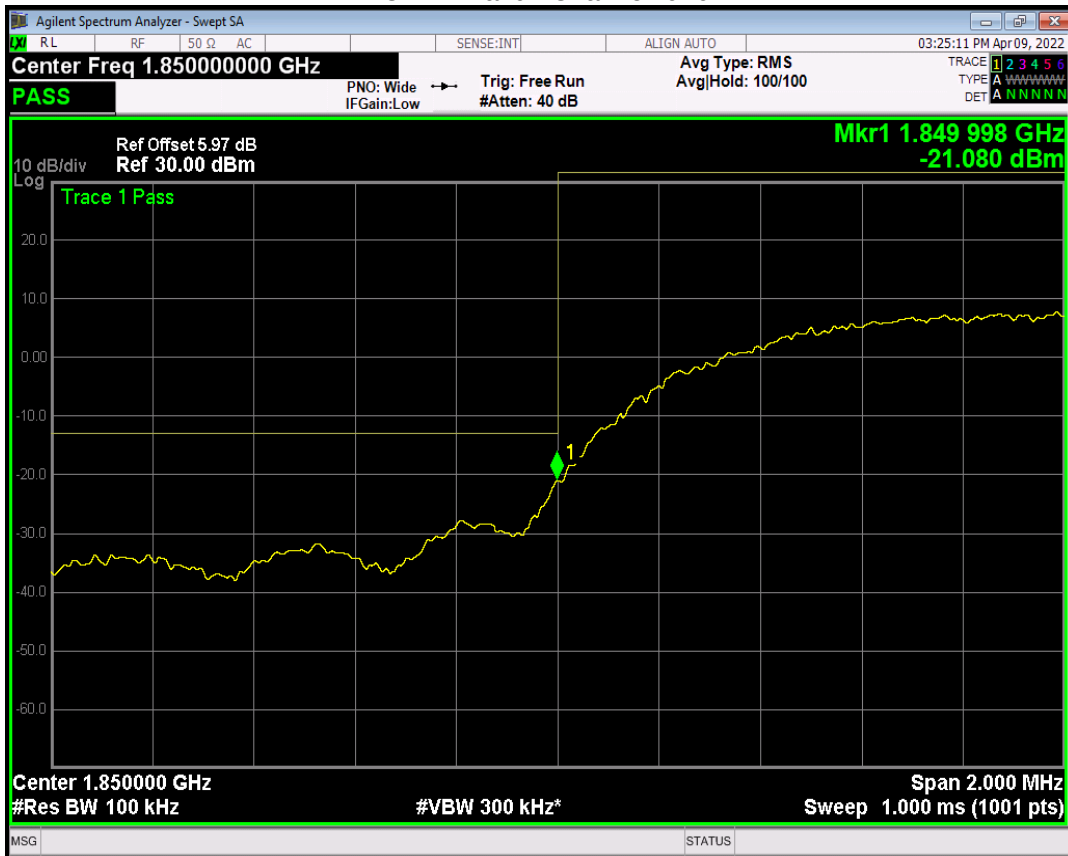


WCDMA Band4 Channel=1312

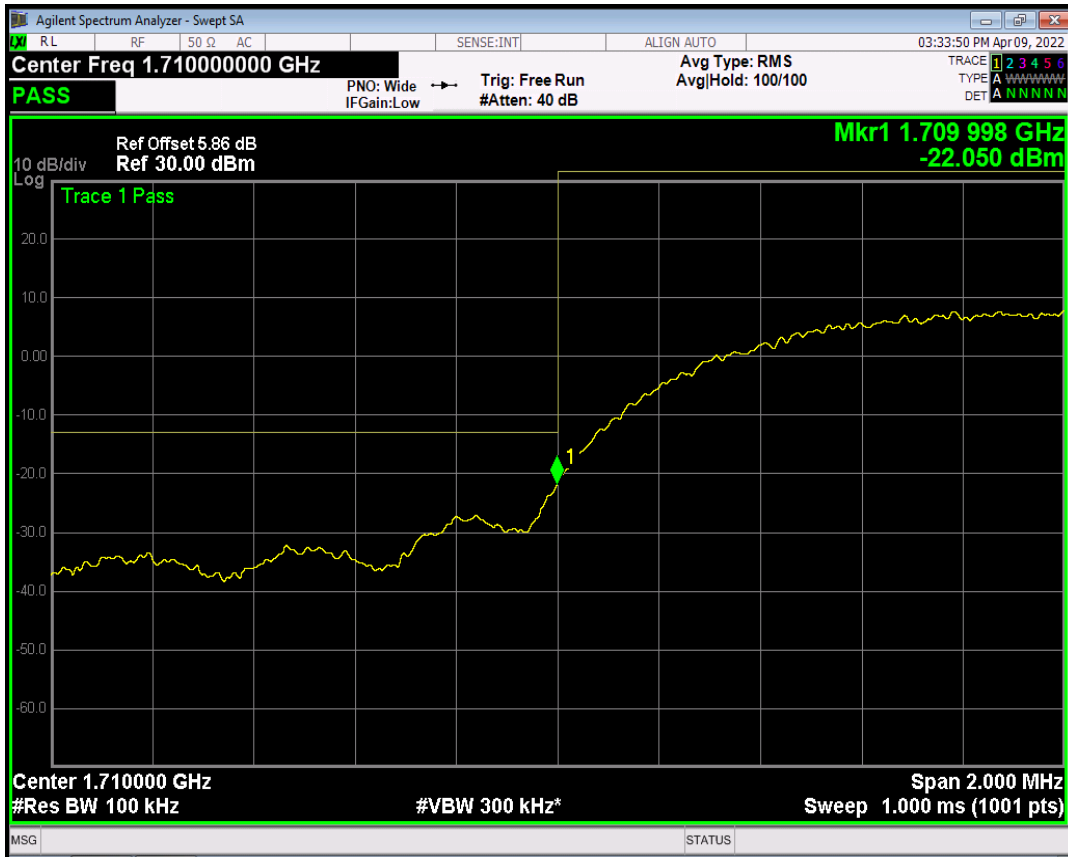

WCDMA Band4 Channel=1513




WCDMA Band5 Channel=4132

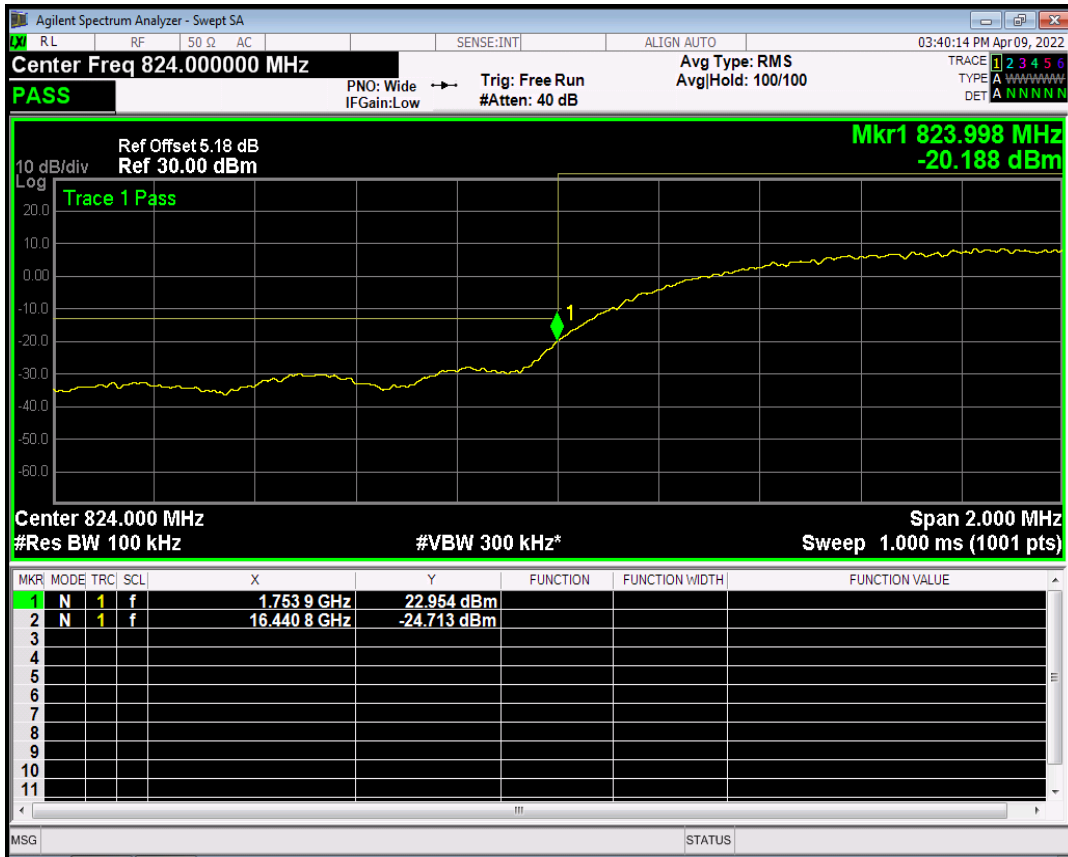


WCDMA Band5 Channel=4233




WCDMA Band2 Channel=9400

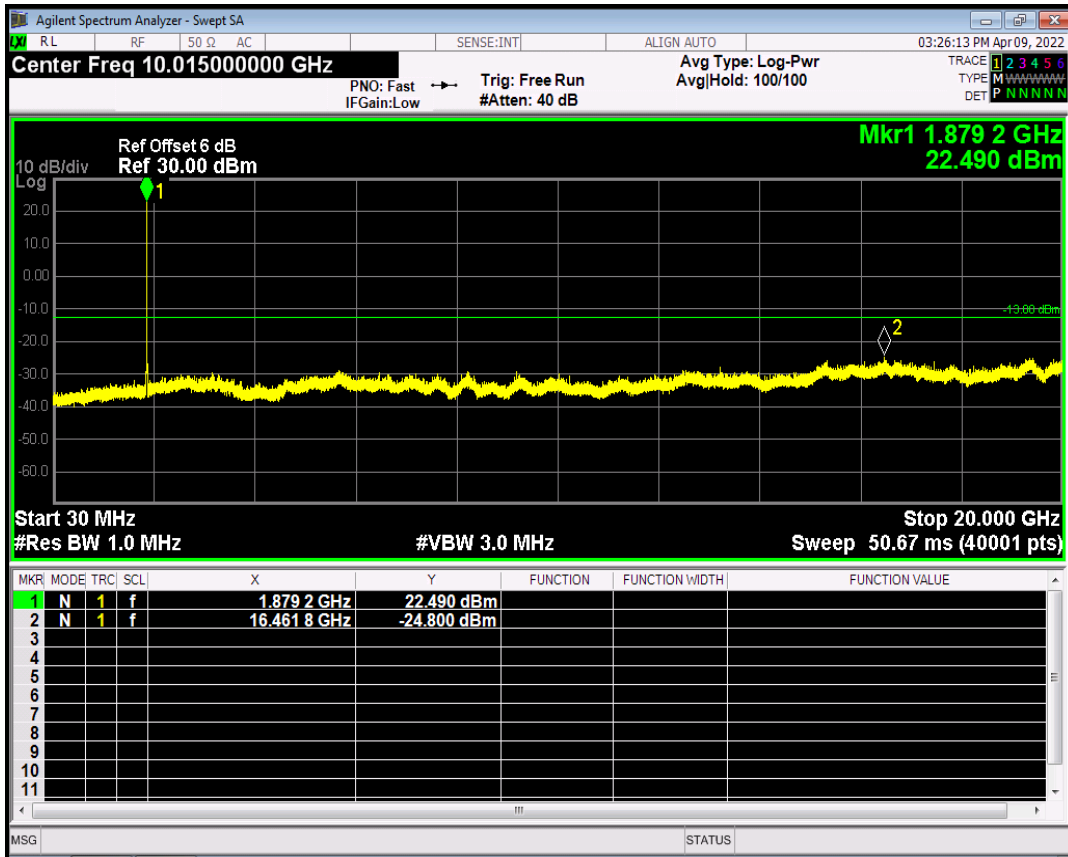


WCDMA Band2 Channel=9262

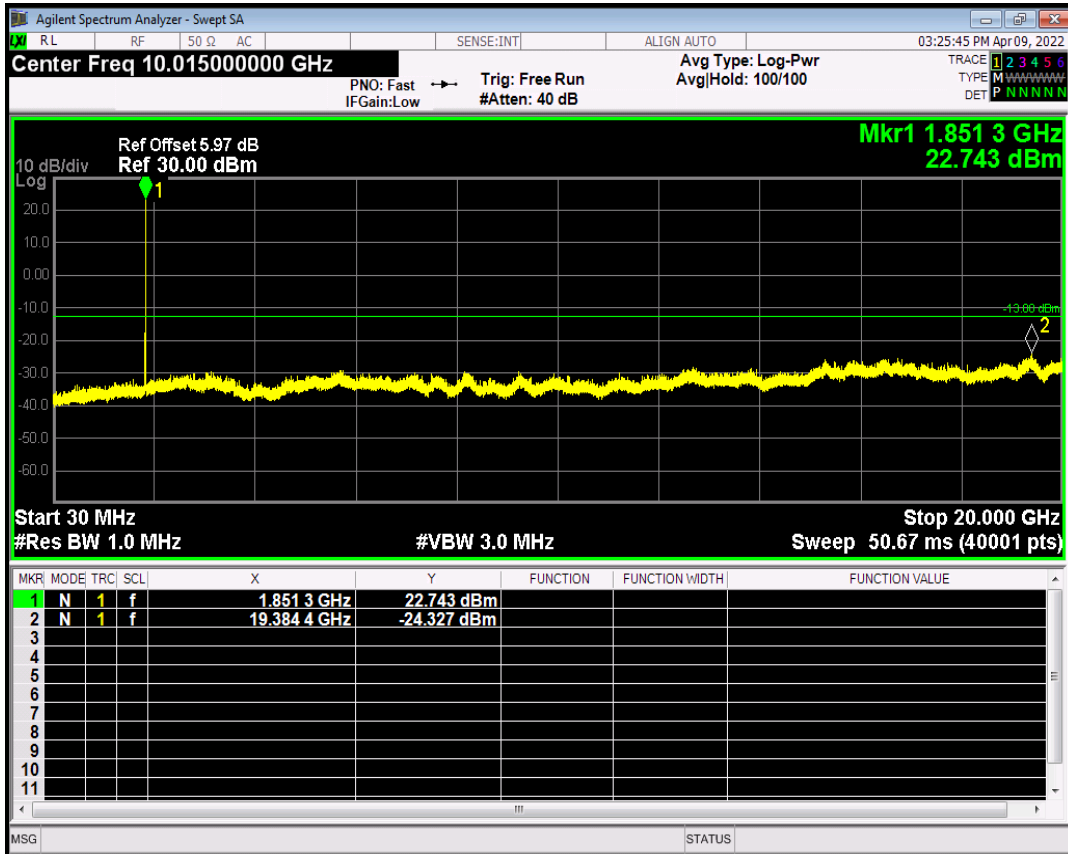


WCDMA Band2 Channel=9538

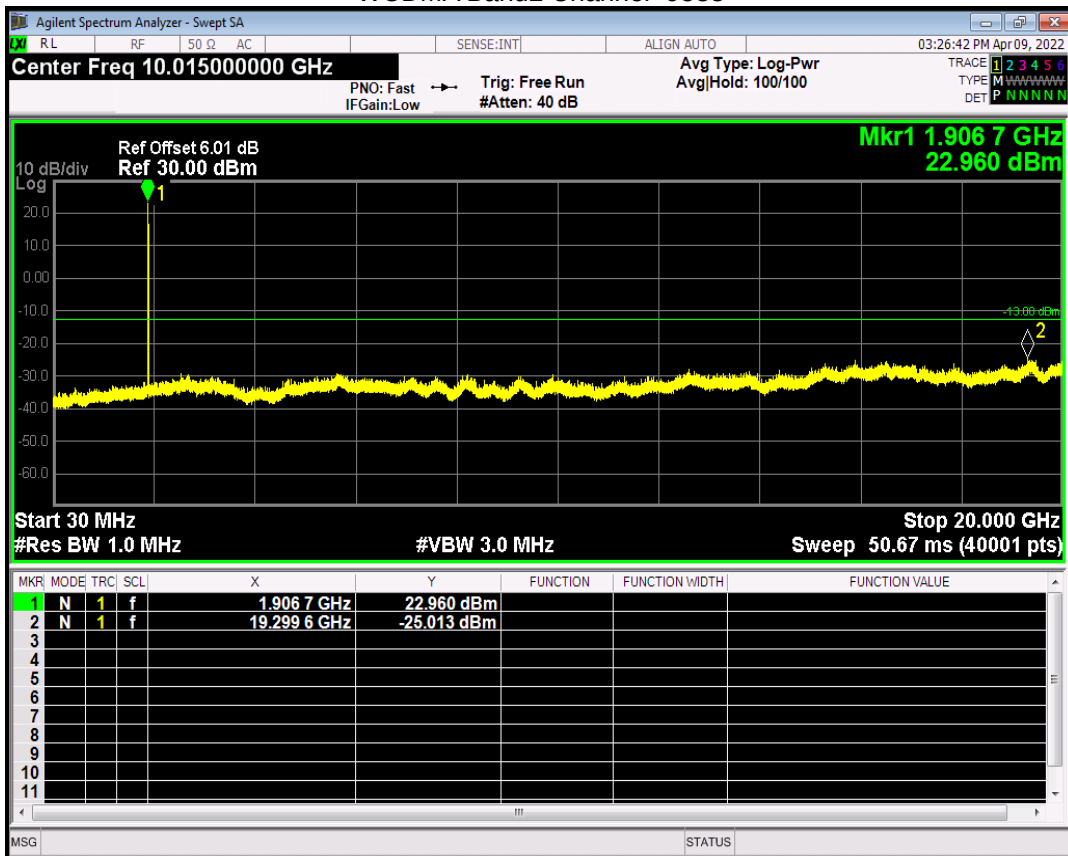


WCDMA Band4 Channel=1450

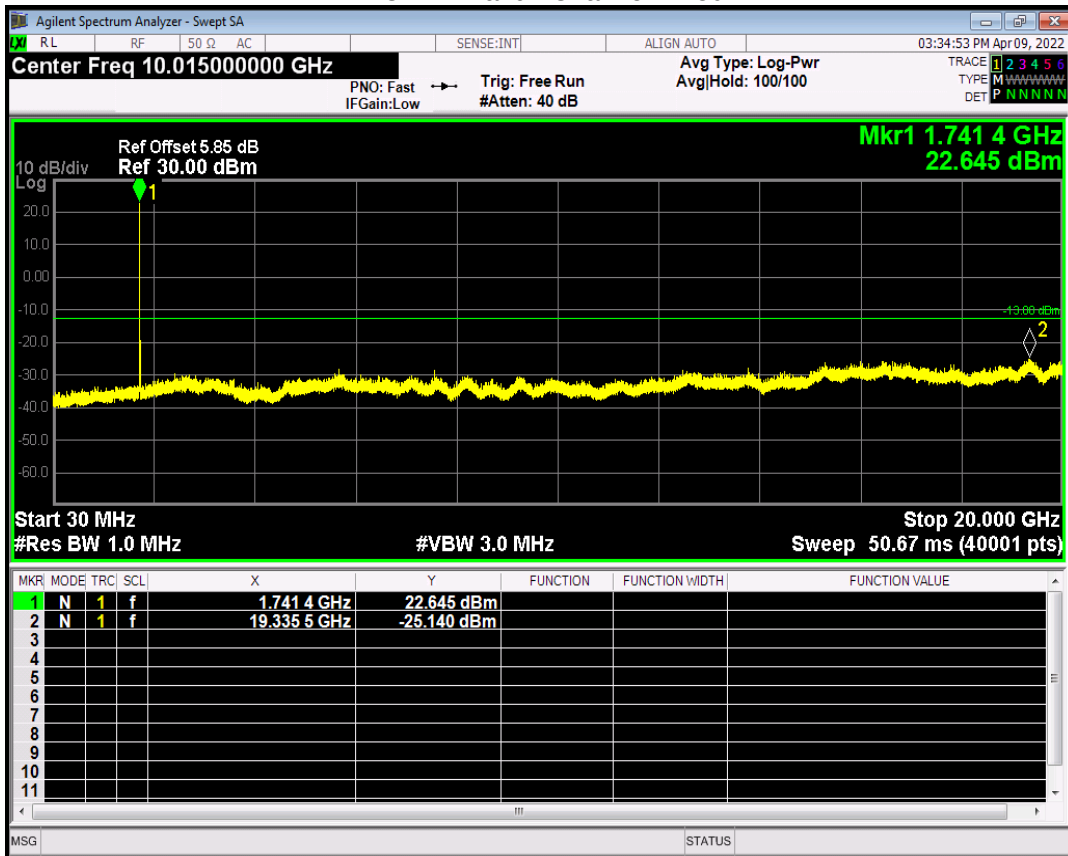


WCDMA Band4 Channel=1312

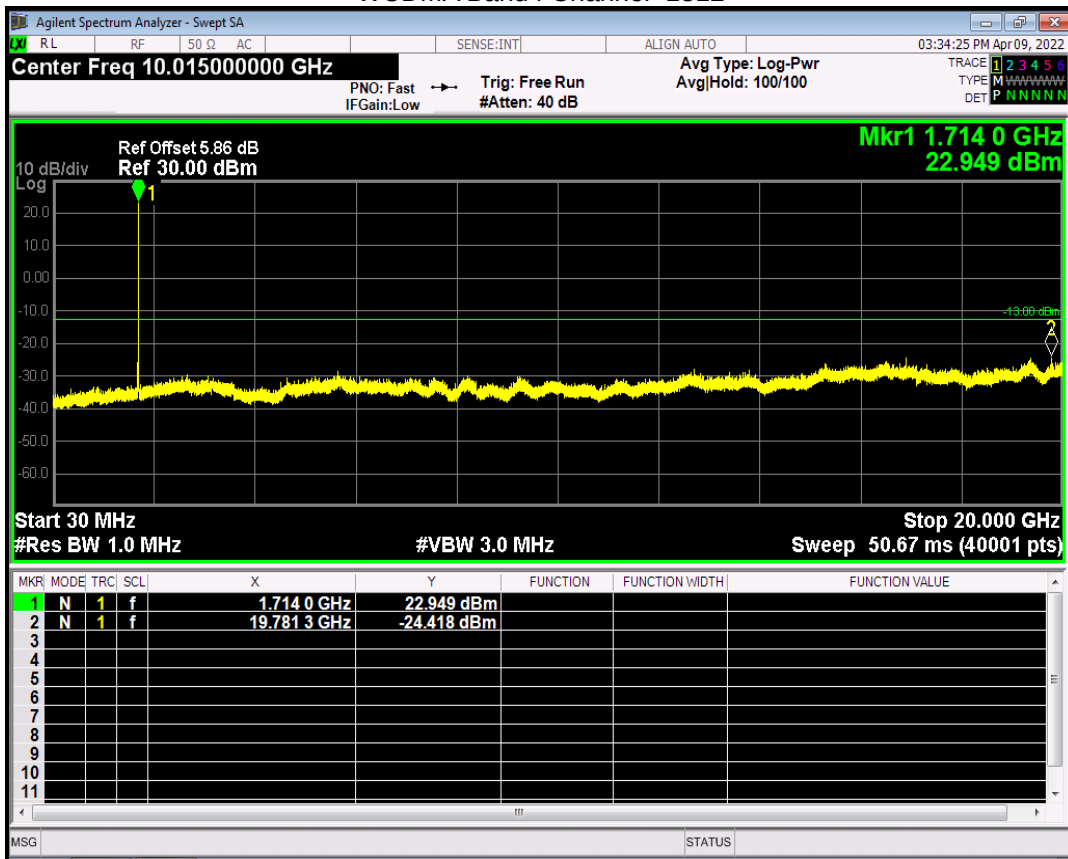


WCDMA Band4 Channel=1513

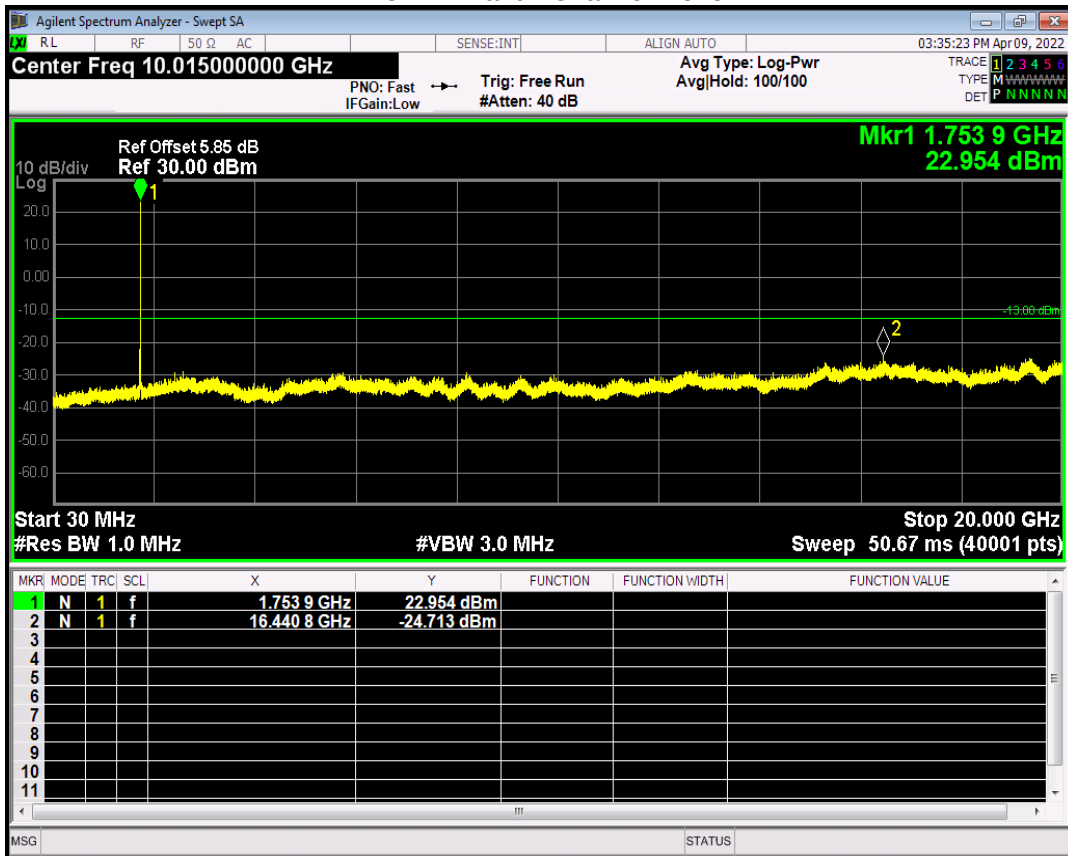



WCDMA Band5 Channel=4182

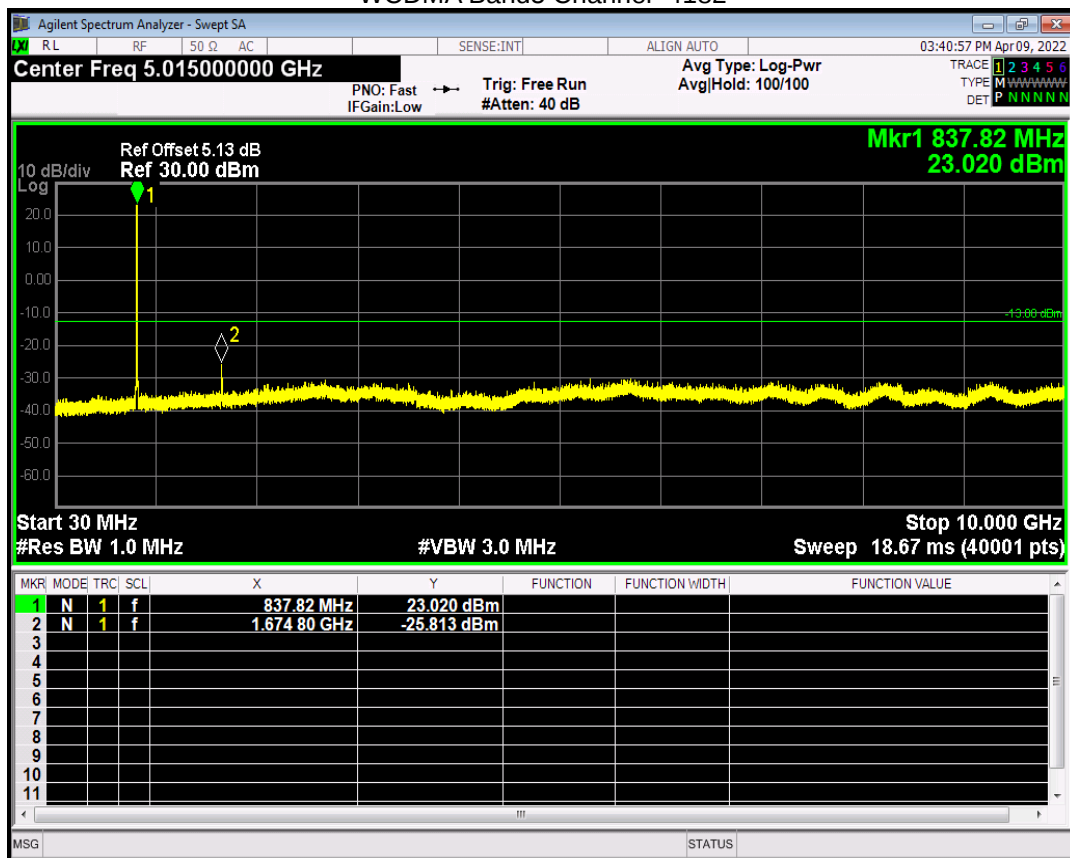

WCDMA Band5 Channel=4132

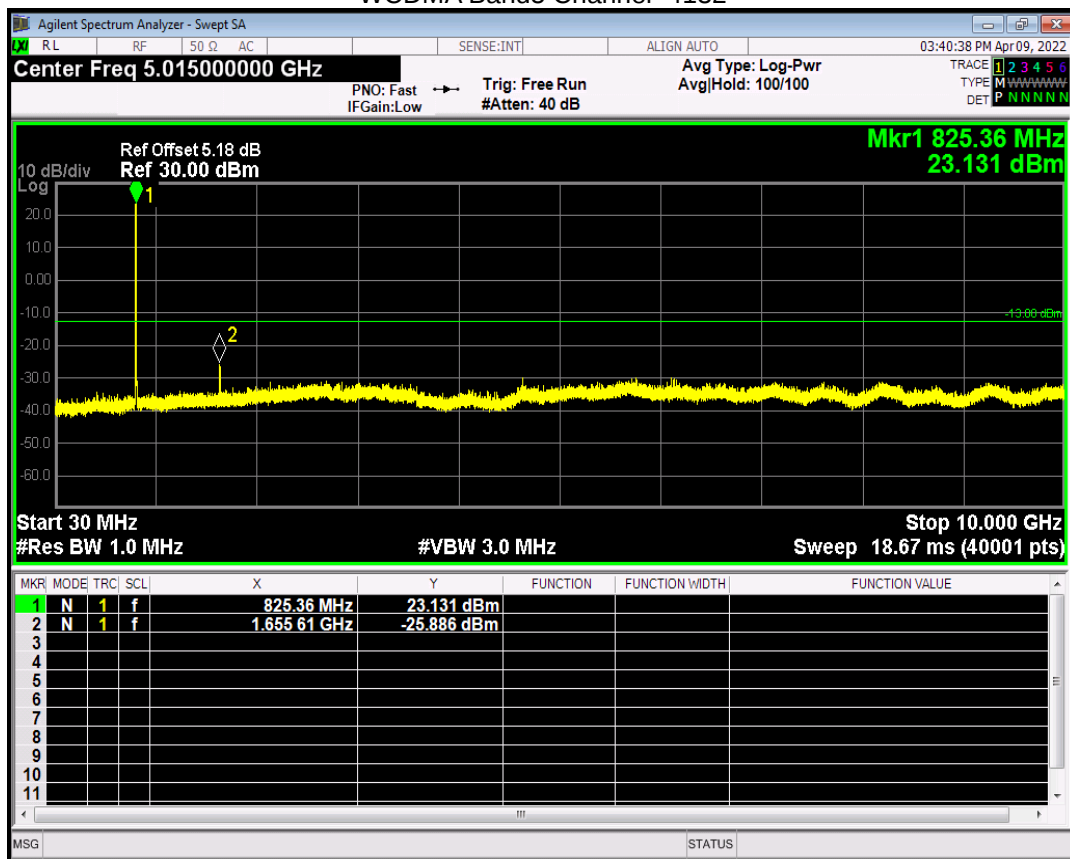


WCDMA Band5 Channel=4233

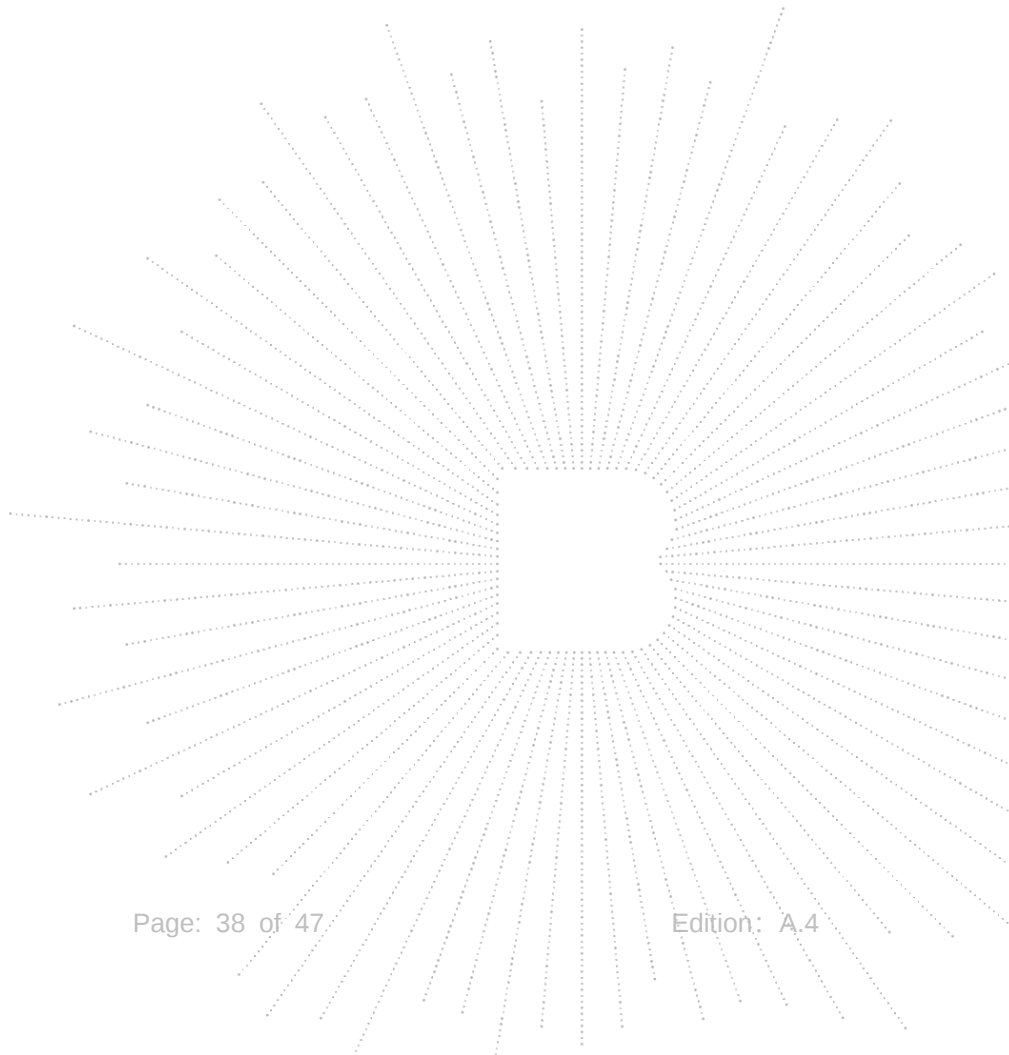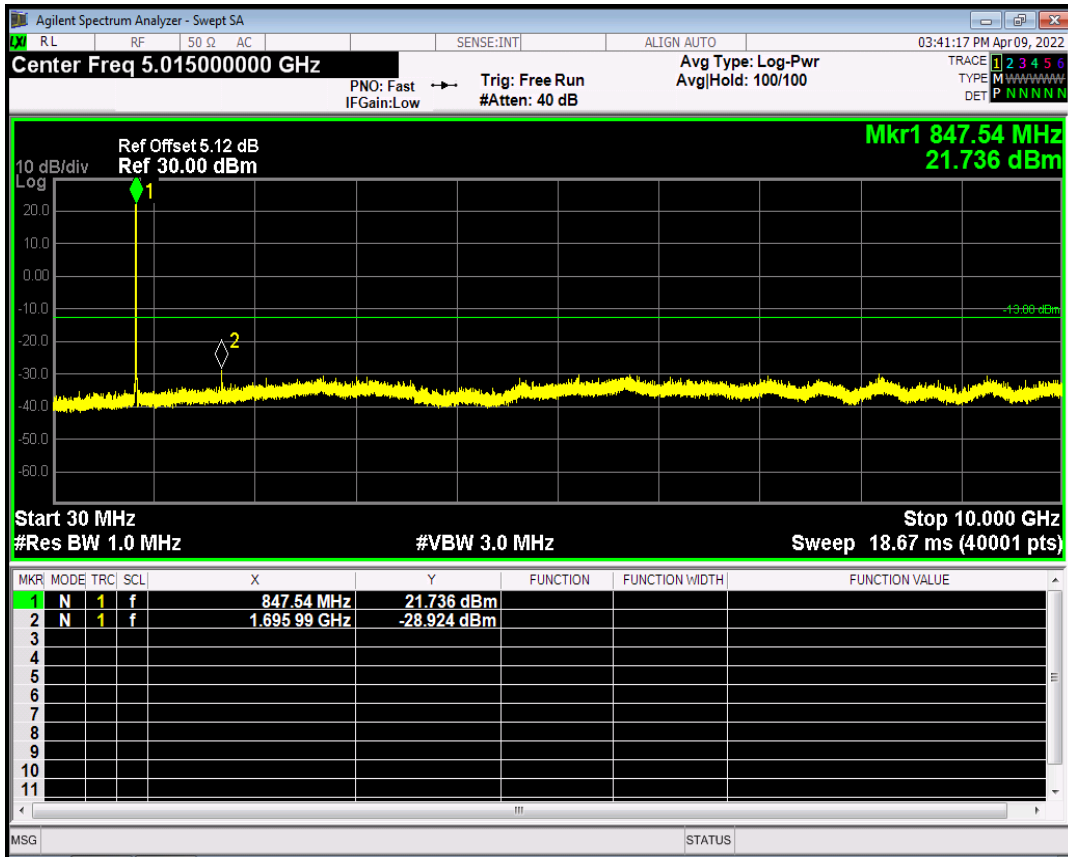


10. Spurious Radiated Emissions

10.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

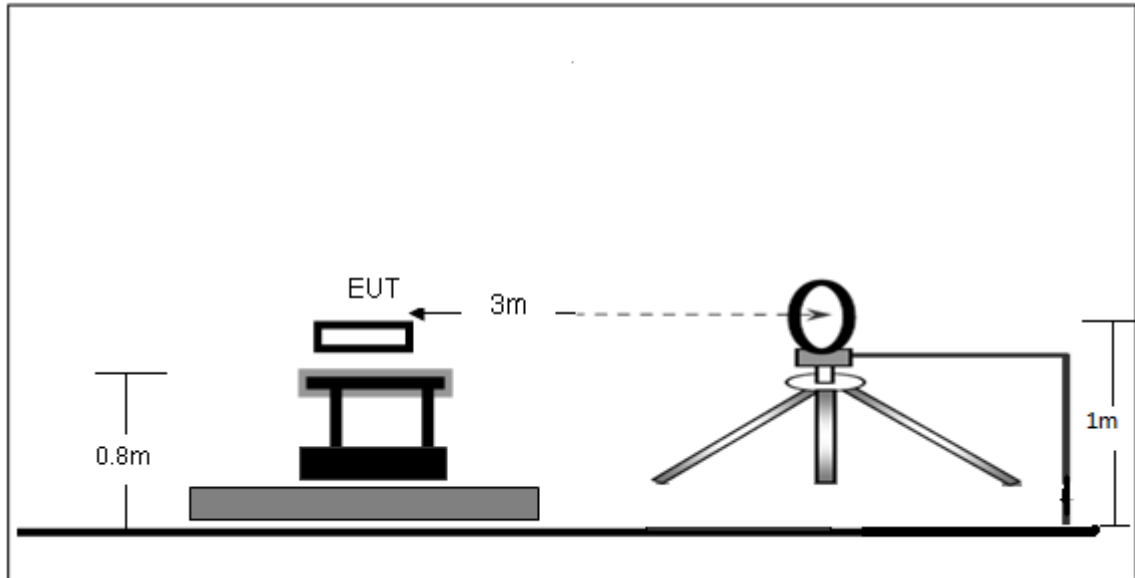

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

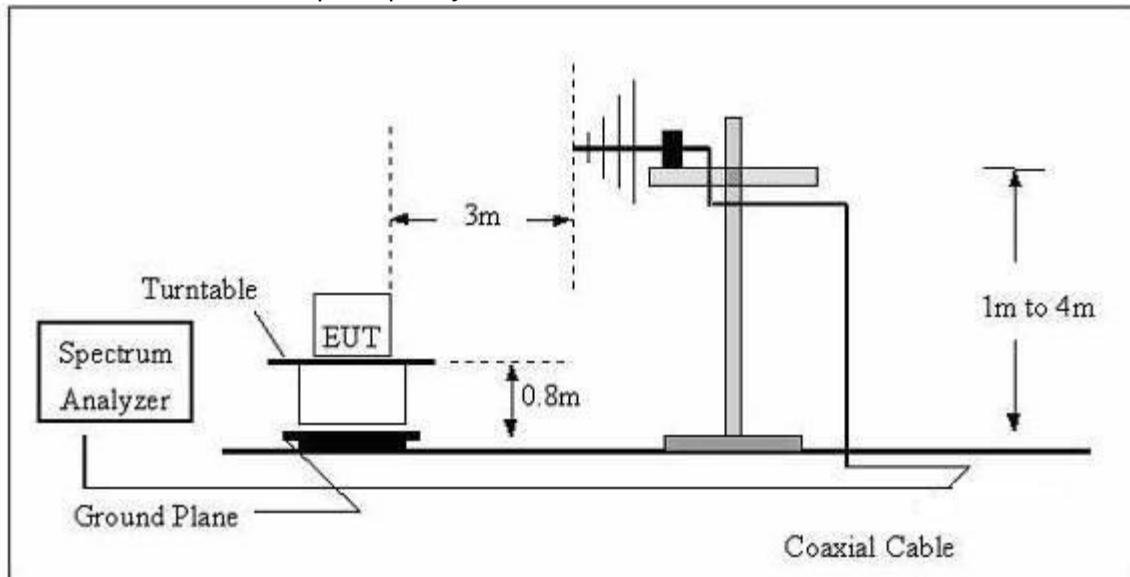

(C) Radiated Emission Test-Up Frequency Above 1GHz

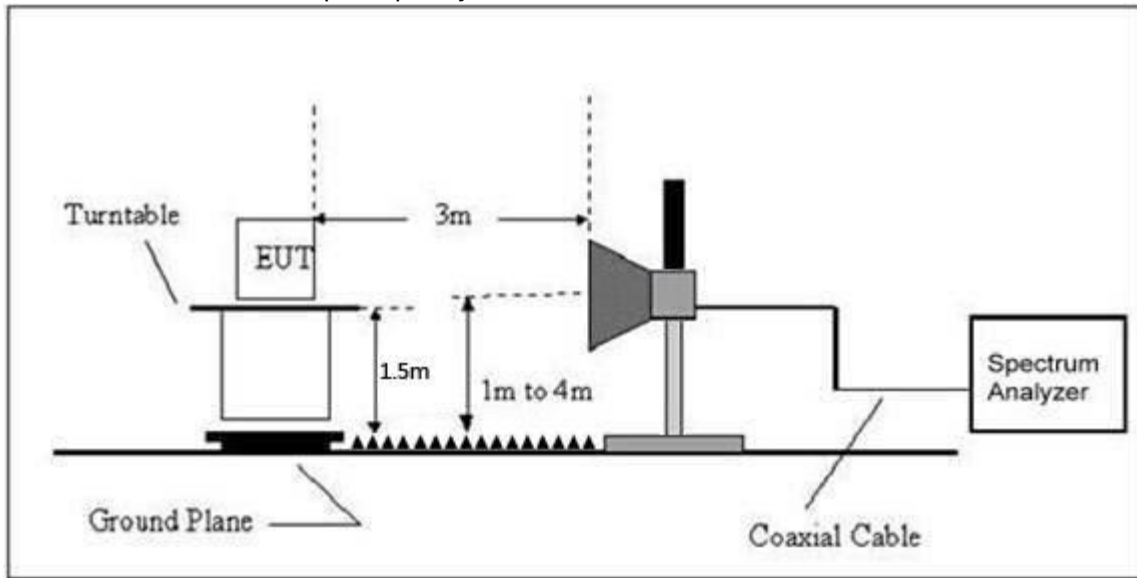

10.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

10.3 Test procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

10.4 Test Result

For Band WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
67.65	-44.39	-15.68	-60.07	-13.00	-47.07	H
3704.8	-24.09	-17.43	-41.52	-13.00	-28.52	H
5557.2	-31.55	-11.73	-43.28	-13.00	-30.28	H
67.65	-44.67	-15.68	-60.35	-13.00	-47.35	V
3704.8	-26.15	-17.43	-43.58	-13.00	-30.58	V
5557.2	-30.12	-11.73	-41.85	-13.00	-28.85	V
Middle Channel (1880MHz)						
67.65	-42.61	-15.68	-58.29	-13.00	-45.29	H
3760	-24.51	-16.98	-41.49	-13.00	-28.49	H
5640	-30.49	-11.33	-41.82	-13.00	-28.82	H
67.65	-43.19	-15.68	-58.87	-13.00	-45.87	V
3760	-29.08	-16.98	-46.06	-13.00	-33.06	V
5640	-30.59	-11.33	-41.92	-13.00	-28.92	V
High Channel (1907.6MHz)						
67.65	-42.65	-15.68	-58.33	-13.00	-45.33	H
3815.2	-26.90	-16.52	-43.42	-13.00	-30.42	H
5722.8	-32.77	-10.93	-43.70	-13.00	-30.70	H
67.65	-41.69	-15.68	-57.37	-13.00	-44.37	V
3815.2	-26.48	-16.52	-43.00	-13.00	-30.00	V
5722.8	-28.85	-10.93	-39.78	-13.00	-26.78	V

Note: Result=Reading+ Correct, Margin= Result- Limit

For Band WCDMA Band IV Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1712.4MHz)						
67.65	-44.31	-15.68	-59.99	-13.00	-46.99	H
3424.80	-24.65	-19.74	-44.39	-13.00	-31.39	H
5137.20	-29.70	-13.77	-43.47	-13.00	-30.47	H
67.65	-41.06	-15.68	-56.73	-13.00	-43.73	V
3424.80	-26.07	-19.74	-45.81	-13.00	-32.81	V
5137.20	-29.62	-13.77	-43.39	-13.00	-30.39	V
Middle Channel (1740MHz)						
67.65	-43.84	-15.68	-59.51	-13.00	-46.51	H
3480.00	-26.68	-19.41	-46.09	-13.00	-33.09	H
5220.00	-30.15	-13.48	-43.63	-13.00	-30.63	H
67.65	-41.30	-15.68	-56.98	-13.00	-43.98	V
3480.00	-28.29	-19.41	-47.70	-13.00	-34.70	V
5220.00	-31.53	-13.48	-45.01	-13.00	-32.01	V
High Channel (1752.6MHz)						
67.65	-41.70	-15.68	-57.37	-13.00	-44.37	H
3505.20	-27.58	-19.08	-46.66	-13.00	-33.66	H
5257.80	-32.91	-13.19	-46.10	-13.00	-33.10	H
67.65	-44.82	-15.68	-60.50	-13.00	-47.50	V
3505.20	-28.48	-19.08	-47.56	-13.00	-34.56	V
5257.80	-30.63	-13.19	-43.82	-13.00	-30.82	V


Note: Result=Reading+ Correct, Margin= Result- Limit

For Band WCDMA Band V Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
67.65	-42.50	-15.68	-58.18	-13.00	-45.18	H
1652.80	-21.15	-22.94	-44.09	-13.00	-31.09	H
2479.20	-23.51	-22.46	-45.97	-13.00	-32.97	H
67.65	-42.66	-15.68	-58.34	-13.00	-45.34	V
1652.80	-18.93	-22.94	-41.87	-13.00	-28.87	V
2479.20	-26.32	-22.46	-48.78	-13.00	-35.78	V
Middle Channel (836.4MHz)						
67.65	-41.04	-15.68	-56.72	-13.00	-43.72	H
1672.80	-21.22	-22.87	-44.09	-13.00	-31.09	H
2509.20	-26.14	-22.50	-48.64	-13.00	-35.64	H
67.65	-41.10	-15.68	-56.77	-13.00	-43.77	V
1672.80	-20.24	-22.87	-43.11	-13.00	-30.11	V
2509.20	-25.91	-22.50	-48.41	-13.00	-35.41	V
High Channel (846.6MHz)						
67.65	-44.74	-15.68	-60.42	-13.00	-47.42	H
1693.20	-18.73	-22.80	-41.53	-13.00	-28.53	H
2539.80	-24.37	-22.55	-46.92	-13.00	-33.92	H
67.65	-43.50	-15.68	-59.18	-13.00	-46.18	V
1693.20	-20.98	-22.80	-43.78	-13.00	-30.78	V
2539.80	-24.99	-22.55	-47.54	-13.00	-34.54	V


Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

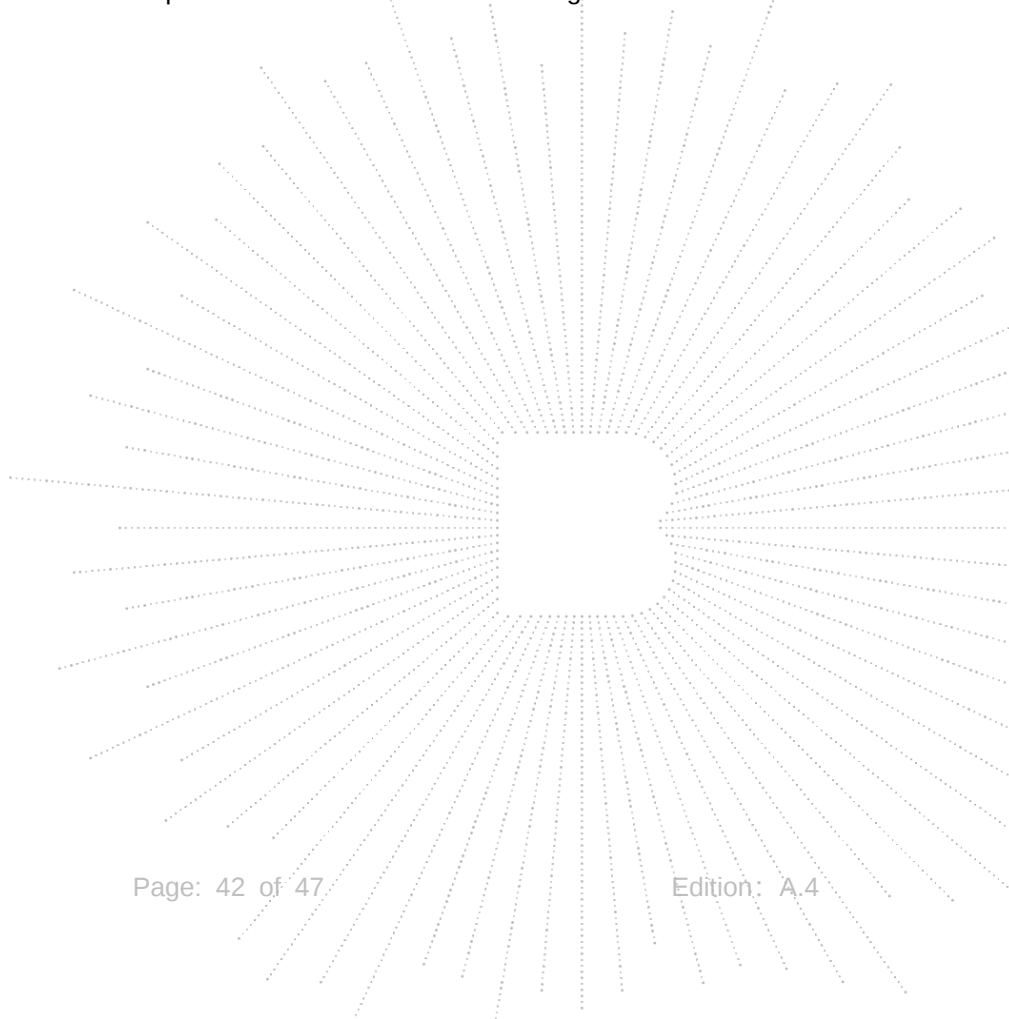

11. Frequency Stability

11.1 Block Diagram Of Test Setup

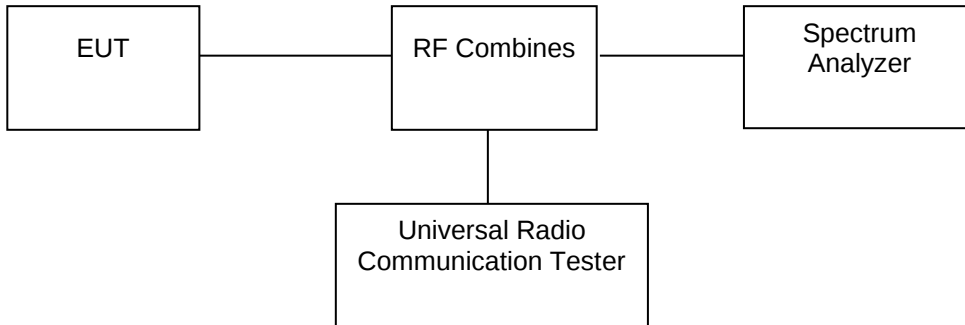

11.2 Limit

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


11.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

11.4 Test Result

Band	Channel	Frequency (MHz)	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
WCDMA Band2	9262	1852.4	-4.85	-0.003	-2.5	2.5	PASS
WCDMA Band2	9400	1880	-6.65	-0.004	-2.5	2.5	PASS
WCDMA Band2	9538	1907.6	-7.39	-0.004	-2.5	2.5	PASS
WCDMA Band4	1312	1712.4	11.89	0.007	-2.5	2.5	PASS
WCDMA Band4	1450	1740	-7.97	-0.005	-2.5	2.5	PASS
WCDMA Band4	1513	1752.6	-17.62	-0.010	-2.5	2.5	PASS
WCDMA Band5	4132	826.4	1.00	0.001	-2.5	2.5	PASS
WCDMA Band5	4182	836.4	-1.27	-0.002	-2.5	2.5	PASS
WCDMA Band5	4233	846.6	-3.57	-0.004	-2.5	2.5	PASS

Note: In WCDMA, RMC, HSDPA and HSUPA all three tests only reflect the worst mode RMC.

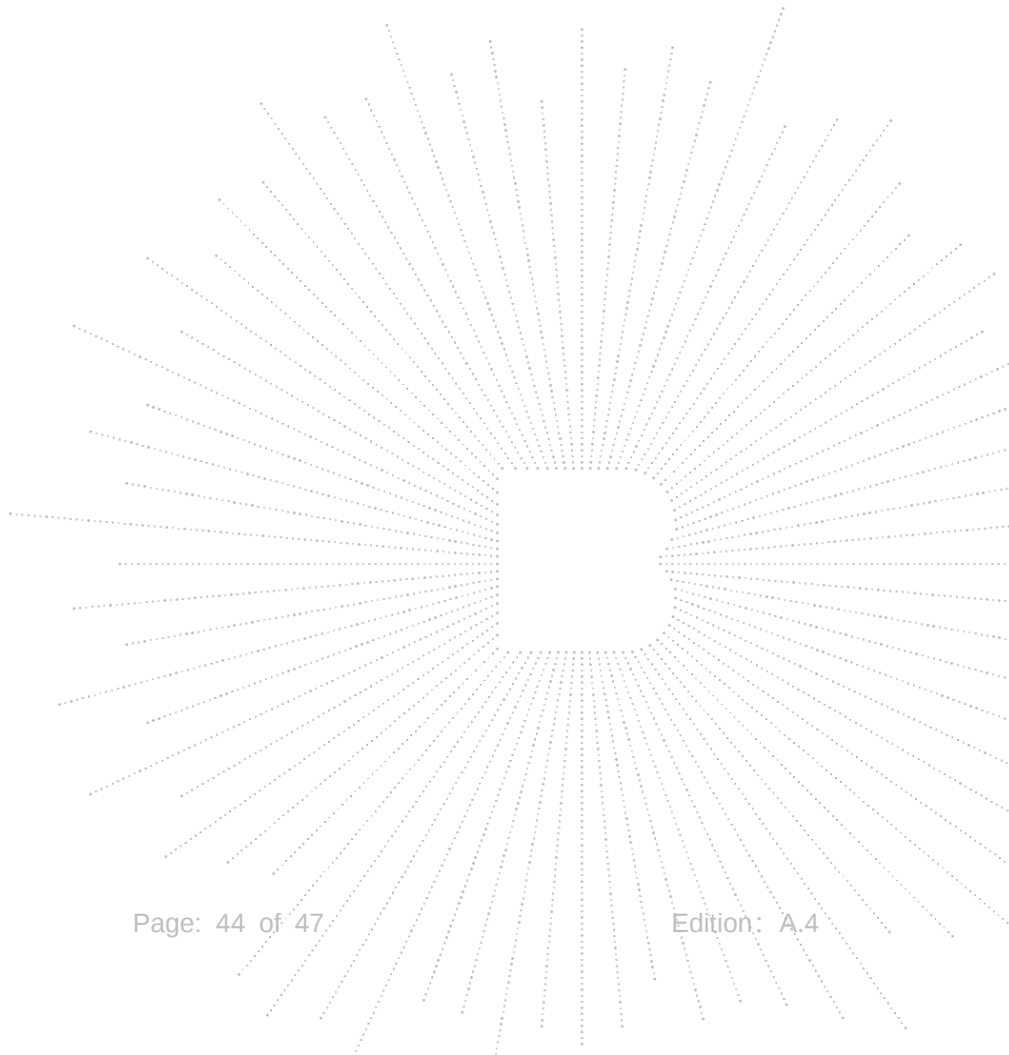


12. EUT Photographs

EUT Photo




NOTE: Appendix-Photographs Of EUT Constructional Details

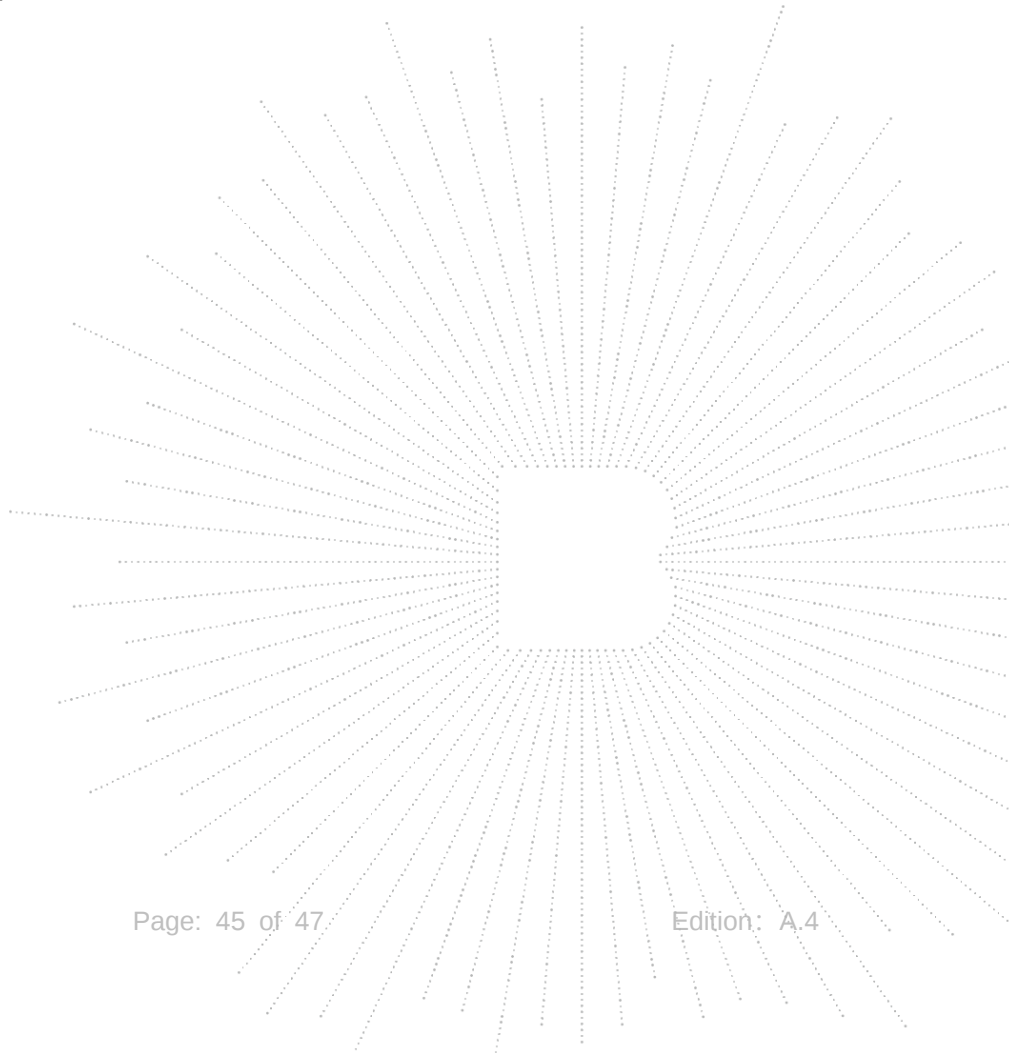

13. EUT Test Setup Photographs

Radiated Measurement Photos

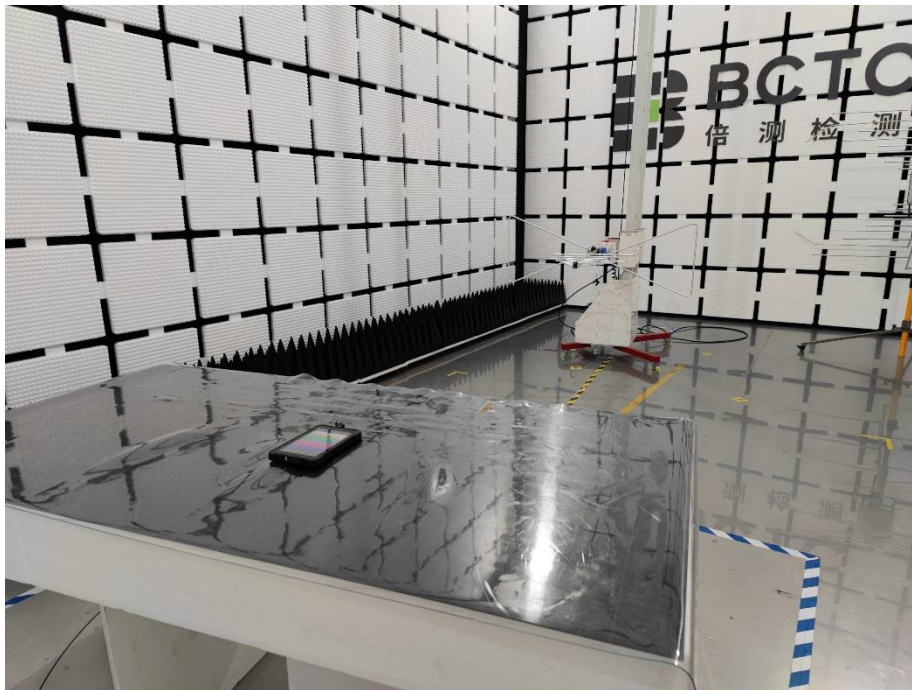

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** **END** *****