

Appendix A

RF Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: 5.0 Bluetooth adapter

Trade Mark: N/A

Test Model: RTL5.0

FCC ID: 2A3F2-RTL50

Environmental Conditions


Temperature:	22.8° C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa
Test Engineer:	Nancy Li
Supervised by:	Hugo Chen

A.1 20 dB Bandwidth


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.948	2401.538	2402.486	---	PASS
		2441	0.948	2440.538	2441.486	---	PASS
		2480	0.948	2479.538	2480.486	---	PASS
2DH5	Ant1	2402	1.302	2401.343	2402.645	---	PASS
		2441	1.314	2440.340	2441.654	---	PASS
		2480	1.311	2479.343	2480.654	---	PASS
3DH5	Ant1	2402	1.281	2401.349	2402.630	---	PASS
		2441	1.272	2440.352	2441.624	---	PASS
		2480	1.272	2479.349	2480.621	---	PASS

Test Graph


DH5_Ant1_2402

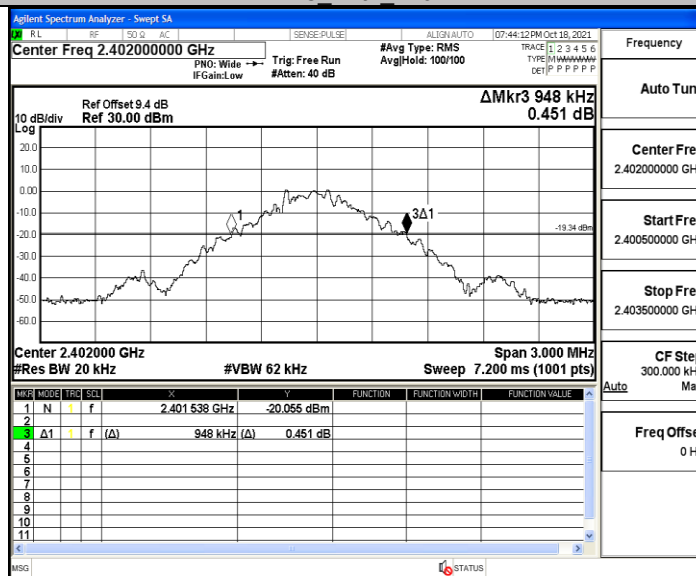


DH5_Ant1_2441

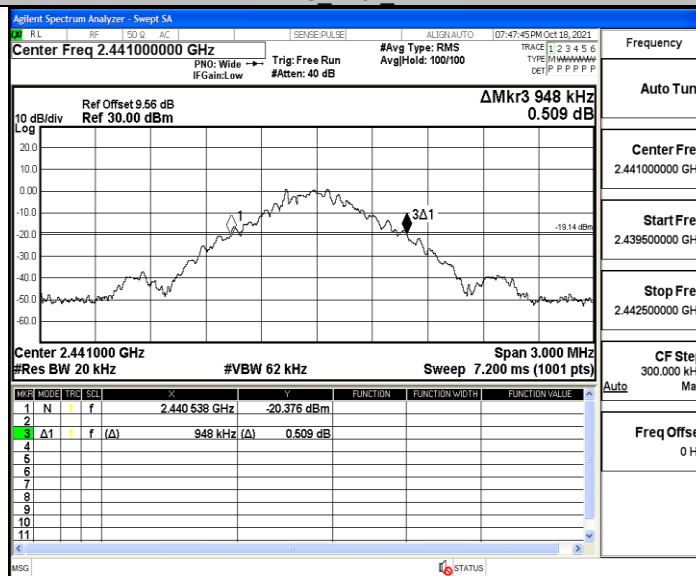


DH5_Ant1_2480

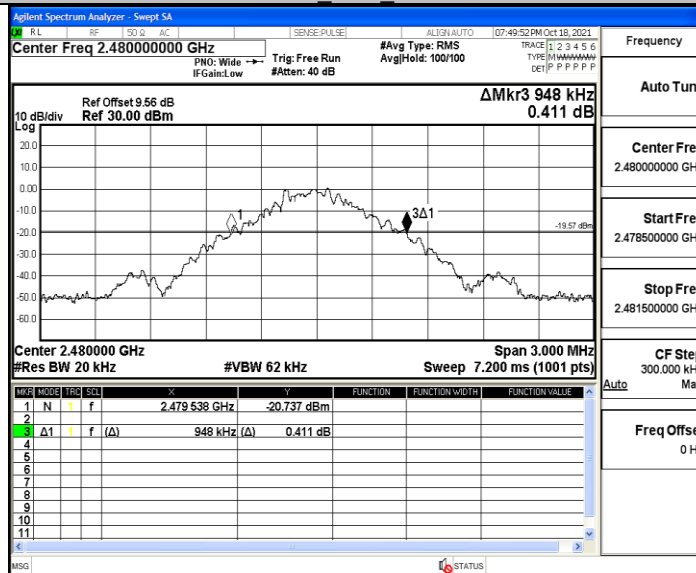


2DH5_Ant1_2402

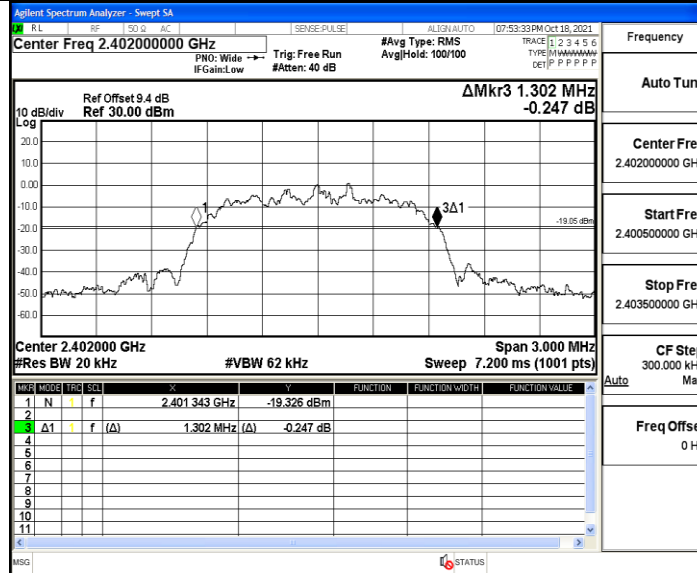


2DH5_Ant1_2441

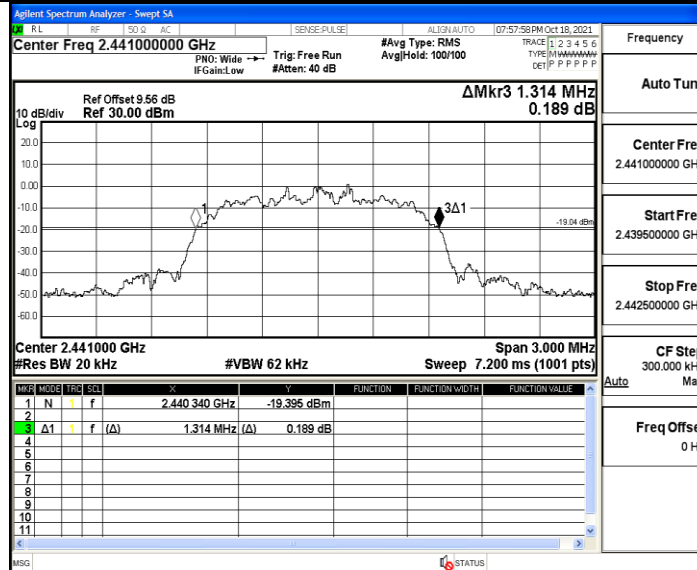


2DH5_Ant1_2480

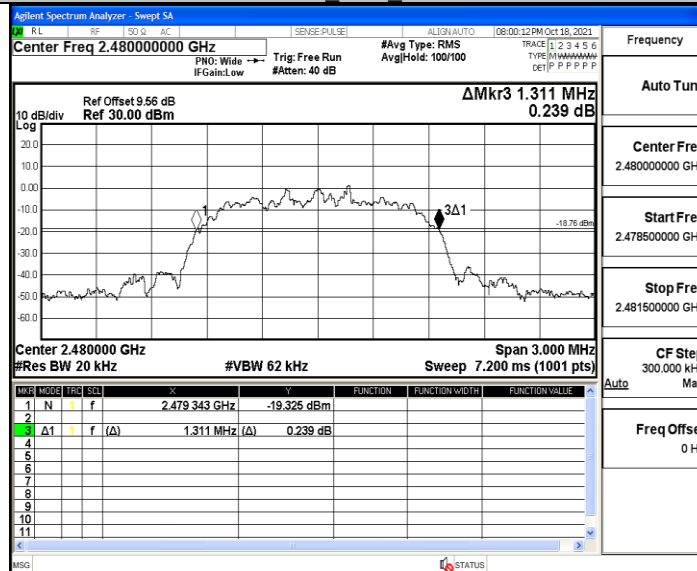


3DH5_Ant1_2402

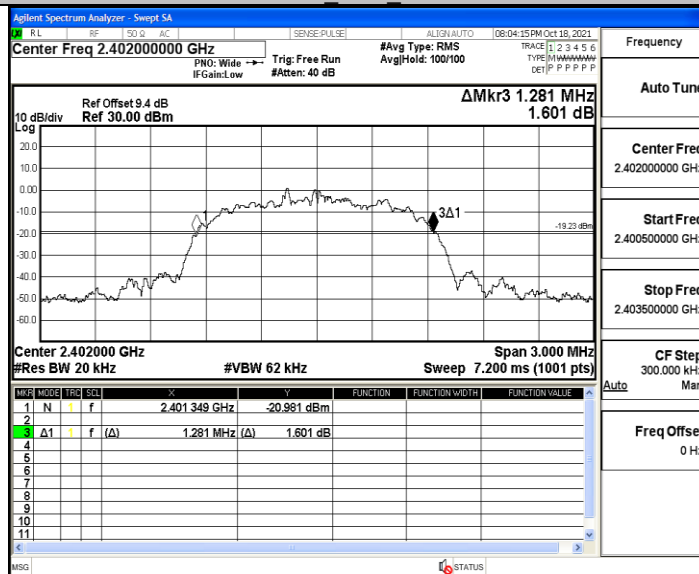

3DH5_Ant1_2441

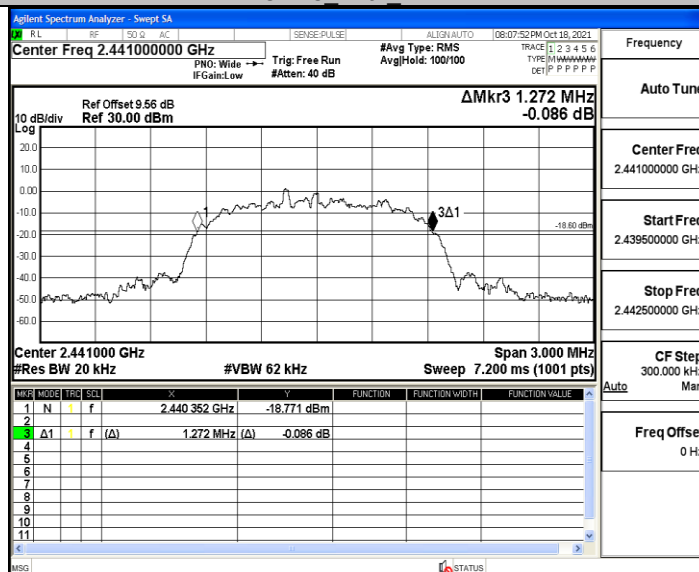

3DH5_Ant1_2480

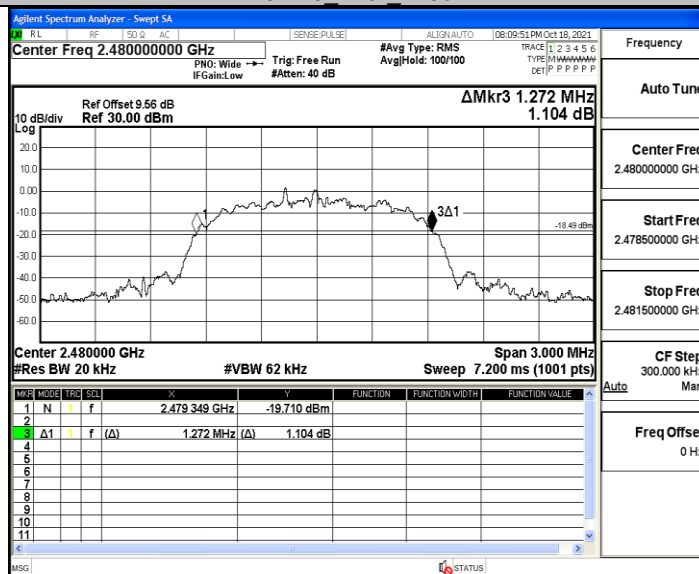


A.2 Dwell Time



TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.89	100	0.289	≤0.4	PASS
2DH5	Ant1	Hop	2.89	100	0.289	≤0.4	PASS
3DH5	Ant1	Hop	2.89	90	0.26	≤0.4	PASS

Test Graph



DH5_Ant1_Hop

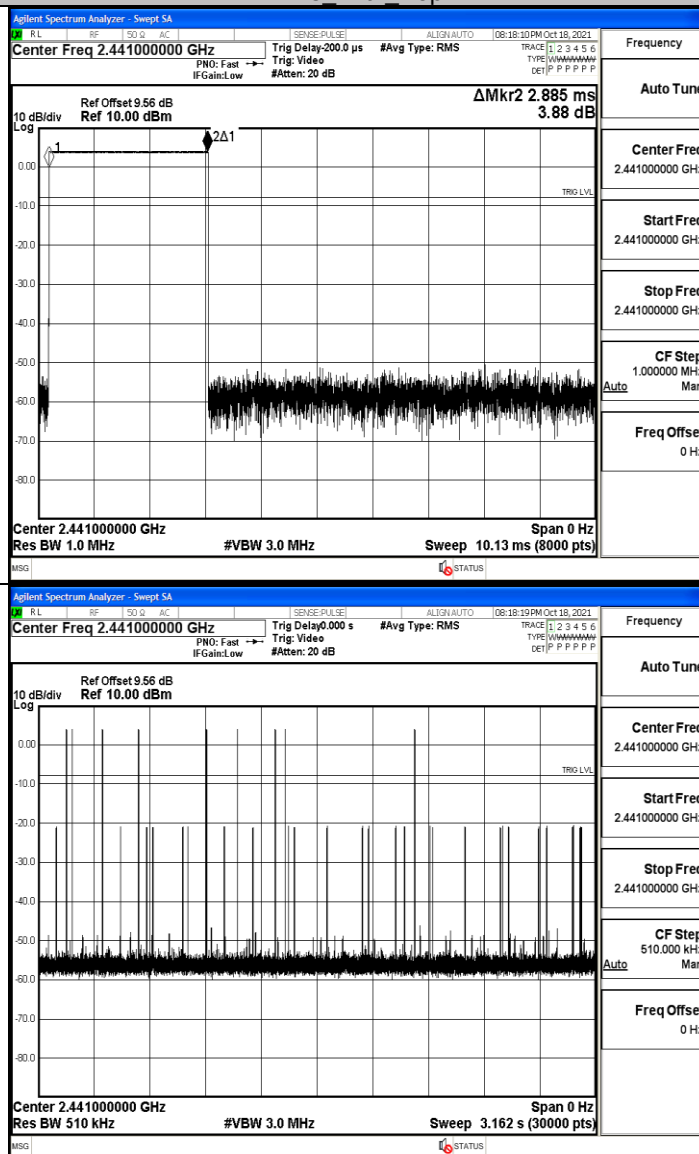

2DH5_Ant1_Hop

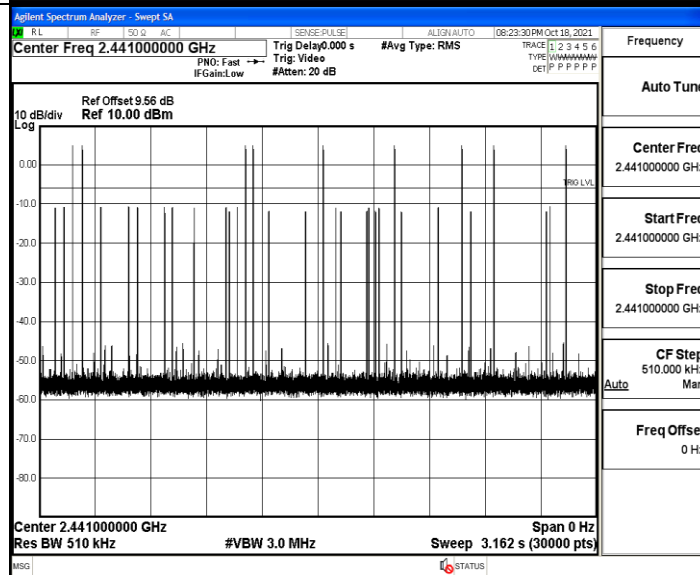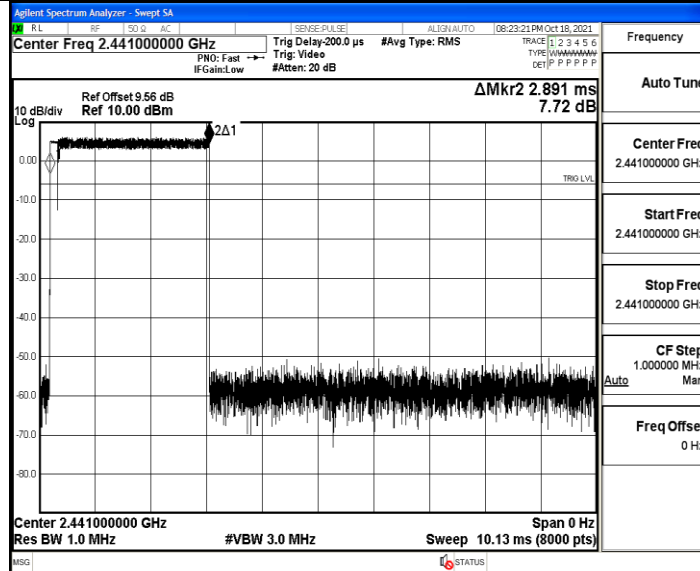

3DH5_Ant1_Hop

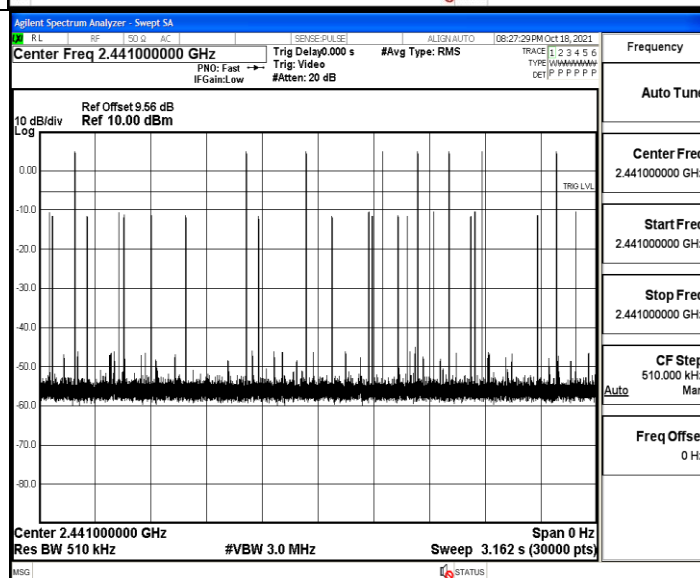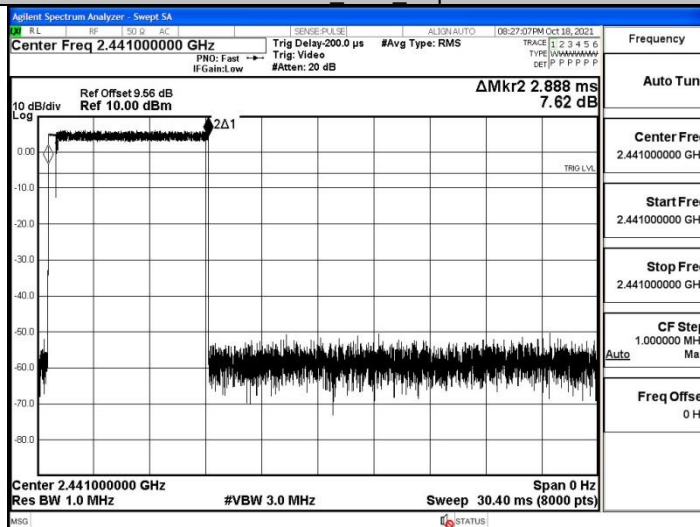


A.3 Carrier Frequency Separation


TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.984	≥ 0.948	PASS
2DH5	Ant1	Hop	0.998	≥ 0.876	PASS
3DH5	Ant1	Hop	1.014	≥ 0.854	PASS

Test Graph


DH5_Ant1_Hop

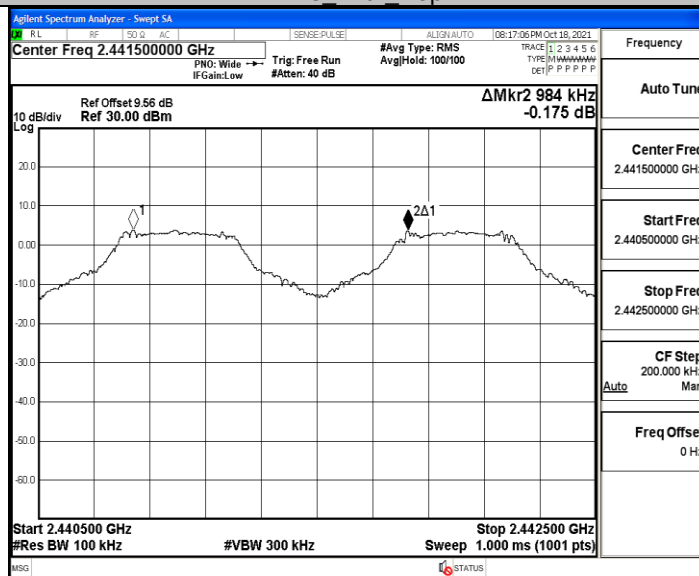

2DH5_Ant1_Hop

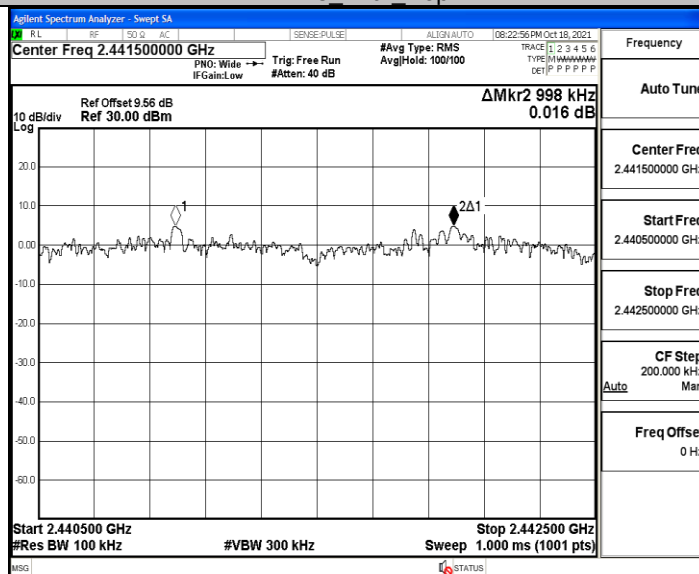

3DH5_Ant1_Hop

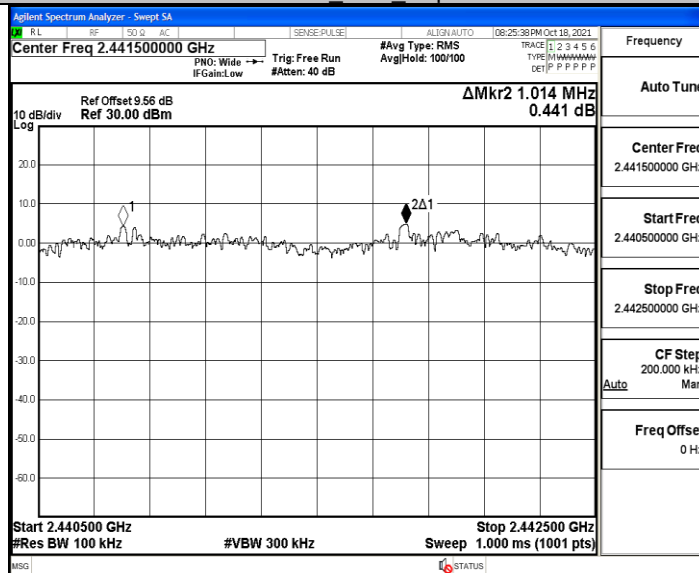


A.4 Hopping Channel Number

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	>=15	PASS
2DH5	Ant1	Hop	79	>=15	PASS
3DH5	Ant1	Hop	79	>=15	PASS

Test Graph



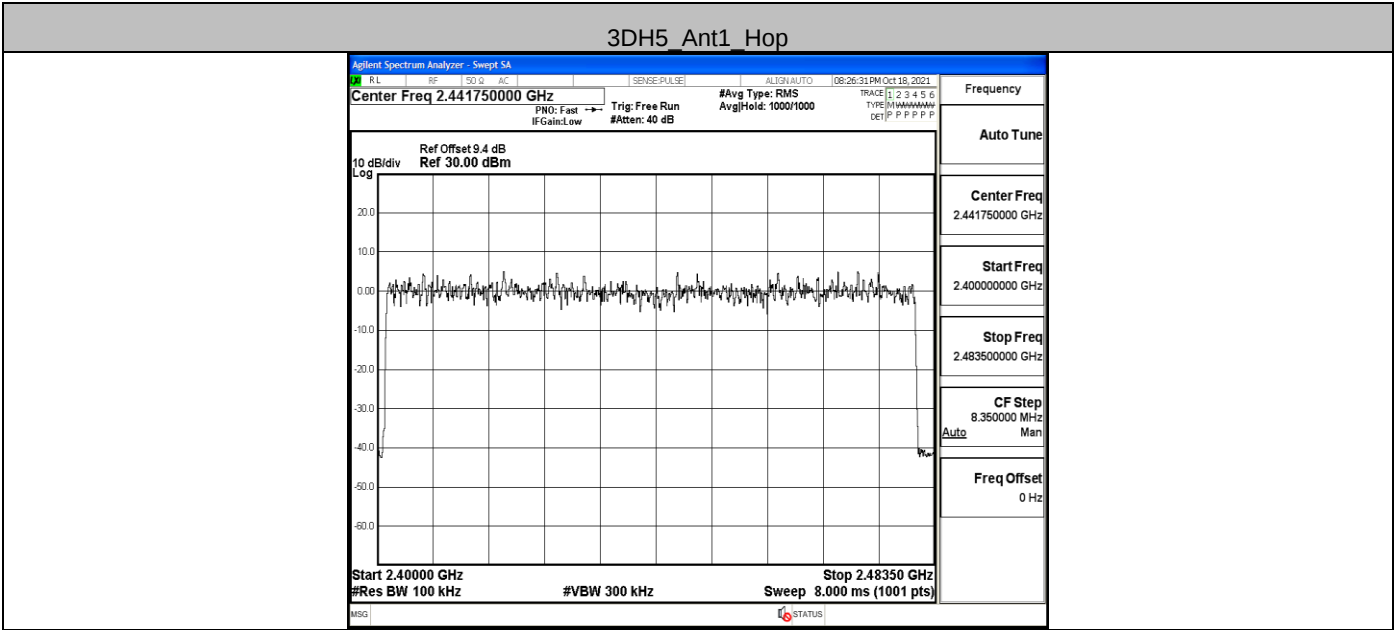


A.5 Conducted Peak Output Power


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	4.55	≤30.0	PASS
		2441	4.44	≤30.0	PASS
		2480	4.49	≤30.0	PASS
2DH5	Ant1	2402	6.76	≤20.97	PASS
		2441	6.66	≤20.97	PASS
		2480	6.71	≤20.97	PASS
3DH5	Ant1	2402	7.31	≤20.97	PASS
		2441	7.2	≤20.97	PASS
		2480	7.32	≤20.97	PASS

Test Graph


DH5 Ant1 2402

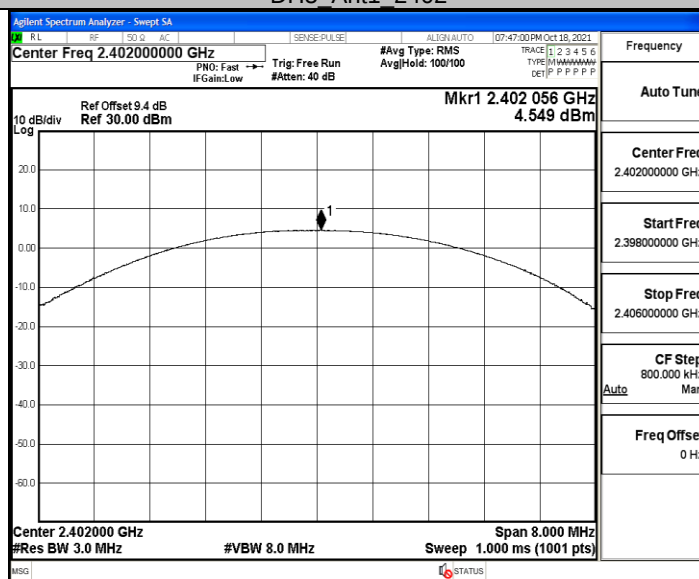


DH5 Ant1 2441

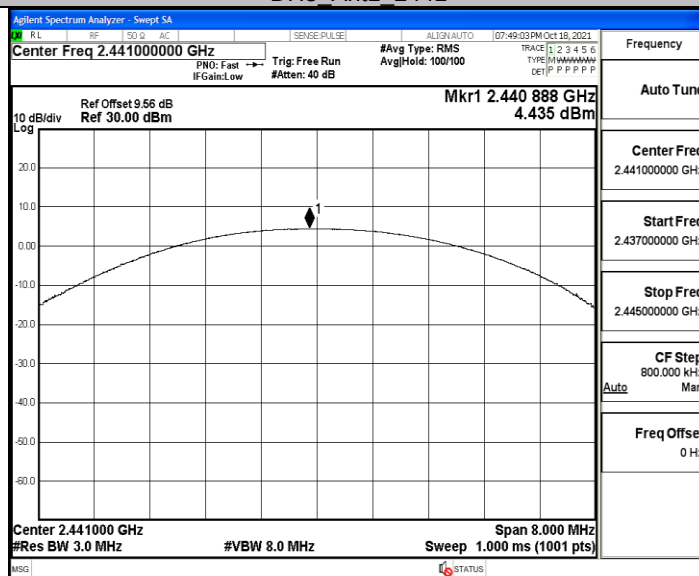


DH5 Ant1_2480

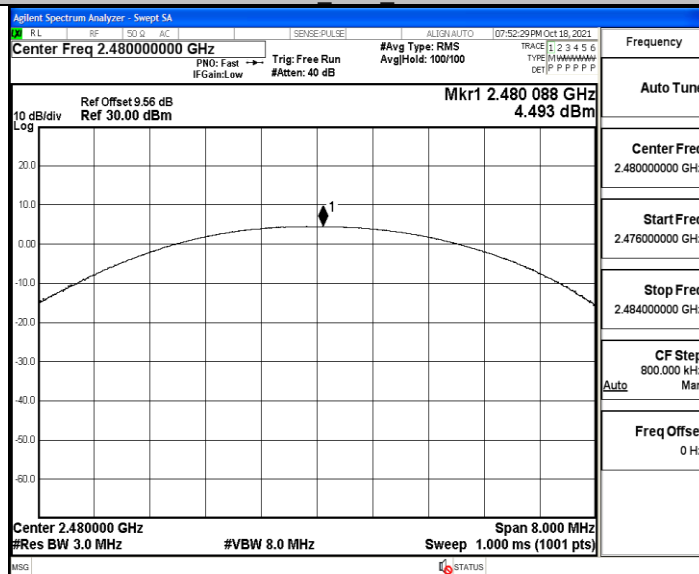


2DH5 Ant1_2402

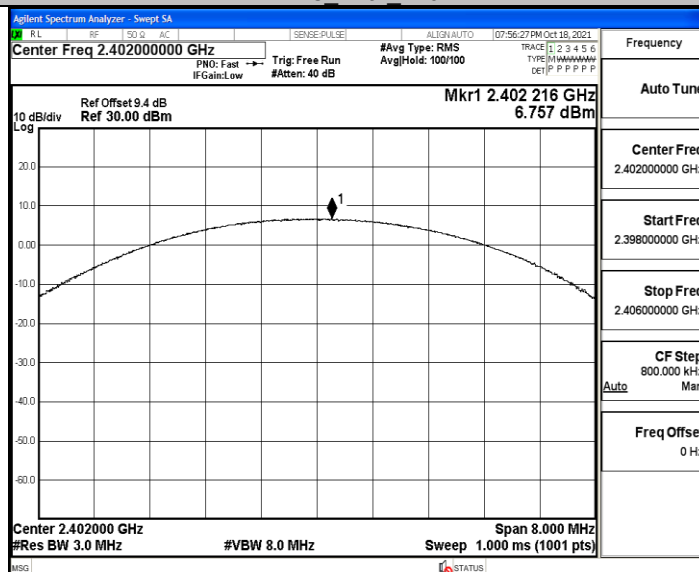


2DH5 Ant1_2441

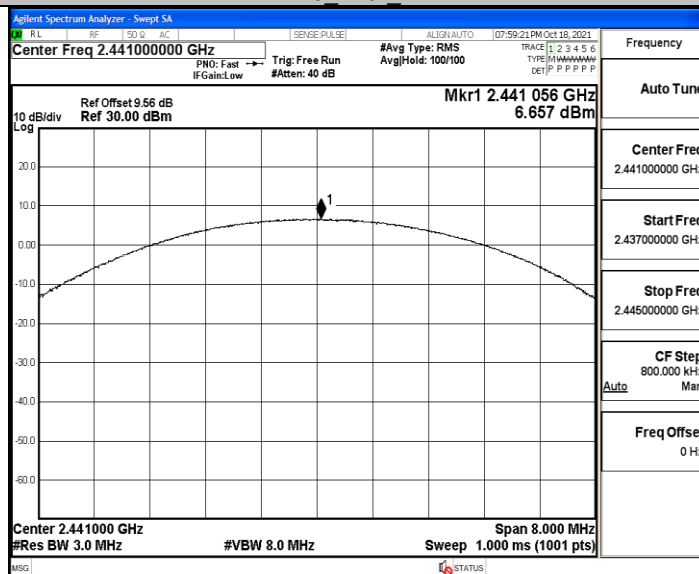


2DH5 Ant1 2480

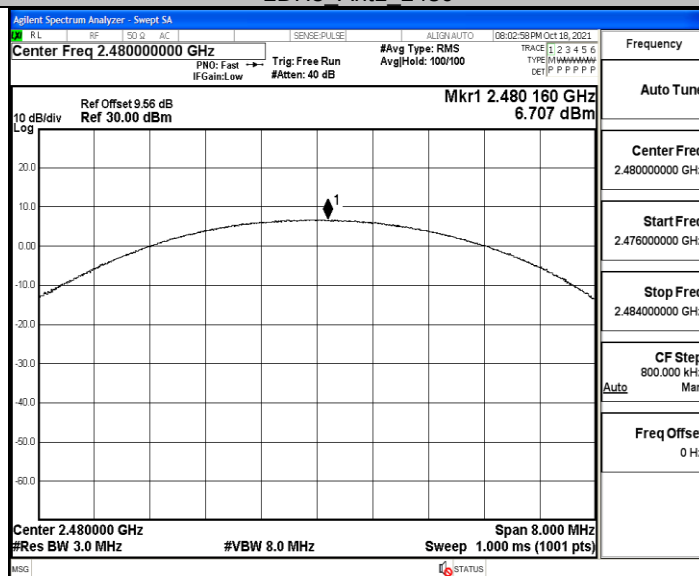


3DH5 Ant1 2402

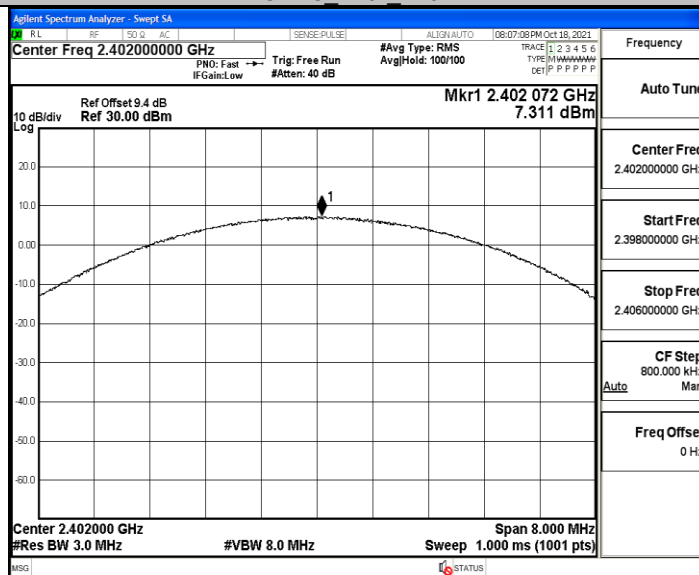

3DH5 Ant1 2441

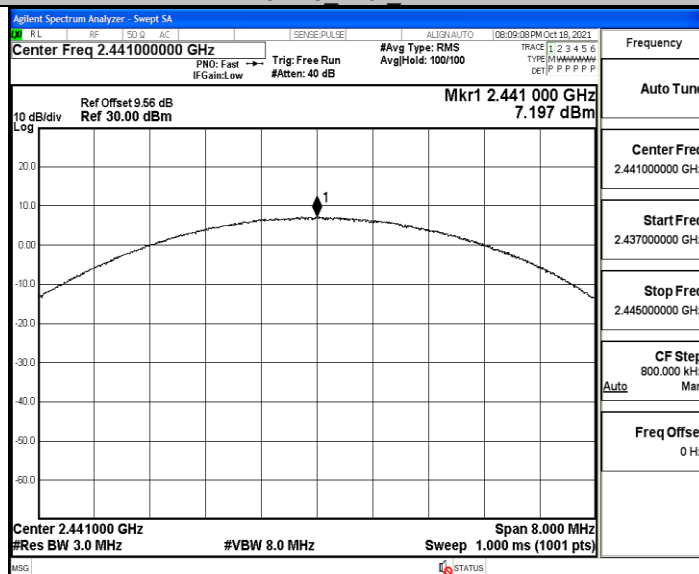

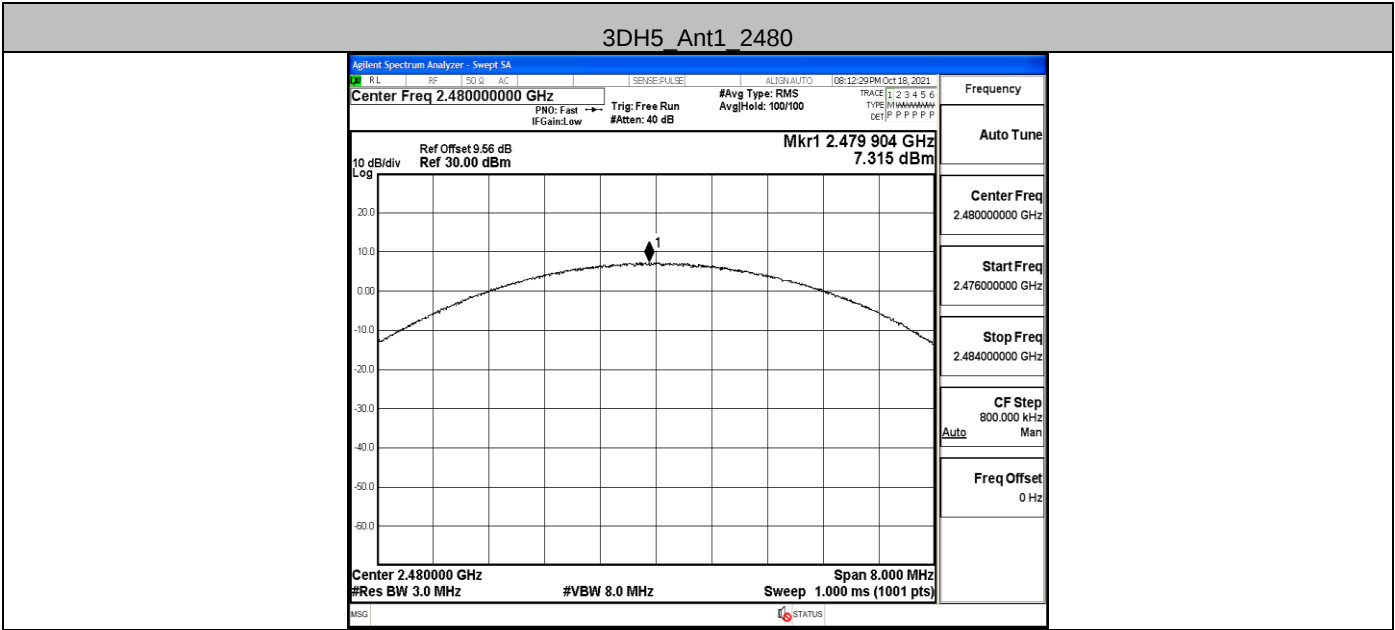


A.6 Band-edge for RF Conducted Emissions


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	4.42	-49.81	≤ -15.58	PASS
		High	2480	4.39	-48.98	≤ -15.61	PASS
		Low	Hop_2402	3.32	-50.35	≤ -16.68	PASS
		High	Hop_2480	3.90	-48.72	≤ -16.1	PASS
2DH5	Ant1	Low	2402	4.78	-49.6	≤ -15.22	PASS
		High	2480	5.24	-48.6	≤ -14.76	PASS
		Low	Hop_2402	3.83	-49.49	≤ -16.17	PASS
		High	Hop_2480	4.77	-49.13	≤ -15.23	PASS
3DH5	Ant1	Low	2402	5.33	-49.19	≤ -14.67	PASS
		High	2480	5.21	-48.17	≤ -14.79	PASS
		Low	Hop_2402	2.46	-50.26	≤ -17.54	PASS
		High	Hop_2480	0.94	-48.56	≤ -19.06	PASS

Test Graph


DH5_Ant1_Low_2402

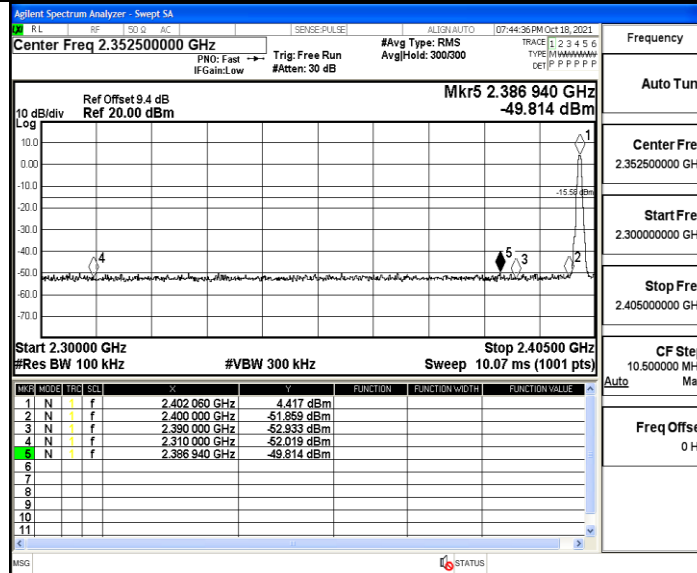


DH5_Ant1_High_2480

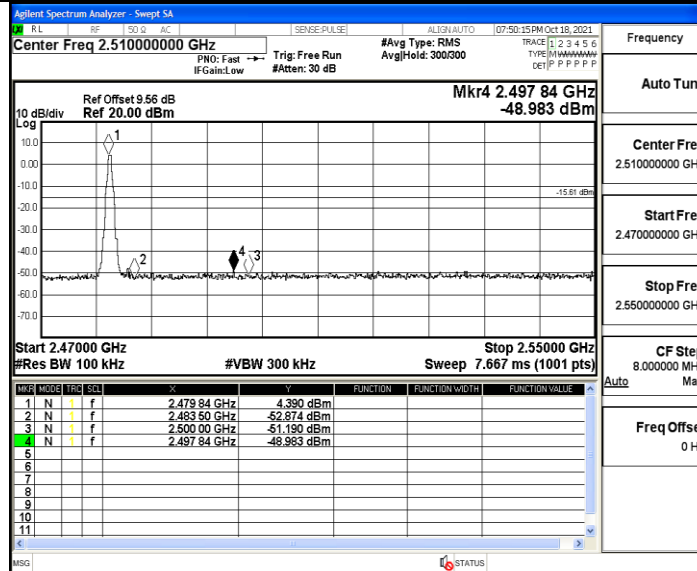


DH5_Ant1_Low_Hop_2402

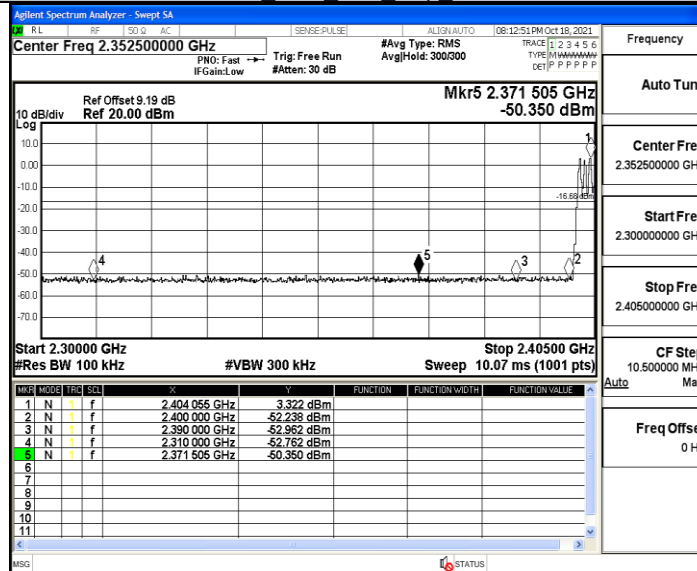


DH5_Ant1_High_Hop_2480

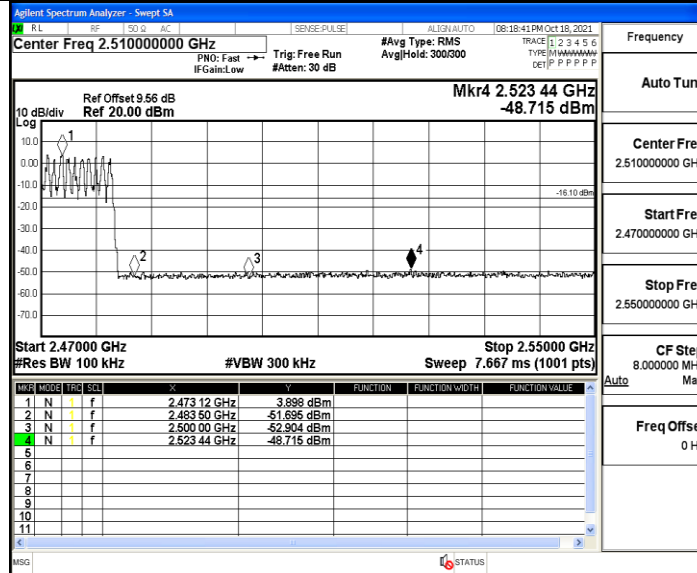


2DH5_Ant1_Low_2402

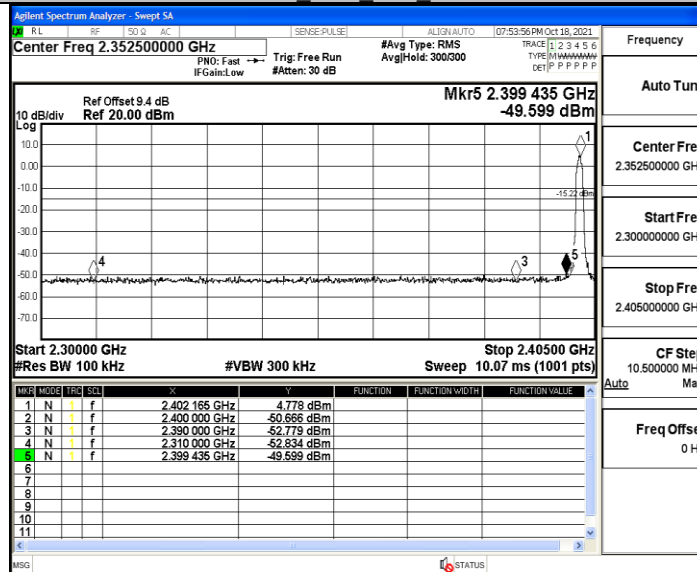


2DH5_Ant1_High_2480

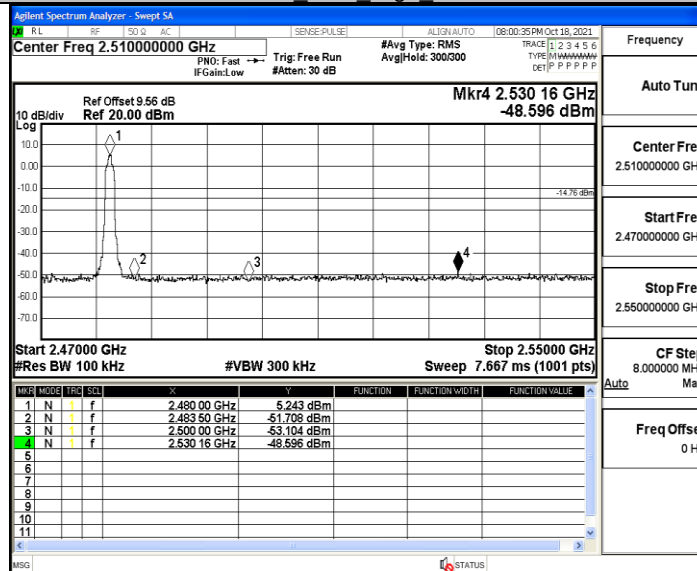


2DH5 Ant1 Low Hop 2402

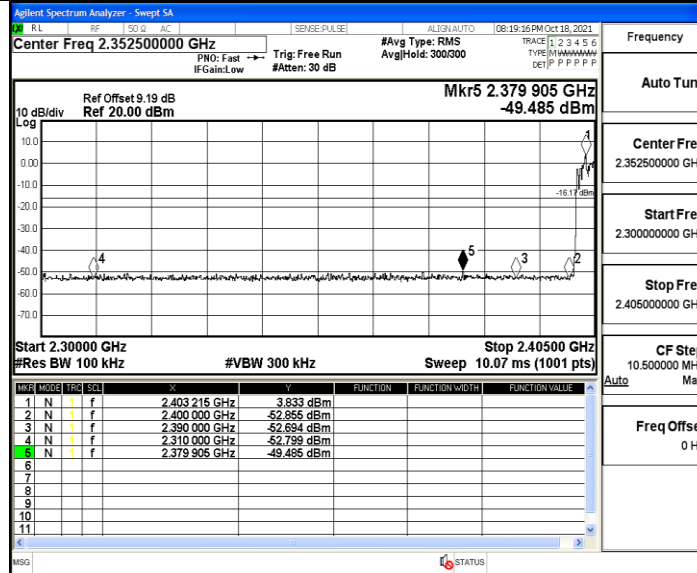


2DH5 Ant1 High Hop 2480

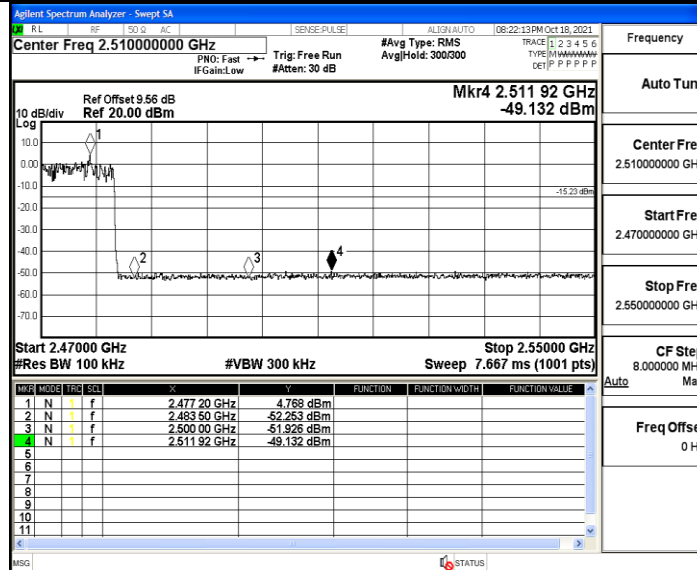


3DH5 Ant1 Low 2402

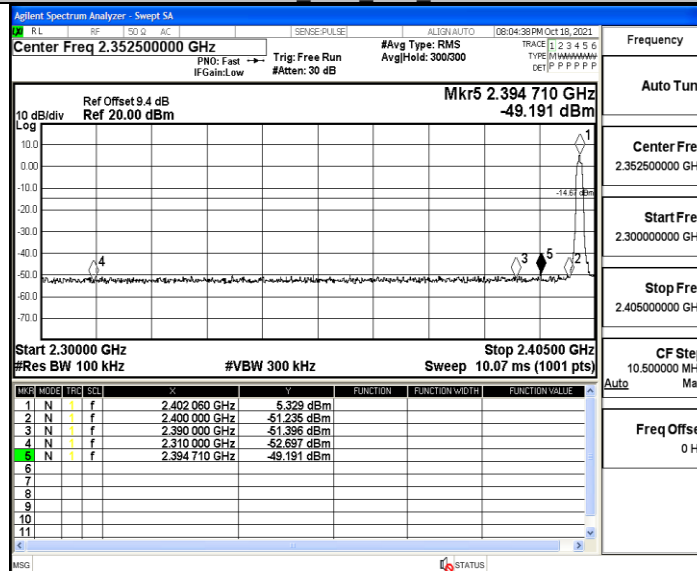


3DH5 Ant1 High 2480

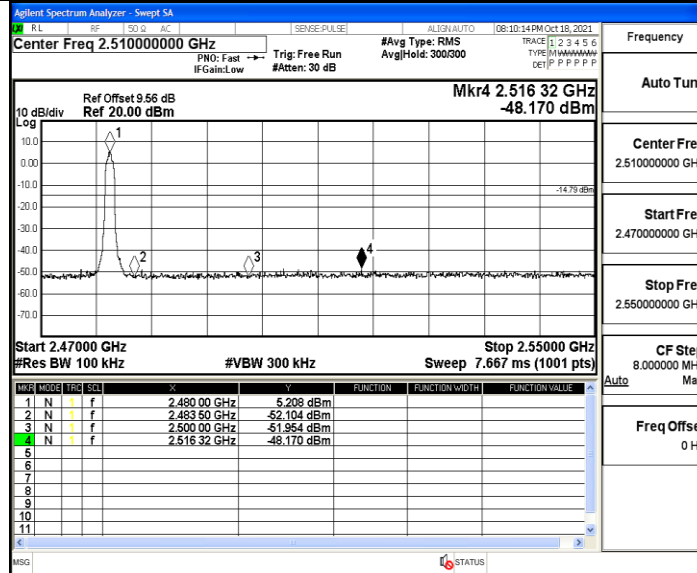


3DH5 Ant1 Low Hop 2402

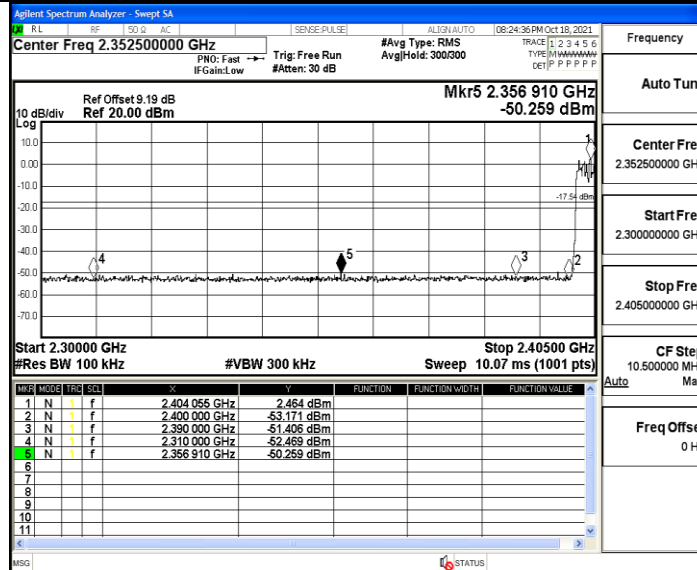


3DH5 Ant1 High Hop 2480

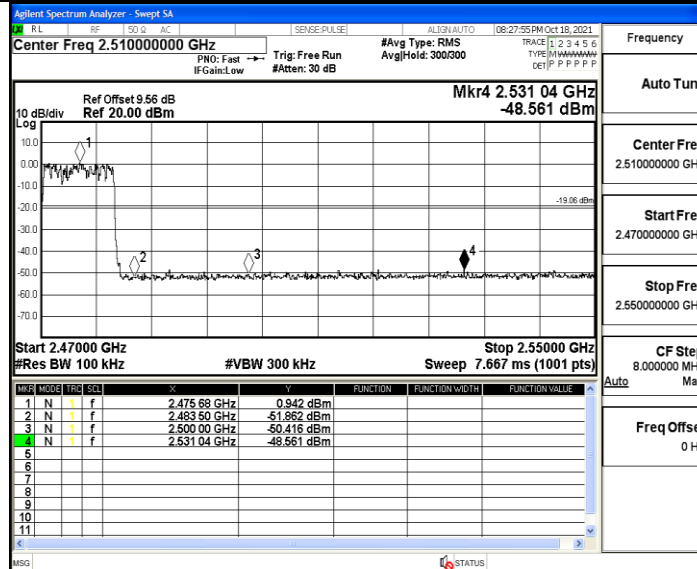


A.7 RF Conducted Spurious Emissions
Test Graph

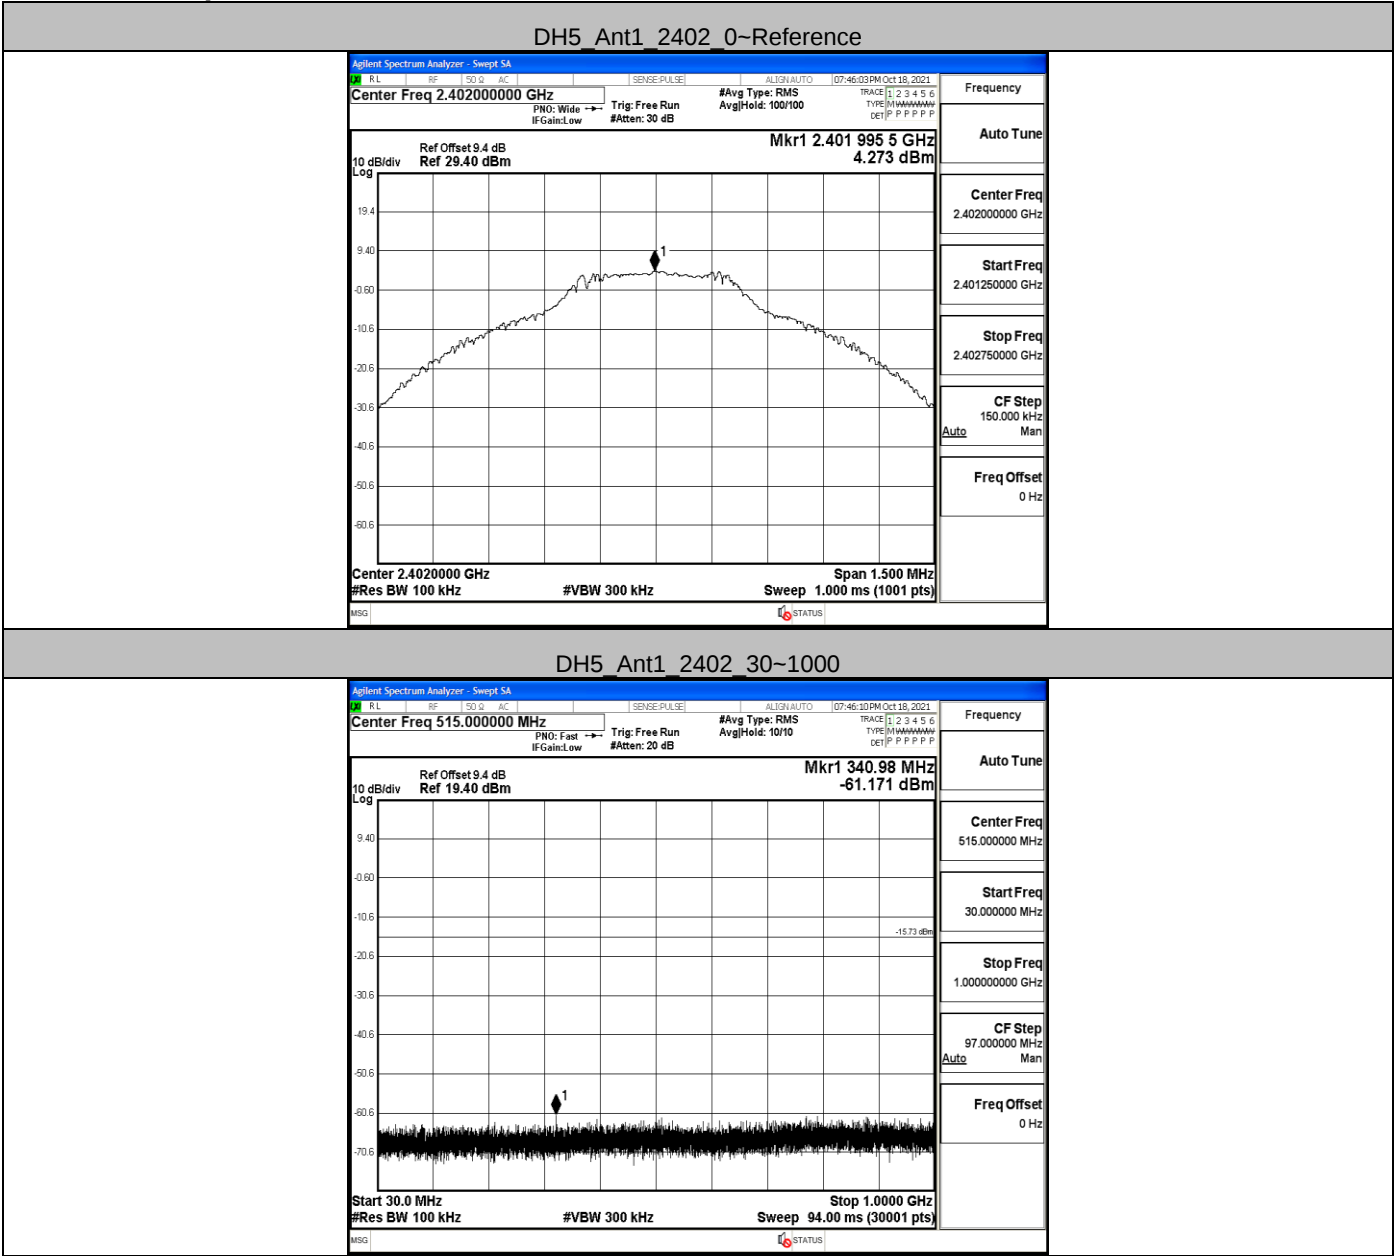


DH5 Ant1 2402 1000~26500

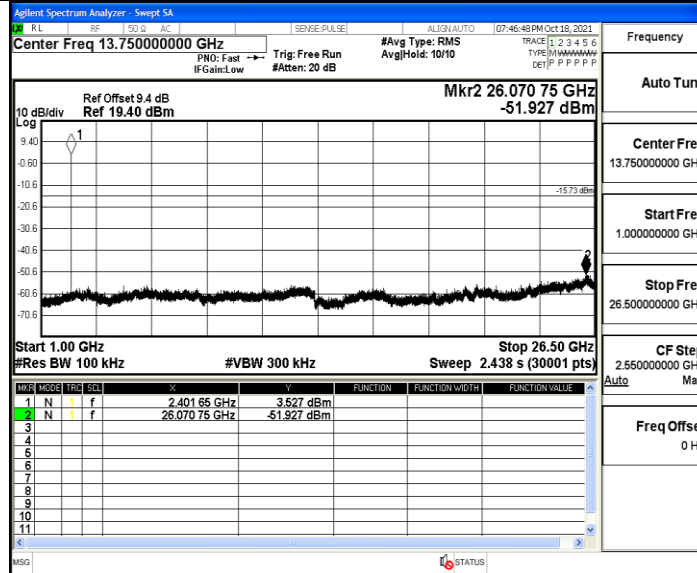


DH5 Ant1 2441 0-Reference

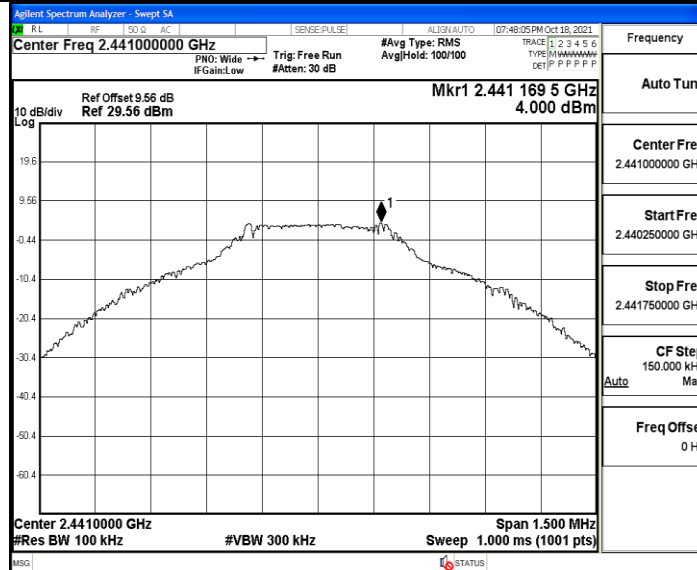


DH5 Ant1 2441 30~1000

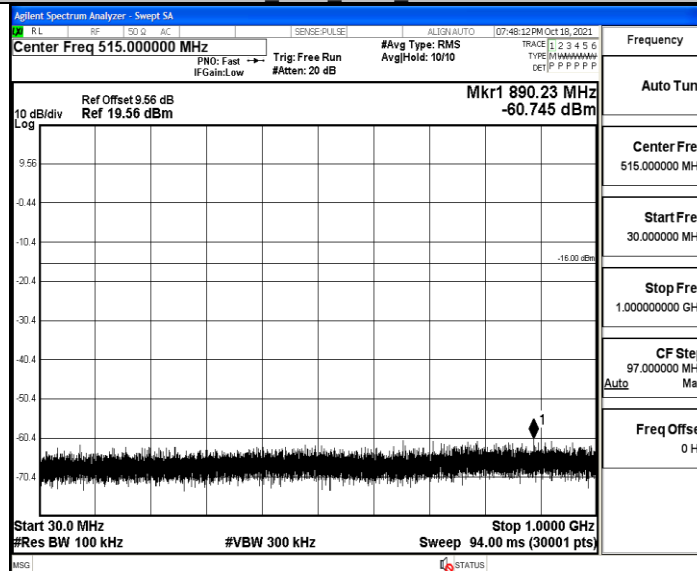


DH5 Ant1 2441 1000~26500

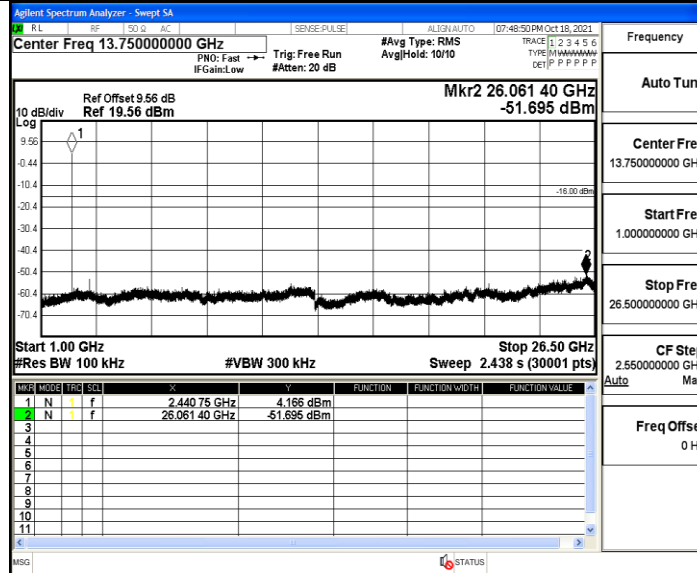


DH5 Ant1 2480 0-Reference

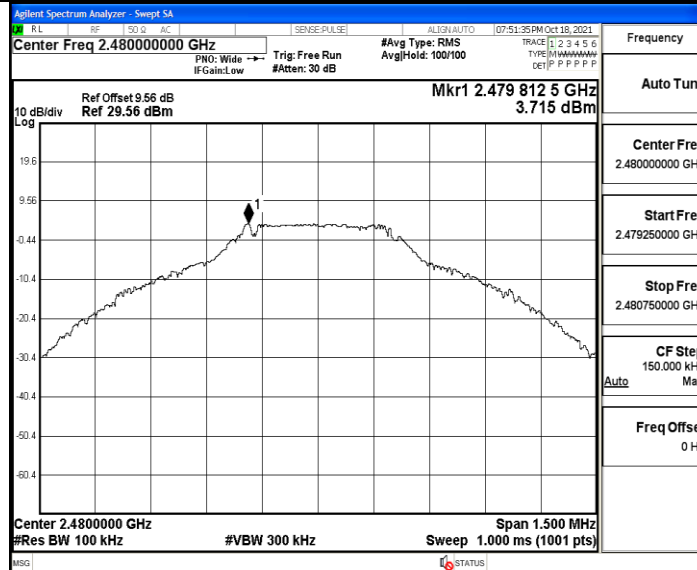


DH5 Ant1 2480 30~1000

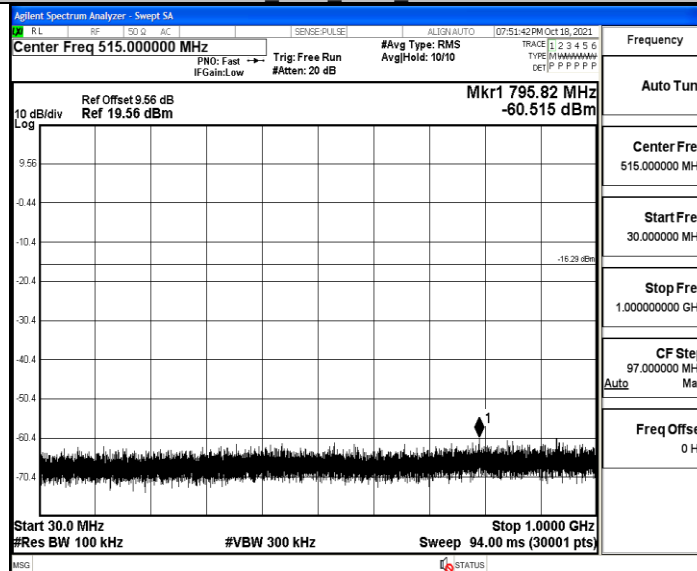


DH5 Ant1 2480 1000~26500

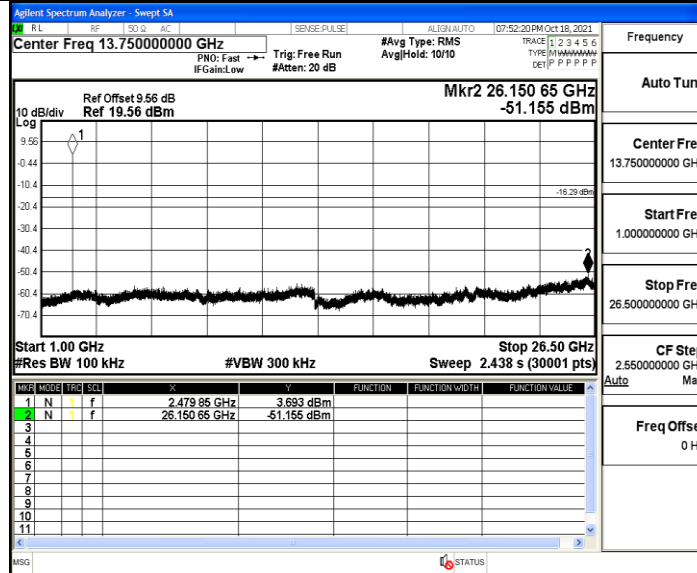


2DH5 Ant1 2402 0~Reference

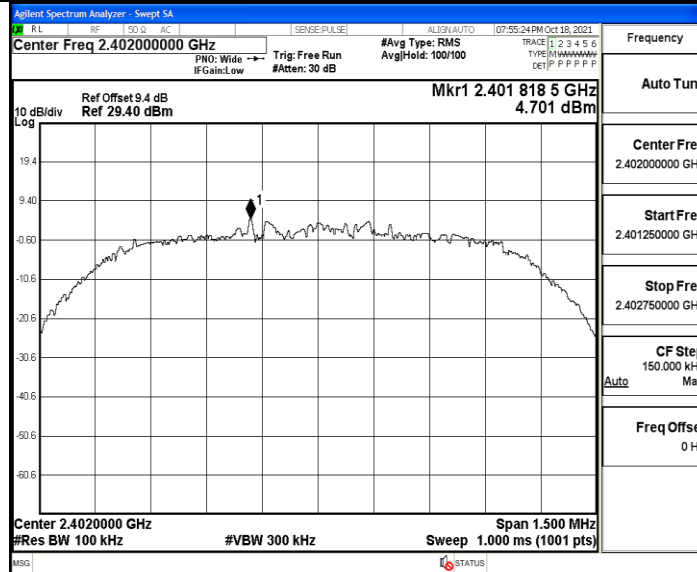


2DH5 Ant1 2402 30~1000

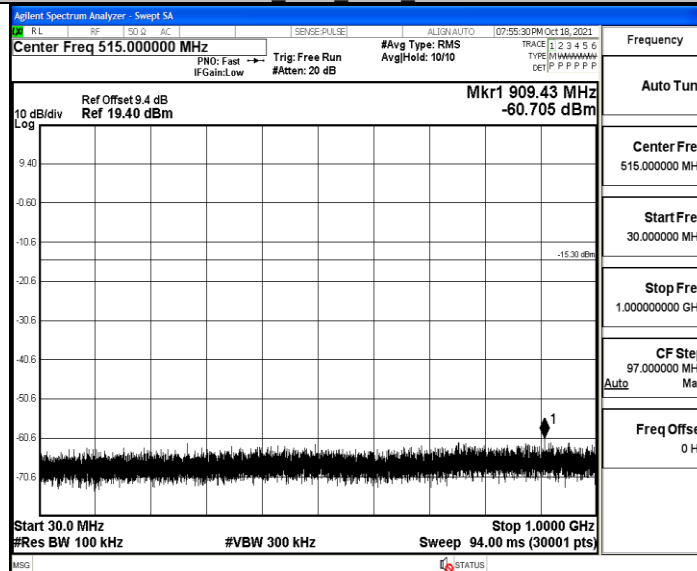


2DH5 Ant1 2402 1000~26500

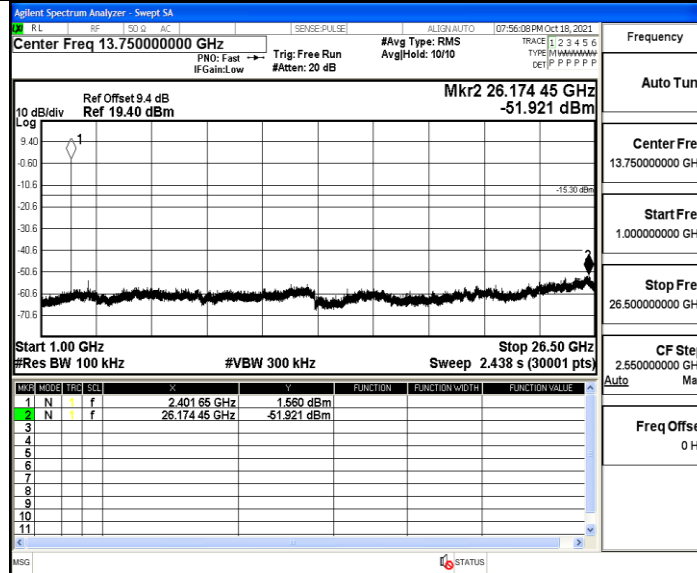


2DH5 Ant1 2441 0~Reference

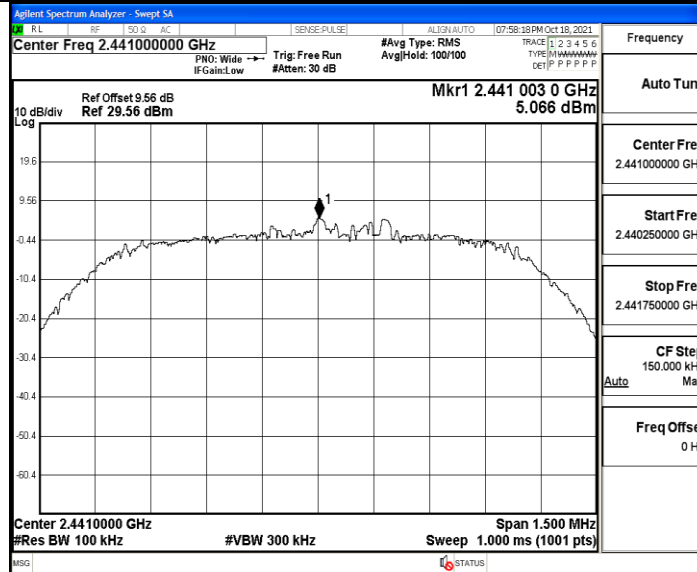


2DH5 Ant1 2441 30~1000

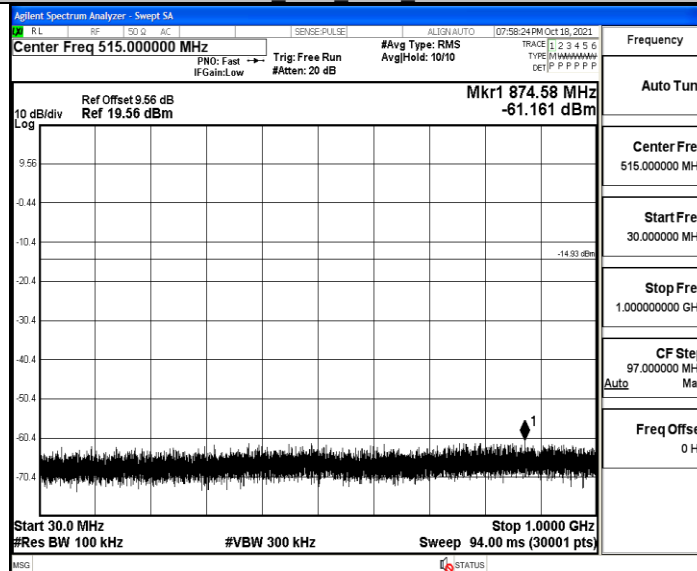


2DH5 Ant1 2441 1000~26500

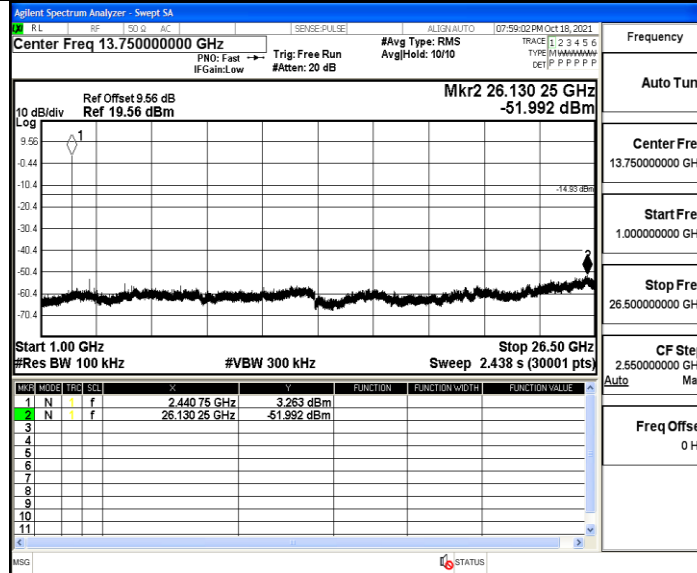


2DH5 Ant1 2480 0~Reference

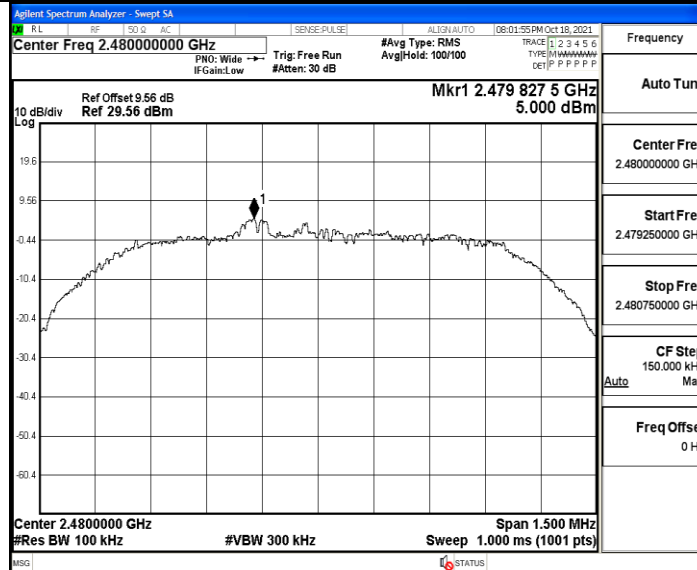


2DH5 Ant1 2480 30~1000

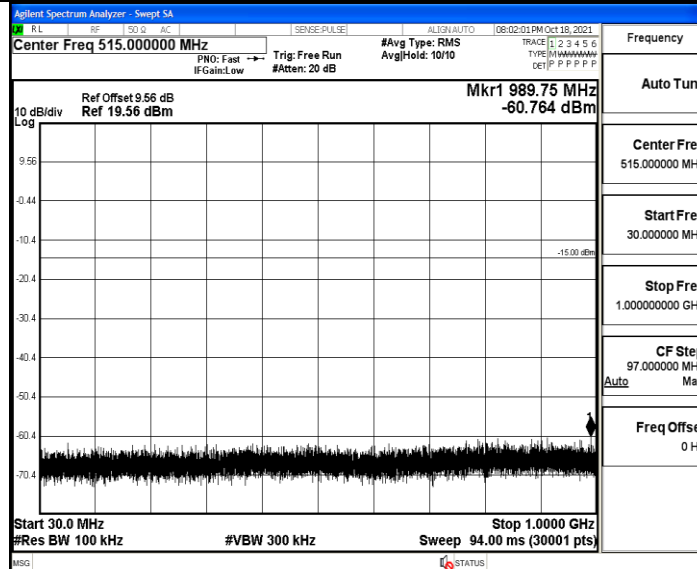


2DH5 Ant1 2480 1000-26500

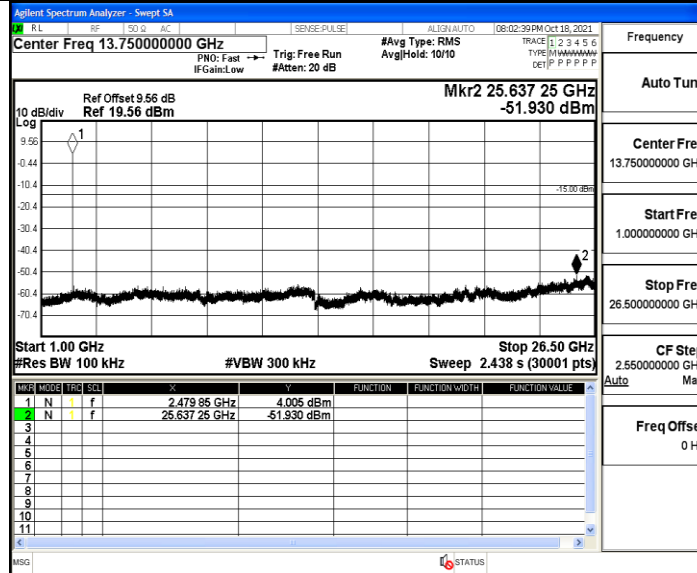


3DH5 Ant1 2402 0-Reference

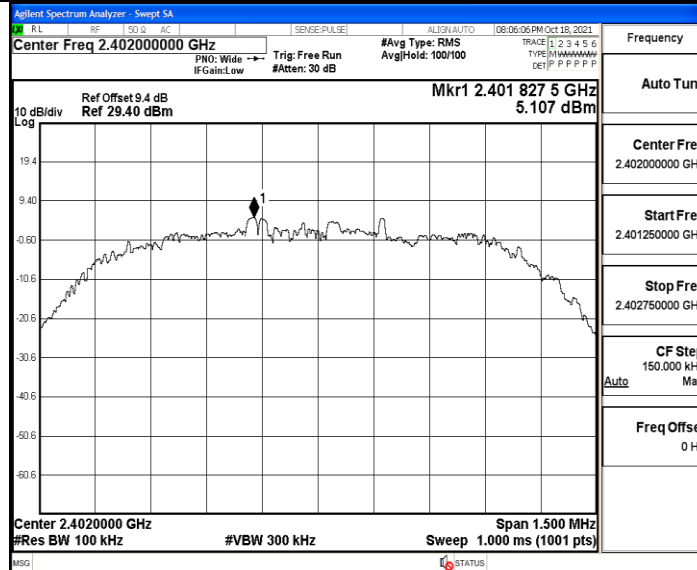


3DH5 Ant1 2402 30-1000

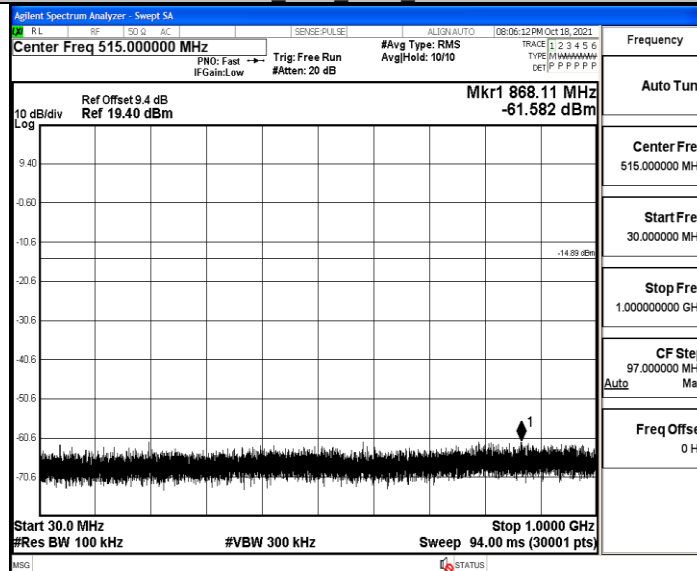


3DH5 Ant1 2402 1000~26500

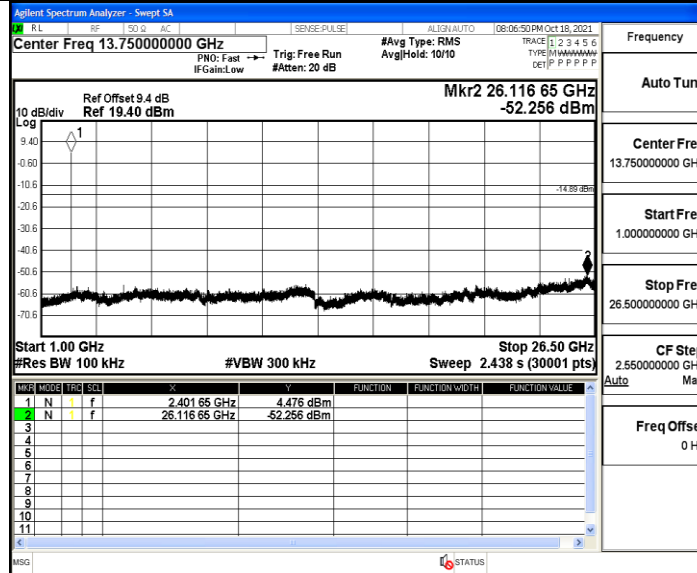


3DH5 Ant1 2441 0~Reference

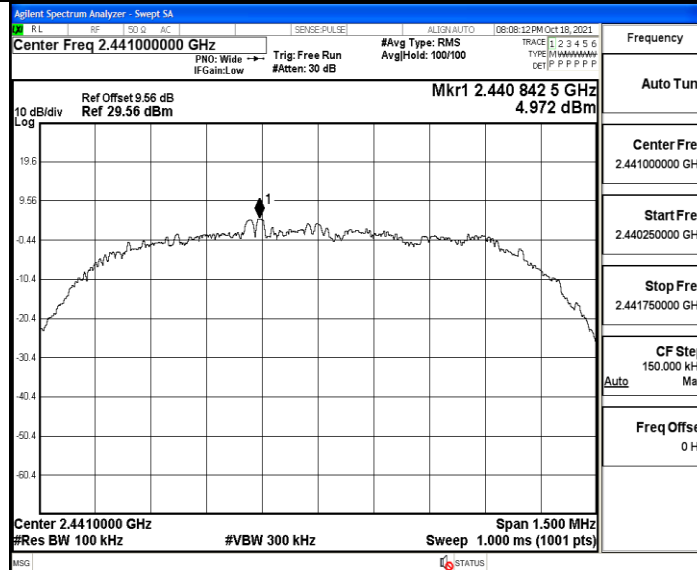


3DH5 Ant1 2441 30~1000

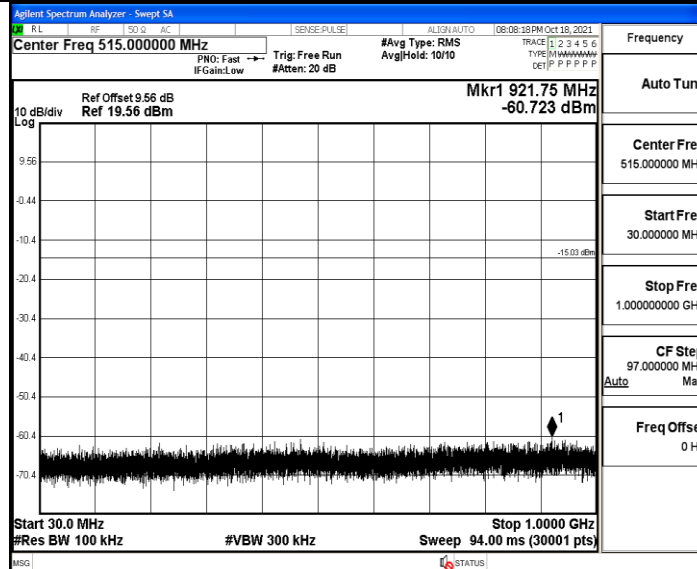


3DH5 Ant1 2441 1000-26500

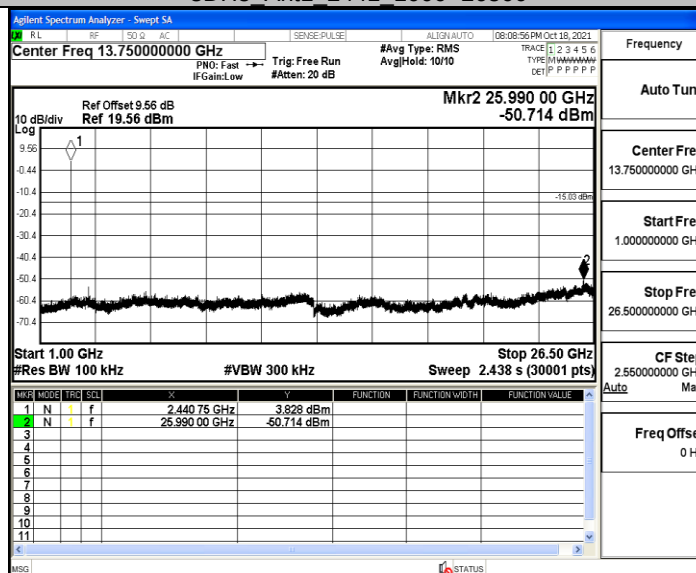


3DH5 Ant1 2480 0-Reference

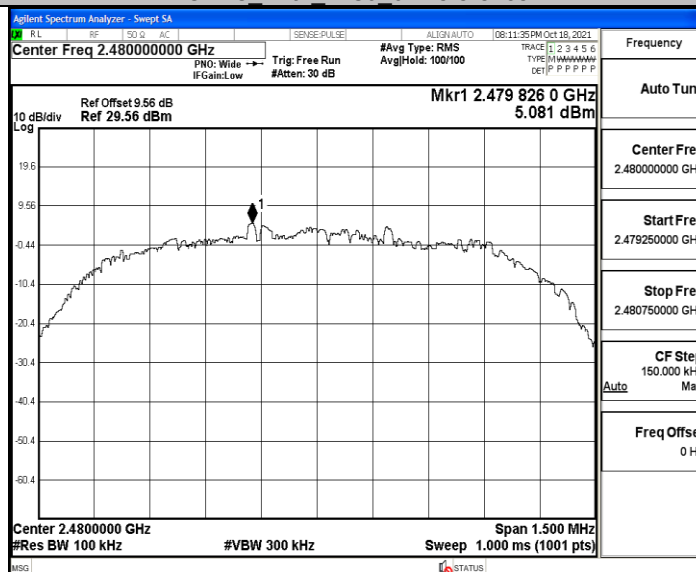

3DH5 Ant1 2480 30-1000

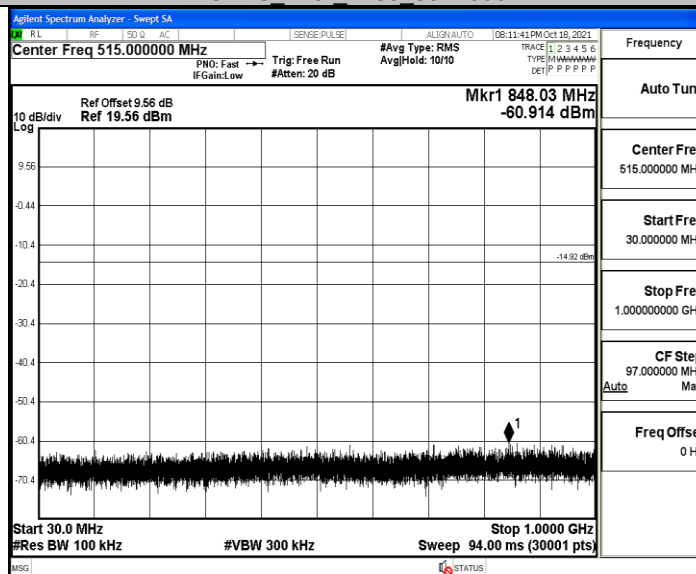

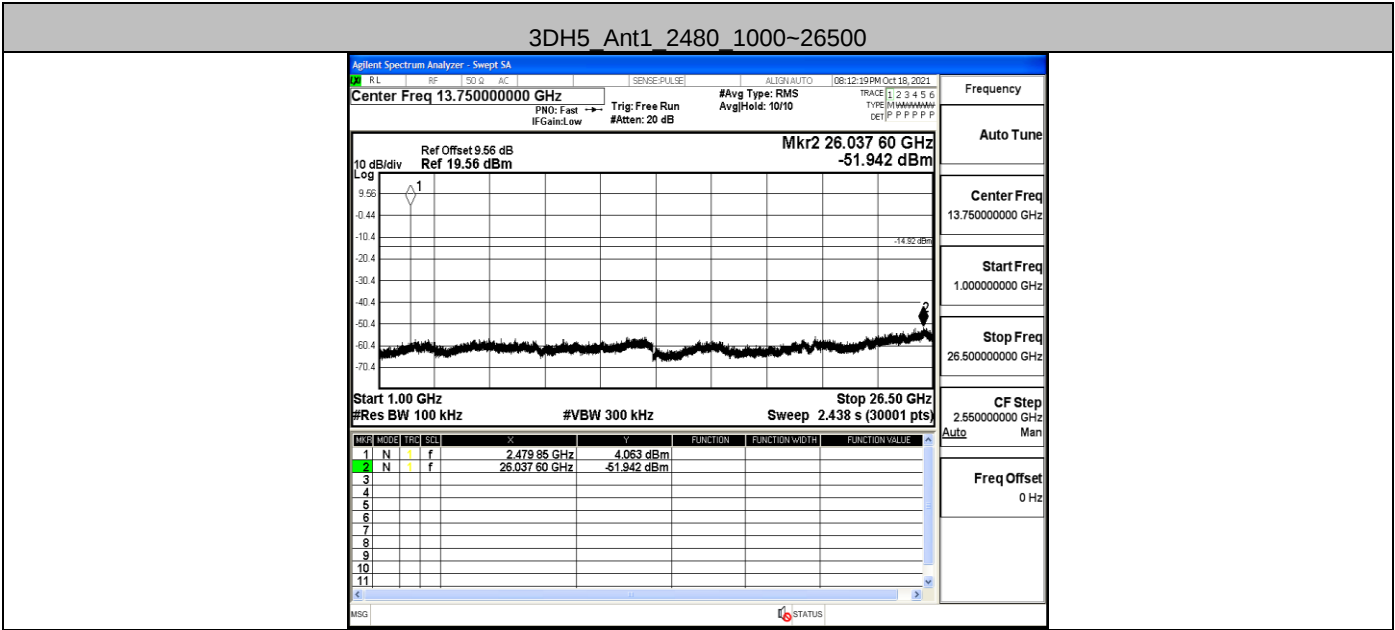


A.8 Restrict-band band-edge measurements

TestMode	Antenna	ChName	Channel	Detector	Freq(MHz)	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-48.95	≤-41.20	PASS
				AV	2387.885	-48.4	≤-41.20	PASS
				AV	2390.000	-48.59	≤-41.20	PASS
				Peak	2310.000	-40.06	≤-21.20	PASS
				Peak	2372.660	-38.67	≤-21.20	PASS
				Peak	2390.000	-40.64	≤-21.20	PASS
		High	2480	AV	2483.500	-47.29	≤-41.20	PASS
				AV	2483.520	-47.29	≤-41.20	PASS
				AV	2500.000	-47.79	≤-41.20	PASS
				Peak	2483.500	-40.52	≤-21.20	PASS
				Peak	2486.080	-38.08	≤-21.20	PASS
				Peak	2500.000	-41.27	≤-21.20	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-48.94	≤-41.20	PASS
				AV	2387.570	-48.42	≤-41.20	PASS
				AV	2390.000	-48.54	≤-41.20	PASS
				Peak	2310.000	-41.96	≤-21.20	PASS
				Peak	2359.955	-39.23	≤-21.20	PASS
				Peak	2390.000	-42.07	≤-21.20	PASS
		High	2480	AV	2483.500	-46.67	≤-41.20	PASS
				AV	2483.520	-46.67	≤-41.20	PASS
				AV	2500.000	-47.97	≤-41.20	PASS
				Peak	2483.500	-41.65	≤-21.20	PASS
				Peak	2488.480	-37.97	≤-21.20	PASS
				Peak	2500.000	-41.12	≤-21.20	PASS
3DH5	Ant1	Low	2402	AV	2310.000	-48.86	≤-41.20	PASS
				AV	2389.985	-48.42	≤-41.20	PASS
				AV	2390.000	-48.42	≤-41.20	PASS
				Peak	2310.000	-41.99	≤-21.20	PASS
				Peak	2388.200	-38.27	≤-21.20	PASS
				Peak	2390.000	-41.97	≤-21.20	PASS
		High	2480	AV	2483.500	-46.68	≤-41.20	PASS
				AV	2483.520	-46.68	≤-41.20	PASS
				AV	2500.000	-47.85	≤-41.20	PASS
				Peak	2483.500	-41.95	≤-21.20	PASS
				Peak	2490.080	-38.61	≤-21.20	PASS
				Peak	2500.000	-41.34	≤-21.20	PASS


1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


DH5 Ant1 Low 2402 AV

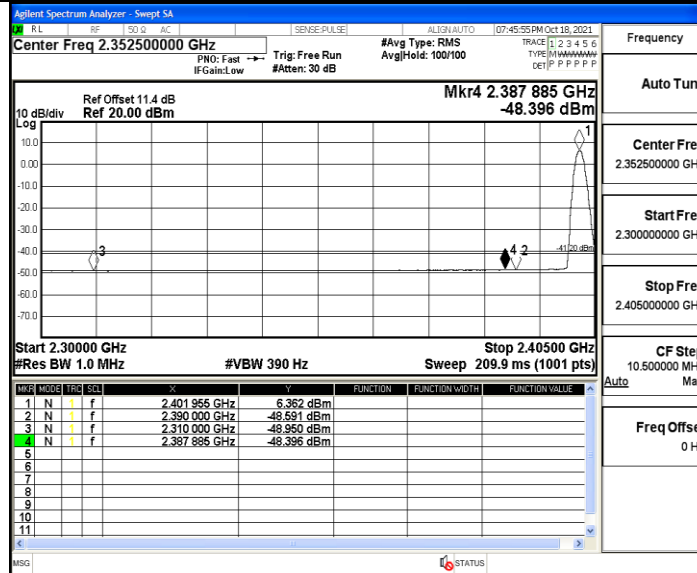


DH5 Ant1 Low 2402 Peak

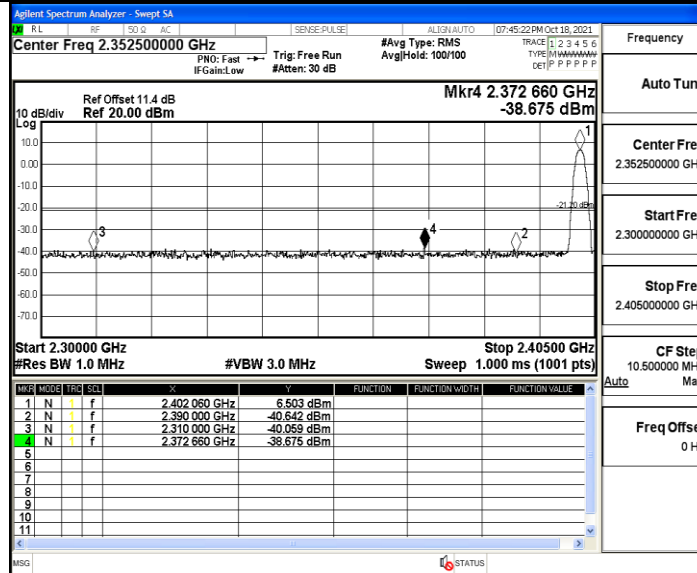


DH5 Ant1 High 2480 AV

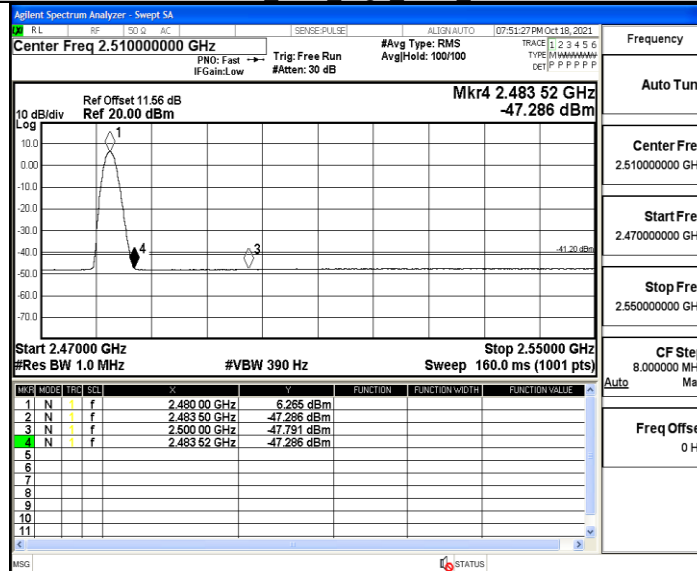


DH5 Ant1 High 2480 Peak

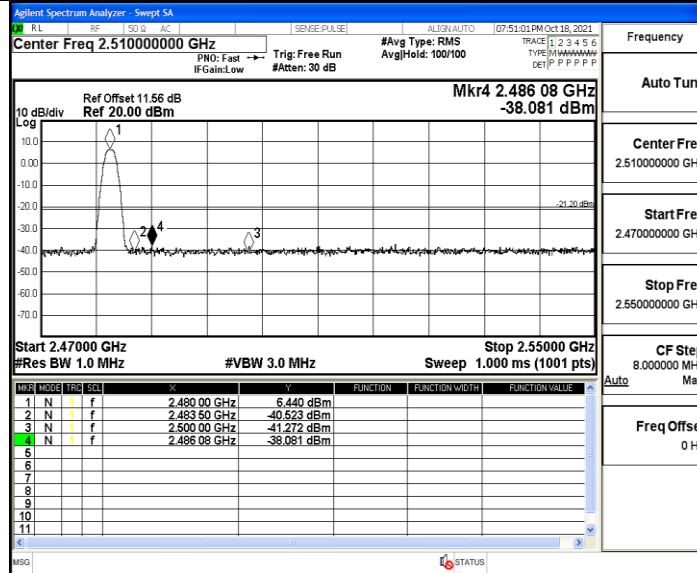


2DH5 Ant1 Low 2402 AV

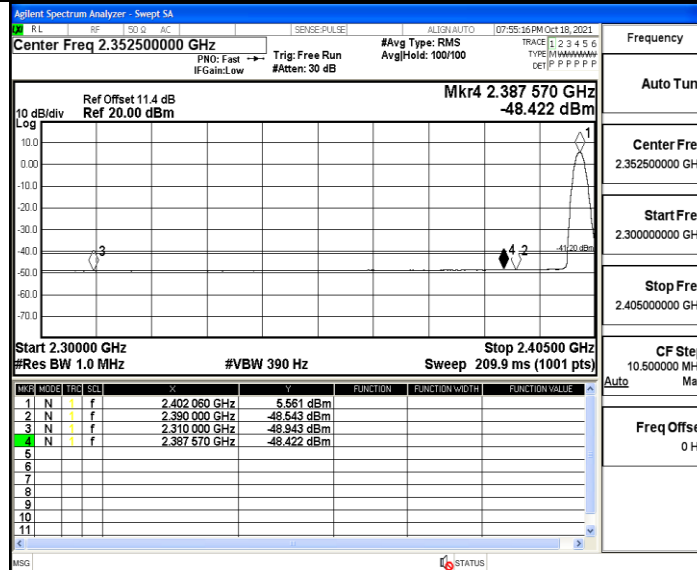


2DH5 Ant1 Low 2402 Peak

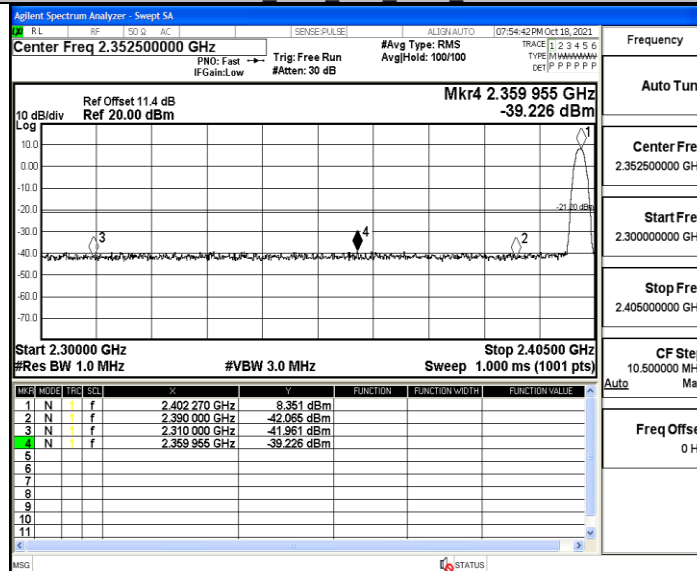


2DH5 Ant1_High_2480_AV

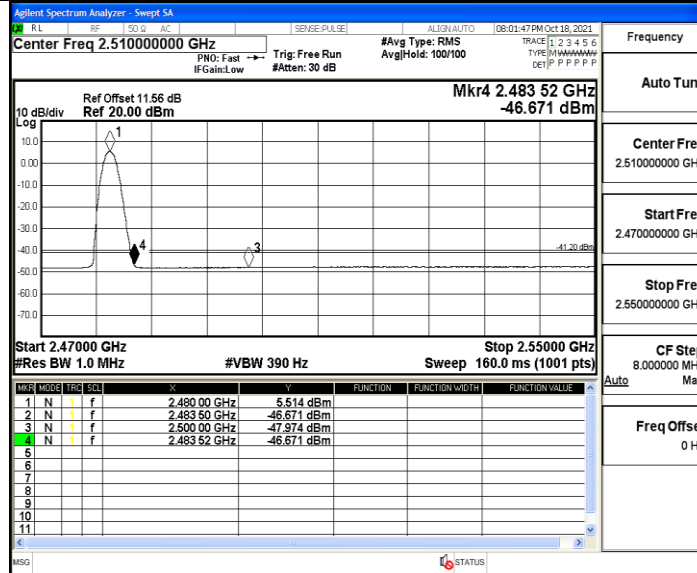


2DH5 Ant1_High_2480_Peak

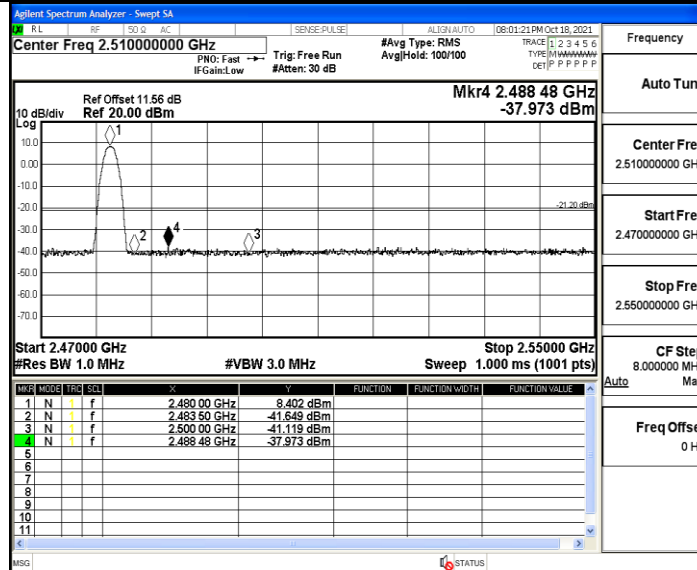


3DH5 Ant1_Low_2402_AV

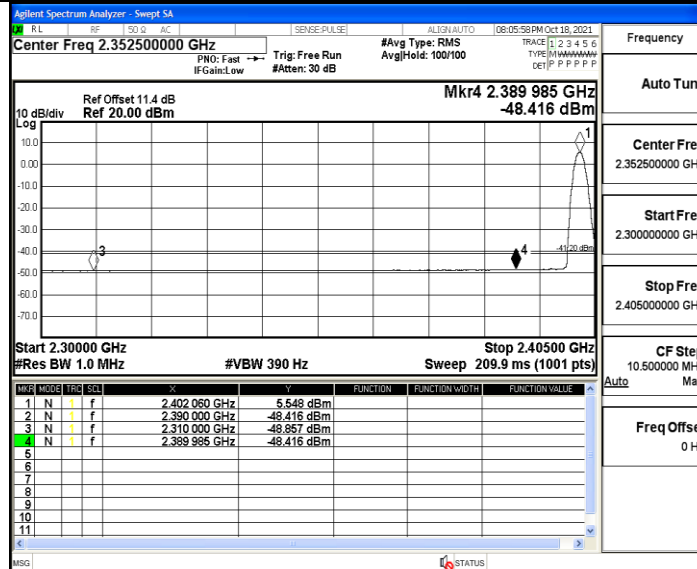

3DH5_Ant1_Low_2402_Peak

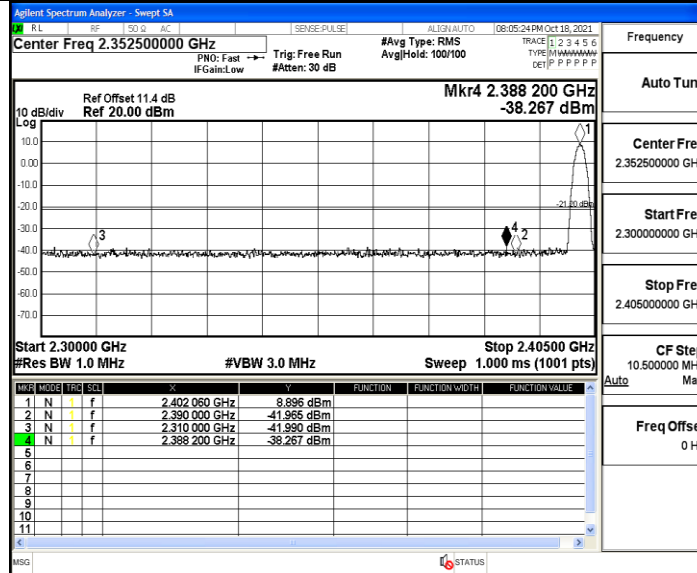

3DH5_Ant1_High_2480_AV

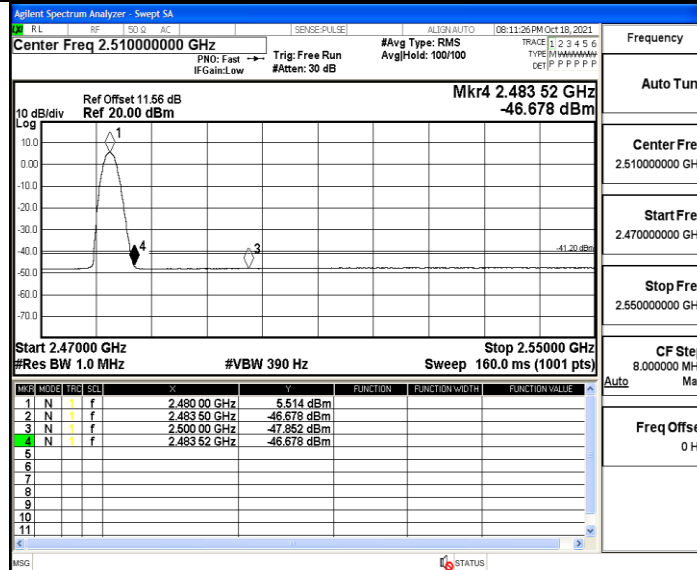

3DH5_Ant1_High_2480_Peak

