

FCC TEST REPORT

Client Name : EDA Technology Shanghai Co.,Ltd

Address : Room 301, Building 24, Shengchuang Enterprise Park,
No.1661 Jialuo Road, Jiading District, Shanghai, China

Product Name : LoRaWan Concentrator Gateway Module

Date : Apr. 23, 2022

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Configuration.....	6
1.5. Description Of Test Setup.....	7
1.6. Test Equipment List.....	8
1.7. Measurement Uncertainty.....	9
1.8. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	14
4.1. Test Standard and Limit.....	14
4.2. Test Setup.....	14
4.3. Test Procedure.....	15
4.4. Test Data.....	16
5. Maximum Peak Output Power Test.....	22
5.1. Test Standard and Limit.....	22
5.2. Test Setup.....	22
5.3. Test Procedure.....	22
5.4. Test Data.....	22
6. 6DB Occupy Bandwidth Test.....	23
6.1. Test Standard and Limit.....	23
6.2. Test Setup.....	23
6.3. Test Procedure.....	23
6.4. Test Data.....	23
7. Power Spectral Density Test.....	25
7.1. Test Standard and Limit.....	25
7.2. Test Setup.....	25
7.3. Test Procedure.....	25
7.4. Test Data.....	25
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	27
8.1. Test Standard and Limit.....	27
8.2. Test Setup.....	27
8.3. Test Procedure.....	27

8.4. Test Data.....	27
9. Antenna Requirement.....	30
9.1. Test Standard and Requirement.....	30
9.2. Antenna Connected Construction.....	30
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	31
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	33
APPENDIX III -- INTERNAL PHOTOGRAPH.....	34

TEST REPORT

Applicant : EDA Technology Shanghai Co.,Ltd
Manufacturer : EDA Technology Shanghai Co.,Ltd
Product Name : LoRaWan Concentrator Gateway Module
Model No. : ED-GW1303S-915M, ED-GW1303
Trade Mark : N.A.
Rating(s) : Input: DC 3.3V

Test Standard(s) : FCC Part15 Subpart, Section 15.247

Test Method(s) : ANSI C63.10: 2020, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of receipt

Mar. 21, 2022

Date of Test

Mar. 21~Apr. 14, 2022

Prepared By

Nian Xiu Chen

(Nianxiu Chen)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	EDA Technology Shanghai Co.,Ltd
Address	:	Room 301, Building 24, Shengchuang Enterprise Park, No.1661 Jialuo Road, Jiading District, Shanghai, China
Manufacturer	:	EDA Technology Shanghai Co.,Ltd
Address	:	Room 301, Building 24, Shengchuang Enterprise Park, No.1661 Jialuo Road, Jiading District, Shanghai, China
Factory	:	EDA Technology Shanghai Co.,Ltd
Address	:	Room 301, Building 24, Shengchuang Enterprise Park, No.1661 Jialuo Road, Jiading District, Shanghai, China

1.2. Description of Device (EUT)

Product Name	:	LoRaWan Concentrator Gateway Module
Model No.	:	ED-GW1303S-915M, ED-GW1303 (Note: All samples are the same except the model number and enclosure, so we prepare "ED-GW1303S-915M" for test only.)
Trade Mark	:	N.A.
Test Power Supply	:	AC 120V, 60Hz for Adapter/ DC 3.3V
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	FHSS: Channel Bands: 902.3 ~ 914.9MHz DTS: Channel Bands: 923.3 ~ 927.5MHz
	Number of Channel:	FHSS: 64 Channels DTS: 8 Channels
	Modulation Type:	LoRa
	Antenna Type:	External Antenna
	Antenna Gain(Peak):	2.5 dBi(Provided by customer)
	Adapter:	N/A
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report for DTS only.		

1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: KSA-15E-051300HK Input: 100-240V~50/60Hz, 0.5A Output: DC 5.1V, 3.0A, 15.3W
---------	---	--

1.4. Description of Test Configuration



The system was configured for testing in testing mode, which was provided by manufacturer.

For LoRa mode, Detailed Frequency as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	923.3	5	925.7
2	923.9	6	926.3
3	924.5	7	926.9
4	925.1	8	927.5

Note: EUT was tested with Channel 1, 4 and 8.

1.5. Description Of Test Setup

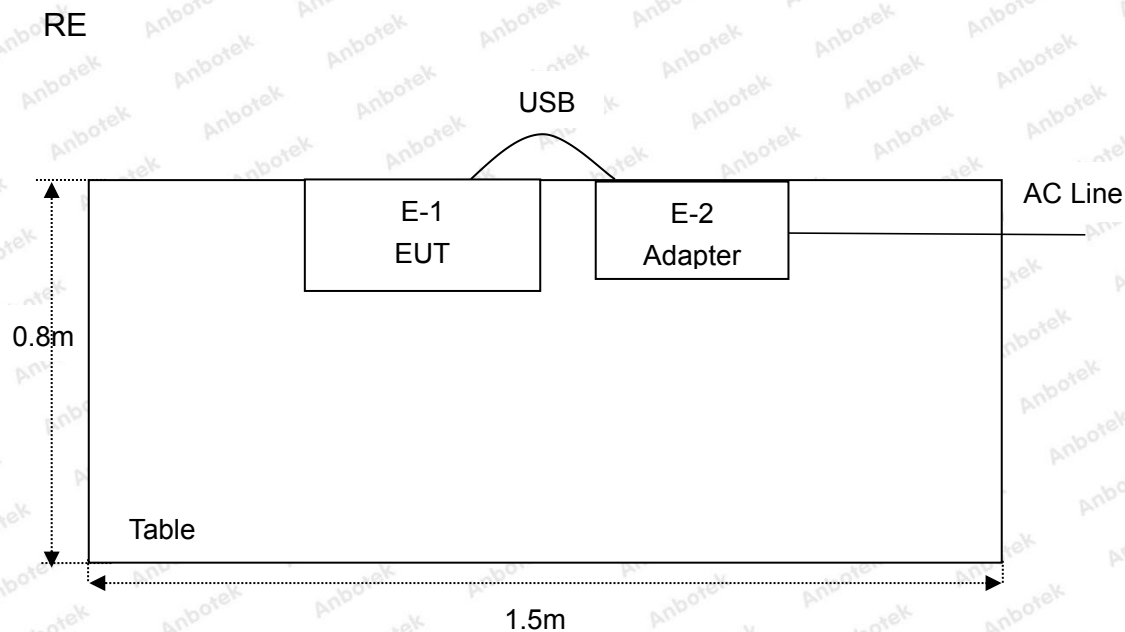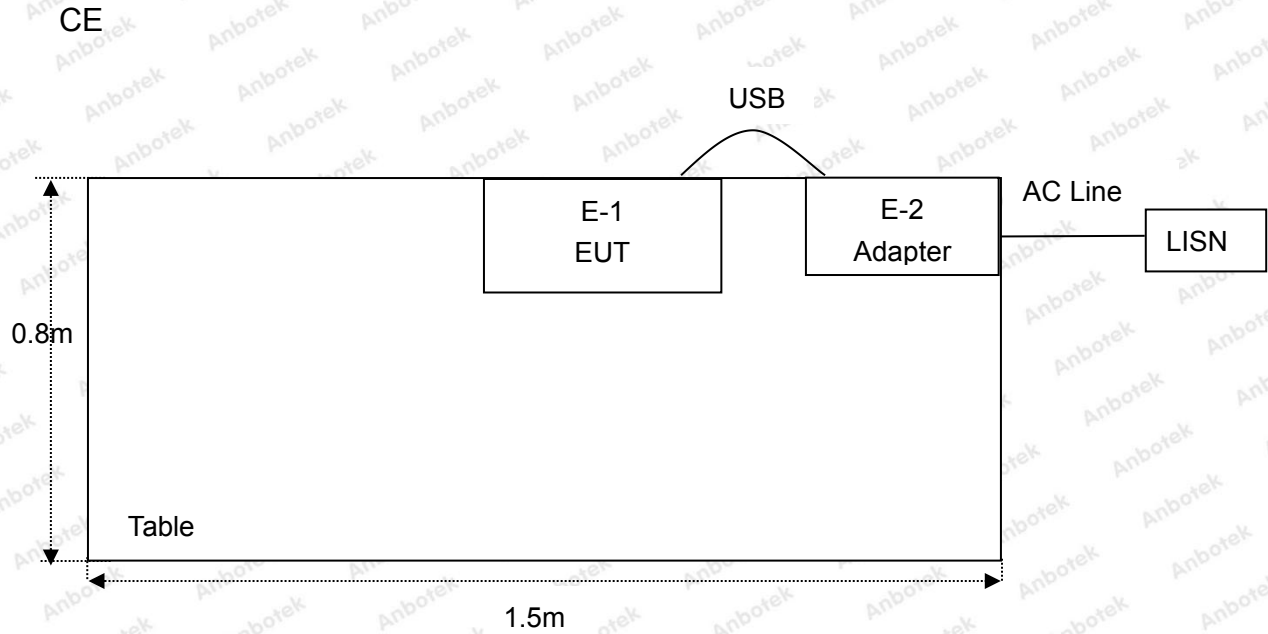

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 22, 2021	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test


3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

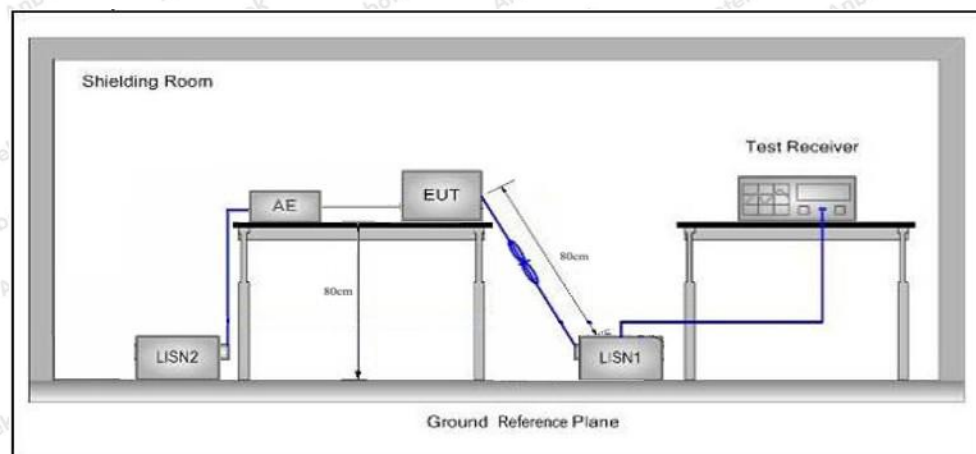

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all the modes, and found CH04 (TX) which is the worst case, only the worst case is recorded in the report.

Please to see the following pages.


Report No.: 18220WC20050301

FCC ID: 2A3GIEDGW1303S

Page 12 of 34


Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH04
 Test Specification: AC 120V, 60Hz for Adapter
 Comment: Live Line
 Tem.: 22.8°C Hum.: 51%

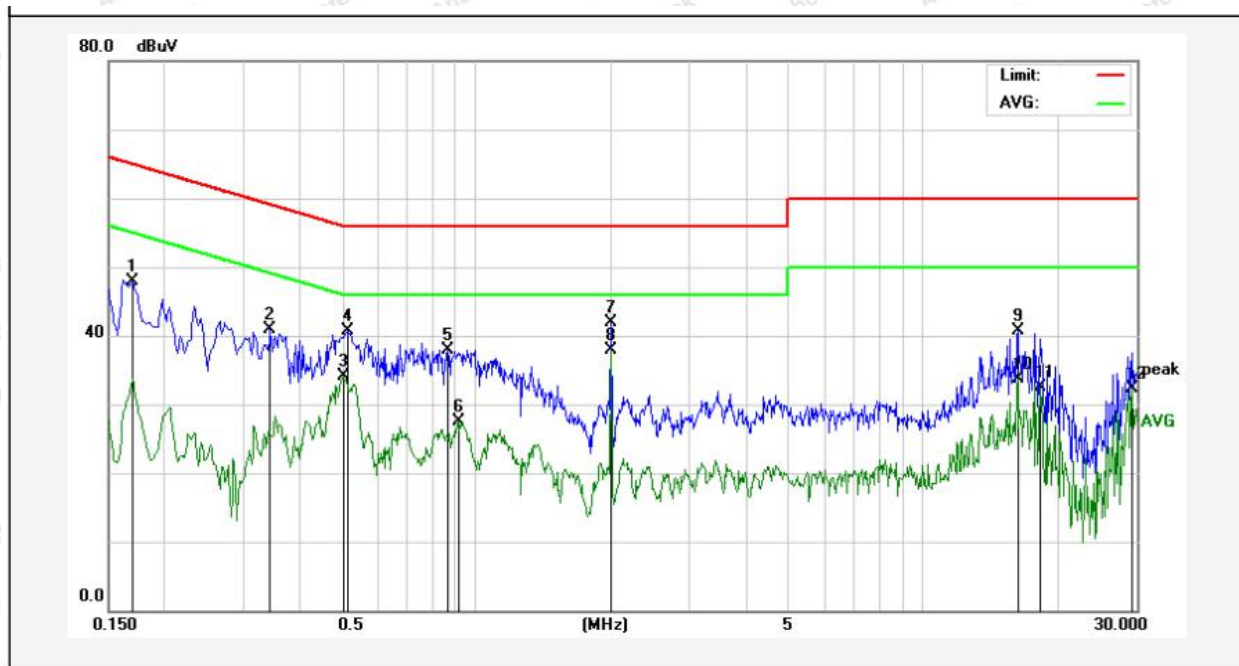

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1700	47.72	0.12	47.84	64.96	-17.12	QP	
2	0.3460	40.81	0.12	40.93	59.06	-18.13	QP	
3	0.5020	33.96	0.15	34.11	46.00	-11.89	AVG	
4	0.5140	40.55	0.15	40.70	56.00	-15.30	QP	
5	0.8660	37.84	0.15	37.99	56.00	-18.01	QP	
6	0.9180	27.42	0.15	27.57	46.00	-18.43	AVG	
7	2.0020	41.84	0.12	41.96	56.00	-14.04	QP	
8	2.0020	37.85	0.12	37.97	46.00	-8.03	AVG	
9	16.2300	40.57	0.18	40.75	60.00	-19.25	QP	
10	16.2300	33.55	0.18	33.73	50.00	-16.27	AVG	
11	18.2420	32.30	0.19	32.49	50.00	-17.51	AVG	
12	29.2340	32.01	0.34	32.35	50.00	-17.65	AVG	

Test Site: 1# Shielded Room
Operating Condition: CH04
Test Specification: AC 120V, 60Hz for Adapter
Comment: Neutral Line
Tem.: 22.8°C Hum.: 51%

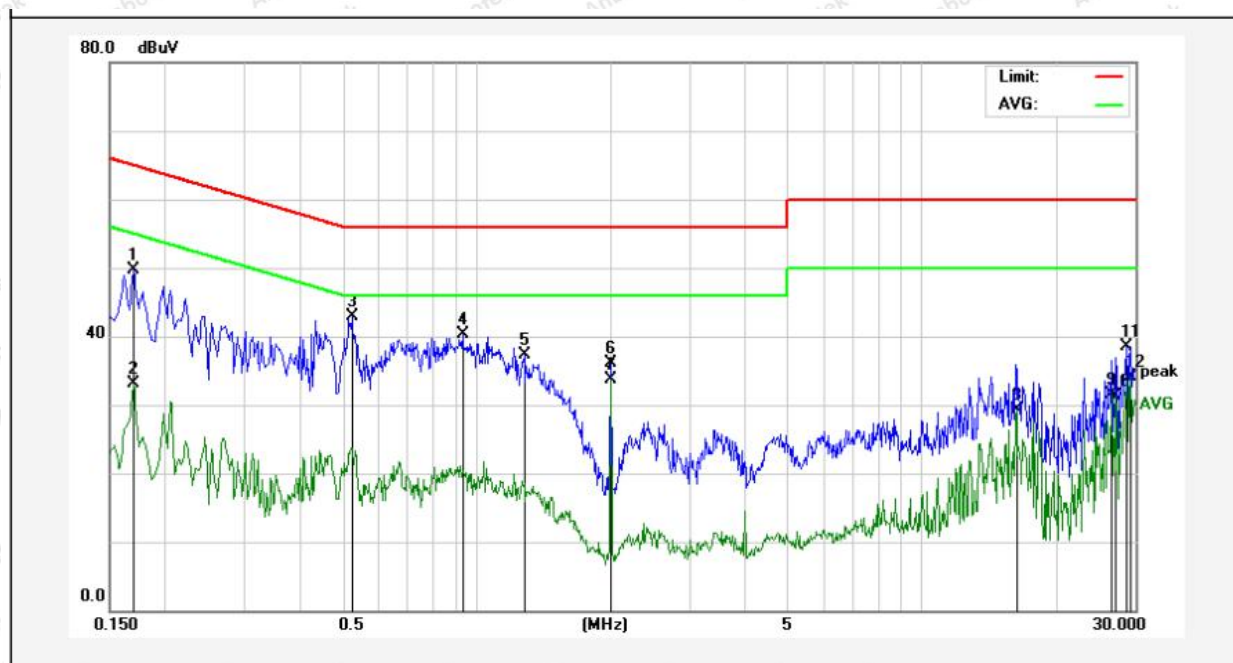

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1700	49.61	0.12	49.73	64.96	-15.23	QP	
2	0.1700	32.94	0.12	33.06	54.96	-21.90	AVG	
3	0.5260	42.68	0.15	42.83	56.00	-13.17	QP	
4	0.9300	40.08	0.15	40.23	56.00	-15.77	QP	
5	1.2780	37.08	0.14	37.22	56.00	-18.78	QP	
6	2.0020	36.00	0.12	36.12	56.00	-19.88	QP	
7	2.0020	33.67	0.12	33.79	46.00	-12.21	AVG	
8	16.2300	29.03	0.18	29.21	50.00	-20.79	AVG	
9	26.6100	31.18	0.23	31.41	50.00	-18.59	AVG	
10	27.1580	31.09	0.26	31.35	50.00	-18.65	AVG	
11	28.6860	38.24	0.32	38.56	60.00	-21.44	QP	
12	29.2340	33.67	0.34	34.01	50.00	-15.99	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

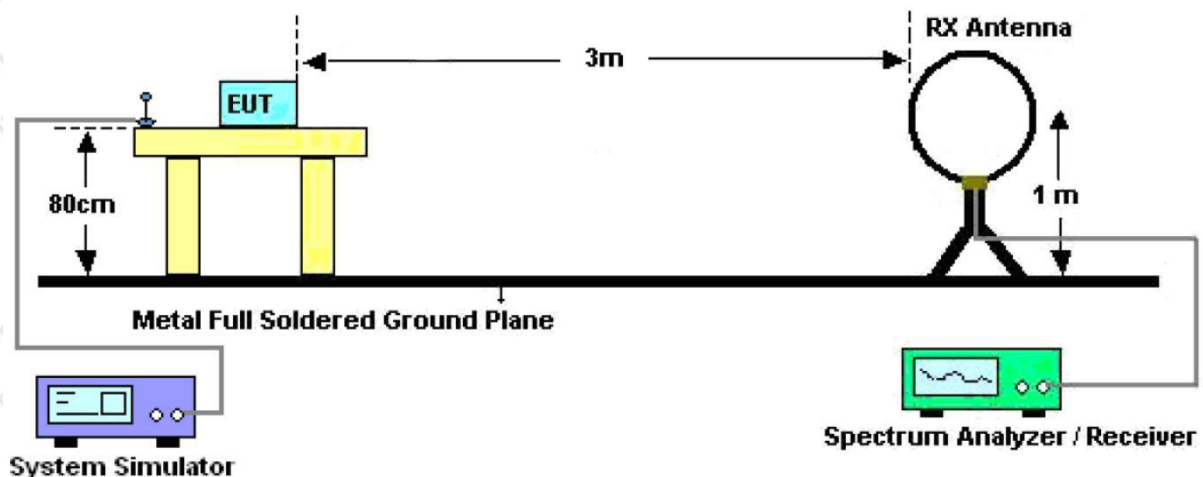


Figure 1. Below 30MHz

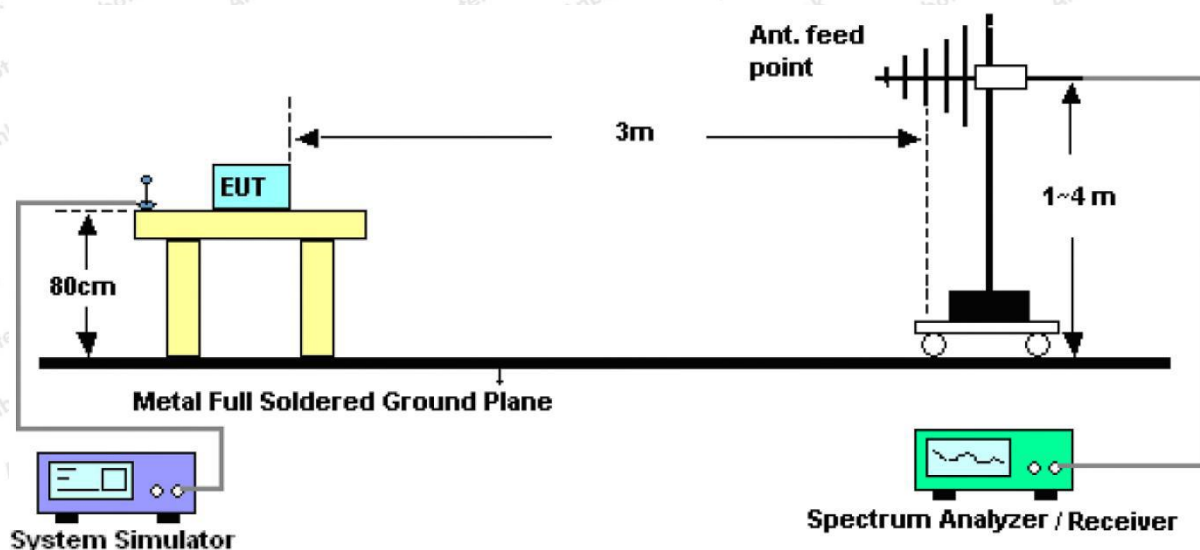


Figure 2. 30MHz to 1GHz

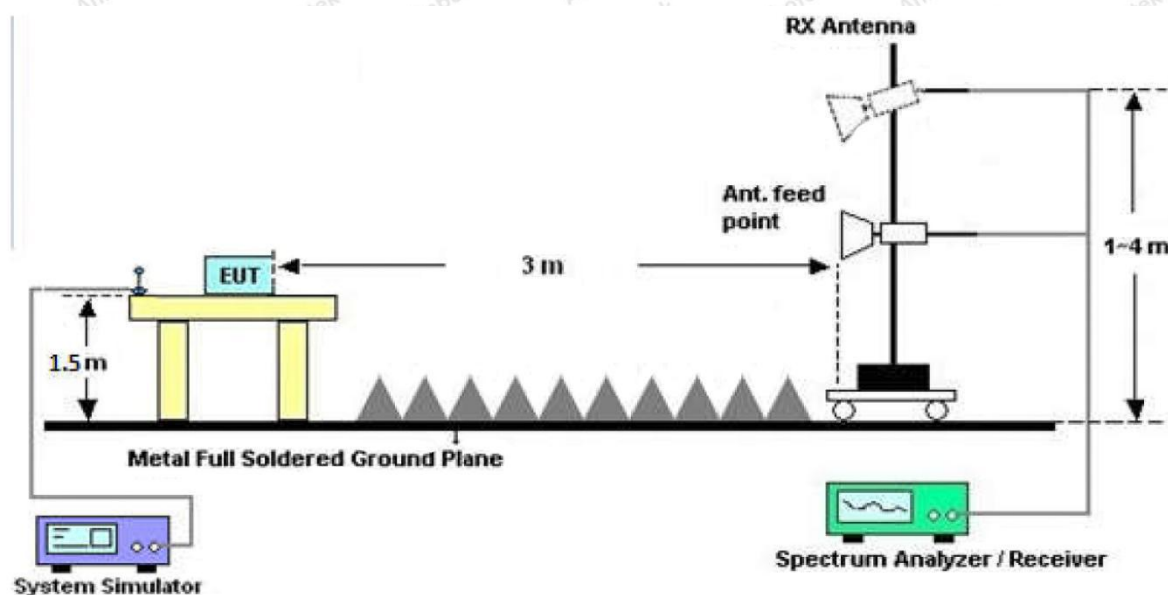


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9°6°6° Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS


During the test, pre-scan all the modes, and found the CH04 (TX) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Test Results (30~1000MHz)

Test Mode: CH04
Power Source: AC 120V, 60Hz for Adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.1°C/46%RH

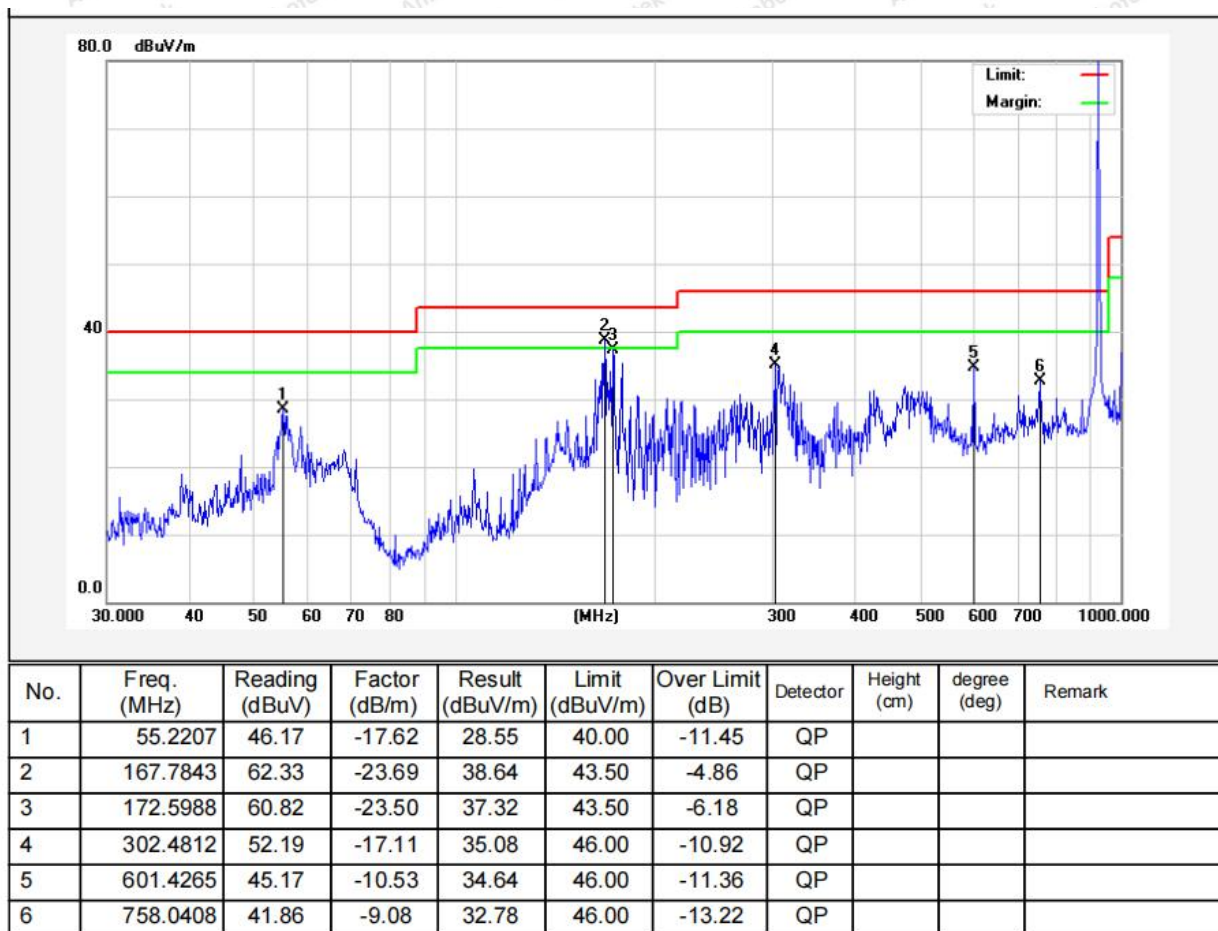

Test Mode: CH04
Power Source: AC 120V, 60Hz for Adapter
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.1°C/46%RH

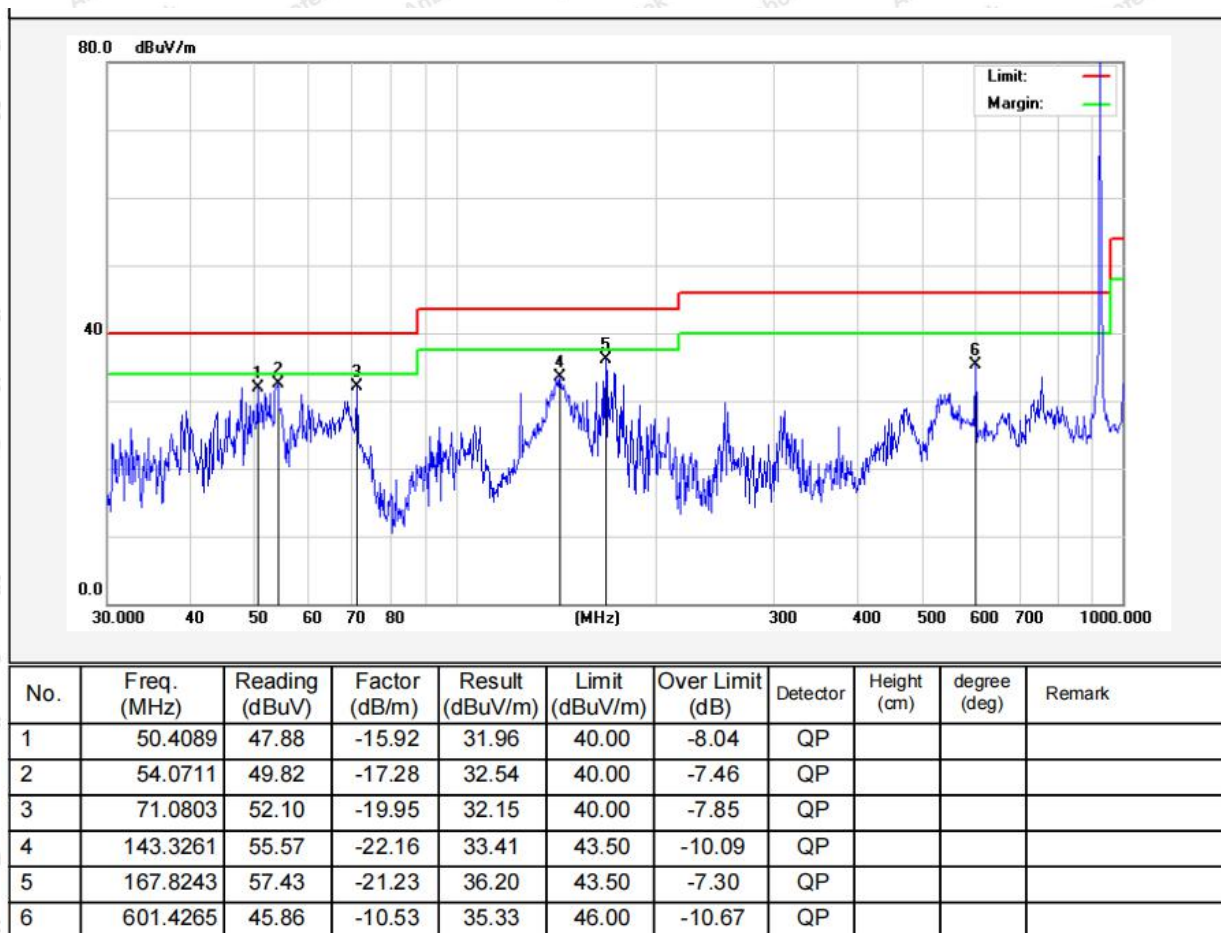

Test Results (1GHz-25GHz)

Test Mode: CH01	Test channel: Lowest
-----------------	----------------------

Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1846.60	30.18	17.67	47.85	74.00	-26.15	Vertical
2769.90	29.95	20.94	50.89	74.00	-23.11	Vertical
3693.20	31.39	22.51	53.90	74.00	-20.10	Vertical
4616.50	*			74.00		Vertical
5539.80	*			74.00		Vertical
1846.60	29.70	17.67	47.37	74.00	-26.63	Horizontal
2769.90	31.12	20.94	52.06	74.00	-21.94	Horizontal
3693.20	28.85	22.51	51.36	74.00	-22.64	Horizontal
4616.50	*			74.00		Horizontal
5539.80	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1846.60	18.45	17.67	36.12	54.00	-17.88	Vertical
2769.90	19.00	20.94	39.94	54.00	-14.06	Vertical
3693.20	20.86	22.51	43.37	54.00	-10.63	Vertical
4616.50	*			54.00		Vertical
5539.80	*			54.00		Vertical
1846.60	18.03	17.67	35.70	54.00	-18.30	Horizontal
2769.90	20.15	20.94	41.09	54.00	-12.91	Horizontal
3693.20	18.36	22.51	40.87	54.00	-13.13	Horizontal
4616.50	*			54.00		Horizontal
5539.80	*			54.00		Horizontal

Test Mode: CH04

Test channel: Middle

Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1850.20	29.73	17.70	47.43	74.00	-26.57	Vertical
2775.30	29.92	20.97	50.89	74.00	-23.11	Vertical
3700.40	30.89	22.51	53.40	74.00	-20.60	Vertical
4625.50	*			74.00		Vertical
5550.60	*			74.00		Vertical
1850.20	29.51	17.70	47.21	74.00	-26.79	Horizontal
2775.30	30.99	20.97	51.96	74.00	-22.04	Horizontal
3700.40	28.57	22.51	51.08	74.00	-22.92	Horizontal
4625.50	*			74.00		Horizontal
5550.60	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1850.20	18.54	17.70	36.24	54.00	-17.76	Vertical
2775.30	18.86	20.97	39.83	54.00	-14.17	Vertical
3700.40	20.71	22.51	43.22	54.00	-10.78	Vertical
4625.50	*			54.00		Vertical
5550.60	*			54.00		Vertical
1850.20	18.14	17.70	35.84	54.00	-18.16	Horizontal
2775.30	20.50	20.97	41.47	54.00	-12.53	Horizontal
3700.40	18.66	22.51	41.17	54.00	-12.83	Horizontal
4625.50	*			54.00		Horizontal
5550.60	*			54.00		Horizontal

Test Mode: CH08

Test channel: High

Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1855.00	29.86	17.74	47.60	74.00	-26.40	Vertical
2782.50	30.08	20.99	51.07	74.00	-22.93	Vertical
3710.00	31.59	22.51	54.10	74.00	-19.90	Vertical
4637.50	*			74.00		Vertical
5565.00	*			74.00		Vertical
1855.00	29.65	17.74	47.39	74.00	-26.61	Horizontal
2782.50	31.20	20.99	52.19	74.00	-21.81	Horizontal
3710.00	28.95	22.51	51.46	74.00	-22.54	Horizontal
4637.50	*			74.00		Horizontal
5565.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1855.00	19.66	17.74	37.40	54.00	-16.60	Vertical
2782.50	20.13	20.99	41.12	54.00	-12.88	Vertical
3710.00	21.36	22.51	43.87	54.00	-10.13	Vertical
4637.50	*			54.00		Vertical
5565.00	*			54.00		Vertical
1855.00	19.32	17.74	37.06	54.00	-16.94	Horizontal
2782.50	21.30	20.99	42.29	54.00	-11.71	Horizontal
3710.00	18.81	22.51	41.32	54.00	-12.68	Horizontal
4637.50	*			54.00		Horizontal
5565.00	*			54.00		Horizontal

Remark:


1. Result=Reading + Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW $\geq$ DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data

Test Item	:	Max. peak output power
Test Voltage	:	DC 3.3V
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	23.6°C
Humidity	:	53 %


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
923.3	27.672	30	PASS
925.1	27.701	30	PASS
927.5	27.681	30	PASS

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup



6.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz,
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data


Test Item : 6dB Bandwidth
Test Voltage : DC 3.3V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 23.6℃
Humidity : 53 %


Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
Low	923.3	647.2	>500	PASS
Middle	925.1	636.1		PASS
High	927.5	609.2		PASS

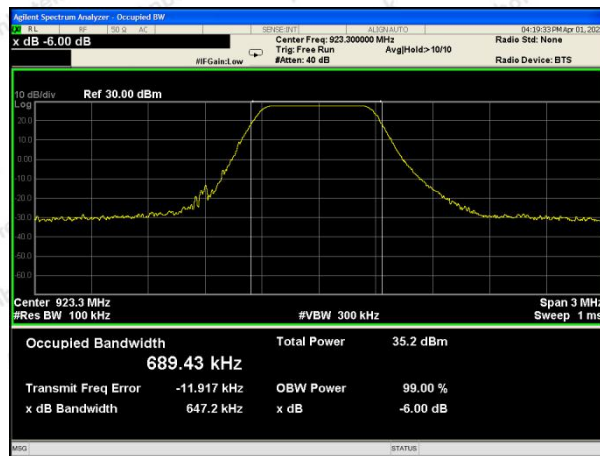

CH: Low

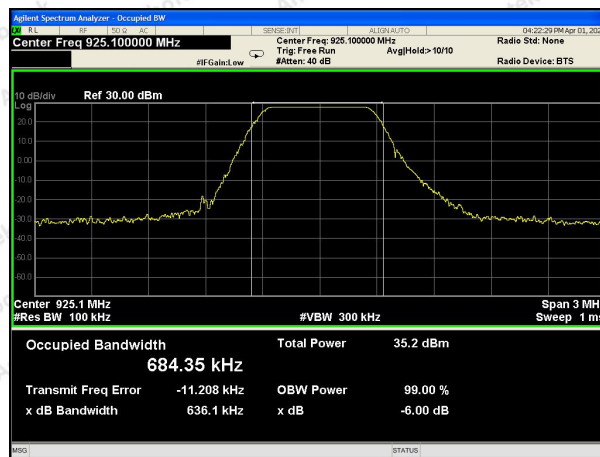

CH: Middle

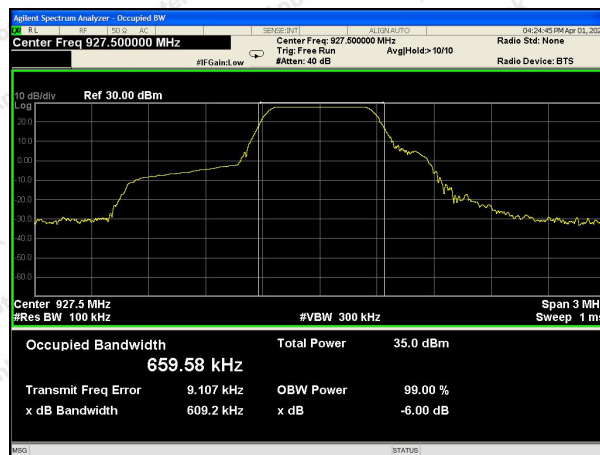


CH: High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

7.2. Test Setup



7.3. Test Procedure


1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTSS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data


Test Item	: Power Spectral Density
Test Voltage	: DC 3.3V
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 23.6℃
Humidity	: 53 %


Channel	Frequency (MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
Low	923.3	3.324	8.00	PASS
Middle	925.1	3.944	8.00	PASS
High	927.5	4.702	8.00	PASS

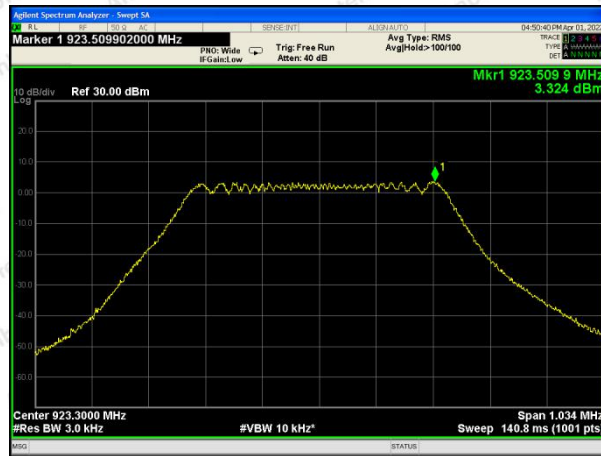

CH: Low

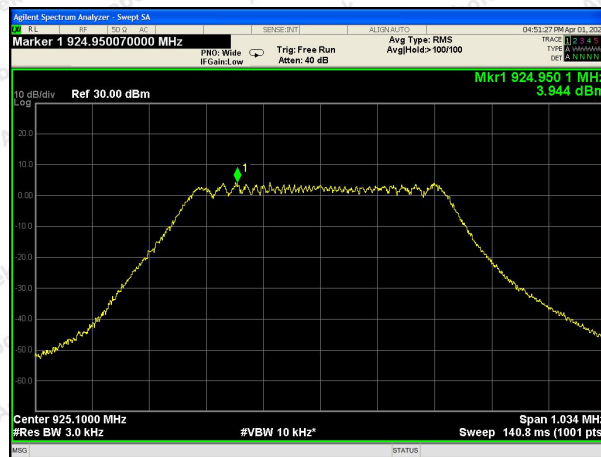

CH: Middle

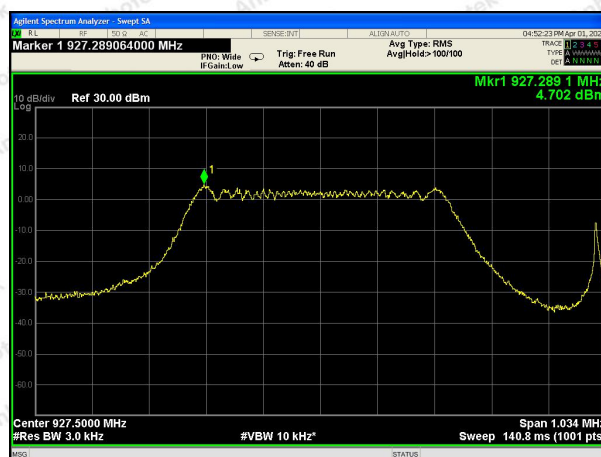


CH: High

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure


Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


8.4. Test Data

Test Item	:	Band edge
Test Voltage	:	DC 3.3V
Test Result	:	PASS


Test Mode	:	CH Low ~ CH High
Temperature	:	23.6℃
Humidity	:	53 %

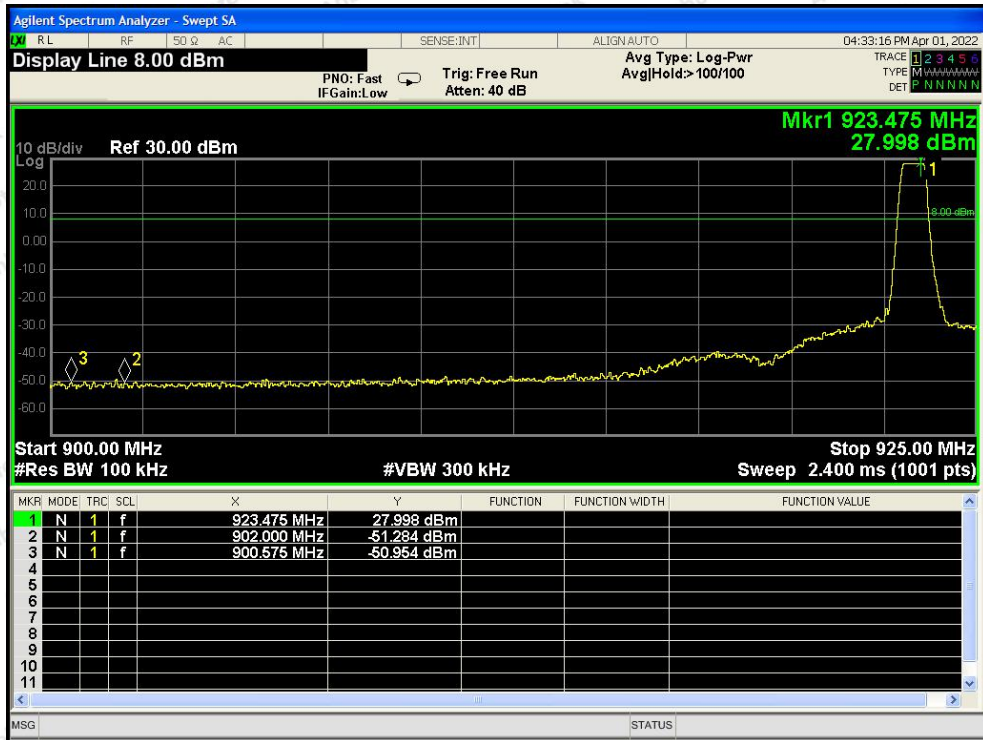


CH: Low

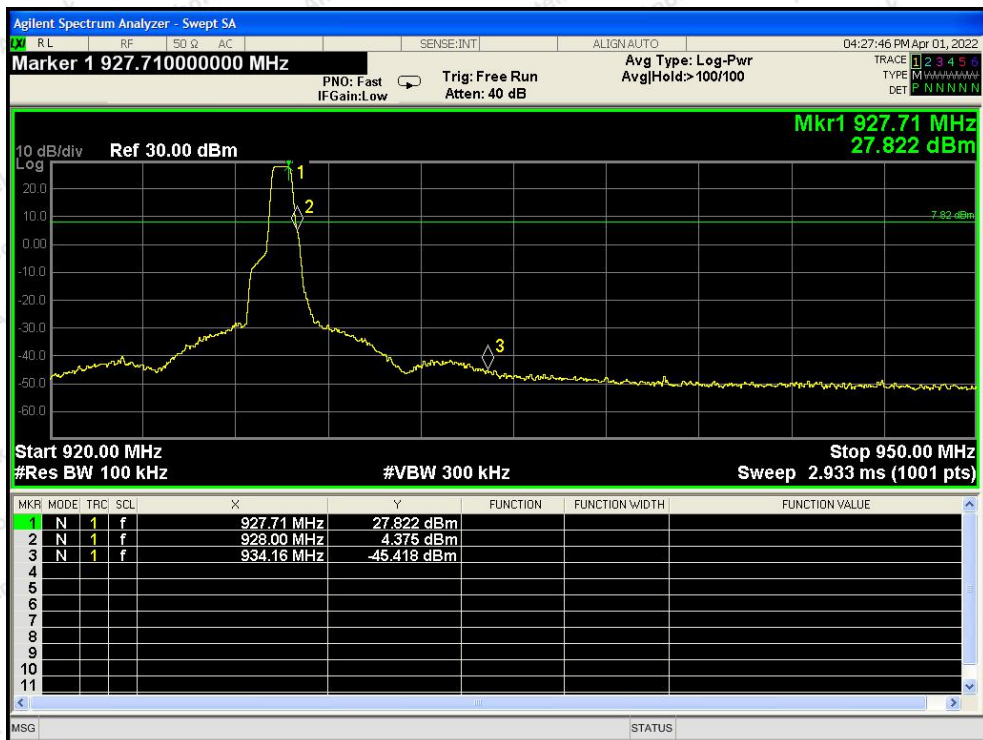


CH: High

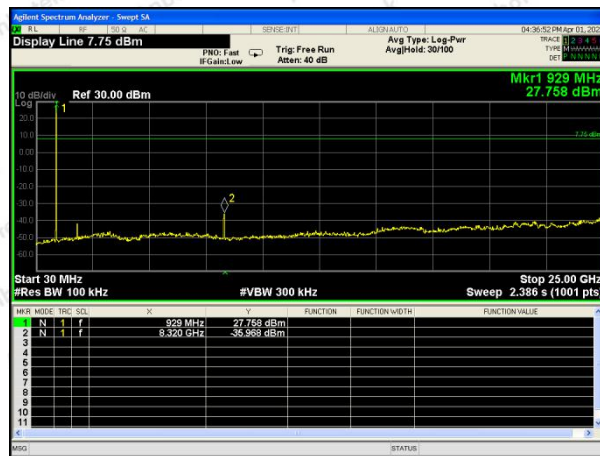

CH: Low

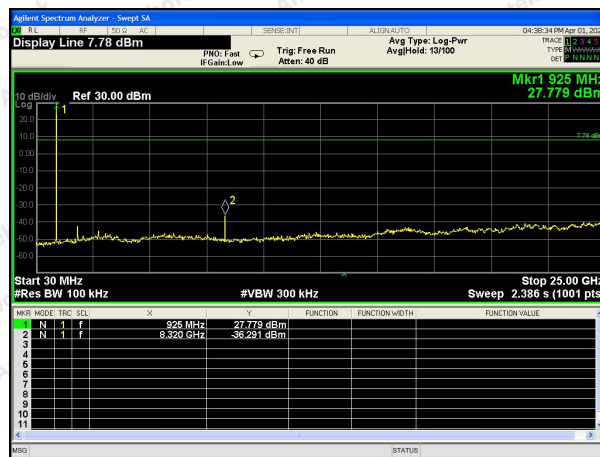

CH: Middle

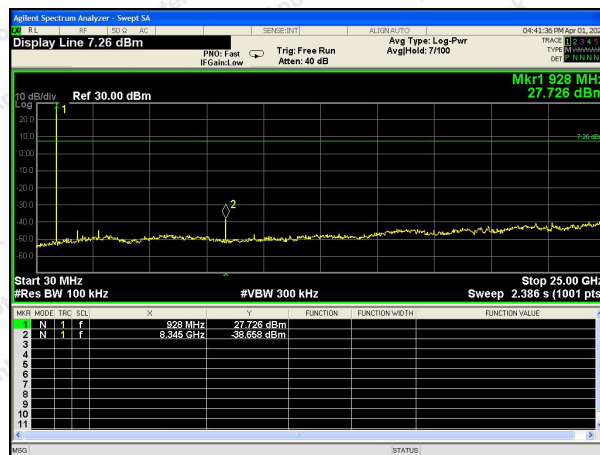

CH: High

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna

9.2. Antenna Connected Construction

The antenna is a External antenna which permanently attached, and the best case gain of the antenna is 2.5 dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement

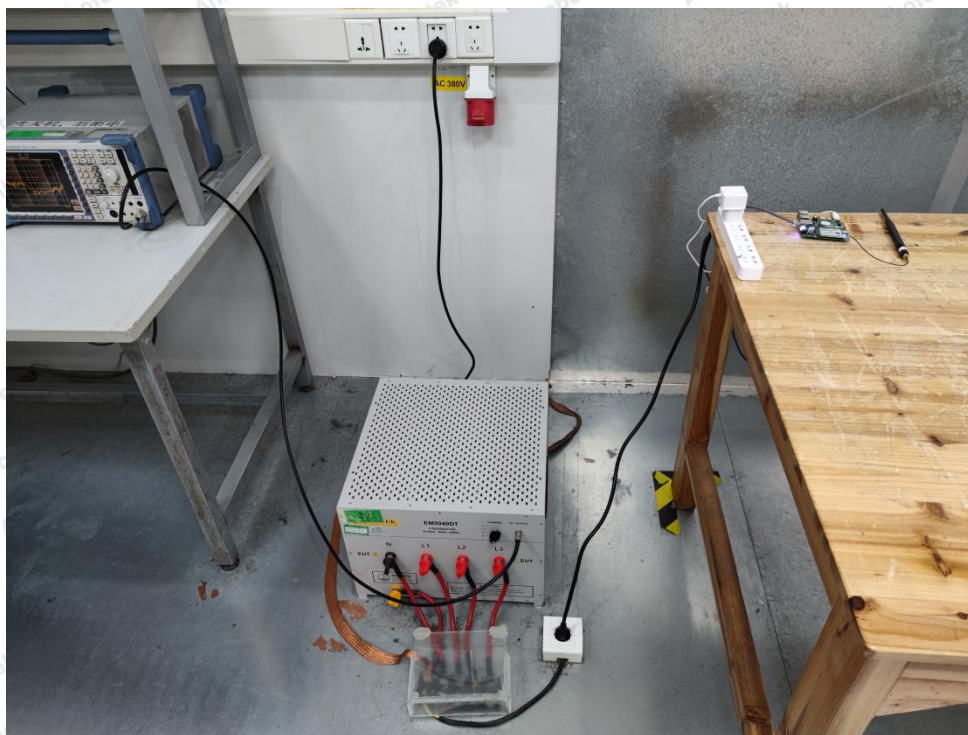



Photo of Radiation Emission Test






APPENDIX II -- EXTERNAL PHOTOGRAPH

ANT PORT

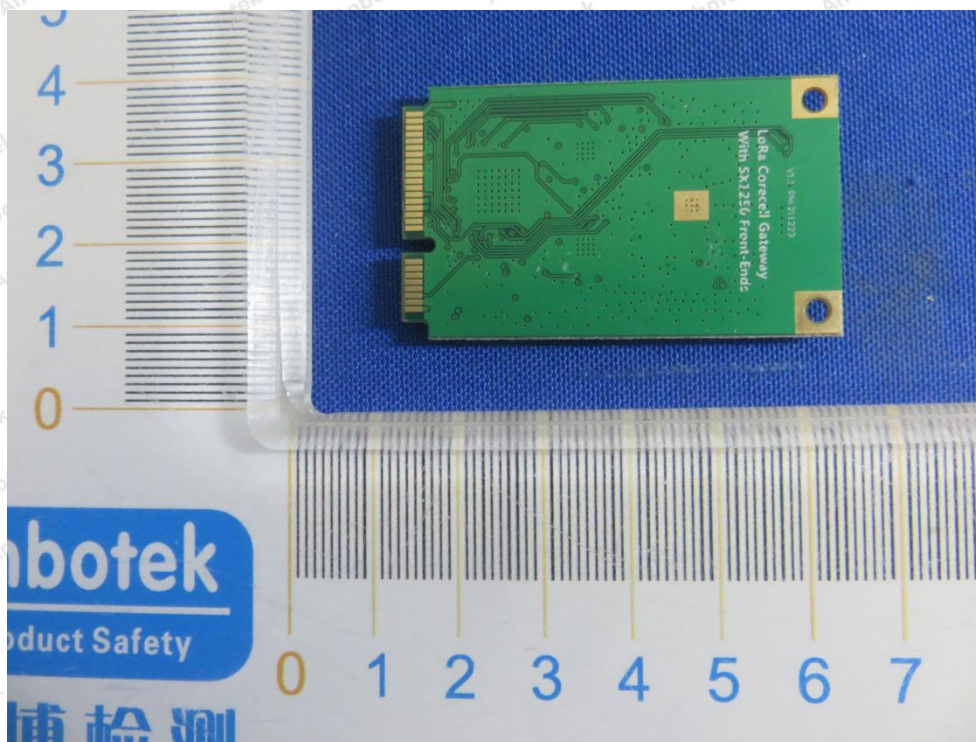

APPENDIX III -- INTERNAL PHOTOGRAPH

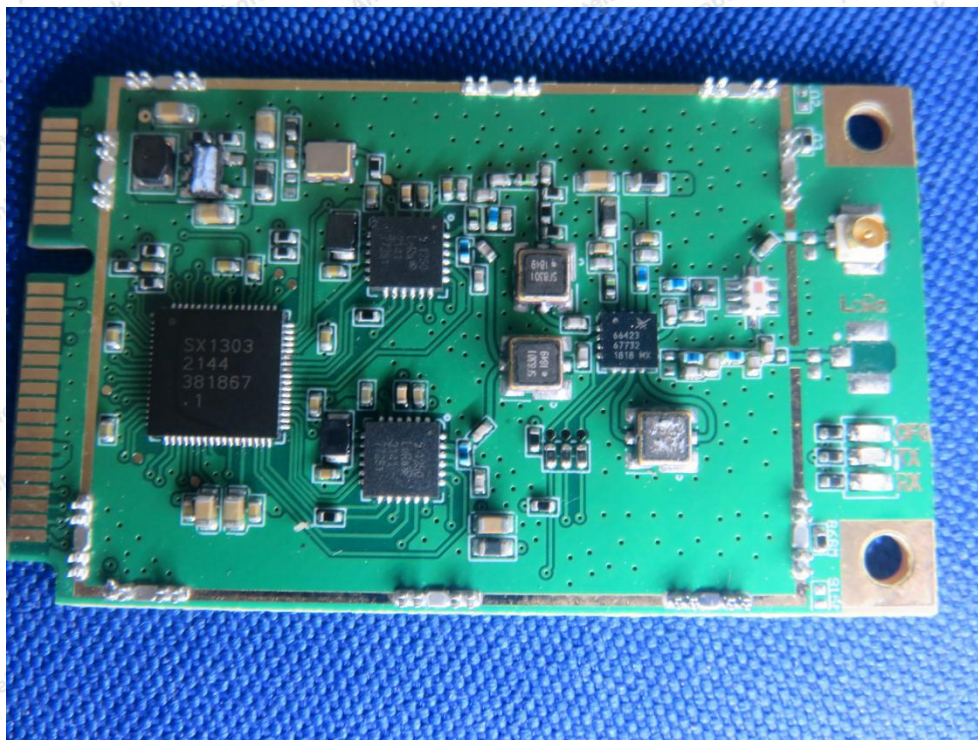

----- End of Report -----

