

TEST REPORT

Application No.: BTEK240520003AE
Applicant: Biolite Inc
Address of Applicant: 65 Jay Street, Floor 3 Brooklyn, New York, 11201, USA
Manufacturer: SHENZHEN TRUSDA INDUSTRIAL CO., LTD.
Address of Manufacturer: 201-301, Building 4, Lianchuang Technology Park, No. 21, Bulan Road, Nanwan Street, Longgang District, Shenzhen, Guangdong, China

Equipment Under Test (EUT):


EUT Name: Charge 100
Test Model.: CBD0100
Adding Model(s): /
Trade Mark:



FCC ID: 2A3GZCBD
Standard(s) : 47 CFR PART 1, Subpart I, Section 1.1310
47 CFR PART 2, Subpart J, Section 2.1093
Date of Receipt: 2024-05-20
Date of Test: 2024-05-22 to 2024-06-05
Date of Issue: 2024-06-06

Test Result:	Pass*
---------------------	-------

* In the configuration tested, the EUT complied with the standards specified above.

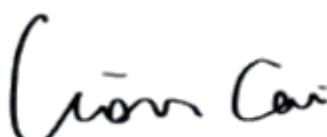

Lion Cai/ Approved & Authorized
EMC Laboratory Manager



Revision Record

Version	Chapter	Date	Modifier	Remark
V0		2024-06-06		Original

Authorized for issue by				
		 Smed Yang		
		 Smed Yang /Project Engineer		
		 David Zhuang		
		 David Zhuang /Reviewer		



2 Contents

	Page
1 Cover Page	1
2 Contents	3
3 General Information.....	4
3.1 Details of E.U.T.....	4
3.2 Description of EUT Test Mode	4
3.3 Description of Support Units	4
3.4 Test Location.....	4
3.5 Deviation from Standards.....	5
3.6 Abnormalities from Standard Conditions	5
4 Test Requirement.....	6
4.1 Equipment List	8
4.2 Assessment Result.....	8
4.3 Test Set-up Photo	11



3 General Information

3.1 Details of E.U.T.

Power Supply	Input: USB-C PD1: 65W, 5VDC 3A, 9VDC 3A, 12VDC 3A, 15VDC 3A, 20VDC 3.25A Output: USB-C PD1: 100W, 5VDC 3A, 9VDC 3A, 12VDC 3A, 15VDC 3A, 20VDC 5A USB-C PD2: 100W, 5VDC 3A, 9VDC 3A, 12VDC 3A, 15VDC 3A, 20VDC 5A, USB-C PD1+ USB-C PD2: 105W Max. USB-C3, USB-A, Wireless Charging: 15W, 5VDC 3A Battery capacity: 18.25V, 5000mAh, 91.25Wh
Modulation Type	FSK
Operating frequency	112kHz-205kHz
Antenna Type	Coil antenna
Hardware Version	V1.0
Software Version	V1.0
Sample number	BTEK240520003AE-01

Remark: The information in this section is provided by the applicant or manufacturer, BANTEK is not liable to the accuracy, suitability, reliability or/and integrity of the information.

3.2 Description of EUT Test Mode

Test Mode List			
Test Mode	Description	Remark	
1	Adapter max charge input+Wireless charge output 5W/7.5W/10W/15W, Load 1%/50%/99%	Adapter input 65W, worst case Wireless charge output 15W, Load 1%	
2	Wireless charge output 5W/7.5W/10W/15W, Load 1%/50%/99%	worst case Wireless charge output 15W, Load 1%	

Remark: 1. Pre-san mode 1 and mode 2, find mode 1 is the worst case.
Only show the worst case in the test report

3.3 Description of Support Units

Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
WPC charging load	EESON	2S	/
Adapter	FUSHIGANG	AS1201A0502000USU	/

3.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.,
A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District,
Shenzhen, Guangdong, China 518104

Tel:0755-2334 4200 Fax: 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.



3.5 Deviation from Standards

None

3.6 Abnormalities from Standard Conditions

None



4 Test Requirement

KDB 680106 D01 Wireless Power Transfer v04

According to KDB 680106 D01:

Requirements of KDB 680106 D01	Description
1. Power transfer frequency is less than 1 MHz	112kHz-205kHz
2. Output power from each primary coil is less than or equal to 15 watts	Maximum 15W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	One radiated Coil
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)	No, This EUT is mounted under a desk/table and the user's legs may be in direct contact with the device for long periods of time, so this device is evaluated as a portable WPT
6. The aggregate H-field strengths anywhere at or beyond 20 cm surrounding the device, and 20cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes, The H-field measurements for each edge/top surface of the host/client pair at every 2cm, starting from as close as possible out to 20cm were also evaluated for portable use condition.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density




Test Setup

For mobile exposure conditions:

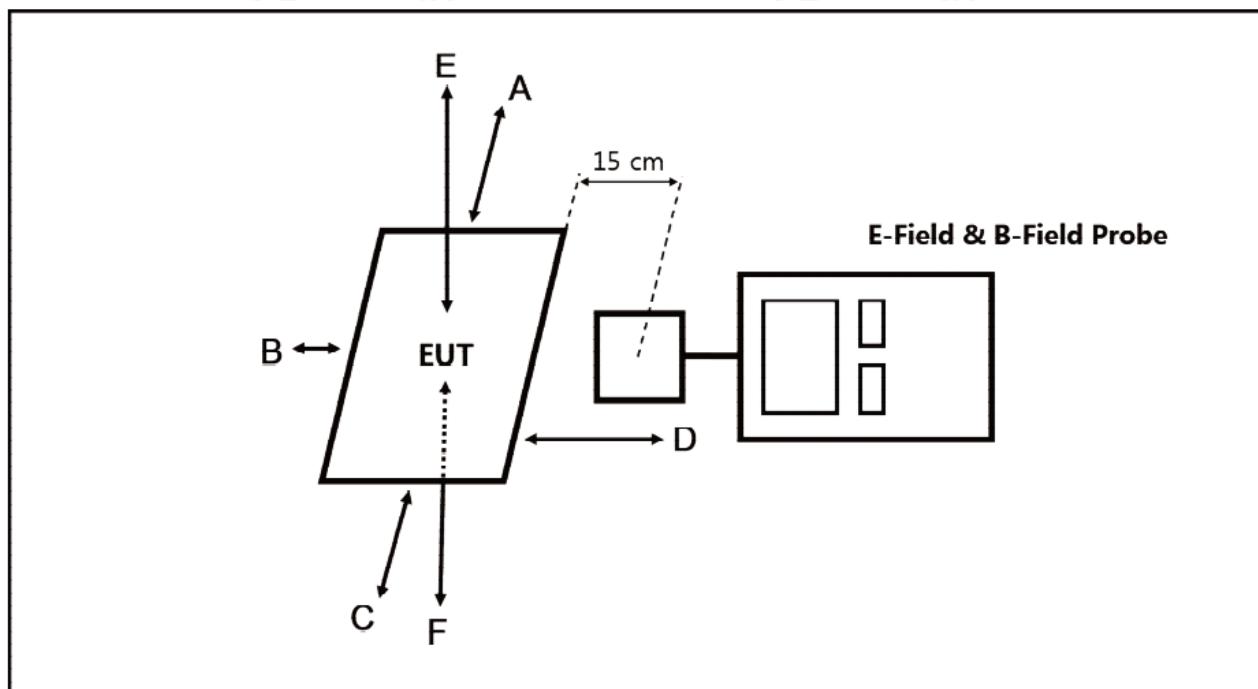

Note: The distance of the points A/B/C/D is 15cm, and the point E is 20cm.

For portable exposure conditions:

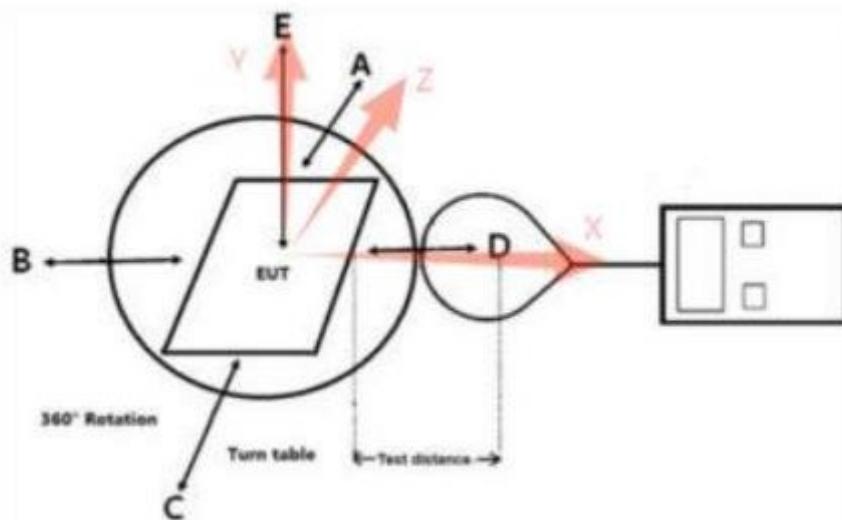

Note: The distance of the points A/B/C/D/E/F is 0,2,4,6,8,10,12,14,16,18, 20cm.

The values tested by the probe are X, Y, and Z on three axes perpendicular to the Edge of the device. Top and bottom side coincident with the axis(Y) of the main coil.

For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

For portable exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.



d. The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

4.1 Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Exposure Level Tester	Narda	ELT-400	N-0219	2024-06-10	2025-06-09
B-Field Probe	Narda	100cm ²	M-0753	2024-06-10	2025-06-09

4.2 Assessment Result

Passed Not Applicable

Duty cycle=100%




Note: All test modes were pre-tested, but we only recorded the worst case in this report.


For portable exposure condition:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 99% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) According to Calibration information and specification about ETL-400 Probe, The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 6.25cm.
- (6) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
- (7) Use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

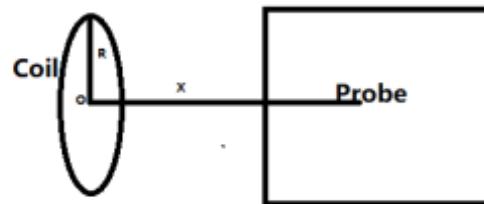

Top & Bottom Side:

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

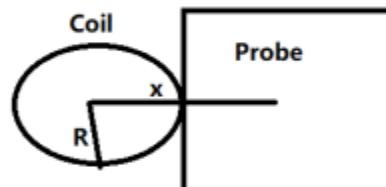Front, left, right & rear Side:

$$B = \frac{\mu_0 * I * N}{2 * x}$$

B(Unit:A/m): means H-field value;

μ_0 is space permeability; $\mu_0=4\pi*10^{-7}$;

I(Unit:A): A current element passing through a radiated coil I;

R(Unit:m): means the Radius of radiated coil, According to provided Antenna specification:

$R=40/2=20\text{mm}=0.02\text{m}$;

Test Distance(Unit:m): The distance from the sensing element of the probe to the edge of the device surface.

x(Unit:m): means the center of the coil to the sensing elements of the probe. (For top & bottom side: $x=\text{test distance}$; For other side: $x=\text{test distance}+R$)

N: Number of turns, according to providing "Antenna specification" files: $N=10$.

(8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

3.1 Validation results for the numerical calculation model

- a) Measure with probe directed contact(test distace:6.25cm)
- b) Using Biot-Savart formula to calculate estimated results at test distace of 8cm and 10 cm;
- c) measure at test distace of 8 cm and 10cm;
- d) Compares the estimated results and measured result, the varation should not be greater than 30%;

Conclusion: The numerical calculation model is valid.



Worst case at mode 1

Test Distance	Measured E-Field Strength Values (A/m)																	
	Test Position A			Test Position B			Test Position C			Test Position D			Test Position E			Test Position F		
	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.
10	0.0421	0.0408	3.14	0.0213	0.0198	7.46	0.0374	0.0339	9.92	0.0253	0.0397	16.03	0.0471	0.0511	8.15	0.0332	0.0371	11.10
8	0.0685	0.0803	15.80	0.0296	0.0366	21.24	0.0630	0.0622	1.27	0.0445	0.0432	2.96	0.0764	0.0812	6.11	0.0675	0.0678	0.40
6.25	0.1125	/	/	0.0478	/	/	0.1190	/	/	0.0796	/	/	0.1272	/	/	0.1283	/	/

Note :Mea.-Measured H-field(A/m); Est.-Estimated H-field(A/m);
Var.-Variation between measured and estimated value(%);

Test Distance	Method	Unit	Measured E-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
20	Mea.	A/m	0.022	0.026	0.042	0.052	0.043	0.035	1.63
18	Mea.	A/m	0.028	0.027	0.039	0.051	0.043	0.034	1.63
16	Mea.	A/m	0.031	0.031	0.041	0.053	0.044	0.031	1.63
14	Mea.	A/m	0.030	0.031	0.040	0.050	0.047	0.035	1.63
12	Mea.	A/m	0.041	0.034	0.058	0.051	0.051	0.037	1.63
10	Mea.	A/m	0.042	0.021	0.037	0.025	0.047	0.033	1.63
8	Mea.	A/m	0.069	0.030	0.063	0.045	0.076	0.068	1.63
6	Est.	A/m	0.119	0.058	0.123	0.087	0.149	0.137	1.63
4	Est.	A/m	0.294	0.137	0.292	0.206	0.354	0.339	1.63
2	Est.	A/m	0.416	0.446	0.422	0.452	0.726	0.810	1.63
0	Est.	A/m	0.562	0.795	0.552	0.464	1.088	0.901	1.63

Note :1.Mea.-Measured H-field(A/m); Est.-Estimated H-field(A/m);


2.All test modes were pre-tested, but we only recorded the worst case in this report.




4.3 Test Set-up Photo

0cm Remark(Probe center to the EUT side is 6.25cm)	
A	
B	
C	
D	



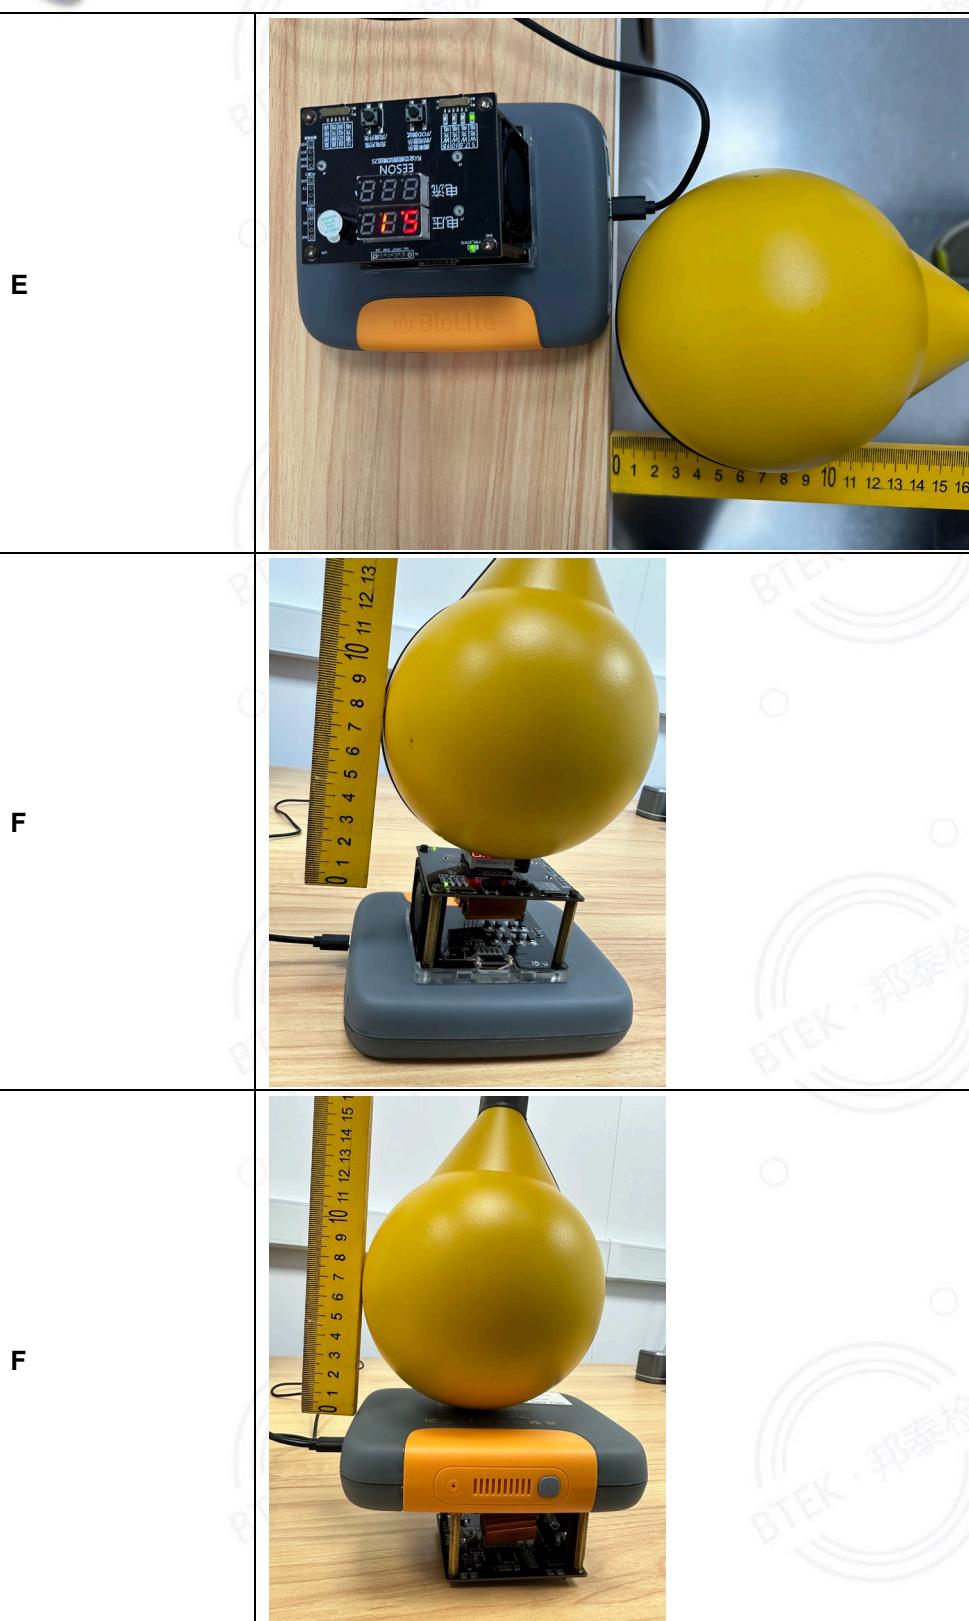

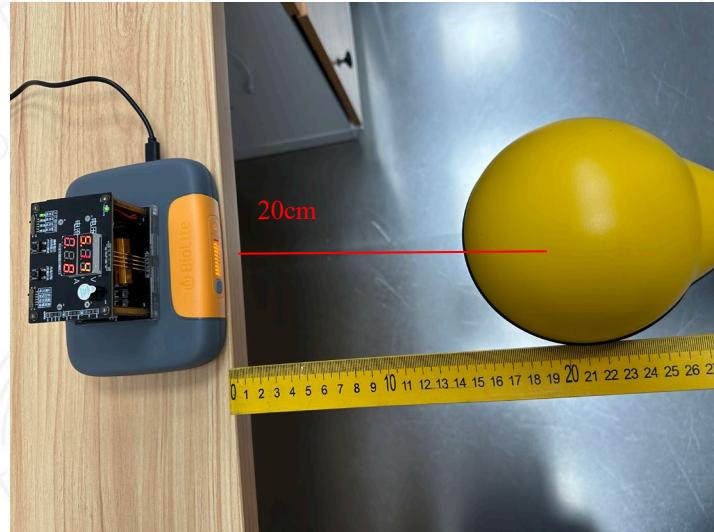20cm Remark(Probe center to the EUT side is 20cm)	
A	 A photograph showing a blue and orange probe device connected to a cable, resting on a light-colored wooden shelf. A yellow spherical object is positioned to the right of the probe. A yellow tape measure is placed horizontally in front of the probe, with a red line drawn from the center of the probe to the center of the yellow sphere, indicating a distance of 20cm. The tape measure scale is visible from 0 to 26 cm.
B	 A photograph showing the same probe device on a wooden shelf. A yellow tape measure is placed vertically next to the probe, with its zero mark aligned with the probe's center. A yellow spherical object is positioned to the right of the probe. The tape measure scale is visible from 0 to 27 cm.
C	 A photograph showing the probe device on a wooden shelf. A yellow tape measure is placed vertically next to the probe, with its zero mark aligned with the probe's center. A yellow spherical object is positioned to the right of the probe. The tape measure scale is visible from 0 to 27 cm.



D	 A photograph showing a yellow balloon suspended by a black cord from a grey and orange device. A yellow tape measure is positioned vertically next to the balloon. The device has a small digital screen and several buttons. The background is a light-colored wooden surface.
E	 A photograph showing a yellow balloon suspended by a black cord from a grey and orange device. A yellow tape measure is positioned vertically next to the balloon. The device has a small digital screen and several buttons. The background is a light-colored wooden surface.
F	 A photograph showing a yellow balloon suspended by a black cord from a grey and orange device. A yellow tape measure is positioned vertically next to the balloon. The device has a small digital screen and several buttons. The background is a light-colored wooden surface.

- End of the Report -

