

TEST REPORT

Applicant Name : Shenzhen ViewComm Technology Co., Ltd.
 Address : FCC: RM 605, BLDG 4, Private Enterprise Science Park, No.65
 Lishan Rd, Nanshan Dist, Shenzhen ,China
 ISEDC: RM 605, BLDG 4, Private Enterprise Science Park, No.65
 Lishan Rd, Nanshan Dist Shenzhen Guangdong 518000 China
 (Peoples Republic Of)
 Report Number : SZNS211026-55055E-RFA-M3
 FCC ID: 2A3H2-ISPAC2E
 IC: 27891-ISPAC2E

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

Sample Description

Product Type: Intelligent portable projector
 Model No.: iSpace 2
 Multiple Model(s) No.: iSpace 2 Pro, iSpace 2 SE
 Trade Mark: VIEWCOMM
 Date Received: 2021/10/26 (SZNS211026-55055E-RF-S1)
 2024/01/30 (SZNS211026-55055E-RF-S2)
 Date of Test: 2021/11/12~2021/11/22 for CE&RE Test
 2024/12/18 for RF conducted test
 Report Date: 2024/12/19

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger Ling

Roger Ling
EMC Engineer

Approved By:

Bob. Liao

Bob. Liao
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk ★.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk **. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.
 Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
APPLICABLE STANDARD	13
RESULT	13
RSS-102 §4 -EXPOSURE LIMITS.....	15
APPLICABLE STANDARD	15
FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207 (A) & RSS-GEN §8.8 – AC LINE CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.209, §15.205 & §15.247(D) & RSS-247 § 5.5 - SPURIOUS EMISSIONS	24
APPLICABLE STANDARD	24
EUT SETUP.....	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	25
TEST PROCEDURE	25
CORRECTED FACTOR & MARGIN CALCULATION	25
TEST DATA	25
FCC §15.247(A) (1) & RSS-247 § 5.1 (B) -CHANNEL SEPARATION TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33

FCC §15.247(A) (1) & RSS-247 § 5.1 (A), RSS-GEN § 6.7 – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	35
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - QUANTITY OF HOPPING CHANNEL TEST.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - TIME OF OCCUPANCY (DWELL TIME)	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(B) (1) & RSS-247 § 5.1(B) & § 5.4(B) - PEAK OUTPUT POWER MEASUREMENT	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	40
APPENDIX	41
APPENDIX A: 20DB EMISSION BANDWIDTH	41
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	47
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	53
APPENDIX D: CARRIER FREQUENCY SEPARATION	59
APPENDIX E: TIME OF OCCUPANCY	62
APPENDIX F: NUMBER OF HOPPING CHANNELS	72
APPENDIX G: BAND EDGE MEASUREMENTS	75

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	SZNS211026-55055E-RFA	Original Report	2021/12/01
Rev.01	SZNS211026-55055E-RFA-M3	Retest and Update RF Conducted Test Data	2024/12/19

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	iSpace 2, iSpace 2 Pro, iSpace 2 SE
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Peak Power	1.21dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	FPC Antenna: 3.87dBi
Voltage Range	DC 7.4V from battery or DC 12.0V from adapter
Sample serial number	SZNS211026-55055E-RF-S1 for CE&RE Test (Assigned by ATC) SZNS211026-55055E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: ICP60A-120-4200 Input: AC 100-240V, 50/60Hz, 1.3A Output: DC 12.0V, 4.2A, 50.4W
Adapter 2 information	Model: RYF909A120400VU Input: AC 100-240V, 50/60Hz, 1.5A Output: DC 12.0V, 4.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.3dB	
Unwanted Emission, conducted	1.2dB	
AC Power Lines Conducted Emissions	2.72dB	
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz- 40GHz	4.72dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 809509, the FCC Designation No.: CN1403.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“SceureCRT”* exercise software was made to the EUT tested and the power level is default*. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Sandisk	USB disk	SDCZ38	BL210426179Z
GIEC	DVD player	BDP-G4308	BD4308KXM17070100086
Samsung	Mobile phone	SM-G9500	R28JC2RS6NM

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	1.5	Adapter	EUT
Shielding Detachable HDMI Cable	2.0	EUT	DVD player
Un-shielding Detachable Type-C Cable	0.3	EUT	Mobile phone
Un-shielding Un-Detachable AC Cable	1.5	DVD player	LISN 2

Block Diagram of Test Setup


For Conducted Emissions

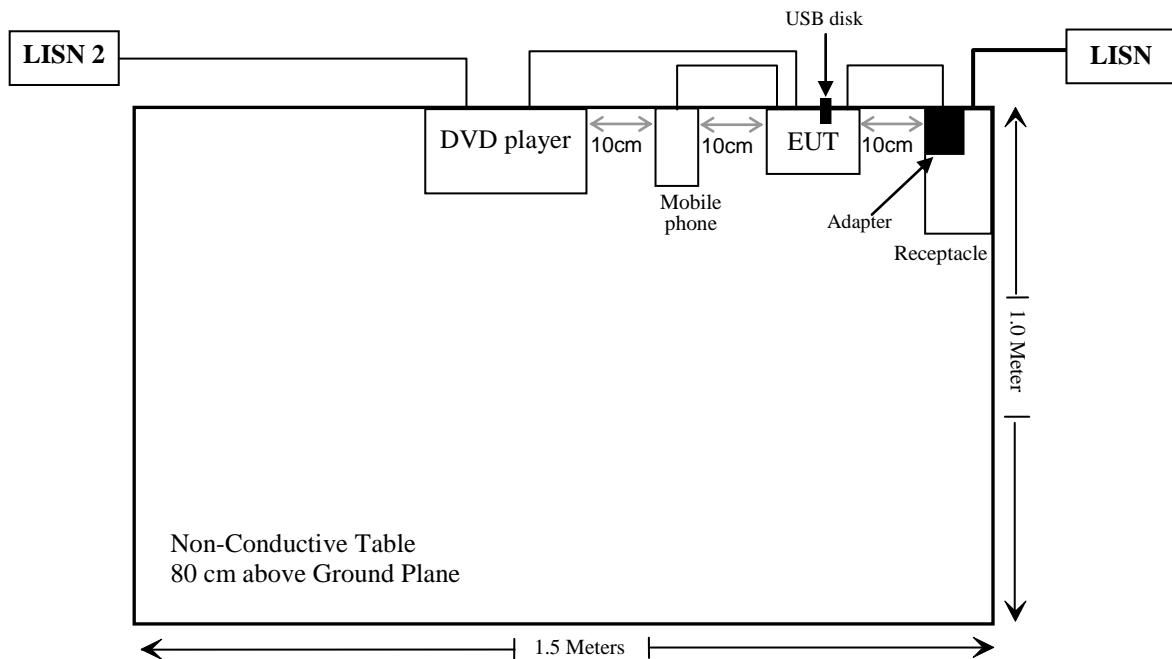

For Spurious Emissions(Below 1G)

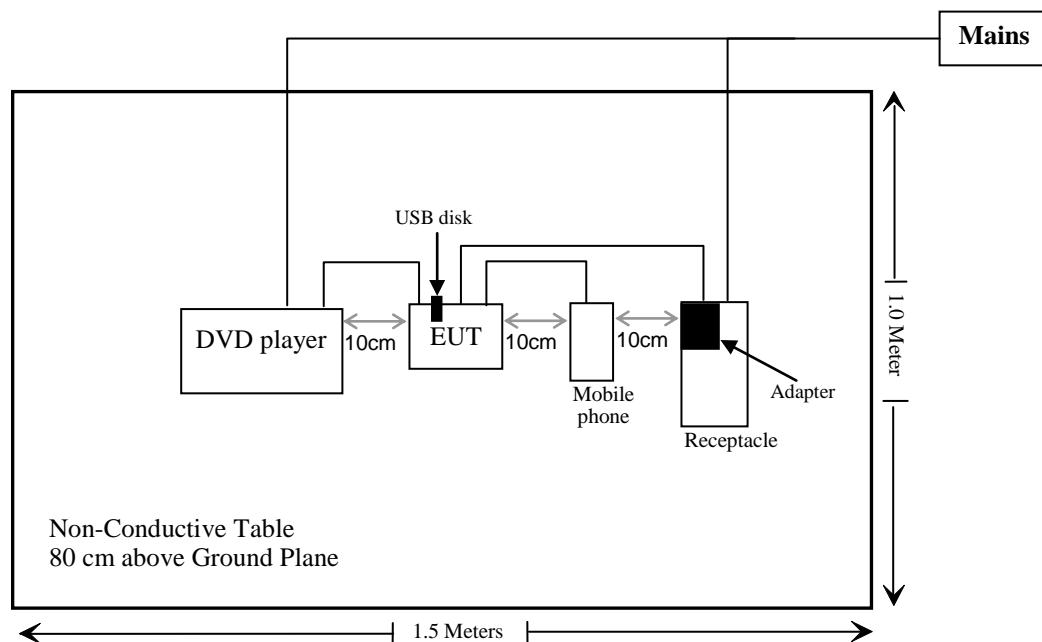

For Spurious Emissions(Above 1G)

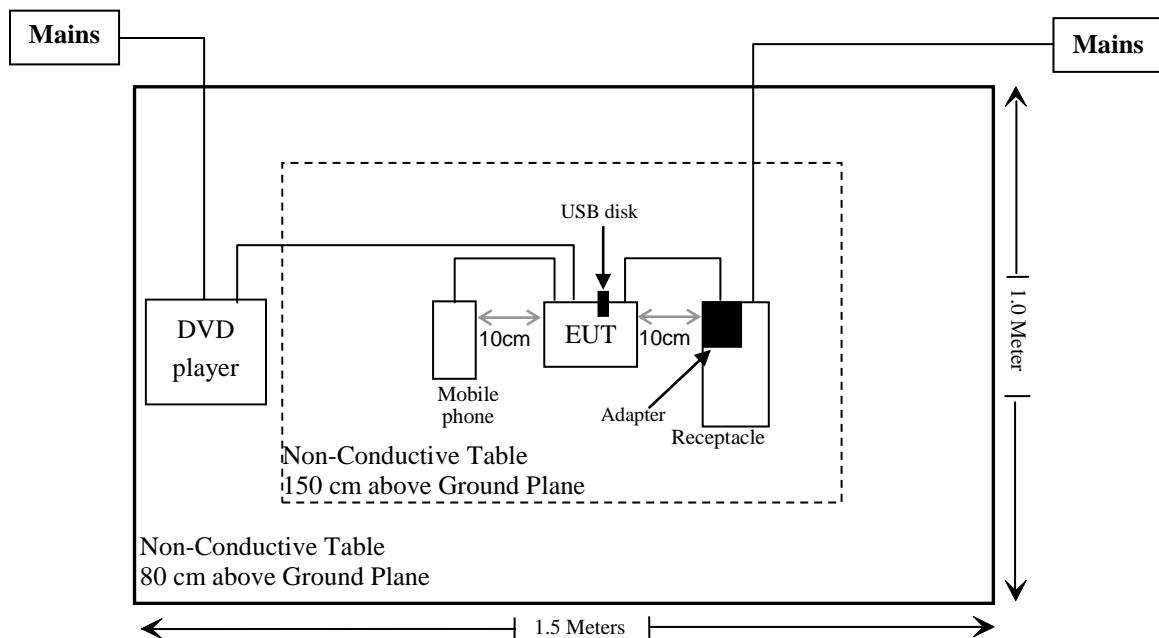

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result	Note
FCC §15.247 (i) & §2.1091	Maximum Permissible Exposure (MPE)	Compliant	From Original
RSS-102 § 4	RF Exposure Limit	Compliant	From Original
FCC §15.203 RSS-Gen §6.8	Antenna Requirement	Compliant	From Original
FCC §15.207(a) RSS-Gen §§8.8	AC Line Conducted Emissions	Compliant	From Original
FCC §15.205, §15.209, §15.247(d) RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant	From Original
FCC §15.247(a)(1) RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant*	Retested
FCC §15.247(a)(1) RSS-247 § 5.1 (b)	Channel Separation Test	Compliant*	Retested
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant*	Retested
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant*	Retested
FCC §15.247(b)(1) RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	Compliant*	Retested
FCC §15.247(d) RSS-247 § 5.5	Band edges	Compliant*	Retested

Compliant* – Annotations as below:

Note 1: The test item was retested and updated the data.

Note 2: The test software and power setting level were same as the original testing which on page 7 of the report.

Note 3: The retested RF power is almost the same as the original report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/02/03	2022/02/02
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50ΩCoaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/11/09	2022/11/08
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/28	2021/11/27
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-10m	No.7	2021/11/09	2022/11/08
Unknown	RF Coaxial Cable	N-2m	No.8	2021/11/09	2022/11/08
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2024/10/08	2025/10/07
Rohde & Schwarz	Open Switch and ControlUnit	OSP120+ OSP-B157	101244+ 100866	2024/10/08	2025/10/07
Agilent	10dB Attenuator	8491B	A5825	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.31	RF-01	2024/10/08	2025/10/07

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT	2402-2480	3.87	2.44	2.0	1.58	20	0.0008	1
BLE	2402-2480	3.87	2.44	0	1.00	20	0.0005	1
2.4GHz Wi-Fi	2412-2472	3.87	2.44	15.0	31.62	20	0.0153	1
5GHz Wi-Fi	5150-5250	6.65	4.62	14.0	25.12	20	0.0231	1
	5725-5850	6.48	4.45	14.0	25.12	20	0.0222	1

Note: 1. The tune up conducted power was declared by the applicant.
 2. The BT, 2.4GHz Wi-Fi and 5GHz Wi-Fi can transmit at same time.

Simultaneous transmitting consideration (worst case):

The ratio=MPE_{BT}/limit+MPE_{2.4G Wi-Fi}/limit+MPE_{5G Wi-Fi}/limit=0.0008/1+0.0153/1+0.0231/1=0.0392<1.0

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

RSS-102 § 4 –EXPOSURE LIMITS

Applicable Standard

According to RSS-102 §4:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ $f^{0.5}$	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ $f^{0.25}$	0.1540/ $f^{0.25}$	8.944/ $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	$4.21 \times 10^{-4} f^{0.5}$	$6.67 \times 10^{-5} f$	616000/ $f^{1.2}$

Note: f is frequency in MHz.

* Based on nerve stimulation (NS).

** Based on specific absorption rate (SAR).

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Max Tune Up Conducted Power		Evaluation Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
		(dBi)	(numeric)	(dBm)	(W)			
BT	2402-2480	3.87	2.44	2.0	0.0016	0.2	0.0078	5.351
BLE	2402-2480	3.87	2.44	0	0.0010	0.2	0.0049	5.351
2.4G Wi-Fi	2412-2472	3.87	2.44	15.0	0.0316	0.2	0.1534	5.366
5G Wi-Fi	5150-5250	6.65	4.62	14.0	0.0251	0.2	0.2307	9.011
5G Wi-Fi	5725-5850	6.48	4.45	14.0	0.0251	0.2	0.2222	9.687

Note: 1. The tune up conducted power was declared by the applicant.
 2. The BT, 2.4GHz Wi-Fi and 5GHz Wi-Fi can transmit at same time.

Simultaneous transmitting consideration (worst case):

The ratio=MPE_{BT}/limit+MPE_{2.4G Wi-Fi}/limit+MPE_{5G Wi-Fi}/limit
 =0.0078/5.351+0.1534/5.366+0.2307/9.011=0.056<1.0

To maintain compliance with the ISEDC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Pass

FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain is 3.87dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Impedance	Frequency Range
FPC	3.87dBi	50Ω	2.4~2.5GHz


Result: Compliance

FCC §15.207 (a) & RSS-GEN § 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

EUT Setup

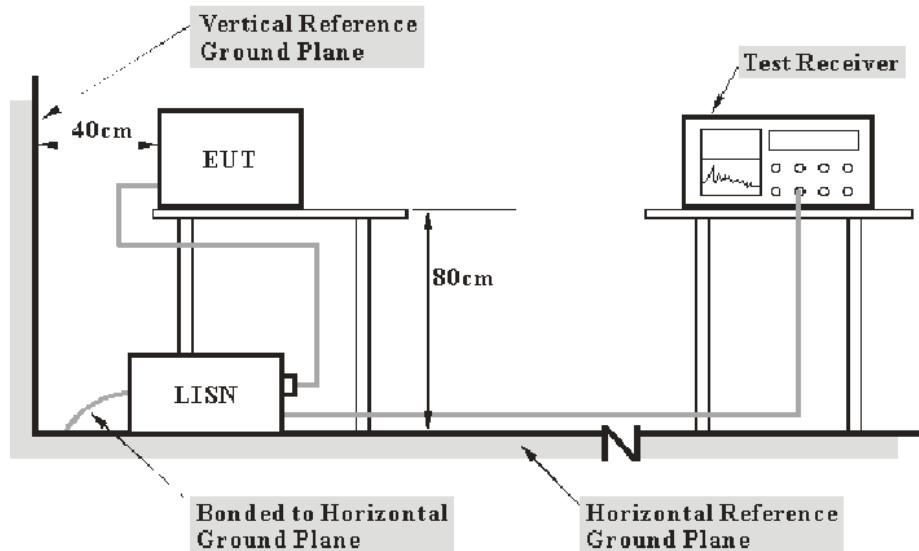

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Over Limit} = \text{level} - \text{Limit}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2021-11-22.


EUT operation mode: Transmitting (worst case is GFSK, low channel)

Adapter 1

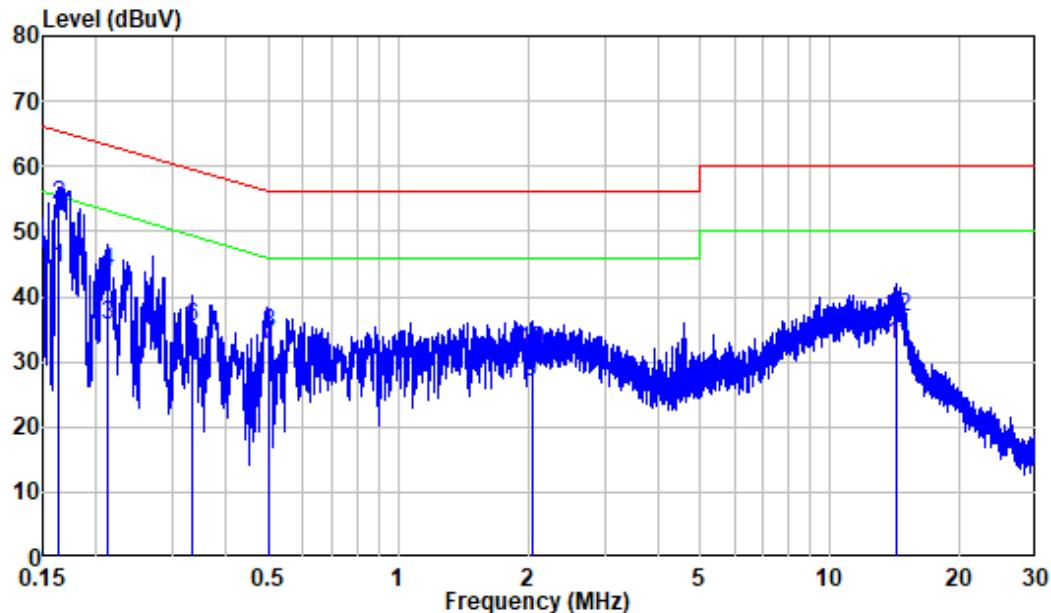AC 120V/60 Hz, Line


	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.164	9.87	34.44	44.31	55.26	-10.95	Average
2	0.164	9.87	44.12	53.99	65.26	-11.27	QP
3	0.211	9.80	25.80	35.60	53.16	-17.56	Average
4	0.211	9.80	33.85	43.65	63.16	-19.51	QP
5	0.333	9.80	20.45	30.25	49.38	-19.13	Average
6	0.333	9.80	25.37	35.17	59.38	-24.21	QP
7	0.500	9.80	22.78	32.58	46.00	-13.42	Average
8	0.500	9.80	24.74	34.54	56.00	-21.46	QP
9	2.035	9.92	16.88	26.80	46.00	-19.20	Average
10	2.035	9.92	21.64	31.56	56.00	-24.44	QP
11	14.288	10.05	22.42	32.47	50.00	-17.53	Average
12	14.288	10.05	26.80	36.85	60.00	-23.15	QP

AC 120V/60 Hz, Neutral

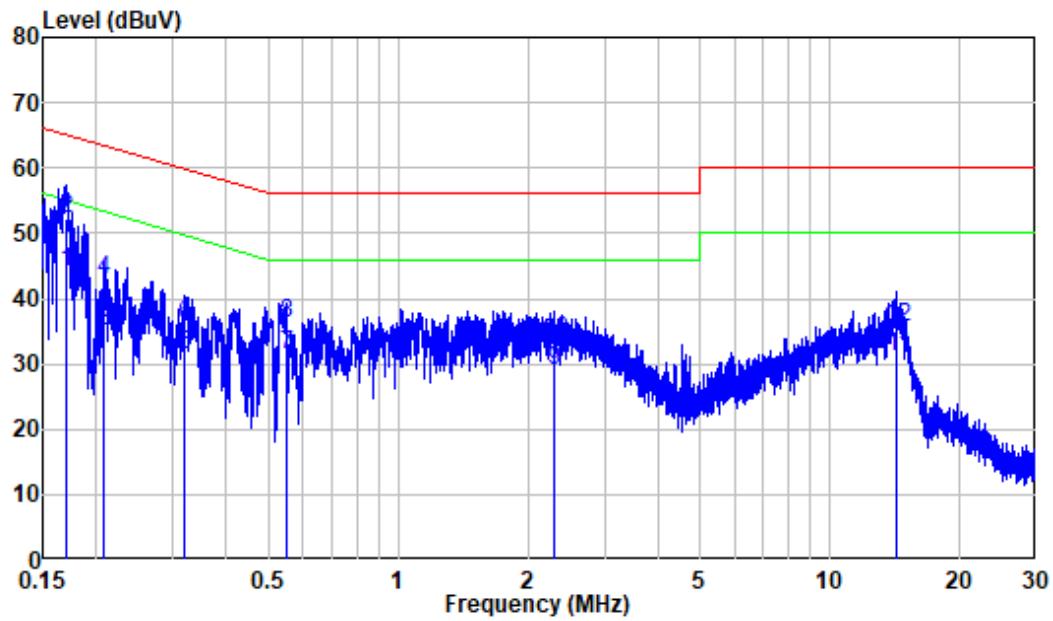


Freq	Factor	Read Level		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.169	9.94	34.17	44.11	54.99	-10.88	Average
2	0.169	9.94	42.16	52.10	64.99	-12.89	QP
3	0.208	10.00	24.99	34.99	53.29	-18.30	Average
4	0.208	10.00	32.85	42.85	63.29	-20.44	QP
5	0.321	9.95	21.47	31.42	49.69	-18.27	Average
6	0.321	9.95	25.98	35.93	59.69	-23.76	QP
7	0.550	9.91	21.41	31.32	46.00	-14.68	Average
8	0.550	9.91	26.24	36.15	56.00	-19.85	QP
9	2.295	9.94	19.03	28.97	46.00	-17.03	Average
10	2.295	9.94	23.68	33.62	56.00	-22.38	QP
11	14.269	10.05	21.14	31.19	50.00	-18.81	Average
12	14.269	10.05	25.43	35.48	60.00	-24.52	QP

Adapter 2

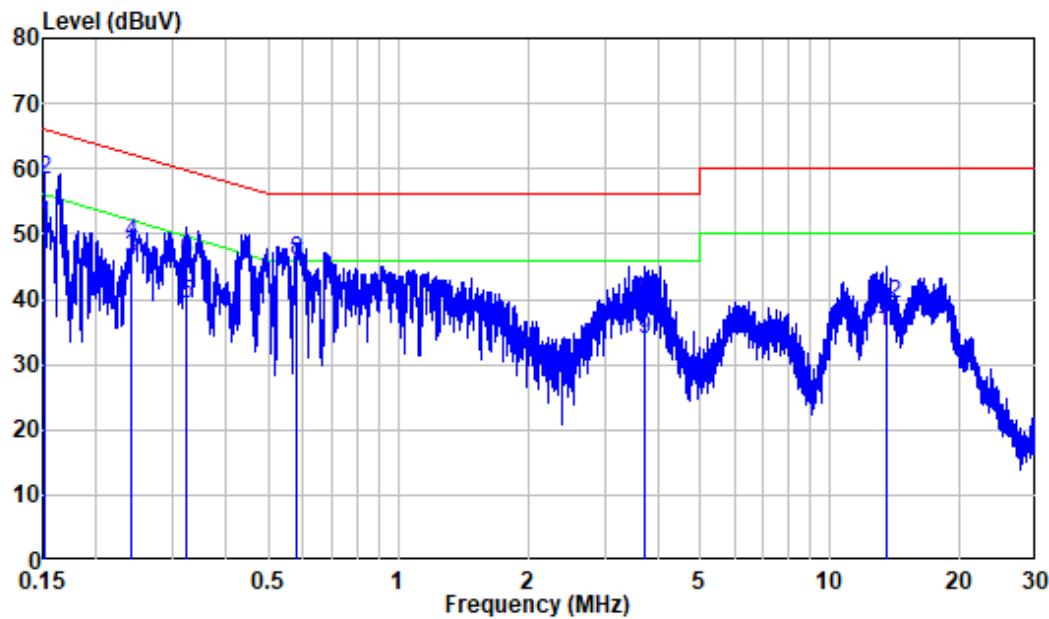AC 120V/60 Hz, Line

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	9.90	41.38	51.28	55.93	-4.65	Average
2	0.151	9.90	48.51	58.41	65.93	-7.52	QP
3	0.241	9.80	36.39	46.19	52.04	-5.85	Average
4	0.241	9.80	38.91	48.71	62.04	-13.33	QP
5	0.322	9.80	29.43	39.23	49.66	-10.43	Average
6	0.322	9.80	35.94	45.74	59.66	-13.92	QP
7	0.583	9.81	35.02	44.83	46.00	-1.17	Average
8	0.583	9.81	35.96	45.77	56.00	-10.23	QP
9	3.732	9.94	23.94	33.88	46.00	-12.12	Average
10	3.732	9.94	29.97	39.91	56.00	-16.09	QP
11	13.569	10.06	24.83	34.89	50.00	-15.11	Average
12	13.569	10.06	29.07	39.13	60.00	-20.87	QP

AC 120V/60 Hz, Neutral

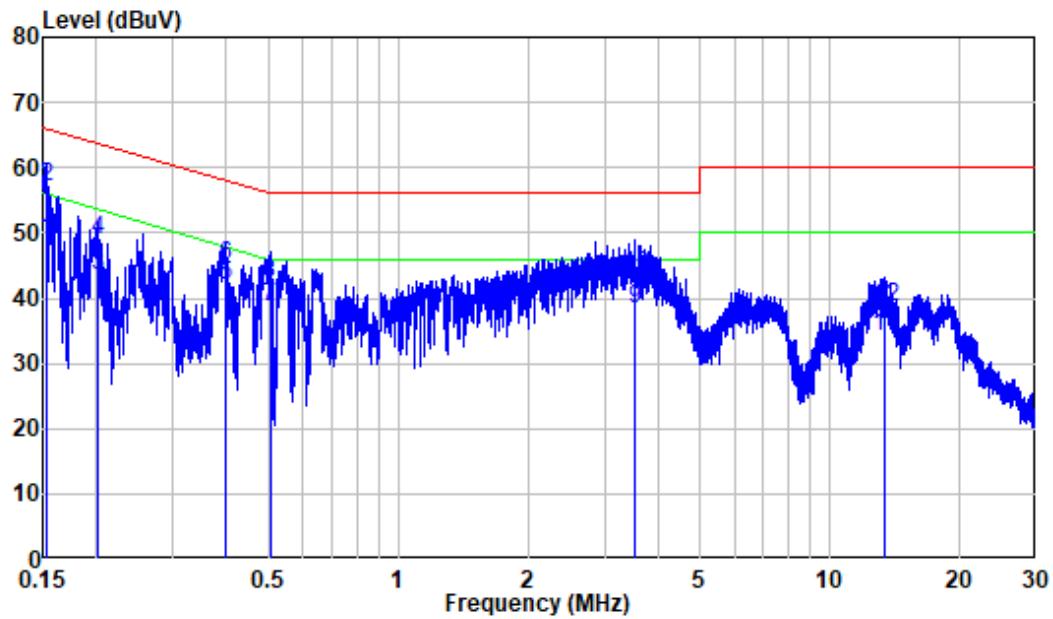

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
		MHz	dB	dBuV	dBuV	dB
1	0.153	9.91	38.95	48.86	55.86	-7.00 Average
2	0.153	9.91	47.18	57.09	65.86	-8.77 QP
3	0.201	10.00	33.43	43.43	53.56	-10.13 Average
4	0.201	10.00	38.76	48.76	63.56	-14.80 QP
5	0.397	9.93	31.94	41.87	47.91	-6.04 Average
6	0.397	9.93	34.95	44.88	57.91	-13.03 QP
7	0.504	9.90	28.67	38.57	46.00	-7.43 Average
8	0.504	9.90	32.51	42.41	56.00	-13.59 QP
9	3.528	10.02	28.37	38.39	46.00	-7.61 Average
10	3.528	10.02	33.43	43.45	56.00	-12.55 QP
11	13.381	10.06	23.90	33.96	50.00	-16.04 Average
12	13.381	10.06	28.69	38.75	60.00	-21.25 QP


FCC §15.209, §15.205 & §15.247(d) & RSS-247 § 5.5 - Spurious Emissions

Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247 § 5.5; RSS-GEN § 8.10

EUT Setup

Below 1 GHz:

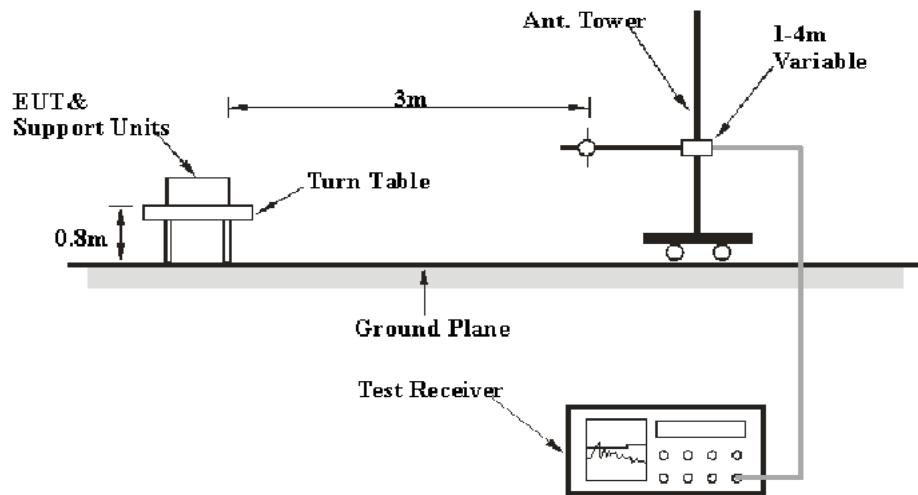

Above 1GHz:

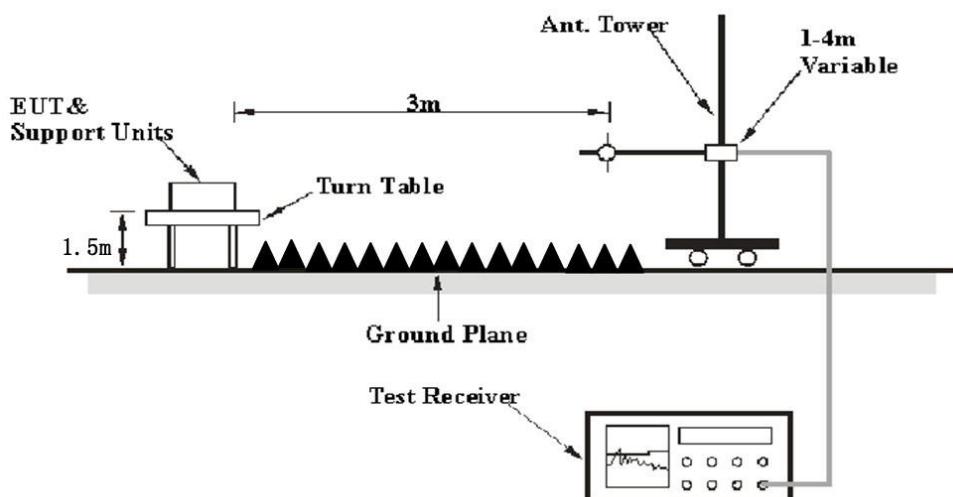

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	25~26.4 °C
Relative Humidity:	53~64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Deng on 2021-11-21 for below 1GHz, Bin Deng and Caro Hu on 2021-11-12 and 2021-11-21 for above 1GHz.

EUT operation mode: Transmitting (Scan with GFSK, π/4-DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)

Below 1GHz:**Worst case for 8DPSK Mode, High channel:****Adapter 1**

Horizontal

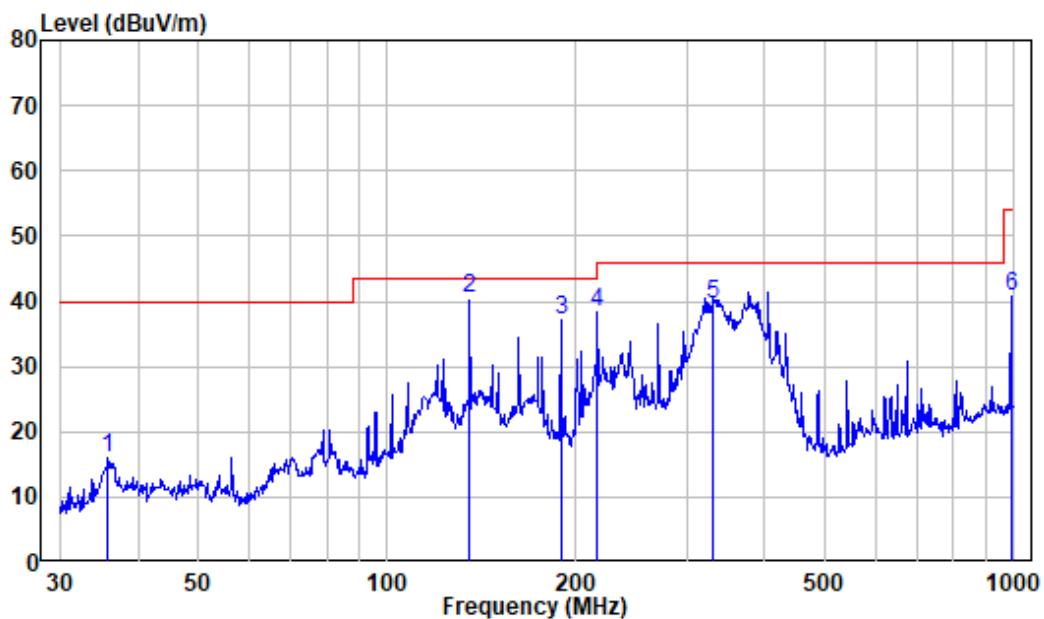

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS211026-55055E-RF

Test Mode: BT3.0

Freq	Factor	Read		Limit	Over	Remark
		MHz	dB/m	Level	dB _{UV} /m	dB _{UV} /m
1	35.87	-19.31	35.33	16.02	40.00	-23.98 Peak
2	135.03	-22.49	63.00	40.51	43.50	-2.99 QP
3	189.07	-20.27	57.41	37.14	43.50	-6.36 Peak
4	216.02	-18.99	57.21	38.22	46.00	-7.78 Peak
5	331.35	-16.60	56.01	39.41	46.00	-6.59 QP
6	989.54	-7.58	48.46	40.88	54.00	-13.12 Peak

Vertical

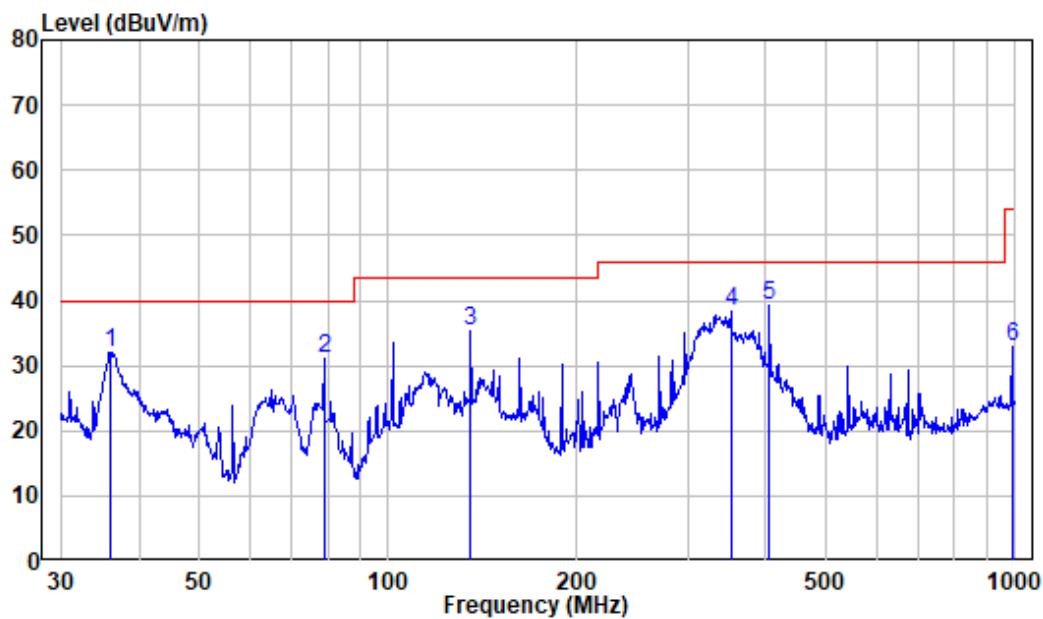

Site : chamber

Condition: 3m VERTICAL


Job No. : SZNS211026-55055E-RF

Test Mode: BT3.0

	Freq	Read Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.00	-19.29	51.26	31.97	40.00	-8.03	Peak
2	78.97	-23.07	54.26	31.19	40.00	-8.81	Peak
3	135.03	-22.49	57.95	35.46	43.50	-8.04	Peak
4	351.71	-16.05	54.37	38.32	46.00	-7.68	Peak
5	404.67	-15.55	54.69	39.14	46.00	-6.86	Peak
6	989.54	-7.58	40.43	32.85	54.00	-21.15	Peak

Adapter 2

Horizontal

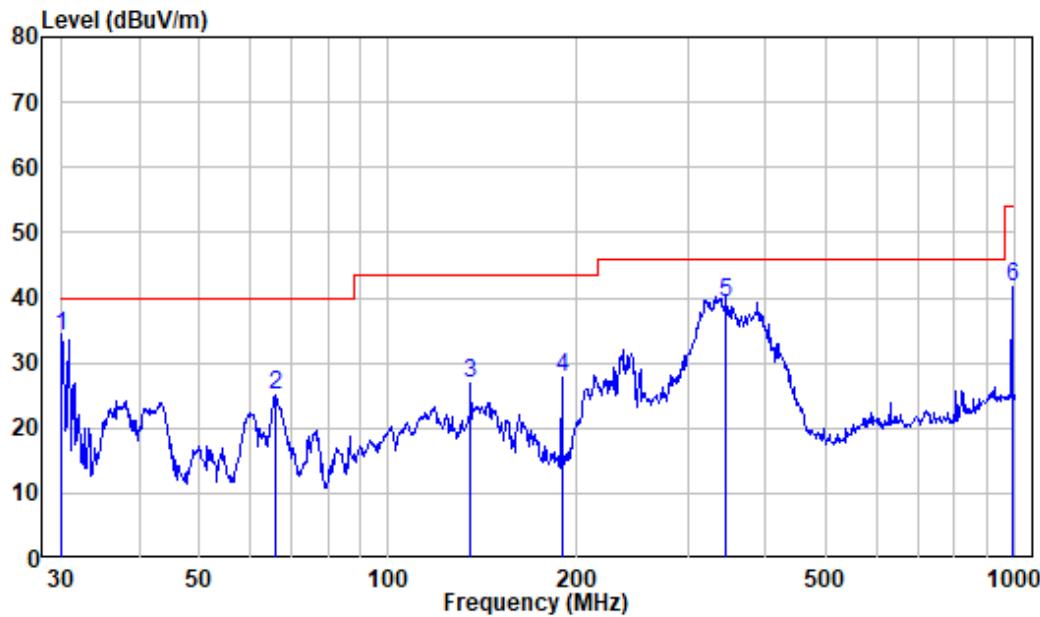

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS211026-55055E-RF

Test Mode: BT3.0

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.11	-20.53	54.63	34.10	40.00	-5.90	QP
2	66.27	-20.64	45.79	25.15	40.00	-14.85	Peak
3	135.03	-22.49	49.38	26.89	43.50	-16.61	Peak
4	189.07	-20.27	48.00	27.73	43.50	-15.77	Peak
5	345.60	-16.21	55.33	39.12	46.00	-6.88	QP
6	989.54	-7.58	49.12	41.54	54.00	-12.46	Peak

Vertical

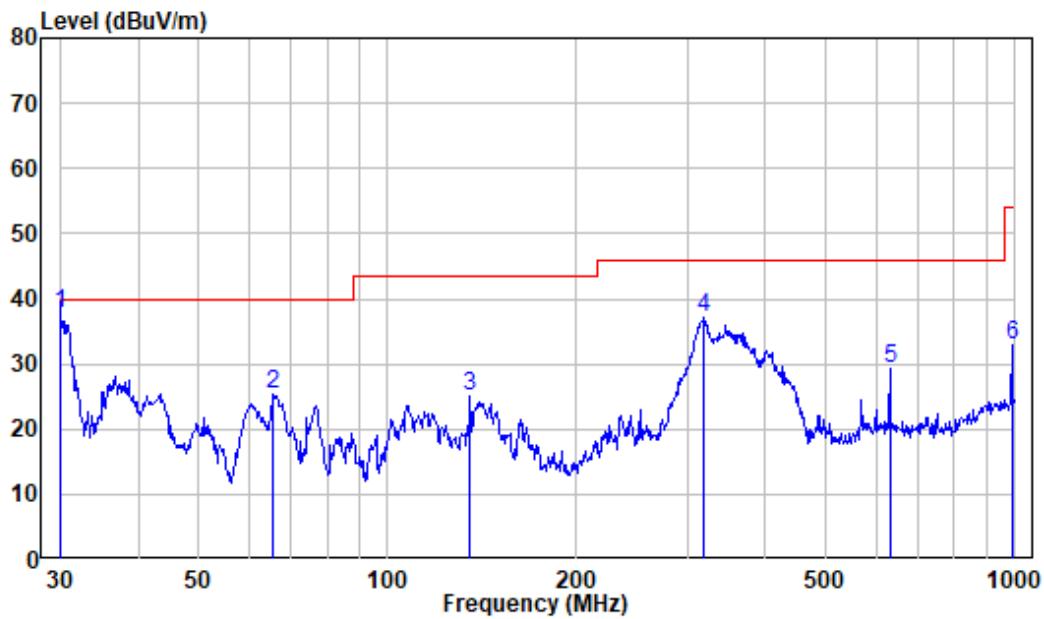

Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS211026-55055E-RF

Test Mode: BT3.0

	Freq	Read Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.00	-20.55	58.32	37.77	40.00	-2.23	QP
2	65.80	-20.54	45.90	25.36	40.00	-14.64	Peak
3	135.03	-22.49	47.45	24.96	43.50	-18.54	Peak
4	319.94	-16.75	53.93	37.18	46.00	-8.82	Peak
5	631.69	-11.38	40.58	29.20	46.00	-16.80	Peak
6	989.54	-7.58	40.54	32.96	54.00	-21.04	Peak

Above 1GHz: (worst case for 8DPSK, adapter 1)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
Low Channel									
2310	70.64	PK	225	1.5	H	-10.64	60.00	74	-14.00
2310	56.31	AV	225	1.5	H	-10.64	45.67	54	-8.33
2310	71.10	PK	260	1.5	V	-10.64	60.46	74	-13.54
2310	56.31	AV	260	1.5	V	-10.64	45.67	54	-8.33
2390	71.89	PK	147	2.1	H	-10.37	61.52	74	-12.48
2390	57.23	AV	147	2.1	H	-10.37	46.86	54	-7.14
2390	71.51	PK	97	1.5	V	-10.37	61.14	74	-12.86
2390	57.23	AV	97	1.5	V	-10.37	46.86	54	-7.14
4804	56.30	PK	219	2	H	-4.65	51.65	74	-22.35
4804	55.46	PK	58	2	V	-4.65	50.81	74	-23.19
Middle Channel									
4882	55.85	PK	351	1.6	H	-4.47	51.38	74	-22.62
4882	55.72	PK	329	1.6	V	-4.47	51.25	74	-22.75
High Channel									
2483.5	71.73	PK	58	1.1	H	-10.08	61.65	74	-12.35
2483.5	57.69	AV	58	1.1	H	-10.08	47.61	54	-6.39
2483.5	72.25	PK	28	2.3	V	-10.08	62.17	74	-11.83
2483.5	57.68	AV	28	2.3	V	-10.08	47.6	54	-6.40
2500	71.94	PK	189	1.2	H	-10.04	61.9	74	-12.10
2500	57.04	AV	189	1.2	H	-10.04	47	54	-7.00
2500	71.27	PK	316	1.8	V	-10.04	61.23	74	-12.77
2500	56.80	AV	316	1.8	V	-10.04	46.76	54	-7.24
4960	55.37	PK	14	1.7	H	-4.24	51.13	74	-22.87
4960	55.13	PK	359	1.7	V	-4.24	50.89	74	-23.11

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss - Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected Amplitude - Limit

The other spurious emission which is 20dB to the limit was not recorded.


When the test result of peak was less than the limit of average, just peak value were recorded.

For simultaneous transmitting condition, please refer to 5GHz wifi report: SZNS211026-55055E-RF-00(for FCC) and SZNS211026-55055E-RF-08(for ISEDC).


1 GHz - 18 GHz: (Pre-Scan plots)

Low channel

Horizontal

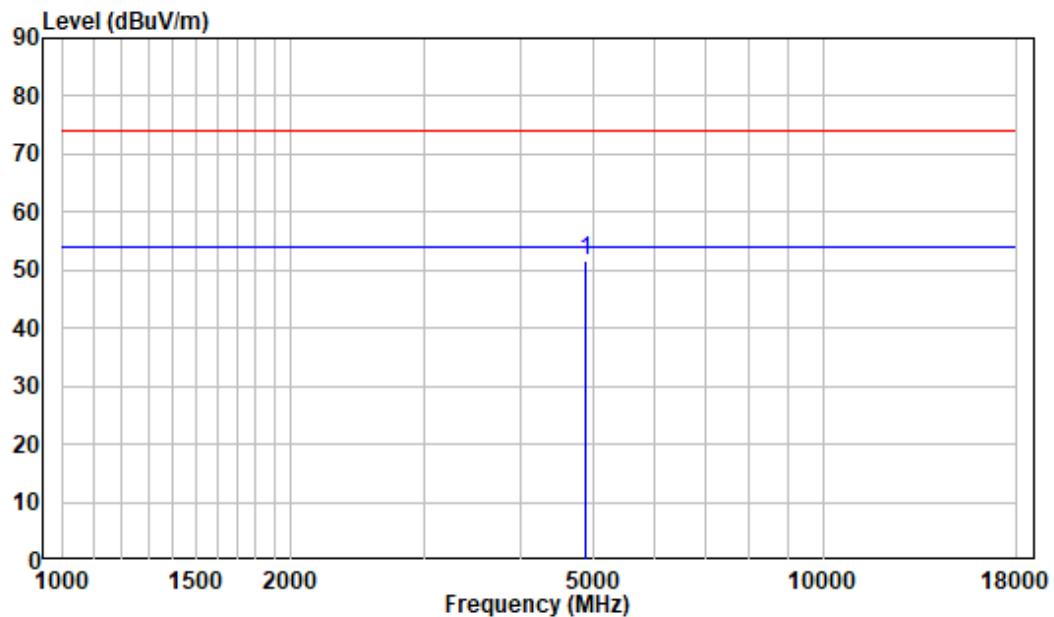


Vertical

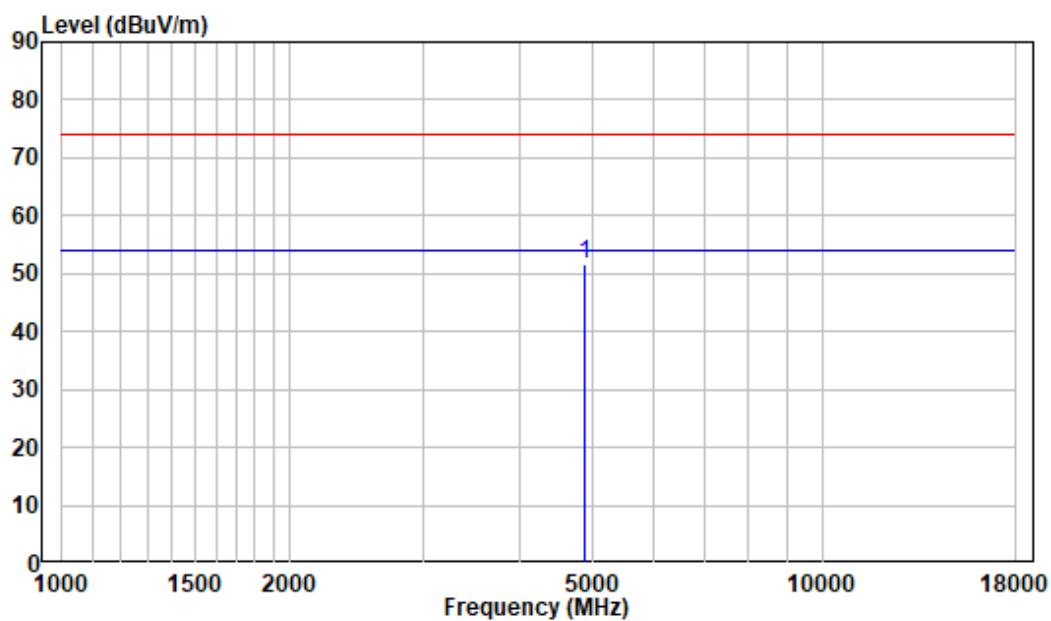


18-25GHz: (Pre-Scan plots)

Low channel

Horizontal

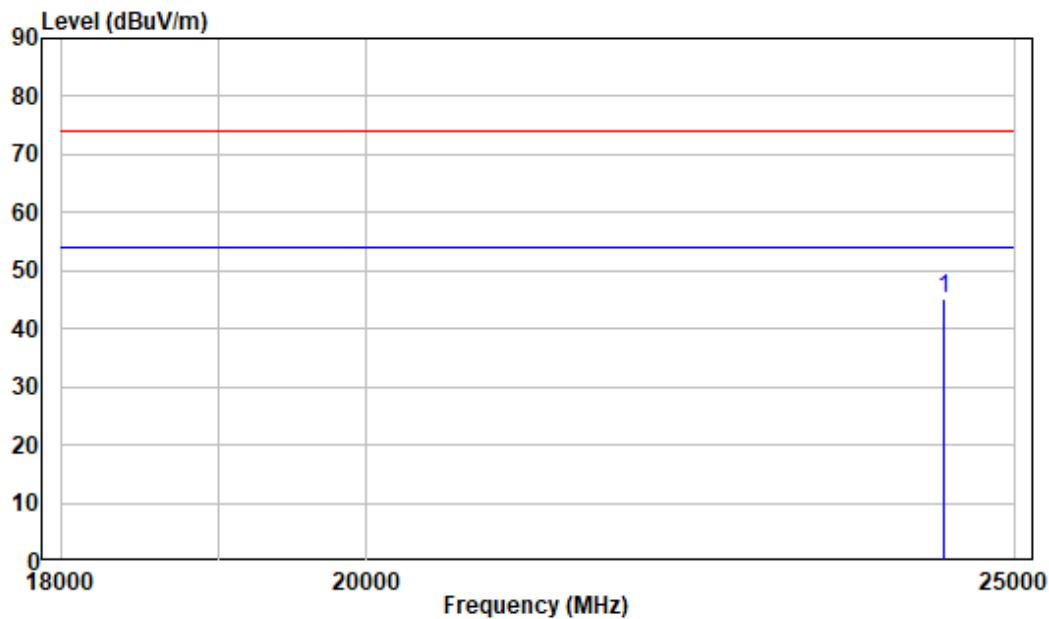

Vertical

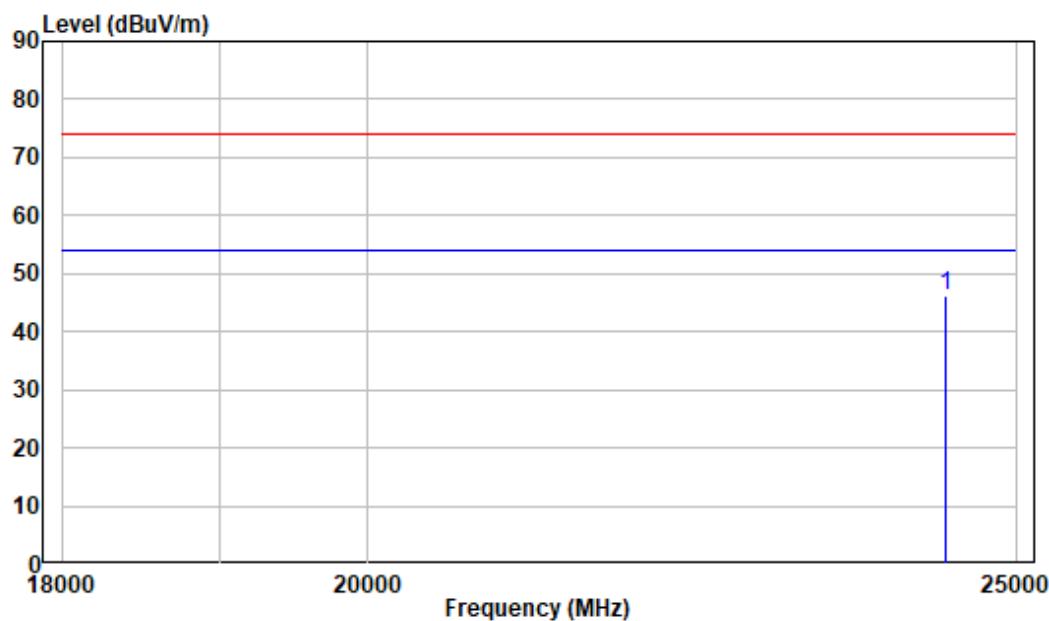

FCC §15.247(a) (1) & RSS-247 § 5.1 (b) -CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1):


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to RSS-247 § 5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.

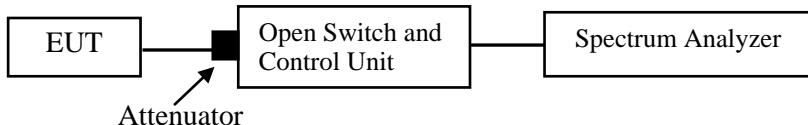

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) & RSS-247 § 5.1 (a), RSS-GEN § 6.7 – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 § 5.1 (a), RSS-GEN § 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

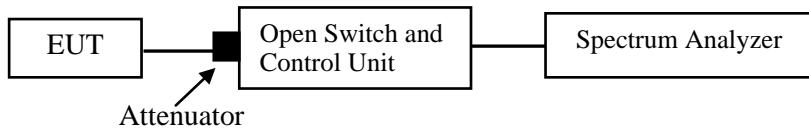

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii):


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

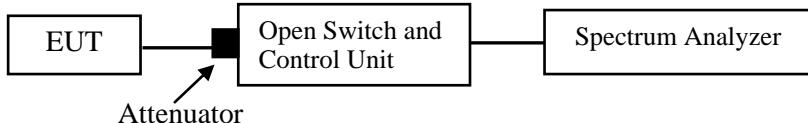

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii):


Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

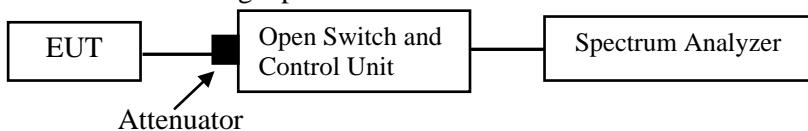

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) & RSS-247 § 5.1(b) & § 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


According to RSS-247 § 5.1(b) & § 5.4(b):

For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

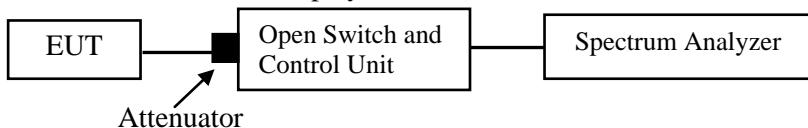

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d).


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

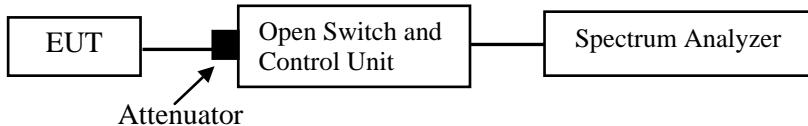

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


APPENDIX


Appendix A: 20dB Emission Bandwidth


Test Result


Test Mode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.97	2401.53	2402.50	---	---
		2441	0.96	2440.54	2441.50	---	---
		2480	0.97	2479.53	2480.50	---	---
2DH5	Ant1	2402	1.37	2401.32	2402.69	---	---
		2441	1.37	2440.33	2441.69	---	---
		2480	1.37	2479.33	2480.69	---	---
3DH5	Ant1	2402	1.35	2401.33	2402.68	---	---
		2441	1.35	2440.33	2441.68	---	---
		2480	1.35	2479.33	2480.68	---	---


Test Graphs

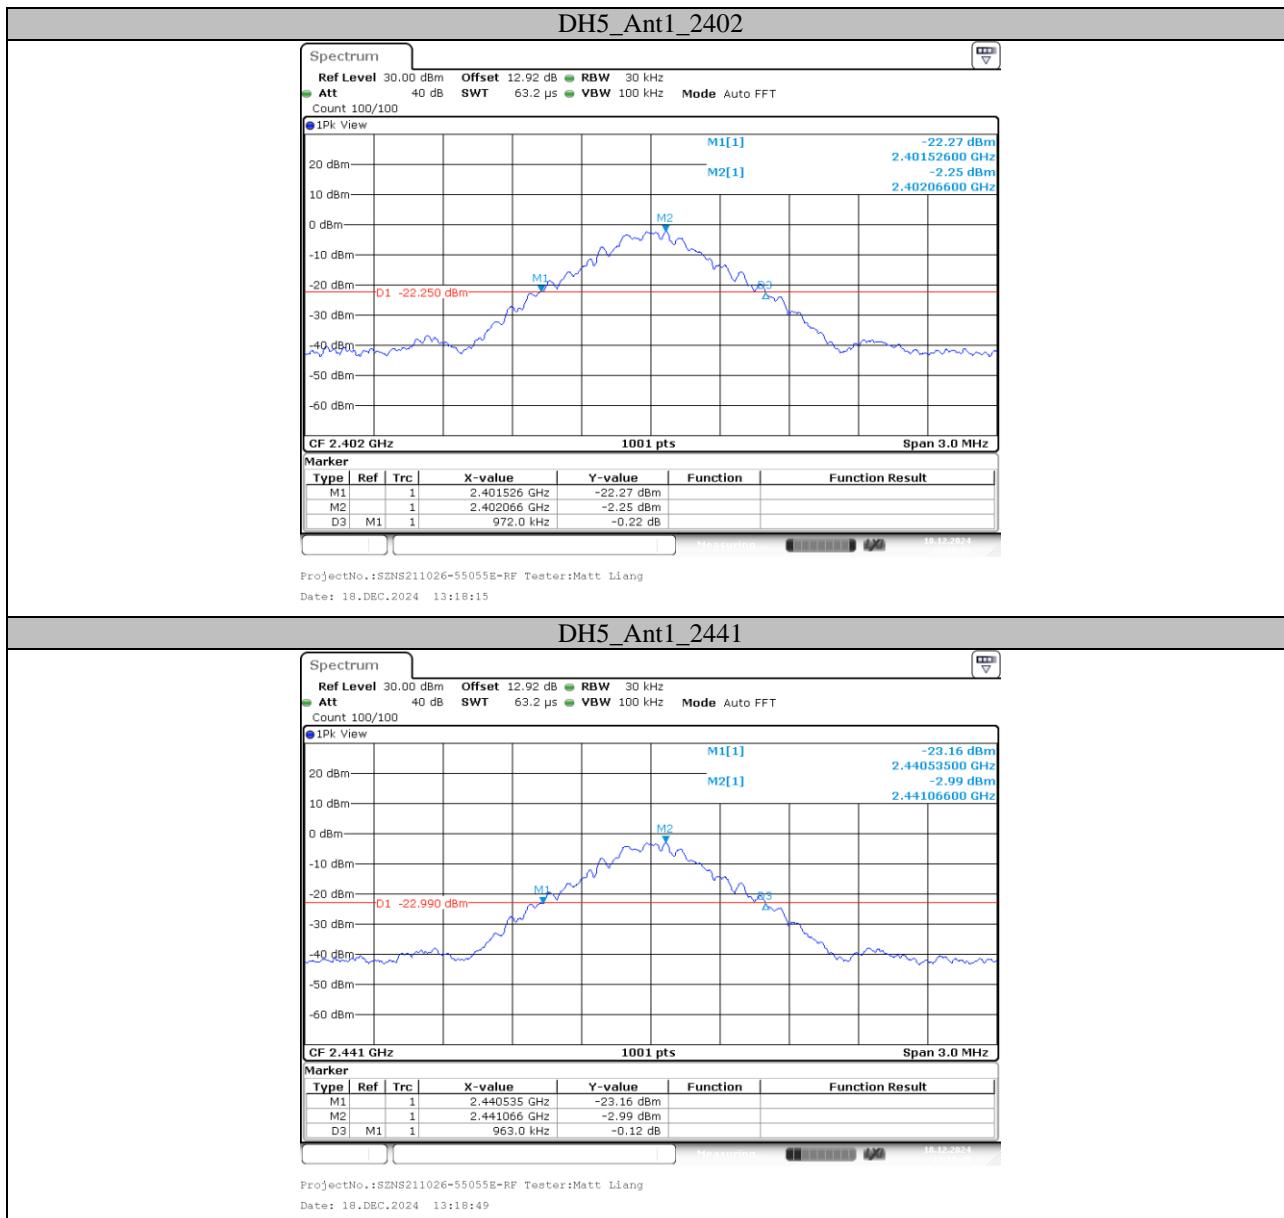

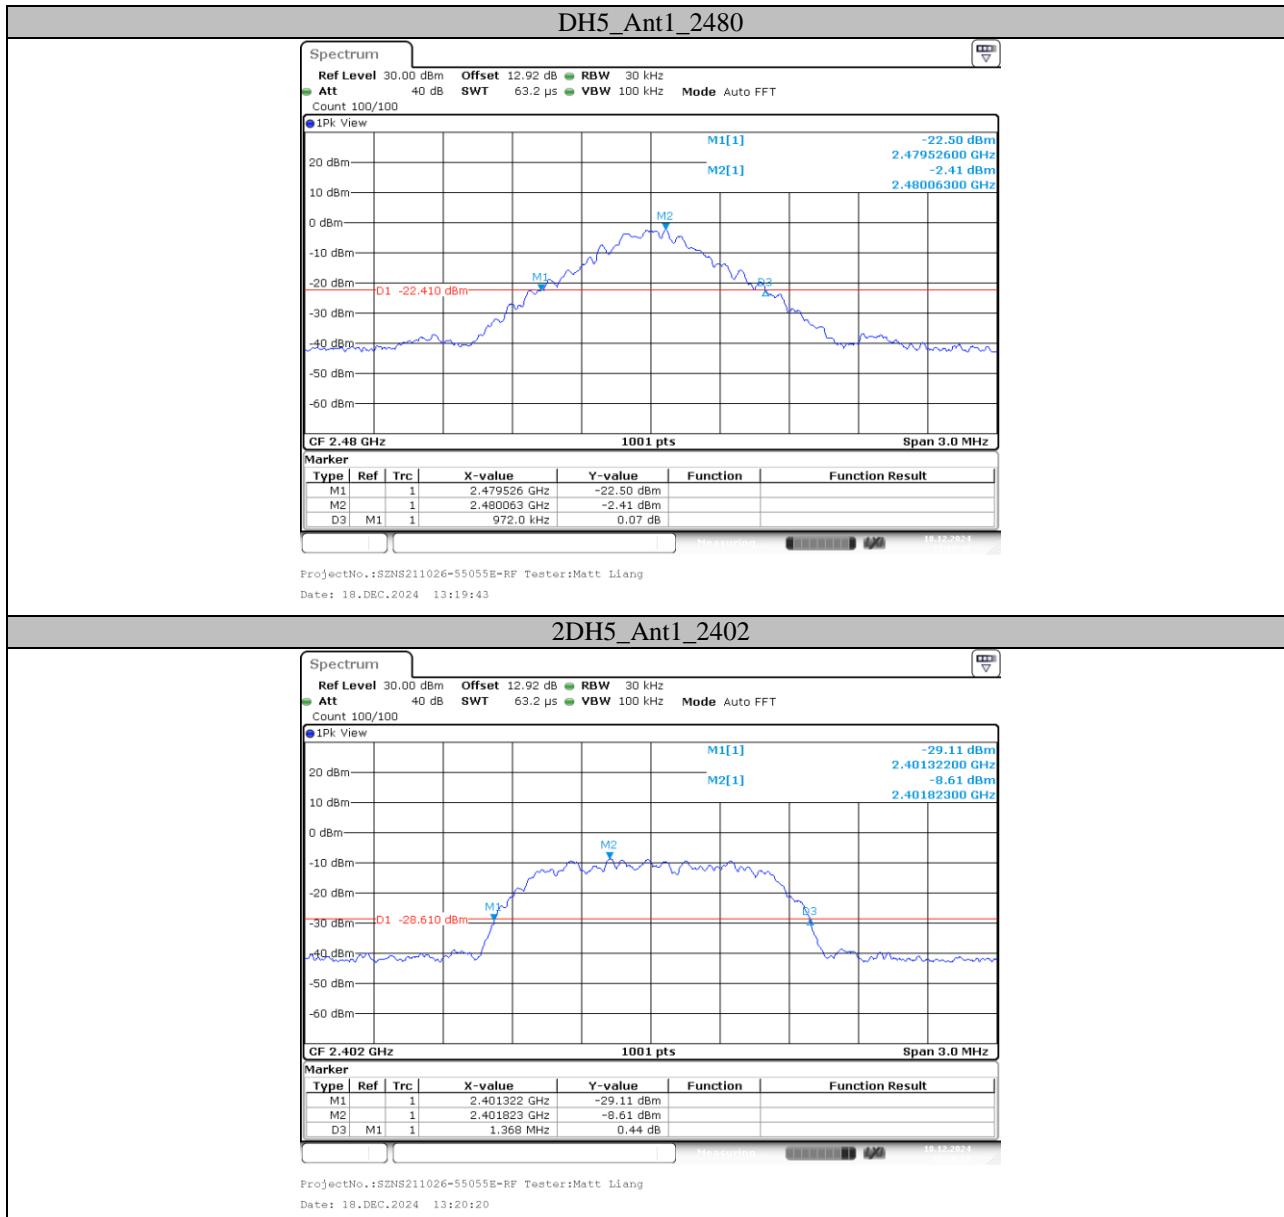

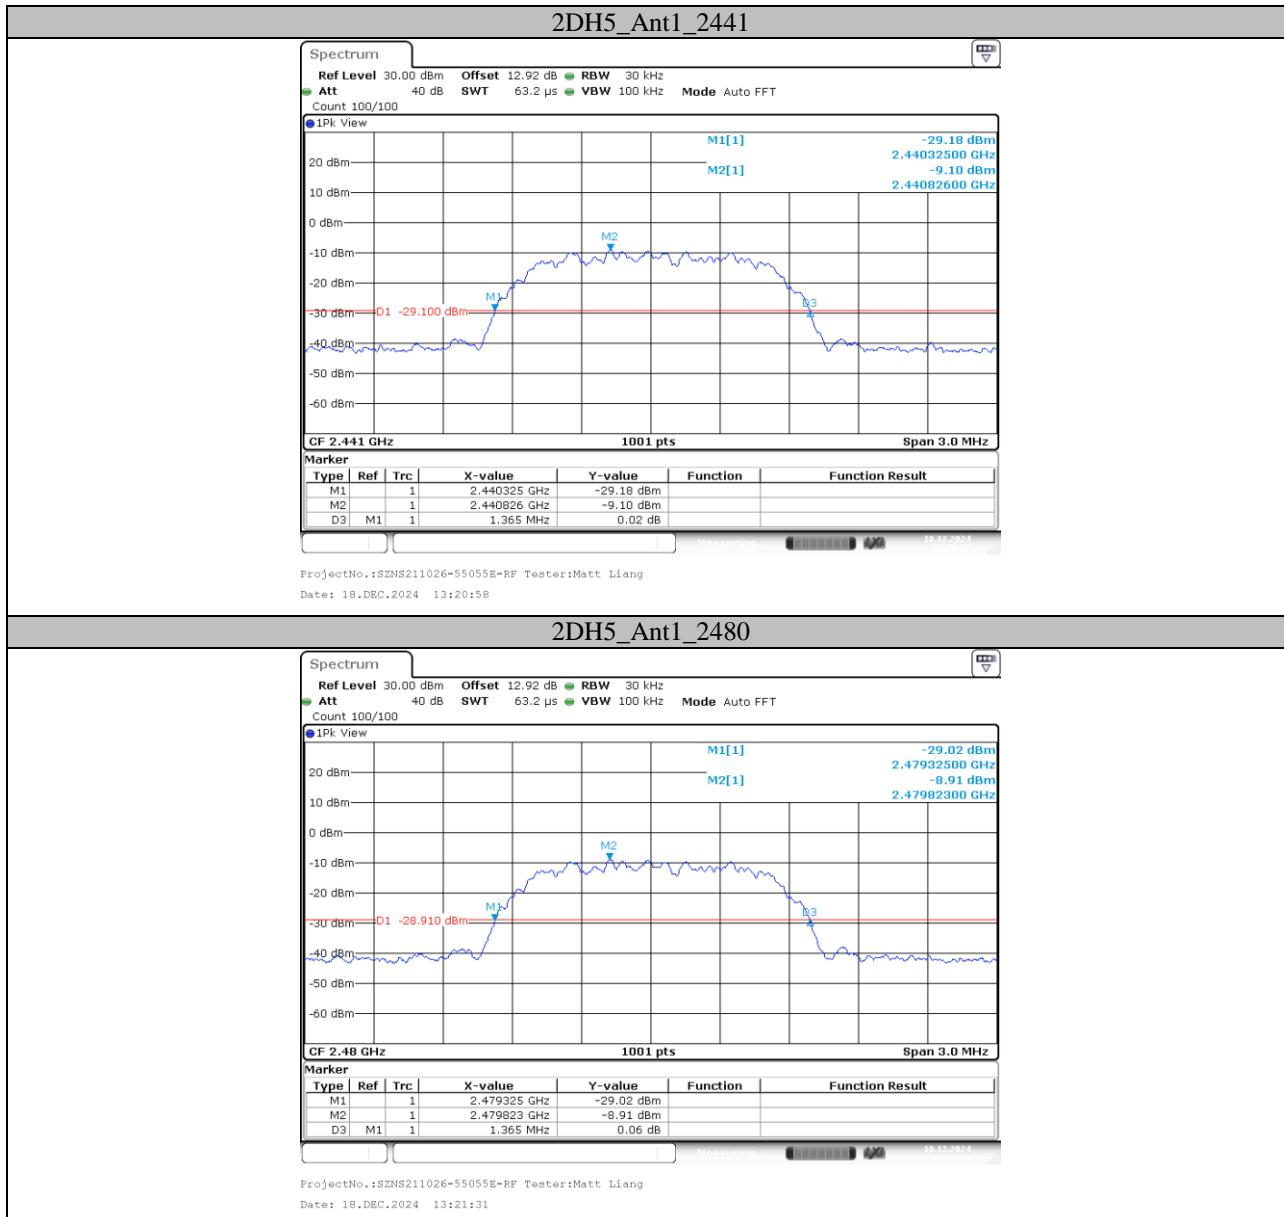

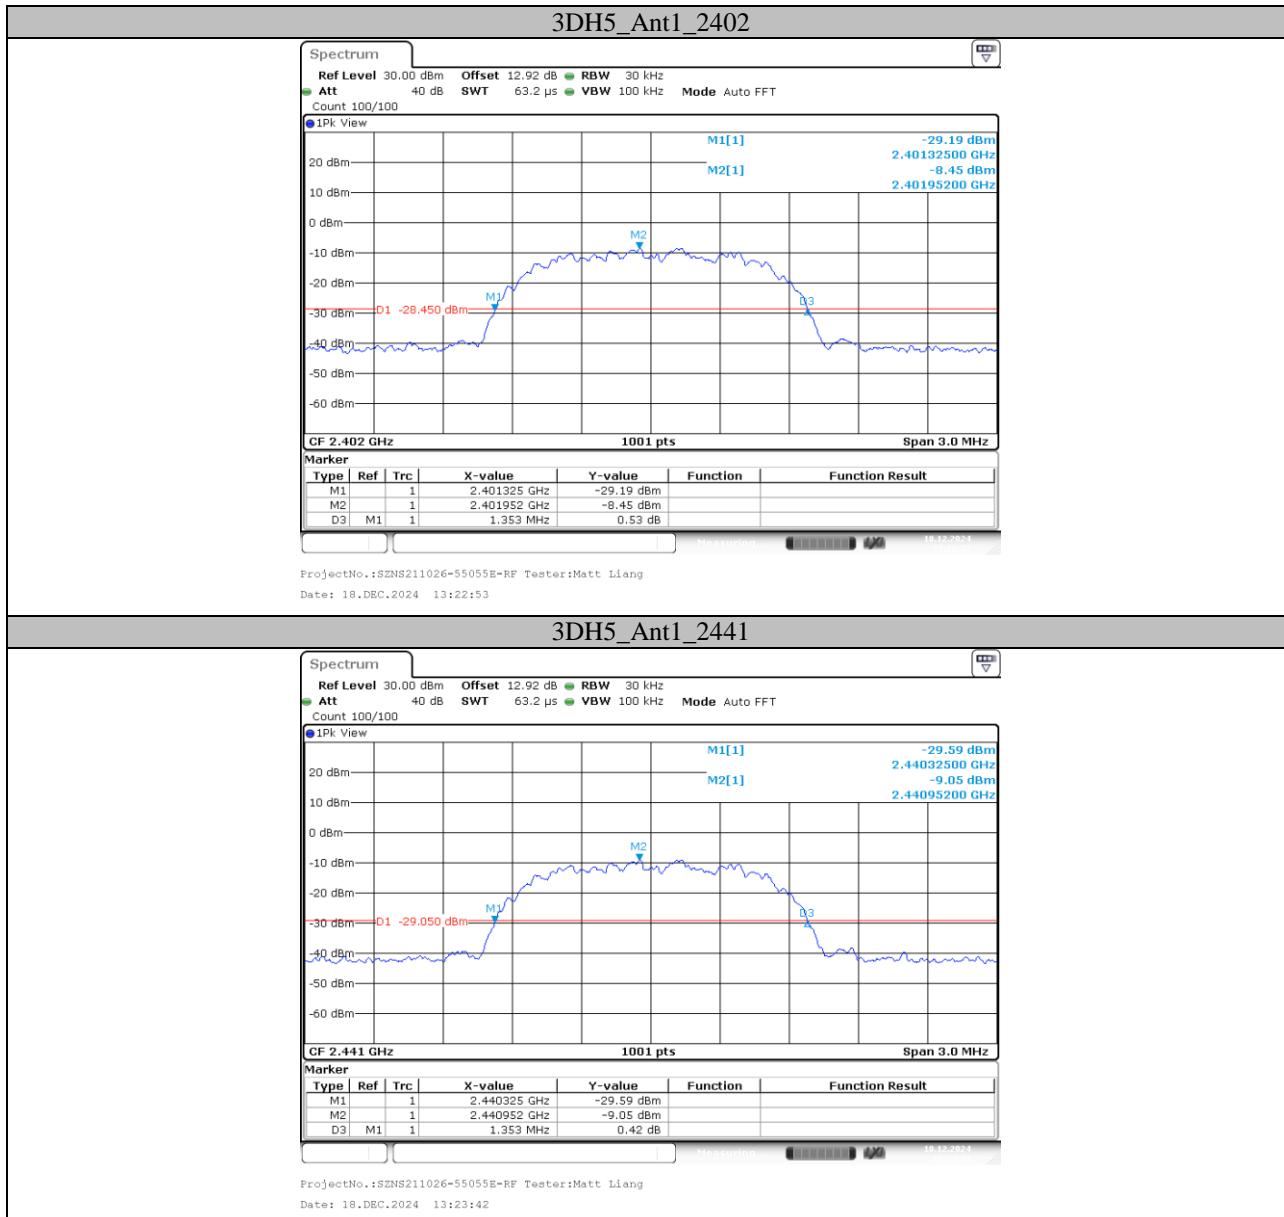


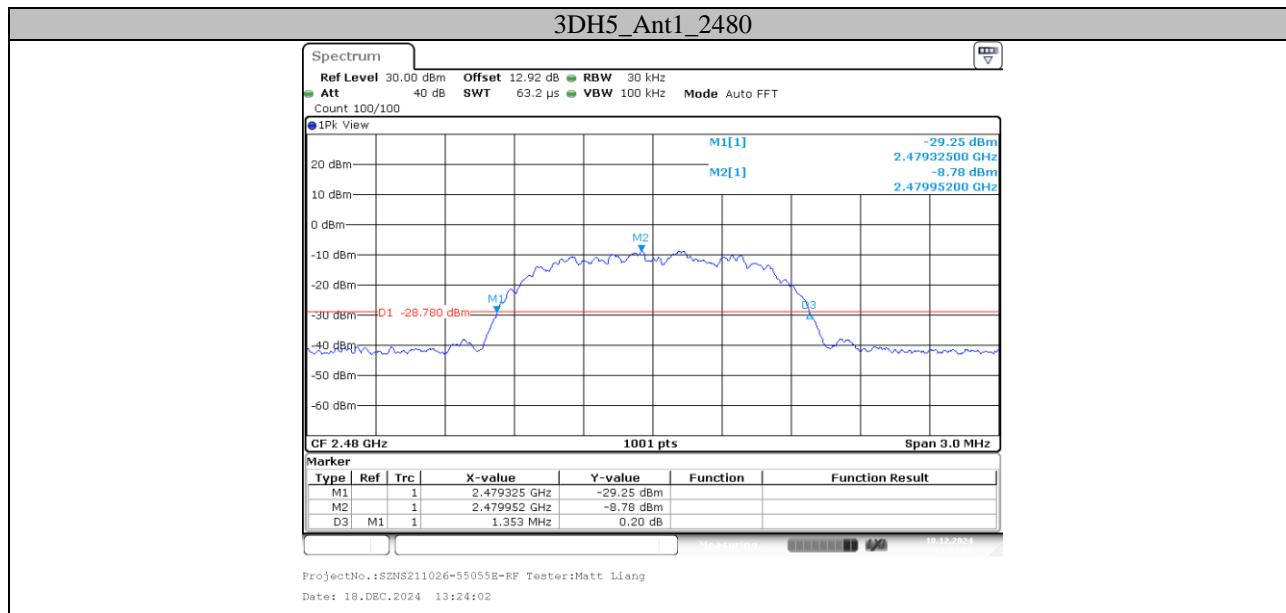



Appendix B: Occupied Channel Bandwidth**Test Result**


Test Mode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.911	2401.5534	2402.4645	---	---
		2441	0.917	2440.5504	2441.4675	---	---
		2480	0.923	2479.5475	2480.4705	---	---
2DH5	Ant1	2402	1.211	2401.4006	2402.6114	---	---
		2441	1.214	2440.4006	2441.6144	---	---
		2480	1.214	2479.4006	2480.6144	---	---
3DH5	Ant1	2402	1.214	2401.3976	2402.6114	---	---
		2441	1.214	2440.3946	2441.6084	---	---
		2480	1.217	2479.3946	2480.6114	---	---


Test Graphs

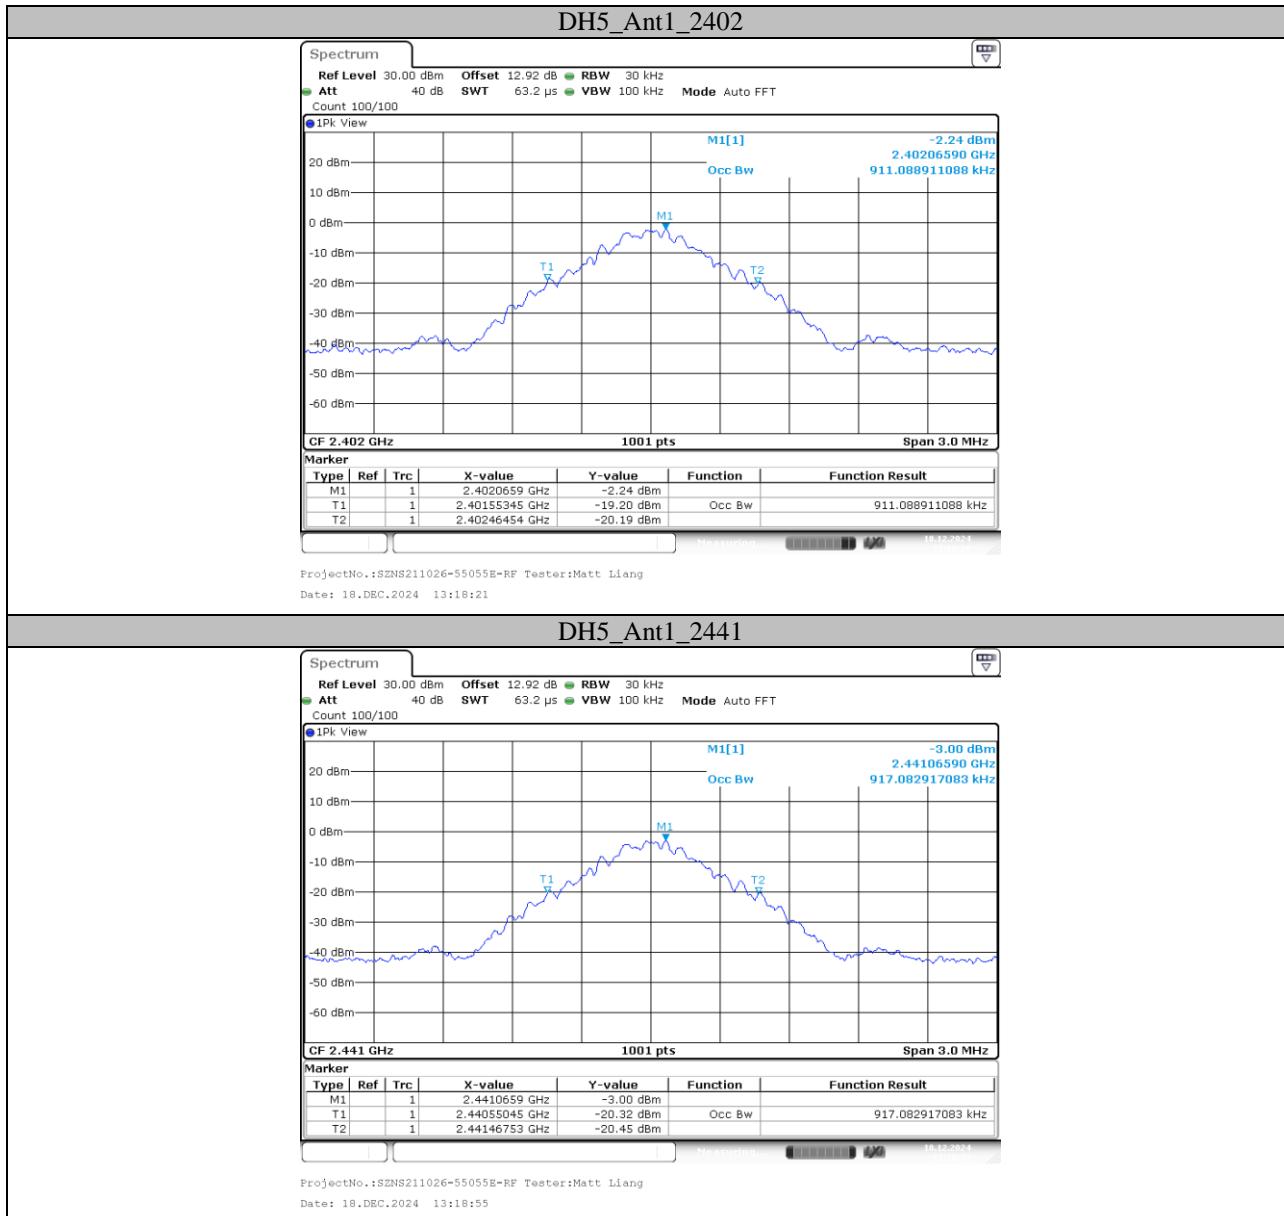

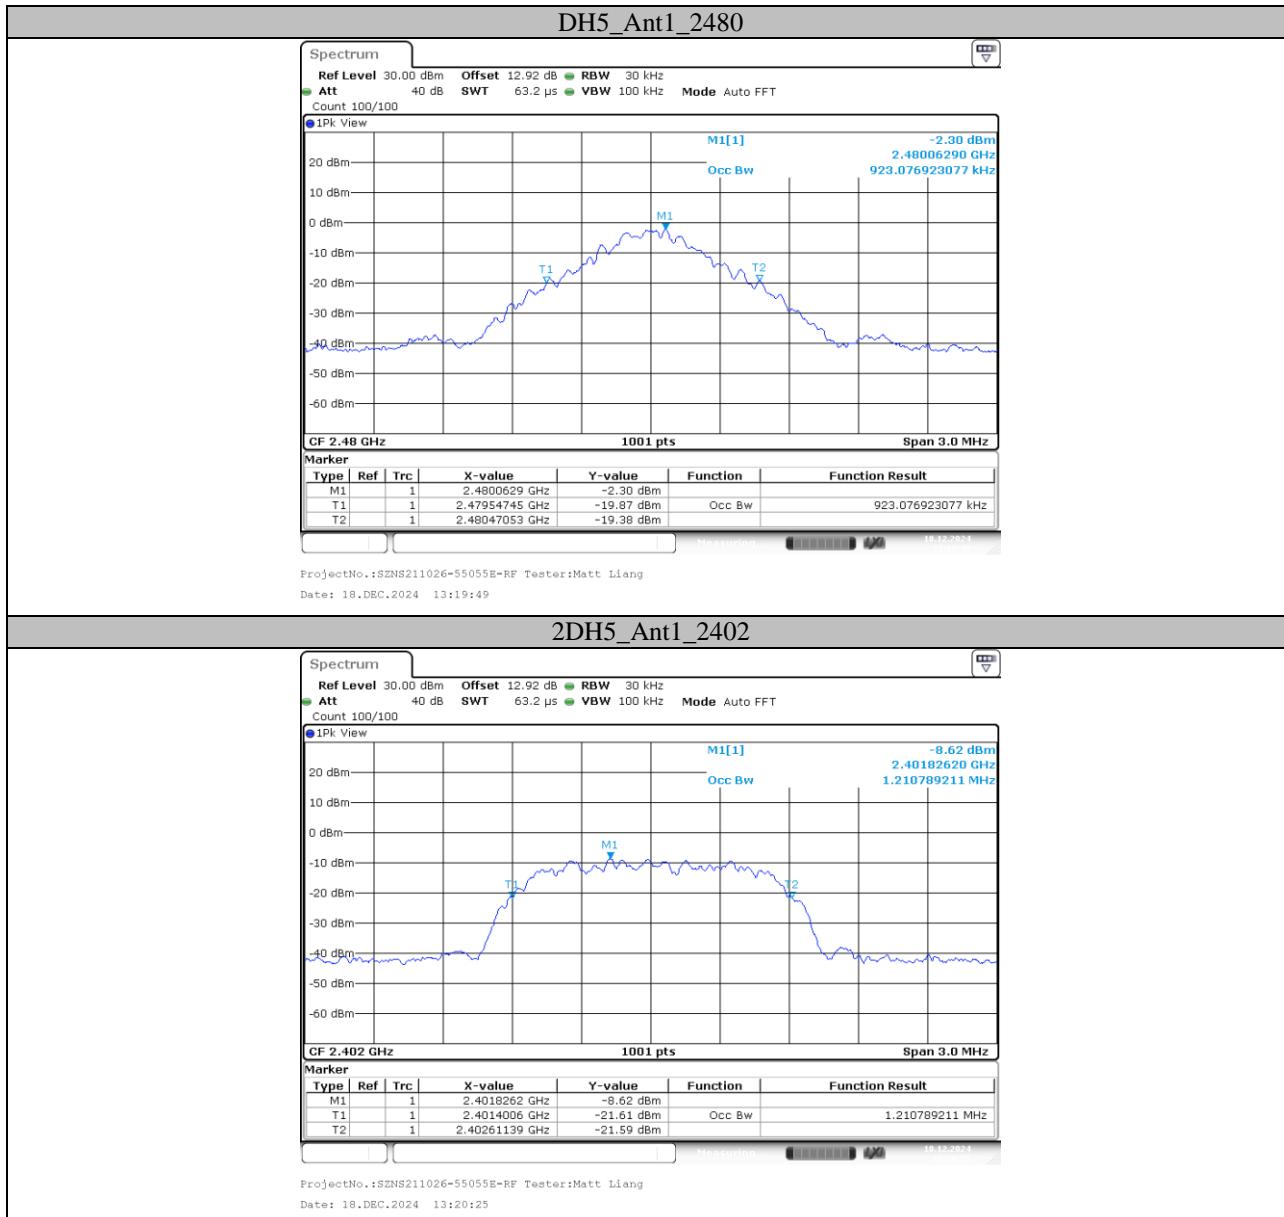

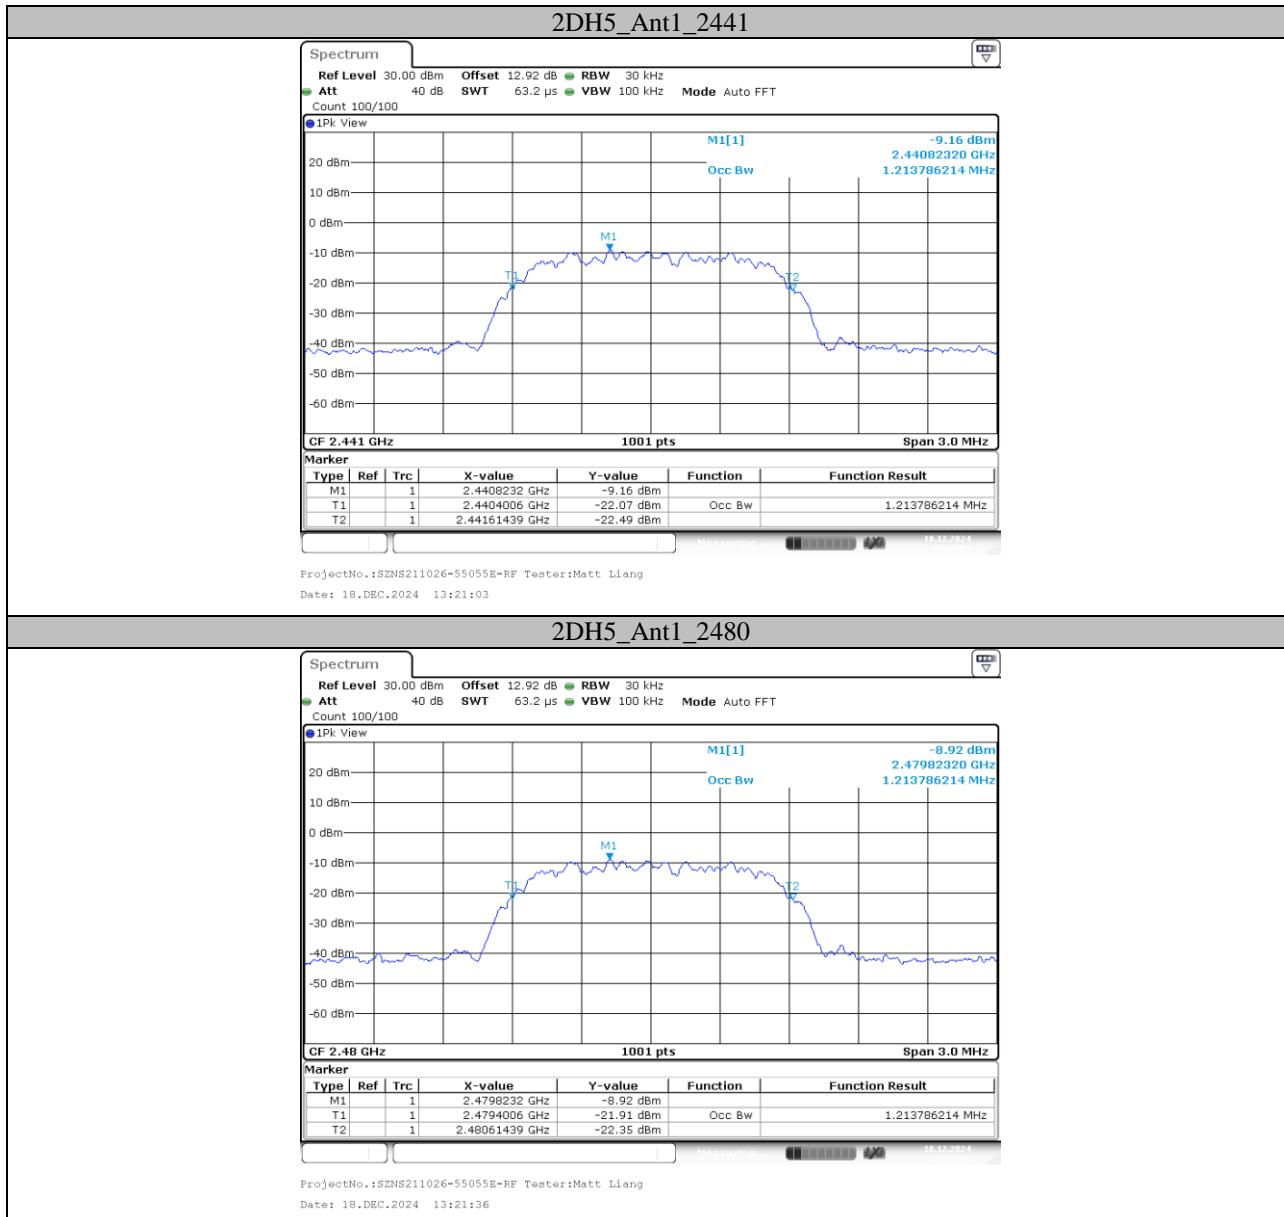


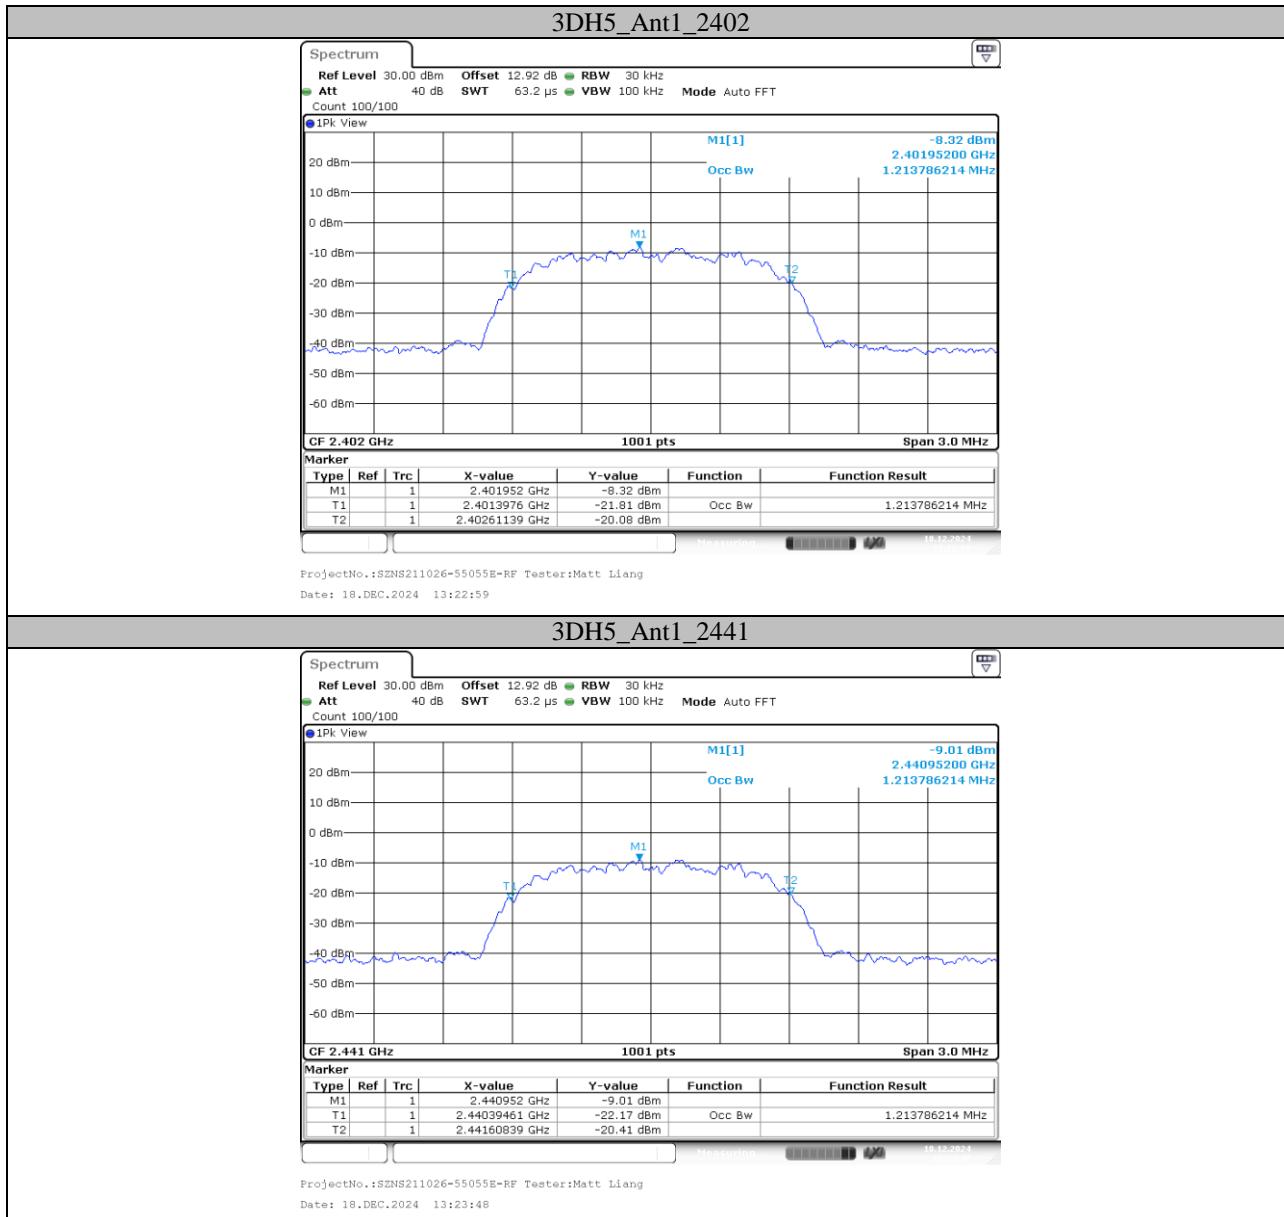


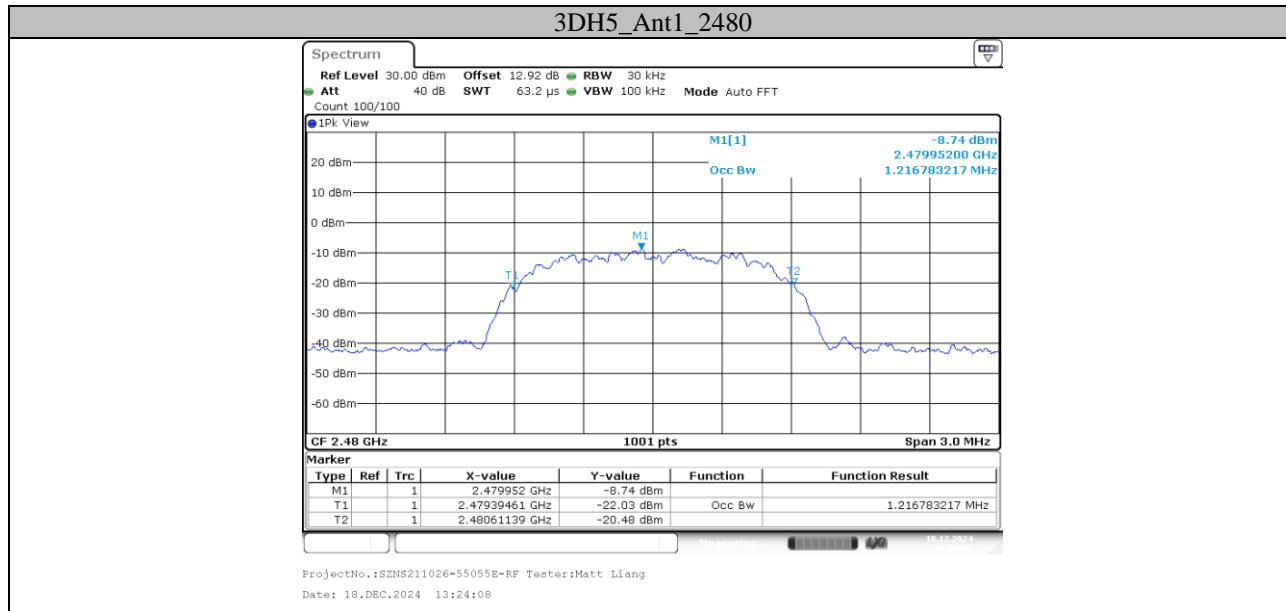



Appendix C: Maximum Conducted Output Power**Test Result Peak**


Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	0.95	≤20.97	PASS
		2441	0.87	≤20.97	PASS
		2480	1.21	≤20.97	PASS
2DH5	Ant1	2402	0.54	≤20.97	PASS
		2441	0.42	≤20.97	PASS
		2480	0.34	≤20.97	PASS
3DH5	Ant1	2402	1.11	≤20.97	PASS
		2441	0.86	≤20.97	PASS
		2480	0.88	≤20.97	PASS

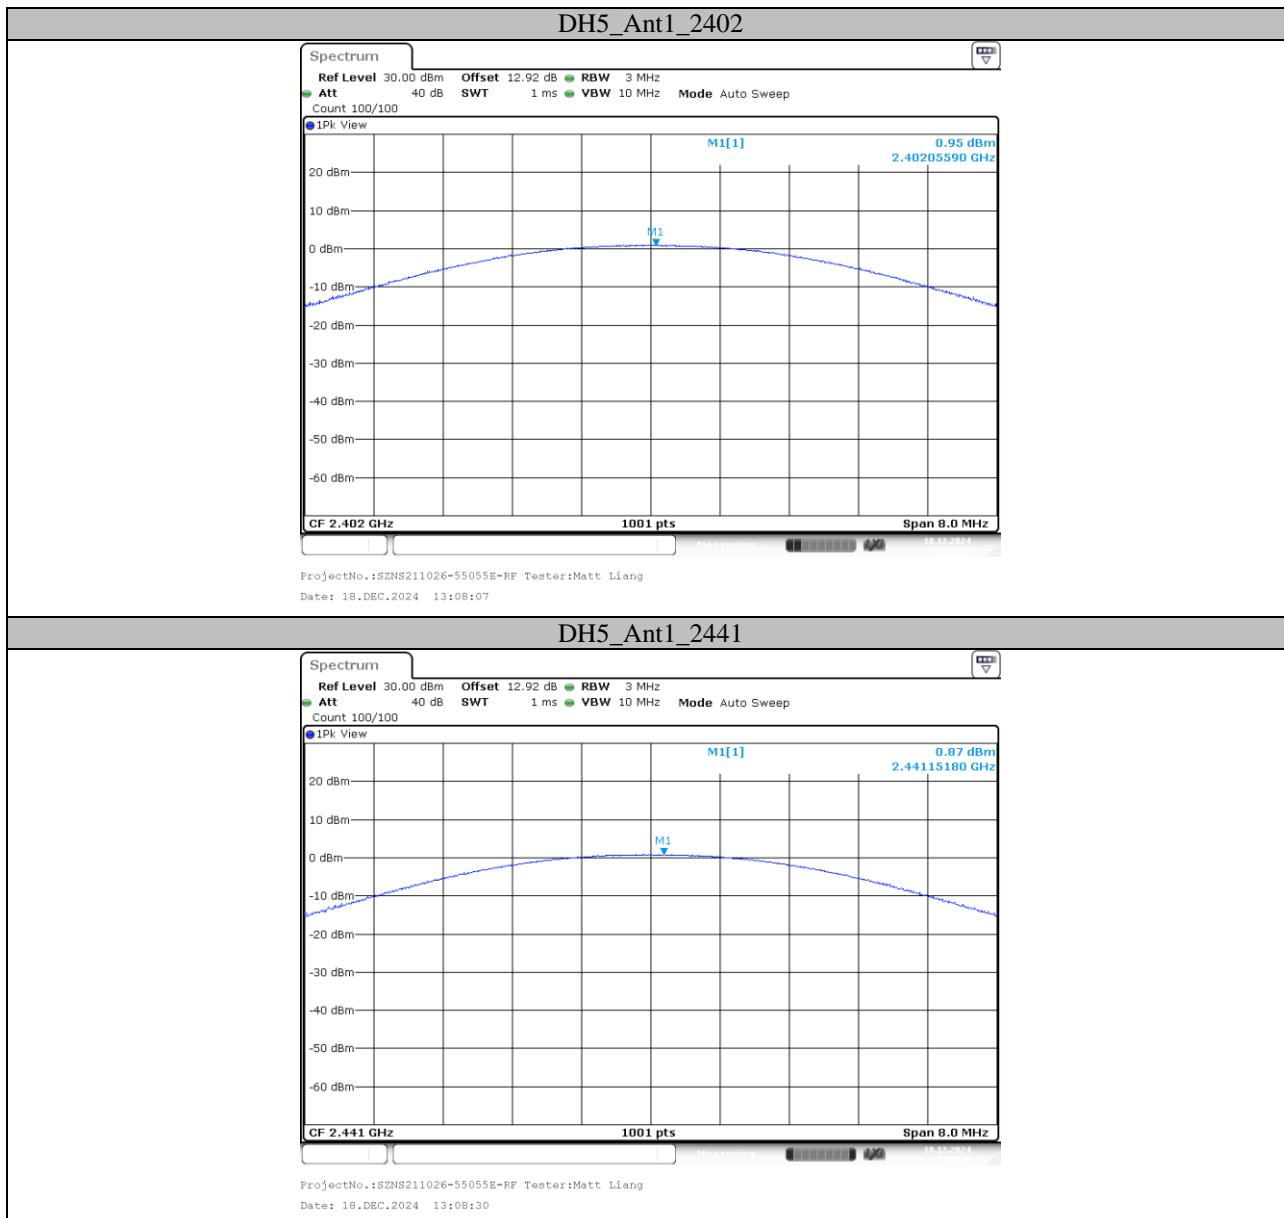Test Graphs

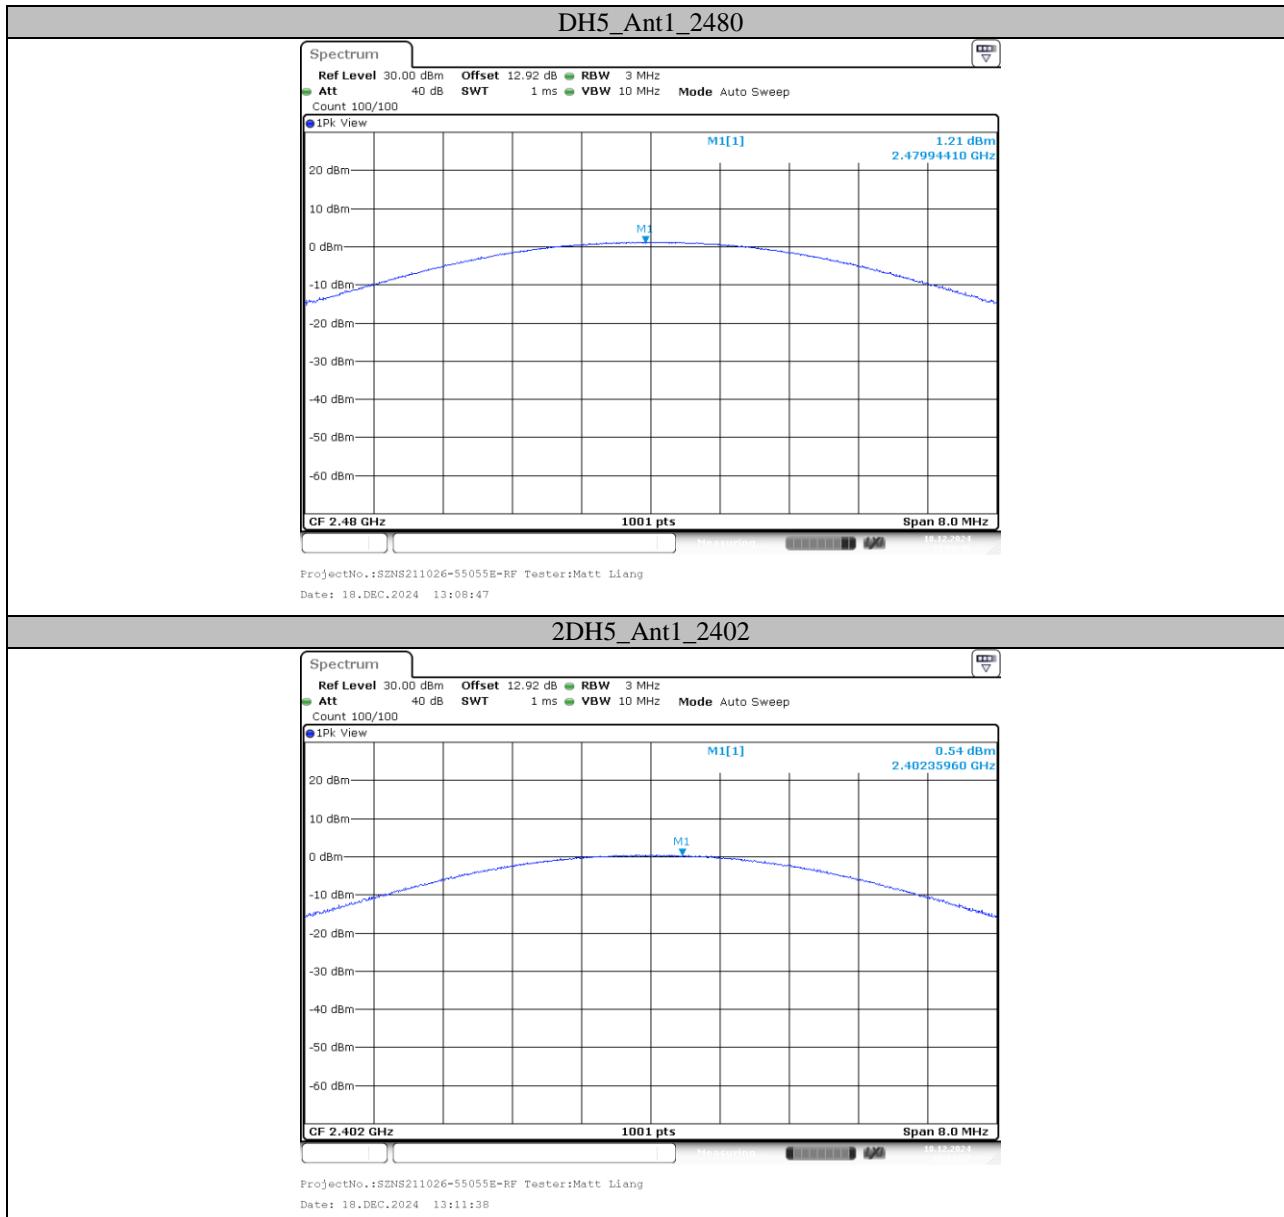

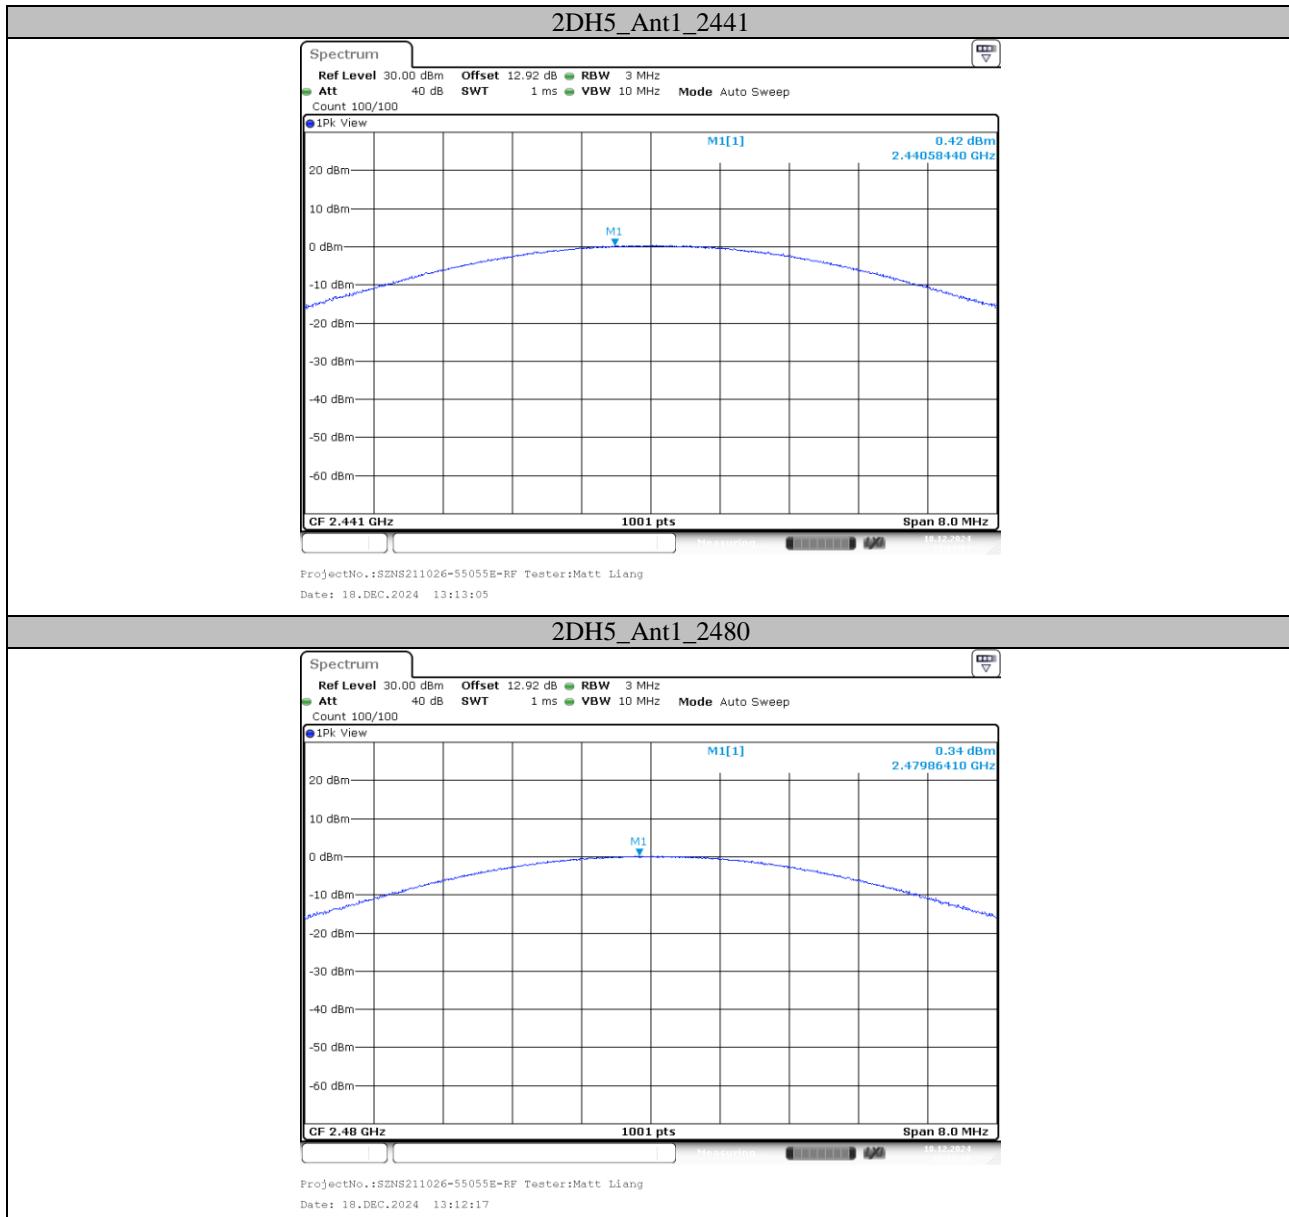

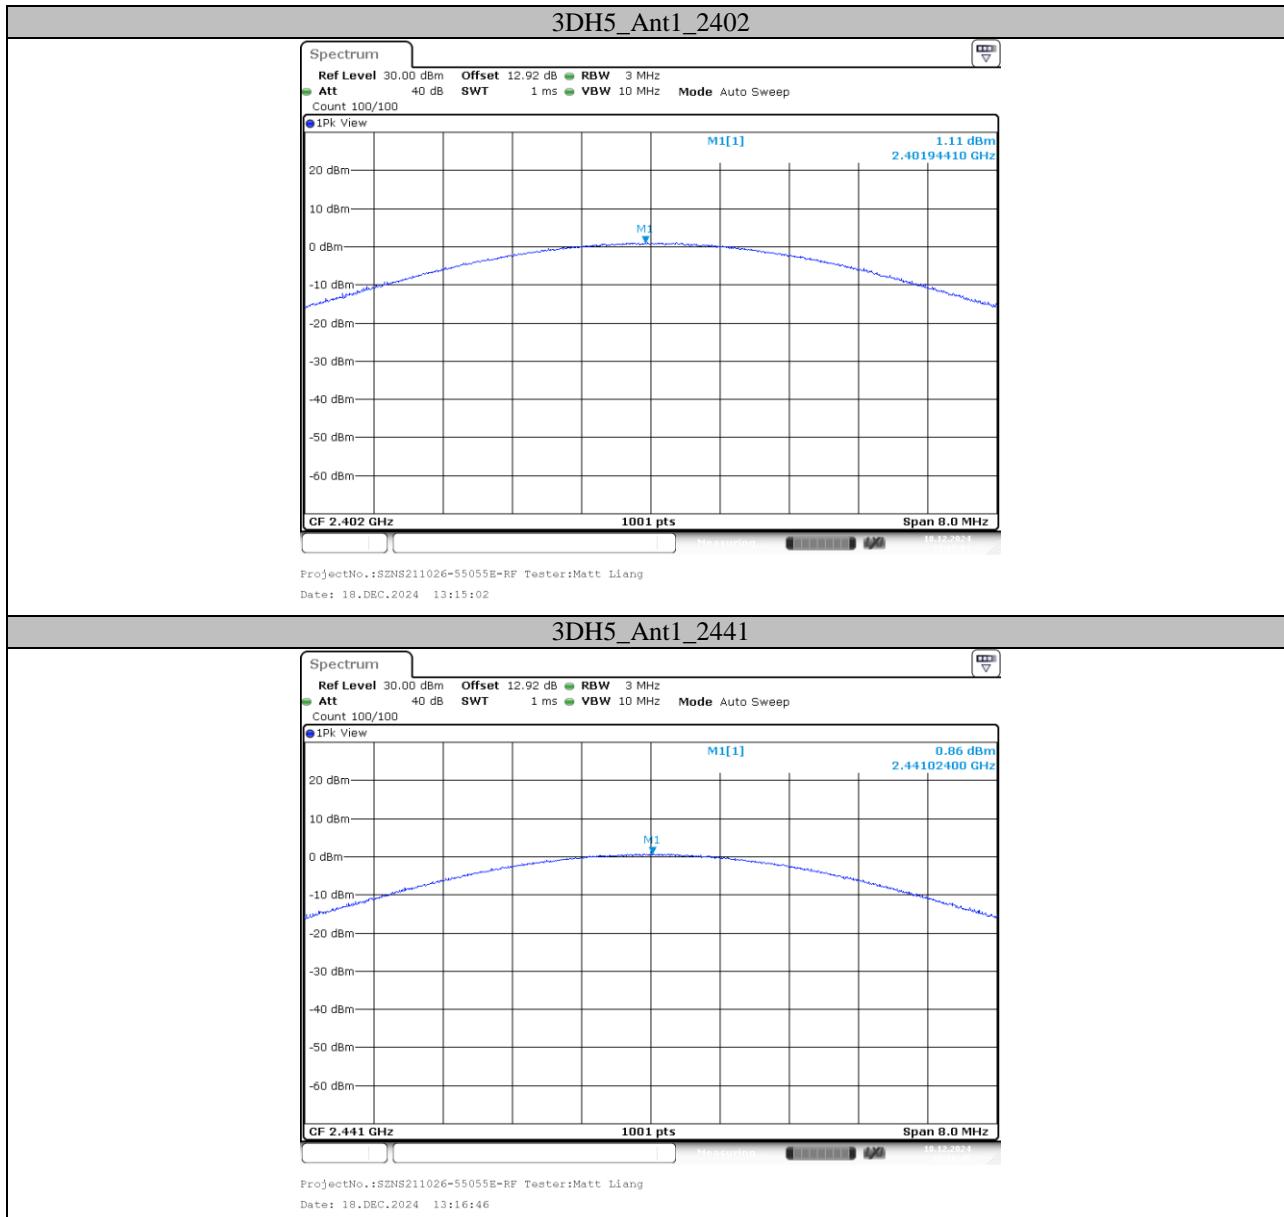

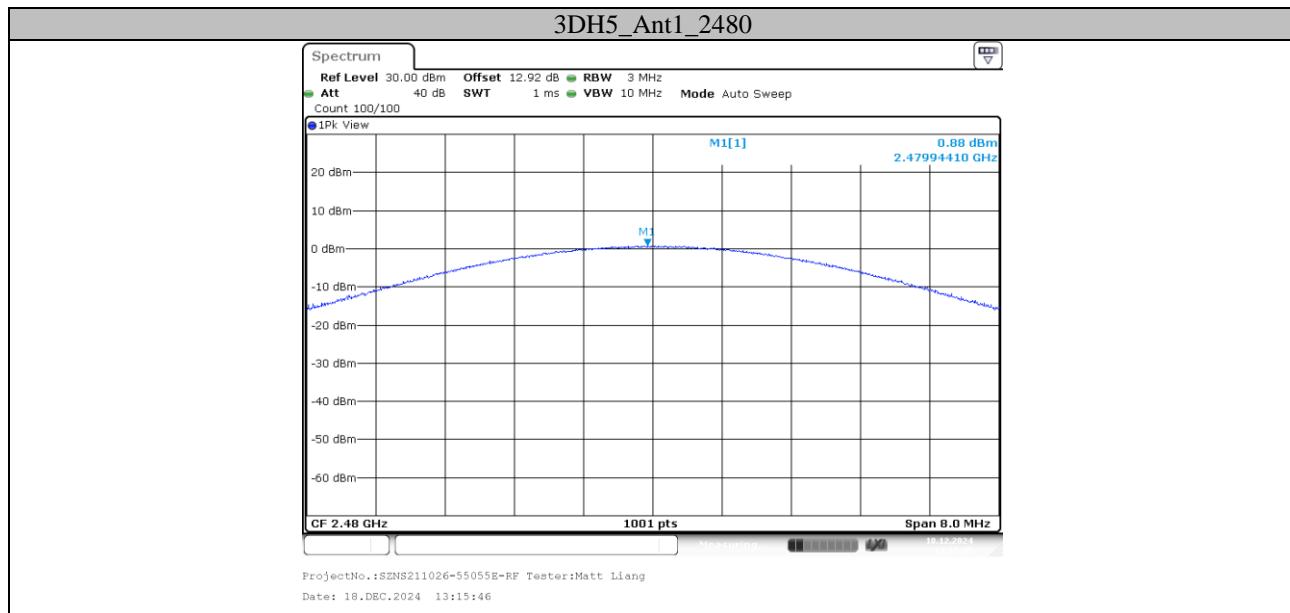



Appendix D: Carrier Frequency Separation

Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	≥ 0.647	PASS
2DH5	Ant1	Hop	1.003	≥ 0.913	PASS
3DH5	Ant1	Hop	1.003	≥ 0.900	PASS

Test Graphs

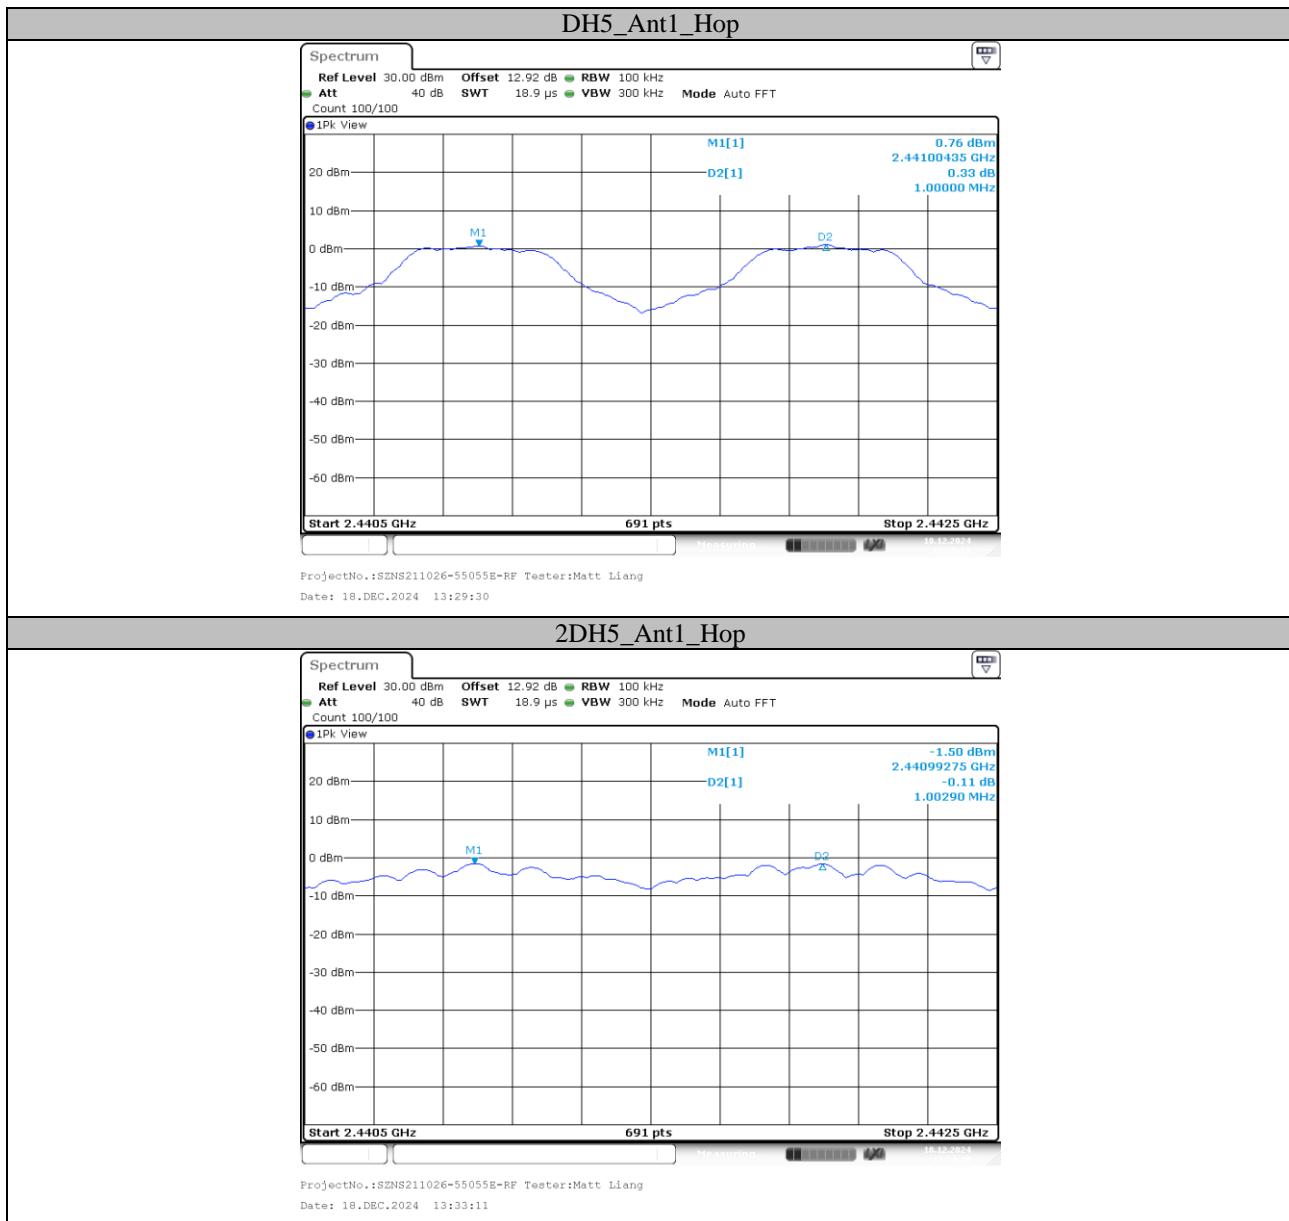


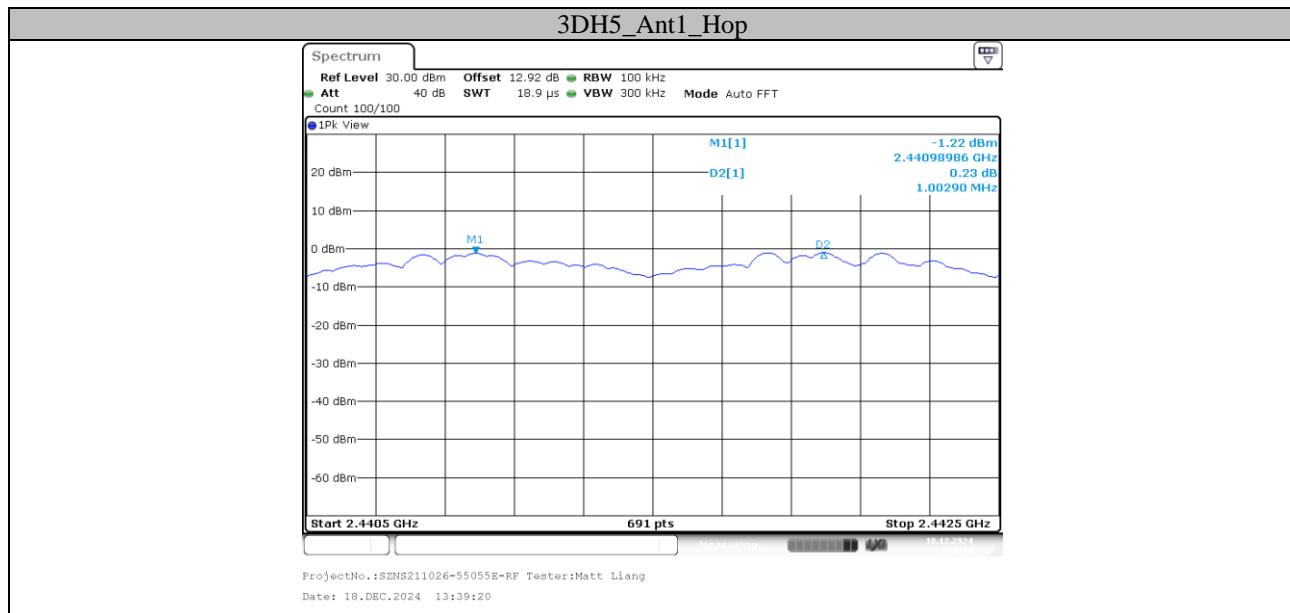



Appendix E: Time of Occupancy


Test Result


Test Mode	Antenna	Freq(MHz)	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.380	320	0.122	≤ 0.4	PASS
DH3	Ant1	Hop	1.628	180	0.293	≤ 0.4	PASS
DH5	Ant1	Hop	2.868	110	0.315	≤ 0.4	PASS
2DH1	Ant1	Hop	0.388	320	0.124	≤ 0.4	PASS
2DH3	Ant1	Hop	1.633	160	0.261	≤ 0.4	PASS
2DH5	Ant1	Hop	2.873	130	0.373	≤ 0.4	PASS
3DH1	Ant1	Hop	0.388	320	0.124	≤ 0.4	PASS
3DH3	Ant1	Hop	1.631	160	0.261	≤ 0.4	PASS
3DH5	Ant1	Hop	2.874	130	0.374	≤ 0.4	PASS

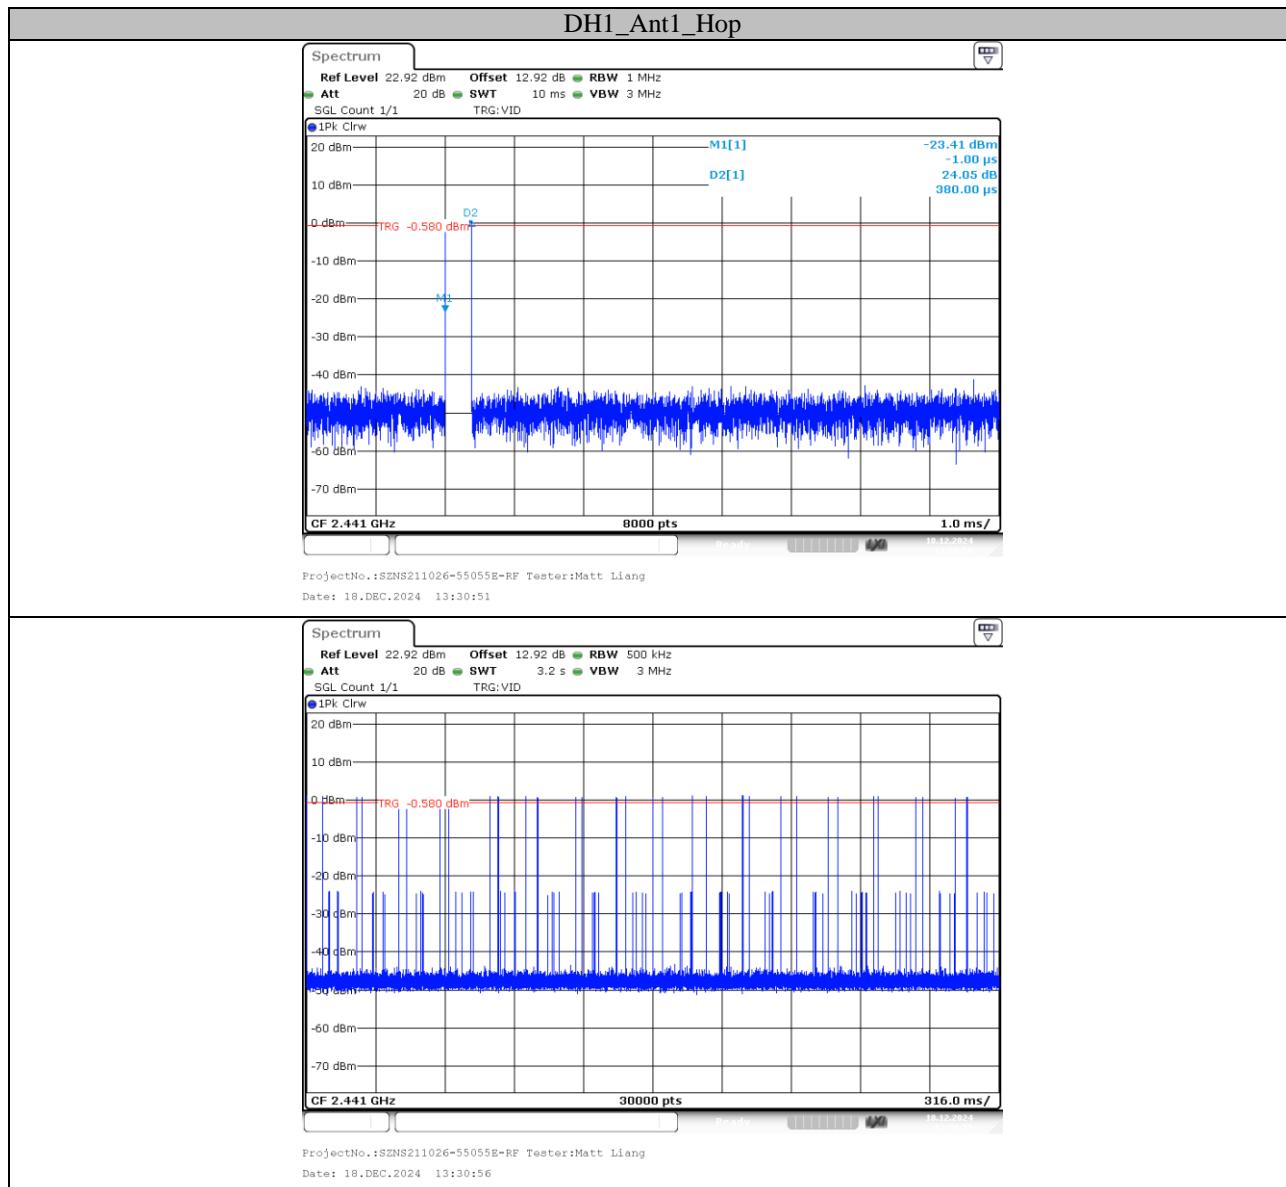
Test Graphs

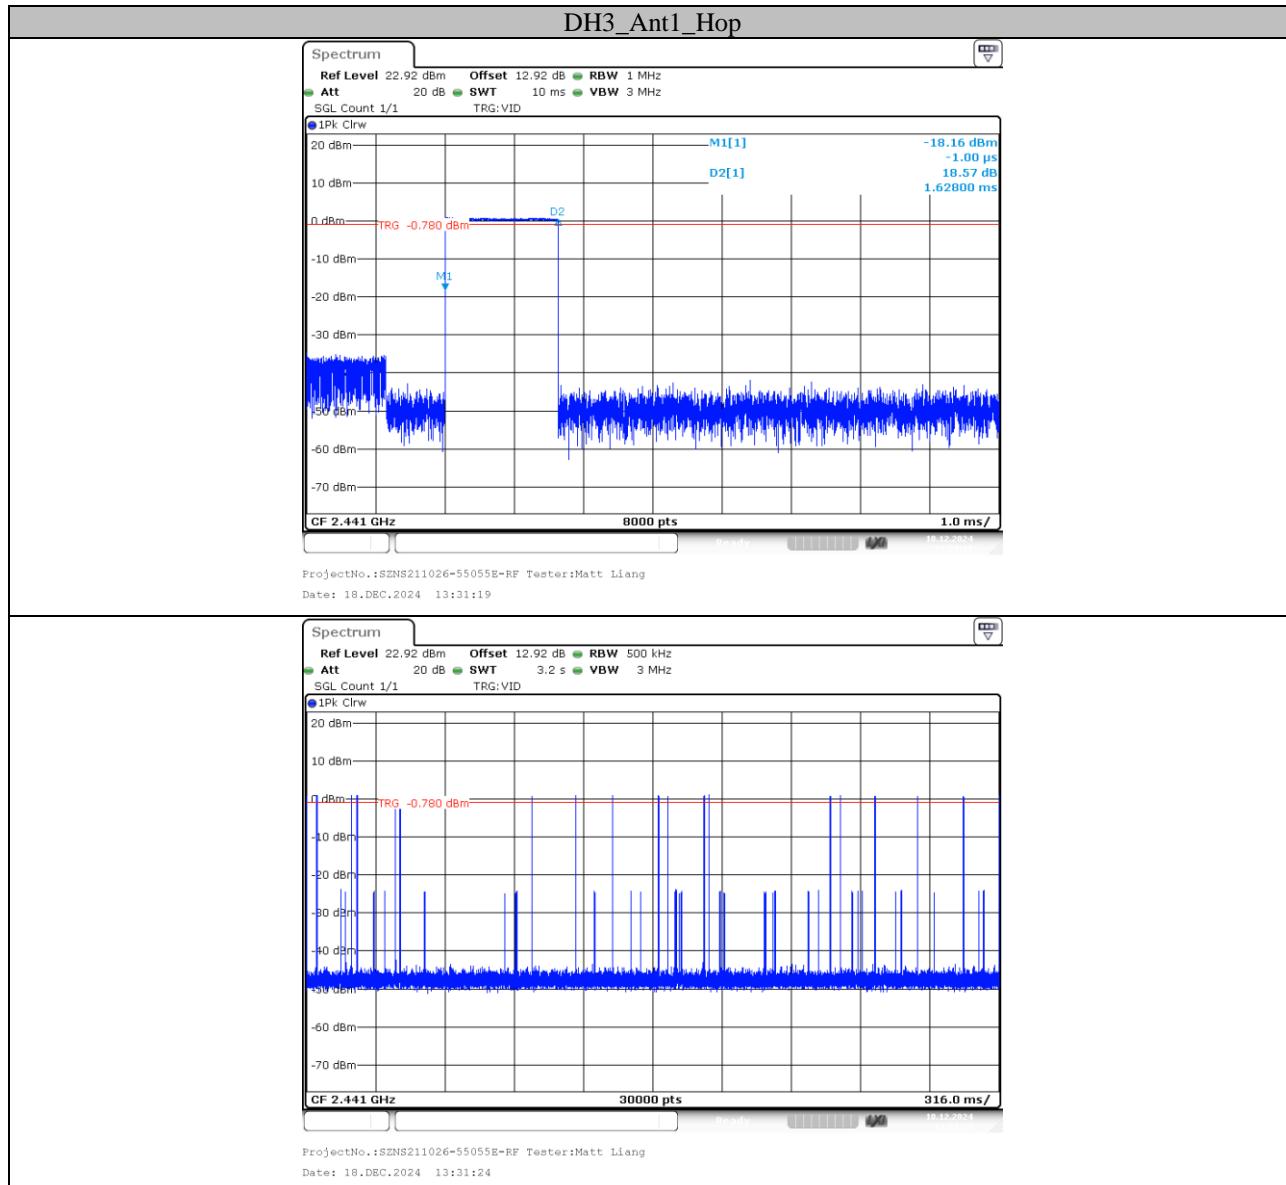


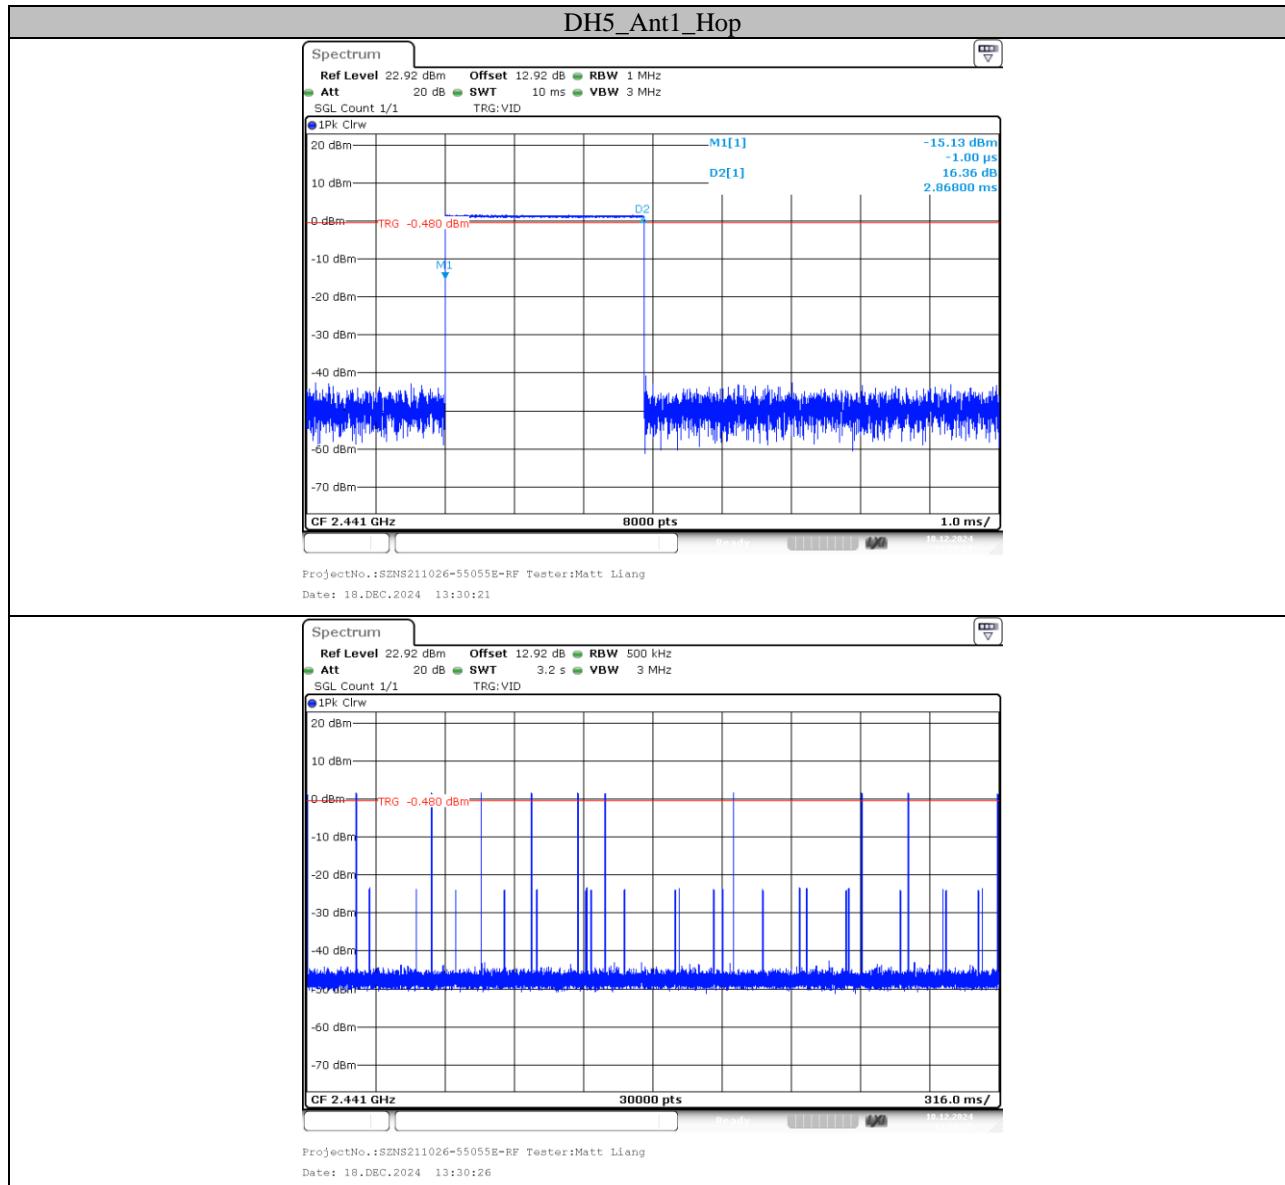


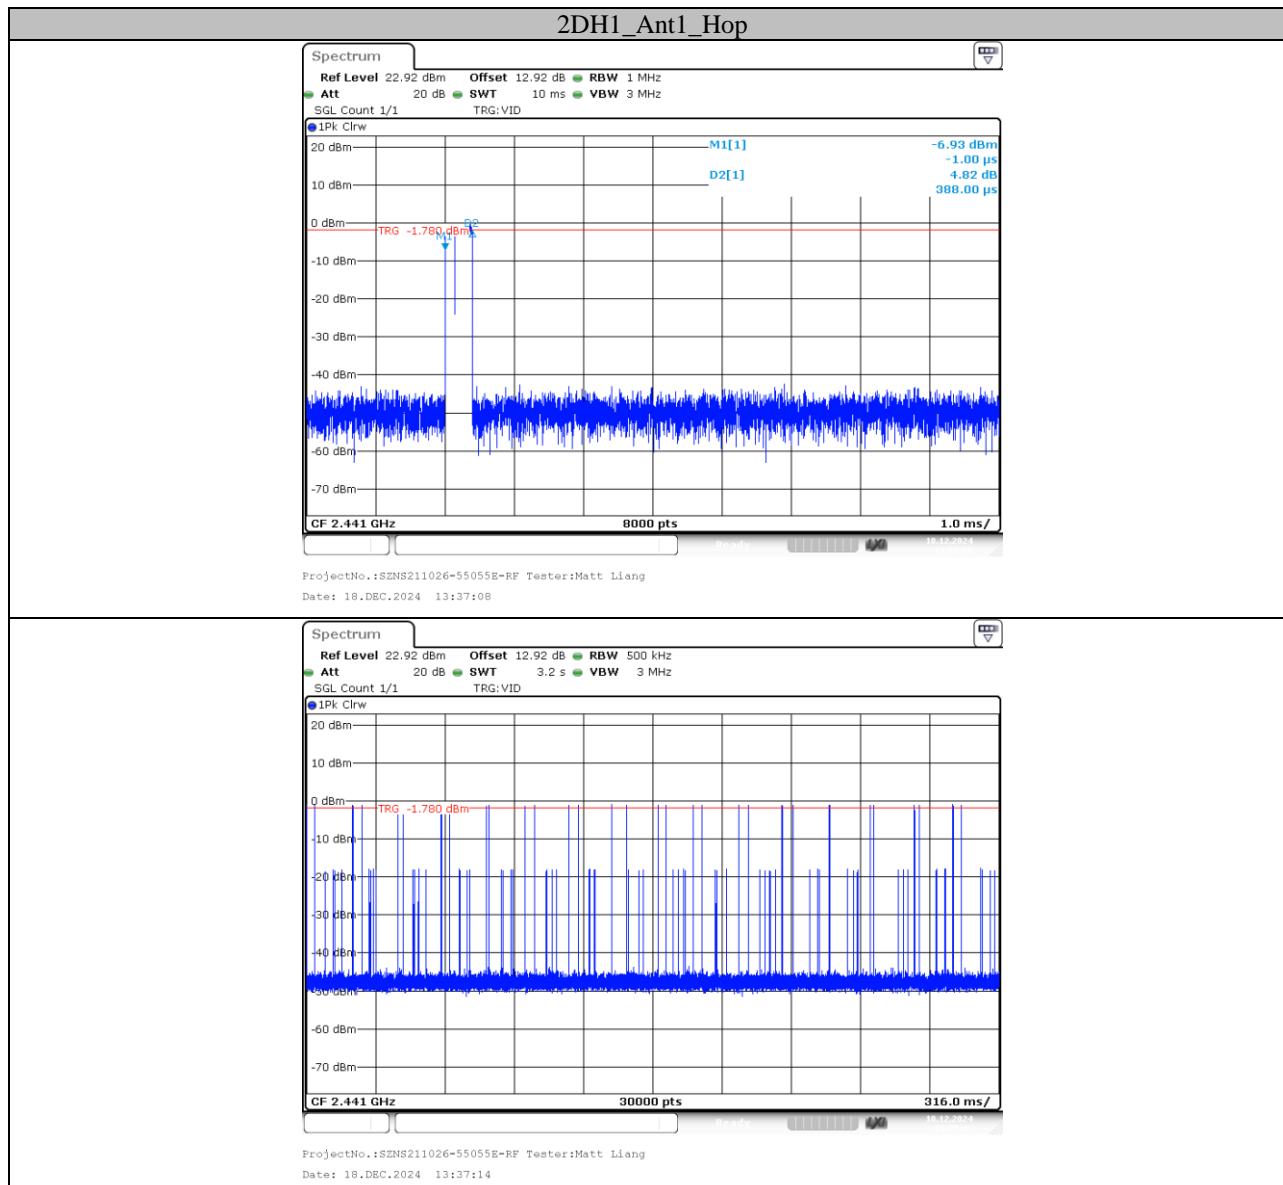


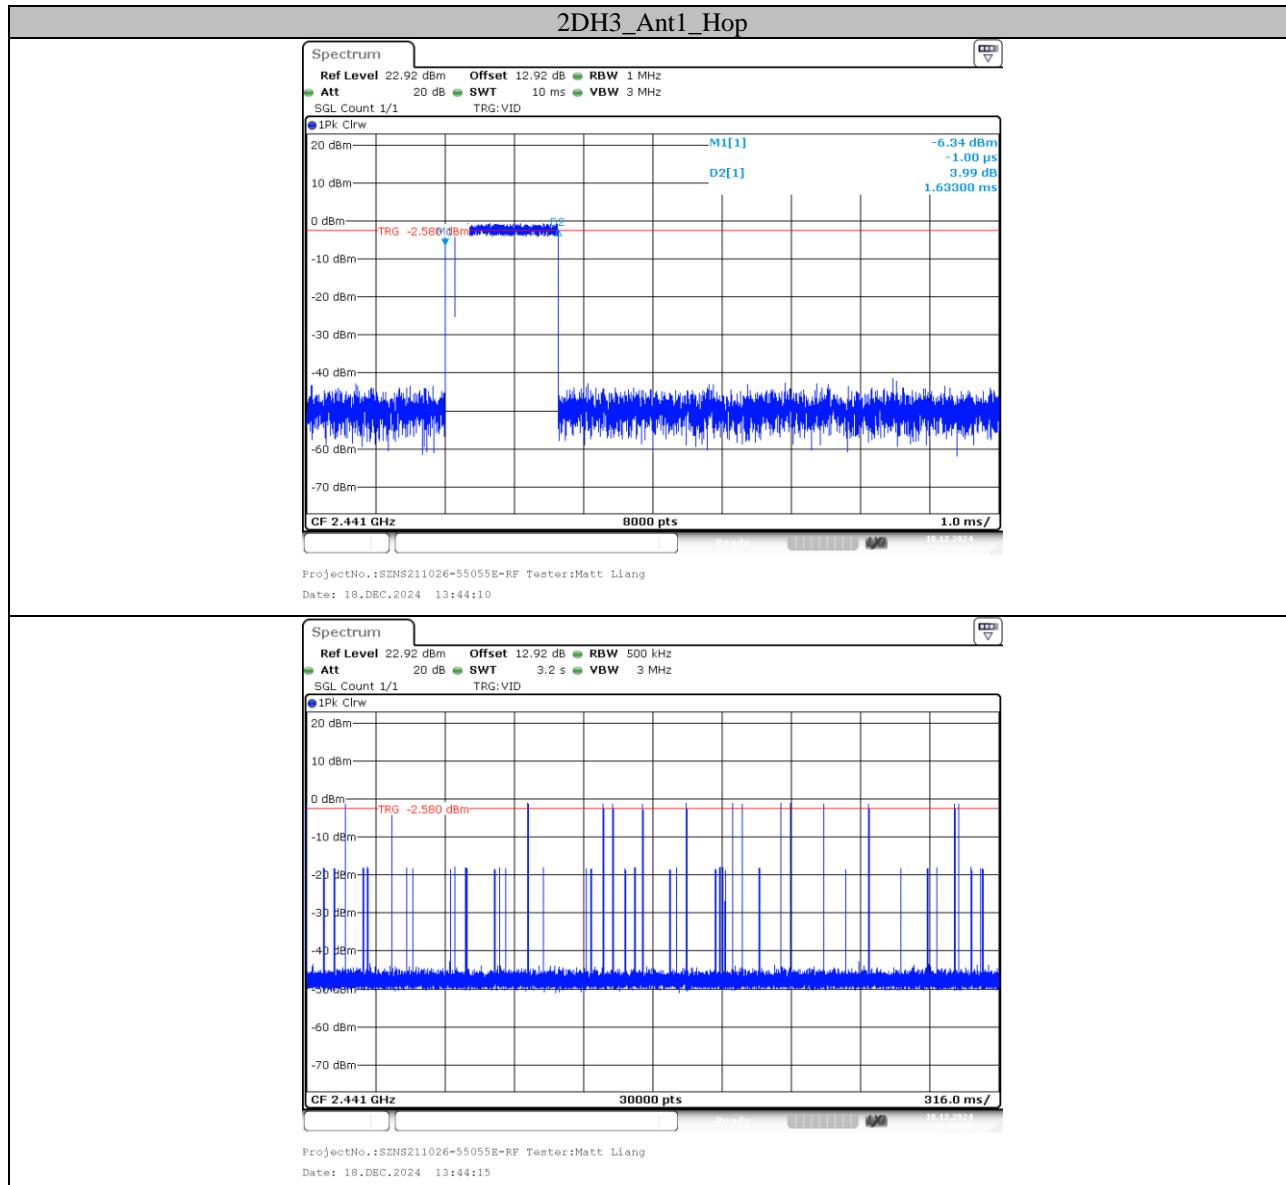

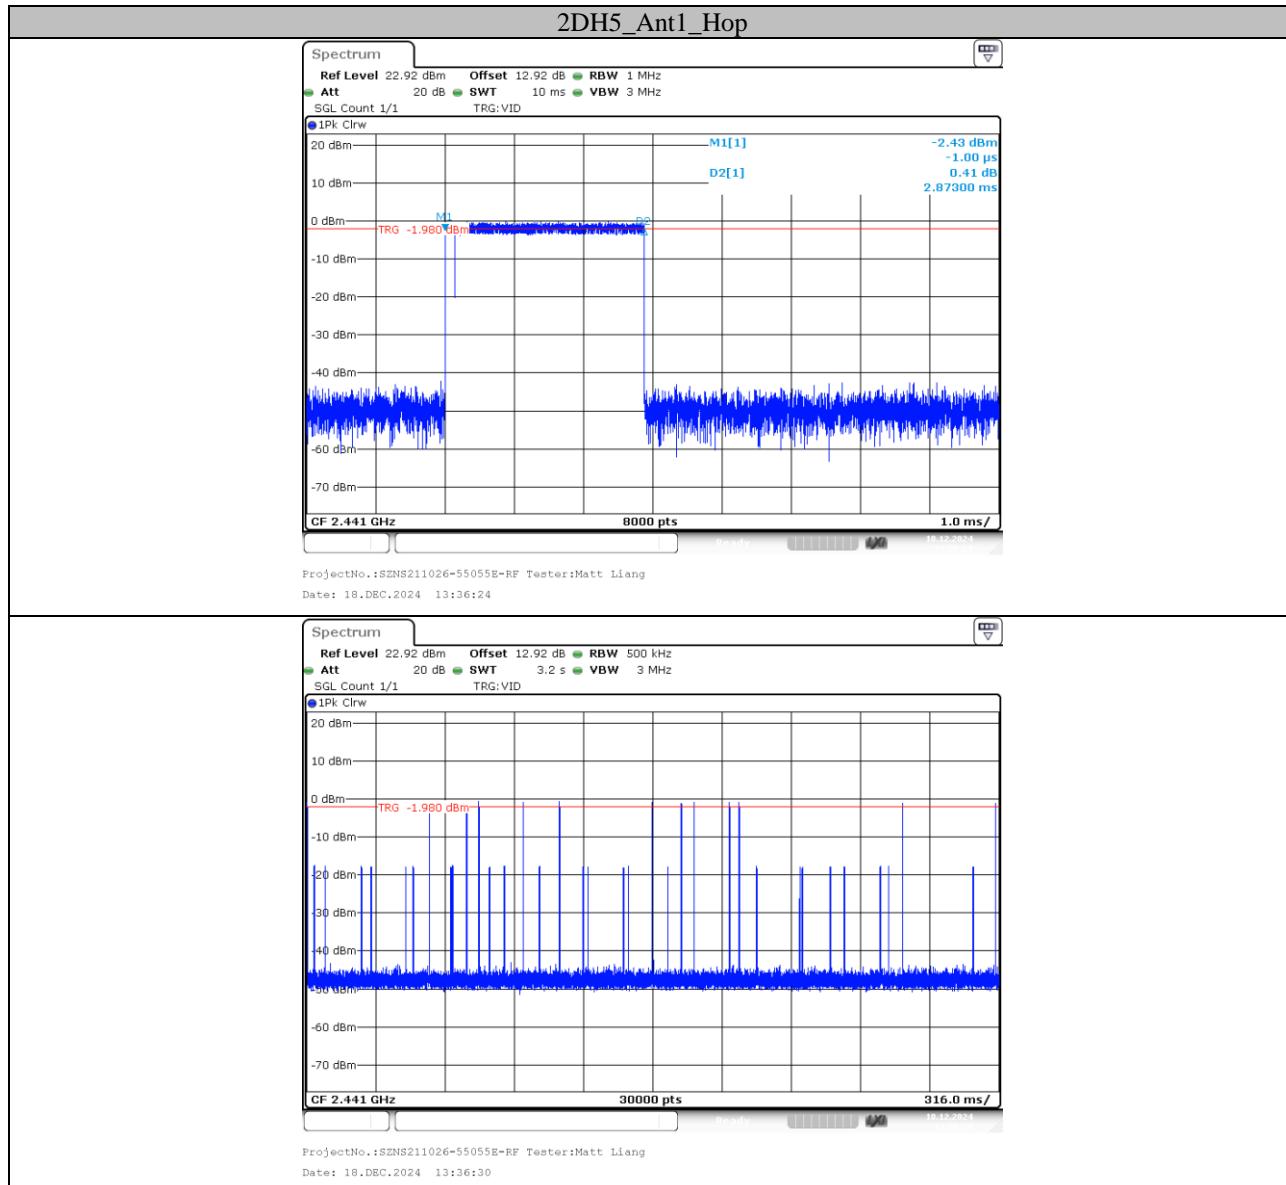

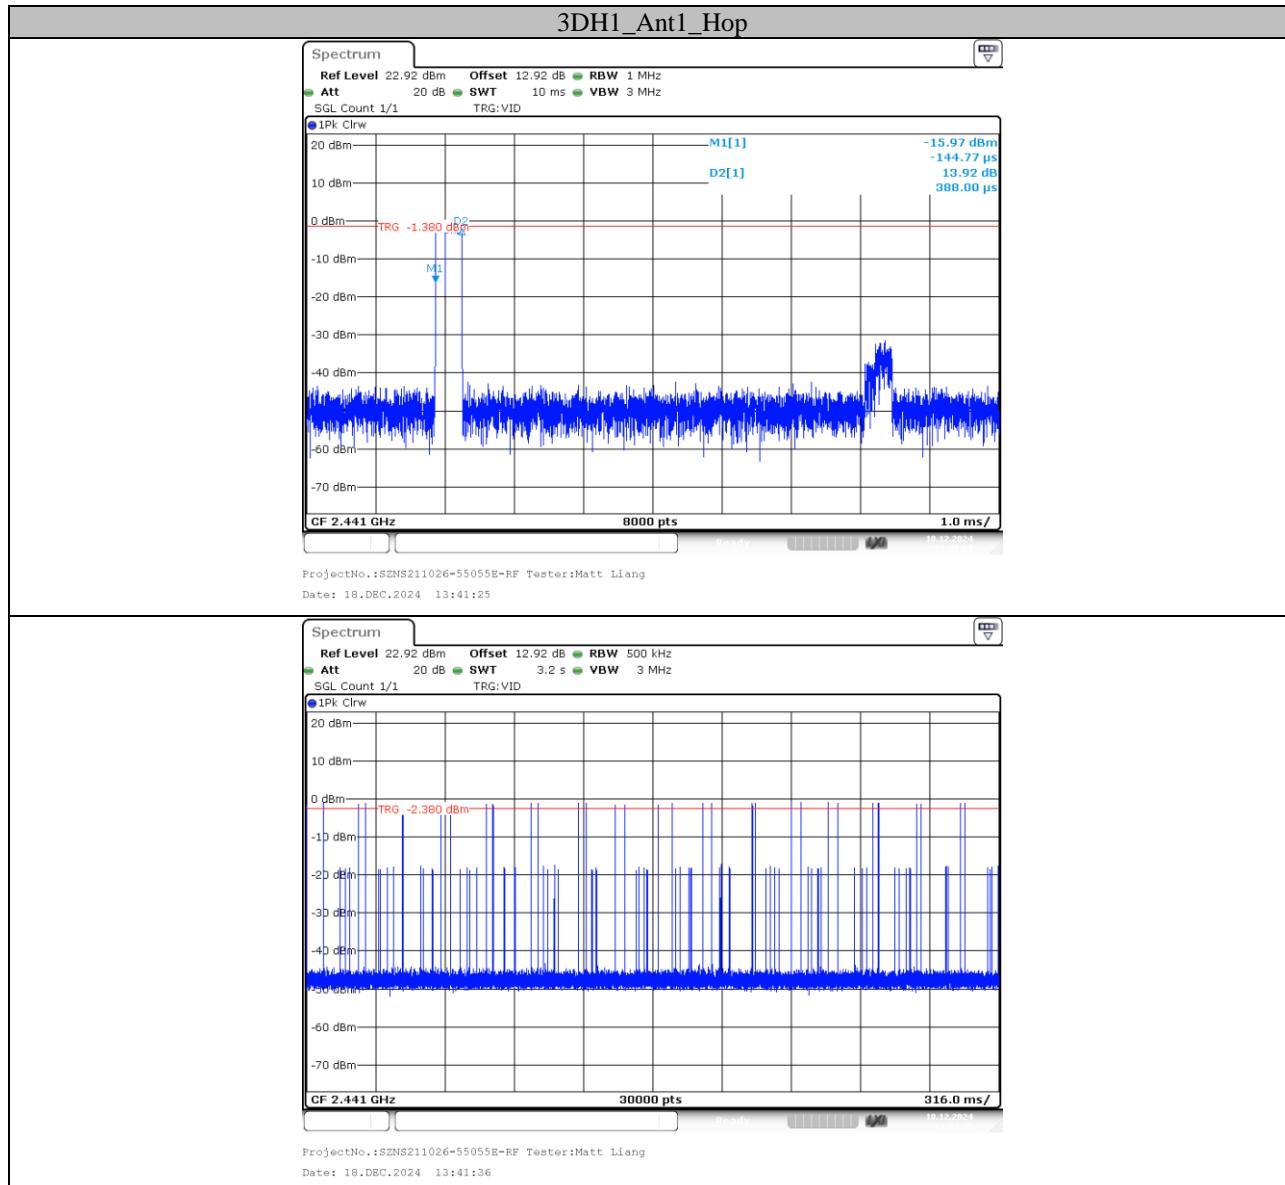

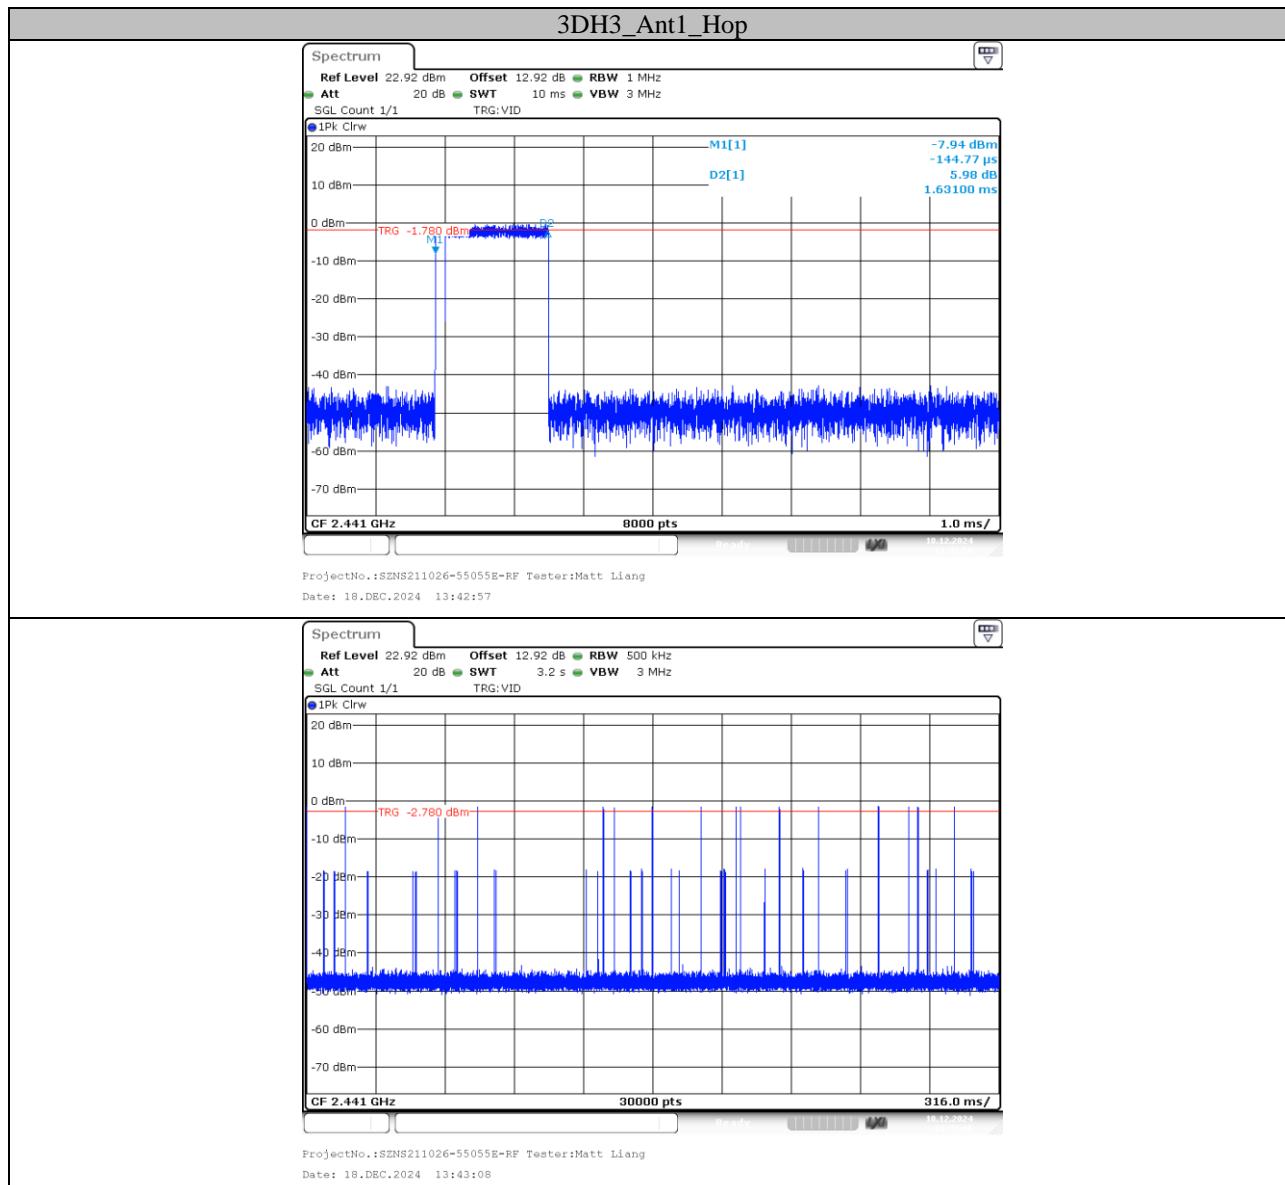


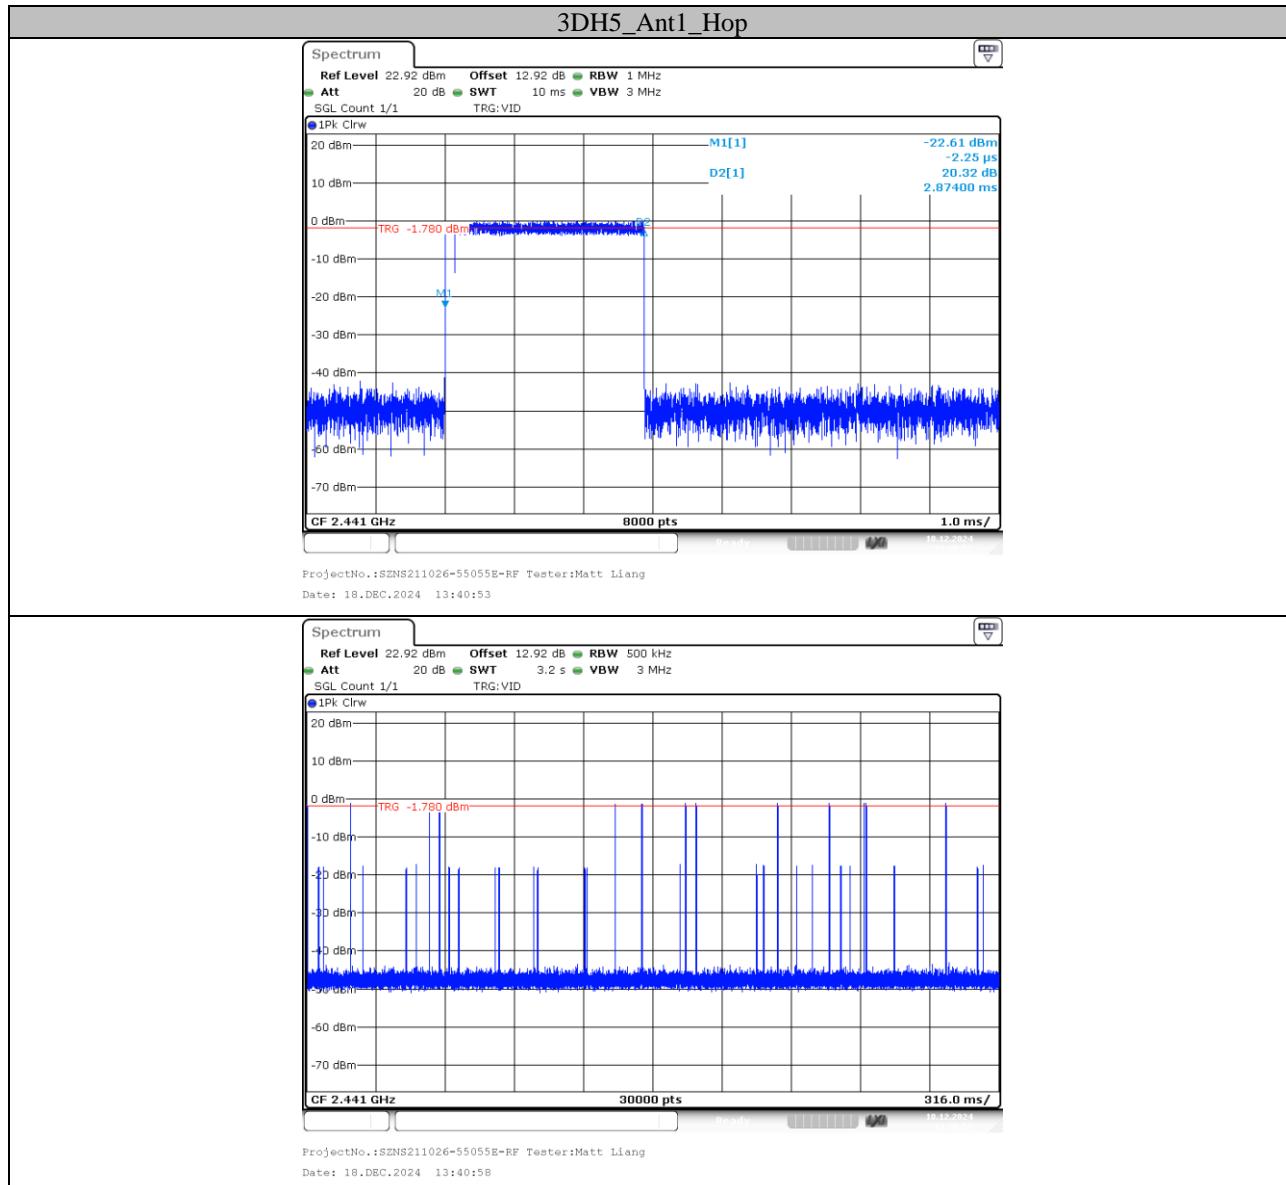


Appendix F: Number of Hopping Channels

Test Result

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

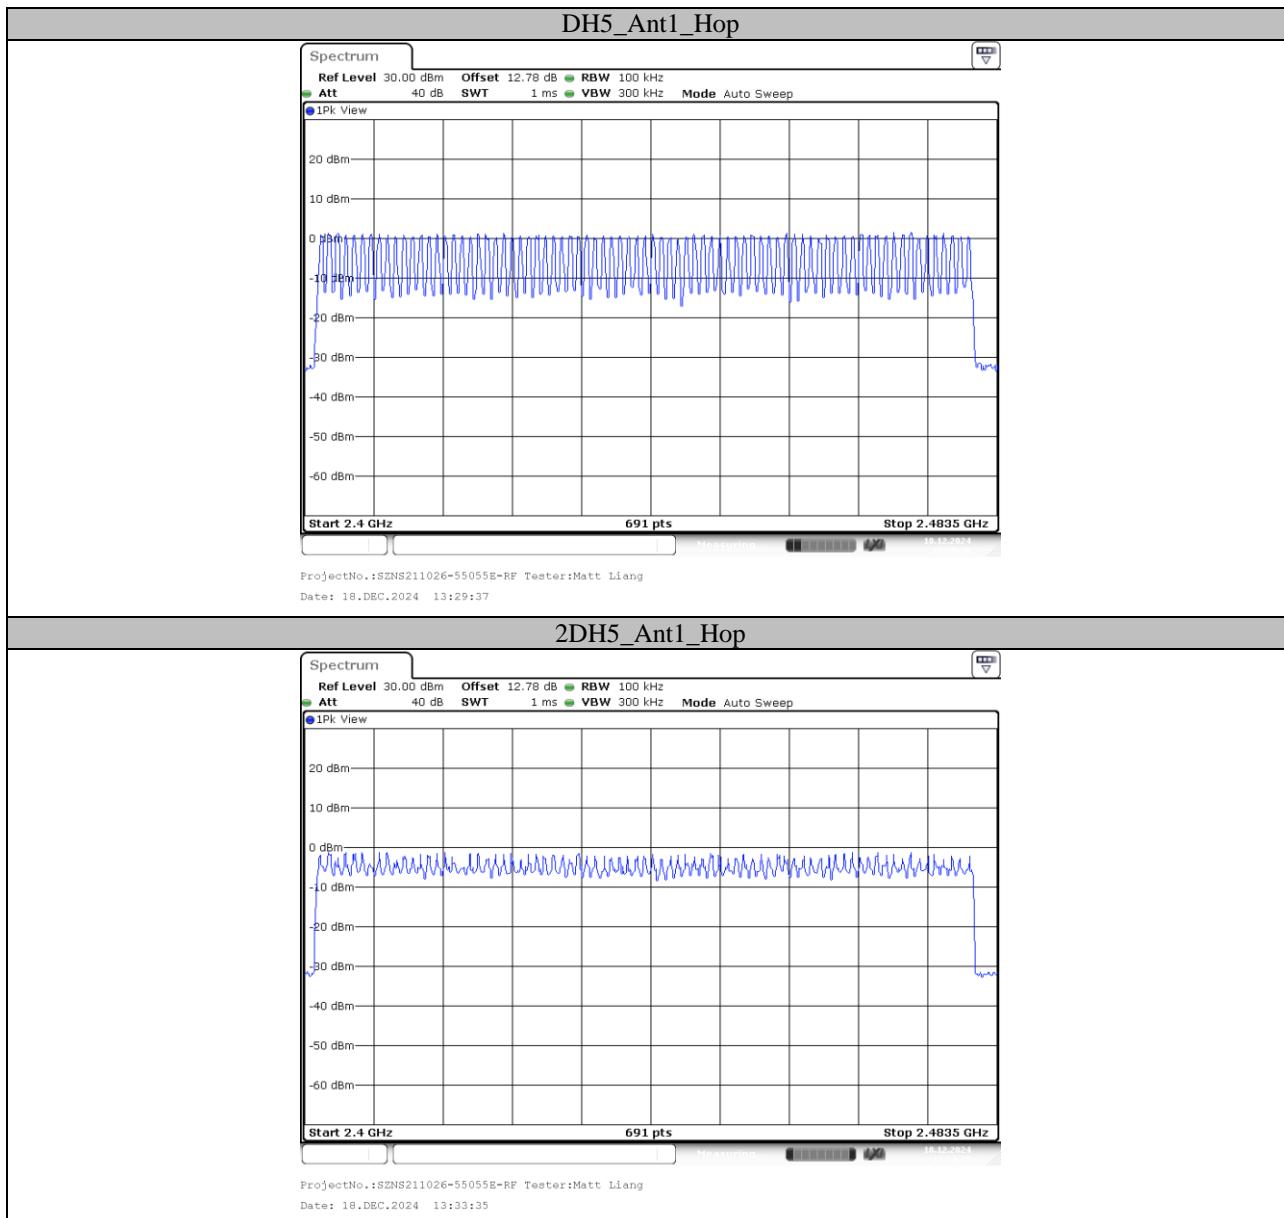Test Graphs

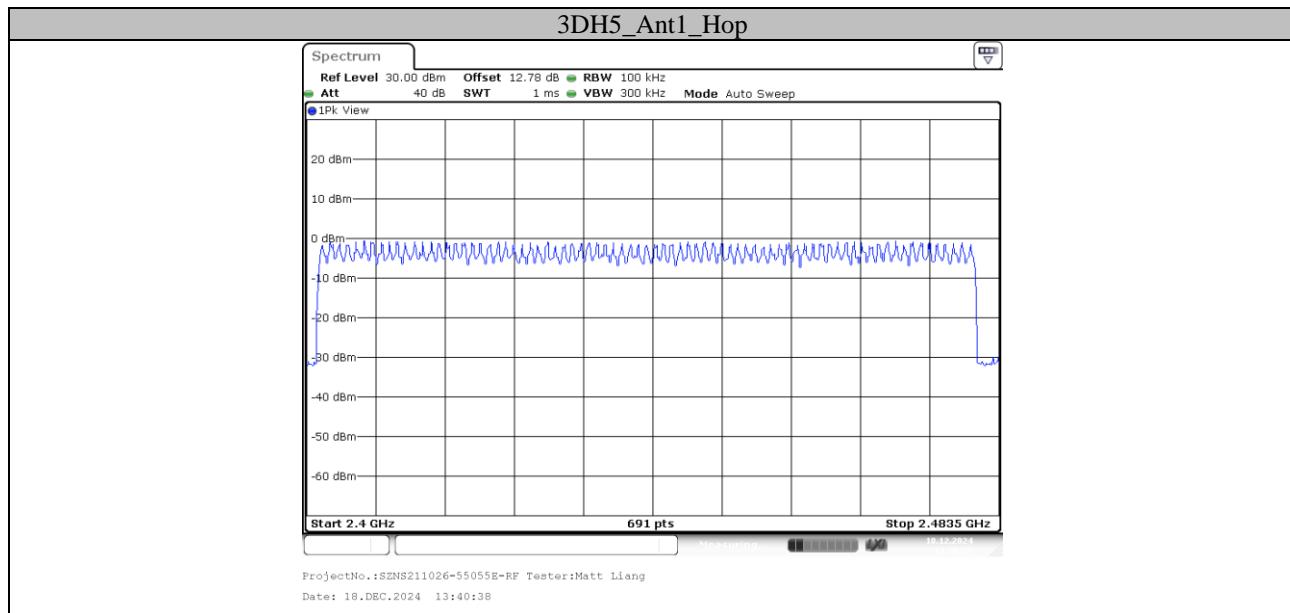



Appendix G: Band Edge Measurements


Test Result

Test Mode	Antenna	ChName	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.16	-44.98	≤-19.84	PASS
		High	2480	0.29	-40.33	≤-19.71	PASS
		Low	Hop_2402	0.30	-45.46	≤-19.7	PASS
		High	Hop_2480	0.85	-40.56	≤-19.15	PASS
2DH5	Ant1	Low	2402	-4.05	-45.65	≤-24.05	PASS
		High	2480	-4.16	-40.22	≤-24.16	PASS
		Low	Hop_2402	-5.39	-45.41	≤-25.39	PASS
		High	Hop_2480	-1.16	-40.51	≤-21.16	PASS
3DH5	Ant1	Low	2402	-4.12	-45.53	≤-24.12	PASS
		High	2480	-4.33	-40.13	≤-24.33	PASS
		Low	Hop_2402	-1.49	-46.01	≤-21.49	PASS
		High	Hop_2480	-1.74	-40.76	≤-21.74	PASS

Test Graphs

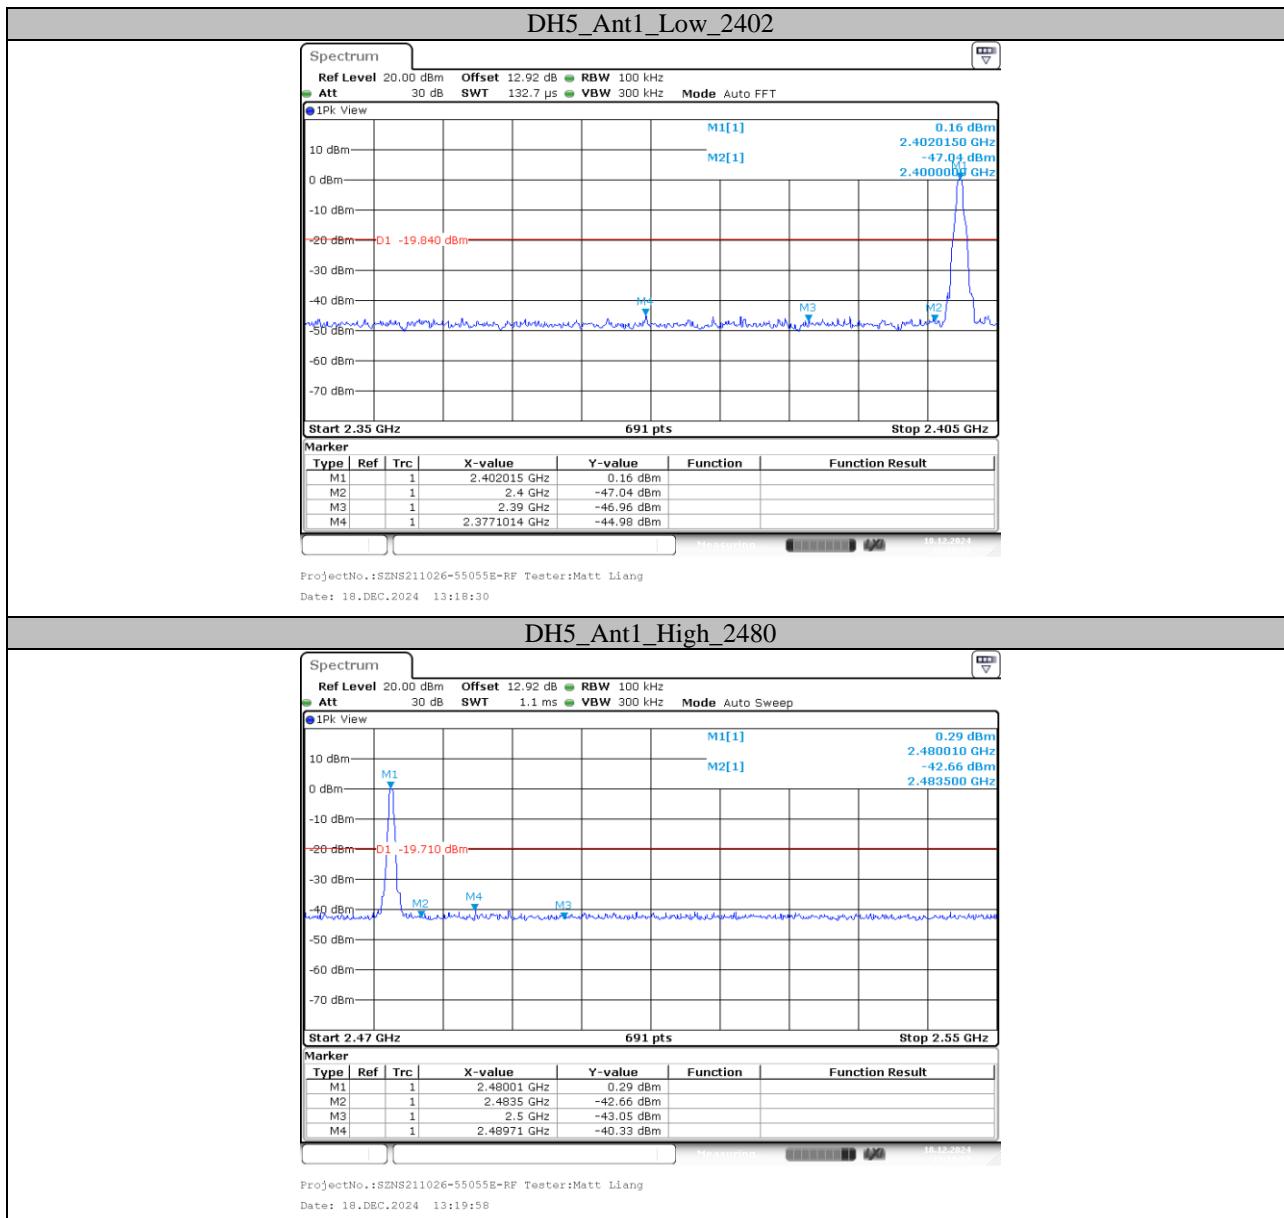


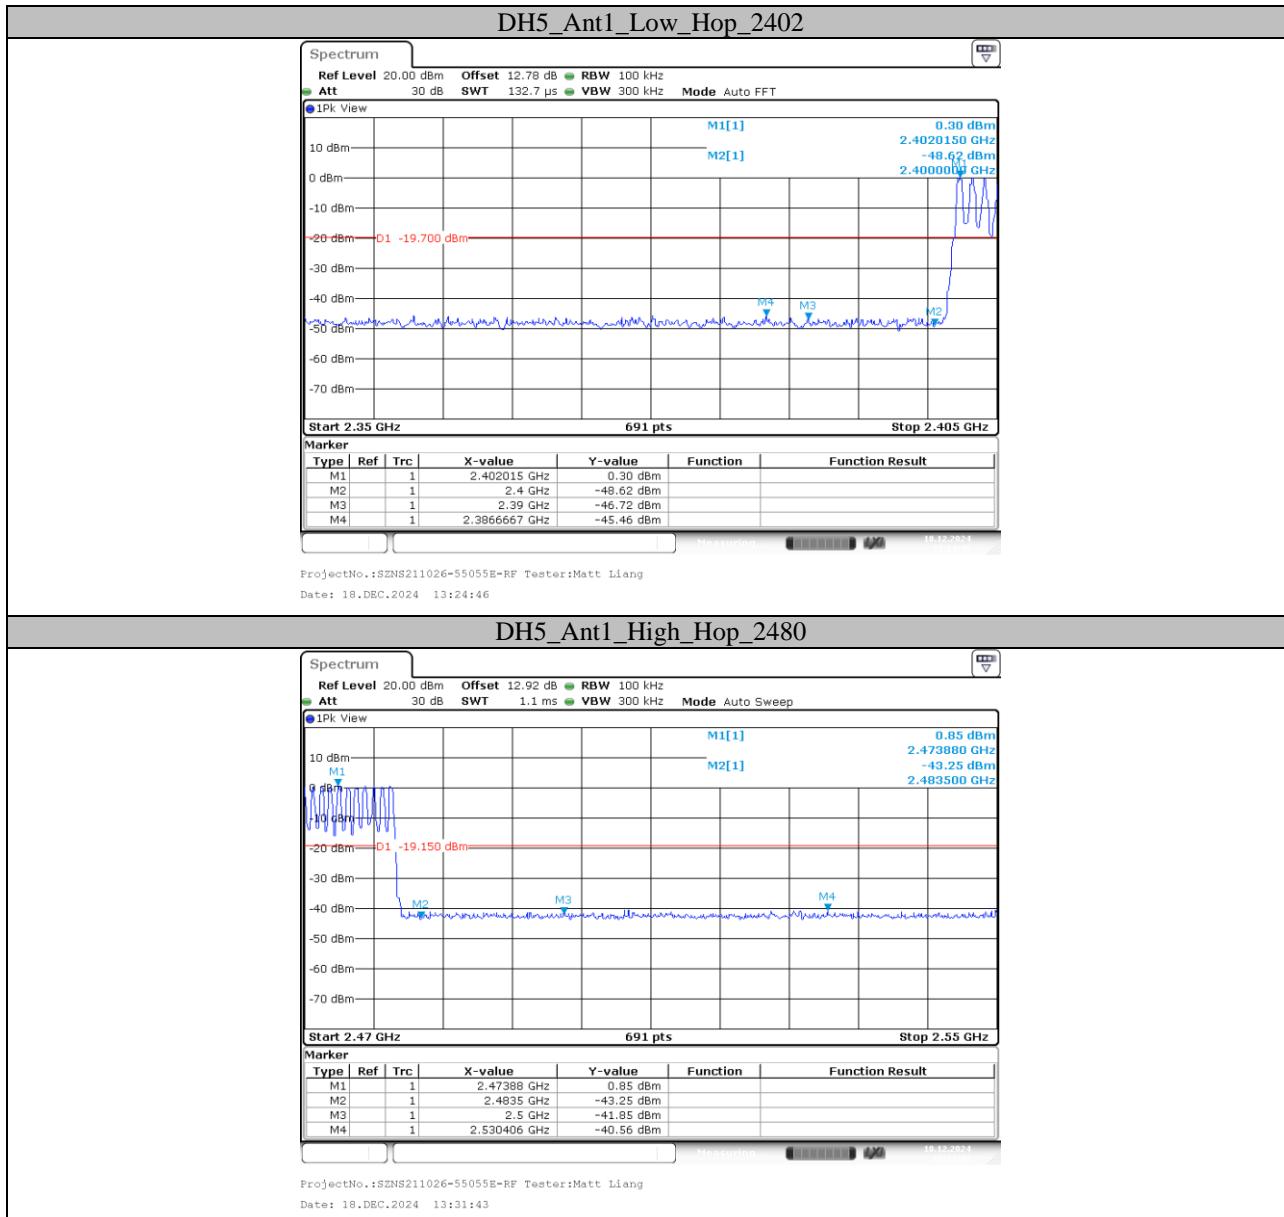

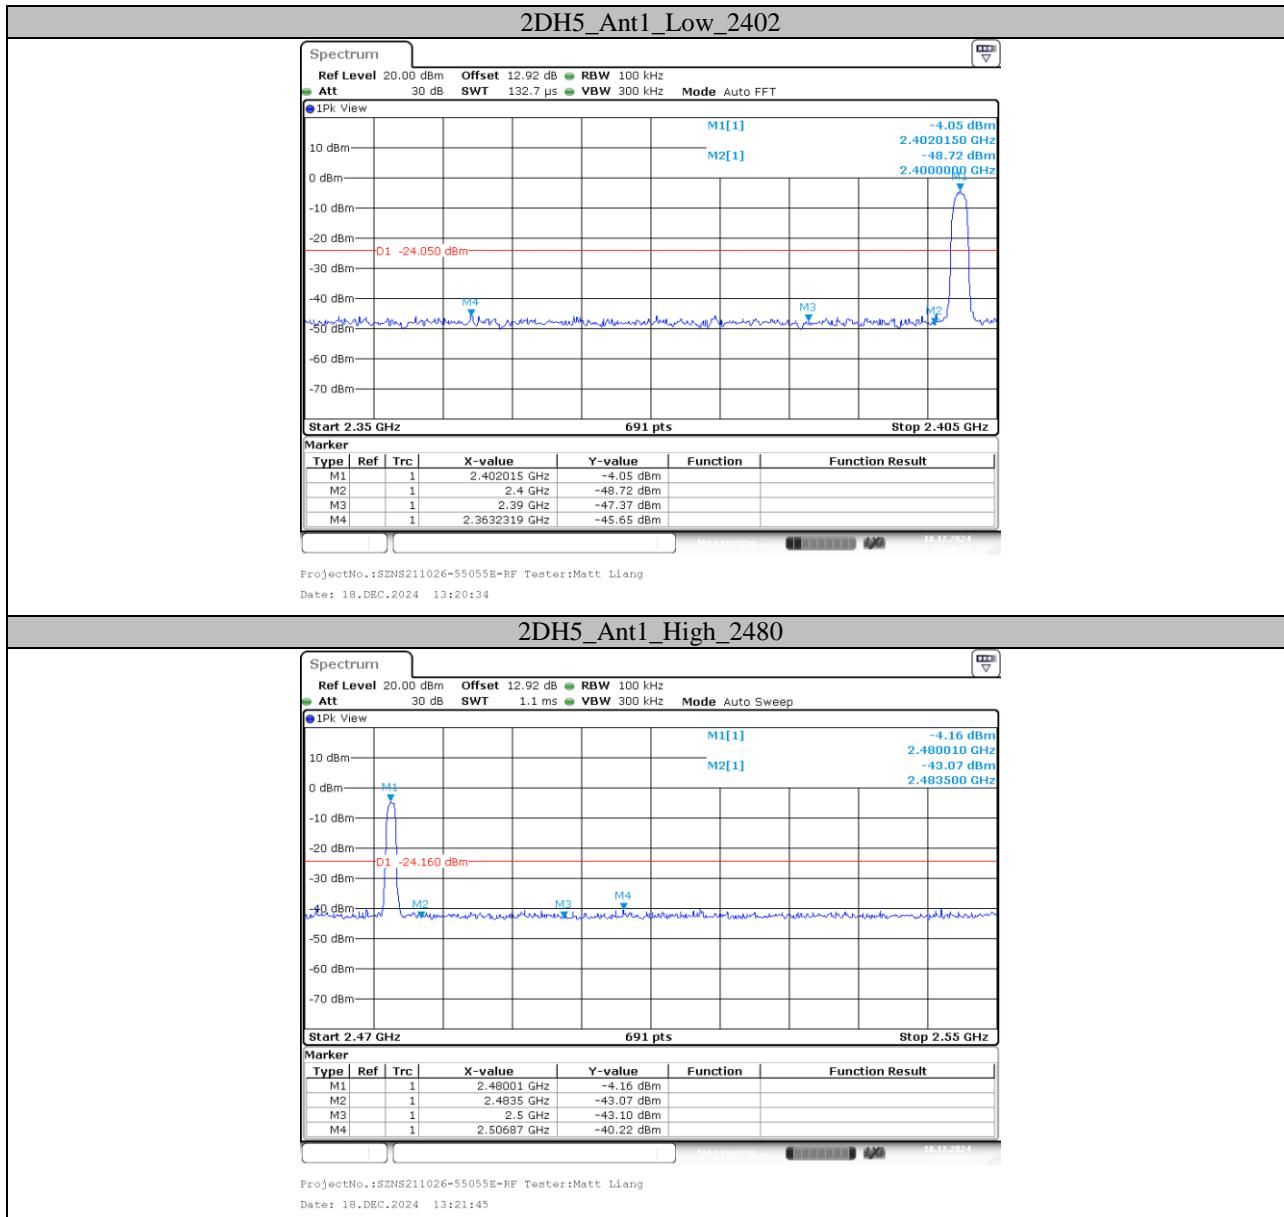





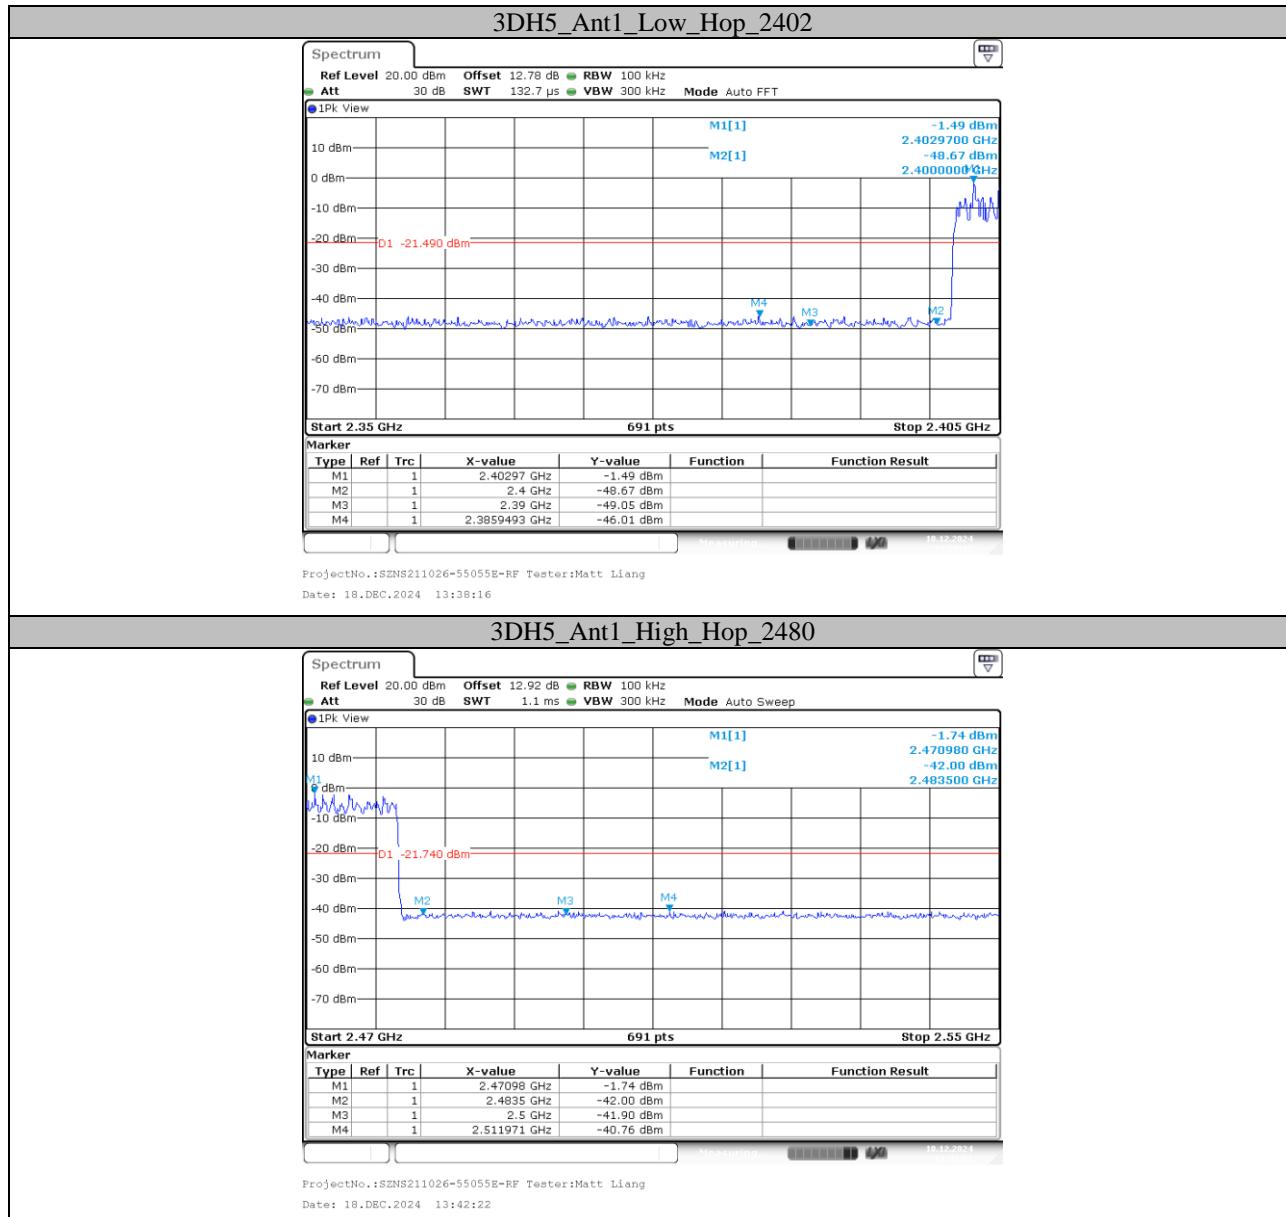

***** END OF REPORT *****