



FCC TEST REPORT

FCC ID: 2A3MU-F6

On Behalf of

Shanghai EFIX Geomatics Co.,Ltd

Geodetic GNSS Receiver

Model No.: F6

Prepared for : Shanghai EFIX Geomatics Co.,Ltd
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian
Road, Qingpu District, Shanghai

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2407246-C02-R11
Date of Receipt : August 2, 2024
Date of Test : August 2, 2024 – August 29, 2024
Date of Report : August 29, 2024
Version Number : V0
Test Result : Pass

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: service@a-lab.cn Tel: 4008300895 Website: <http://www.a-lab.cn/certificate>

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Maximum Peak Output power	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Setup	11
3.4. Test Result	11
4. Bandwidth	12
4.1. Limit	12
4.2. Test Procedure	12
4.3. Test Result	13
5. Carrier Frequency Separation	24
5.1. Limit	24
5.2. Test Procedure	24
5.3. Test Result	24
6. Number Of Hopping Channel	26
6.1. Limit	26
6.2. Test Procedure	26
6.3. Test Result	26
7. Dwell Time	28
7.1. Test limit	28
7.2. Test Procedure	28
7.3. Test Result	28
8. Radiated emissions	38
8.1. Limit	38
8.2. Block Diagram of Test setup	41
8.3. Test Procedure	42
8.4. Test Result	42
9. Band Edge Compliance	57
9.1. Block Diagram of Test Setup	57

9.2. Limit	57
9.3. Test Procedure	57
9.4. Test Result.....	57
10. Power Line Conducted Emissions.....	73
10.1. Block Diagram of Test Setup	73
10.2. Limit	73
10.3. Test Procedure	73
10.4. Test Result.....	73
11. Antenna Requirements.....	76
11.1. Limit.....	76
11.2. Result	76
12. Test setup photo	77
12.1. Photo of Radiated Emission test	77
12.2. Photo of Conducted Emission test	78

TEST REPORT DECLARATION

Applicant : Shanghai EFIX Geomatics Co.,Ltd
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District, Shanghai
Manufacturer : Shanghai EFIX Geomatics Co.,Ltd
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District, Shanghai
EUT Description : Geodetic GNSS Receiver
(A) Model No. : F6
(B) Trademark : 

Measurement Standard Used:
FCC Rules and Regulations Part 15 Subpart C Section 15.247

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Yannis Wen Project Engineer	
Approved by (name + signature).....:	Jack Xu Project Manager	
Date of issue.....:	August 29, 2024	

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 29, 2024	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: Geodetic GNSS Receiver
Model Number	: F6
Diff	: N/A
Power supply	: DC 7.2V by battery, DC 5V from adapter
Radio Technology	: Bluetooth EDR
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Channel spacing	: 1MHz
Modulation type	: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type	: Internal antenna, Maximum Gain is 0dBi. Antenna information is provided by applicant.
Software version	: 1.2.0.1chenjunT
Hardware version	: V1.0.1
Connector cable loss	: N/A
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : AC Adapter
 Manufacturer : EDACPOWER ELEC.
 Model : EA1012AVRU-050
 INPUT : 100-240Vac, 1.0A 50-60Hz
 OUTPUT : 5.0V = 2.4A, 12.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	--	--	--	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840-50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2023.08.11	2 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2024.07.15	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	2.02	2.02	21	Pass
NVNT	1-DH1	2441	Ant1	1.823	1.823	21	Pass
NVNT	1-DH1	2480	Ant1	1.391	1.391	21	Pass
NVNT	1-DH3	2441	Ant1	1.514	1.514	21	Pass
NVNT	1-DH5	2441	Ant1	1.655	1.655	21	Pass
NVNT	2-DH1	2402	Ant1	-3.298	-3.298	21	Pass
NVNT	2-DH1	2441	Ant1	-3.208	-3.208	21	Pass
NVNT	2-DH1	2480	Ant1	-3.57	-3.57	21	Pass
NVNT	2-DH3	2441	Ant1	-3.492	-3.492	21	Pass
NVNT	2-DH5	2441	Ant1	-3.224	-3.224	21	Pass
NVNT	3-DH1	2402	Ant1	-2.824	-2.824	21	Pass
NVNT	3-DH1	2441	Ant1	-2.69	-2.69	21	Pass
NVNT	3-DH1	2480	Ant1	-3.005	-3.005	21	Pass
NVNT	3-DH3	2441	Ant1	-2.714	-2.714	21	Pass
NVNT	3-DH5	2441	Ant1	-2.909	-2.909	21	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated..

4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

The following procedure shall be used for measuring -20dB bandwidth:

- a) Set RBW = 30 kHz.
- b) Set the VBW=100kHz


- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-20 dB down amplitude”. If a marker is below this “-20 dB down amplitude” value, then it shall be as close as possible to this value.

4.3. Test Result

-20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.03	Pass
NVNT	1-DH1	2441	Ant1	1.038	Pass
NVNT	1-DH1	2480	Ant1	1.034	Pass
NVNT	2-DH1	2402	Ant1	1.32	Pass
NVNT	2-DH1	2441	Ant1	1.27	Pass
NVNT	2-DH1	2480	Ant1	1.27	Pass
NVNT	3-DH1	2402	Ant1	1.316	Pass
NVNT	3-DH1	2441	Ant1	1.31	Pass
NVNT	3-DH1	2480	Ant1	1.294	Pass

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

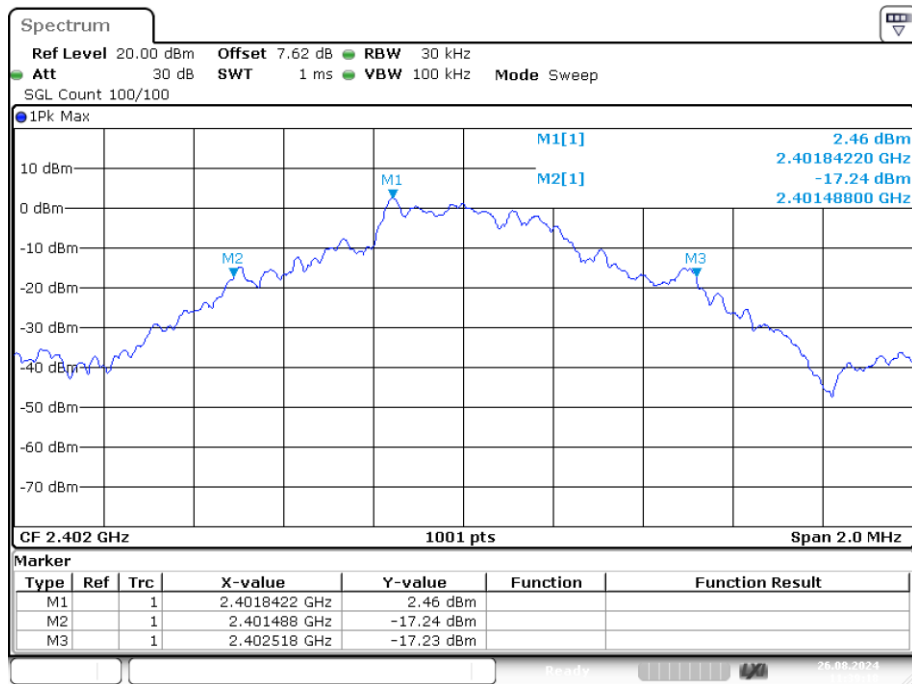


Date: 26.AUG.2024 11:39:18

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

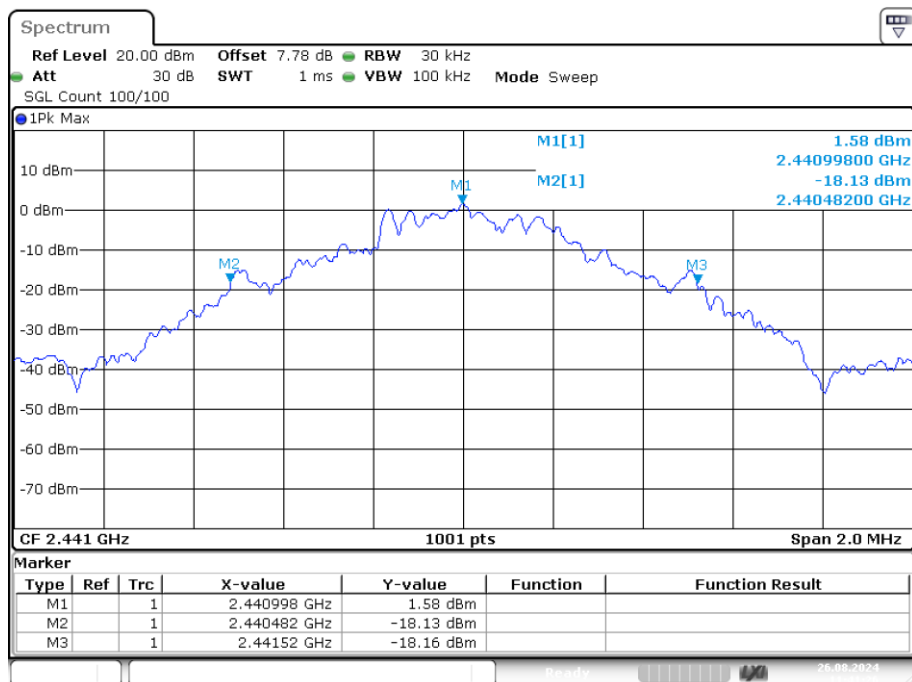


Date: 26.AUG.2024 11:41:26

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

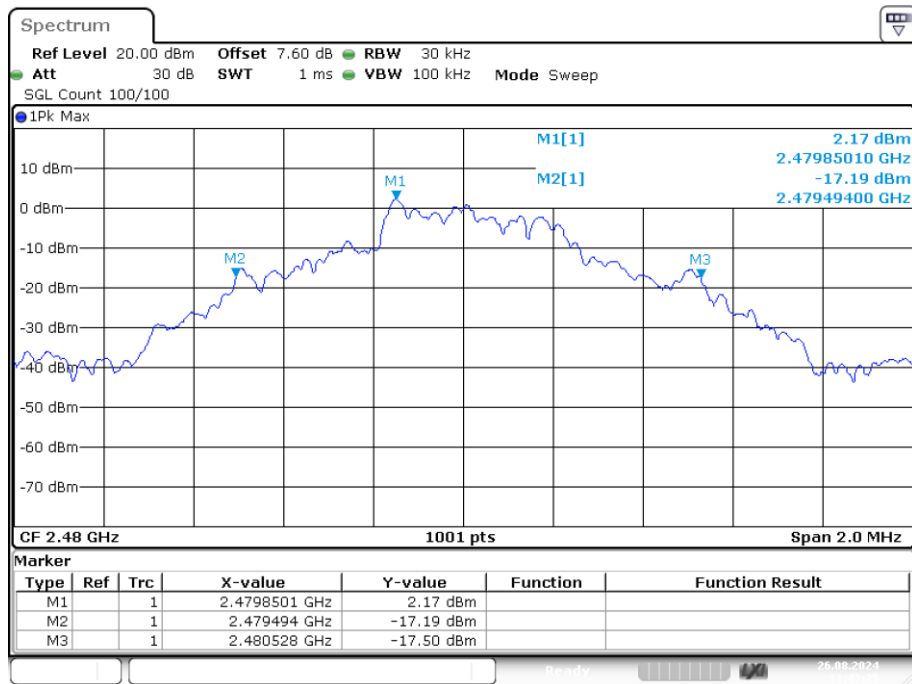


Date: 26.AUG.2024 11:43:25

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

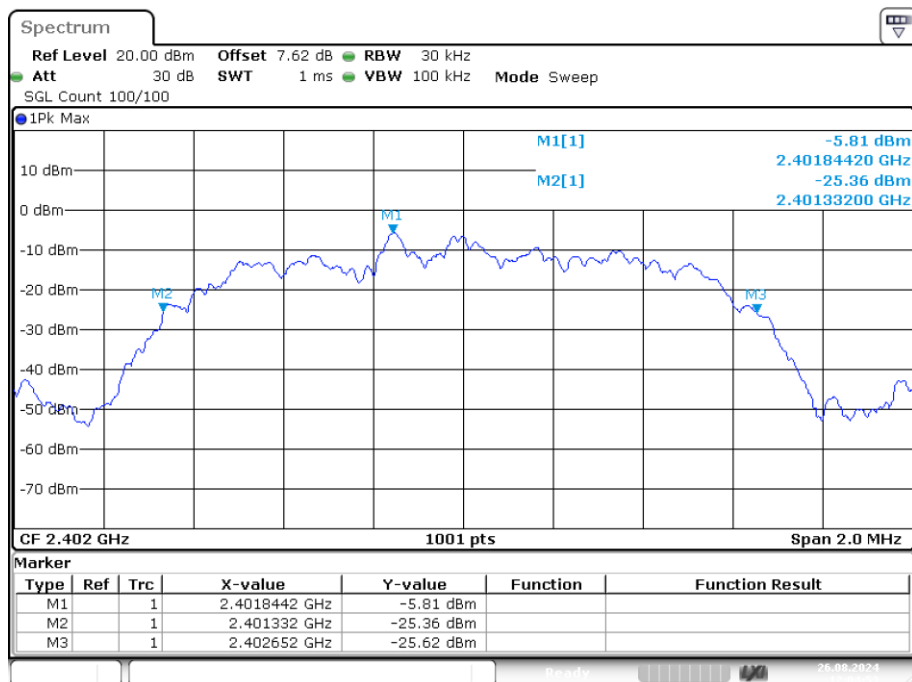


Date: 26.AUG.2024 12:04:54

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

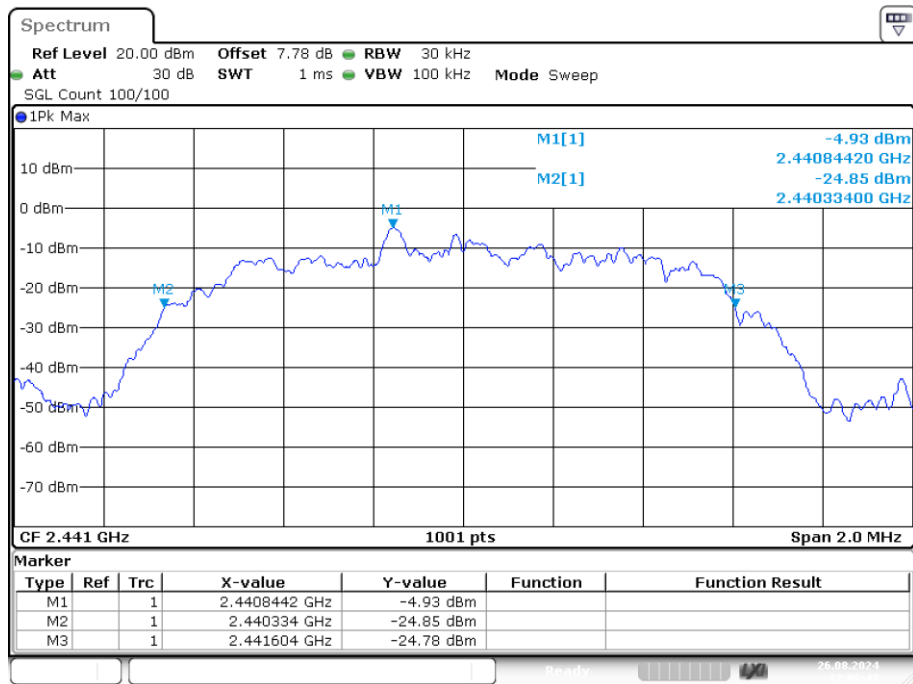


Date: 26.AUG.2024 12:06:43

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

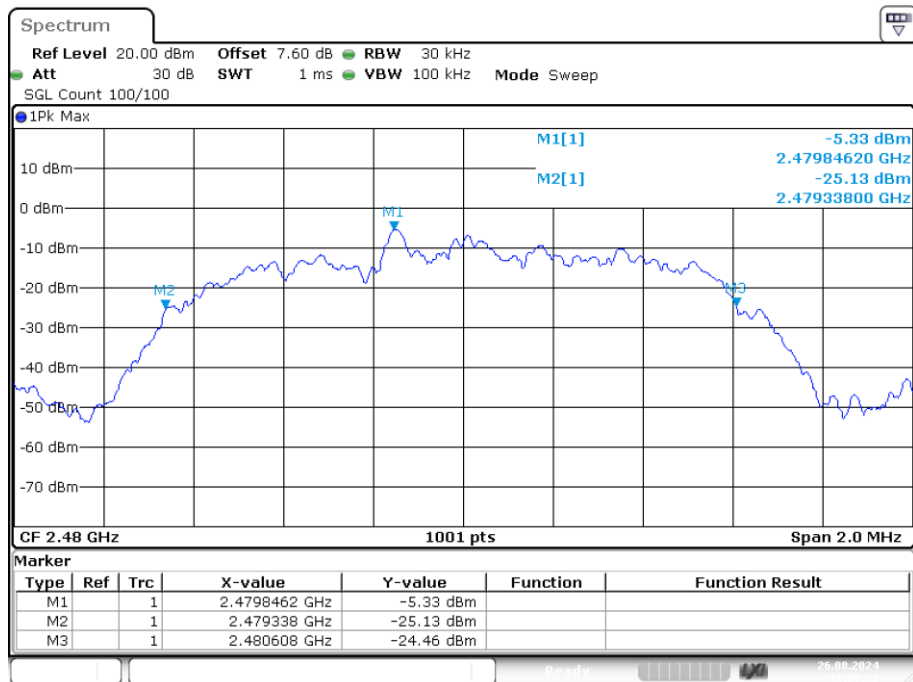


Date: 26.AUG.2024 12:08:32

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

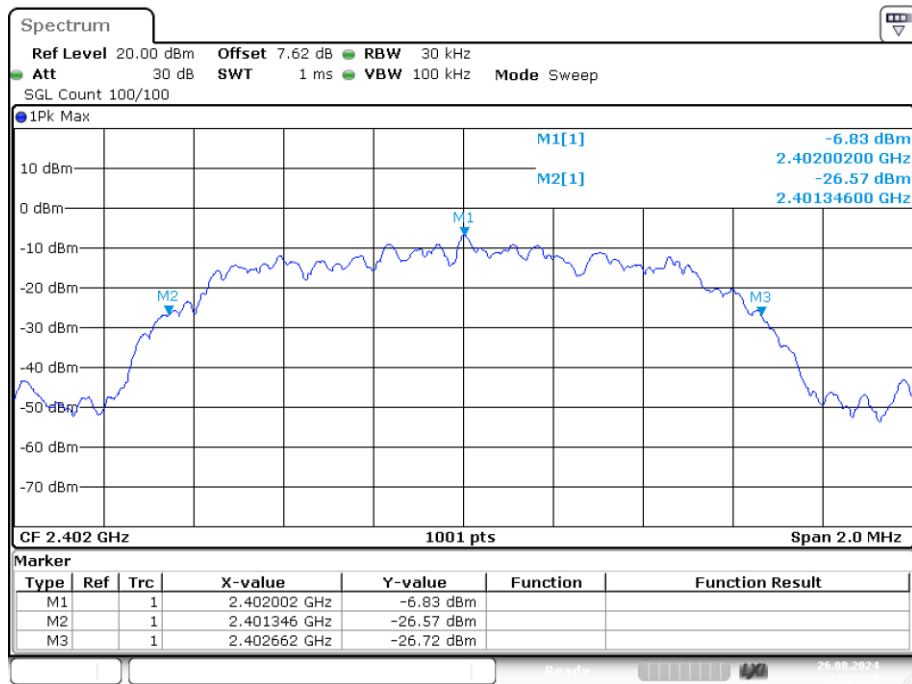


Date: 26.AUG.2024 12:25:50

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

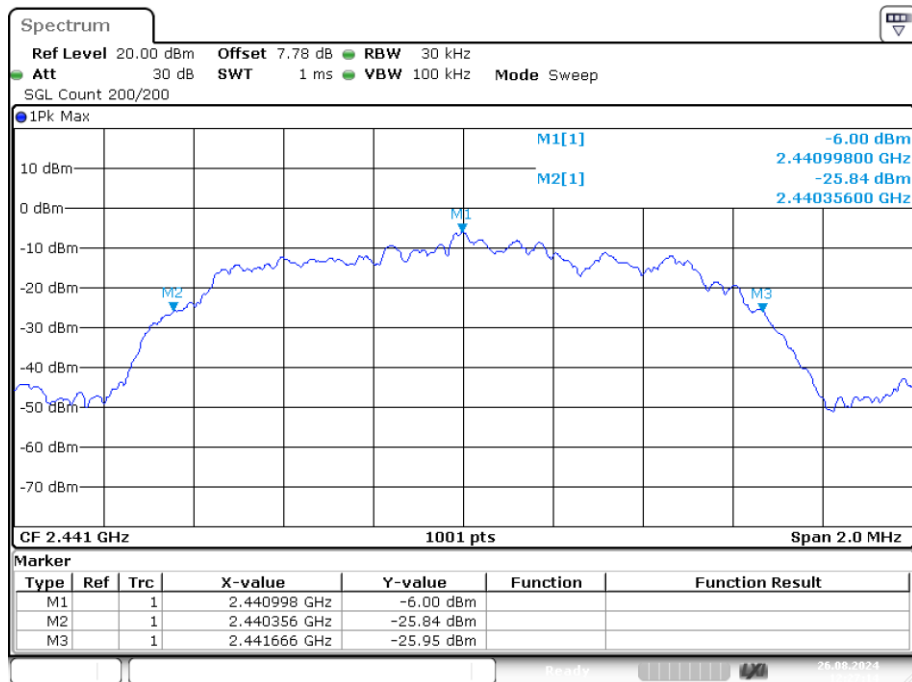

Date: 26.AUG.2024 12:27:14

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

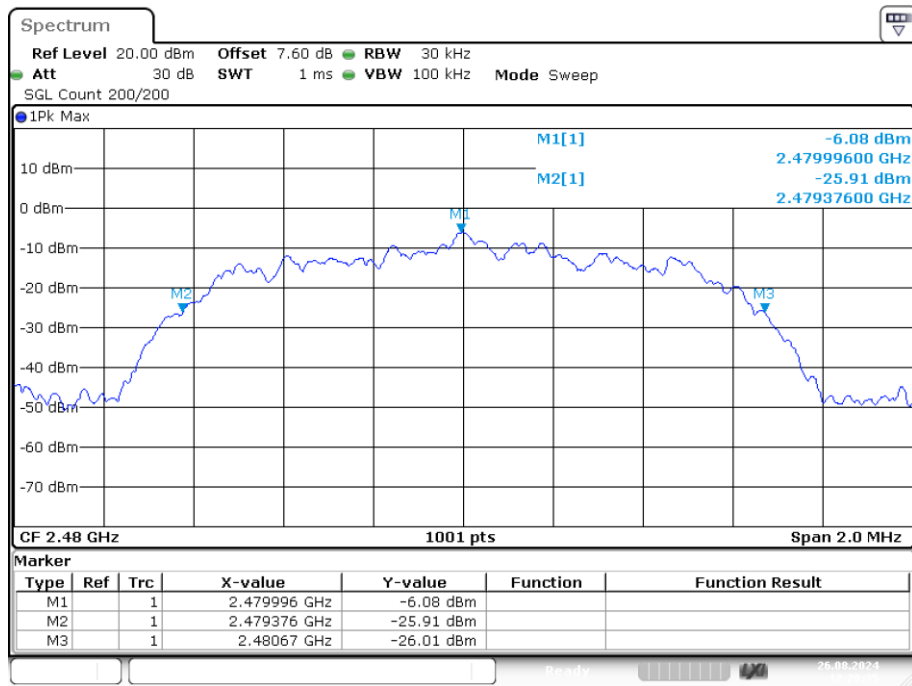


Date: 26.AUG.2024 12:28:35

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.957
NVNT	1-DH1	2441	Ant1	0.953
NVNT	1-DH1	2480	Ant1	0.915
NVNT	2-DH1	2402	Ant1	1.201
NVNT	2-DH1	2441	Ant1	1.189
NVNT	2-DH1	2480	Ant1	1.187
NVNT	3-DH1	2402	Ant1	1.189
NVNT	3-DH1	2441	Ant1	1.183
NVNT	3-DH1	2480	Ant1	1.177

OBW NVNT 1-DH1 2402MHz Ant1

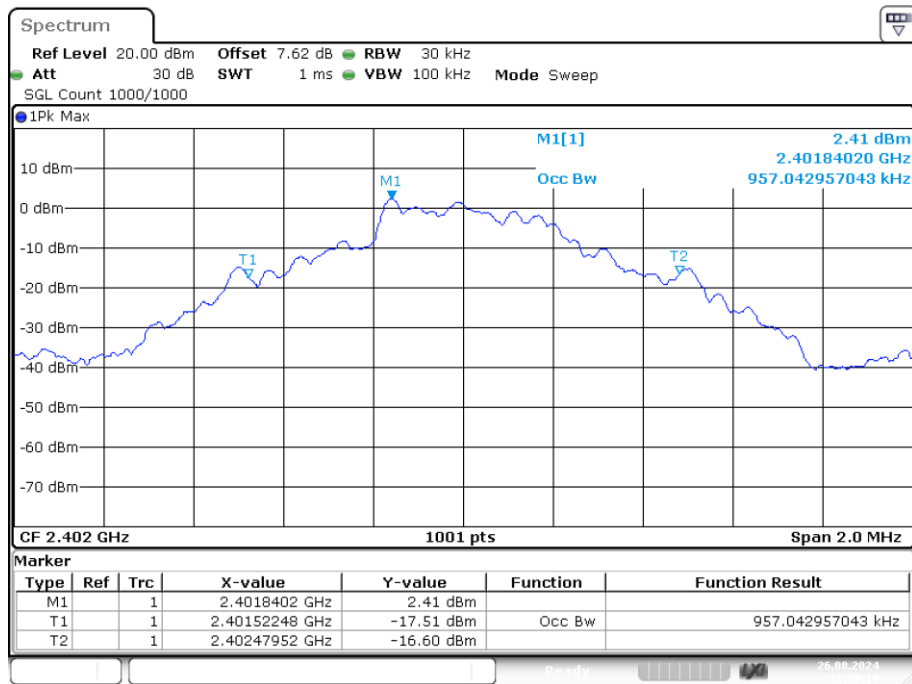


Date: 26.AUG.2024 11:39:10

OBW NVNT 1-DH1 2441MHz Ant1

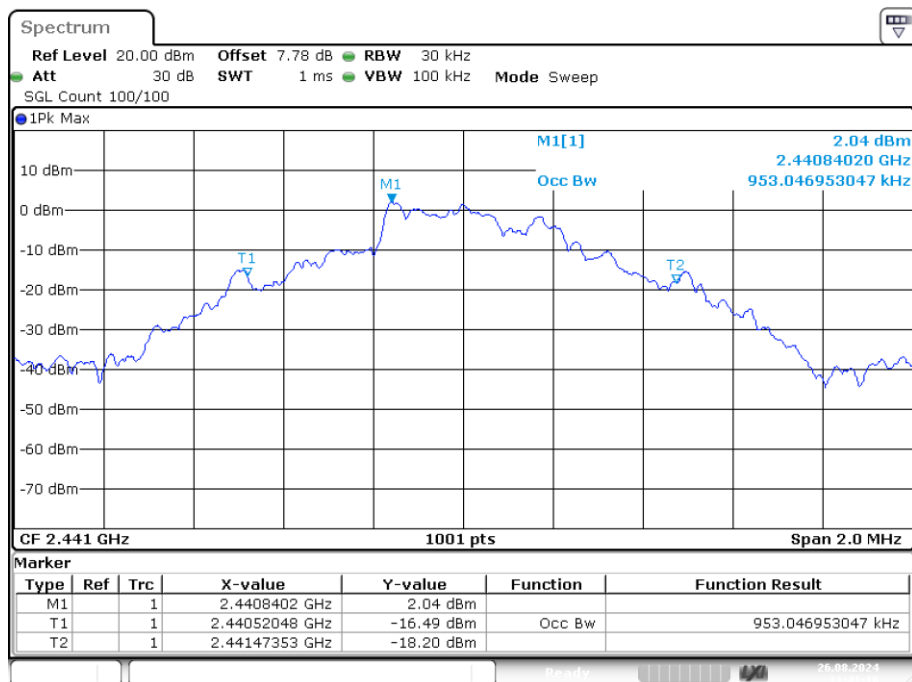


Date: 26.AUG.2024 11:41:18

OBW NVNT 1-DH1 2480MHz Ant1

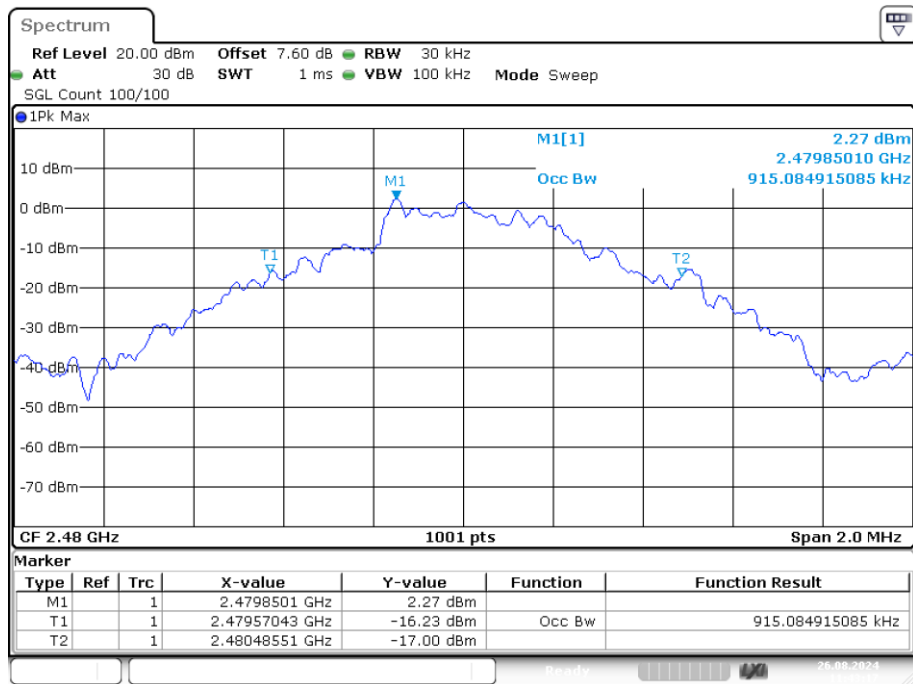


Date: 26.AUG.2024 11:43:17

OBW NVNT 2-DH1 2402MHz Ant1

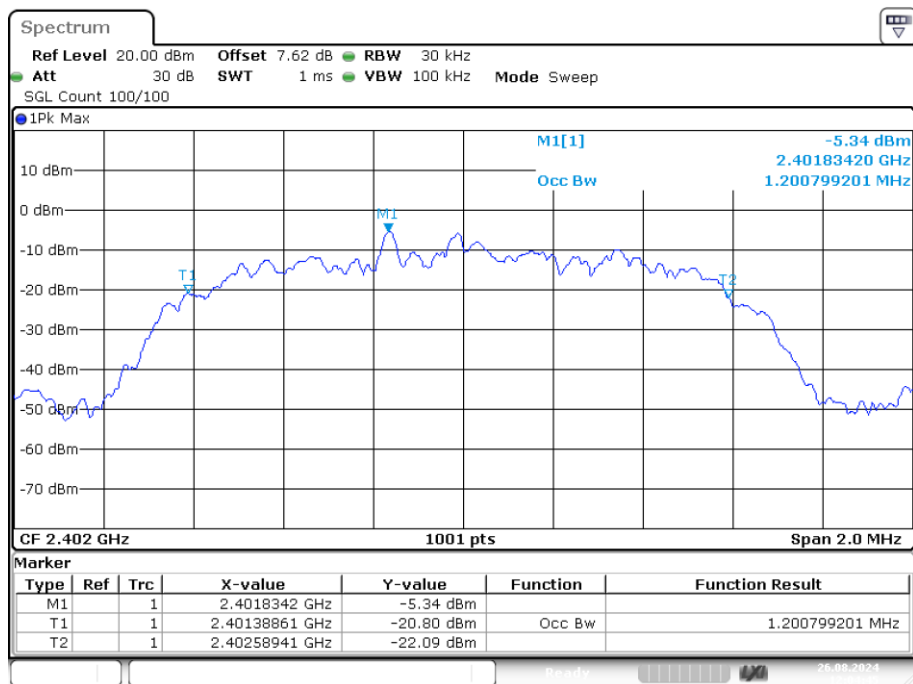


Date: 26.AUG.2024 12:04:45

OBW NVNT 2-DH1 2441MHz Ant1

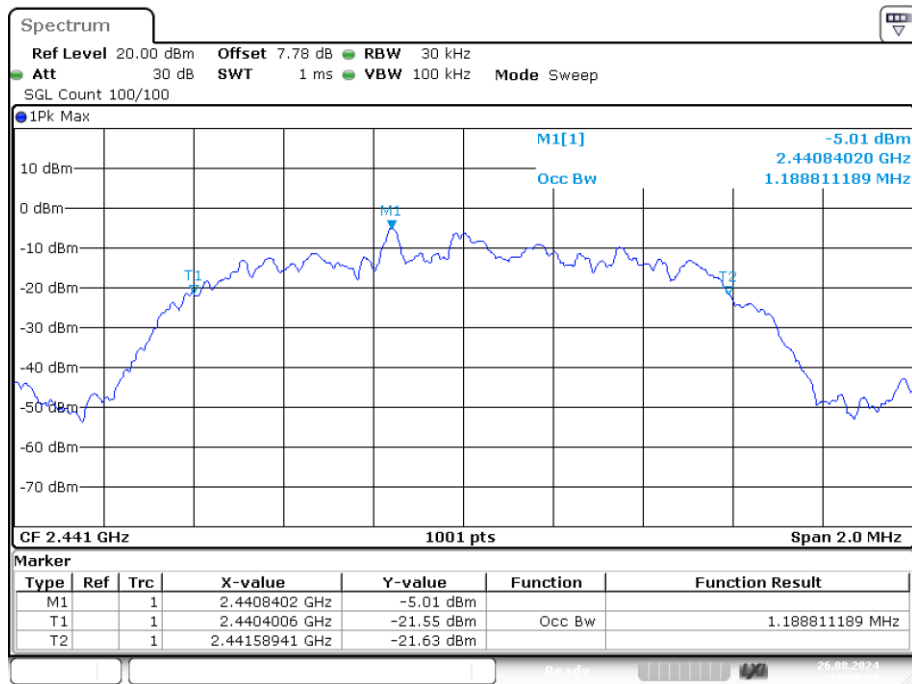


Date: 26.AUG.2024 12:06:34

OBW NVNT 2-DH1 2480MHz Ant1

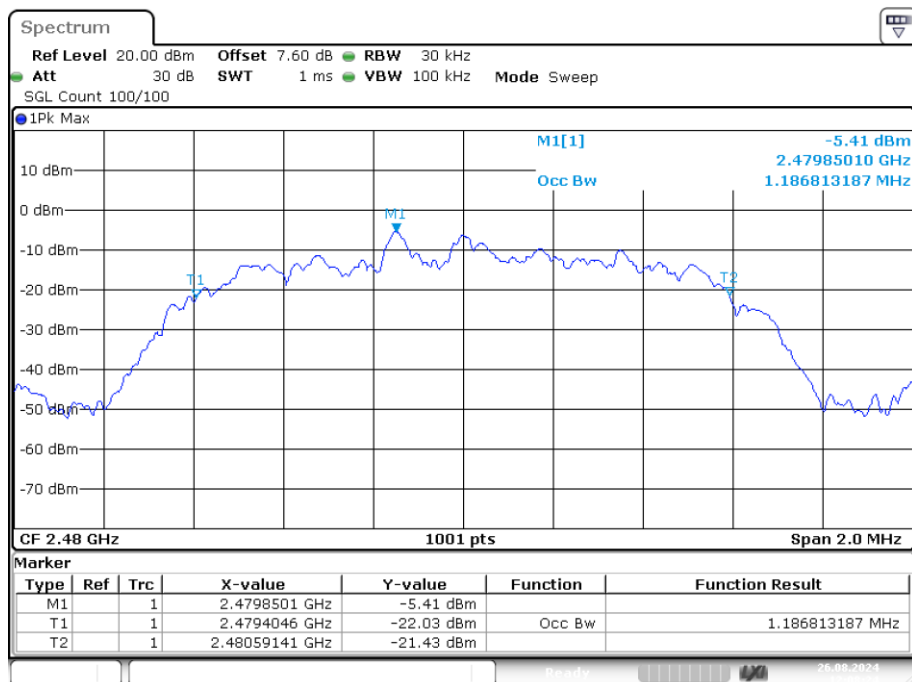


Date: 26.AUG.2024 12:08:24

OBW NVNT 3-DH1 2402MHz Ant1

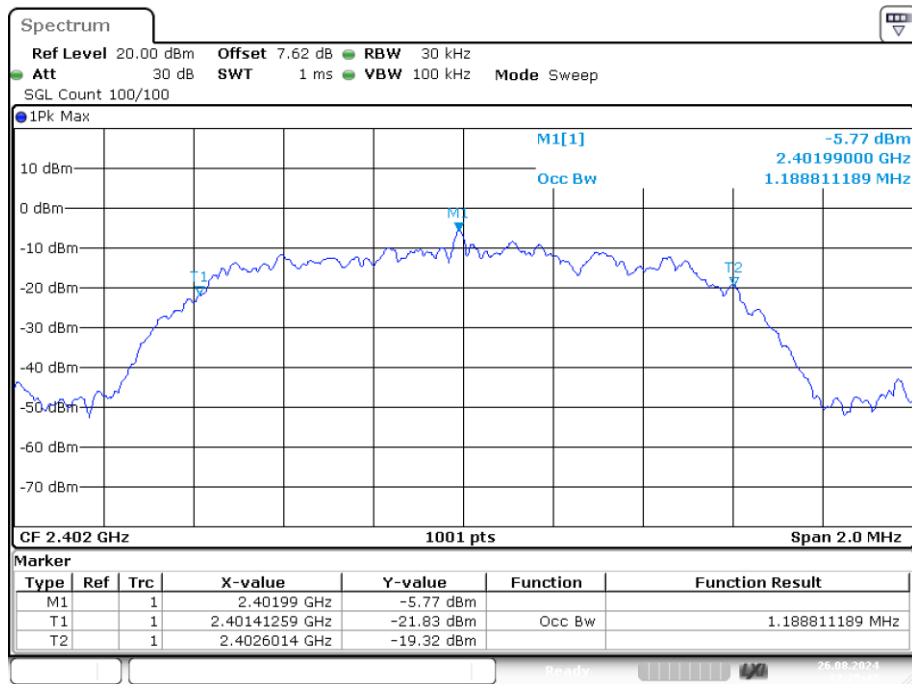


Date: 26.AUG.2024 12:25:41

OBW NVNT 3-DH1 2441MHz Ant1

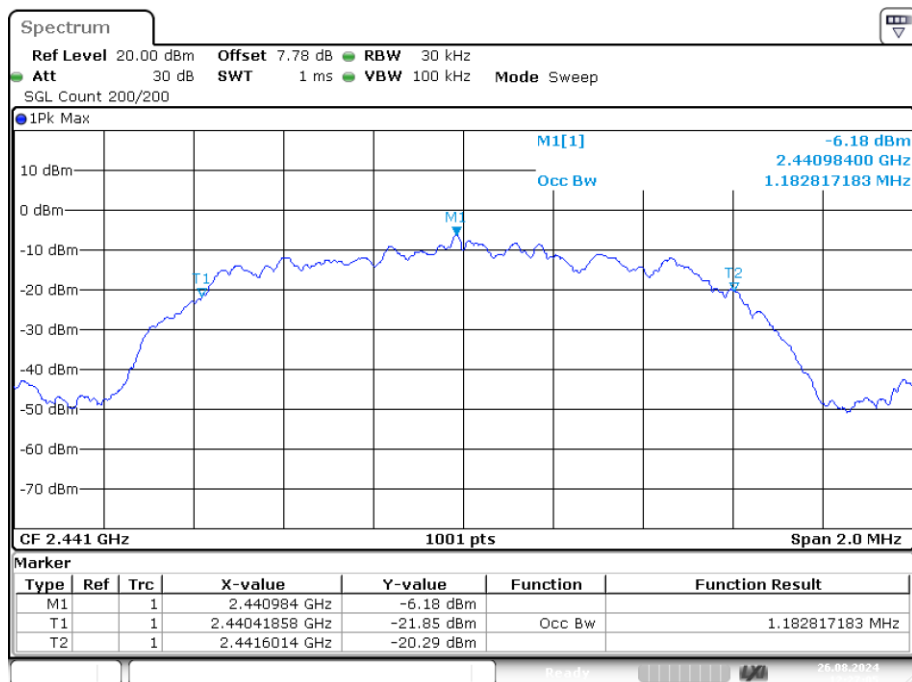

Date: 26.AUG.2024 12:27:05

OBW NVNT 3-DH1 2480MHz Ant1

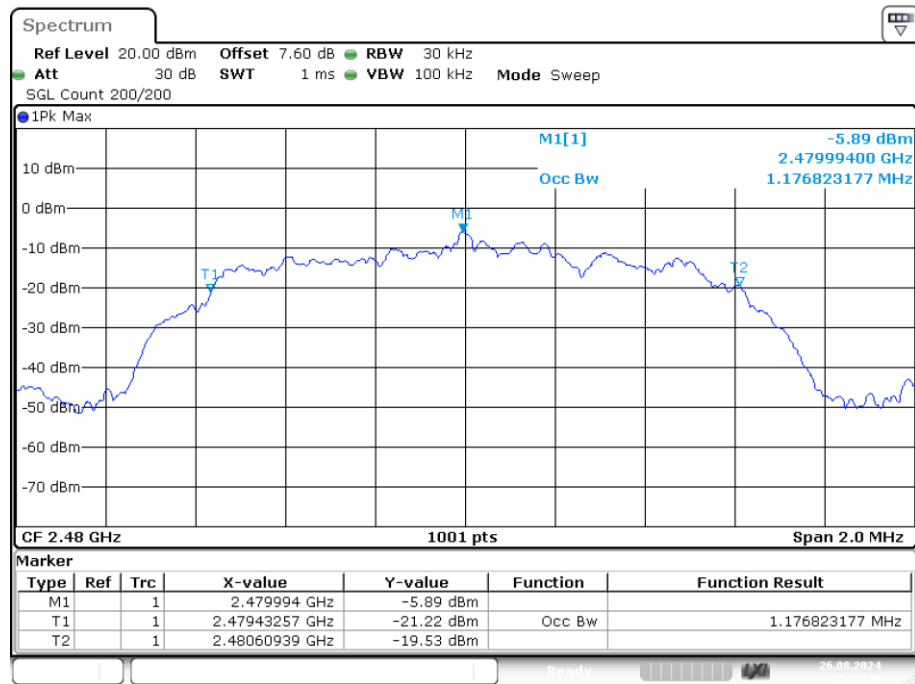

Date: 26.AUG.2024 12:28:26

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.


5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.846	2441.844	0.998	0.692	Pass
NVNT	2-DH1	Ant1	2440.844	2441.846	1.002	0.847	Pass
NVNT	3-DH1	Ant1	2440.99	2441.998	1.008	0.873	Pass

CFS NVNT 1-DH1 2441MHz Ant1

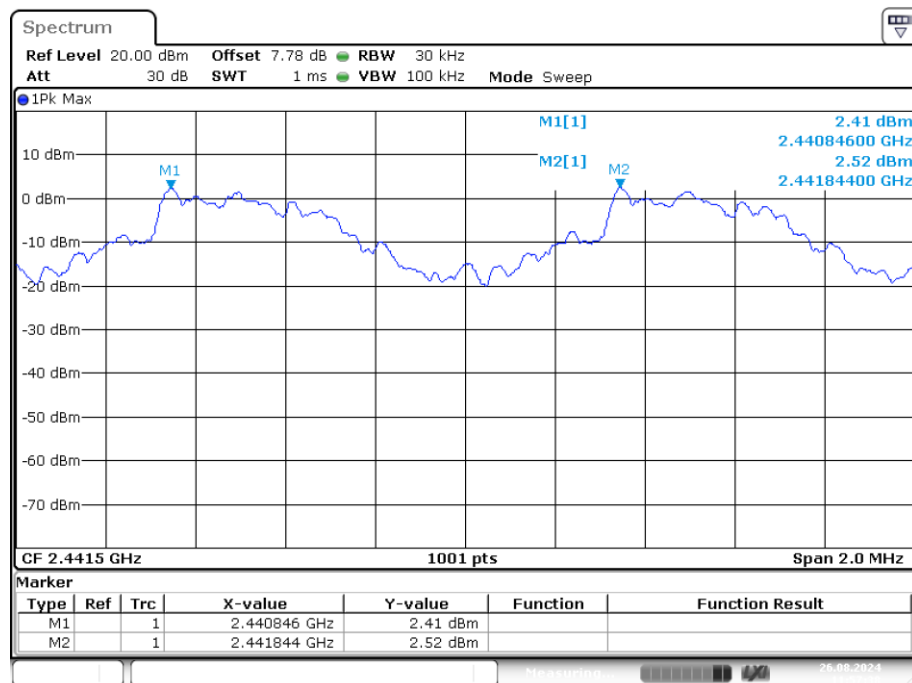


CFS NVNT 2-DH1 2441MHz Ant1

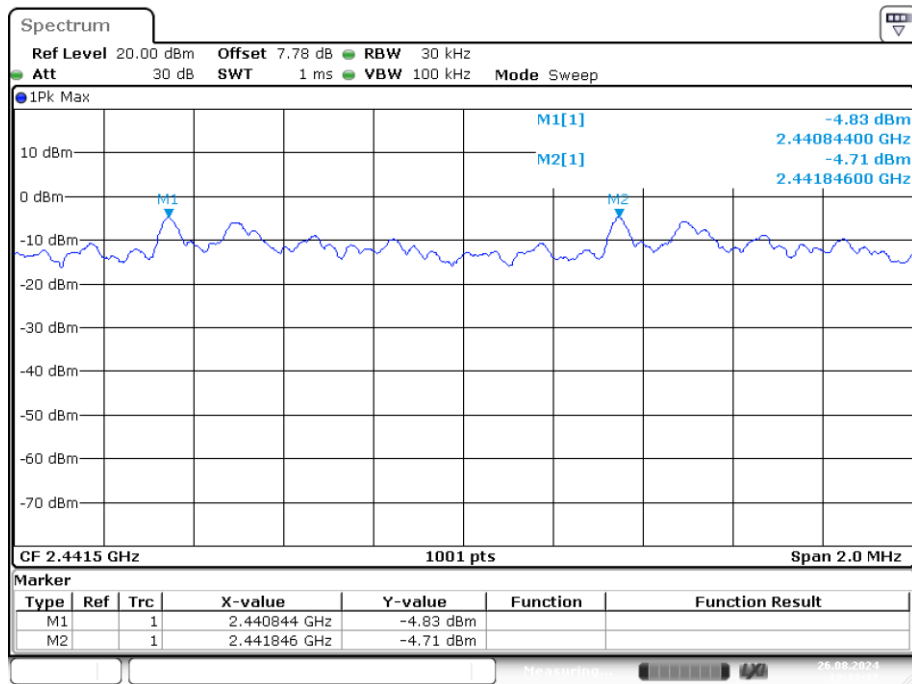

Date: 26.AUG.2024 12:13:38

CFS NVNT 3-DH1 2441MHz Ant1

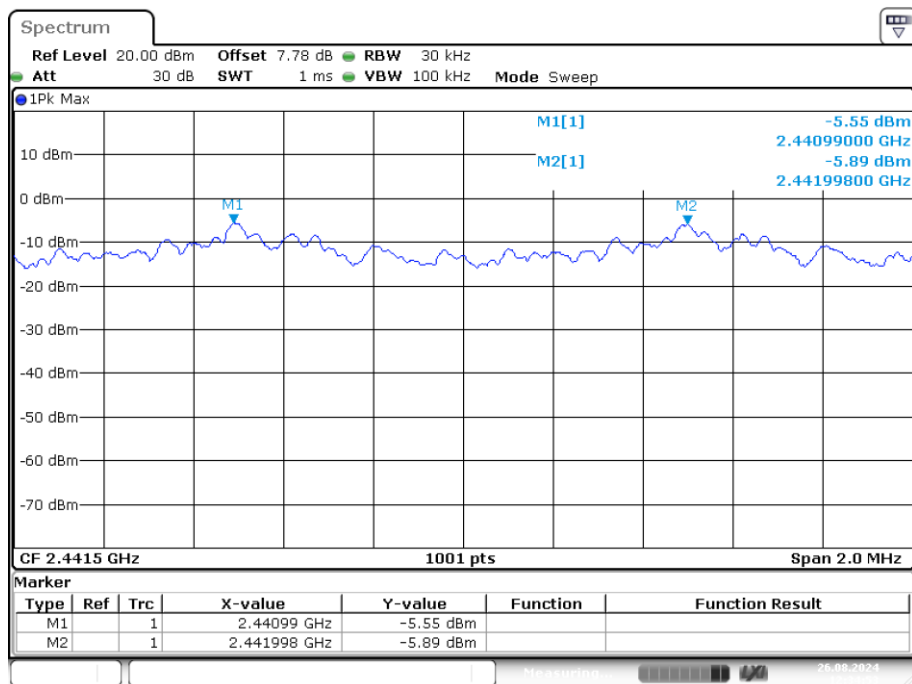

Date: 26.AUG.2024 12:34:54

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1

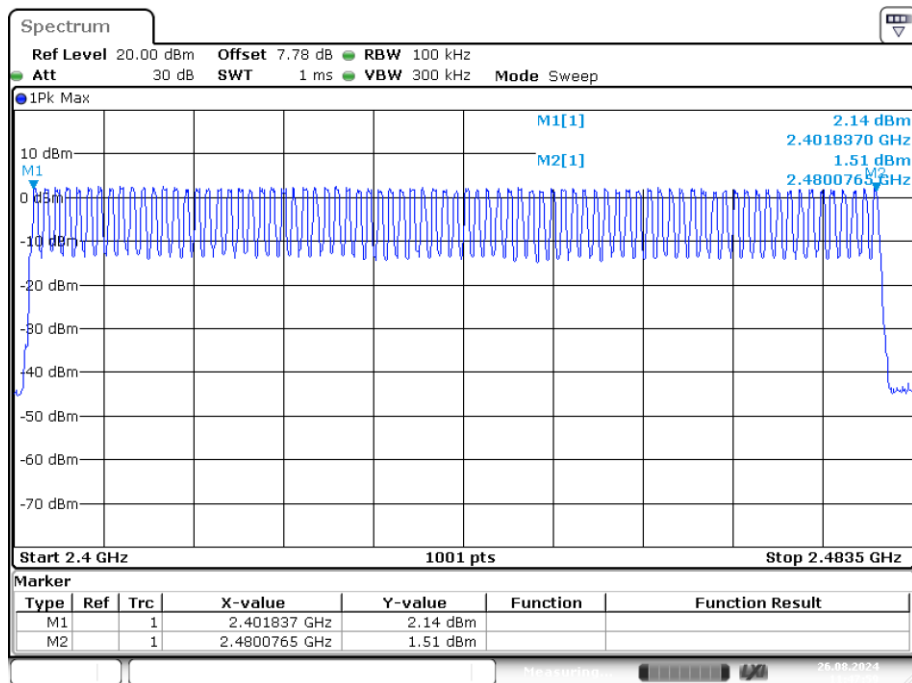


Date: 26.AUG.2024 11:47:59

Hopping No. NVNT 2-DH1 2441MHz Ant1

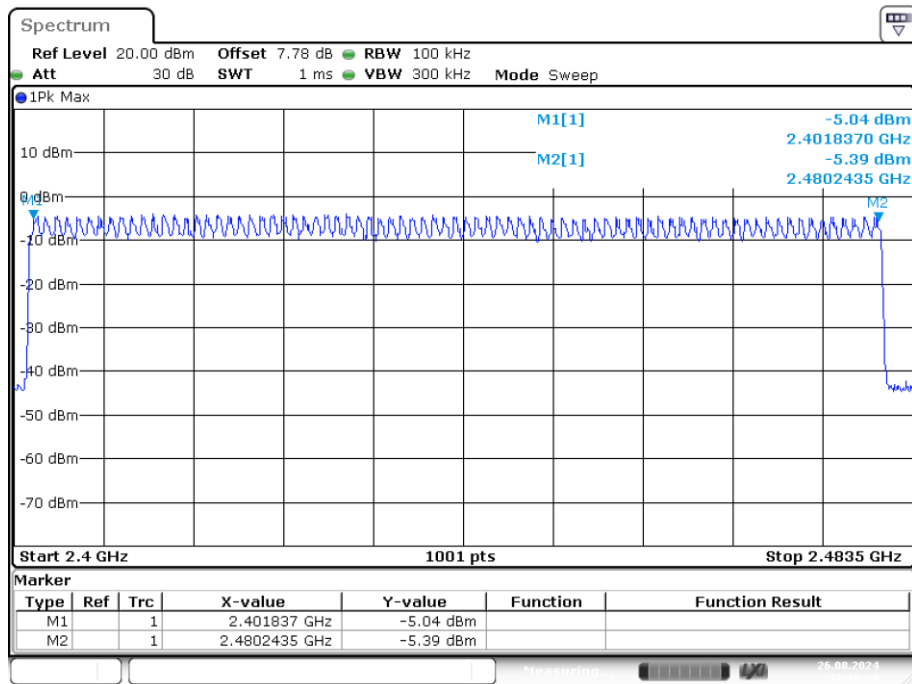

Date: 26.AUG.2024 12:15:34

Hopping No. NVNT 3-DH1 2441MHz Ant1

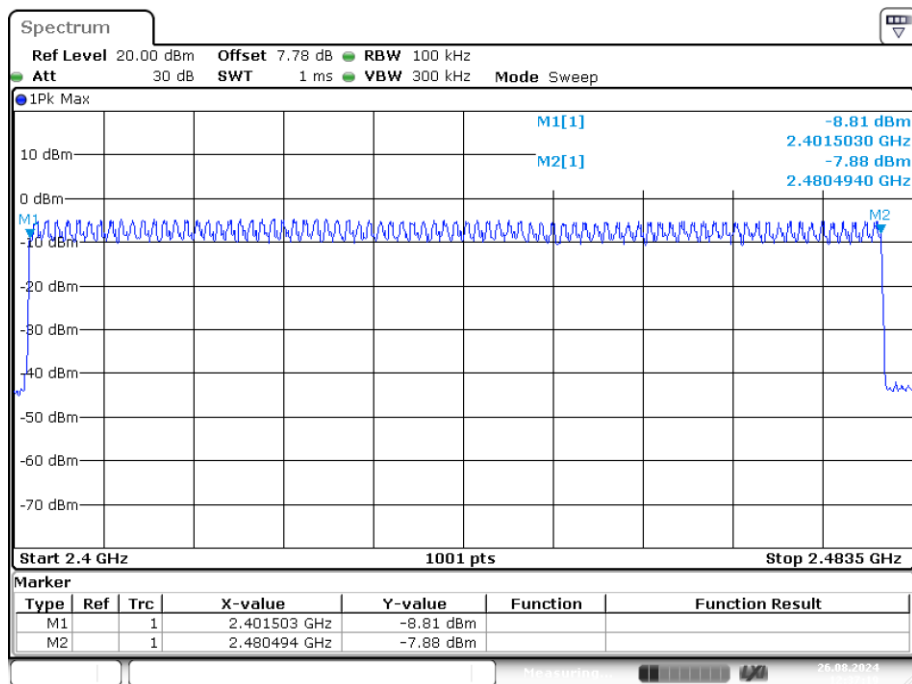

Date: 26.AUG.2024 12:37:19

7. DWELL TIME

7.1. Test limit

Please refer section 15.247.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.


7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.383	122.560	318	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.64	262.400	161	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.888	308.053	99	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.389	124.480	318	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.64	262.400	157	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.888	308.053	105	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.389	124.480	319	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.64	262.400	164	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.89	308.267	110	31600	400	Pass


Note: Total Dwell Time= Pulse Time* Burst Count

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

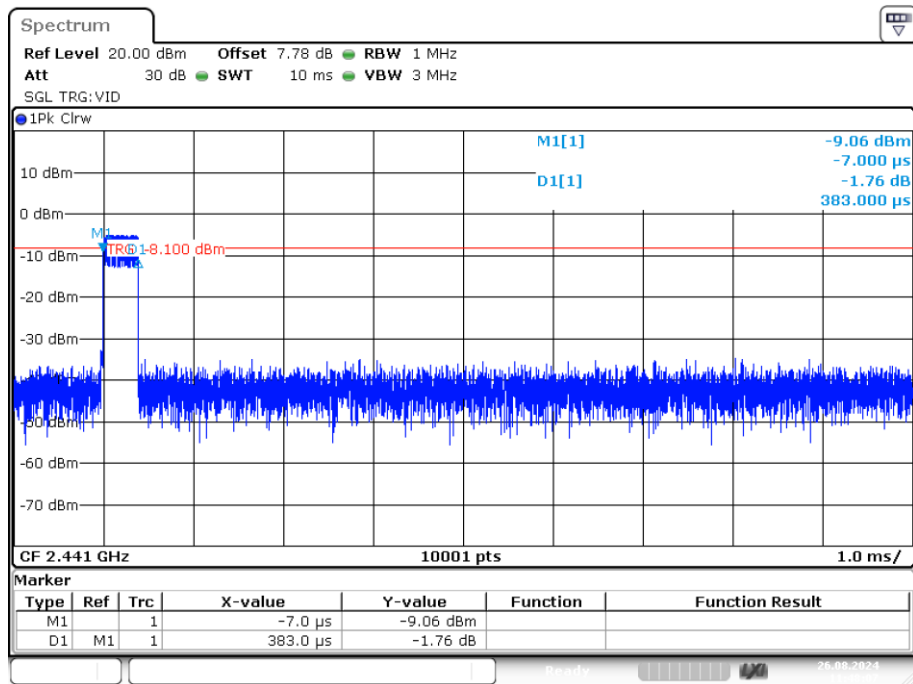


Date: 26.AUG.2024 11:48:06

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

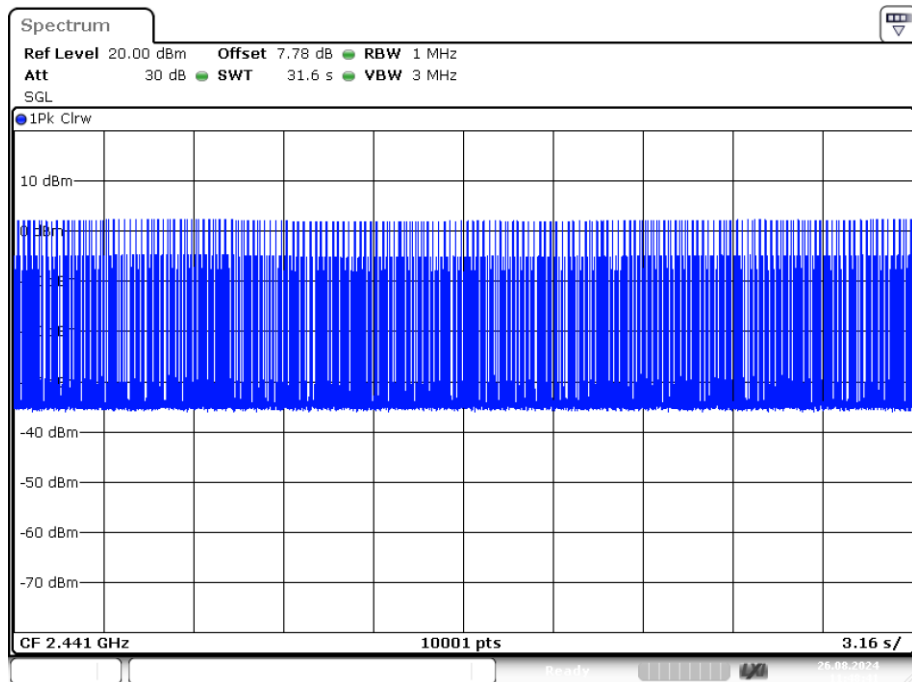


Date: 26.AUG.2024 11:48:41

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

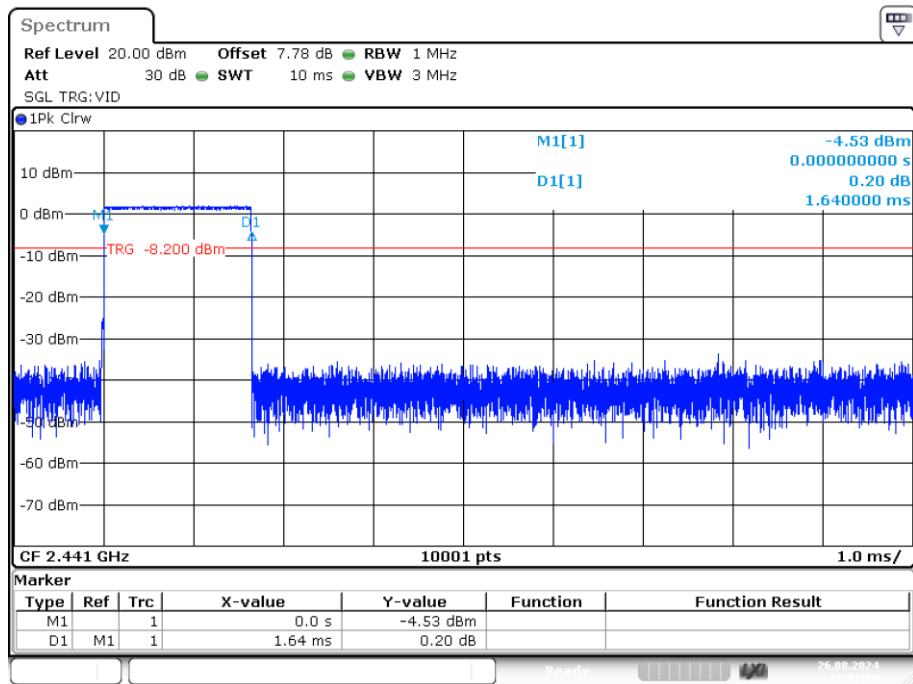


Date: 26.AUG.2024 12:01:20

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

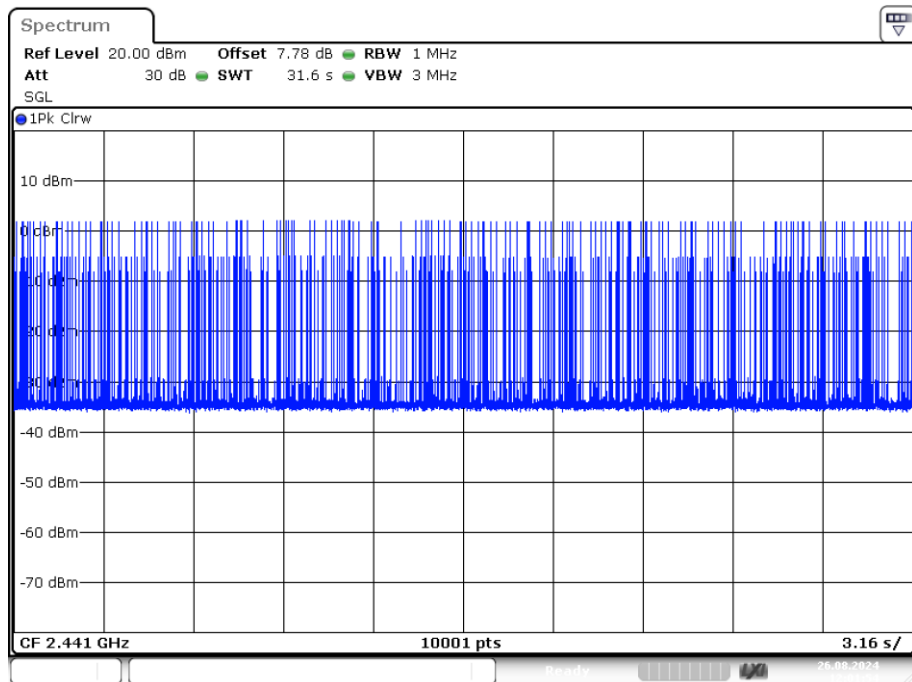


Date: 26.AUG.2024 12:01:55


Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

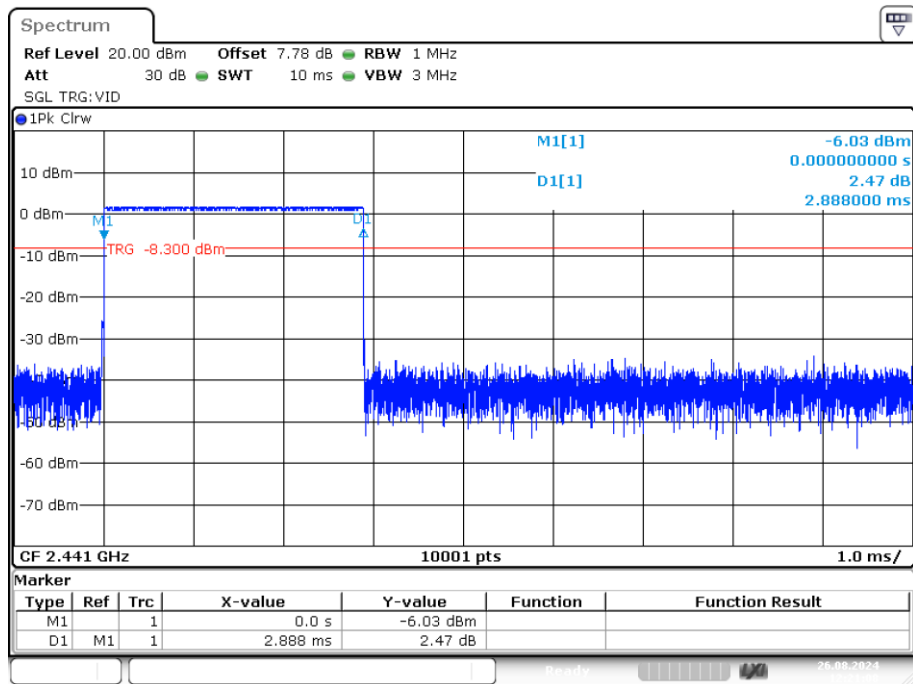

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

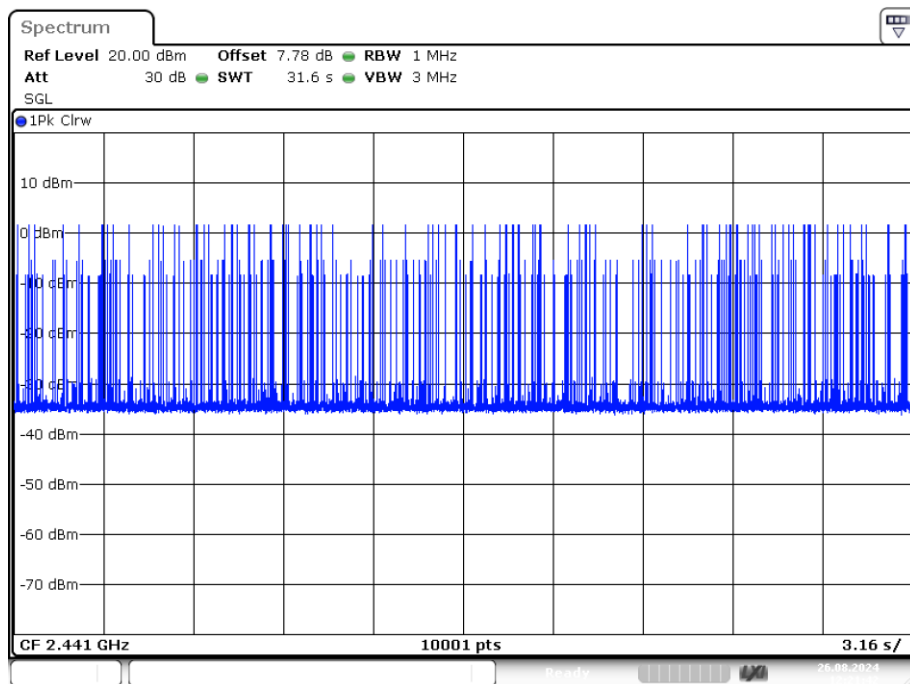


Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

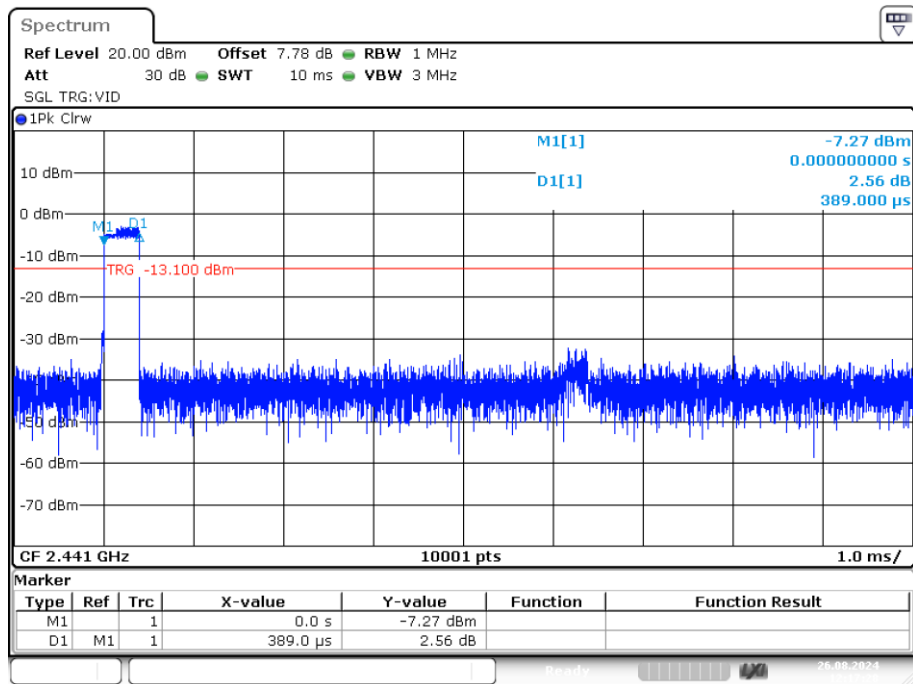


Date: 26.AUG.2024 12:17:28

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

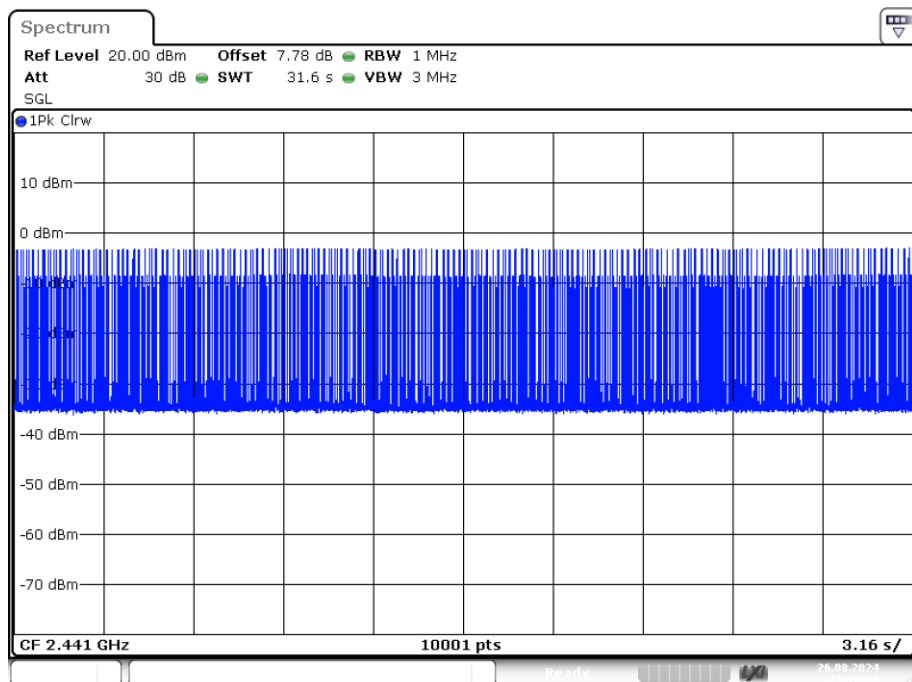


Date: 26.AUG.2024 12:18:02

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

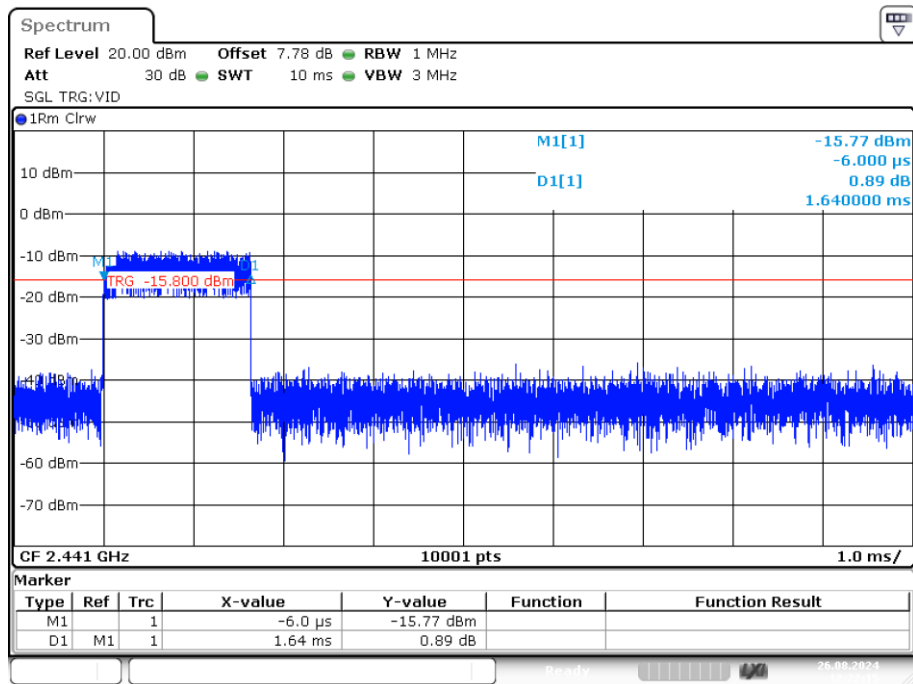


Date: 26.AUG.2024 12:22:14

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

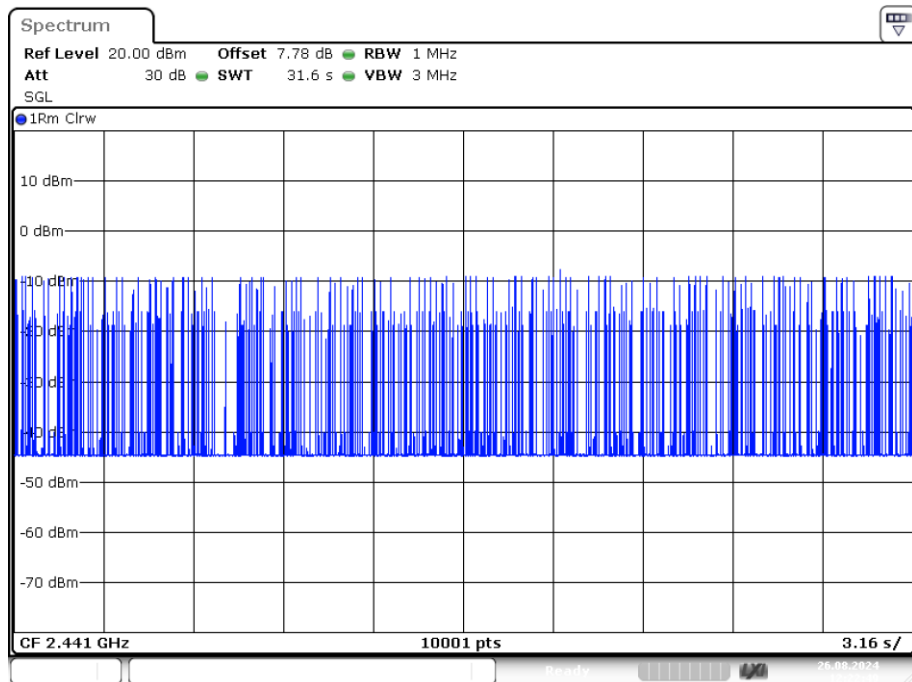


Date: 26.AUG.2024 12:22:49

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

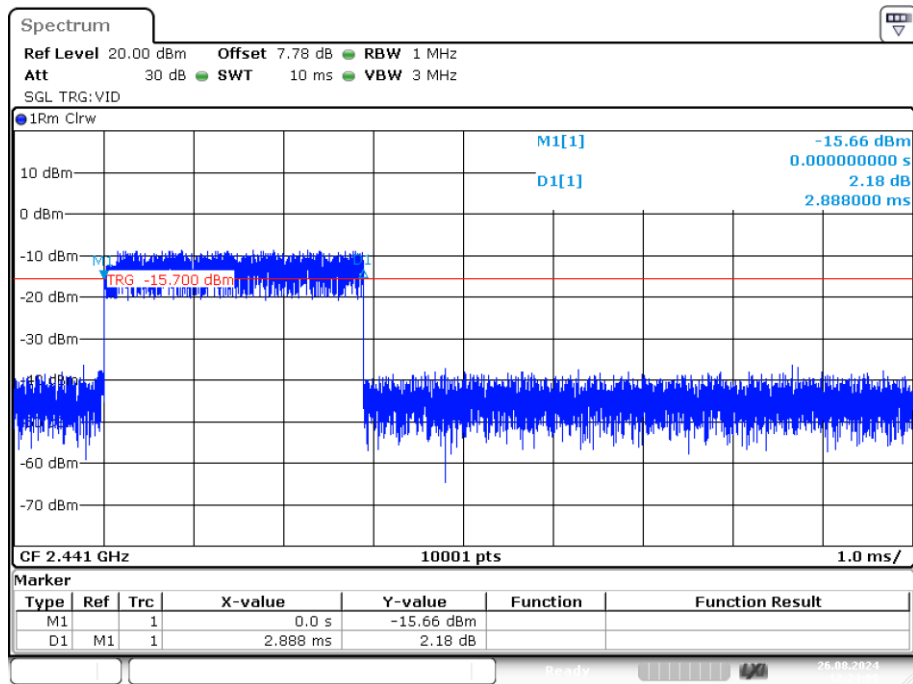


Date: 26.AUG.2024 12:24:09

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

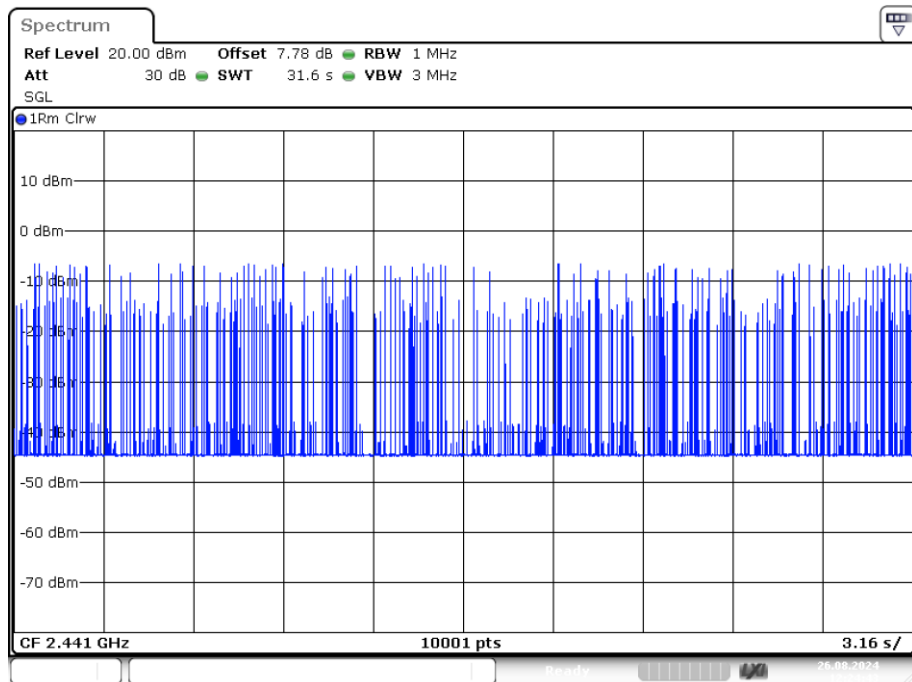


Date: 26.AUG.2024 12:24:44

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

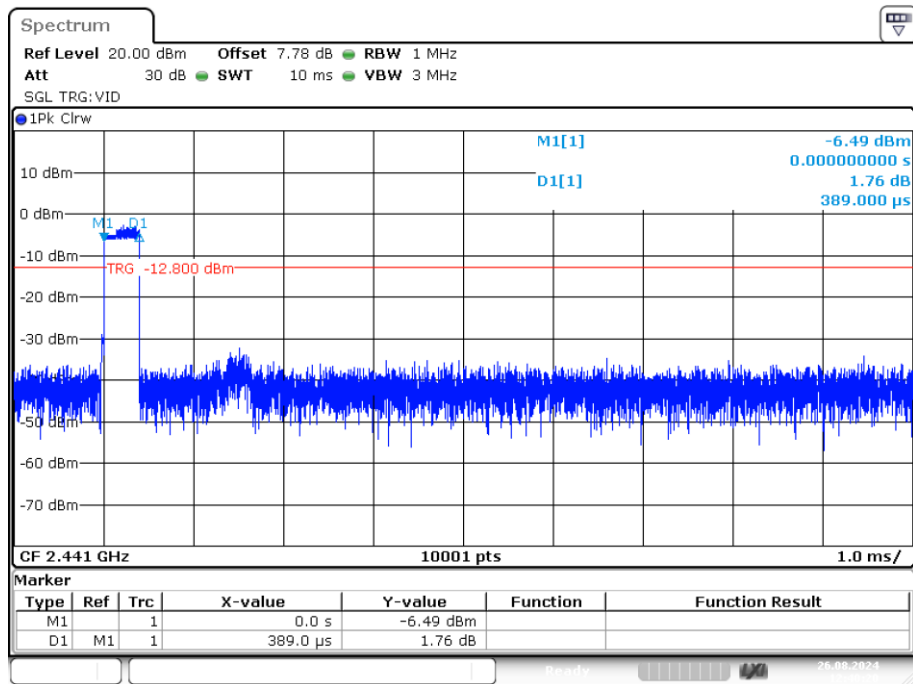


Date: 26.AUG.2024 12:40:20

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

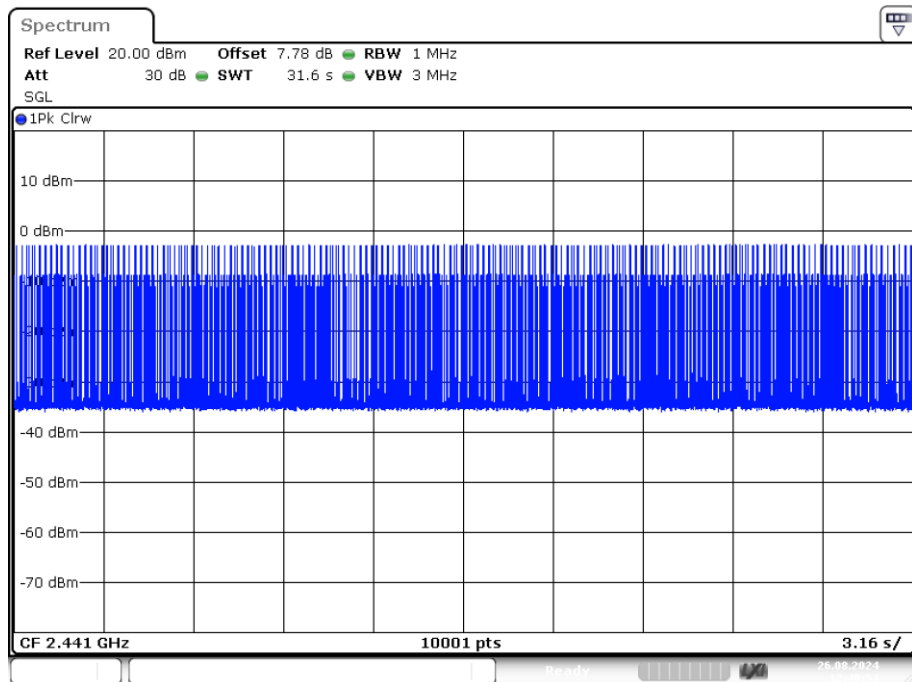


Date: 26.AUG.2024 12:40:54

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

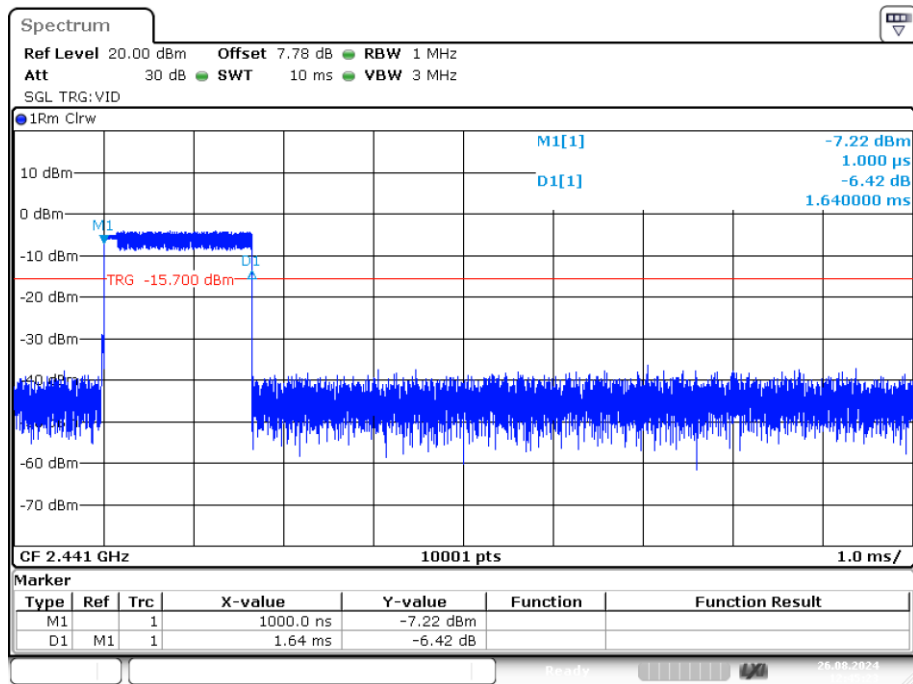


Date: 26.AUG.2024 12:45:23

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

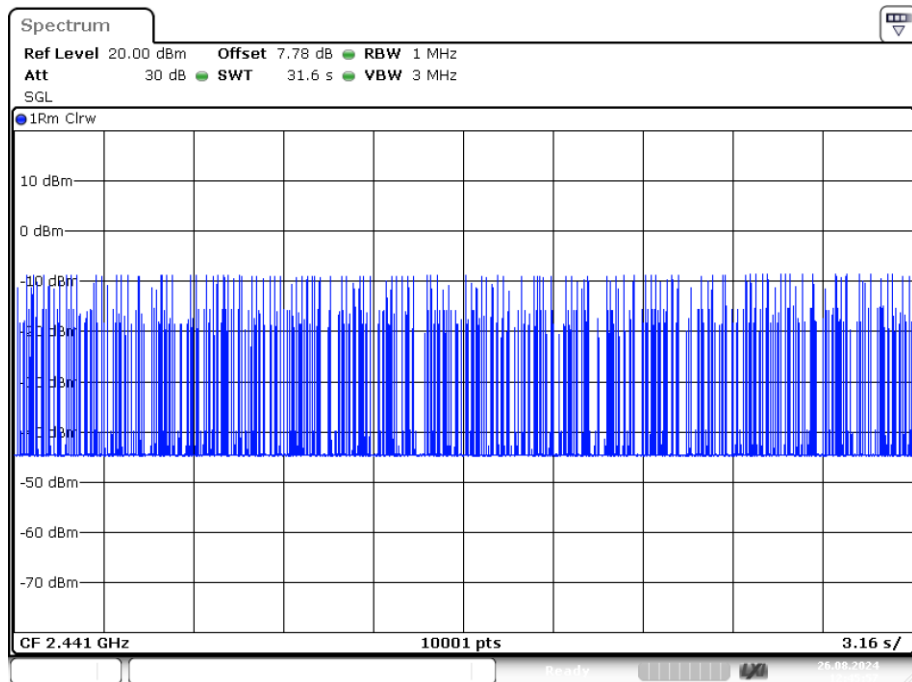


Date: 26.AUG.2024 12:45:57

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

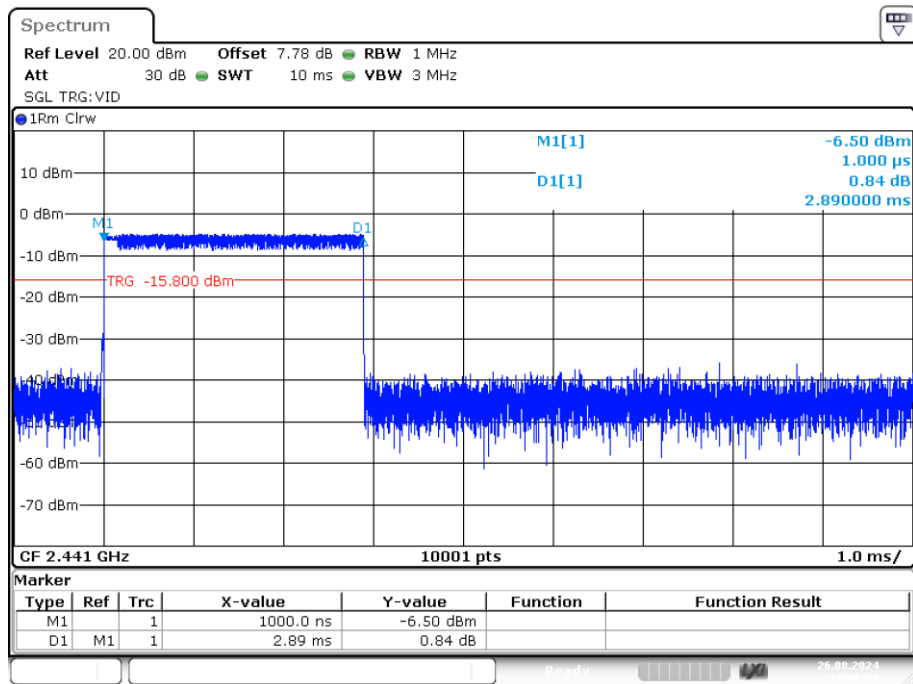

Date: 26.AUG.2024 12:46:21

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

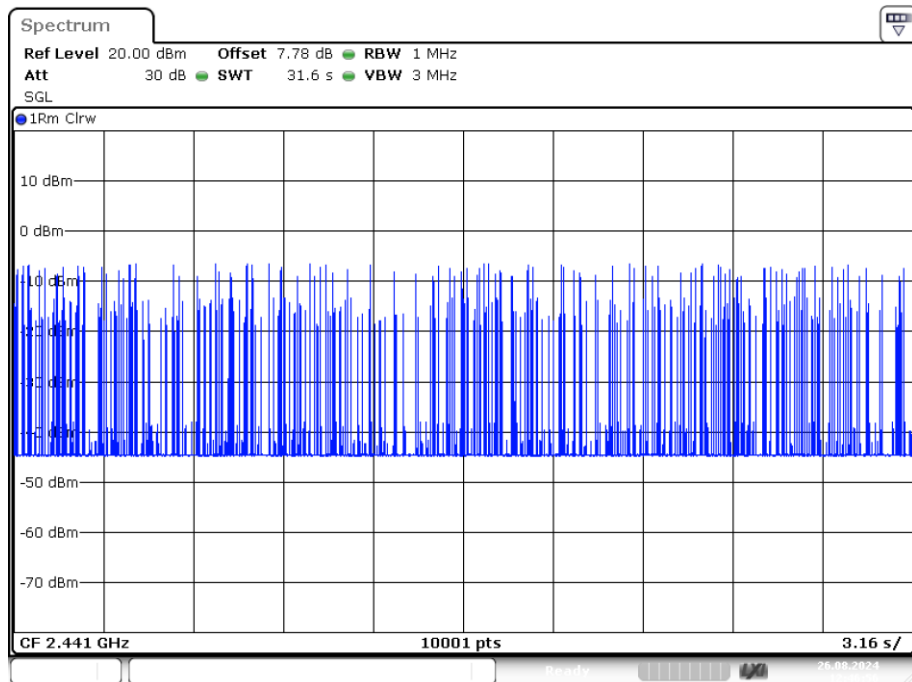

Date: 26.AUG.2024 12:46:56

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands ^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0

6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/\text{F}(\text{KHz})$	/
0.490-1.705	30	$24000/\text{F}(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/\text{F}$ (F in kHz)	300
490 - 1705 kHz	$63.7/\text{F}$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

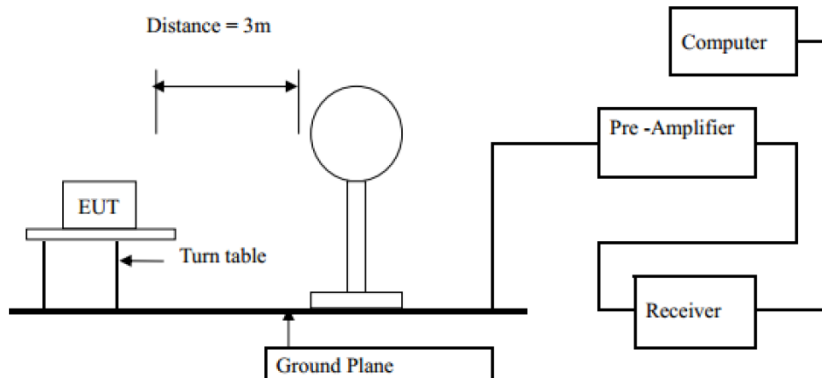

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

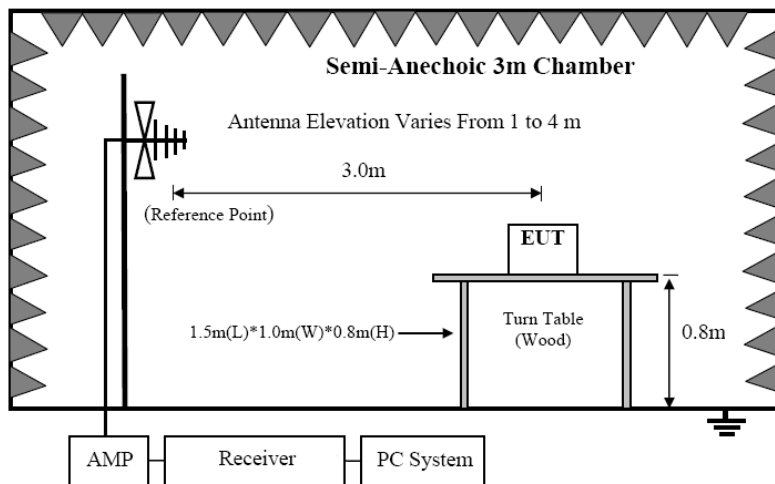

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

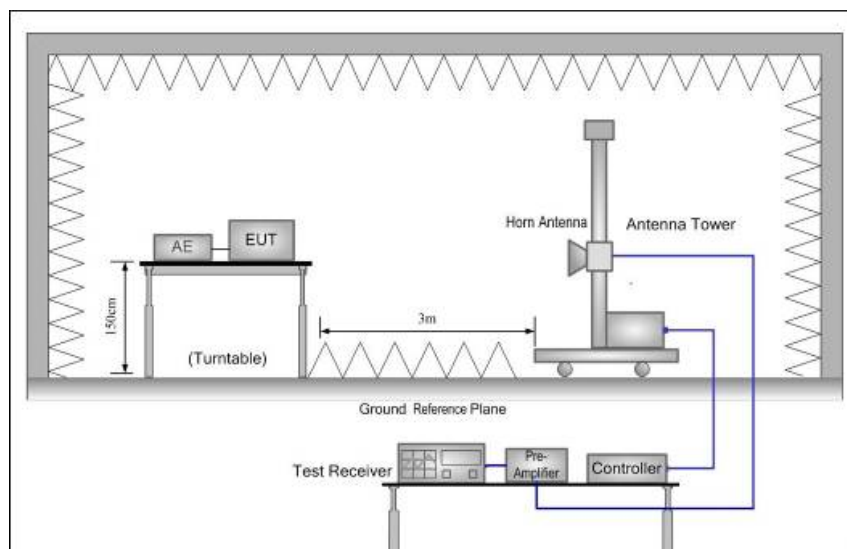

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

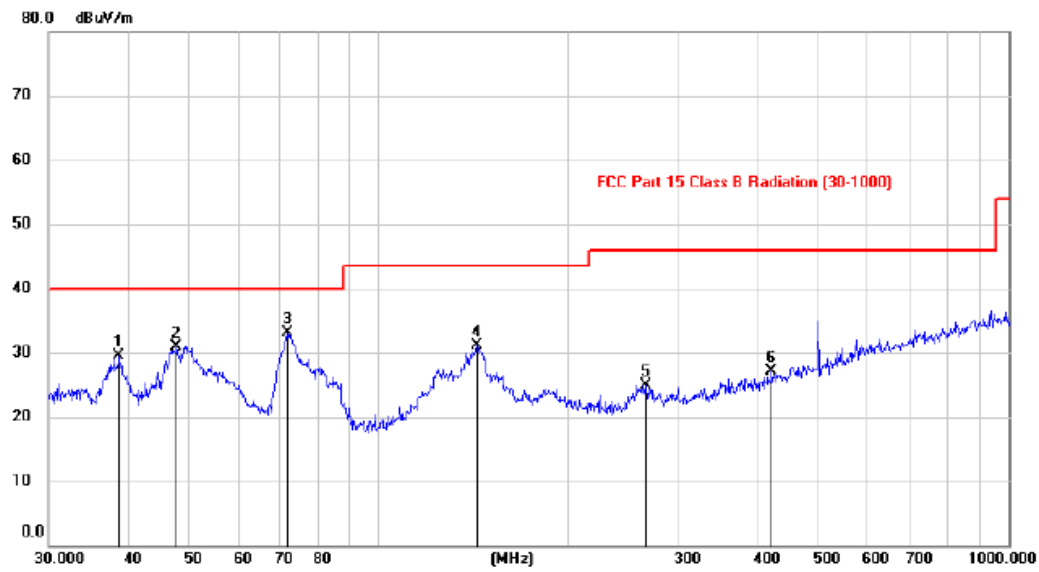

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.7789	15.17	14.38	29.55	40.00	-10.45	peak		
2		47.8428	16.88	14.08	30.96	40.00	-9.04	peak		
3	*	71.7313	21.98	11.11	33.09	40.00	-6.91	peak		
4		143.6783	16.46	14.59	31.05	43.50	-12.45	peak		
5		265.7689	11.71	13.15	24.86	46.00	-21.14	peak		
6		420.5803	10.39	16.75	27.14	46.00	-18.86	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

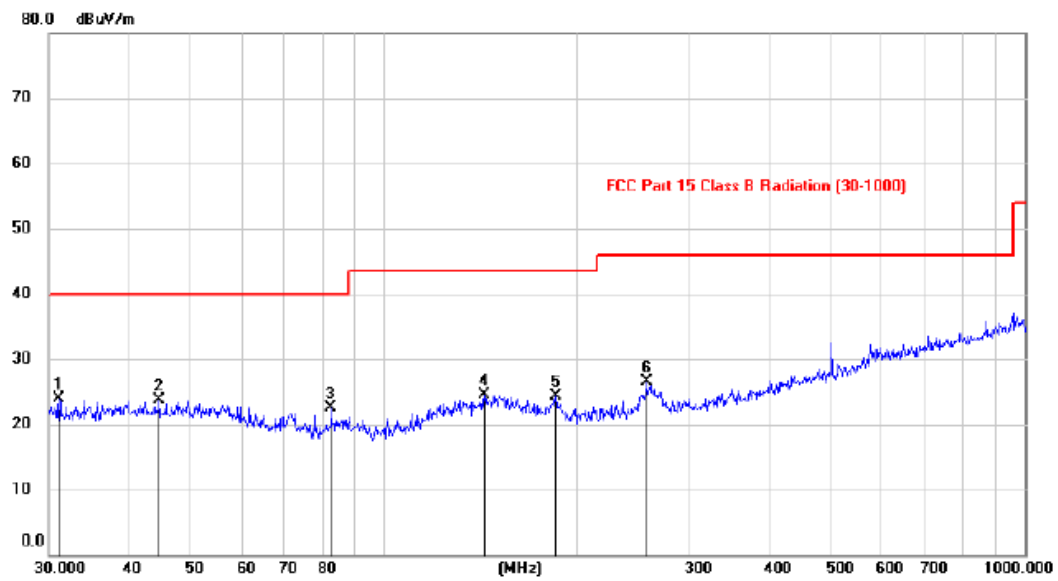Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	31.1252	10.29	13.59	23.88	40.00	-16.12	peak		
2		44.6181	9.50	14.15	23.65	40.00	-16.35	peak		
3		82.7061	12.52	9.94	22.46	40.00	-17.54	peak		
4		143.5272	9.89	14.58	24.47	43.50	-19.03	peak		
5		185.3978	12.18	12.03	24.21	43.50	-19.29	peak		
6		257.4222	13.50	12.92	26.42	46.00	-19.58	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.31	V	33.95	10.18	34.26	55.18	74	-18.82	PK
4804	35.07	V	33.95	10.18	34.26	44.94	54	-9.06	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	45.64	H	33.95	10.18	34.26	55.51	74	-18.49	PK
4804	35.81	H	33.95	10.18	34.26	45.68	54	-8.32	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	38.35	V	33.93	10.2	34.29	48.19	74	-25.81	PK
4882	34.83	V	33.93	10.2	34.29	44.67	54	-9.33	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	35.35	H	33.93	10.2	34.29	45.19	74	-28.81	PK
4882	30.68	H	33.93	10.2	34.29	40.52	54	-13.48	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	34.45	V	33.93	10.2	34.29	44.29	74	-29.71	PK
4960	26.46	V	33.93	10.2	34.29	36.30	54	-17.70	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	40.47	H	33.93	10.2	34.29	50.31	74	-23.69	PK
4960	35.73	H	33.93	10.2	34.29	45.57	54	-8.43	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.