



SPECIFICATION

Ceramic Antenna 3216 Size

2400-2500 MHz

P/N: HXD-BTD05

Manufacture: Shenzhen HengXinDa Technology Co., Ltd.
Address: Room 301, No. 8, Sanhe Overseas Chinese
District 2, Tongsheng Community, Dalang Sub-district,
Longhua District, Shenzhen


1. Frequency

2400-2500 MHz


2. Applications

For Miniaturized Bluetooth System


3. Dimensions (Unit : mm)

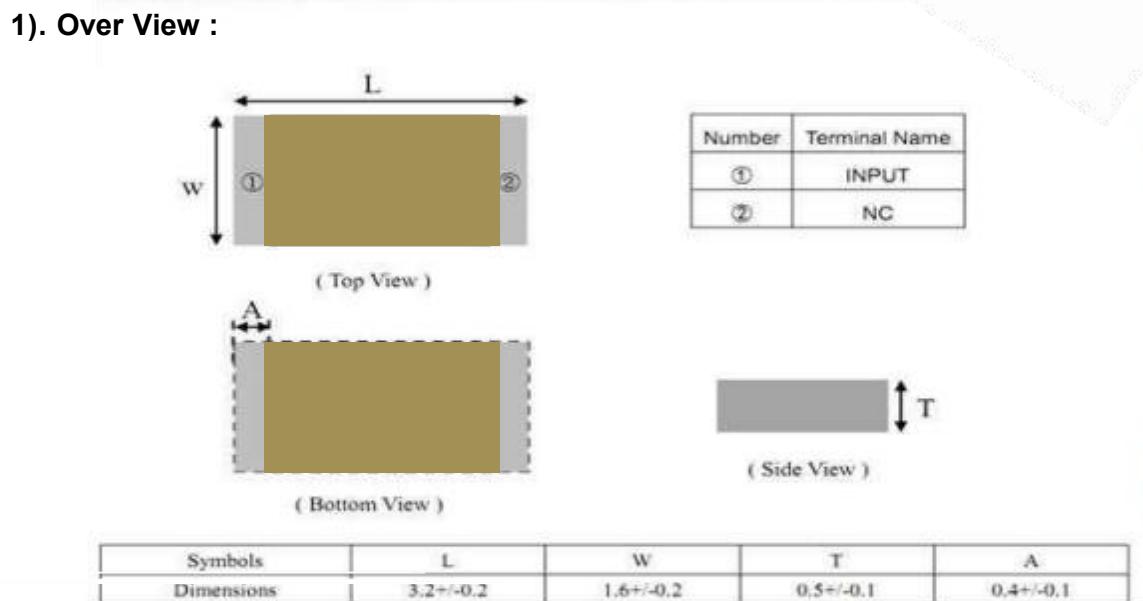

2).PCB LAYOUTVIEW:

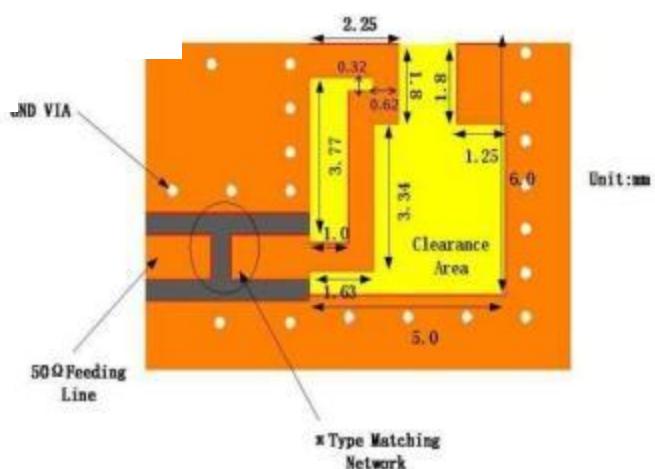


4. Evaluation Board Size and Matching Circuits

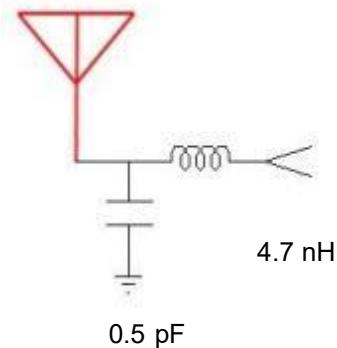


5. Electrical Characteristics

Part Number	HXD3216ANT2450-BTD05
Central Frequency	2450 MHz
Bandwidth	100(typ.) MHz
V.S.W.R	≤ 2.0
Peak Gain	4.34 dBi
Impedance	50 Ohm
Polarization	Linear
Azimuth Beamwidth	Omni-directional

6. Return Loss (S11)

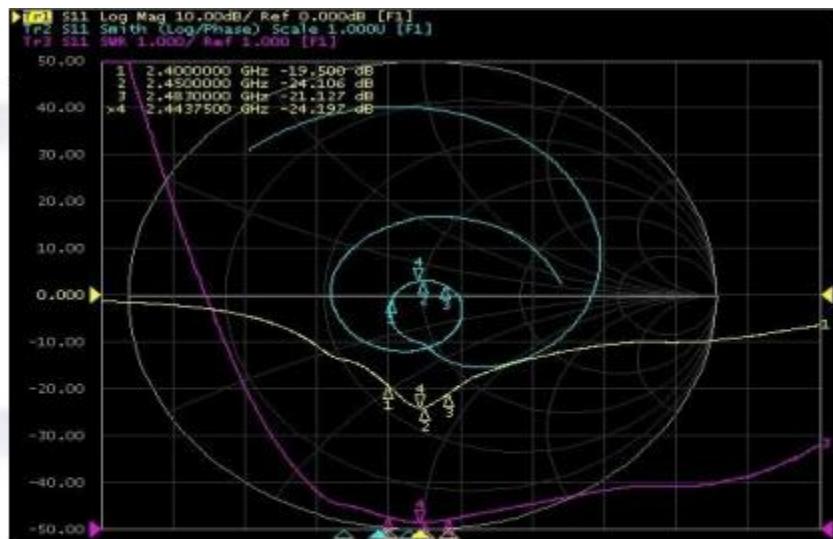


7. Radiation Pattern & Efficiency

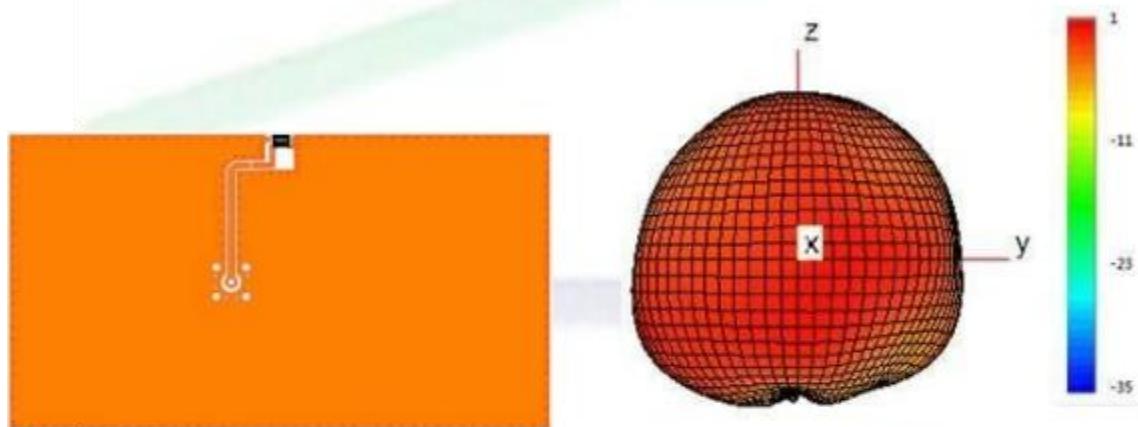


Frequency (MHz)	2400	2450	2500
Efficiency (dB)	-1.87	-1.67	-1.94
Efficiency (%)	65	68	64
Gain (dBi)	3.12	4.34	3.45

8. Reflow Soldering Standard Condition

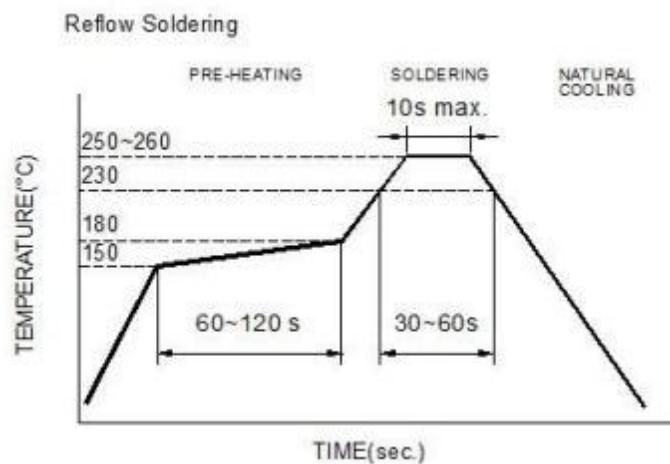

9.

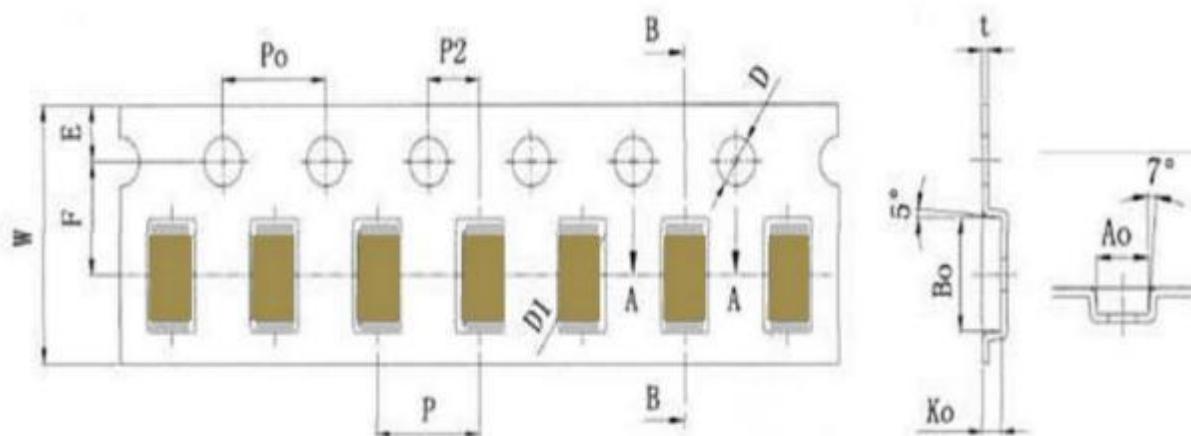

外觀	規格	公差
W	8.00	± 0.10
P	4.00	± 0.10
E	1.75	± 0.10
F	3.50	± 0.05
P2	2.00	± 0.05
D	1.50	$^{+0.10}_{-0.00}$
D1	1.00	± 0.10
P0	4.00	± 0.10
10P0	40.00	± 0.20


外觀	規格	公差
Ao	1.85	± 0.10
Bo	3.50	± 0.10
Ko	0.73	± 0.10
t	0.23	± 0.05

 **Remarks for Package**

Reserve a length of 150 ~200mm for the trailer of the carrier and 250 ~300 mm for the leader of the carrier and further 250mm of cover tape at the leading part of the carrier.



Reel (6000 pcs/Reel)

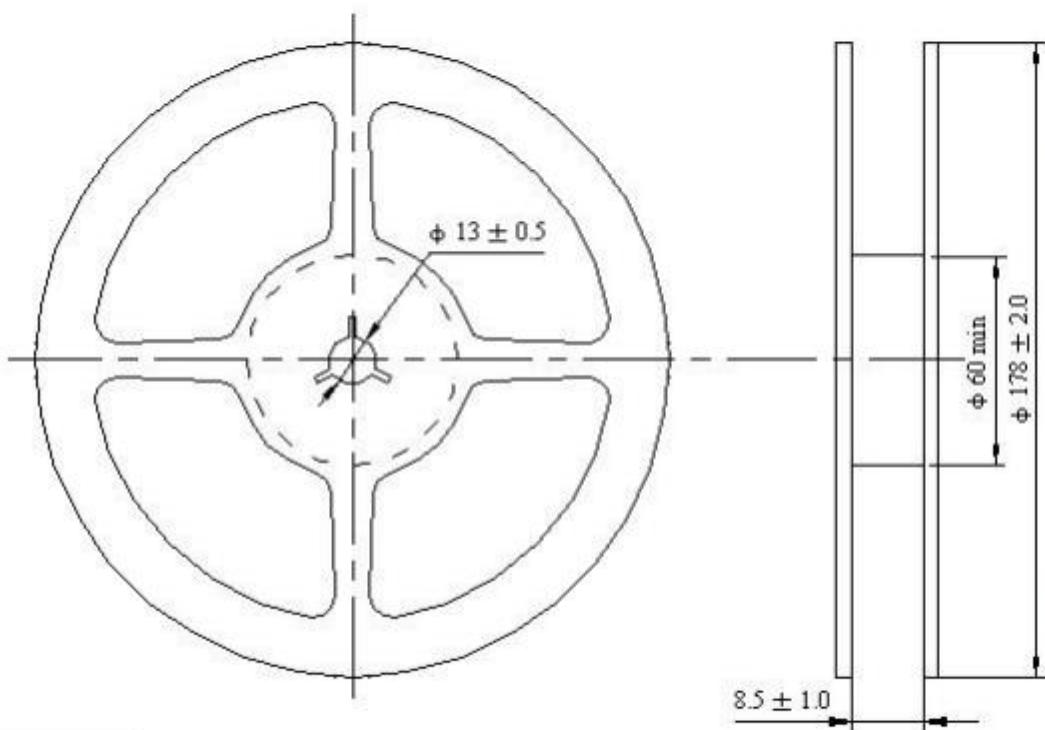

Storage Period

Oxidizable Material, 12 months in vacuum sealed bag, please repack within 168 hours by re-seal the package treatment after using.

Storage Temperature Range : <30 degree C, Humidity : <60%RH

10. Dependability Test

Test item	Test condition / Test method	Specification
Solderability IEC 60068-2-58 GB/T2423.28	*Solder bath temperature: 240: 5°C *Immersion time: 2: 0.5 sec Solder: Sn96.5Ag3.0Gu0.5 for lead-free.	At least 95% of a surface of each terminal electrode must be covered by fresh solder.
Leaching (Resistance to dissolution of metallization) JIS C5101	*Solder bath temperature: 260: 5°C *Leaching immersion time: 10: 1 sec Solder : Sn96.5 Ag3.0 Gu0.5 for lead-free.	Loss of metallization on the edges of each electrode shall not exceed 25%.
Resistance to soldering heat IEC 60068-2-58 GB/T2423.28	*Preheating temperature: 120 ~150°C, 1 minute. *Solder temperature: 260: 5°C *Immersion time: 10: 1 sec Solder: Sn96.5Ag3.0Gu0.5 for lead-free Measurement to be made after keeping at room temperature for 24: 2 hrs.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature. Loss of metallization on the edges of each electrode shall not exceed 25%.
Drop Test IEC 60068-2-32 GB/T2423.8 Customer' s specification.	*Height: 50 cm *Test Surface: Rigid surface of concrete or steel. *Times: 6 surfaces for each units ; 2 times for each side.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature.
Vibration IEC 60068-2-6 GB/T 2423.10	*Frequency: 10Hz ~55Hz ~10Hz(1min) *Total amplitude: 1.5mm *Test times: 6hrs.(Two hrs each in three mutually perpendicular directions)	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature.
Adhesive Strength of Termination IEC60068-2-21 GB/T 2423.6	*Pressurizing force: 5N(\leq 0603): 10N($>$ 0603) *Test time:10: 1 sec	No remarkable damage or removal of the termination.

Bending test IEC 60068-2-21 GB/T 2423.29	The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm/s per second until the deflection becomes 2mm and then pressure shall be maintained for 10: 1 sec. Measurement to be made after keeping at room temperature for 24: 2 hours.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature.
Temperature cycle IEC60068-2-14 GB/T 2423.22	30 minutes at -40°C: 2°C. 10~15 minutes at room temperature. 30minutes at +85°C: 2°C. 10~15 minutes at room temperature. Total 100 continuous cycles Measurement to be made after keeping at room temperature for 24: 2 hrs.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature.
High temperature IEC 60068-2-2 GB/T2423.2	*Temperature: 85: 2°C. *Test duration: 500+24/-0 hours. Measurement to be made after keeping at room temperature for 24: 2 hrs.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics.
Humidity (steady conditions) IEC60068-2-3 GB/T 2423.3	*Humidity: 85: 5%R.H. *Temperature: 85: 2°C. *Time: 500+24/-0 hrs. Measurement to be made after keeping at room temperature for 24: 2 hrs ※ 200hrs measuring the first data then 300hrs data.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature.
Low temperature IEC 60068-2-1 GB/T2423.1	*Temperature: -40: 2°C. *Test duration: 500+24/-0 hours Measurement to be made after keeping at room temperature for 24: 2 hrs.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics at the room temperature.