

BXDTP1-Sensor Specification

1. Safety Instructions

Please read this manual carefully before using the product, be familiar with the structure of the product and master the installation method of the product. Before installation, please confirm that the product accessories are complete, the product can work normally, and there is no abnormal appearance and structure. During the installation process, the company shall strictly abide by the maintenance operation specifications and use professional maintenance tools. Otherwise, the company will not be responsible for any problems caused by the customer's illegal operation. If there is any problem in the process of using the product, it must be replaced or stopped immediately and tested by professional maintenance personnel or after-sales service. After installing the product, be sure to re-measure the dynamic balance of the tire to eliminate safety risks.

2. Parameters:

Product Model: BXDTP1

Storage temperature: -10°C~50°C

Operating temperature: -40°C~125°C

Pressure monitoring range: 0-800Kpa

Waterproof grade: IP67

Battery life: 4-6years

Power Level: 5-8dBm

Frequency: 433.92MHz

Pressure accuracy: ±7Kpa

Temperature accuracy: ±3°C

Weight: 35.5g (With valve)

Dimensions: approx.73.7mm*62.6mm*20.2mm


Warranty: 2 years

3. Sensor Component diagram:




4. Installation Operation Steps:


Step 1: Pass the nozzle through the hub and fix it with the nozzle fixing nut. Note that it is not tightening.

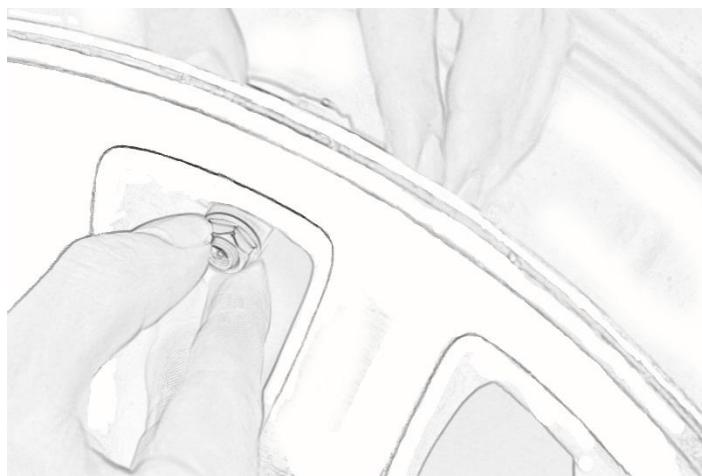

Step 2: Fix the sensor on the air nozzles with the sensor fixing screw. Note that the sensor should be close to the hub with a torque of 4N•m.

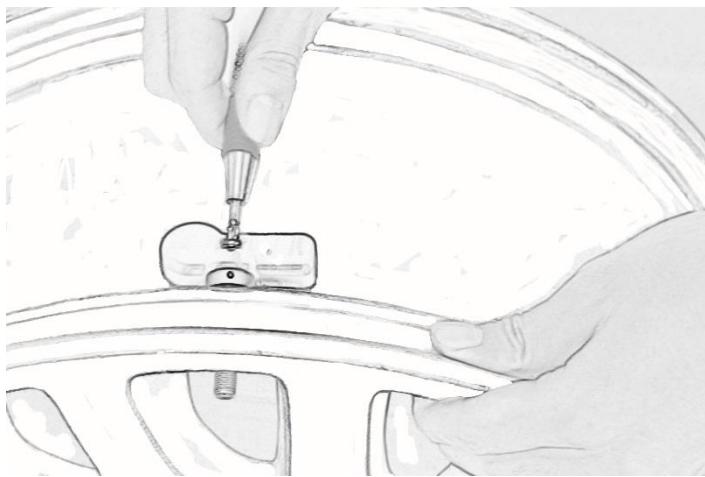

Step 3: Tighten the air nozzle fixing nut with a wrench to complete the installation. Note that the wrench uses a torque of 7 N•m.

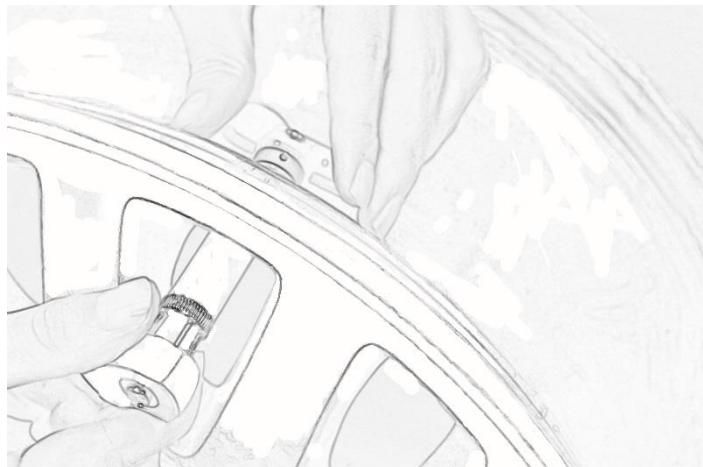

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are

designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.