



FCC PART 15.247

RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT2

RSS-247 ISSUE 3, AUGUST 2023

TEST REPORT

For

FCC: FUJIAN YESOUL HEALTH TECHNOLOGY CO.,LTD

RM-B616, BLDG., NO.1, STRAIT ECONOMIC AND TRADE PLAZA, FUZHOU FREE TRADE ZONE,
FUZHOU, FUJIAN, China

IC: Fujian YESOUL Health Technology Co., Ltd.

Rm-B616, Bldg., No.1, Strait Economic and Trade Plaza, Fuzhou Free Trade Zone Fuzhou 350000 China

**FCC ID: 2A3YB-YS-TT1MPLUS
IC: 30451-YSTT1MPLUS**

Report Type: Original Report	Product Name: YESOUL TREADMILL
Report Number: 2407X35401E-RF-01	
Report Date: 2025-06-11	
Reviewed By: Reviewed By:	Ash Lin
Approved By: Approved By:	Miles Chen
Prepared By: Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
TEST METHODOLOGY	5
TEST FACILITY.....	5
MEASUREMENT UNCERTAINTY.....	6
SYSTEM TEST CONFIGURATION.....	7
TEST MODE AND VOLTAGE.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
★EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	11
TEST EQUIPMENT LIST	12
FCC §15.203 & RSS-Gen Clause 6.8 - ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) & RSS-Gen Clause 8.8 – AC LINE CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
RESULT & MARGIN CALCULATION.....	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) & RSS-247 ISSUE 3 Clause 5.5, RSS-GEN ISSUE5 CLAUSE 8.10 - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
RESULT & MARGIN CALCULATION.....	20
TEST DATA	21
FCC §15.247(a) (2) & RSS-247 ISSUE 3 Clause 5.2 a) - 6 dB EMISSION BANDWIDTH	44
APPLICABLE STANDARD	44
EUT SETUP	44
TEST PROCEDURE	44
TEST DATA	44
RSS-GEN ISSUE 5 Clause 6.7 – 99% OCCUPIED BANDWIDTH	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	48
FCC §15.247(b) (3) & RSS-247 ISSUE 3 Clause 5.4 d) – MAXIMUM CONDUCTED OUTPUT POWER	50

APPLICABLE STANDARD	50
EUT SETUP	50
TEST PROCEDURE	50
TEST DATA	51
FCC §15.247(d) & RSS-247 ISSUE 3 Clause 5.5- 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE..	53
APPLICABLE STANDARD	53
EUT SETUP	53
TEST PROCEDURE	53
TEST DATA	54
FCC §15.247(e) & RSS-247 ISSUE 3 CLAUSE5.2 b) - POWER SPECTRAL DENSITY.....	56
APPLICABLE STANDARD	56
EUT SETUP	56
TEST PROCEDURE	56
TEST DATA	57
EUT PHOTOGRAPHS.....	59
TEST SETUP PHOTOGRAPHS	60

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2407X35401E-RF-01	R1V1	2025-06-11	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	FCC: FUJIAN YESOUL HEALTH TECHNOLOGY CO.,LTD IC: Fujian YESOUL Health Technology Co., Ltd.
Product Name:	YESOUL TREADMILL
Tested Model:	YS-TT1MPLUS
HVIN:	YS-TT1MPLUS
Power Supply:	AC 100-240V, 50/60Hz
Maximum Peak Conducted Output Power:	-0.15 dBm
Frequency Range:	2402~2480MHz
Modulation Technique:	GFSK
Antenna Type:	PCB Antenna
★Maximum Antenna Gain:	3.71 dBi
EUT Received Status:	Good

Note:

1. The Maximum Antenna Gain was declared by manufacturer.
2. All measurement and test data in this report was gathered from production sample serial number: 2RG3-2 (Assigned by the BACL (Xiamen). The EUT supplied by the applicant was received on 2024-09-09)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance v05r02 & RSS-247 Issue 3, August 2023 and RSS-Gen, Issue 5, February 2021 Amendment 2 of the Innovation, Science and Economic Development Canada.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the IC accredited lab under the KDB 974614 D01, the IC Designation No. : CN0176.

Measurement Uncertainty

Item	U_{lab}
Conducted Emission	
150kHz-30MHz	2.33 dB
9kHz-150kHz	2.82dB
150kHz-30MHz	2.74dB
30MHz~200MHz	3.47 dB
Radiated Emission	
200MHz~1GHz	4.86 dB
1GHz~6GHz	4.6 dB
6GHz-18GHz	5.42 dB
18GHz~26.5GHz	5.47 dB
Occupied Channel Bandwidth	0.053 kHz
Transmitter Conducted Power(Conducted RF power)	0.624 dB
Conducted Spurious Emission	2.52 dB
Power Spectral Density	0.61 dB
Duty Cycle	1 %
Temperature	1 °C
Humidity	5 %
Supply voltages	0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Test mode 1: Transmitting
Test voltage:	Test mode 1: AC 120V/60Hz
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

★EUT Exercise Software

RF Test Tool: EspRFTestTool_v3.6_Manual.exe


Mode	Power level		
	Low channel	Middle channel	High channel
BLE 1Mbps	3	3	3

Duty Cycle

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-06-10	Test Voltage:	AC 120V/60Hz
Test Result:	Compliance	Environment:	Temp.: 24.6°C Humi.: 58% Atm :100.2kPa

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	1/Ton (Hz)	VBW Setting (kHz)
BLE	2440	2.092	2.502	83.61	478	0.50

Middle Channel

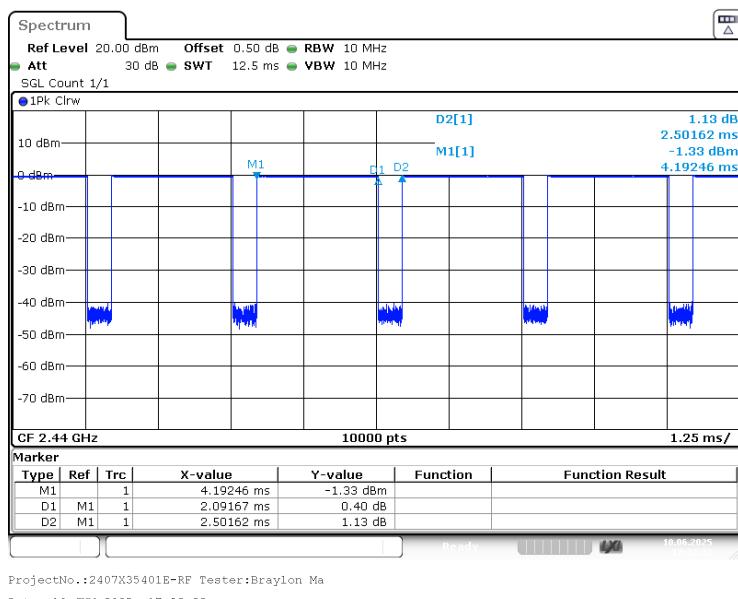

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Apple	phone	MLDU3CH/A	KY4D4MP4YC
YESOUL	sound equipment	BT-2020:06.26.0012	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	1	phone	EUT
3.5mm audio cable	0.5	sound equipment	EUT
USB Cable	0.5	sound equipment	EUT


Block Diagram of Test Setup

Conducted Emission:

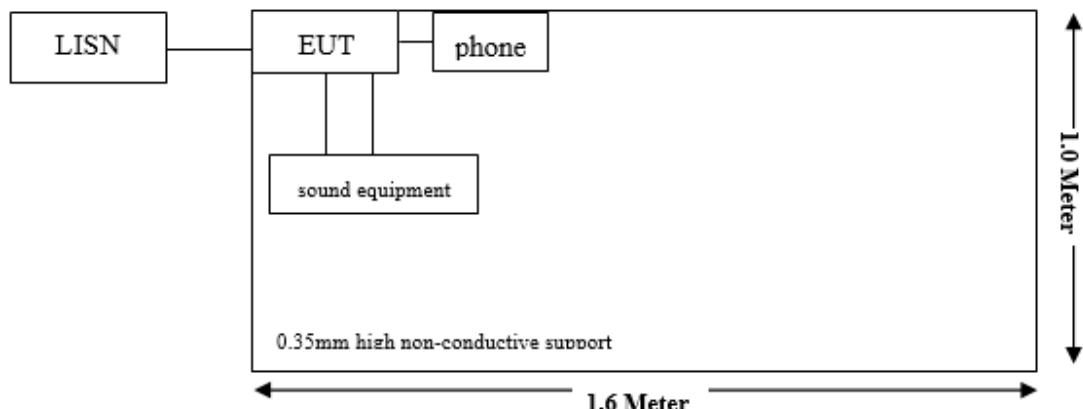


Radiated Emission:

Below 1GHz:

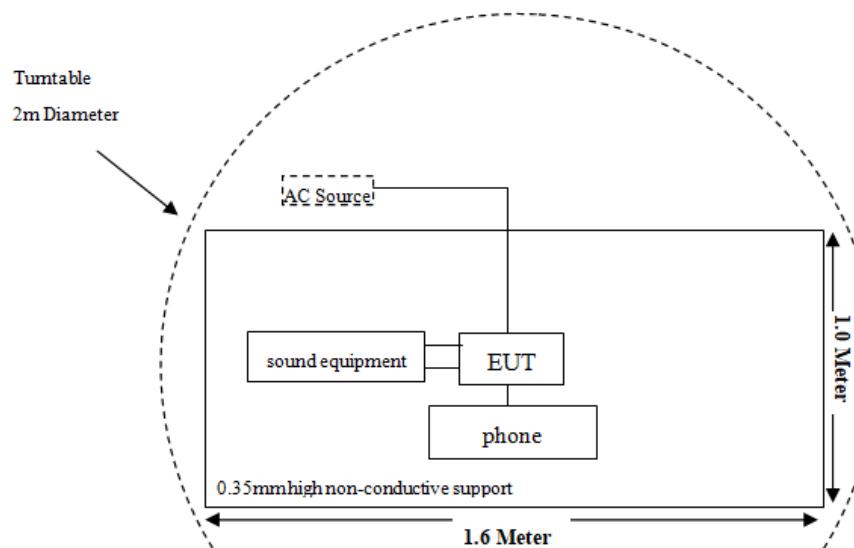

Above 1GHz:

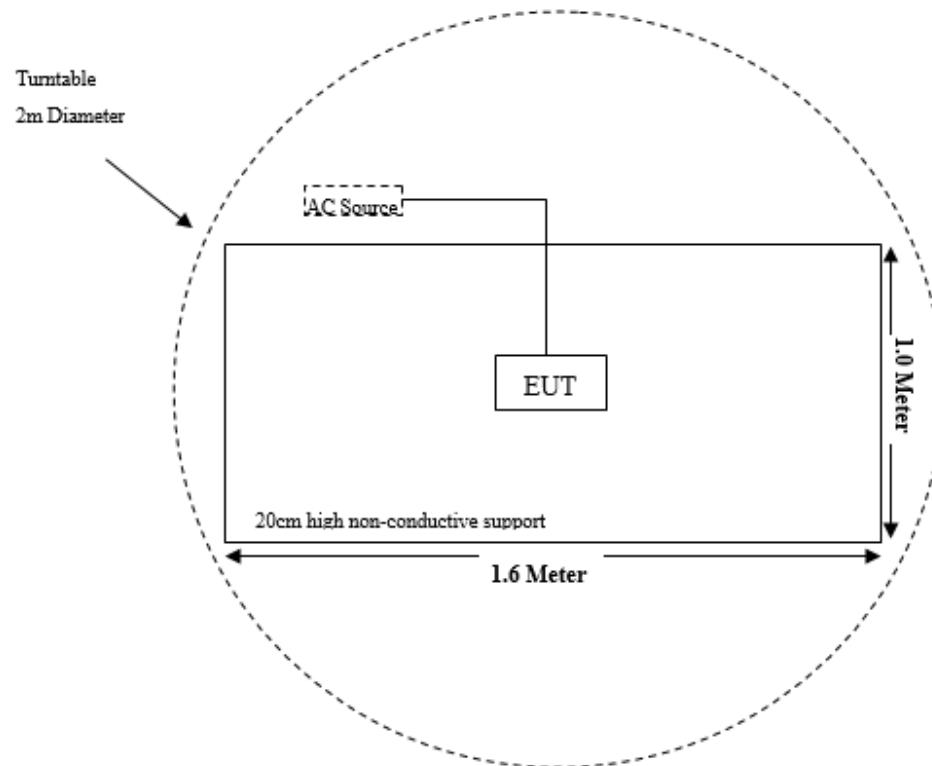

Note: Antenna is 1.5m above ground.

RF Conduction:



Note: The cable assembly insertion loss of 0.5dB was entered as an offset in the spectrum analyzer.(Actual cable loss was unavailable at the time of testing, therefore loss of 0.5dB was assumed as worst case.) This was later verified to be true by laboratory.

SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
FCC §15.203 RSS-Gen Issue 5Clause 6.8	Antenna Requirement	Compliance
FCC §15.207 (a) RSS-Gen Issue 5Clause 8.8	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.247(d) RSS-247 Issue 3 Clause 5.5 RSS-Gen Issue 5Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(2) RSS-247 Clause 5.2 a)	6 dB Emission Bandwidth	Compliance
RSS-Gen Issue 5Clause 6.7	99% Occupied Bandwidth	Compliance
FCC §15.247(b)(3) RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliance
FCC §15.247(d) RSS-247 Clause 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247(e) RSS-247 Clause 5.2 b)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR	103105	2024/03/29	2025/03/28
LISN	Rohde & Schwarz	ENV216	100129	2024/03/29	2025/03/28
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2025/02/20	2026/02/19
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2025/02/20	2026/02/19
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2025/02/20	2026/02/19
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2025/02/21	2026/02/20
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2025/02/21	2026/02/20
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Preamplifier	GLOBAL	1313-A100M18G	4121301	2025/01/16	2026/01/15
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2025/02/20	2026/02/19
Horn Antenna	EMCO	3116	9407-2232	2023/07/31	2026/07/30
Preamplifier	A.H.Systems	PAM-1840	200	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2025/02/20	2026/02/19
Test Software	Audix	E3	18621a	N/A	N/A
RF Conducted Test					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2025/02/20	2026/02/19
Coaxial Cable	Lianxun	RF113	N/A	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 & RSS-Gen Clause 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-Gen Clause 6.8 The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one PCB antenna arrangement for BLE, which was permanently attached and the antenna gain is 3.71 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance

FCC §15.207 (a) & RSS-Gen Clause 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207, RSS-Gen Clause 8.8

EUT Setup

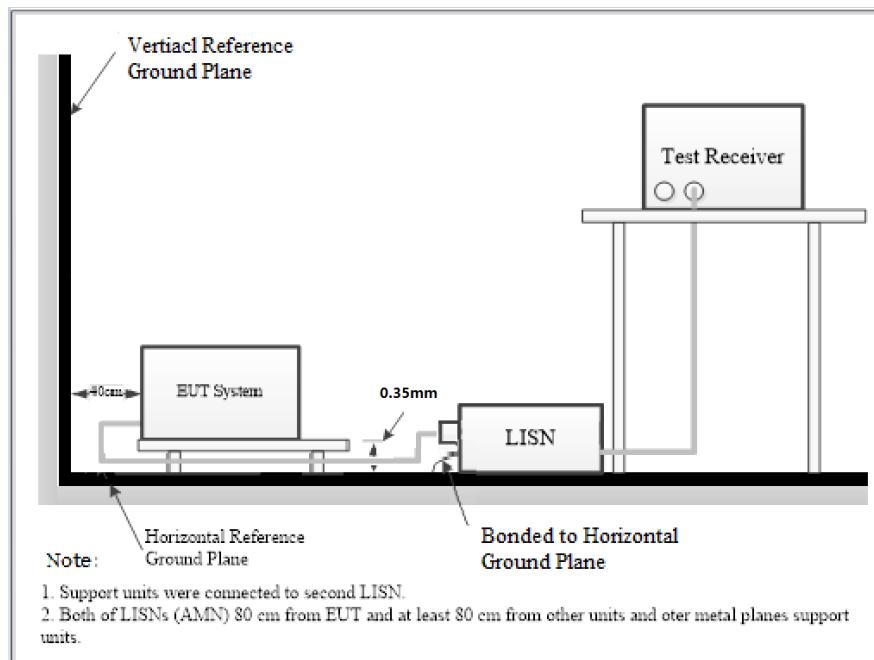

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207, RSS-Gen limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Result & Margin Calculation

The result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Result (dB}\mu\text{V)} &= \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$


Test Data

Temperature:	21.2 °C
Relative Humidity:	47 %
ATM Pressure:	100.1 kPa
Test Date:	2025-01-25
Test Engineer:	Spike Gao

Note: The maximum output power mode: BLE 1M high channel was tested.

Project No.: 2507X35401E-RF
Test Mode: 1M 2480
EUT Model: YS-TT1MPLUS


Temp/Humi/ATM: 21.2°C/47%/100.1kPa
Tested by: Spike Gao
Power Source: AC 120V/60Hz

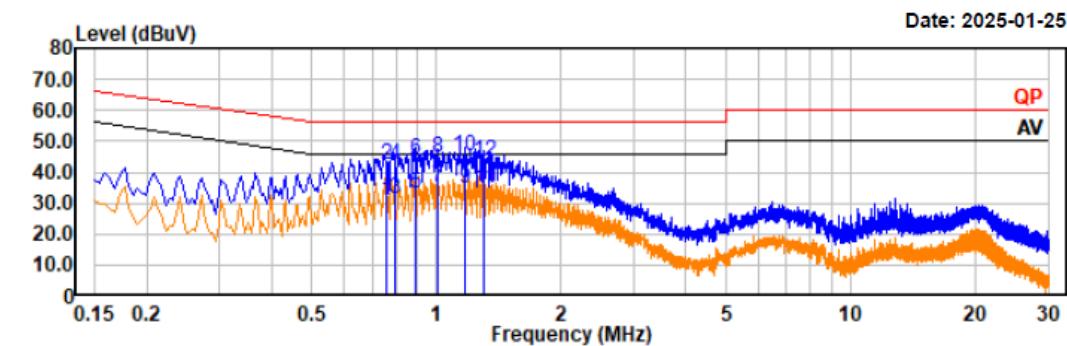

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.76	10.52	20.60	31.12	46.00	14.88	Line	Average
0.76	21.74	20.60	42.34	56.00	13.66	Line	QP
0.79	10.91	20.65	31.56	46.00	14.44	Line	Average
0.79	21.84	20.65	42.49	56.00	13.51	Line	QP
0.89	12.41	20.78	33.19	46.00	12.81	Line	Average
0.89	23.23	20.78	44.01	56.00	11.99	Line	QP
1.01	14.18	20.92	35.10	46.00	10.90	Line	Average
1.01	24.00	20.92	44.92	56.00	11.08	Line	QP
1.17	13.99	20.96	34.95	46.00	11.05	Line	Average
1.17	24.13	20.96	45.09	56.00	10.91	Line	QP
1.30	13.63	21.00	34.63	46.00	11.37	Line	Average
1.30	22.86	21.00	43.86	56.00	12.14	Line	QP

Project No.: 2507X35401E-RF
Test Mode: 1M 2480
EUT Model: YS-TT1MPLUS



Temp/Humi/ATM: 21.2°C /47%/100.1kPa
Tested by: Spike Gao
Power Source: AC 120V/60Hz

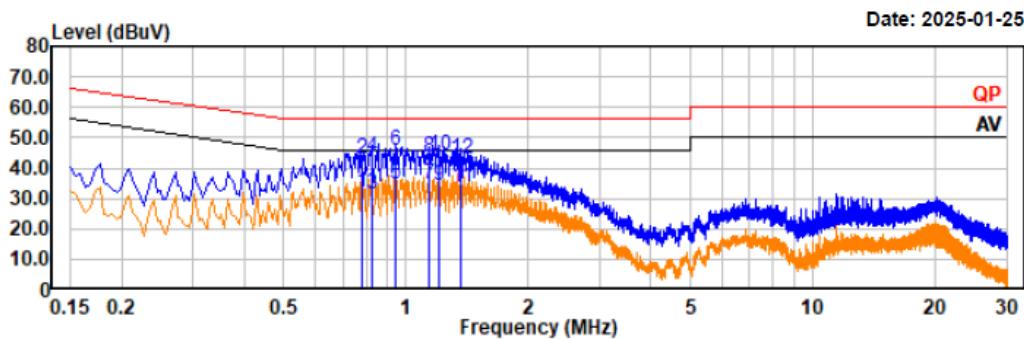


Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.78	11.42	20.48	31.90	46.00	14.10	Neutral	Average
0.78	22.54	20.48	43.02	56.00	12.98	Neutral	QP
0.83	10.74	20.59	31.33	46.00	14.67	Neutral	Average
0.83	22.99	20.59	43.58	56.00	12.42	Neutral	QP
0.94	14.08	20.82	34.90	46.00	11.10	Neutral	Average
0.94	24.71	20.82	45.53	56.00	10.47	Neutral	QP
1.14	13.72	20.94	34.66	46.00	11.34	Neutral	Average
1.14	22.85	20.94	43.79	56.00	12.21	Neutral	QP
1.21	13.52	20.95	34.47	46.00	11.53	Neutral	Average
1.21	22.96	20.95	43.91	56.00	12.09	Neutral	QP
1.37	12.86	20.97	33.83	46.00	12.17	Neutral	Average
1.37	22.06	20.97	43.03	56.00	12.97	Neutral	QP

**FCC §15.209, §15.205 & §15.247(d) & RSS-247 ISSUE 3 Clause 5.5, RSS-GEN
ISSUE5 CLAUSE 8.10 - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205; RSS-247 Issue 3 Clause 5.5; RSS-Gen Issue5 Clause 8.10

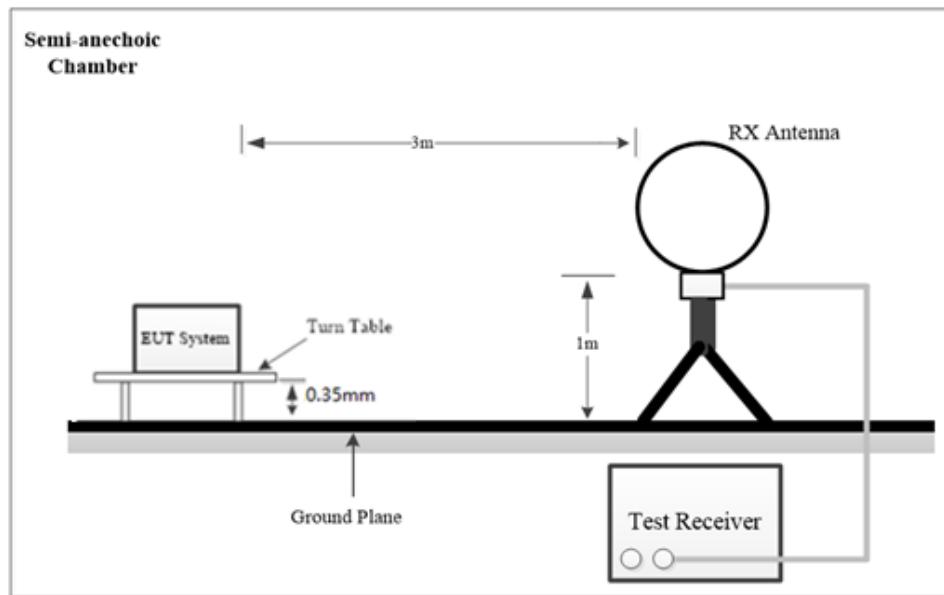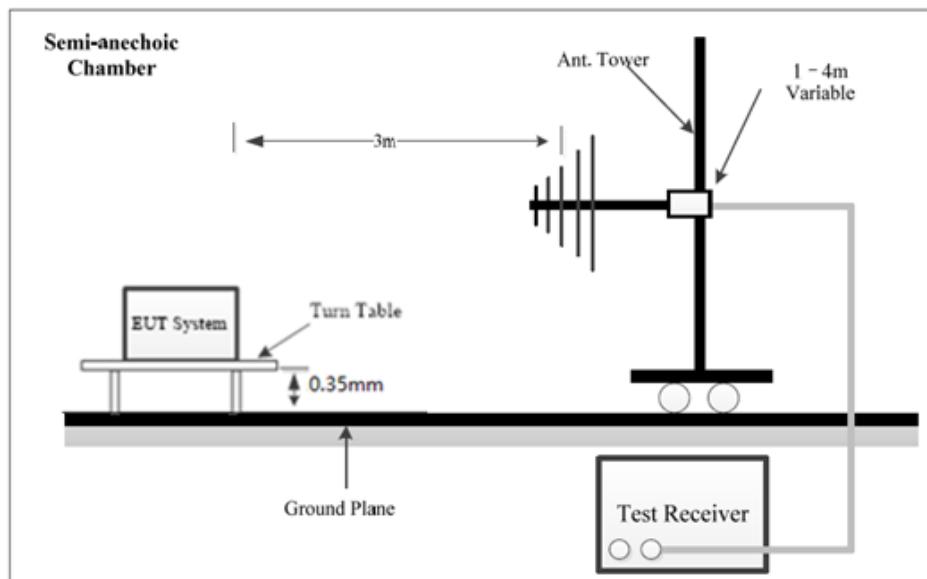EUT Setup**9 kHz-30MHz:****30MHz -1 GHz:**

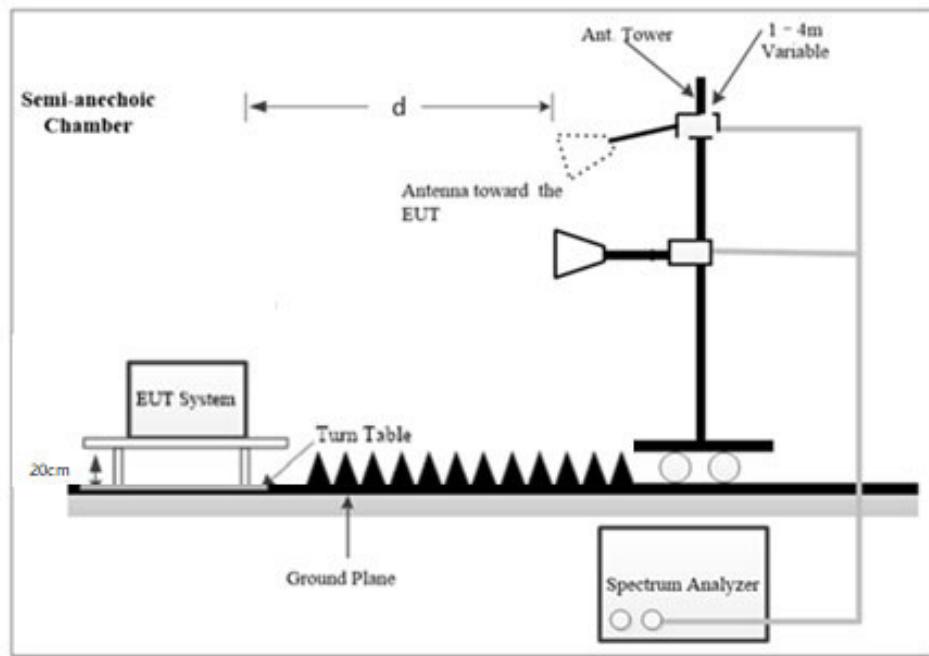Above 1GHz:

The radiated emission tests using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

NOTE: d is testing distance;

For Radiated Emission test (1GHz-18GHz) and Bandedge Emission test, which was performed at 3 m distance.

For Radiated Emission test (18GHz-25GHz), which was performed at 1.5 m distance, according to ANSI C63.10-2013, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m.

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6 dB

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Below 1GHz:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz – 150 kHz	300Hz	1 kHz	/	PK
	/	/	200Hz	QP
150 kHz – 30 MHz	10 kHz	30 kHz	/	PK
	/	/	9kHz	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120kHz	QP

Above 1GHz:

Pre-scan:

Duty Cycle	RBW	VBW	Measurement	Detector
Any	1MHz	3MHz	PK	PK
>98%	1MHz	5kHz	AV	PK
<98%	1MHz	1/T, not less than 5kHz	AV	PK

Final measurement for emission identified during the pre-scan:

Duty Cycle	RBW	VBW	Measurement	Detector
Any	1MHz	3MHz	PK	PK
>98%	1MHz	10Hz	AV	PK
<98%	1MHz	1/T	AV	PK

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground parallel) unless the margin is greater than 20 dB, then the following statement shall be made: "all emissions were greater than 20 dB below the limit."

Below 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Above 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is below the AV emission limit, there's no need to record the measured AV level of the emissions in the report.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

For 9 kHz to 18GHz Radiated emission test

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

For 18GHz to 25GHz Radiated emission test and Bandedge emissions test

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB) - Extrapolation factor (dB)

Extrapolation factor=6dB (distance=1.5m)

Result (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) - Result (dB μ V/m)

The spurious emission from 9 kHz-30MHz of IC RSS-Gen standard, the unit of final result on the test plots are dB μ V/m, so the limit should be added by 51.5dB from dB μ A/m to dB μ V/m.

Test Data

Please refer to the below table and plots.


Frequency Range:	Below 1 GHz	Above 1 GHz
Temperature:	23.8°C	21.3°C
Relative Humidity:	48%	54 %
ATM Pressure:	100.1kPa	100.1kPa
Test Date:	2025-04-03	2025-06-11
Test Engineer:	Wlif Wu	Wlif Wu

1) 9 kHz~30MHz

Note: The maximum output power mode: BLE 1M high channel was tested.

Project No.: 2407X35401E-RF
Test Mode: 1M-2480
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 23.8°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

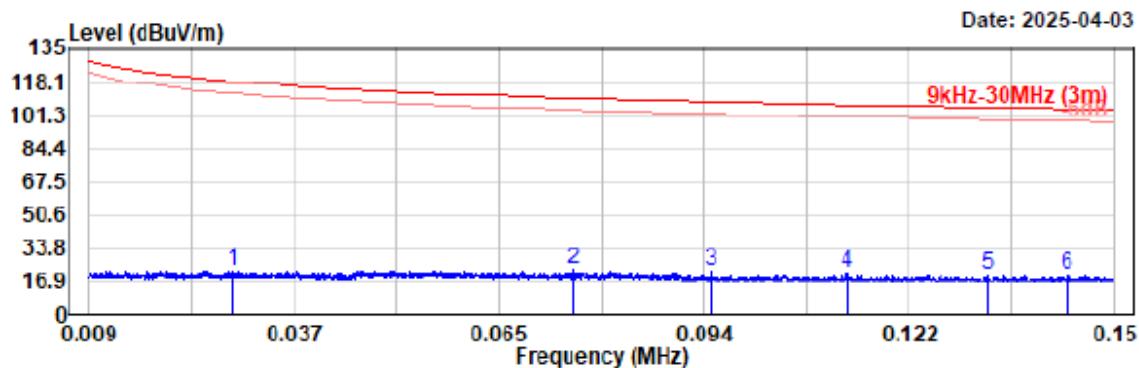


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dB _{UV}	Factor dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Remark
0.029	2.51	19.90	22.41	118.37	95.96	Peak
0.076	3.79	19.75	23.54	110.04	86.50	Peak
0.095	2.24	19.77	22.01	108.10	86.09	Peak
0.113	1.74	19.73	21.47	106.52	85.05	Peak
0.133	1.05	19.73	20.78	105.16	84.38	Peak
0.144	0.63	19.73	20.36	104.46	84.10	Peak

Project No.: 2407X35401E-RF
Test Mode: 1M-2480
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 23.8°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

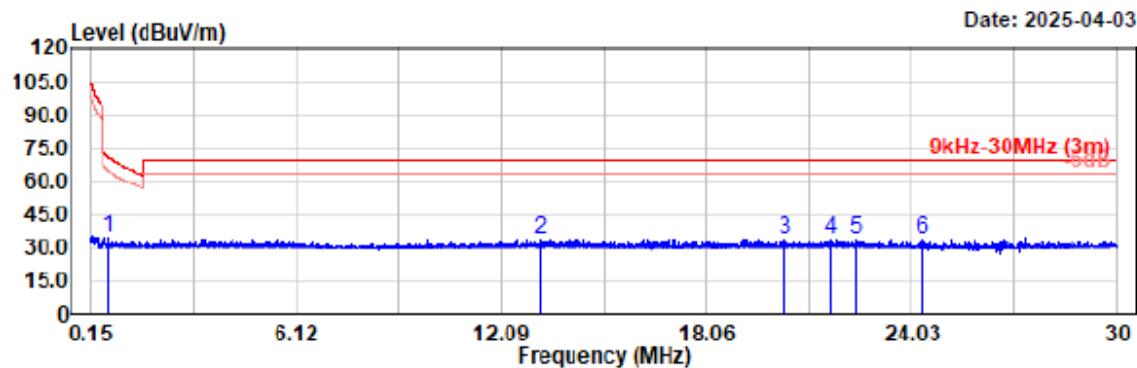

Condition: PK RBW:10KHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.687	14.98	19.85	34.83	70.86	36.03	Peak
13.239	14.54	19.74	34.28	69.58	35.30	Peak
20.314	14.06	20.10	34.16	69.58	35.42	Peak
21.666	14.06	20.13	34.19	69.58	35.39	Peak
22.433	14.00	20.15	34.15	69.58	35.43	Peak
24.343	13.49	20.21	33.70	69.58	35.88	Peak


Note: $dBuV/m = dBuA/m + 51.5dB$

2) 30MHz -1GHz

Note: The maximum output power mode: BLE 1M high channel was tested.

Project No.: 2407X35401E-RF
Test Mode: 1M 2480
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 23.8°C/48%/100.1kPa
Tested by: Zane Zhang
Power Source: AC120V/60Hz

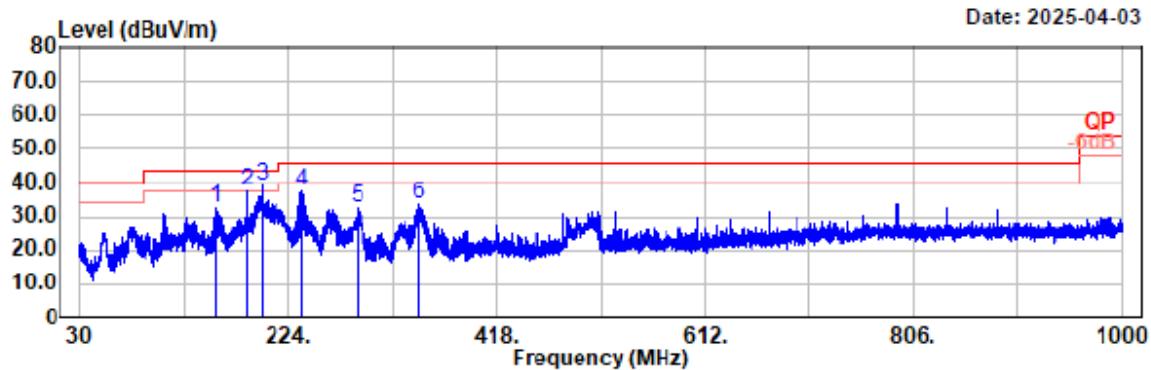


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
156.68	44.06	-11.43	32.63	43.50	10.87	Horizontal	Peak
186.07	49.94	-12.53	37.41	43.50	6.09	Horizontal	QP
200.53	50.76	-11.75	39.01	43.50	4.49	Horizontal	QP
236.42	49.36	-11.94	37.42	46.00	8.58	Horizontal	Peak
288.02	42.07	-9.25	32.82	46.00	13.18	Horizontal	Peak
346.03	41.82	-8.19	33.63	46.00	12.37	Horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: 1M 2480
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 23.8°C/48%/100.1kPa
Tested by: Zane Zhang
Power Source: AC120V/60Hz

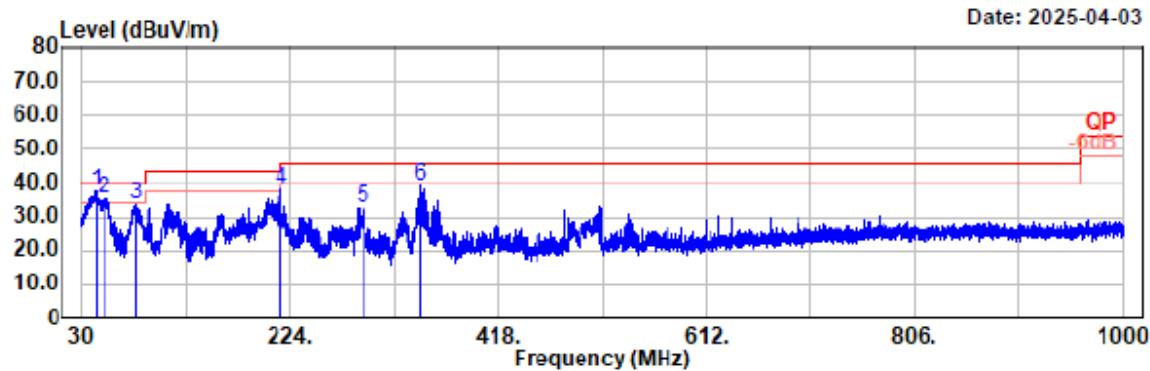


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
42.80	51.39	-13.74	37.65	40.00	2.35	Vertical	QP
50.27	52.83	-17.38	35.45	40.00	4.55	Vertical	QP
79.57	50.56	-17.04	33.52	40.00	6.48	Vertical	QP
216.24	50.48	-12.68	37.80	46.00	8.20	Vertical	Peak
292.77	41.95	-9.28	32.67	46.00	13.33	Vertical	Peak
345.25	47.27	-8.22	39.05	46.00	6.95	Vertical	QP

3) 1GHz~3GHz

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

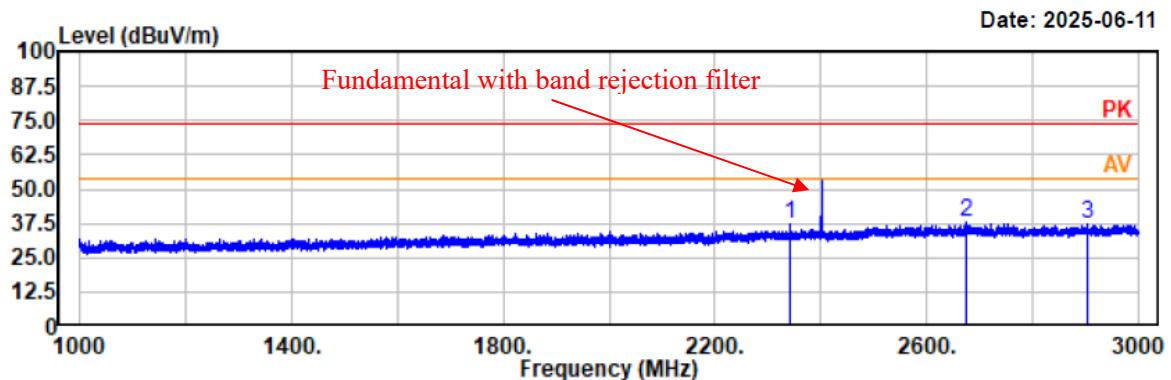


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2340.80	48.67	-11.34	37.33	74.00	36.67	horizontal	Peak
2675.80	47.77	-10.11	37.66	74.00	36.34	horizontal	Peak
2903.40	46.88	-9.53	37.35	74.00	36.65	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

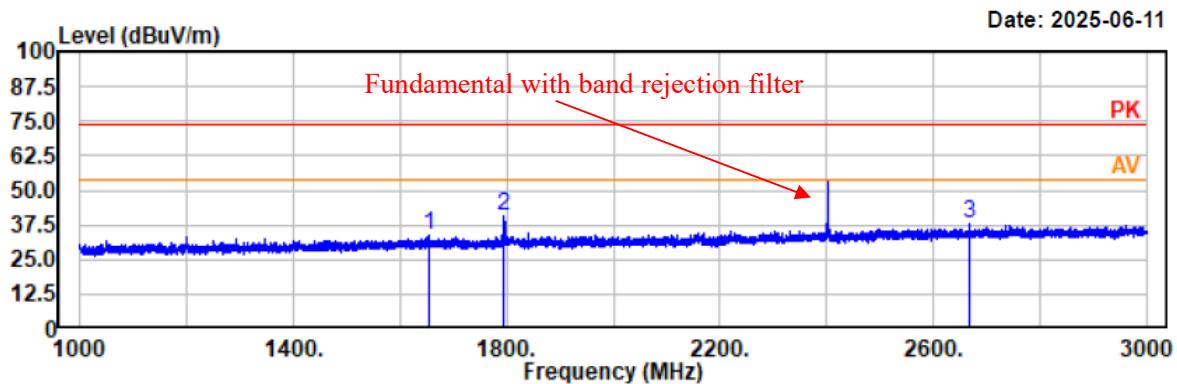


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1653.40	47.38	-13.80	33.58	74.00	40.42	vertical	Peak
1794.00	53.83	-13.25	40.58	74.00	33.42	vertical	Peak
2668.60	47.85	-10.13	37.72	74.00	36.28	vertical	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3 °C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

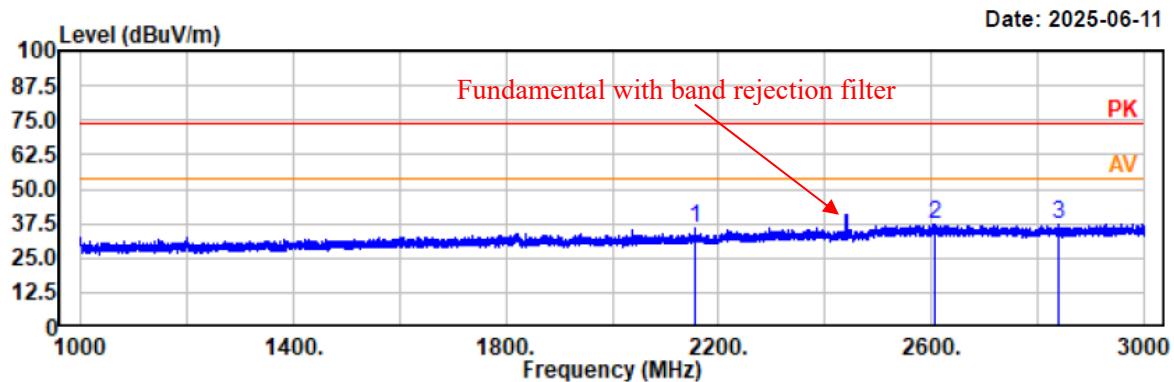


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2155.80	47.95	-12.11	35.84	74.00	38.16	horizontal	Peak
2607.80	47.85	-10.36	37.49	74.00	36.51	horizontal	Peak
2840.60	46.61	-9.65	36.96	74.00	37.04	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3 °C / 54% / 100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

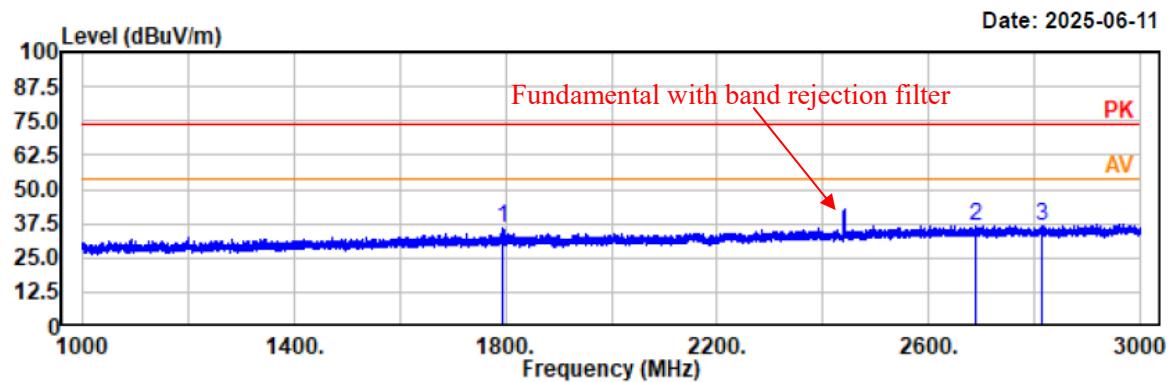


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1793.60	48.82	-13.25	35.57	74.00	38.43	vertical	Peak
2687.80	46.80	-10.05	36.75	74.00	37.25	vertical	Peak
2813.00	46.32	-9.75	36.57	74.00	37.43	vertical	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

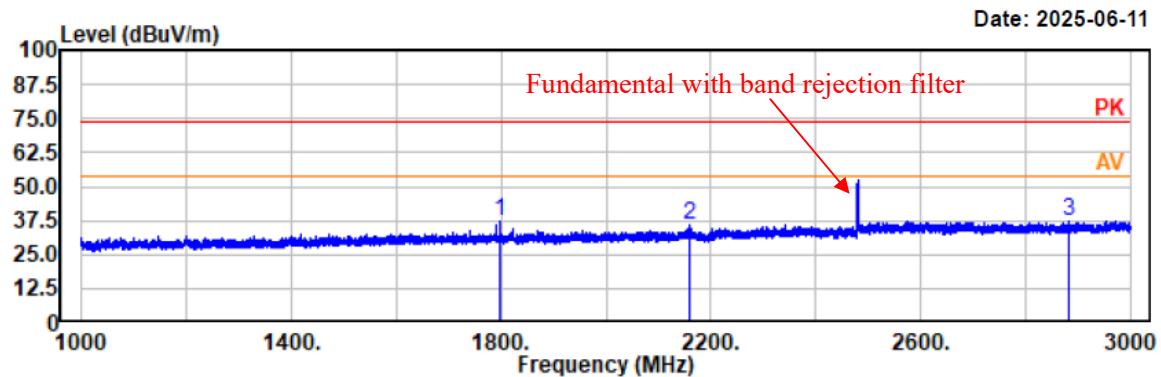


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1797.20	50.14	-13.24	36.90	74.00	37.10	horizontal	Peak
2160.20	47.66	-12.10	35.56	74.00	38.44	horizontal	Peak
2884.00	46.59	-9.58	37.01	74.00	36.99	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

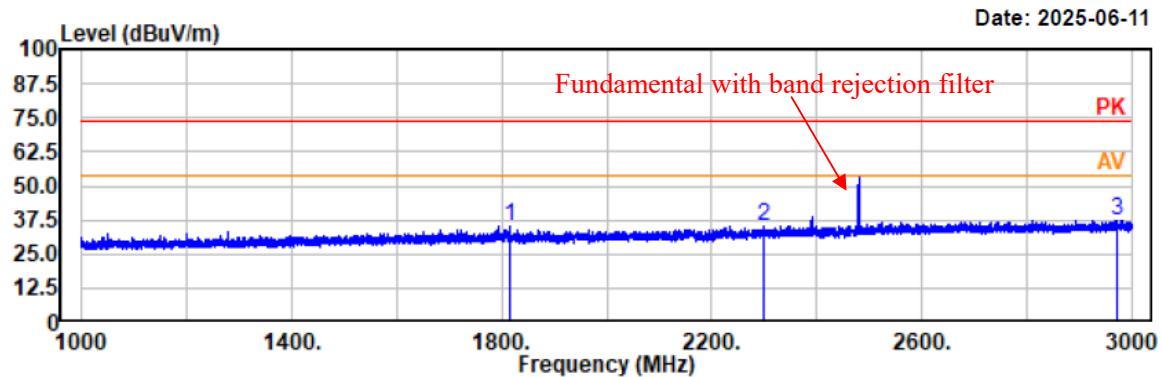


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1814.60	48.47	-13.18	35.29	74.00	38.71	vertical	Peak
2298.20	46.66	-11.43	35.23	74.00	38.77	vertical	Peak
2971.40	46.58	-9.09	37.49	74.00	36.51	vertical	Peak

4) 3GHz~18GHz

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

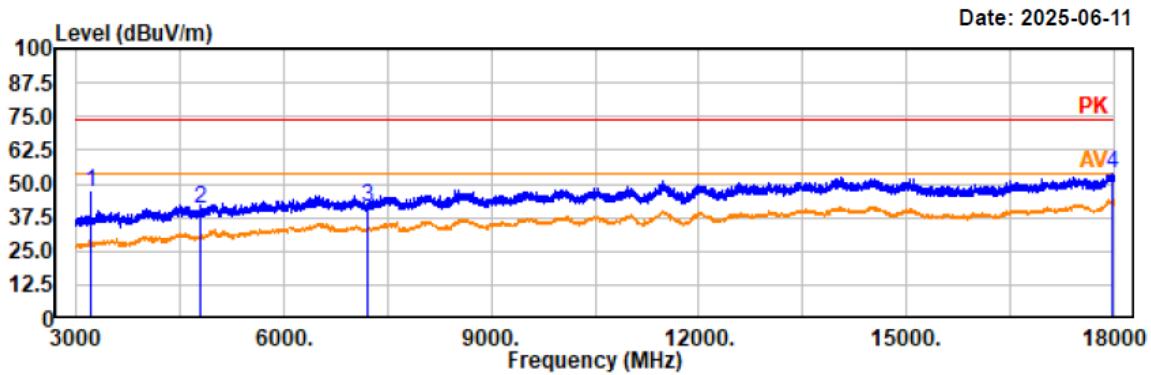


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3202.50	55.12	-8.38	46.74	74.00	27.26	horizontal	Peak
4804.00	45.85	-5.24	40.61	74.00	33.39	horizontal	Peak
7206.00	43.89	-2.55	41.34	74.00	32.66	horizontal	Peak
17989.50	46.81	6.90	53.71	74.00	20.29	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

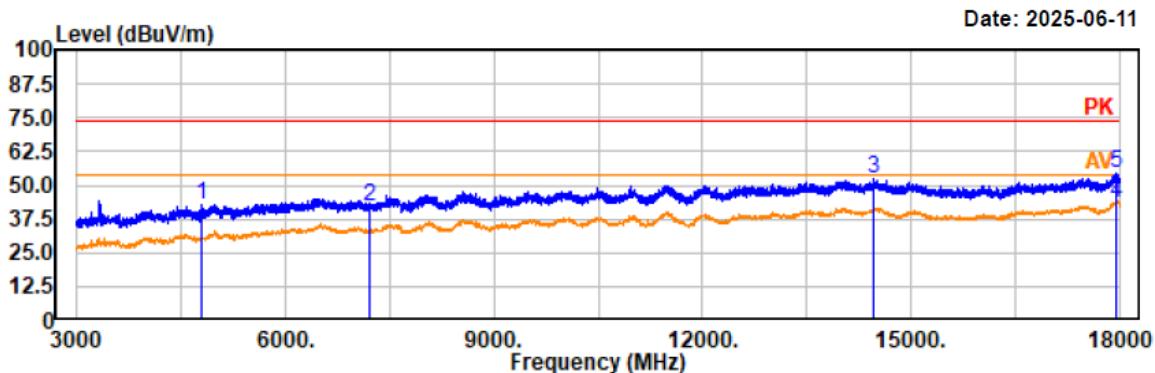


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	48.18	-5.24	42.94	74.00	31.06	vertical	Peak
7206.00	44.87	-2.55	42.32	74.00	31.68	vertical	Peak
14452.50	47.29	5.15	52.44	74.00	21.56	vertical	Peak
17952.00	36.49	6.86	43.35	54.00	10.65	vertical	Average
17952.00	47.61	6.86	54.47	74.00	19.53	vertical	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

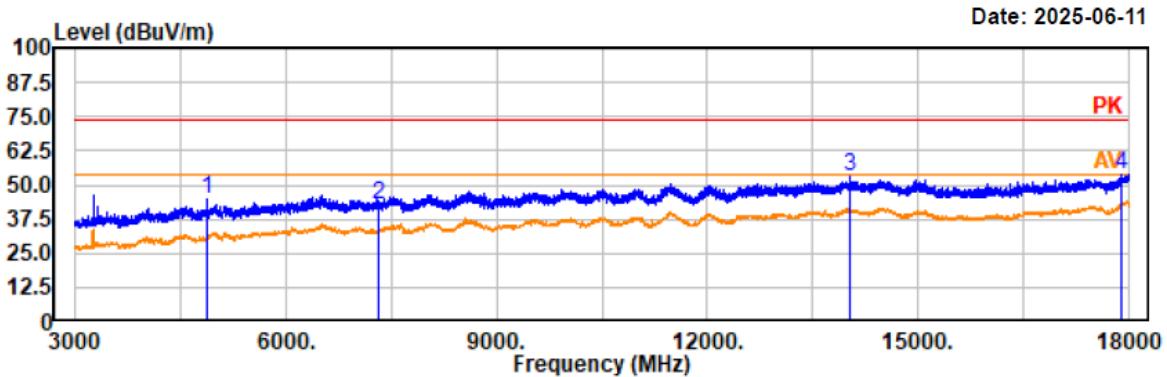


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4879.50	49.99	-5.30	44.69	74.00	29.31	horizontal	Peak
7320.00	44.85	-2.25	42.60	74.00	31.40	horizontal	Peak
14037.00	48.10	5.25	53.35	74.00	20.65	horizontal	Peak
17887.50	46.97	6.76	53.73	74.00	20.27	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

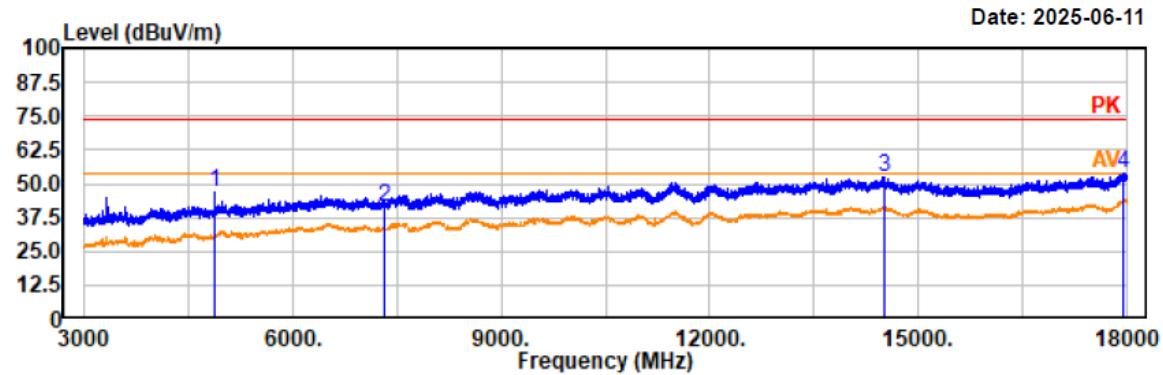


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	52.06	-5.30	46.76	74.00	27.24	vertical	Peak
7320.00	43.32	-2.25	41.07	74.00	32.93	vertical	Peak
14523.00	47.13	5.06	52.19	74.00	21.81	vertical	Peak
17959.50	47.11	6.86	53.97	74.00	20.03	vertical	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

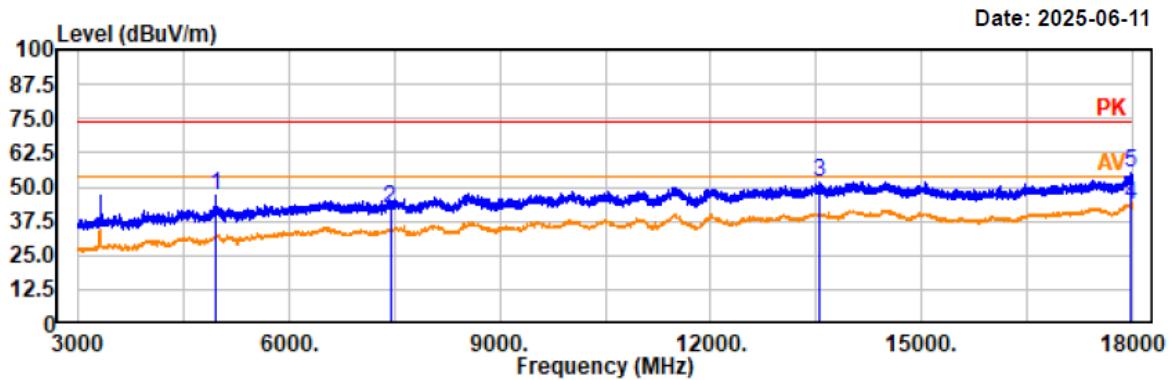


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	52.10	-5.11	46.99	74.00	27.01	horizontal	Peak
7440.00	44.10	-2.03	42.07	74.00	31.93	horizontal	Peak
13539.00	47.10	4.67	51.77	74.00	22.23	horizontal	Peak
17982.00	36.80	6.89	43.69	54.00	10.31	horizontal	Average
17982.00	47.95	6.89	54.84	74.00	19.16	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

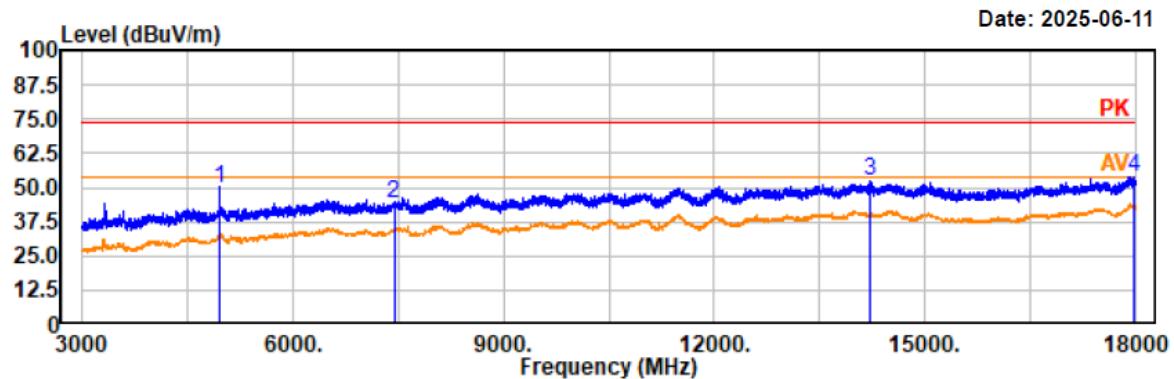

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	54.88	-5.11	49.77	74.00	24.23	vertical	Peak
7440.00	45.82	-2.03	43.79	74.00	30.21	vertical	Peak
14214.00	46.94	5.35	52.29	74.00	21.71	vertical	Peak
17989.50	46.81	6.90	53.71	74.00	20.29	vertical	Peak

5) 18GHz~25GHz

Note: The maximum output power mode: BLE 1M high channel was tested.

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 1.5m

Temp/Humi/ATM: 21.3 °C /54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

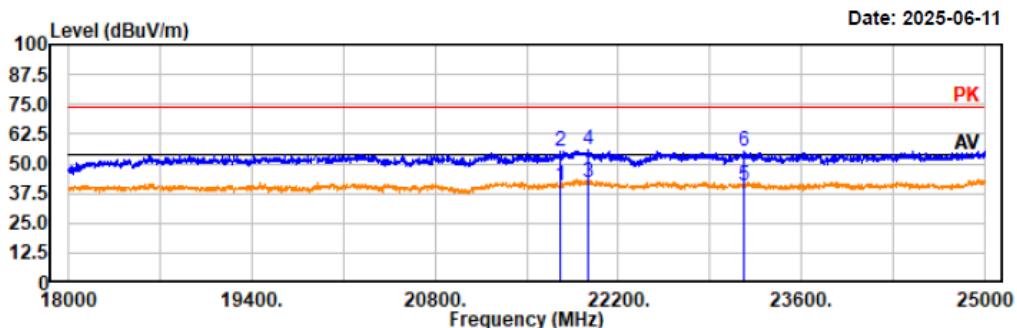


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21762.00	35.87	4.69	40.56	54.00	13.44	horizontal	Average
21762.00	50.61	4.69	55.30	74.00	18.70	horizontal	Peak
21971.00	36.84	5.22	42.06	54.00	11.94	horizontal	Average
21971.00	50.40	5.22	55.62	74.00	18.38	horizontal	Peak
23156.80	35.96	4.92	40.88	54.00	13.12	horizontal	Average
23156.80	49.98	4.92	54.90	74.00	19.10	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 1.5m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

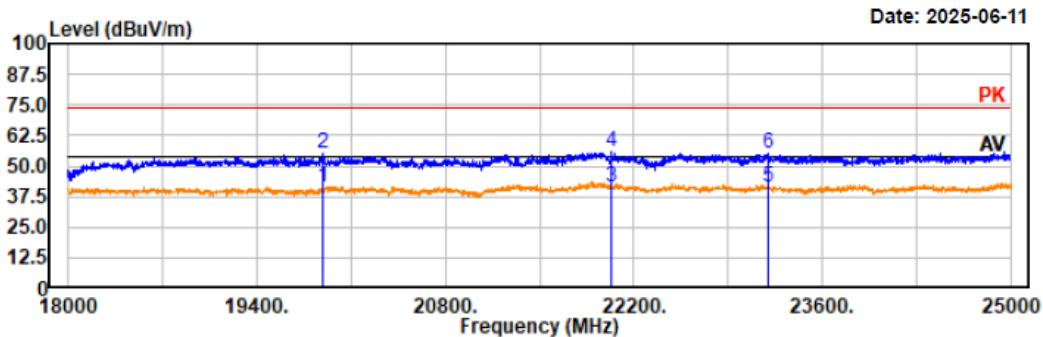


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19892.00	37.95	3.46	41.41	54.00	12.59	vertical	Average
19892.00	52.05	3.46	55.51	74.00	18.49	vertical	Peak
22030.40	36.51	5.17	41.68	54.00	12.32	vertical	Average
22030.40	50.36	5.17	55.53	74.00	18.47	vertical	Peak
23196.40	36.57	4.91	41.48	54.00	12.52	vertical	Average
23196.40	50.38	4.91	55.29	74.00	18.71	vertical	Peak

Restricted Bands Emissions:

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

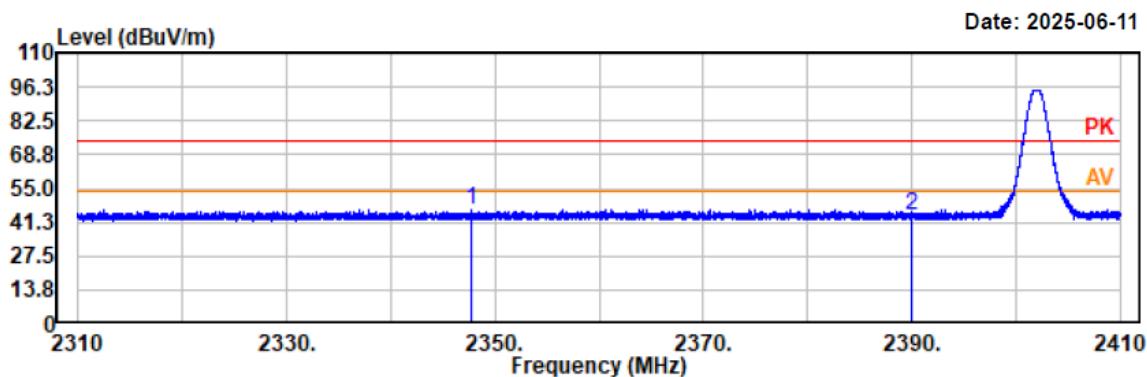


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2347.67	47.73	-1.32	46.41	74.00	27.59	horizontal	Peak
2390.00	44.94	-1.15	43.79	74.00	30.21	horizontal	Peak

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

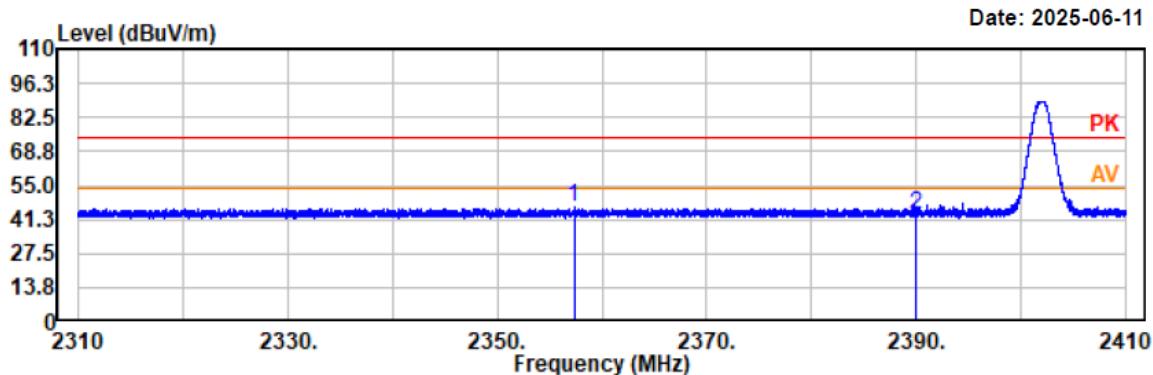


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2357.32	47.34	-1.29	46.05	74.00	27.95	vertical	Peak
2390.00	44.42	-1.15	43.27	74.00	30.73	vertical	Peak


Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

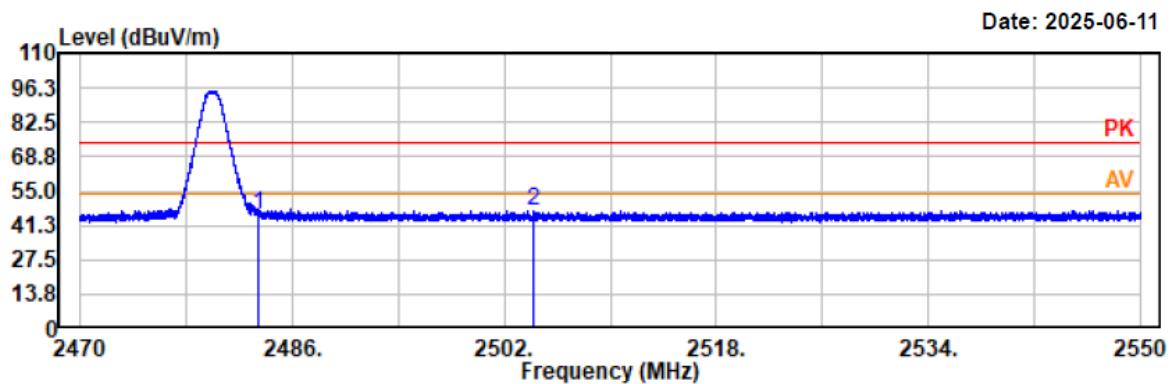

Project No.: 2407X35401E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: YS-TT1MPLUS
Test distance: 3m

Temp/Humi/ATM: 21.3°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

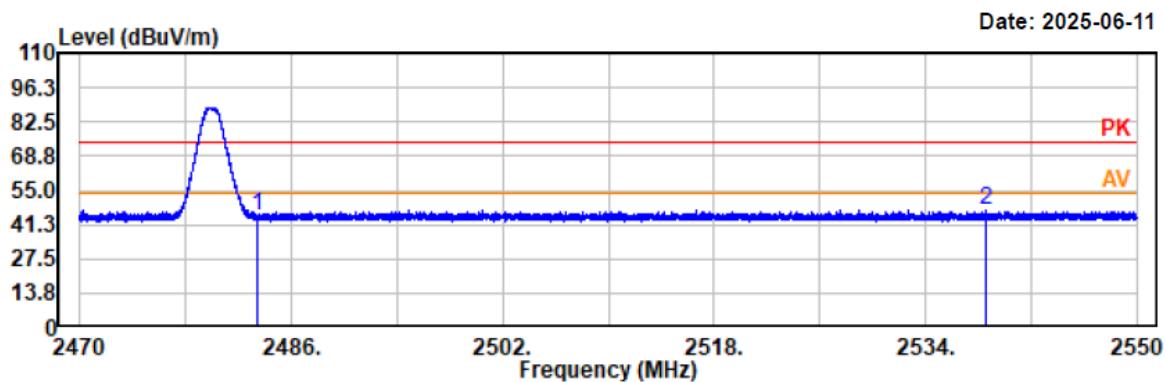

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	45.45	-0.77	44.68	74.00	29.32	vertical	Peak
2538.60	47.81	-0.61	47.20	74.00	26.80	vertical	Peak


FCC §15.247(a) (2) & RSS-247 ISSUE 3 Clause 5.2 a) - 6 dB EMISSION BANDWIDTH**Applicable Standard**

FCC§15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247 ISSUE 3 Clause 5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

EUT Setup**Test Procedure**


According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test Data

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-06-10	Test Voltage:	AC 120V/60Hz
Test Result:	Compliance	Environment:	Temp.: 24.6°C Humi.: 58% Atm :100.2kPa
Test Channel	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Lowest	2402	0.665	≥ 0.5
Middle	2440	0.649	≥ 0.5
Highest	2480	0.649	≥ 0.5


Low Channel

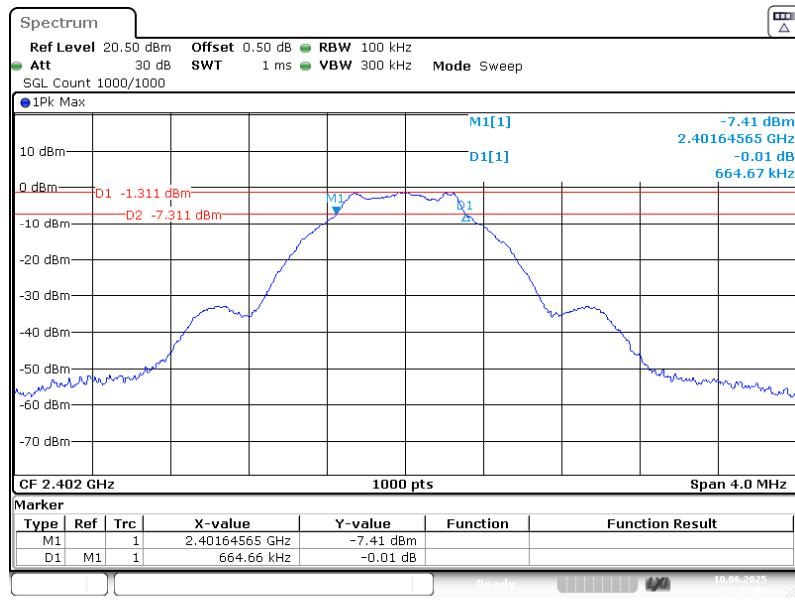

Middle Channel

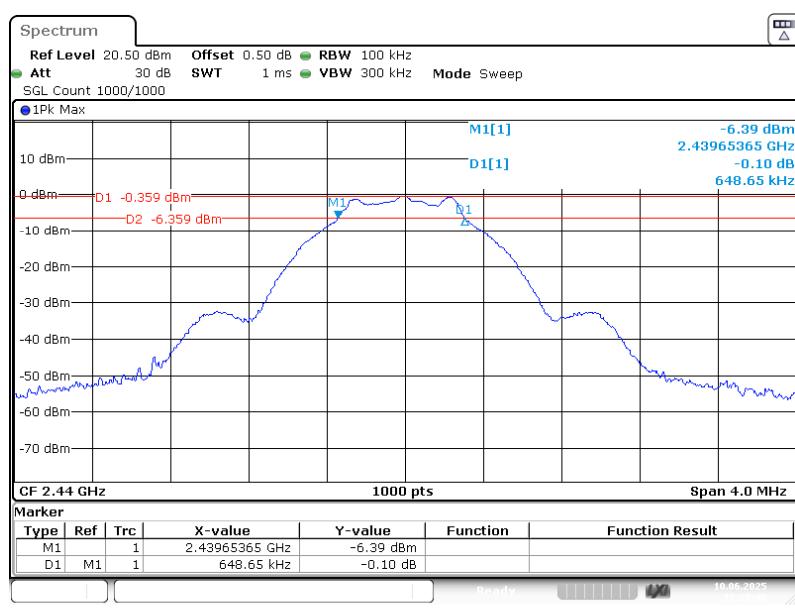

High Channel

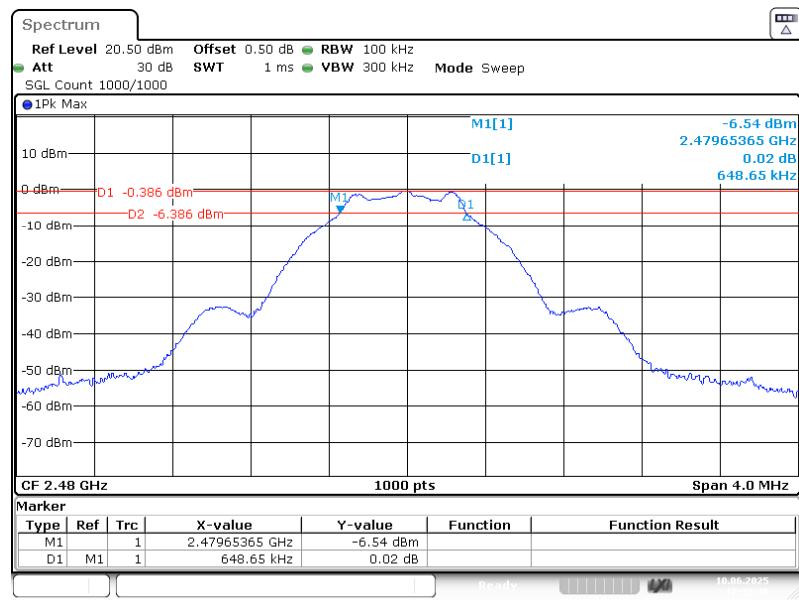


RSS-GEN ISSUE 5 Clause 6.7 – 99% OCCUPIED BANDWIDTH

Applicable Standard

According to RSS-GEN Issue 5 Clause 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

EUT Setup



Test Procedure


The following conditions shall be observed for measuring the occupied bandwidth:

1. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
2. The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
3. The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied if the device is not transmitting continuously.
4. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted. Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.


For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Data


Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-06-10	Test Voltage:	AC 120V/60Hz
Test Result:	Compliance	Environment:	Temp.: 24.6°C Humi.: 58% Atm :100.2kPa
Channel		Frequency (MHz)	99% Occupied Bandwidth (MHz)
BLE Mode(1Mbps)			
Low	2402	1.008	
Middle	2440	1.008	
High	2480	1.008	

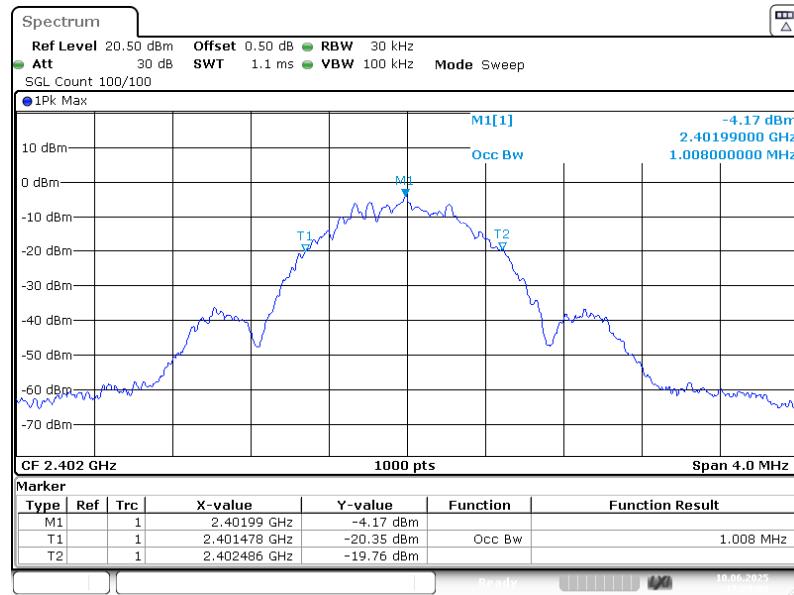Low Channel

Middle Channel

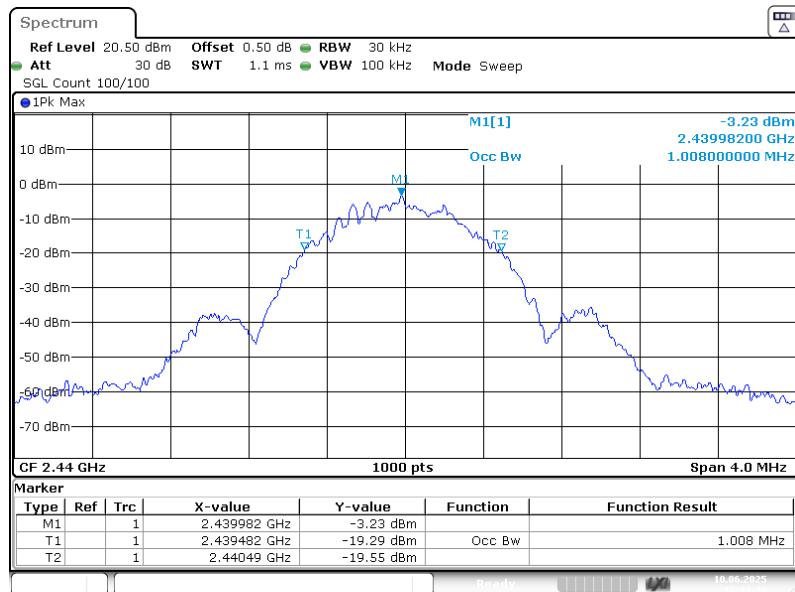

High Channel

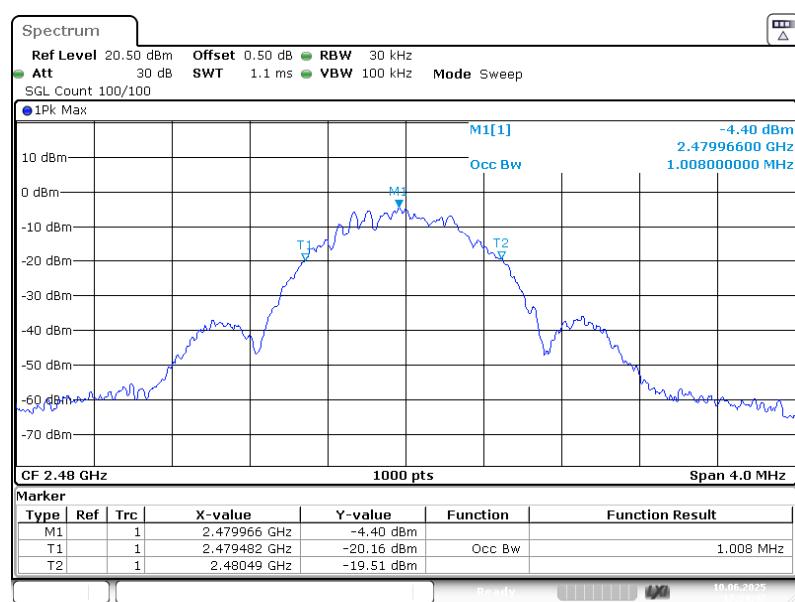

FCC §15.247(b) (3) & RSS-247 ISSUE 3 Clause 5.4 d) – MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247 Clause 5.4 d, for DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

EUT Setup



Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:


- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Test Data


Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-06-10	Test Voltage:	AC 120V/60Hz
Test Result:	Compliance	Environment:	Temp.: 24.6°C Humi.: 58% Atm :100.2kPa
Test Channel	Test Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
Lowest	2402	-0.6	≤30
Middle	2440	-0.15	≤30
Highest	2480	-0.15	≤30
Antenna gain(dBi):	3.71	Max.EIRP(dBm):	3.56
EIRP Limit for RSS-247:36 dBm			

Please refer to the below plots:


Lowest Channel

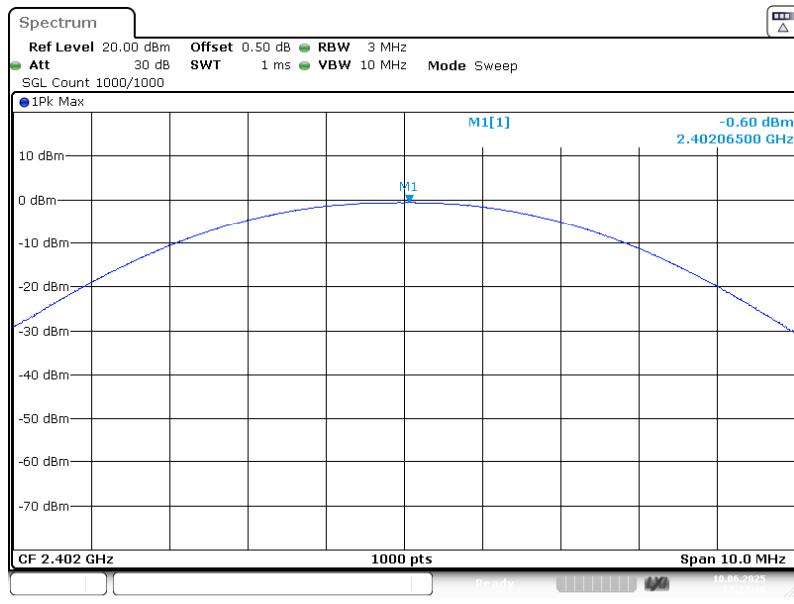

Middle Channel

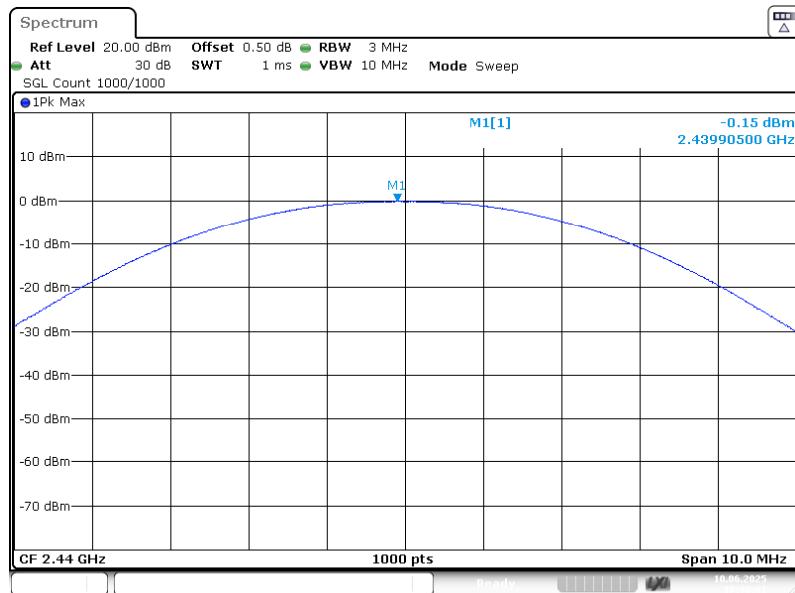

Highest Channel

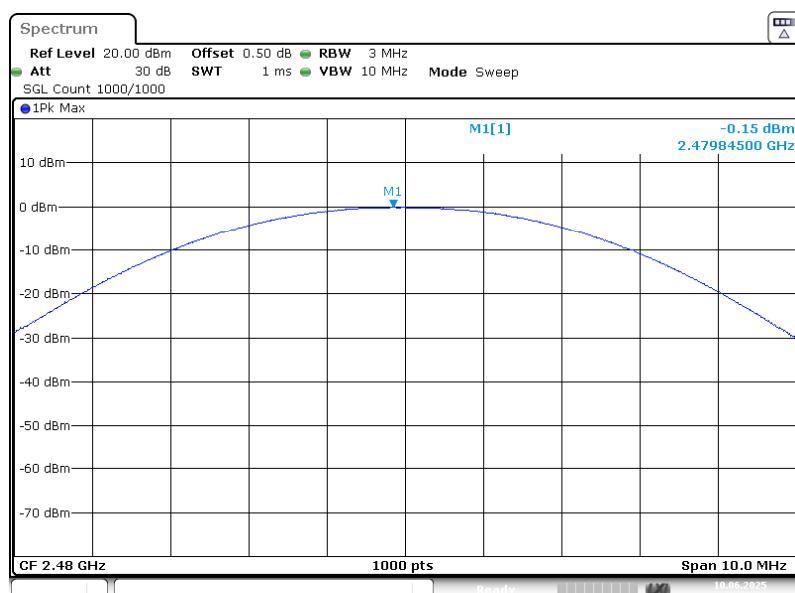


FCC §15.247(d) & RSS-247 ISSUE 3 Clause 5.5– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard****FCC §15.247 (d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Issue 3 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

EUT Setup**Test Procedure****FCC §15.247 (d)**

According to ANSI C63.10-2013 Section 11.11

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

RSS-247 Issue 3 Clause 5.5


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW and VBW of spectrum analyzer to 100 kHz and 300kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data


Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-06-10	Test Voltage:	AC 120V/60Hz
Test Result:	Compliance	Environment:	Temp.: 24.6°C Humi.: 58% Atm :100.2kPa

Please refer to the below plots:

Lowest Channel

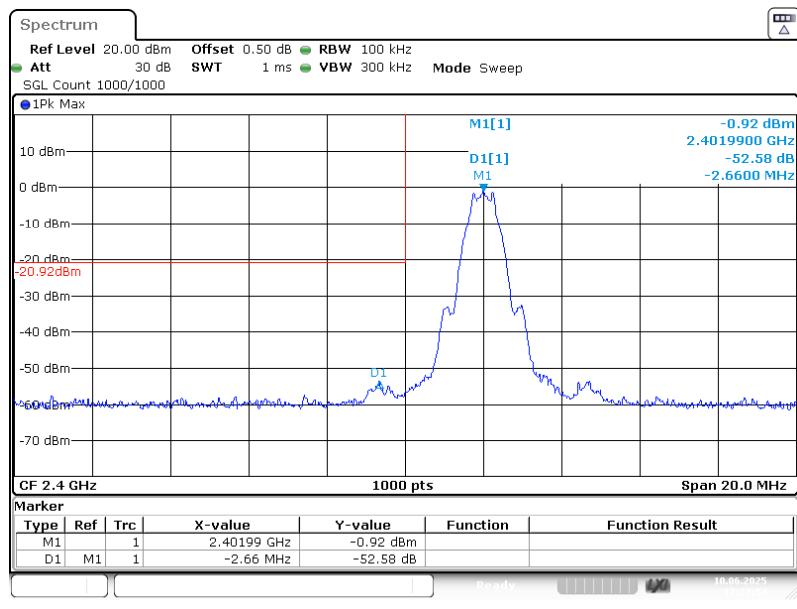

Highest Channel

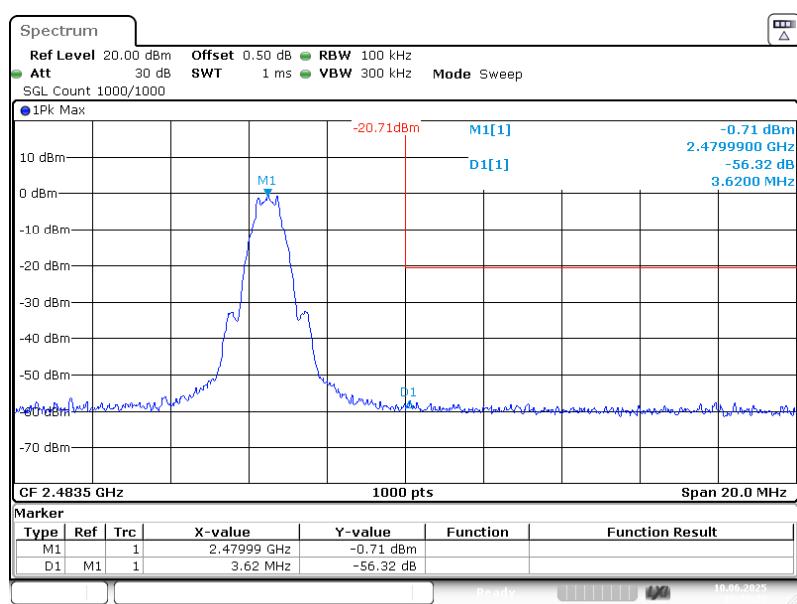


FCC §15.247(e) & RSS-247 ISSUE 3 CLAUSE5.2 b) - POWER SPECTRAL DENSITY**Applicable Standard****FCC §15.247 (e)**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 Clause5.2 b

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

EUT Setup**Test Procedure**


According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


Test Data

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-06-10	Test Voltage:	AC 120V/60Hz
Test Result:	Compliance	Environment:	Temp.: 24.6°C Humi.: 58% Atm :100.2kPa
Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Lowest	2402	-16.85	≤8.00
Middle	2440	-16.38	≤8.00
Highest	2480	-16.5	≤8.00

Lowest Channel

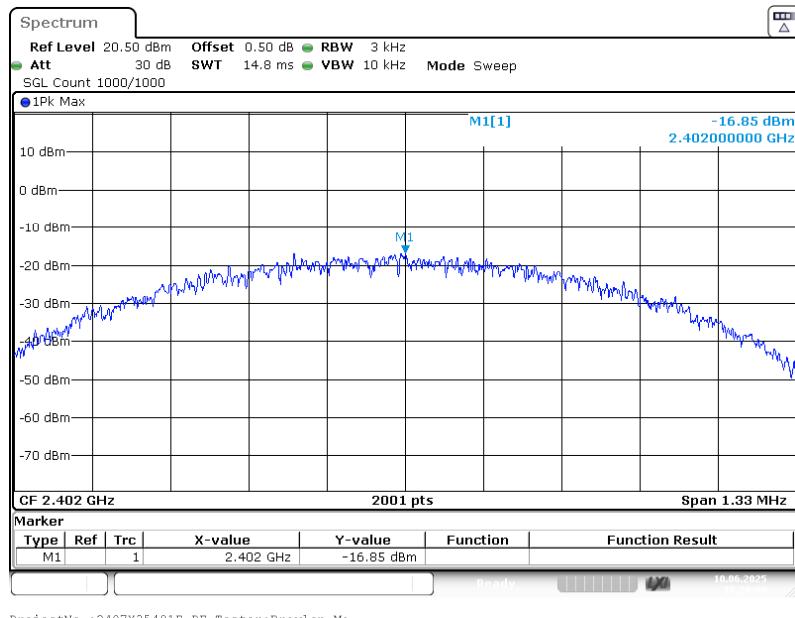


Middle Channel

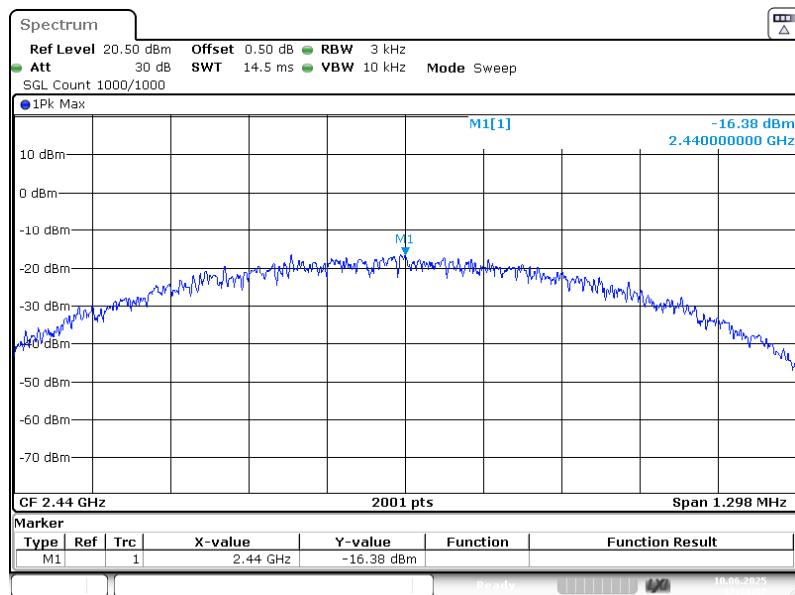

ProjectNo.:2407X35401E-RF Tester:Braylon Ma
 Date: 10.JUN.2025 17:31:06

Highest Channel

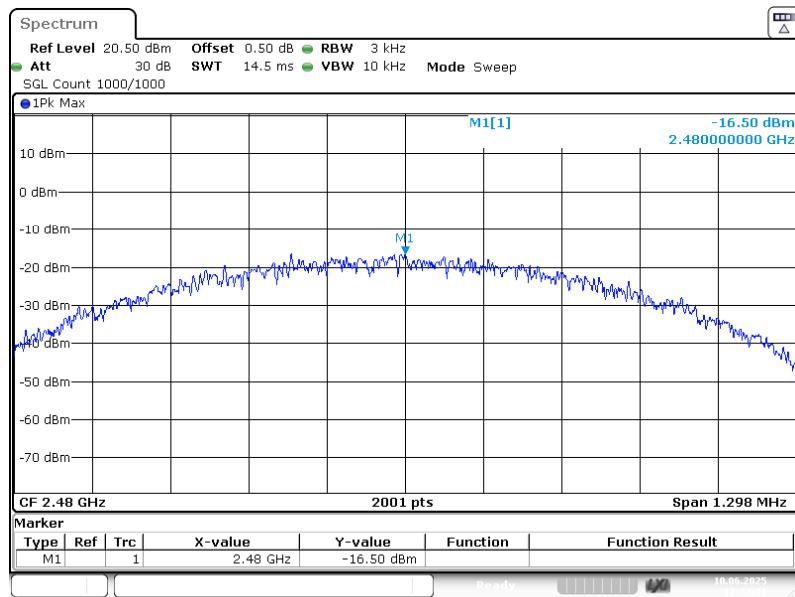

ProjectNo.:2407X35401E-RF Tester:Braylon Ma
 Date: 10.JUN.2025 17:34:41

EUT PHOTOGRAPHS

Please refer to the attachment 2407X35401E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2407X35401E-RF-INP EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2407X35401E-RF-TSP SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

***** **END OF REPORT** *****