


TEST REPORT

Applicant: Nanchang Huaqin Electronic Technology Co LTD
Address: 10 Keyuan Road, Songshan Lake, Dongguan City,
Guangdong Province, China
Equipment Type: wireless controller
Model Name: Legion Go 2 Controller L (refer to section 2.3)
Brand Name: Lenovo
FCC ID: 2A4A4-GM7760L
ISED Number: 28159-GM7760L
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 3
(refer to section 3.1)
Sample Arrival Date: May 16, 2025
Test Date: May 22, 2025 - May 26, 2025
Date of Issue: Jun. 18, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li Ganming**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jun. 18, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	10
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Frequency Hopping Systems	16
5.3	Number of Hopping Frequencies	18
5.4	Peak Output Power and E.I.R.P.	20
5.5	Occupied Bandwidth	27

5.6	Carrier Frequency Separation	32
5.7	Time of Occupancy (Dwell time)	34
5.8	Conducted Spurious Emission & Authorized-band band-edge	38
5.9	Conducted Emission	46
5.10	Radiated Spurious Emission	49
5.11	Band Edge (Restricted-band band-edge).....	59
ANNEX A	TEST SETUP PHOTOS	61

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Nanchang Huaqin Electronic Technology Co LTD
Address	10 Keyuan Road, Songshan Lake, Dongguan City, Guangdong Province, China

2.2 Manufacturer Information

Manufacturer	Huaqin Technology Co., Ltd.
Address	No.699, Lvke Road, Pudong New Area, Shanghai

2.3 General Description for Equipment under Test (EUT)

EUT Name	wireless controller
Model Name Under Test	Legion Go 2 Controller L
Series Model Name	Legion Go 2 Controller L ***** (The "*" in the model name can be 0 to 9, A to Z, a to z, any symbol or blank for marketing use only)
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name. (this information provided by the applicant)
Serial Number	HQ712210000005418D10000128
Hardware Version	GC8023-LM-V1.3
Software Version	v0326
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR)
-----------------------------------	--------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	Ceramic Antenna
Antenna Gain	1.73 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (d)	Hopping Mode	5.3.4	Pass	--
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (b)	Low/Middle/High	5.4.4	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (a)	Low/Middle/High	5.5.4	Pass	--
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (b)	Hopping Mode	5.6.4	Pass	--
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (d)	Hopping Mode	5.7.4	Pass	--
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Hopping Mode; Low/Middle/High	5.8.4	Pass	--
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	5.9.4	Pass	--
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	5.10.4	Pass	--
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/High	5.11.4	Pass	--
11	Receiver Spurious Emissions	--	RSS-Gen, 7.3	--	--	N/A	Note ²

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	40% to 59%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22.8°C to +26.1°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2024.08.01	2025.07.31
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2024.07.28	2027.07.27
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2024.05.09	2025.05.08
				2025.04.29	2026.04.28
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2025.02.14	2028.02.13

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

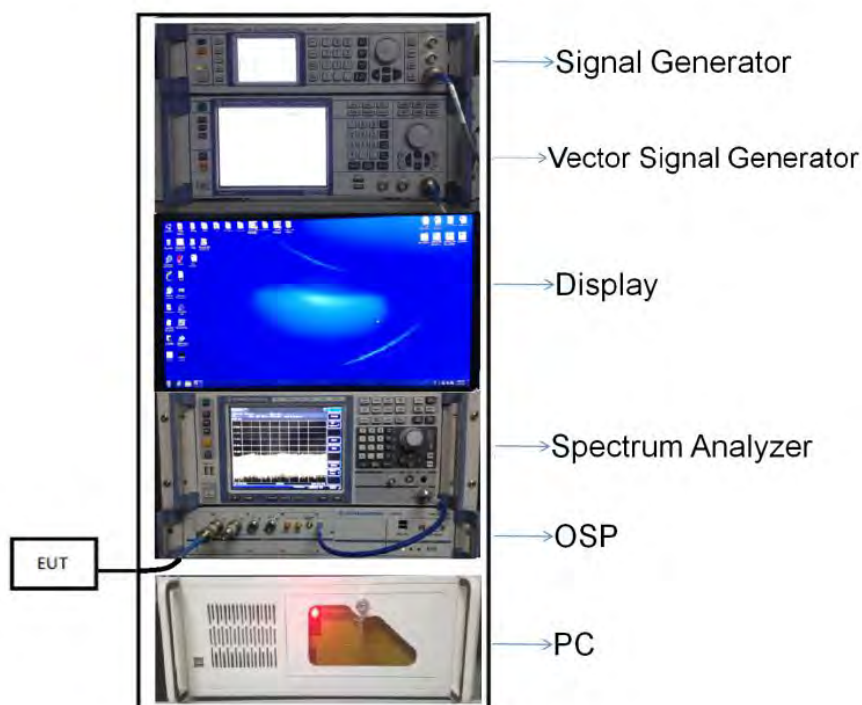


(Diagram 1)

4.5.2 For AC Power Supply Port Test

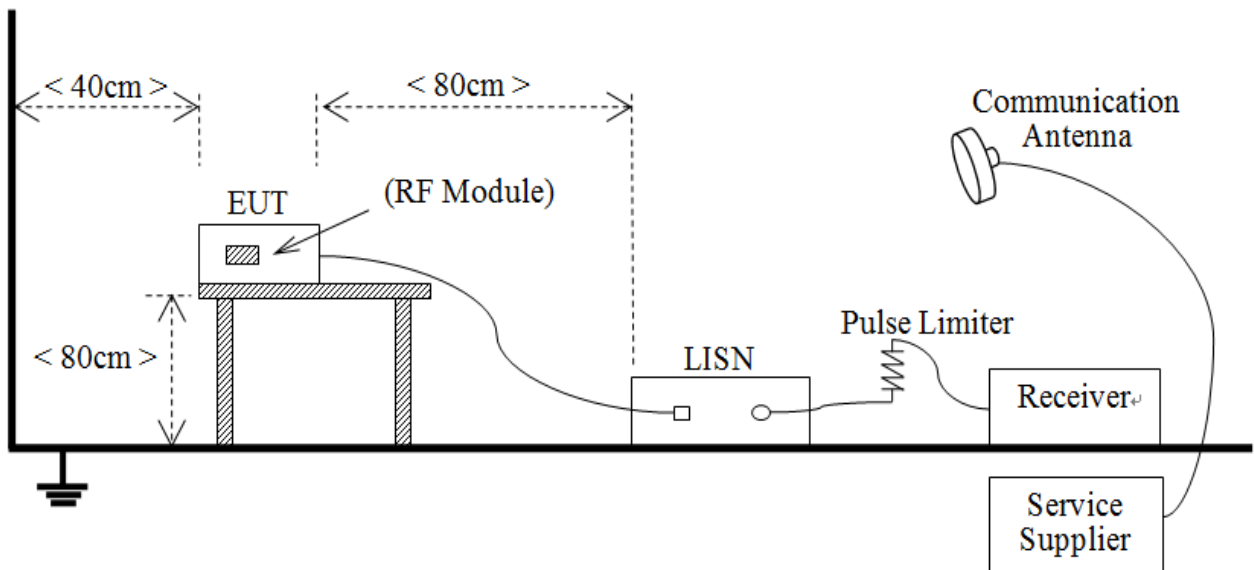


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

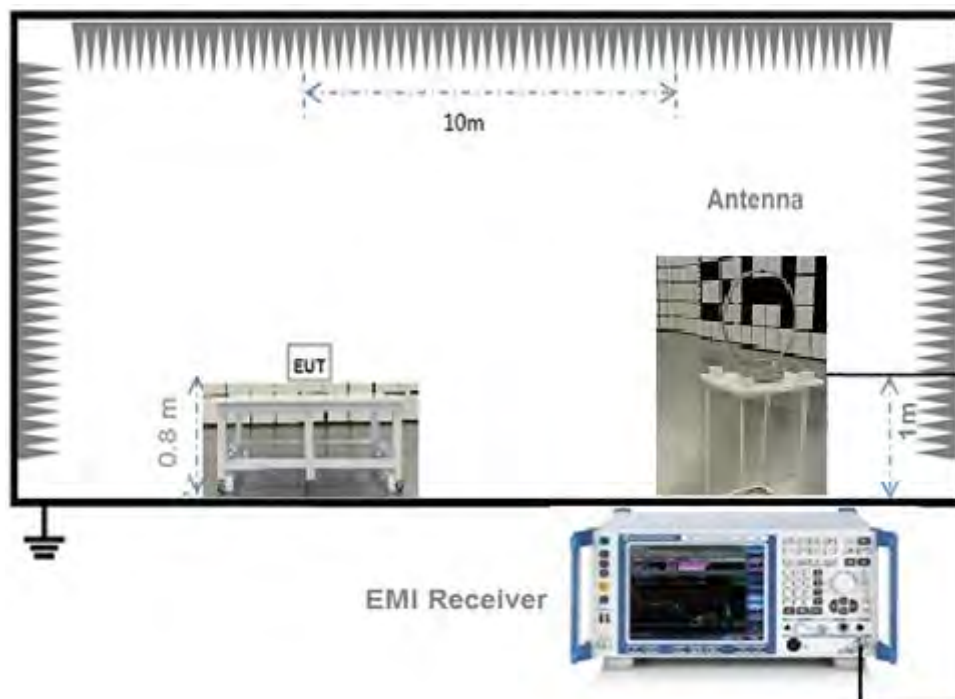


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

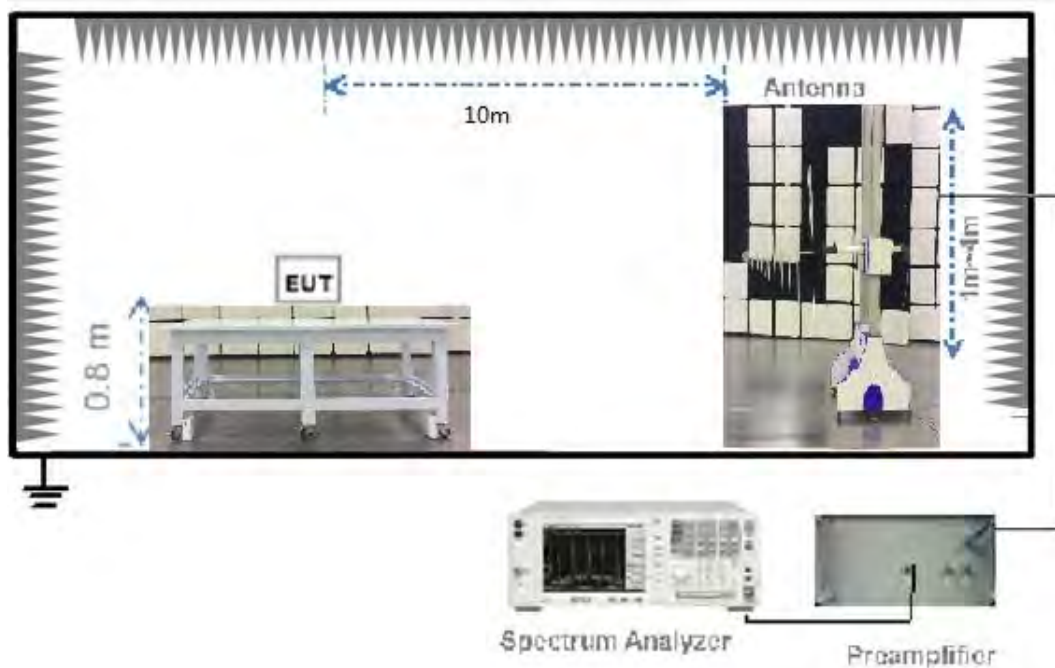

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

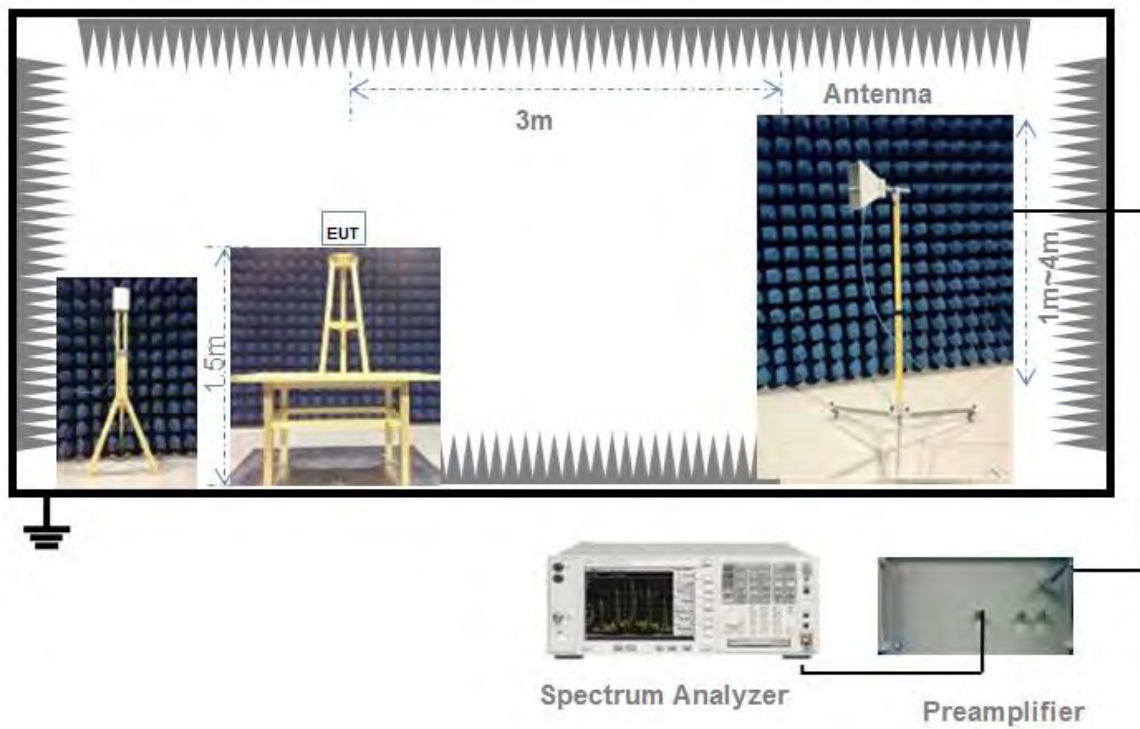

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.


For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents

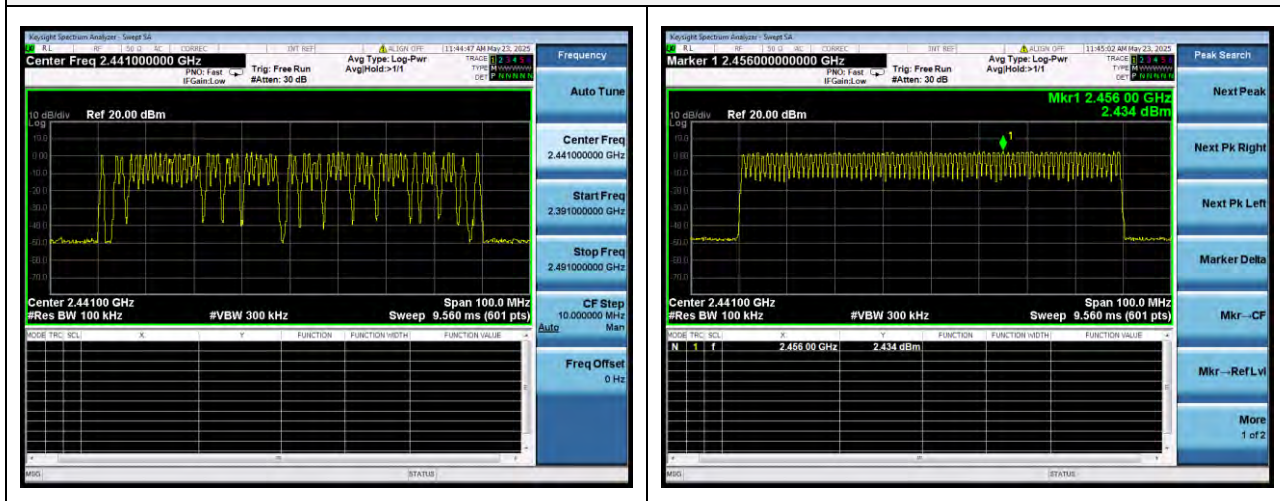

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


5.3.4 Test Result

Test Data



Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Pass

Test Plots

GFSK 2.4 GHz ~ 2.4415 GHz

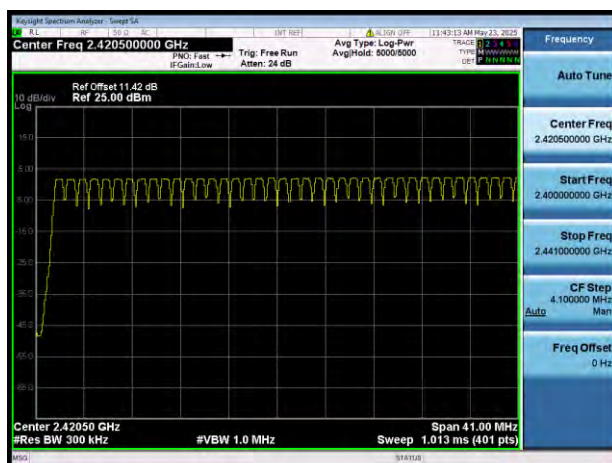

GFSK 2.4415 GHz ~ 2.4835 GHz

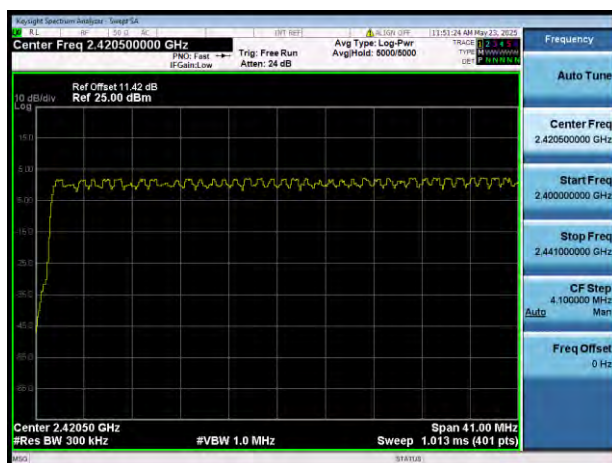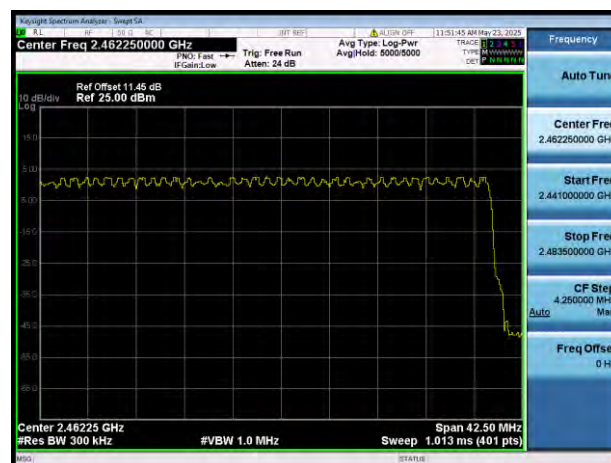 $\pi/4$ -DQPSK 2.4 GHz ~ 2.4415 GHz $\pi/4$ -DQPSK 2.4415 GHz ~ 2.4835 GHz

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

EIRP= Maximum peak conducted output power + Antenna Gain.

5.4.4 Test Result

Peak Power Test Data

Channel	Measured Output Peak Power				Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	1.97	1.58	2.81	1.91	21	125	Pass
Middle	2.59	1.82	3.37	2.17			Pass
High	2.76	1.89	3.50	2.24			Pass

AV Power Test Data

Channel	Measured Output AV Power				Limit		Verdict
	GFSK		π/4-DQPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	1.70	1.48	0.08	1.02	21	125	Pass
Middle	2.32	1.71	0.72	1.18			Pass
High	2.48	1.77	0.88	1.22			Pass

E.I.R.P Test Data (For ISSED)

Channel	E.I.R.P				Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	3.70	2.35	4.54	2.84	36	4000	Pass
Middle	4.32	2.71	5.10	3.24			Pass
High	4.49	2.81	5.23	3.34			Pass

Peak Power Test Plots

GFSK LOW CHANNEL






GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

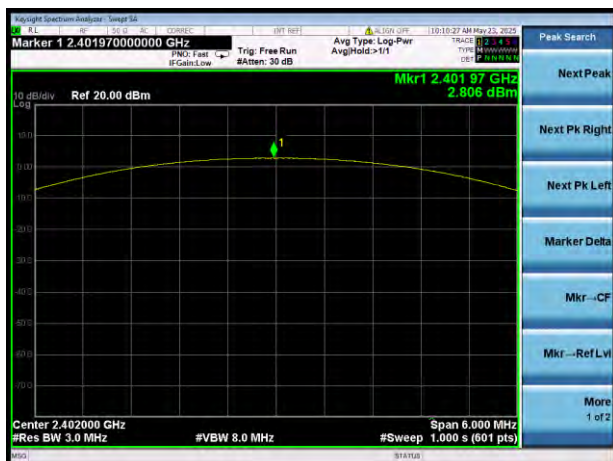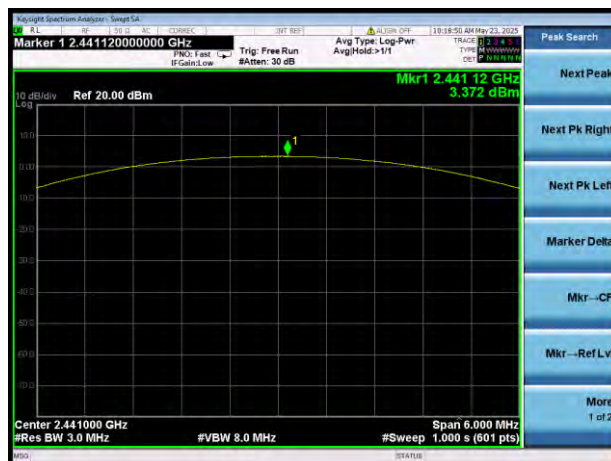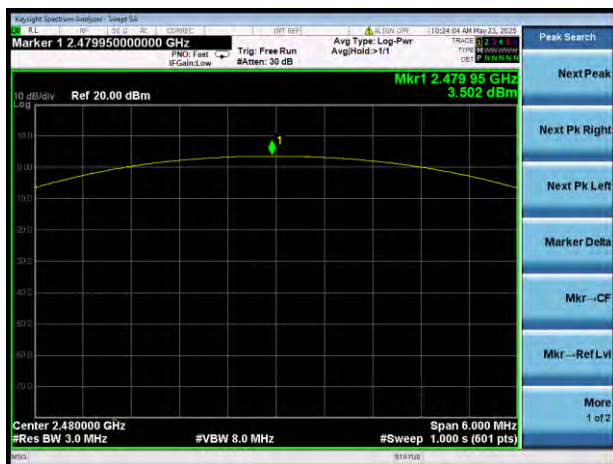


$\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL $\pi/4$ -DQPSK HIGH CHANNEL

AV Power Test Plots


GFSK LOW CHANNEL




GFSK MIDDLE CHANNEL

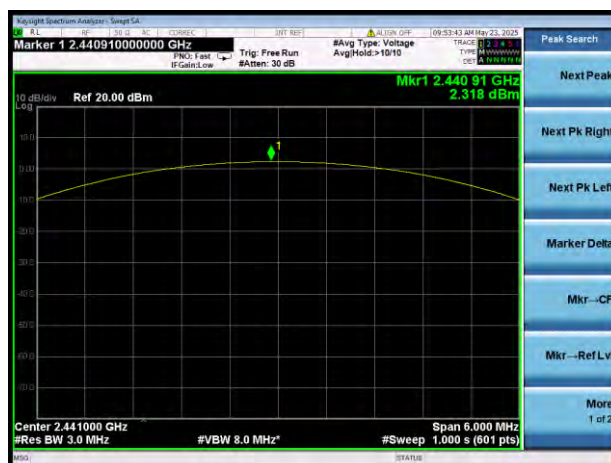

GFSK HIGH CHANNEL

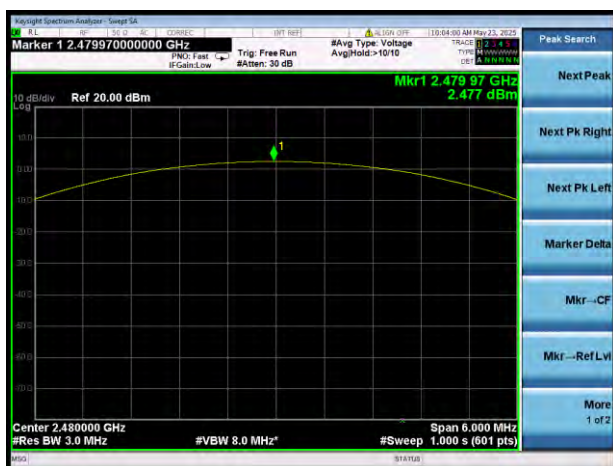

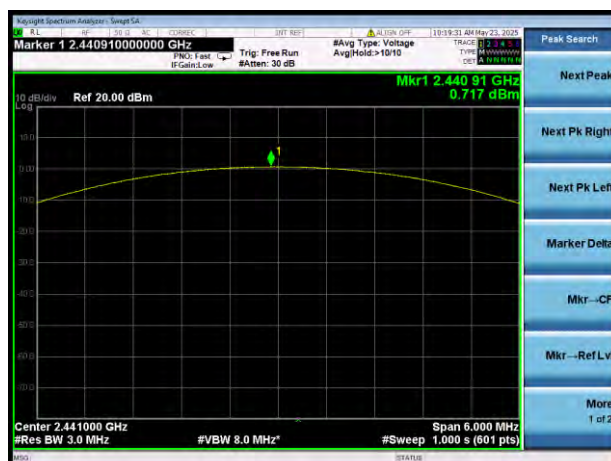
$\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL $\pi/4$ -DQPSK HIGH CHANNEL

Duty Cycle Test Data


Test Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle	Duty Factor
GFSK	2.879	3.755	76.67%	1.15
$\pi/4$ -DQPSK	2.889	3.755	76.94%	1.14

Test Plots

GFSK

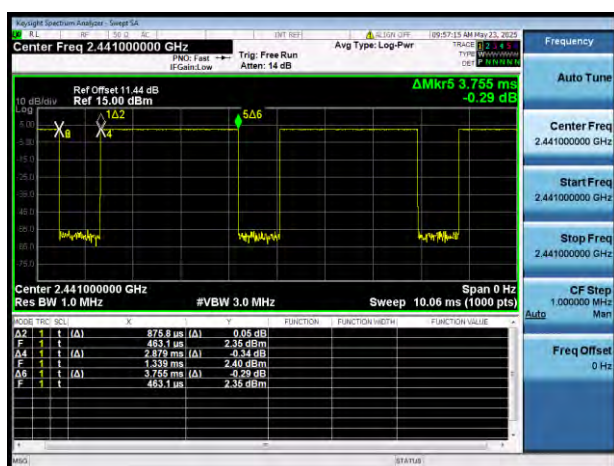

$\pi/4$ -DQPSK

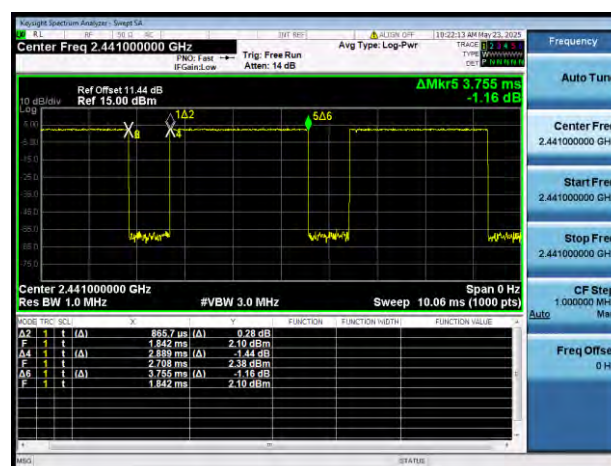

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.005	0.892
Middle	1.028	0.900
High	1.035	0.912
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.335	1.183
Middle	1.335	1.191
High	1.335	1.198

Test Plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL




$\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL $\pi/4$ -DQPSK HIGH CHANNEL

99% Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL

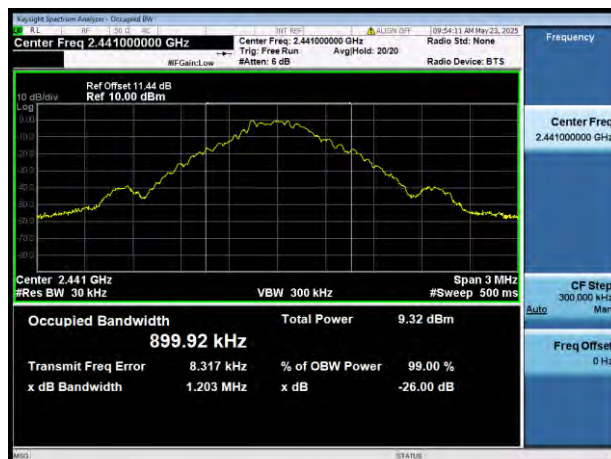

GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL $\pi/4$ -DQPSK HIGH CHANNEL

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



5.6.4 Test Result

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.010	0.690	Pass
$\pi/4$ -DQPSK	1.000	0.890	Pass

Test Plots

GFSK

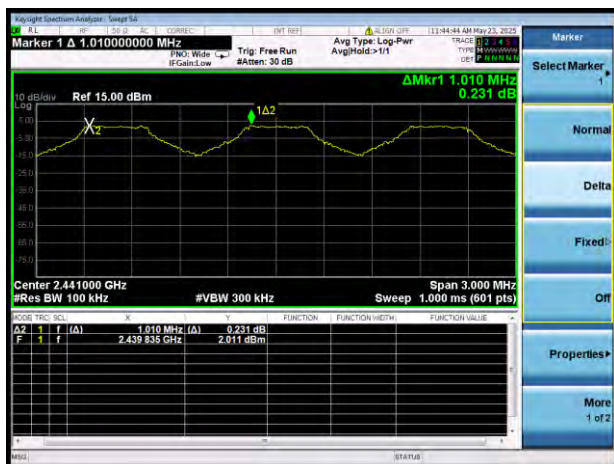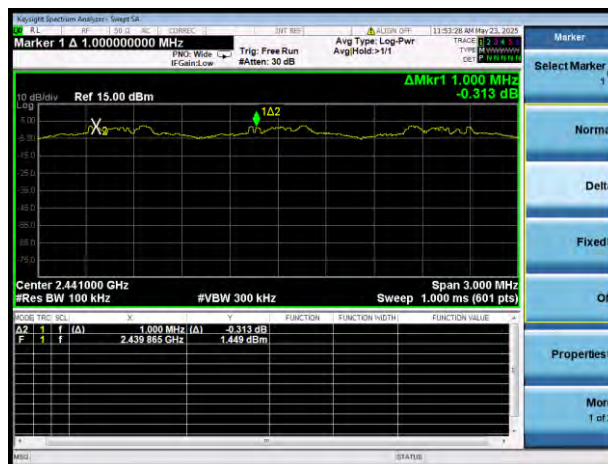 $\pi/4$ -DQPSK

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and $\pi/4$ -DQPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


5.7.4 Test Result

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37440	119.808	0.4	Pass
DH 3	1.62800	260.480	0.4	Pass
DH 5	2.88200	307.413	0.4	Pass
$\pi/4$ -DQPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
2DH 1	0.38400	122.880	0.4	Pass
2DH 3	1.63300	261.280	0.4	Pass
2DH 5	2.88900	308.160	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37600	60.160	0.4	Pass
DH 3	1.63300	130.640	0.4	Pass
DH 5	2.88100	153.653	0.4	Pass

Test Plots



GFSK DH1

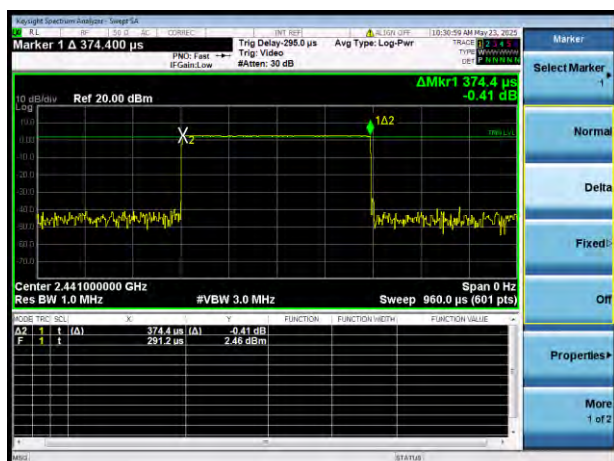


GFSK DH3

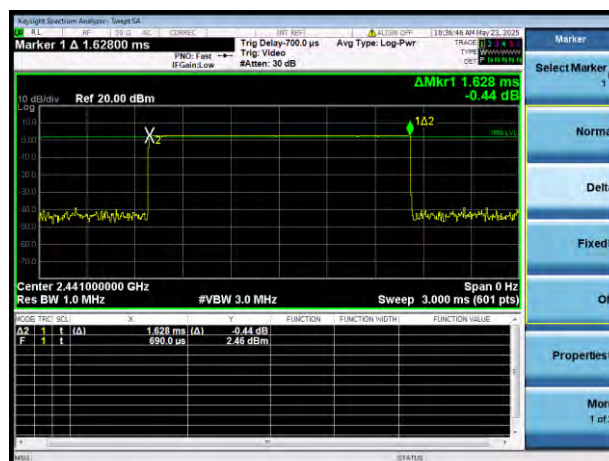


GFSK DH5

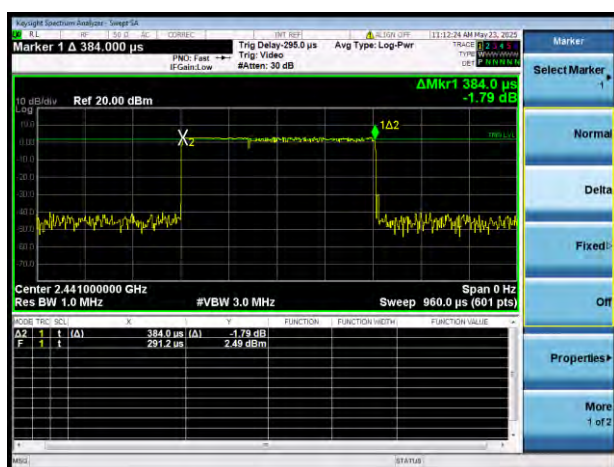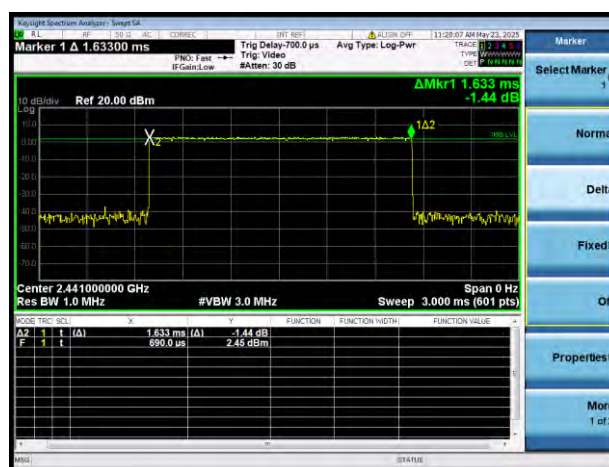 $\pi/4$ -DQPSK 2DH1 $\pi/4$ -DQPSK 2DH3


$\pi/4$ -DQPSK 2DH5

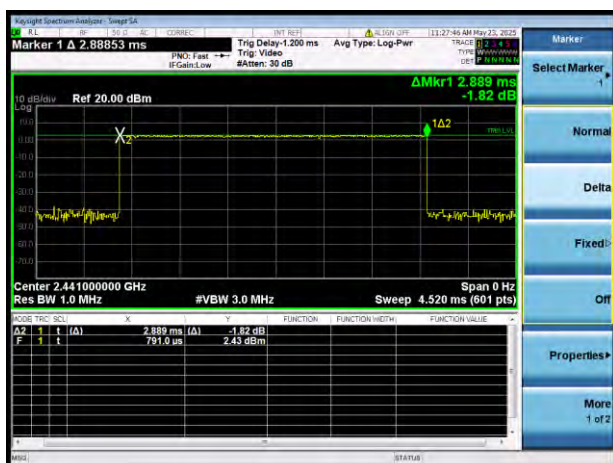

AFH Mode DH1

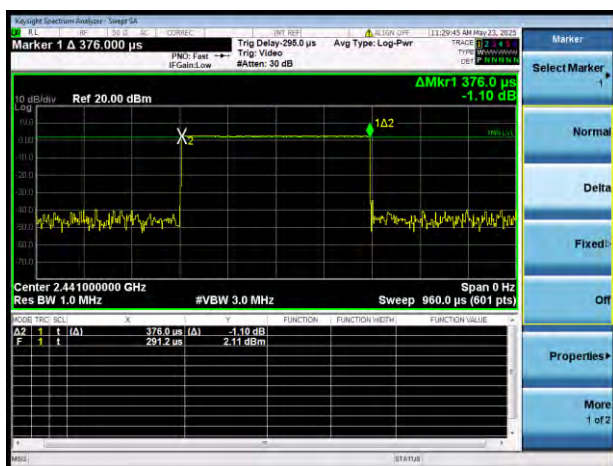

AFH Mode DH3

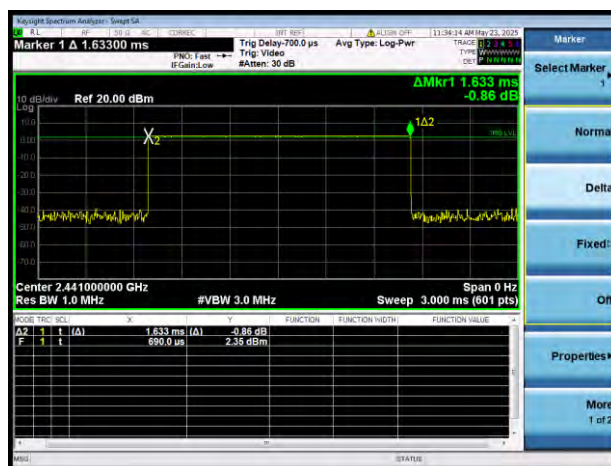

AFH Mode DH5



5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Test Data


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-32.39	1.70	-18.30	Pass
Middle	-32.19	2.30	-17.70	Pass
High	-32.74	2.46	-17.54	Pass
$\pi/4$ -DQPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-32.75	1.71	-18.29	Pass
Middle	-32.29	2.30	-17.71	Pass
High	-32.23	2.43	-17.57	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-32.47	2.43	-17.57	Pass
$\pi/4$ -DQPSK	-32.95	2.28	-17.72	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL




GFSK LOW CHANNEL, BAND EDGE

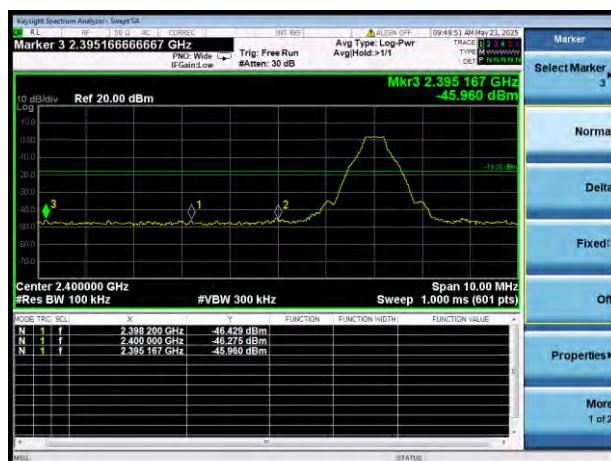

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

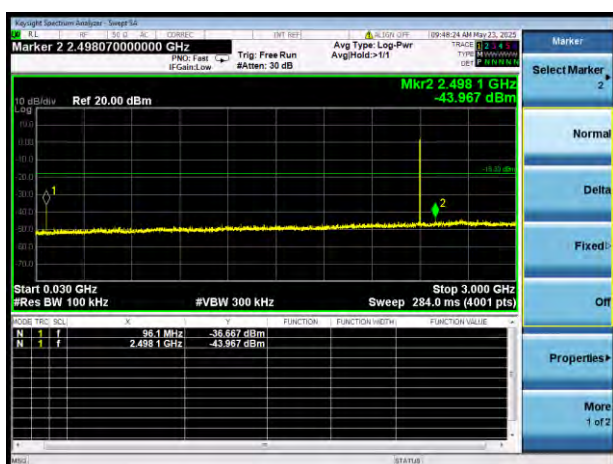


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

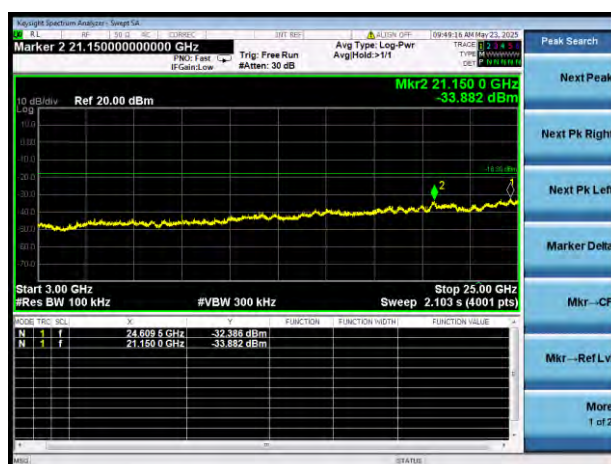


GFSK MIDDLE CHANNEL, CARRIER LEVEL



GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

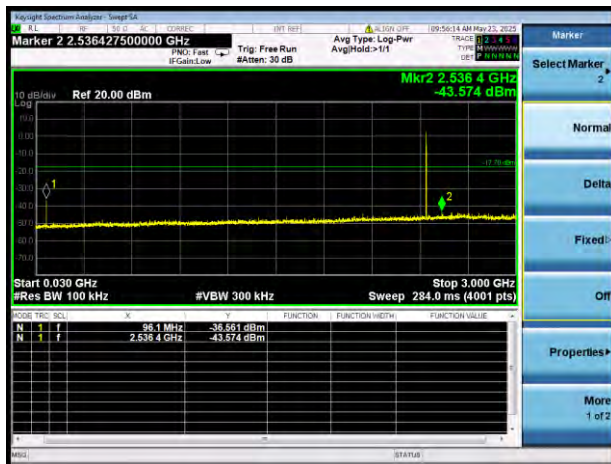


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

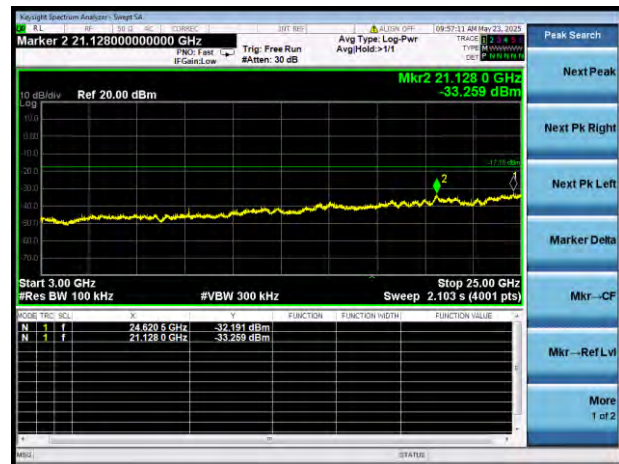


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE




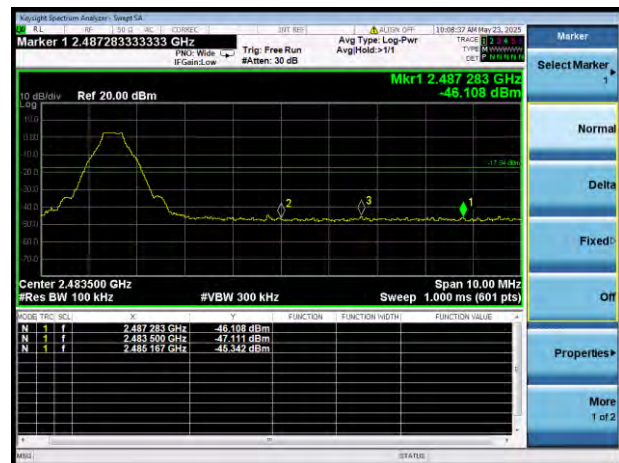


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

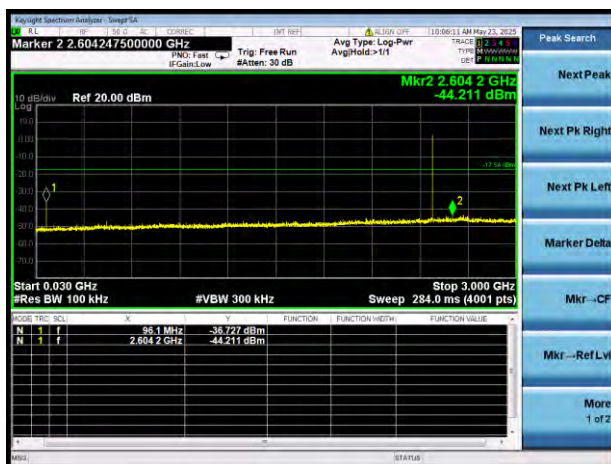


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

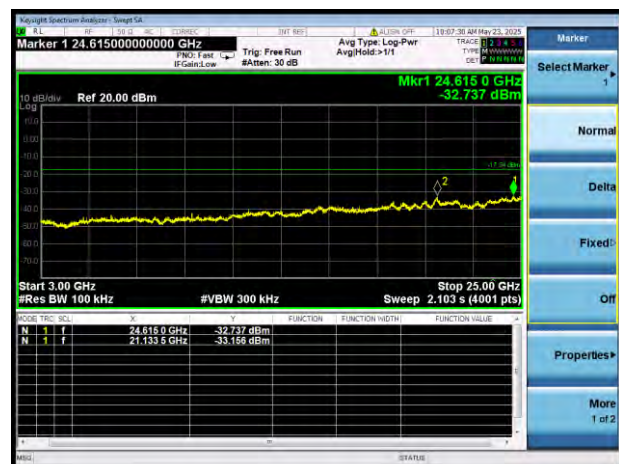

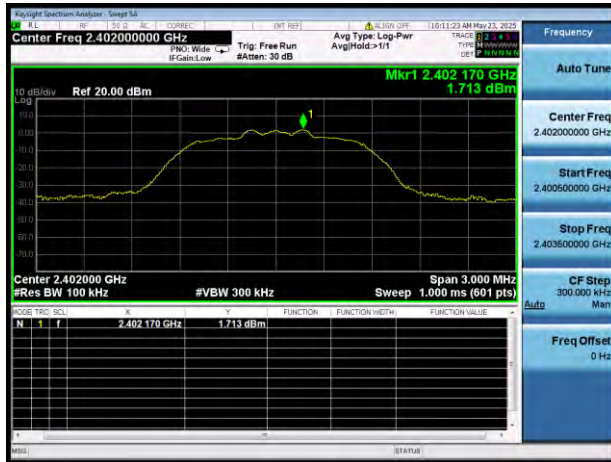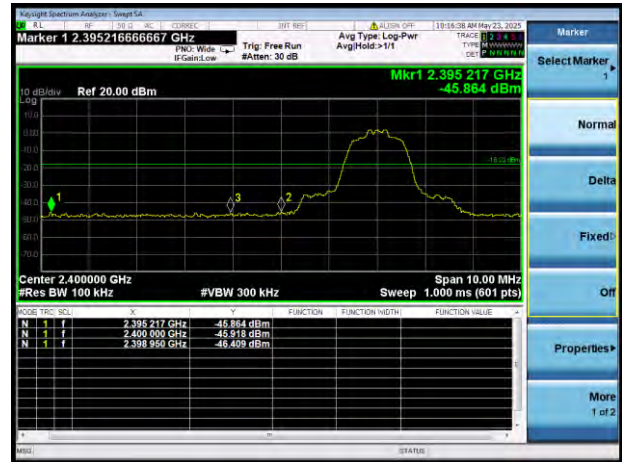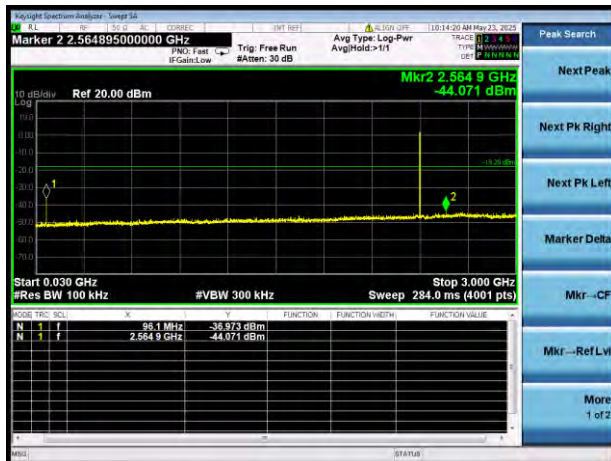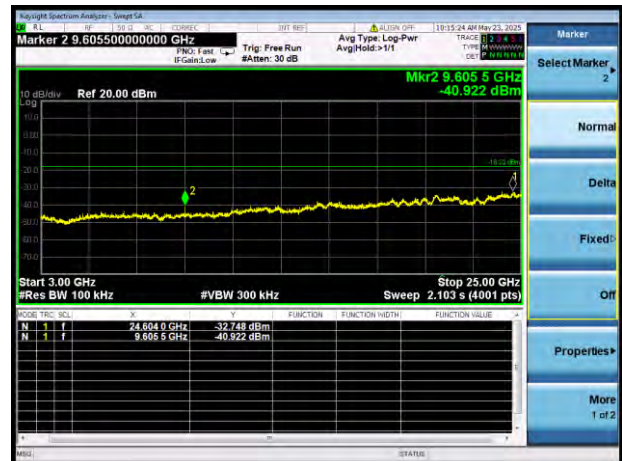$\pi/4$ -DQPSK LOW CHANNEL, CARRIER LEVEL $\pi/4$ -DQPSK LOW CHANNEL, BAND EDGE $\pi/4$ -DQPSK LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz $\pi/4$ -DQPSK LOW CHANNEL, SPURIOUS
3 GHz ~ 25 GHz $\pi/4$ -DQPSK MIDDLE CHANNEL, CARRIER LEVEL


$\pi/4$ -DQPSK MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

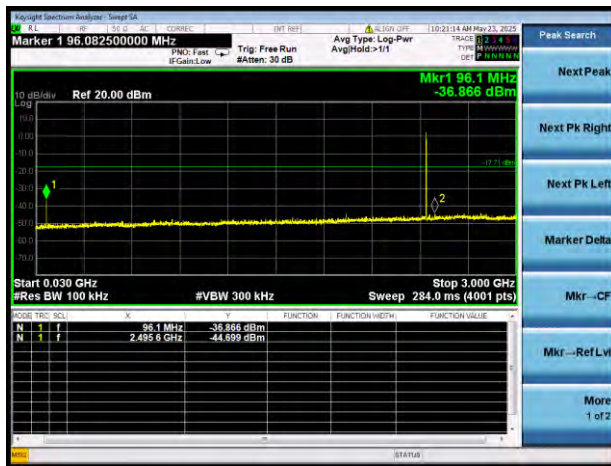


$\pi/4$ -DQPSK MIDDLE CHANNEL, SPURIOUS
3 GHz ~ 25 GHz




$\pi/4$ -DQPSK HIGH CHANNEL, CARRIER LEVEL

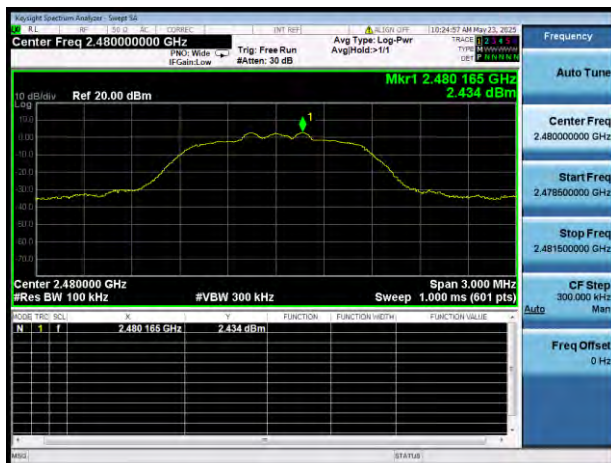


$\pi/4$ -DQPSK HIGH CHANNEL, BAND EDGE

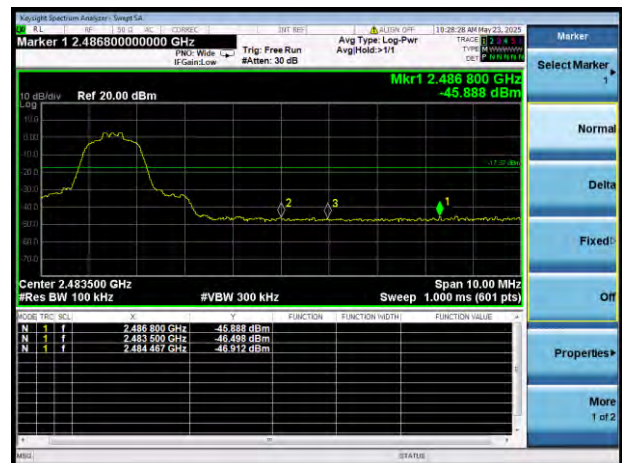


$\pi/4$ -DQPSK HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

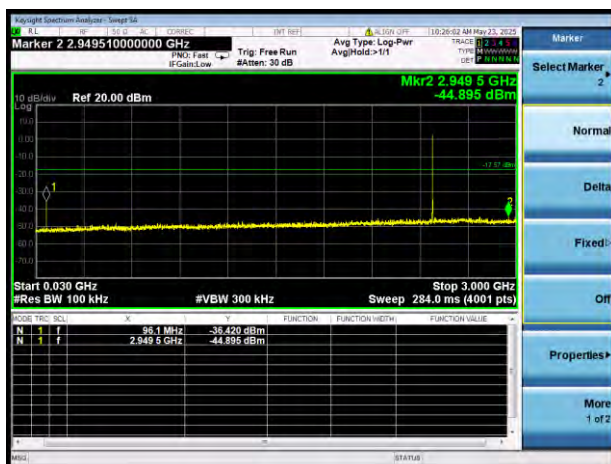


$\pi/4$ -DQPSK HIGH CHANNEL, SPURIOUS
3 GHz ~ 25 GHz

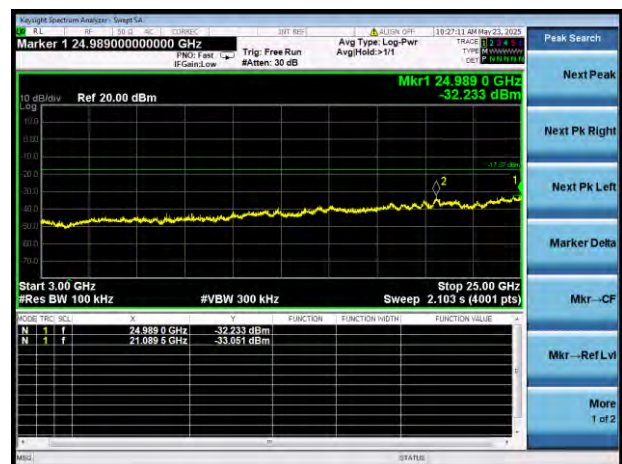



GFSK HOPPING, CARRIER LEVEL





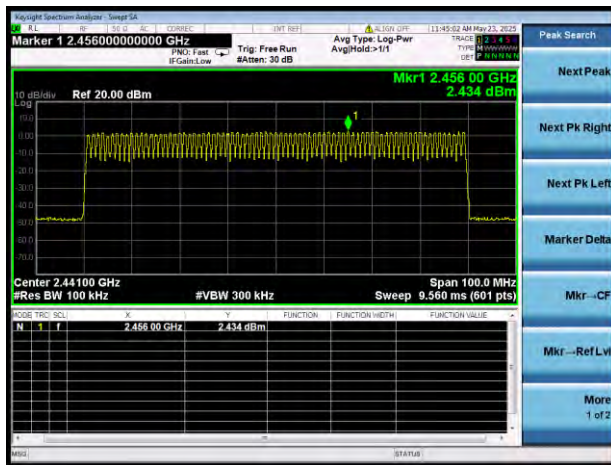


GFSK HOPPING BAND EDGE (LOW)

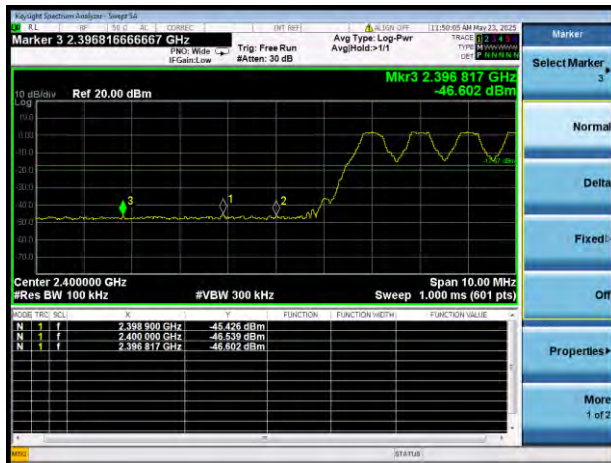

GFSK HOPPING BAND EDGE (HIGH)

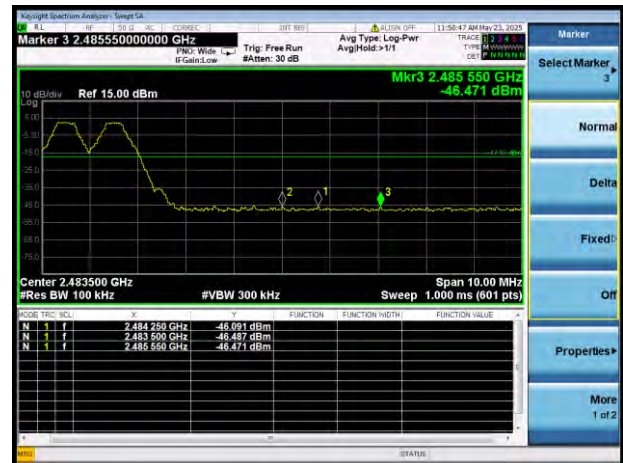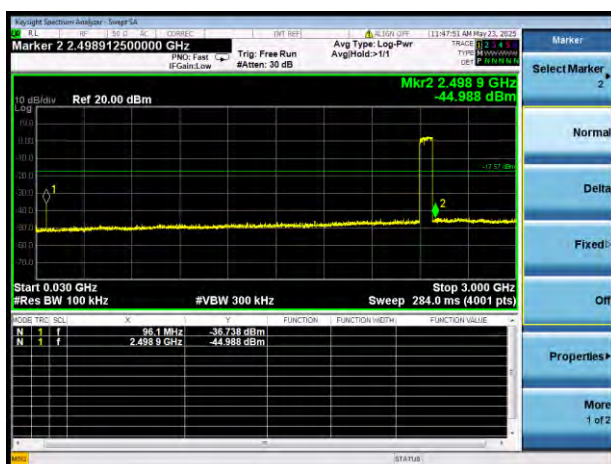GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

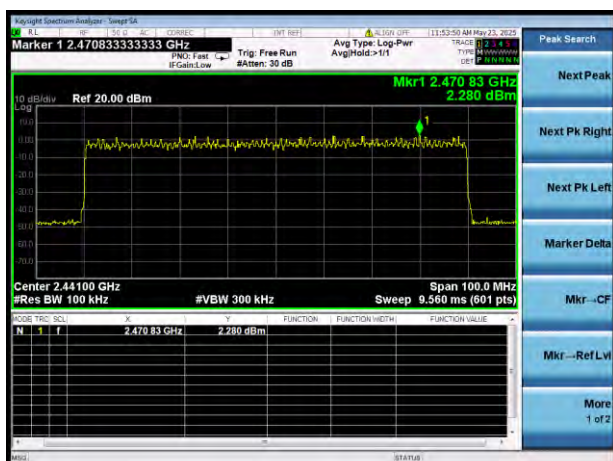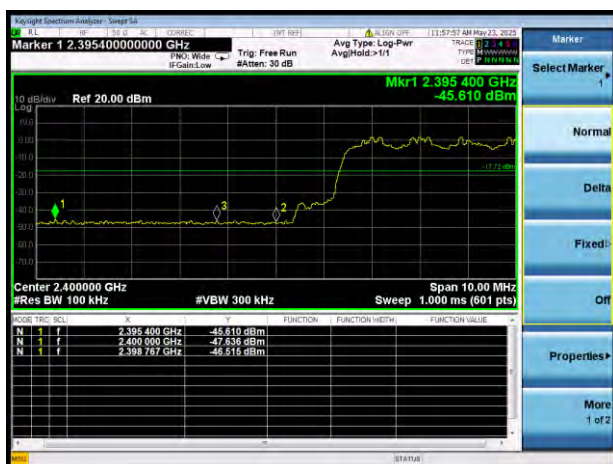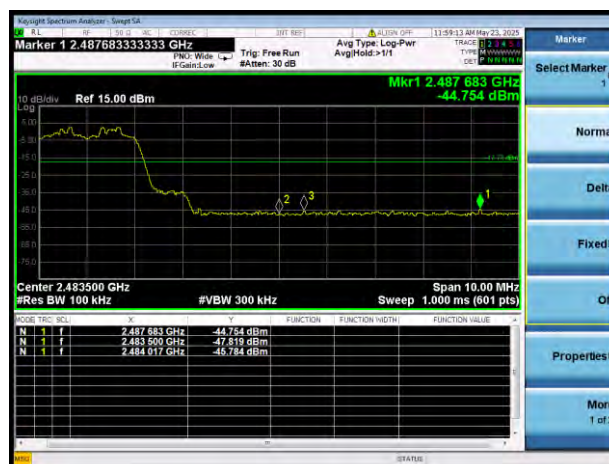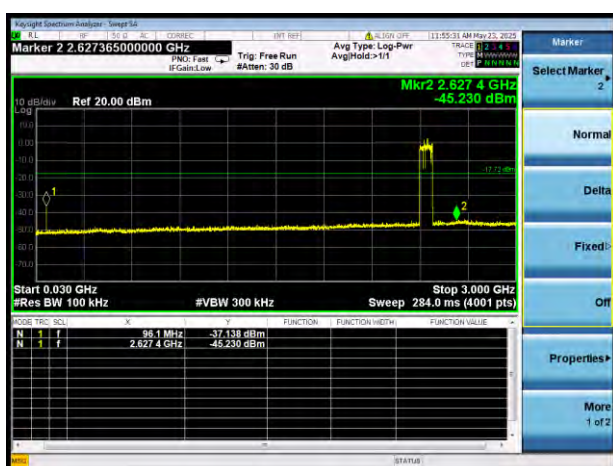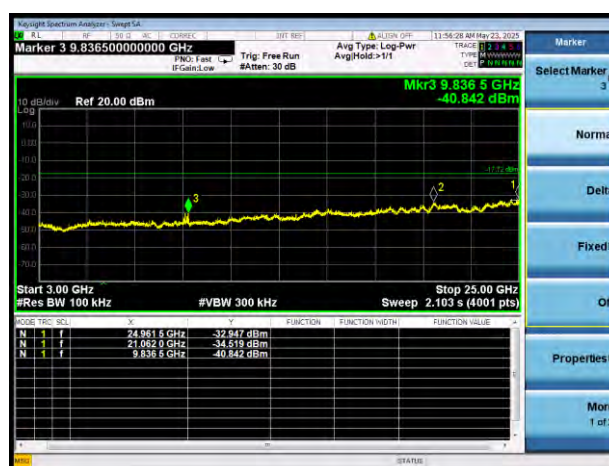$\pi/4$ -DQPSK HOPPING, CARRIER LEVEL $\pi/4$ -DQPSK Hopping BAND EDGE (LOW) $\pi/4$ -DQPSK Hopping BAND EDGE (HIGH) $\pi/4$ -DQPSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz $\pi/4$ -DQPSK Hopping Mode, SPURIOUS
3 GHz ~ 25 GHz

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX A.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

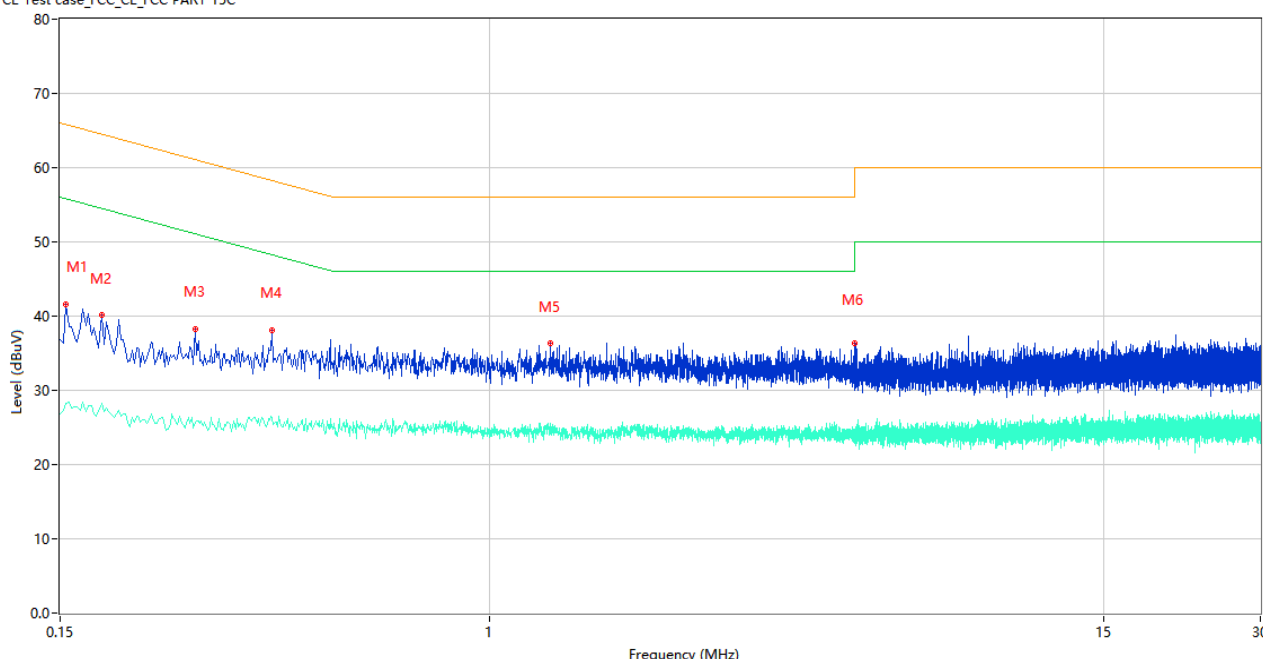

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	41.65	9.83	65.78	24.13	Peak	L	Pass
1**	0.154	28.28	9.83	55.78	27.50	AV	L	Pass
2	0.180	40.16	9.83	64.49	24.33	Peak	L	Pass
2**	0.180	28.24	9.83	54.49	26.25	AV	L	Pass
3	0.272	38.28	9.82	61.06	22.78	Peak	L	Pass
3**	0.272	25.52	9.82	51.06	25.54	AV	L	Pass
4	0.382	38.15	10.67	58.24	20.09	Peak	L	Pass
4**	0.382	26.36	10.67	48.24	21.88	AV	L	Pass
5	1.306	36.33	10.45	56.00	19.67	Peak	L	Pass
5**	1.306	25.52	10.45	46.00	20.48	AV	L	Pass
6	4.996	36.33	10.41	56.00	19.67	Peak	L	Pass
6**	4.996	24.84	10.41	46.00	21.16	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

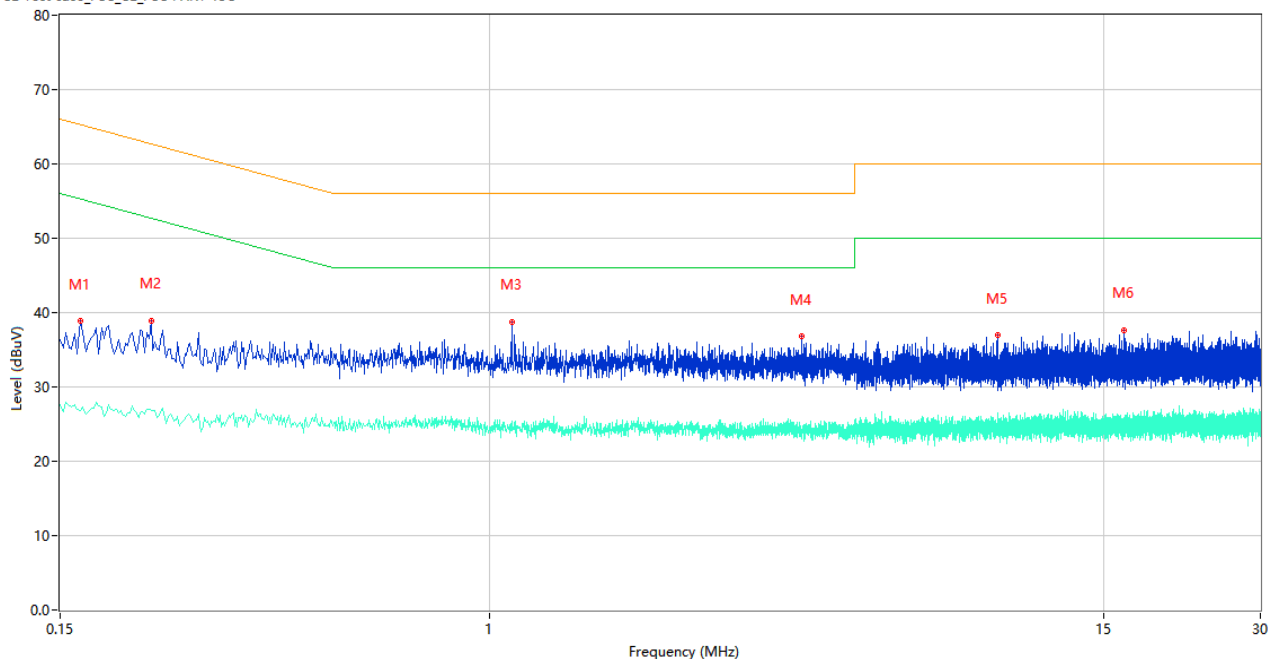

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	38.84	9.83	65.26	26.42	Peak	N	Pass
1**	0.164	26.84	9.83	55.26	28.42	AV	N	Pass
2	0.224	38.96	9.83	62.67	23.71	Peak	N	Pass
2**	0.224	26.83	9.83	52.67	25.84	AV	N	Pass
3	1.102	38.73	10.02	56.00	17.27	Peak	N	Pass
3**	1.102	25.44	10.02	46.00	20.56	AV	N	Pass
4	3.964	36.82	10.05	56.00	19.18	Peak	N	Pass
4**	3.964	23.65	10.05	46.00	22.35	AV	N	Pass
5	9.424	36.92	10.13	60.00	23.08	Peak	N	Pass
5**	9.424	24.96	10.13	50.00	25.04	AV	N	Pass
6	16.464	37.66	10.54	60.00	22.34	Peak	N	Pass
6**	16.464	24.87	10.54	50.00	25.13	AV	N	Pass

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT was tested in Link mode and the charging.


Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

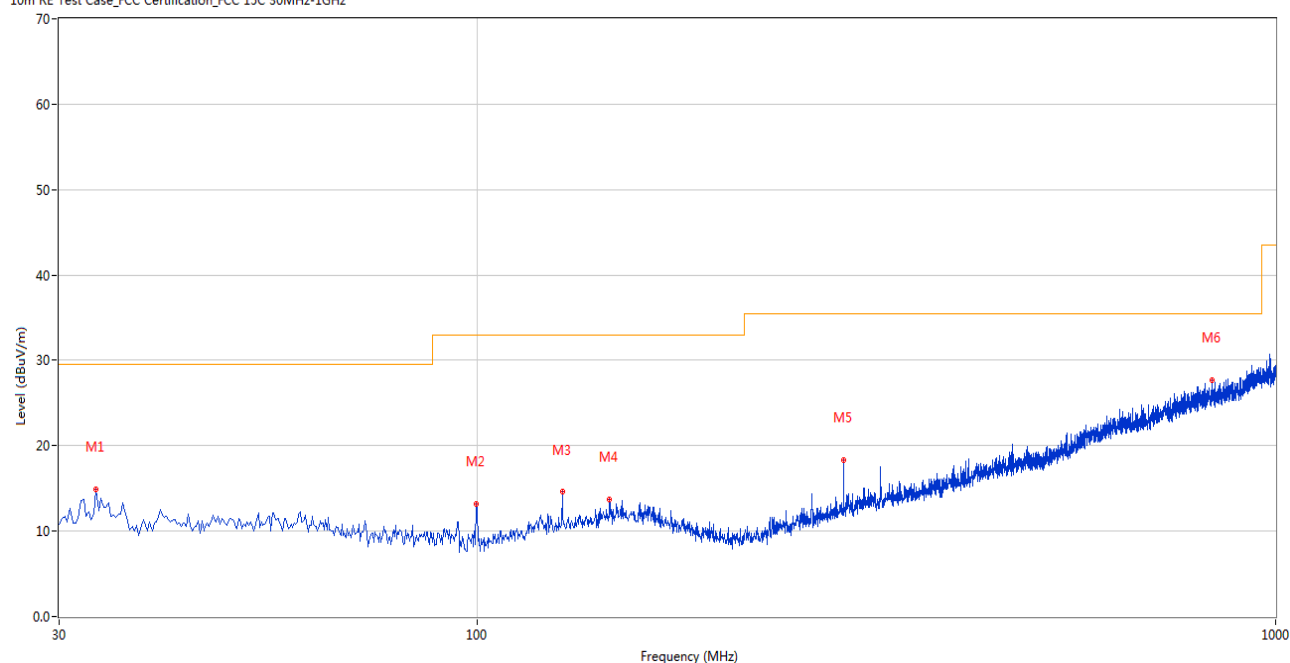

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.394	14.89	-26.96	29.5	14.61	Peak	360.00	200	Horizontal	Pass
2	99.823	13.19	-29.96	33.0	19.81	Peak	69.00	200	Horizontal	Pass
3	127.946	14.57	-27.47	33.0	18.43	Peak	360.00	400	Horizontal	Pass
4	146.613	13.77	-26.23	33.0	19.23	Peak	0.00	300	Horizontal	Pass
5	287.956	18.37	-25.91	35.5	17.13	Peak	360.00	200	Horizontal	Pass
6	833.202	27.66	-12.07	35.5	7.84	Peak	360.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

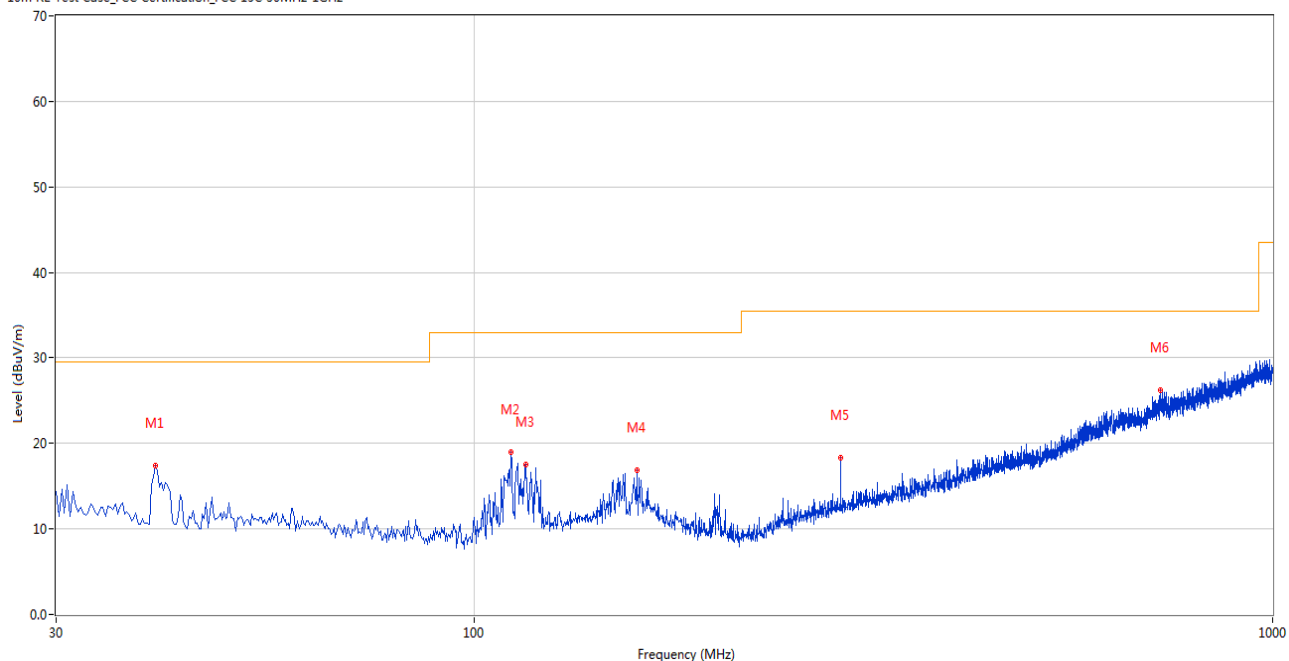

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.940	17.35	-26.82	29.5	12.15	Peak	360.00	400	Vertical	Pass
2	111.217	18.94	-28.88	33.0	14.06	Peak	360.00	200	Vertical	Pass
3	116.066	17.57	-28.56	33.0	15.43	Peak	15.00	200	Vertical	Pass
4	159.948	16.94	-26.23	33.0	16.06	Peak	0.00	100	Vertical	Pass
5	287.956	18.31	-25.91	35.5	17.19	Peak	155.00	100	Vertical	Pass
6	724.346	26.19	-14.28	35.5	9.31	Peak	0.00	300	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1346.700	42.57	74.0	31.43	Peak	5.00	100	Horizontal	Pass
1**	1346.700	33.04	54.0	20.96	AV	5.00	100	Horizontal	Pass
2	2402.100	92.10	74.0	-18.10	Peak	5.00	100	Horizontal	N/A
2**	2402.100	91.92	54.0	-37.92	AV	5.00	100	Horizontal	N/A
3	4803.750	49.87	74.0	24.13	Peak	14.00	200	Horizontal	Pass
3**	4803.750	41.09	54.0	12.91	AV	14.00	200	Horizontal	Pass
4	6890.000	54.16	74.0	19.84	Peak	307.00	100	Horizontal	Pass
4**	6890.000	45.37	54.0	8.63	AV	307.00	100	Horizontal	Pass
5	12524.375	54.31	74.0	19.69	Peak	317.00	200	Horizontal	Pass
5**	12524.375	44.53	54.0	9.47	AV	317.00	200	Horizontal	Pass
6	16994.887	55.88	74.0	18.12	Peak	343.00	400	Horizontal	Pass
6**	16994.887	46.64	54.0	7.36	AV	343.00	400	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.100	46.46	74.0	27.54	Peak	180.00	400	Vertical	Pass
1**	1333.100	33.17	54.0	20.83	AV	180.00	400	Vertical	Pass
2	2401.800	88.81	74.0	-14.81	Peak	6.00	200	Vertical	N/A
2**	2401.800	88.13	54.0	-34.13	AV	6.00	200	Vertical	N/A
3	4730.750	49.87	74.0	24.13	Peak	211.00	200	Vertical	Pass
3**	4730.750	40.70	54.0	13.30	AV	211.00	200	Vertical	Pass
4	7900.250	54.10	74.0	19.90	Peak	35.00	200	Vertical	Pass
4**	7900.250	44.55	54.0	9.45	AV	35.00	200	Vertical	Pass
5	12454.313	53.99	74.0	20.01	Peak	138.00	300	Vertical	Pass
5**	12454.313	44.44	54.0	9.56	AV	138.00	300	Vertical	Pass
6	17005.650	55.78	74.0	18.22	Peak	218.00	100	Vertical	Pass
6**	17005.650	48.06	54.0	5.94	AV	218.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.500	42.74	74.0	31.26	Peak	355.00	300	Horizontal	Pass
1**	1531.500	32.71	54.0	21.29	AV	355.00	300	Horizontal	Pass
2	2441.000	91.33	74.0	-17.33	Peak	135.00	100	Horizontal	N/A
2**	2441.000	90.79	54.0	-36.79	AV	135.00	100	Horizontal	N/A
3	2536.900	59.02	74.0	14.98	Peak	248.00	100	Horizontal	Pass
3**	2536.900	51.02	54.0	2.98	AV	248.00	100	Horizontal	N/A
4	4816.750	49.92	74.0	24.08	Peak	0.00	100	Horizontal	Pass
4**	4816.750	41.44	54.0	12.56	AV	0.00	100	Horizontal	Pass
5	6881.750	54.17	74.0	19.83	Peak	326.00	200	Horizontal	Pass
5**	6881.750	44.29	54.0	9.71	AV	326.00	200	Horizontal	Pass
6	12471.888	53.84	74.0	20.16	Peak	197.00	100	Horizontal	Pass
6**	12471.888	44.46	54.0	9.54	AV	197.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.200	46.40	74.0	27.60	Peak	172.00	400	Vertical	Pass
1**	1331.200	36.87	54.0	17.13	AV	172.00	400	Vertical	Pass
2	2440.900	88.89	74.0	-14.89	Peak	110.00	200	Vertical	N/A
2**	2440.900	88.15	54.0	-34.15	AV	110.00	200	Vertical	N/A
3	2666.800	48.73	74.0	25.27	Peak	269.00	100	Vertical	Pass
3**	2666.800	49.37	54.0	4.63	AV	269.00	100	Vertical	Pass
4	5317.000	54.16	74.0	19.84	Peak	111.00	200	Vertical	Pass
4**	5317.000	45.42	54.0	8.58	AV	111.00	200	Vertical	Pass
5	5317.250	51.37	74.0	22.63	Peak	111.00	100	Vertical	Pass
5**	5317.250	47.87	54.0	6.13	AV	111.00	100	Vertical	Pass
6	12516.062	53.86	74.0	20.14	Peak	136.00	200	Vertical	Pass
6**	12516.062	43.74	54.0	10.26	AV	136.00	200	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1488.400	42.71	74.0	31.29	Peak	198.00	300	Horizontal	Pass
1**	1488.400	32.91	54.0	21.09	AV	198.00	300	Horizontal	Pass
2	2480.100	95.07	74.0	-21.07	Peak	242.00	200	Horizontal	N/A
2**	2480.100	94.77	54.0	-40.77	AV	242.00	200	Horizontal	N/A
3	4910.000	50.14	74.0	23.86	Peak	0.00	200	Horizontal	Pass
3**	4910.000	40.33	54.0	13.67	AV	0.00	200	Horizontal	Pass
4	7931.250	53.91	74.0	20.09	Peak	33.00	200	Horizontal	Pass
4**	7931.250	44.95	54.0	9.05	AV	33.00	200	Horizontal	Pass
5	12506.800	53.61	74.0	20.39	Peak	73.00	200	Horizontal	Pass
5**	12506.800	44.66	54.0	9.34	AV	73.00	200	Horizontal	Pass
6	17026.650	56.41	74.0	17.59	Peak	224.00	200	Horizontal	Pass
6**	17026.650	46.53	54.0	7.47	AV	224.00	200	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.500	45.42	74.0	28.58	Peak	172.00	400	Vertical	Pass
1**	1333.500	33.27	54.0	20.73	AV	172.00	400	Vertical	Pass
2	2479.800	91.17	74.0	-17.17	Peak	145.00	100	Vertical	N/A
2**	2479.800	90.30	54.0	-36.30	AV	145.00	100	Vertical	N/A
3	4811.000	50.03	74.0	23.97	Peak	0.00	150	Vertical	Pass
3**	4811.000	40.00	54.0	14.00	AV	0.00	150	Vertical	Pass
4	6913.750	54.62	74.0	19.38	Peak	285.00	400	Vertical	Pass
4**	6913.750	44.77	54.0	9.23	AV	285.00	400	Vertical	Pass
5	9919.950	54.39	74.0	19.61	Peak	51.00	200	Vertical	Pass
5**	9919.950	49.17	54.0	4.83	AV	51.00	200	Vertical	Pass
6	9920.187	53.18	74.0	20.82	Peak	340.00	100	Vertical	Pass
6**	9920.187	50.74	54.0	3.26	AV	340.00	100	Vertical	Pass

$\pi/4$ -DQPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1398.000	42.07	74.0	31.93	Peak	284.00	400	Horizontal	Pass
1**	1398.000	31.89	54.0	22.11	AV	284.00	400	Horizontal	Pass
2	2401.800	92.55	74.0	-18.55	Peak	13.00	200	Horizontal	N/A
2**	2401.800	89.31	54.0	-35.31	AV	13.00	200	Horizontal	N/A
3	4818.500	50.51	74.0	23.49	Peak	307.00	200	Horizontal	Pass
3**	4818.500	40.88	54.0	13.12	AV	307.00	200	Horizontal	Pass
4	6911.250	54.04	74.0	19.96	Peak	267.00	300	Horizontal	Pass
4**	6911.250	45.32	54.0	8.68	AV	267.00	300	Horizontal	Pass
5	12475.924	54.03	74.0	19.97	Peak	357.00	200	Horizontal	Pass
5**	12475.924	44.52	54.0	9.48	AV	357.00	200	Horizontal	Pass
6	16873.875	56.33	74.0	17.67	Peak	283.00	300	Horizontal	Pass
6**	16873.875	46.85	54.0	7.15	AV	283.00	300	Horizontal	Pass

 $\pi/4$ -DQPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.700	43.95	74.0	30.05	Peak	198.00	200	Vertical	Pass
1**	1330.700	34.50	54.0	19.50	AV	198.00	200	Vertical	Pass
2	2401.900	88.73	74.0	-14.73	Peak	4.00	100	Vertical	N/A
2**	2401.900	87.30	54.0	-33.30	AV	4.00	100	Vertical	N/A
3	4812.250	50.09	74.0	23.91	Peak	90.00	150	Vertical	Pass
3**	4812.250	41.57	54.0	12.43	AV	90.00	150	Vertical	Pass
4	5308.750	47.97	74.0	26.03	Peak	168.00	100	Vertical	Pass
4**	5308.750	47.64	54.0	6.36	AV	168.00	100	Vertical	Pass
5	12474.738	53.77	74.0	20.23	Peak	111.00	100	Vertical	Pass
5**	12474.738	45.03	54.0	8.97	AV	111.00	100	Vertical	Pass
6	16980.449	56.03	74.0	17.97	Peak	238.00	200	Vertical	Pass
6**	16980.449	46.39	54.0	7.61	AV	238.00	200	Vertical	Pass

$\pi/4$ -DQPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1594.400	42.00	74.0	32.00	Peak	351.00	100	Horizontal	Pass
1**	1594.400	32.73	54.0	21.27	AV	351.00	100	Horizontal	Pass
2	2440.900	91.08	74.0	-17.08	Peak	225.00	150	Horizontal	N/A
2**	2440.900	90.08	54.0	-36.08	AV	225.00	150	Horizontal	N/A
3	2536.700	55.70	74.0	18.30	Peak	49.00	100	Horizontal	Pass
3**	2536.700	49.16	54.0	4.84	AV	49.00	100	Horizontal	Pass
4	4872.000	49.62	74.0	24.38	Peak	148.00	150	Horizontal	Pass
4**	4872.000	40.48	54.0	13.52	AV	148.00	150	Horizontal	Pass
5	6897.500	54.02	74.0	19.98	Peak	346.00	100	Horizontal	Pass
5**	6897.500	44.94	54.0	9.06	AV	346.00	100	Horizontal	Pass
6	12964.987	53.41	74.0	20.59	Peak	43.00	200	Horizontal	Pass
6**	12964.987	44.41	54.0	9.59	AV	43.00	200	Horizontal	Pass

 $\pi/4$ -DQPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.500	44.50	74.0	29.50	Peak	169.00	200	Vertical	Pass
1**	1331.500	36.06	54.0	17.94	AV	169.00	200	Vertical	Pass
2	2440.800	89.17	74.0	-15.17	Peak	108.00	150	Vertical	N/A
2**	2440.800	87.22	54.0	-33.22	AV	108.00	150	Vertical	N/A
3	2666.700	50.20	74.0	23.80	Peak	247.00	100	Vertical	Pass
3**	2666.700	49.31	54.0	4.69	AV	247.00	100	Vertical	Pass
4	4817.500	50.52	74.0	23.48	Peak	153.00	150	Vertical	Pass
4**	4817.500	41.24	54.0	12.76	AV	153.00	150	Vertical	Pass
5	7883.250	54.05	74.0	19.95	Peak	307.00	300	Vertical	Pass
5**	7883.250	44.73	54.0	9.27	AV	307.00	300	Vertical	Pass
6	12471.175	53.45	74.0	20.55	Peak	45.00	200	Vertical	Pass
6**	12471.175	44.92	54.0	9.08	AV	45.00	200	Vertical	Pass

$\pi/4$ -DQPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1322.700	42.31	74.0	31.69	Peak	360.00	300	Horizontal	Pass
1**	1322.700	32.35	54.0	21.65	AV	360.00	300	Horizontal	Pass
2	2480.100	95.44	74.0	-21.44	Peak	242.00	200	Horizontal	N/A
2**	2480.100	94.61	54.0	-40.61	AV	242.00	200	Horizontal	N/A
3	4989.250	49.87	74.0	24.13	Peak	190.00	100	Horizontal	Pass
3**	4989.250	40.09	54.0	13.91	AV	190.00	100	Horizontal	Pass
4	7896.500	53.99	74.0	20.01	Peak	112.00	400	Horizontal	Pass
4**	7896.500	44.79	54.0	9.21	AV	112.00	400	Horizontal	Pass
5	12992.550	54.02	74.0	19.98	Peak	298.00	100	Horizontal	Pass
5**	12992.550	44.13	54.0	9.87	AV	298.00	100	Horizontal	Pass
6	16864.687	55.85	74.0	18.15	Peak	263.00	400	Horizontal	Pass
6**	16864.687	47.04	54.0	6.96	AV	263.00	400	Horizontal	Pass

 $\pi/4$ -DQPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.700	48.50	74.0	25.50	Peak	190.00	200	Vertical	Pass
1**	1328.700	38.84	54.0	15.16	AV	190.00	200	Vertical	Pass
2	2479.900	91.54	74.0	-17.54	Peak	146.00	100	Vertical	N/A
2**	2479.900	89.80	54.0	-35.80	AV	146.00	100	Vertical	N/A
3	5311.250	49.26	74.0	24.74	Peak	112.00	100	Vertical	Pass
3**	5311.250	47.74	54.0	6.26	AV	112.00	100	Vertical	Pass
4	5315.000	57.66	74.0	16.34	Peak	112.00	100	Vertical	Pass
4**	5315.000	43.19	54.0	10.81	AV	112.00	100	Vertical	Pass
5	12432.224	54.47	74.0	19.53	Peak	210.00	400	Vertical	Pass
5**	12432.224	44.16	54.0	9.84	AV	210.00	400	Vertical	Pass
6	17014.051	56.97	74.0	17.03	Peak	217.00	200	Vertical	Pass
6**	17014.051	46.95	54.0	7.05	AV	217.00	200	Vertical	Pass

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

GFSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2326.000	55.35	74.0	18.65	Peak	138.00	200	Horizontal	Pass
1**	2326.000	42.91	54.0	11.09	AV	138.00	200	Horizontal	Pass
2	2389.833	53.20	74.0	20.80	Peak	138.00	200	Horizontal	Pass
2**	2389.833	43.08	54.0	10.92	AV	138.00	200	Horizontal	Pass

GFSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.14	74.0	18.86	Peak	52.00	200	Horizontal	Pass
1**	2483.500	43.38	54.0	10.62	AV	52.00	200	Horizontal	Pass
2	2499.100	56.27	74.0	17.73	Peak	243.00	200	Horizontal	Pass
2**	2499.100	44.61	54.0	9.39	AV	243.00	200	Horizontal	Pass

$\pi/4$ -DQPSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2322.833	55.68	74.0	18.32	Peak	352.00	100	Horizontal	Pass
1**	2322.833	43.16	54.0	10.84	AV	352.00	100	Horizontal	Pass
2	2389.833	52.73	74.0	21.27	Peak	176.00	200	Horizontal	Pass
2**	2389.833	42.93	54.0	11.07	AV	176.00	200	Horizontal	Pass

$\pi/4$ -DQPSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	54.77	74.0	19.23	Peak	358.00	200	Horizontal	Pass
1**	2483.550	43.26	54.0	10.74	AV	358.00	200	Horizontal	Pass
2	2496.250	55.77	74.0	18.23	Peak	261.00	100	Horizontal	Pass
2**	2496.250	44.42	54.0	9.58	AV	261.00	100	Horizontal	Pass

ANNEX A TEST SETUP PHOTOS

Please refer the document “BL-SZ2550418-AR-1.pdf”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--