



802.11n(HT40)

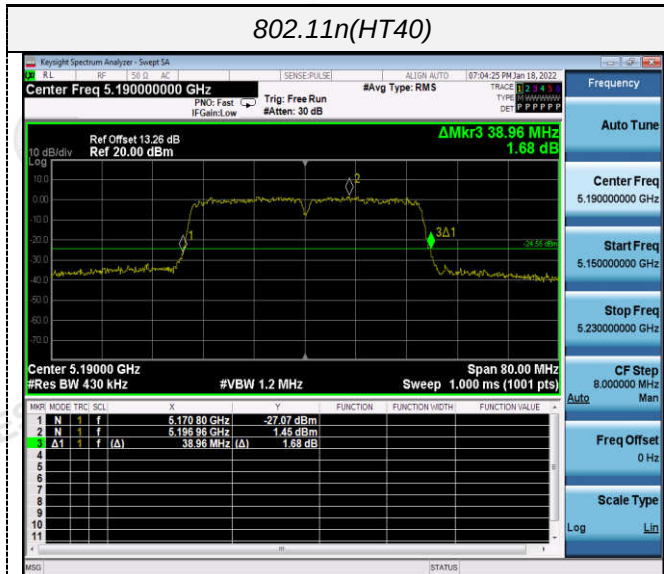

802.11ac(HT20)

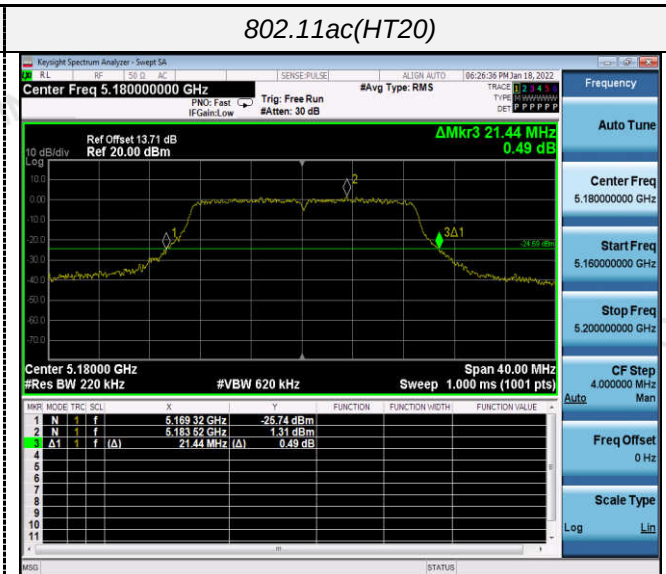


CH38




CH36



CH46

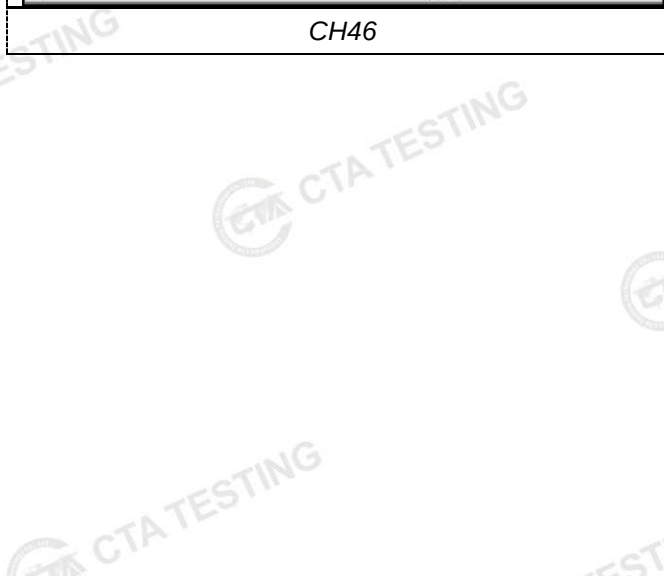


CH40

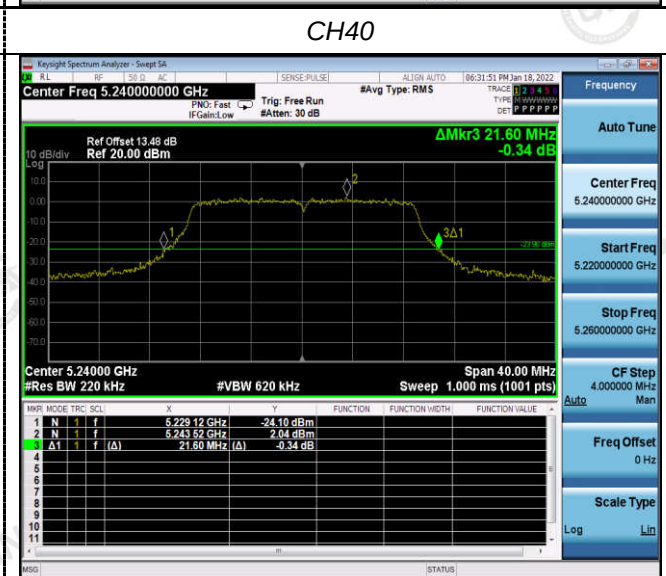


CH48


802.11ac(HT40)

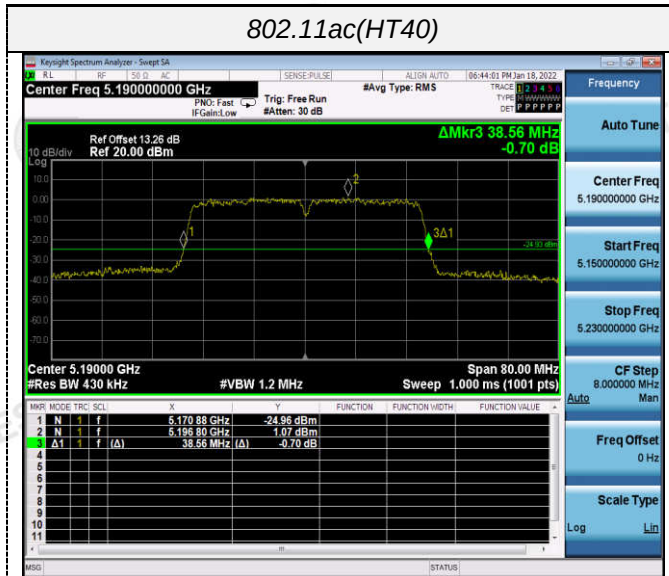

802.11ac(HT80)

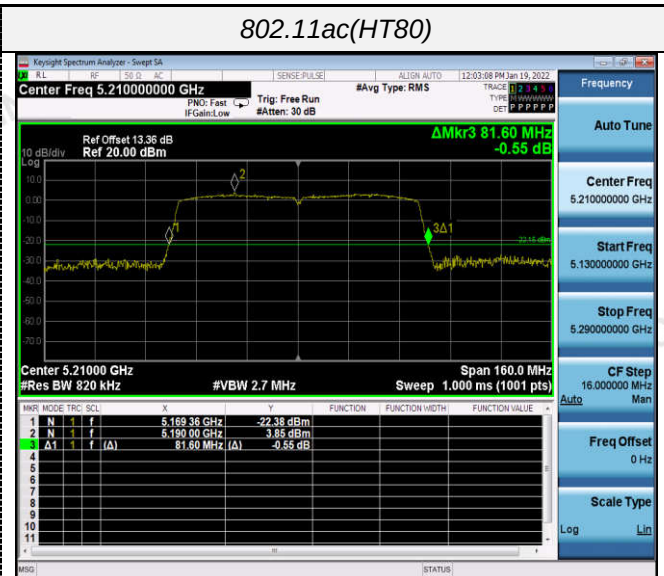


CH38

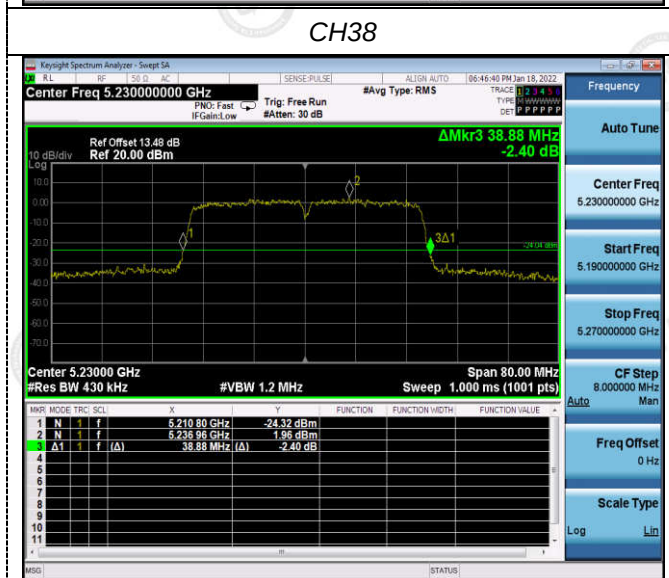


CH42




ANT 2

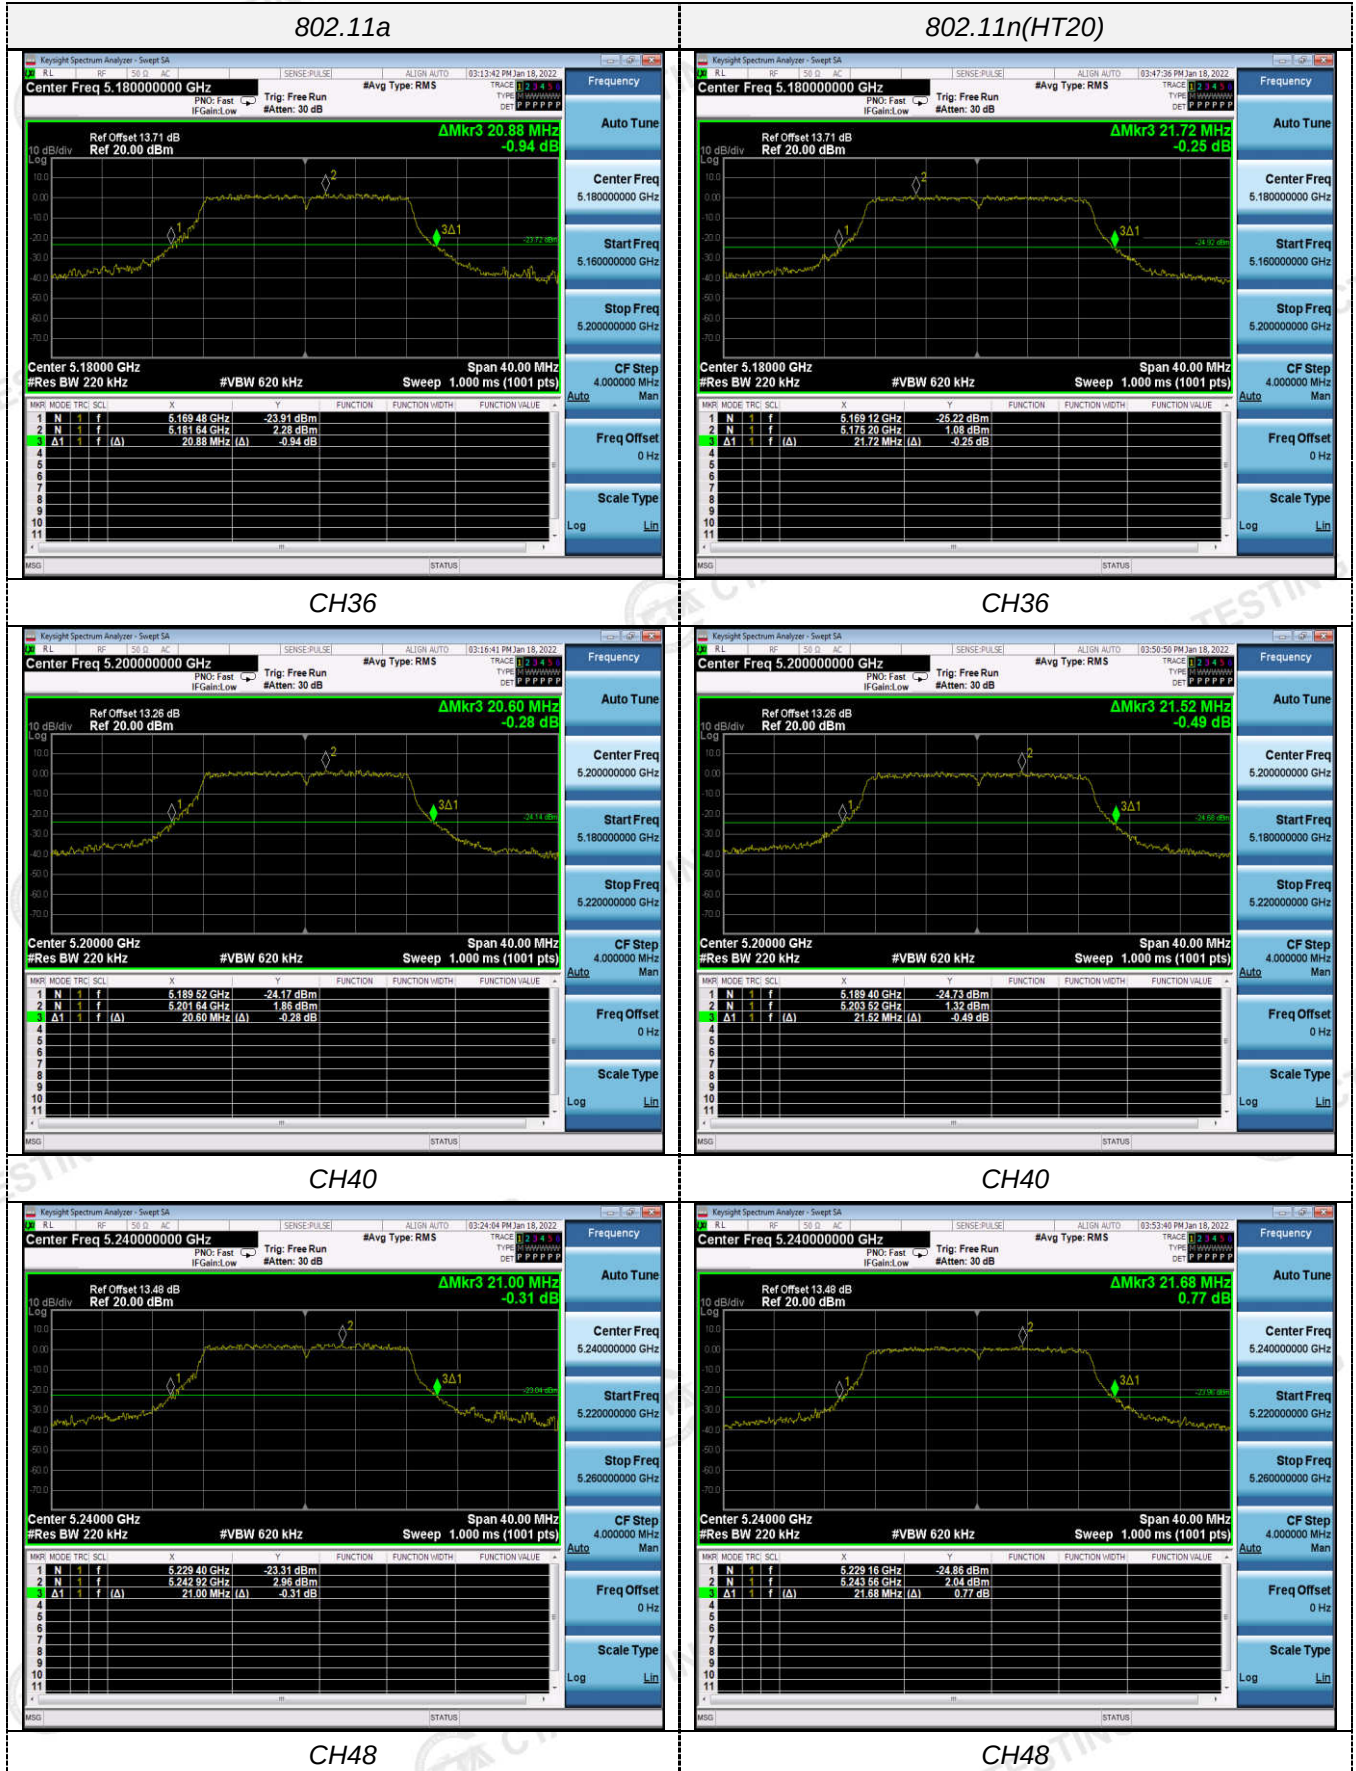

802.11n(HT40)

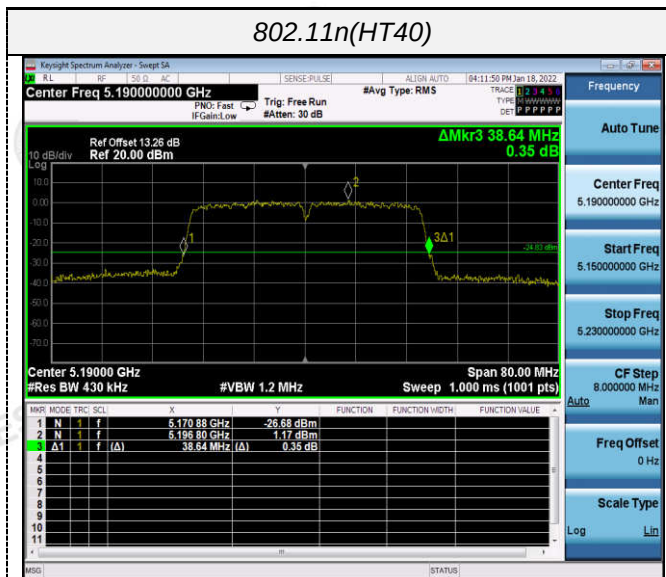

802.11ac(HT20)

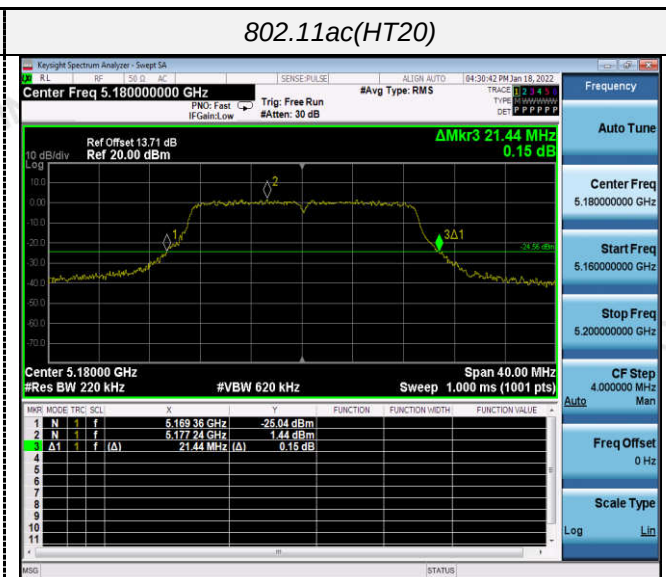

CH38



CH36



CH46




CH40




CH48

802.11ac(HT40)

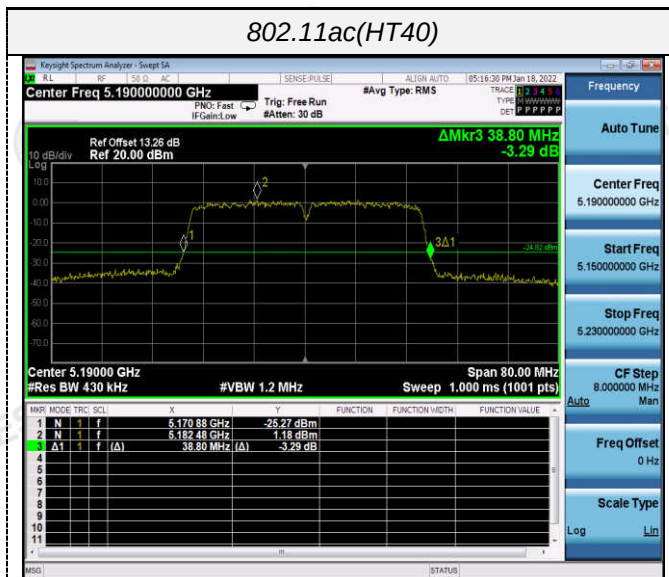

802.11ac(HT80)

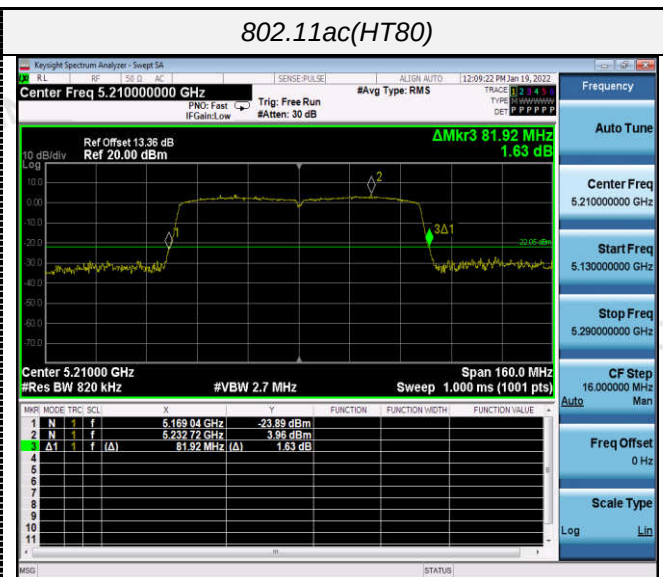

CH38



CH42



CH46

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results

ANT 1

Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.480	≥500KHz	Pass
		157	16.560		
		165	16.520		
802.11n(HT20)	U-NII 3	149	17.640		
		157	17.640		
		165	17.680		
802.11n(HT40)	U-NII 3	151	36.320		
		159	36.320		
802.11ac(HT20)	U-NII 3	149	17.720		
		157	17.640		
		165	17.640		
802.11ac(HT40)	U-NII 3	151	36.400		
		159	36.400		
802.11ac(HT80)	U-NII 3	155	76.320		

ANT 2


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.560	≥500KHz	Pass
		157	16.520		
		165	16.480		
802.11n(HT20)	U-NII 3	149	17.680		
		157	17.640		
		165	17.640		
802.11n(HT40)	U-NII 3	151	36.400		
		159	36.400		
802.11ac(HT20)	U-NII 3	149	17.640		
		157	17.680		
		165	17.640		
802.11ac(HT40)	U-NII 3	151	36.320		
		159	36.320		
802.11ac(HT80)	U-NII 3	155	76.320		

Test plot as follows:


ANT 1



802.11n(HT40)

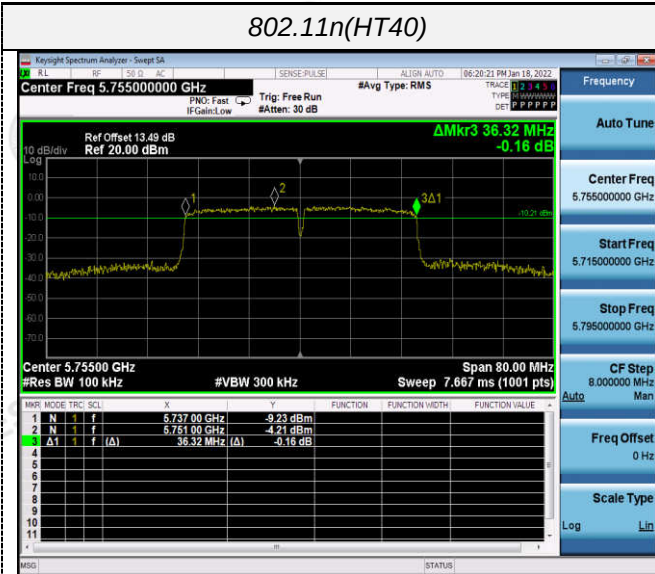

802.11ac(HT20)

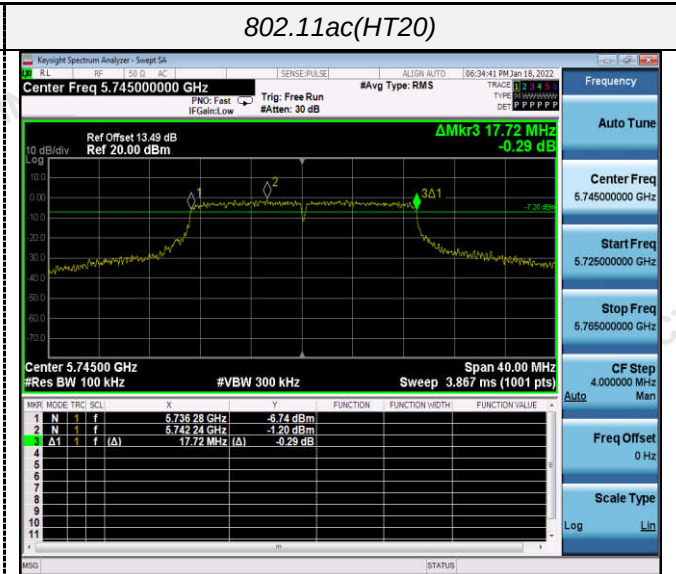

CH151




CH149



CH159




CH157

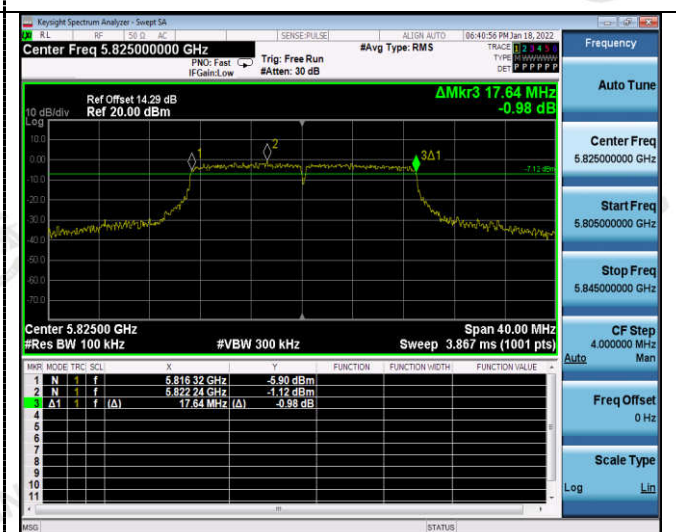


CH165


802.11ac(HT40)

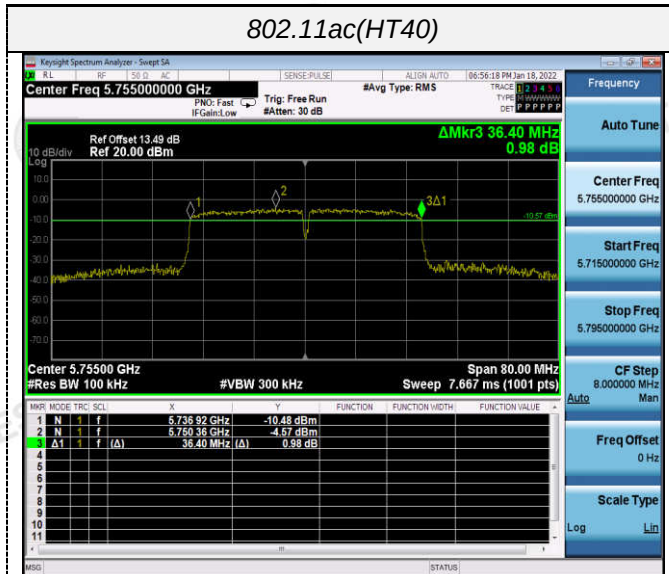

802.11ac(HT80)

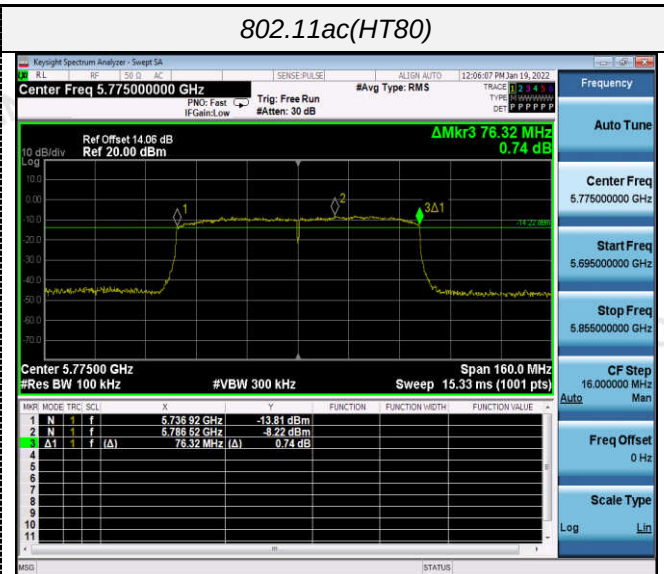

CH151

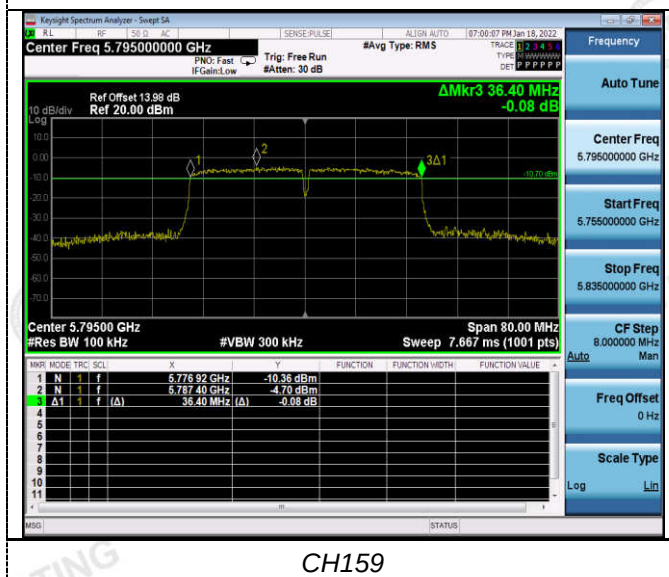

CH155




CH159


ANT 2




802.11n(HT40)

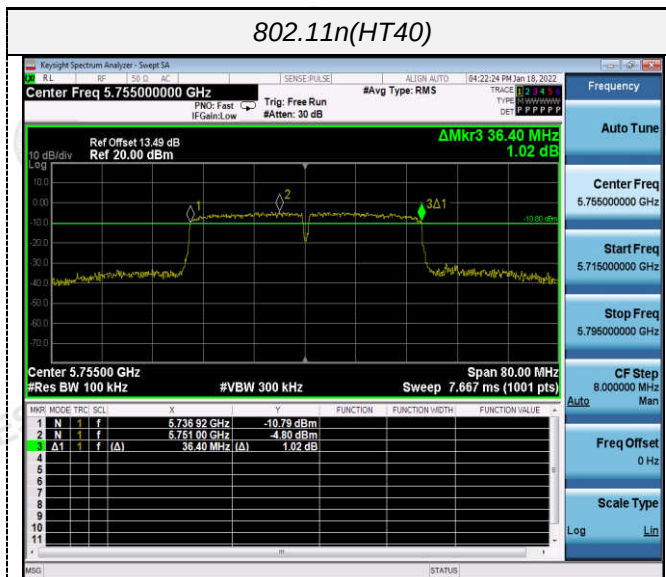


802.11ac(HT20)

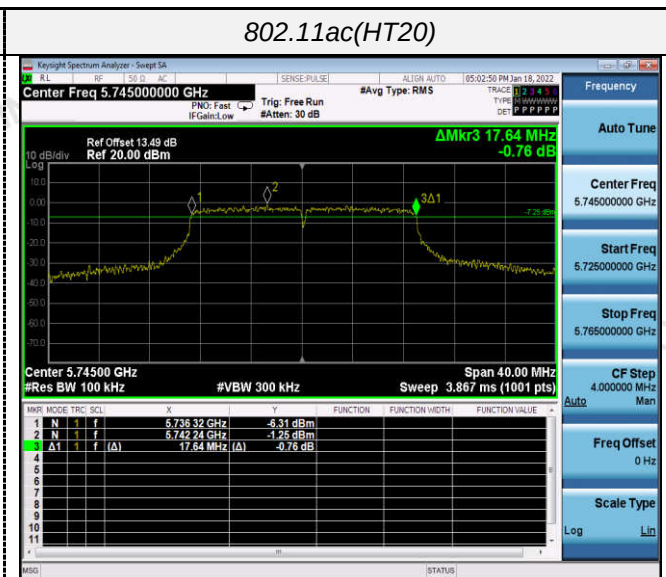


CH151

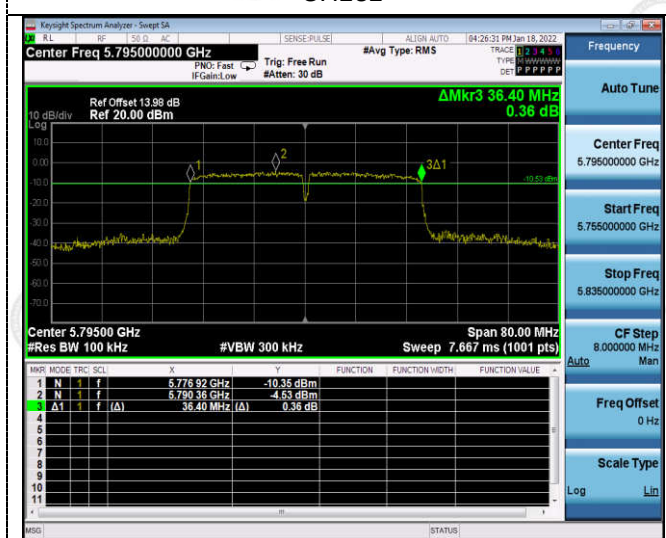


CH149

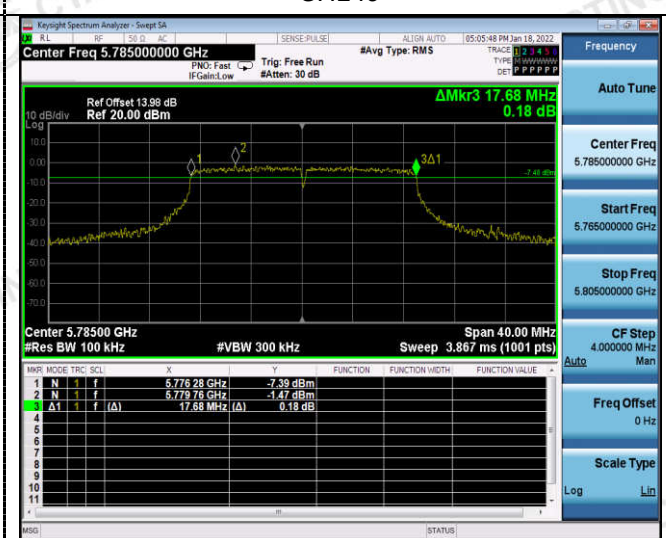


CH159

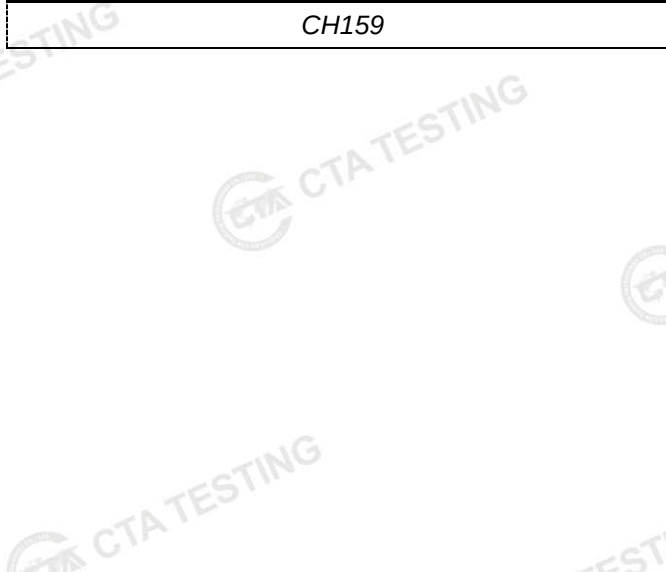

CH157

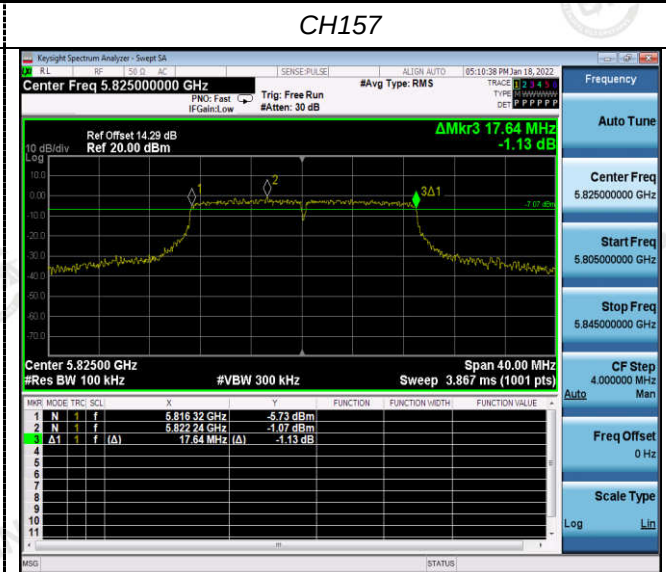

CH165

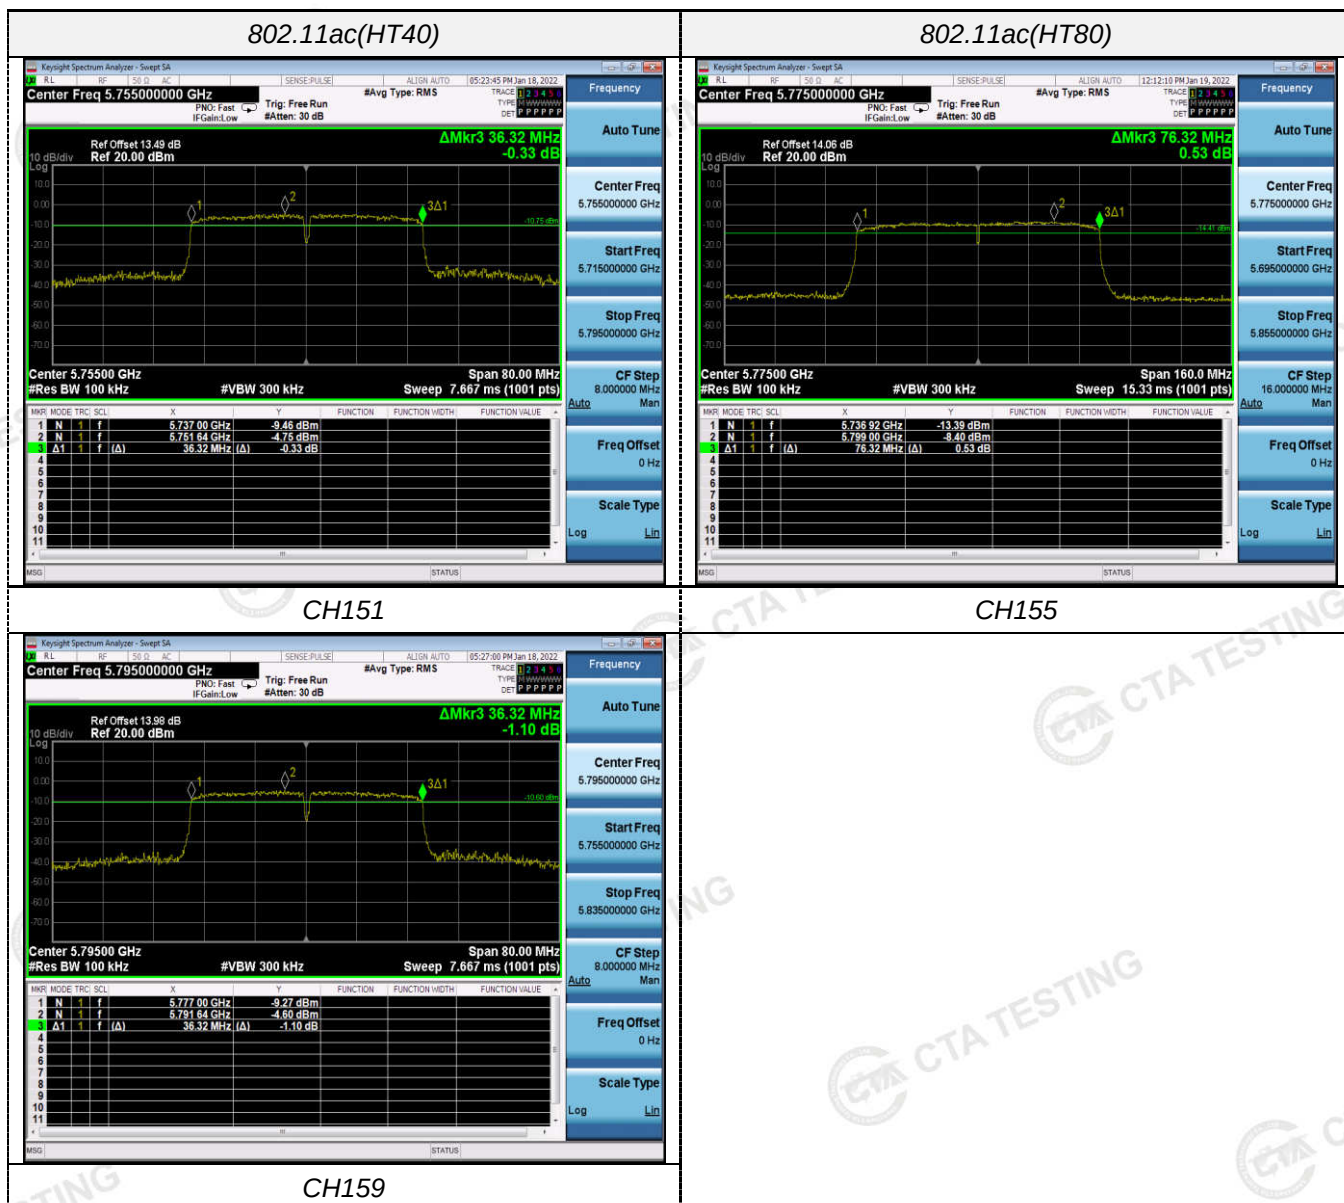


4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

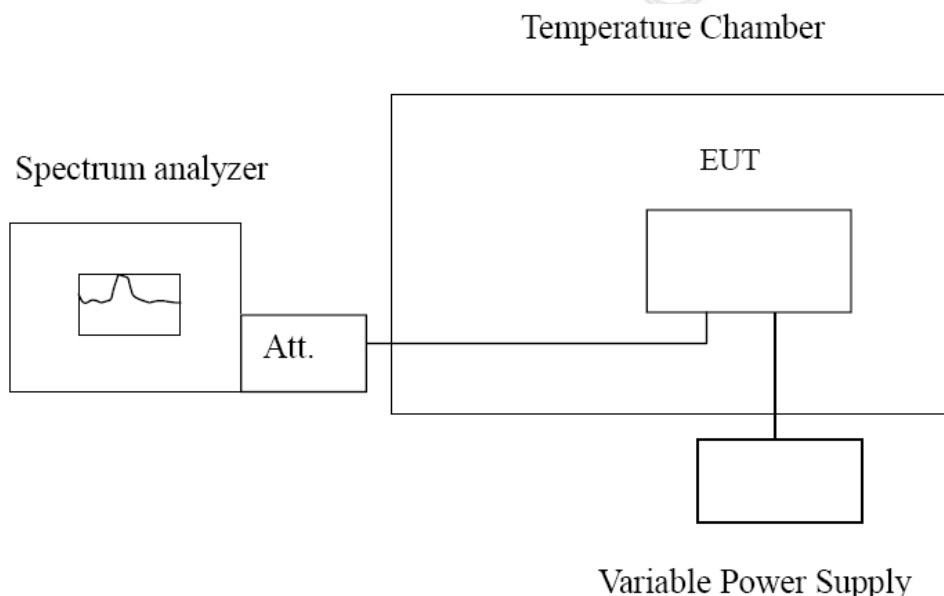

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.


TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
AC120	-30	115.21	0.022241	Within the band of operation	Pass
	-20	168.32	0.032494		
	-10	145.87	0.028160		
	0	128.12	0.024734		
	10	147.21	0.028419		
	20	101.53	0.019600		
	30	153.79	0.029689		
	40	139.42	0.026915		
	50	125.89	0.024303		
AC110	25	175.31	0.033844	Within the band of operation	Pass
AC132	25	133.46	0.025764		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
AC120	-30	154.28	0.026855	Within the band of operation	Pass
	-20	135.84	0.023645		
	-10	160.42	0.027923		
	0	167.21	0.029105		
	10	135.18	0.023530		
	20	122.86	0.021386		
	30	117.29	0.020416		
	40	131.57	0.022902		
	50	147.63	0.025697		
AC110	25	146.82	0.025556	Within the band of operation	Pass
AC132	25	129.53	0.022547		

5 Test Setup Photos of the EUT

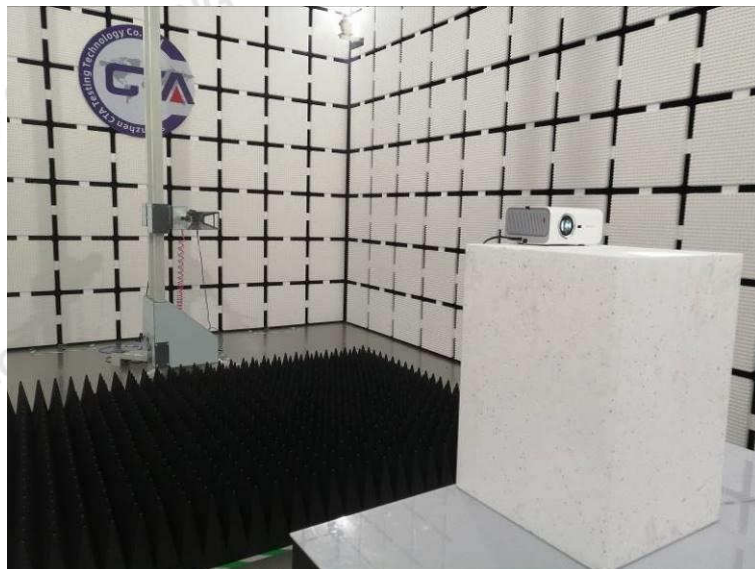

6 Photos of the EUT

Reference to the test report No. **CTA22011400701**

***** End of Report *****