

EVALUATION REPORT for Certification (MPE)

Applicant: COZMOS

RM210, business incubation center

Yeungnam Univ., Gyeongsan,

South Korea 38541

Attn: Changhwa Lee / CEO

Date of Issue: Feb. 14, 2022

Order Number: GETEC-C1-21-628

Test Report Number: GETEC-E3-21-105

Test Site: GUMI UNIVERSITY EMC CENTER

CAB Designation Number: KR0033

RESPONSIBLE PARTY : GSI SYSTEMS INC.

ADDRESS : 860 E. La Habra Blvd. #220A La Habra, CA, 90631, USA

CONTACT PERSON : Jaemin Lee

Rule Part(s) : FCC Part 1

Test Procedure : FCC Part 1, Subpart I, section 1.1310 and KDB 680106 D01 V03

EUT Type : FACIAL CLEANSING BRUSH

Type of Authority : Certification


Model Name : CM02

Trade Mark : REISSU


This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in 47 CFR Part 1, Subpart I, section 1.1310 and KDB 680106 D01 V03

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,


**Jong-Wook Park, Senior Engineer
GUMI UNIVERSITY EMC CENTER**


Reviewed by,


**Hyun Kim, Technical Manager
GUMI UNIVERSITY EMC CENTER**



Version

Test Report No.	Date	Description
GETEC-E3-21-105	Feb. 14, 2022	- First Approval Report

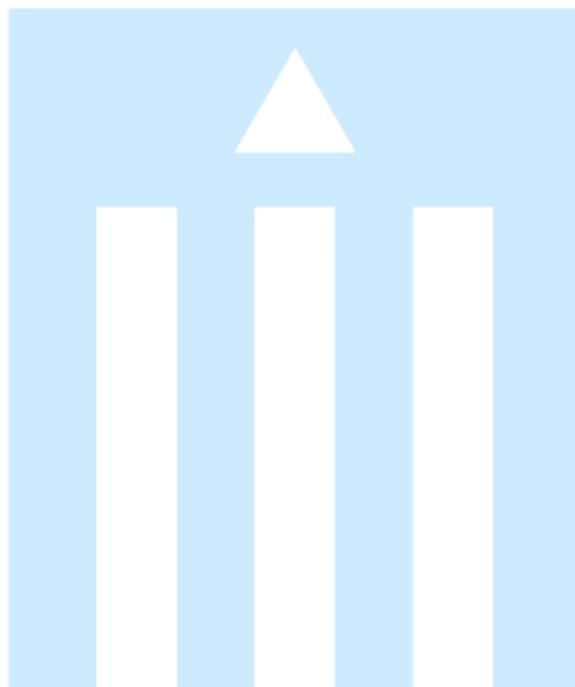




CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT	6
3.2 DEFINITION OF MODELS	6
3.3 SUPPORT EQUIPMENT / CABLES USED	7
3.4 MODIFICATION ITEM(S)	7
4. DESCRIPTION OF TESTS	8
4.1 TEST CONDITION	8
5. TEST EQUIPMENT USED	8
6. TEST RESULT	9
6.1 TEST SETUP	9
6.2 MEASUREMENT PROCEDURE	9
6.3 EQUIPMENT APPROVAL CONSIDERATIONS	10
6.4 ENVIRONMENTAL EVALUATION AND EXPOSURE LIMIT ACCORDING TO FCC CFR 47 PART 1, 1.1307(B), 1.131011	11
6.5 E AND H FIELD STRENGTH	12
6.5.1 FIELD STRENGTH MEASURE VALUE AT 15 CM FROM THE EDGES SURROUNDING THE EUT	12

APPENDIX A – TEST SETUP PHOTOGRAPH (MPE)





Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: COZMOS

Applicant Address: RM210, business incubation center Yeungnam_ Univ.,
Gyeongsan, South Korea 38541

Applicant: COZMOS

Applicant Address: RM210, business incubation center Yeungnam_ Univ.,
Gyeongsan, South Korea 38541

Contact Person: Changhwa Lee, CEO

Tel. Number: +82-10-2571-7531

- **FCC ID.** 2A4H4CM02
- **EUT Type** FACIAL CLEANSING BRUSH
- **Model Name** CM02
- **Rule Part(s)** FCC Part 1
- **Type of Authority** Certification
- **Test Procedure(s)** FCC Part 1, Subpart I, section 1.1310 and KDB 680106 D01 V03
- **Dates of Test** Feb. 09 , 2022
- **Place of Test** GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, South Korea.
- **Test Report Number** GETEC-E3-21-105
- **Dates of Issue** Feb. 14, 2022






2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **COZMOS. FACIAL CLEANSING BRUSH (Model Name: CM02)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, South Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

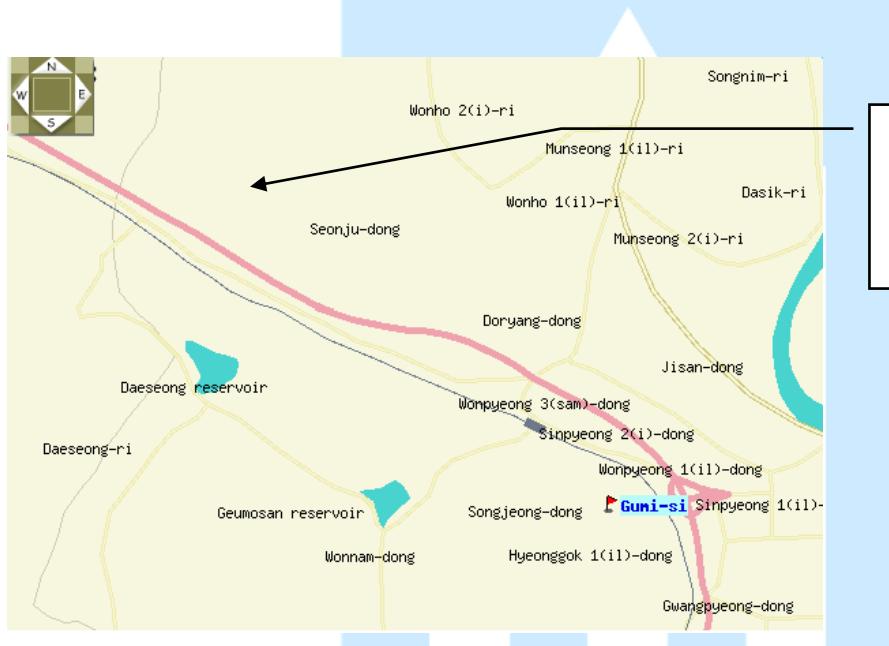

GUMI UNIVERSITY EMC CENTER
37 Yaeun-ro, Gumi-si,
Gyeongsangbuk-do, 730-711,
South Korea
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **COZMOS. FACIAL CLEANSING BRUSH (Model Name: CM02) FCC ID.: 2A4H4CM02**

Type of Equipment	FACIAL CLEANSING BRUSH
Model Name	CM02
Serial Number	Prototype
RF Frequency	145 kHz
External connector	DC input 1 EA
Rated Voltage	Input : DC 5 V
Output Electricity Power	Max 1.5 W
Antenna type	WPT Coil
weight	80 g(Cleanser) + 100 g(Charger)

3.2 Definition of models

- None.



3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
AC-DC Adapter	Apple, Inc.	A1487	S/N: None. FCC ID.: None.

See "Appendix E – Test Setup Photographs" for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None.	-	-	S/N: -. FCC ID.: -.

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and DC power supply	0.50 m Unshielded.

3.4 Modification Item(s)

- . None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: DC 5 V

- Operating condition during the test(s) :

This device has been tested in the configurations of charging mode

Charging Current	Support Equipment	Comment
300 mA	Cleanger	

5. Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - HI-6105	ETS LINDGREN	Electric field Probe	203871	Jan. 21, 2022
■ - ELT-400	Narda Safety Test Solutions GmbH	EMF Tester	N-0896	Feb. 10, 2022


All test equipment used is calibrated on a regular basis.





6. Test Result

6.1 Test Setup

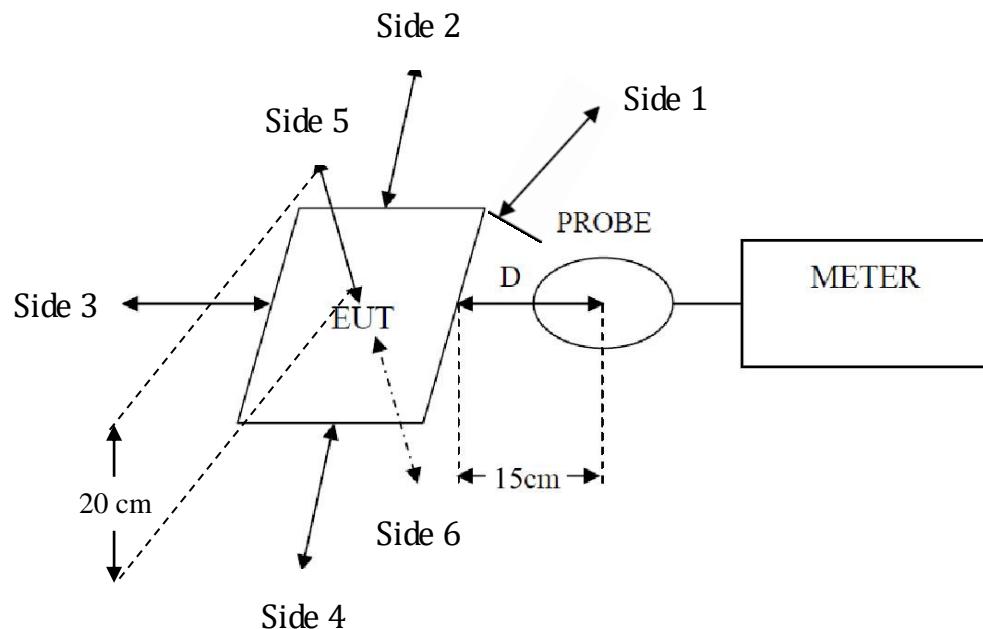

6.2 Measurement Procedure

The RF exposure test was performed on table in anechoic chamber. The measurement probe was placed at test distance (15 cm) which is between the transmitting coils and the geometric center of probe. But, the distance from the top surface of the device to the measurement probe is 20 cm. The highest emission level was recorded and compared with limit as soon as measurement of each points (Side 1 ~ 6) were completed. The EUT were measured according to the dictates of KDB 680106 D01v03.



6.3 Equipment Approval Considerations.

The EUT does with item 5.a) of KDB 680106 D01v03

a) Power transfer frequency is less than 1 MHz

- The device operate in the frequency range from 145 kHz.

b) Output power from each primary coil is less than 15 watts.

- The maximum field strength of fundamental : 73.37 dB μ V/m at 3 m. The EIRP calculation is reference to KDB 789033

$$\text{※ EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} + 20\log(\text{d[meters]}) - 104.77 - 4.8 \text{ dB, d = 3 m}$$

$$\text{※ } 73.37 \text{ dB}\mu\text{V/m} - 95.2 - 4.8 = -26.63 \text{ dBm EIRP}$$


$$\text{※ The output power from primary coil is } 0.0015 \text{ mW}$$

c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils

- The EUT consists of a single charging coil under coupling only between individual coil pairs. See "Appendix G: Inside Photos - Pages 5 and 6."

d) Client device is inserted in or placed directly in contact with the transmitter

- Client device is placed directly in contact with the transmitter. Refer to following photo.

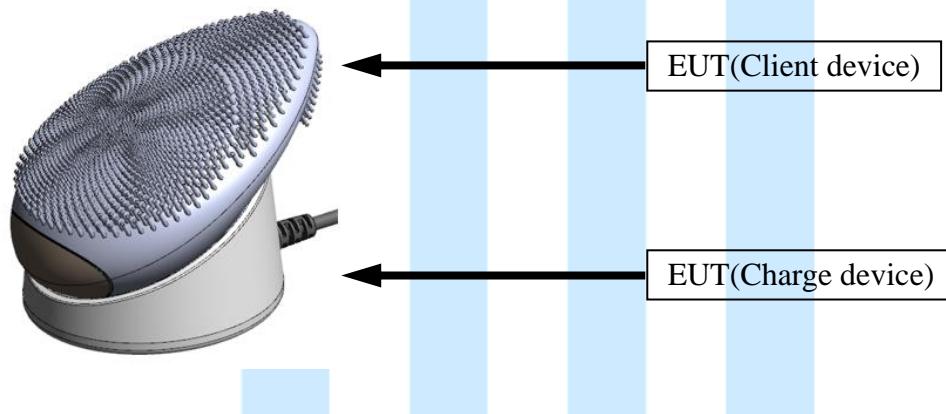

e) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

f) The aggregate H-fields strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

- The EUT field strength levels are compiled to 50 % MPE limits. Refer to following test results.

- 0.207 A/m (maximum measure value) < 0.815 A/m (30% MPE limit)





6.4 Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

§1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter

Table 1 – LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational /Control Exposures				
0.3 – 3.0	614	1.63	*(100)	6
3.0 – 30	1842/f	4.89/f	*(900/f ²)	6
30 – 300	61.4	6.163	1.0	6
300 – 1 500			f/300	6
1 500 – 100 000			5	6
(B) Limits for General Population / Uncontrol Exposures				
0.3 – 1.34	614	1.63	*(100)	30
1.34 – 30	824/f	2.19	*(180/f ²)	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500			f/1 500	30
1 500 – 100 000			1.0	30

F=frequency in MHz

* = Plane wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.





6.5 E and H field strength

Temperature : 18.9 °C
Relative Humidity : 23.9 % R.H.

Test mode : Wireless charging mode(full load: 300 mA state) & Idle mode

6.5.1 Field Strength measure value at 15 cm from the edges surrounding the EUT

Electric Field Strength

Test Position	Probe Measure Result(V/m)		Limit(V/m)	50 % Limit(V/m)
	Charge mode	Idle mode		
Side 1	1.091	1.026	614	307
Side 2	1.491	1.527	614	307
Side 3	0.772	1.149	614	307
Side 4	0.943	0.943	614	307
Side 5 ¹⁾	0.955	0.755	614	307
Side 6	1.061	1.068	614	307

1) Measurement distance of Side 5 is 20 cm.

Magnetic Field Strength

Test Position	Probe Measure Result(A/m)		Limit(A/m)	50 % Limit(A/m)
	Charge mode	Idle mode		
Side 1	0.156	0.168	1.63	0.815
Side 2	0.163	0.168	1.63	0.815
Side 3	0.138	0.146	1.63	0.815
Side 4	0.143	0.156	1.63	0.815
Side 5 ¹⁾	0.171	0.207	1.63	0.815
Side 6	0.194	0.195	1.63	0.815

1) Measurement distance of Side 5 is 20 cm.

- The end -

