

TEST REPORT

Reference No...... : WTX22X02022926W-2
FCC ID : 2A4K9-PROU9
Applicant : YABER TECHNOLOGIES CO.,LIMITED
Address : Room 406, 4 Floor, B Building, BanTian International Center, HuanCheng
South Road, BanTian Street, LongGang District, Shenzhen
Manufacturer : YABER TECHNOLOGIES CO.,LIMITED
Address : Room 406, 4 Floor, B Building, BanTian International Center, HuanCheng
South Road, BanTian Street, LongGang District, Shenzhen
Product Name : LED Projector
Model No...... : Pro U9
Standards : FCC Part 15.247
Date of Receipt sample : 2022-02-21
Date of Test..... : 2022-02-21 to 2022-04-01
Date of Issue : 2022-04-01
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE.....	12
3.2 EVALUATION INFORMATION	12
4. POWER SPECTRAL DENSITY	13
4.1 STANDARD APPLICABLE.....	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE.....	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
5. DTS BANDWIDTH.....	14
5.1 STANDARD APPLICABLE.....	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE.....	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. RF OUTPUT POWER	15
6.1 STANDARD APPLICABLE.....	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE.....	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
7.1 STANDARD APPLICABLE.....	16
7.2 TEST PROCEDURE.....	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
7.4 SUMMARY OF TEST RESULTS/PLOTS	18
8. OUT OF BAND EMISSIONS.....	22
8.1 STANDARD APPLICABLE.....	22
8.2 TEST PROCEDURE.....	22
8.3 SUMMARY OF TEST RESULTS/PLOTS	23
9. CONDUCTED EMISSIONS	32
9.1 TEST PROCEDURE.....	32
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	32
9.3 TEST RECEIVER SETUP	32
9.4 SUMMARY OF TEST RESULTS/PLOTS	32
APPENDIX SUMMARY	35
APPENDIX A.....	36
APPENDIX B.....	41
APPENDIX C.....	46
APPENDIX D.....	51
APPENDIX PHOTOGRAPHS.....	59

Report version

Version No.	Date of issue	Description
Rev.00	2022-04-01	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	LED Projector
Trade Name:	/
Model No.:	Pro U9
Adding Model(s):	Y9, PRO Y9, Pro Y9
Rated Voltage:	AC 100V-240V, 50/60Hz
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Pro U9, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	15.60dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	4.12dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.50	Unshielded	Without Ferrite
HDMI Cable	1.50	Unshielded	Without Ferrite
AV Cable	1.02	Unshielded	Without Ferrite
Audio-out Cable	0.90	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	EB12648265
U disk	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26

SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2021-12-03	2022-12-02
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal	Agilent	N5182A	MY4707020	2022-03-22	2023-03-21

	Generator			2		
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

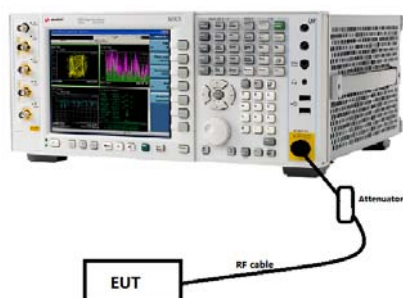
This product has an integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram



4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots

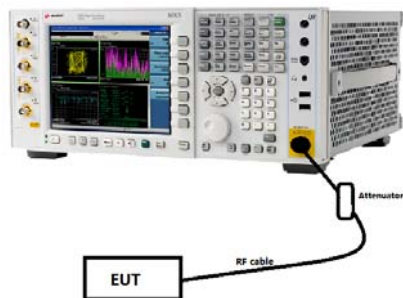
Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram



5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots

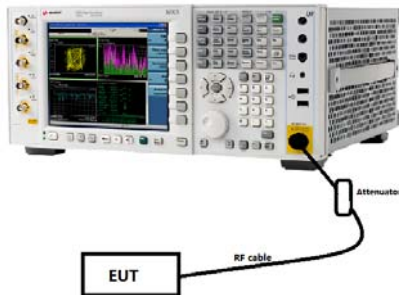
Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram



6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

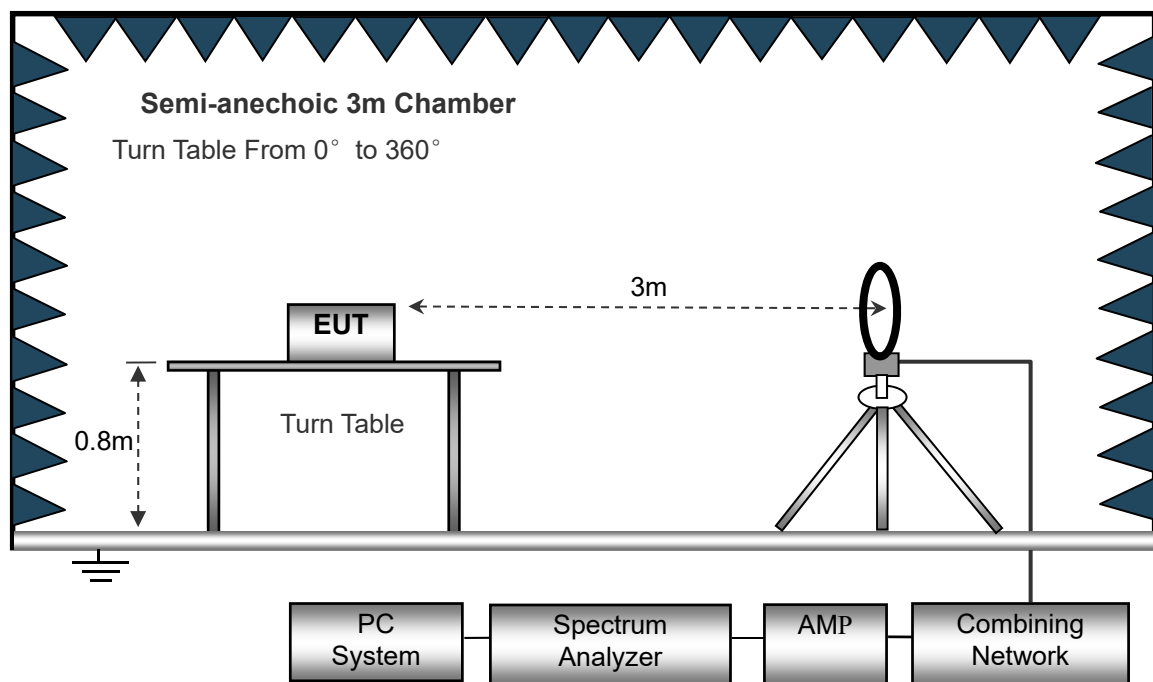
7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



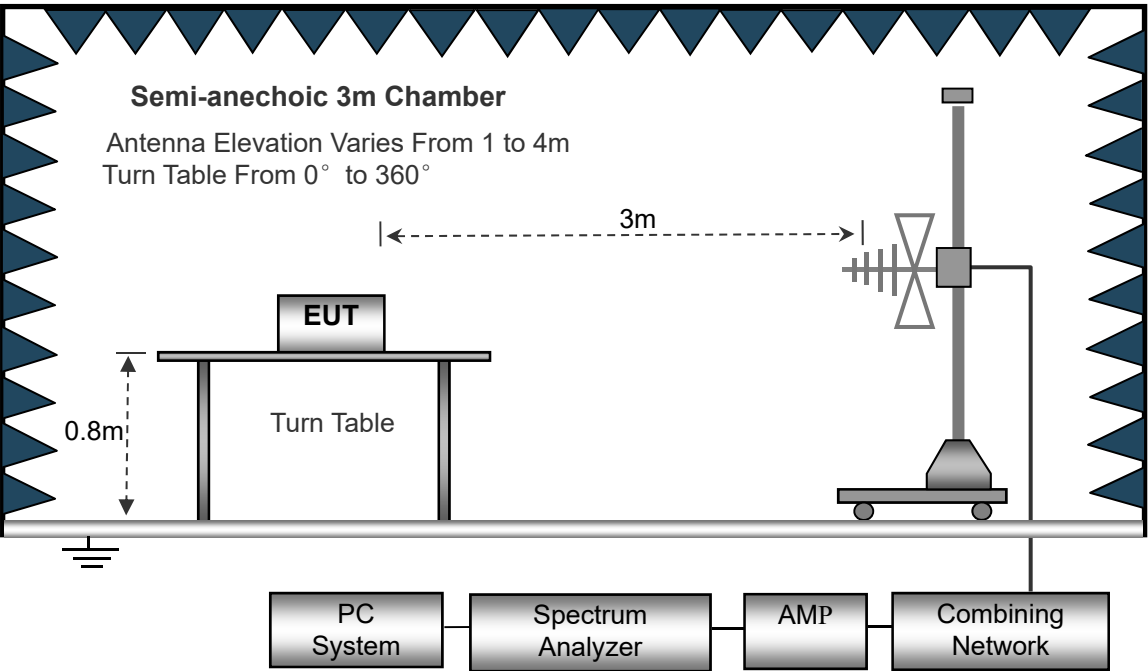The test setup for emission measurement from 30MHz to 1GHz.



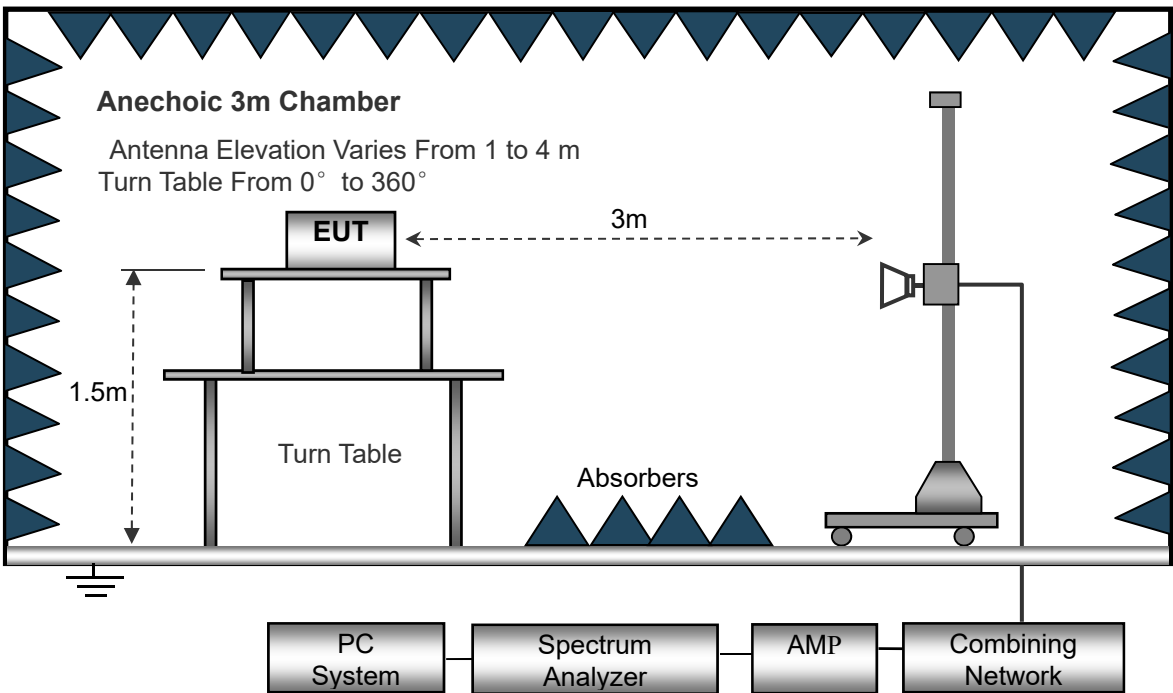The test setup for emission measurement above 1GHz.



Frequency :9kHz-30MHz RBW=10KHz, VBW =30KHz Sweep time= Auto Trace = max hold Detector function = peak	Frequency :30MHz-1GHz RBW=120KHz, VBW=300KHz Sweep time= Auto Trace = max hold Detector function = peak, QP	Frequency :Above 1GHz RBW=1MHz, VBW=3MHz(Peak), 10Hz(AV) Sweep time= Auto Trace = max hold Detector function = peak, AV
---	--	--

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.
All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.*


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Horizontal

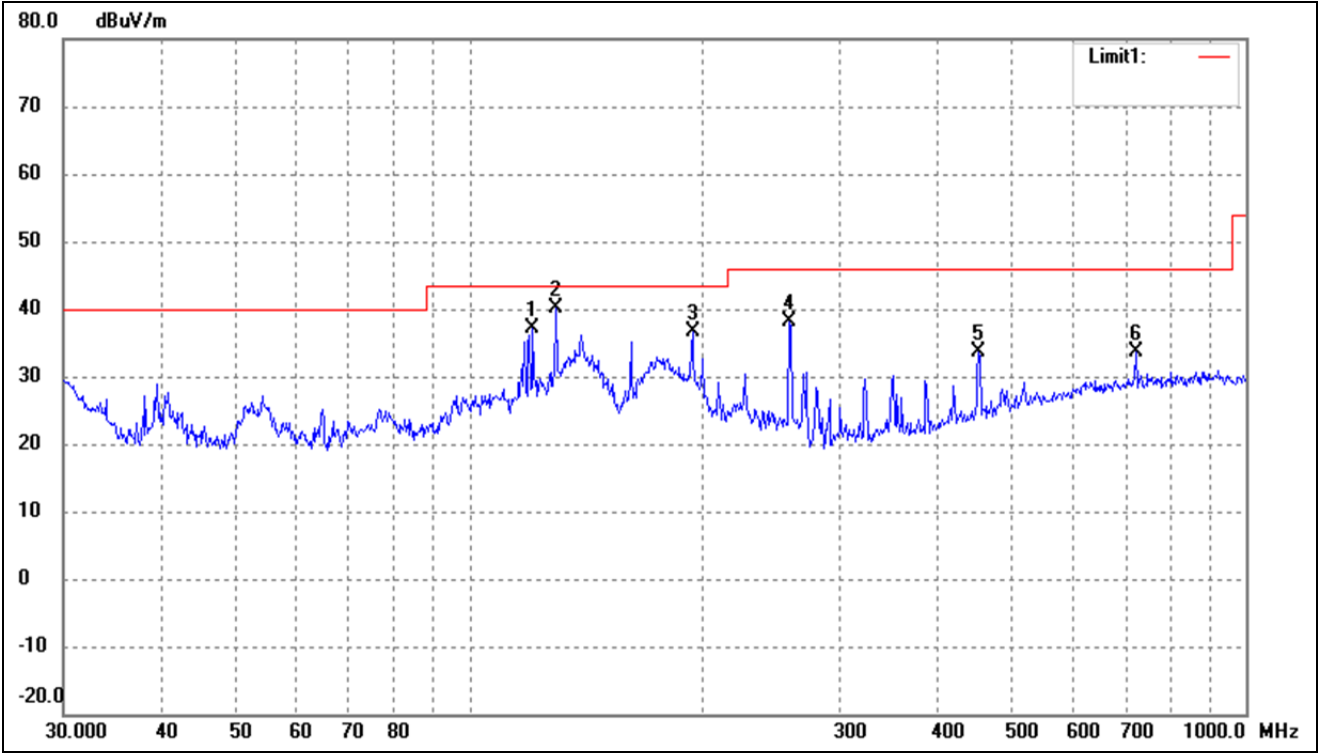

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	120.6991	46.96	-9.72	37.24	43.50	-6.26	-	-	peak
2	129.4678	51.38	-11.33	40.05	43.50	-3.45	-	-	peak
3	193.7728	46.59	-9.91	36.68	43.50	-6.82	-	-	peak
4	258.3264	46.10	-8.09	38.01	46.00	-7.99	-	-	peak
5	452.7197	36.00	-2.49	33.51	46.00	-12.49	-	-	peak
6	721.7259	32.14	1.57	33.71	46.00	-12.29	-	-	peak

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Vertical

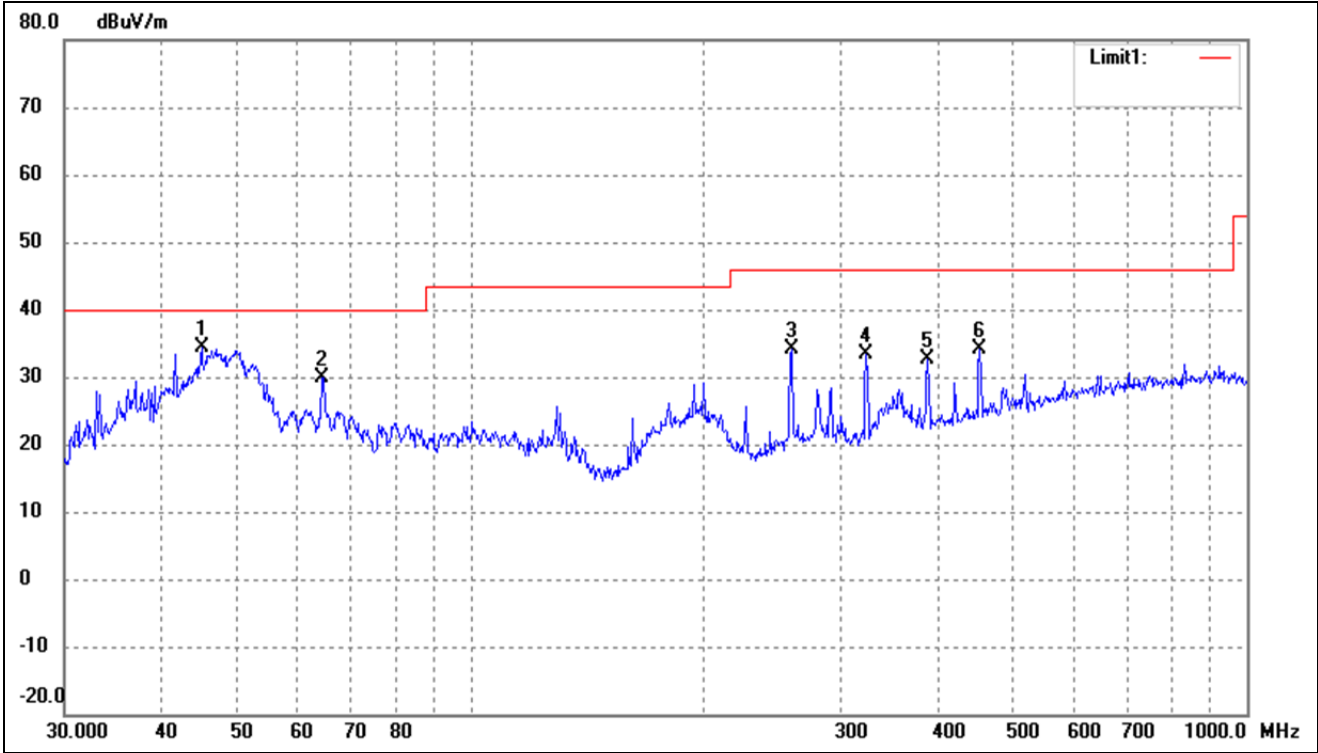

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0583	41.45	-6.98	34.47	40.00	-5.53	-	-	peak
2	64.4331	39.11	-9.20	29.91	40.00	-10.09	-	-	peak
3	259.2338	42.30	-8.06	34.24	46.00	-11.76	-	-	peak
4	323.3204	39.57	-6.23	33.34	46.00	-12.66	-	-	peak
5	387.9920	36.79	-4.25	32.54	46.00	-13.46	-	-	peak
6	452.7197	36.55	-2.49	34.06	46.00	-11.94	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	51.62	-6.07	45.55	74.00	-28.45	H	PK
7236.000	50.26	-1.63	48.63	74.00	-25.37	H	PK
4824.000	50.84	-6.07	44.77	74.00	-29.23	V	PK
7236.000	48.97	-1.63	47.34	74.00	-26.66	V	PK
Middle Channel-2437MHz							
4874.000	51.59	-5.94	45.65	74.00	-28.35	H	PK
7311.000	48.88	-1.59	47.29	74.00	-26.71	H	PK
4874.000	52.24	-5.94	46.30	74.00	-27.70	V	PK
7311.000	48.67	-1.59	47.08	74.00	-26.92	V	PK
High Channel-2462MHz							
4924.000	50.97	-5.81	45.16	74.00	-28.84	H	PK
7386.000	48.41	-1.55	46.86	74.00	-27.14	H	PK
4924.000	50.82	-5.81	45.01	74.00	-28.99	V	PK
7386.000	48.22	-1.55	46.67	74.00	-27.33	V	PK

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

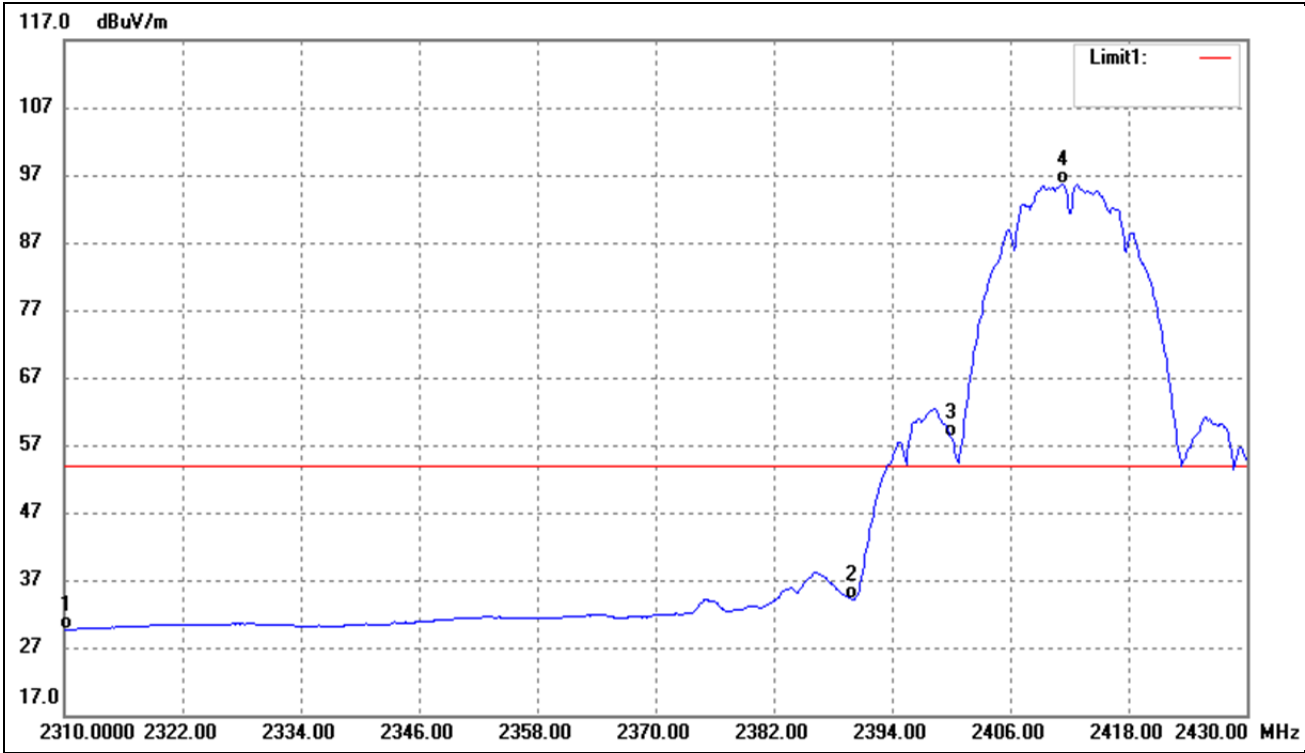


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	40.48	-10.82	29.66	54.00	-24.34	Average Detector
	2310.000	52.31	-10.82	41.49	74.00	-32.51	Peak Detector
2	2390.000	44.88	-10.70	34.18	54.00	-19.82	Average Detector
	2390.000	56.50	-10.70	45.80	74.00	-28.20	Peak Detector
3	2400.000	68.89	-10.69	58.20	Delta=37.55dBc		Average Detector
4	2411.280	106.43	-10.68	95.75			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

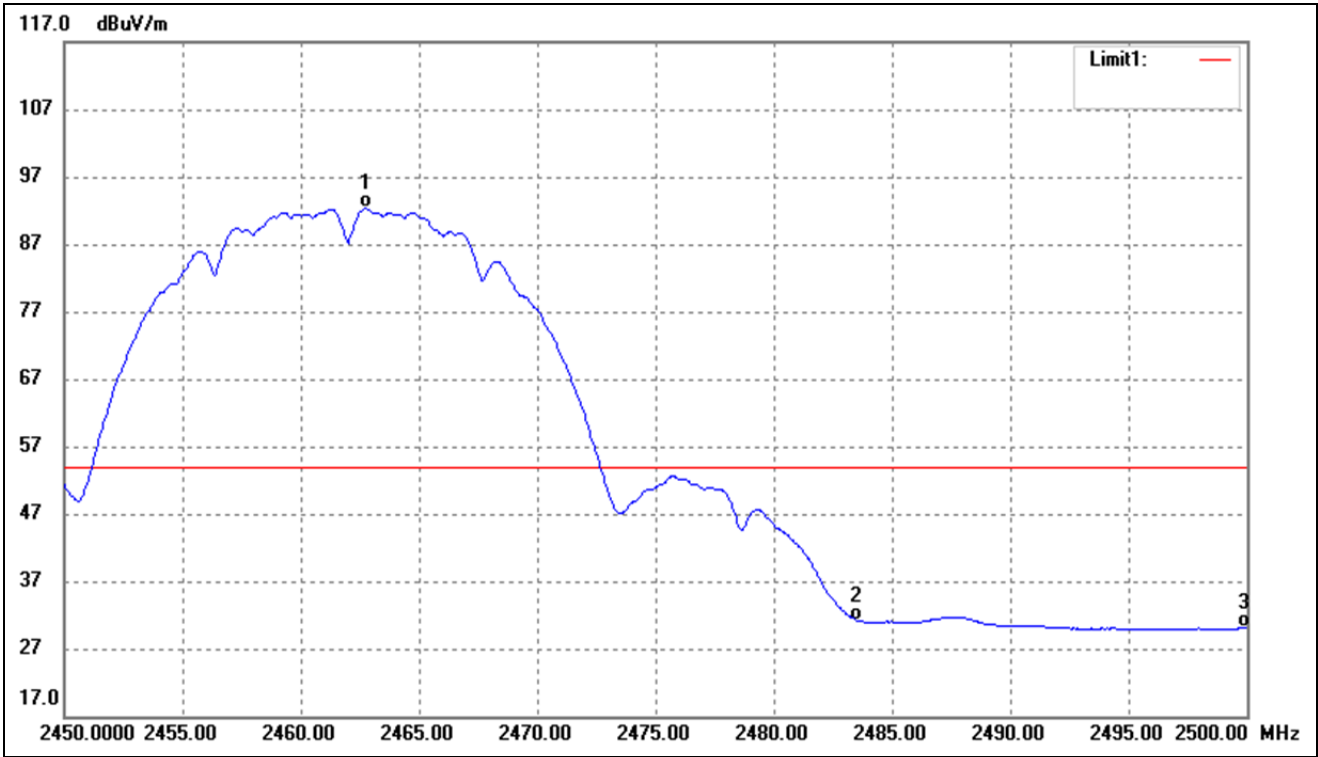


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.750	102.87	-10.60	92.27	/	/	Average Detector
	2463.050	107.83	-10.60	97.23	/	/	Peak Detector
2	2483.500	41.82	-10.58	31.24	54.00	-22.76	Average Detector
	2483.500	53.77	-10.58	43.19	74.00	-30.81	Peak Detector
3	2500.000	40.59	-10.55	30.04	54.00	-23.96	Average Detector
	2500.000	52.43	-10.55	41.88	74.00	-32.12	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

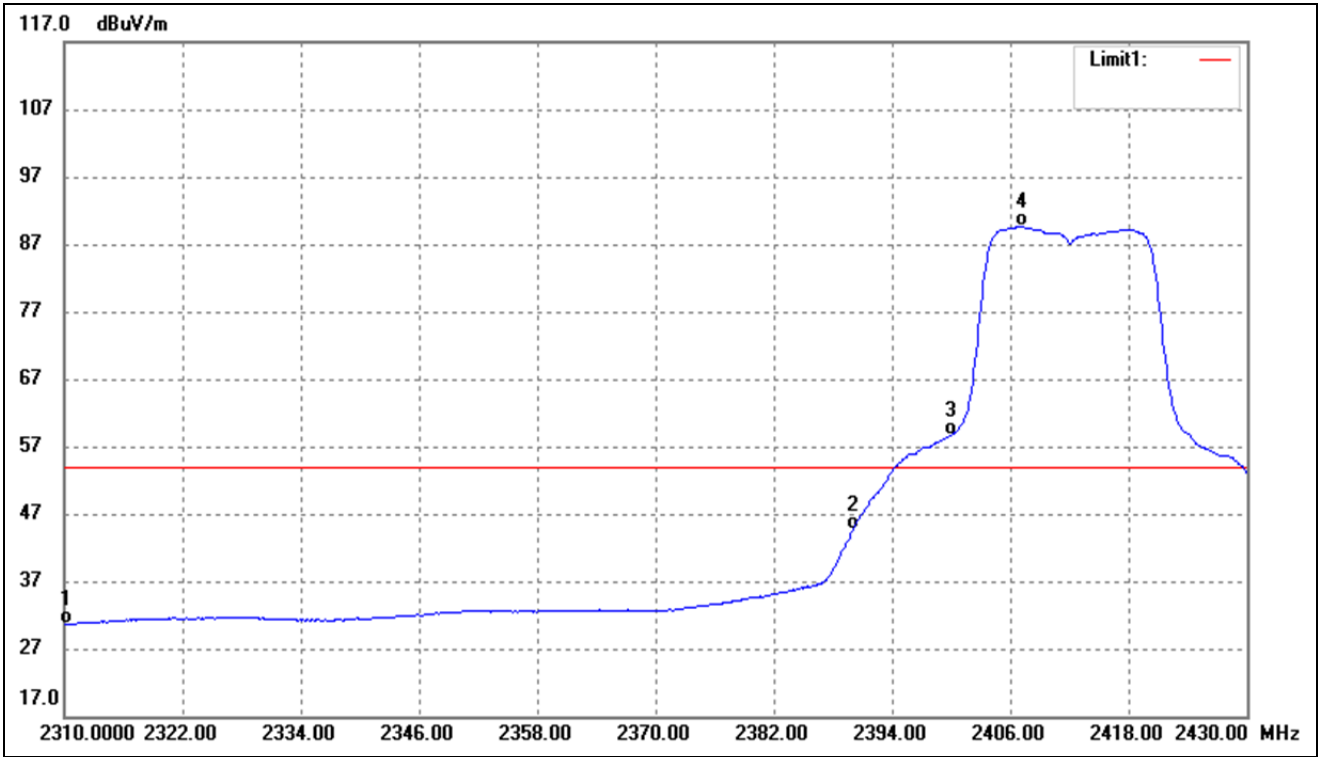


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.43	-10.82	30.61	54.00	-23.39	Average Detector
	2310.000	53.32	-10.82	42.50	74.00	-31.50	Peak Detector
2	2390.000	55.37	-10.70	44.67	54.00	-9.33	Average Detector
	2390.000	74.99	-10.70	64.29	74.00	-9.71	Peak Detector
3	2400.000	69.36	-10.69	58.67	Delta=30.89dBc		Average Detector
4	2407.200	100.24	-10.68	89.56			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

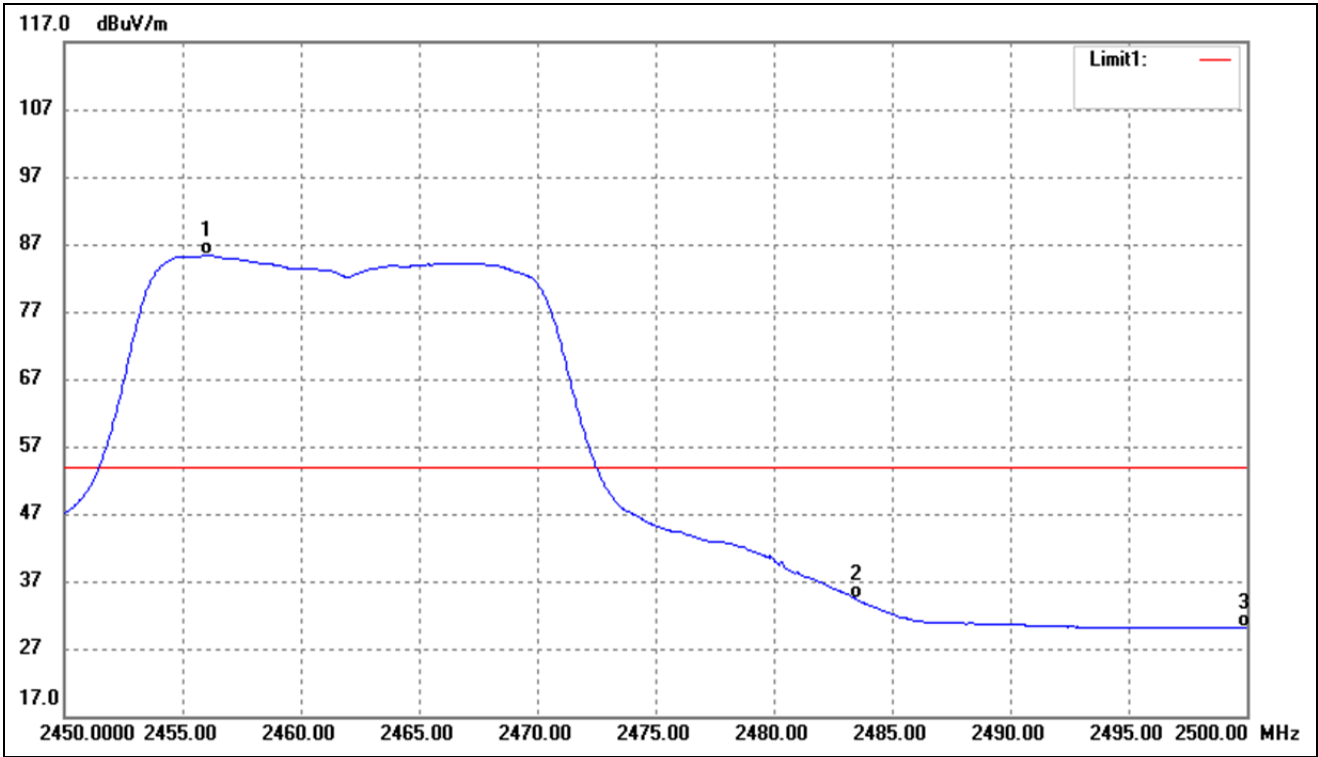


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.000	95.97	-10.61	85.36	/	/	Average Detector
	2455.650	106.57	-10.61	95.96	/	/	Peak Detector
2	2483.500	44.93	-10.58	34.35	54.00	-19.65	Average Detector
	2483.500	64.09	-10.58	53.51	74.00	-20.49	Peak Detector
3	2500.000	40.60	-10.55	30.05	54.00	-23.95	Average Detector
	2500.000	53.93	-10.55	43.38	74.00	-30.62	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

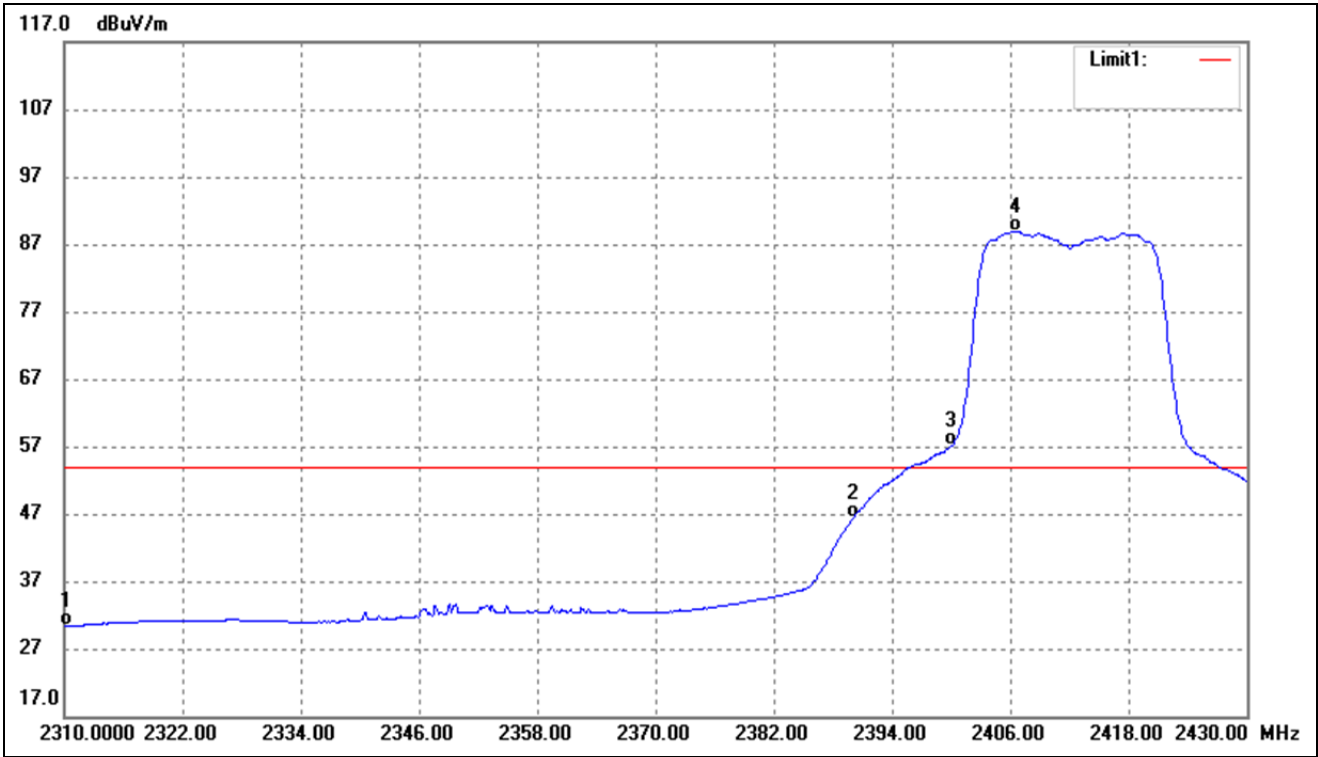


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.18	-10.82	30.36	54.00	-23.64	Average Detector
	2310.000	53.26	-10.82	42.44	74.00	-31.56	Peak Detector
2	2390.000	57.11	-10.70	46.41	54.00	-7.59	Average Detector
	2390.000	73.97	-10.70	63.27	74.00	-10.73	Peak Detector
3	2400.000	67.75	-10.69	57.06	Delta=31.83dBc		Average Detector
4	2406.600	99.57	-10.68	88.89			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

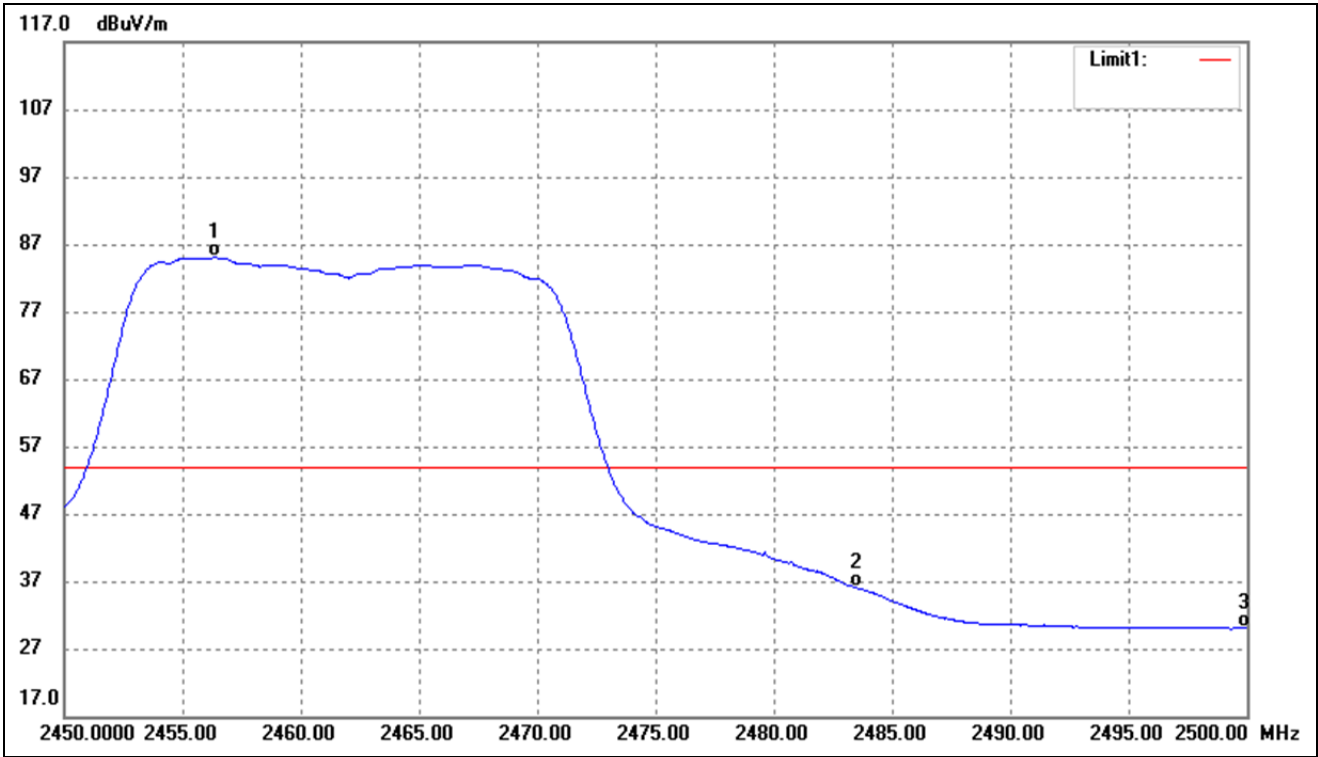


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.350	95.63	-10.61	85.02	/	/	Average Detector
	2455.650	106.20	-10.61	95.59	/	/	Peak Detector
2	2483.500	46.62	-10.58	36.04	54.00	-17.96	Average Detector
	2483.500	64.81	-10.58	54.23	74.00	-19.77	Peak Detector
3	2500.000	40.56	-10.55	30.01	54.00	-23.99	Average Detector
	2500.000	53.38	-10.55	42.83	74.00	-31.17	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

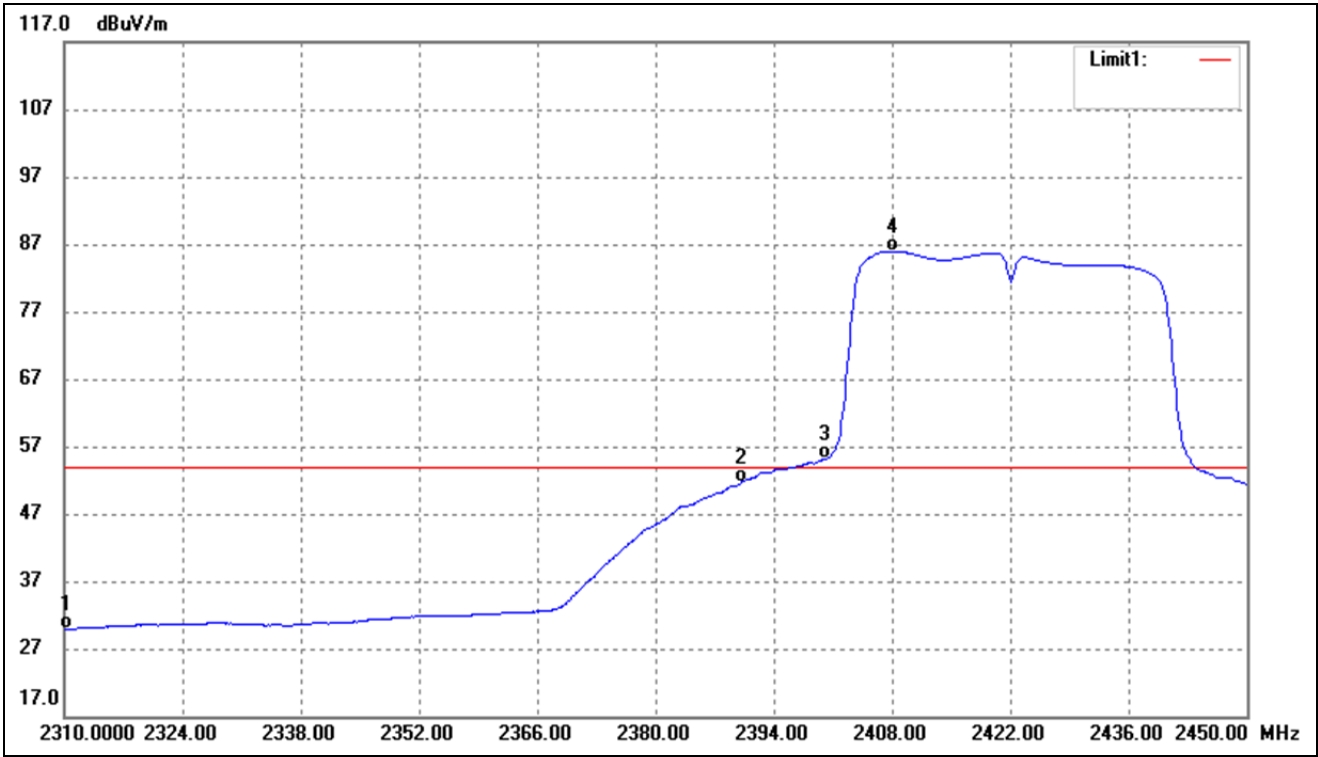

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.72	-10.82	29.90	54.00	-24.10	Average Detector
	2310.000	52.31	-10.82	41.49	74.00	-32.51	Peak Detector
2	2390.000	62.33	-10.70	51.63	54.00	-2.37	Average Detector
	2390.000	76.88	-10.70	66.18	74.00	-7.82	Peak Detector
3	2400.000	65.81	-10.69	55.12	Delta=30.85dBc		Average Detector
4	2408.140	96.65	-10.68	85.97			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

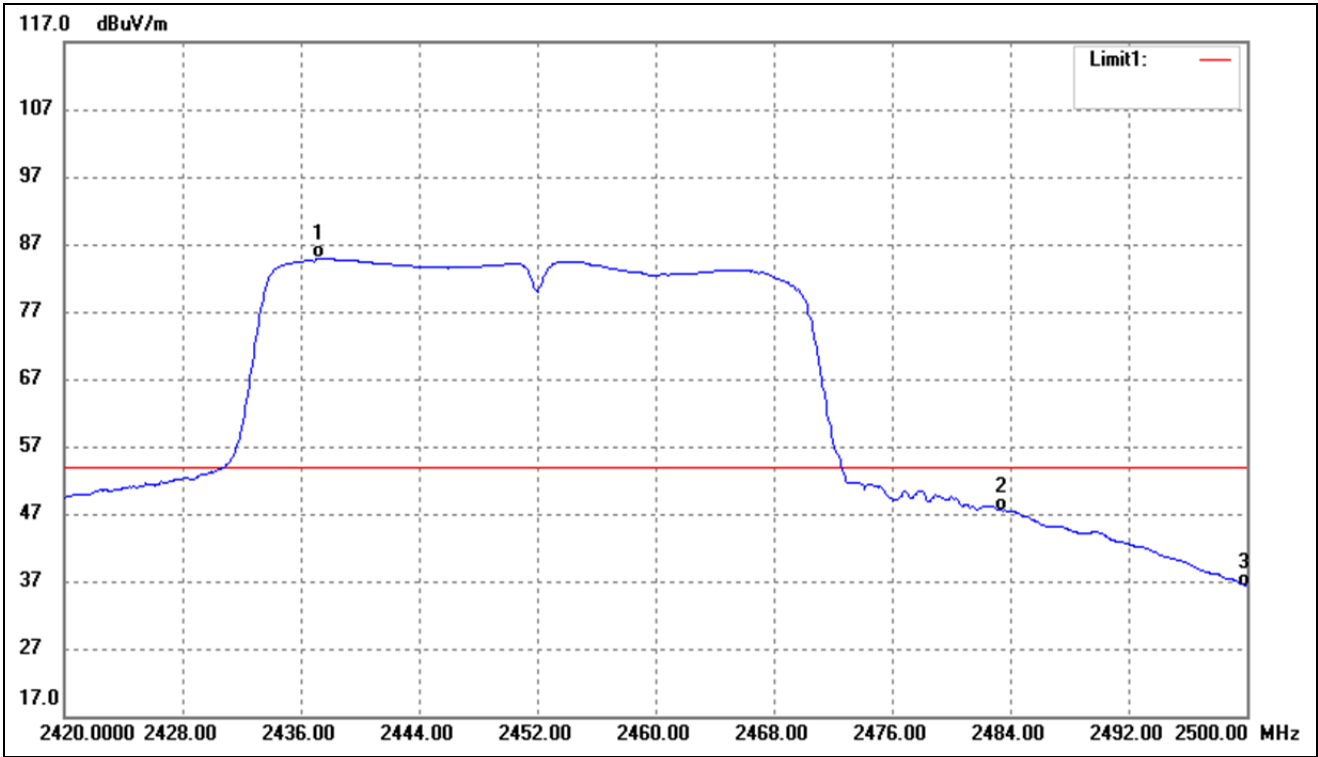

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2437.200	95.47	-10.64	84.83	/	/	Average Detector
	2436.320	106.23	-10.64	95.59	/	/	Peak Detector
2	2483.500	58.07	-10.58	47.49	54.00	-6.51	Average Detector
	2483.500	71.87	-10.58	61.29	74.00	-12.71	Peak Detector
3	2500.000	46.75	-10.55	36.20	54.00	-17.80	Average Detector
	2500.000	62.10	-10.55	51.55	74.00	-22.45	Peak Detector

➤ Conducted test
Please refer to Appendix D

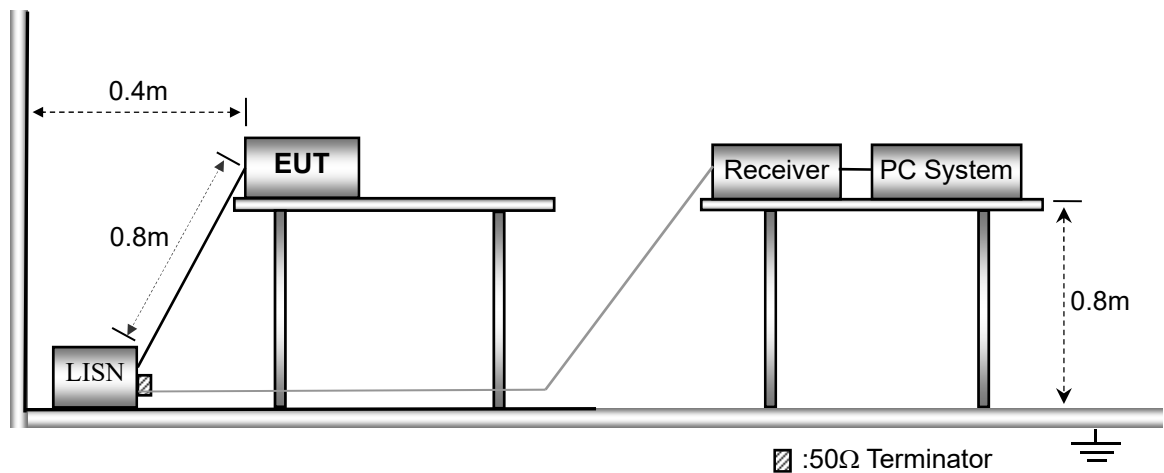
9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram




9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

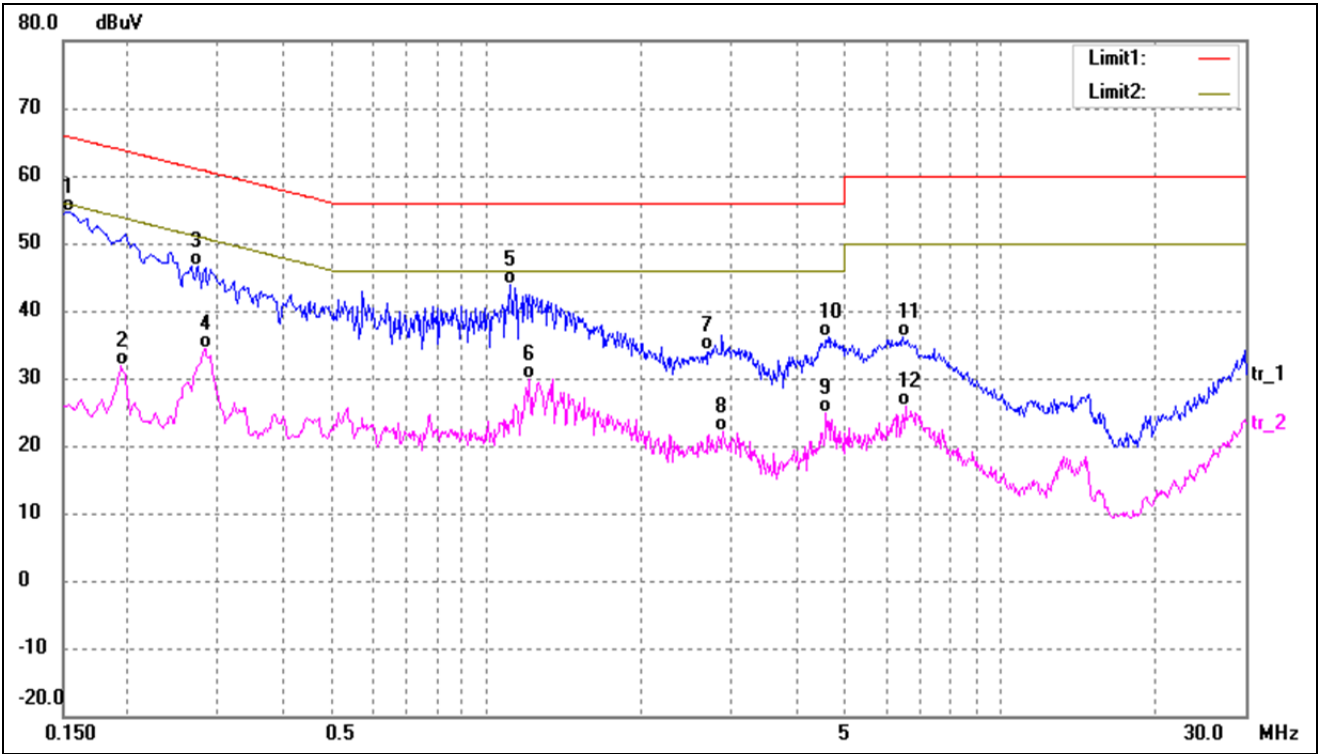

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1539	44.29	10.37	54.66	65.78	-11.12	QP
2	0.1940	21.55	10.37	31.92	53.86	-21.94	AVG
3	0.2660	36.26	10.35	46.61	61.24	-14.63	QP
4	0.2819	24.04	10.34	34.38	50.76	-16.38	AVG
5	1.1140	33.34	10.51	43.85	56.00	-12.15	QP
6	1.2139	19.34	10.46	29.80	46.00	-16.20	AVG
7	2.7419	23.91	10.10	34.01	56.00	-21.99	QP
8	2.8860	12.07	10.09	22.16	46.00	-23.84	AVG
9	4.5860	14.88	10.02	24.90	46.00	-21.10	AVG
10	4.6299	26.23	10.02	36.25	56.00	-19.75	QP
11	6.4660	26.15	9.96	36.11	60.00	-23.89	QP
12	6.5259	16.02	9.96	25.98	50.00	-24.02	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

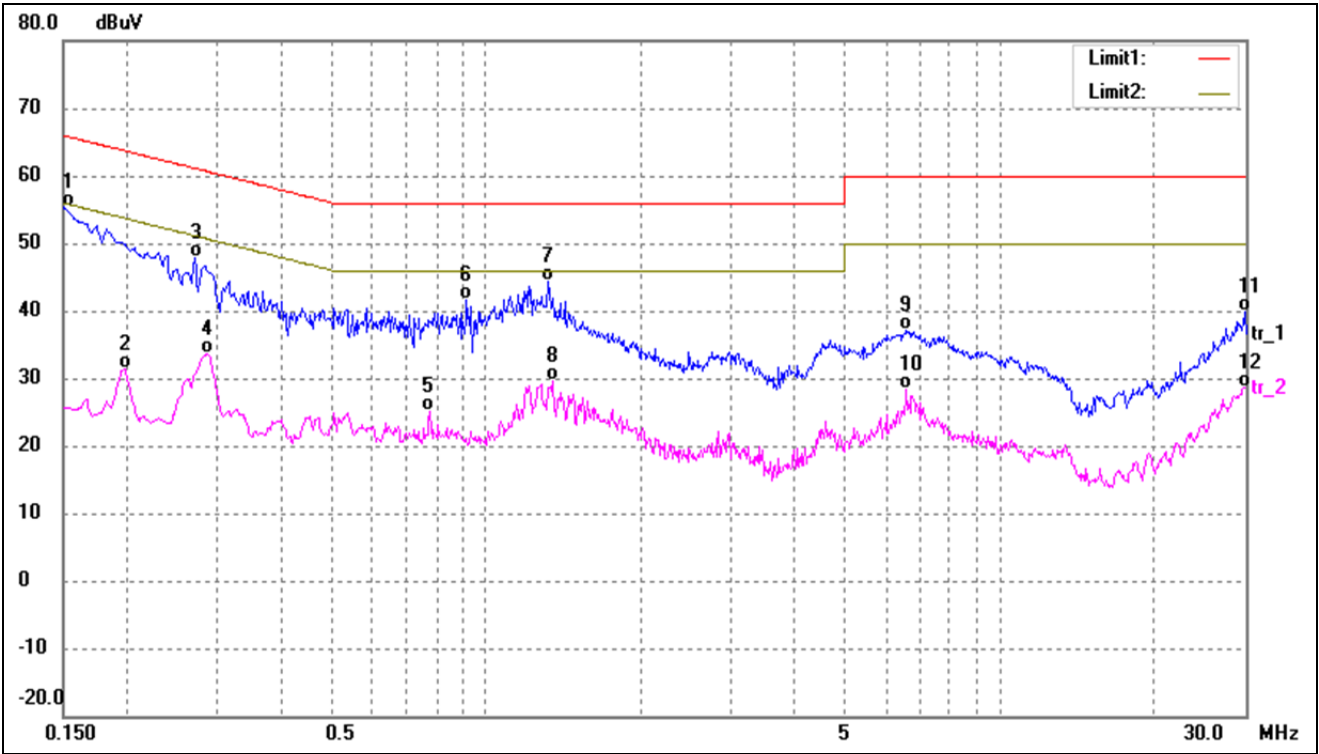

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	44.96	10.38	55.34	65.99	-10.65	QP
2	0.1980	20.94	10.37	31.31	53.69	-22.38	AVG
3	0.2700	37.51	10.35	47.86	61.12	-13.26	QP
4	0.2860	23.33	10.34	33.67	50.64	-16.97	AVG
5	0.7780	14.75	10.43	25.18	46.00	-20.82	AVG
6	0.9180	31.00	10.51	41.51	56.00	-14.49	QP
7	1.3180	34.06	10.42	44.48	56.00	-11.52	QP
8	1.3460	19.16	10.41	29.57	46.00	-16.43	AVG
9	6.5900	27.10	9.96	37.06	60.00	-22.94	QP
10	6.5900	18.53	9.96	28.49	50.00	-21.51	AVG
11	29.9020	29.64	10.24	39.88	60.00	-20.12	QP
12	29.9020	18.33	10.24	28.57	50.00	-21.43	AVG




APPENDIX SUMMARY




Project No.	WTX22X02022926W	Test Engineer	Gala
Start date	2022/3/31	Finish date	2022/3/31
Temperature	23℃	Humidity	45%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-19.93	8
	2437	-20.03	8
	2462	-16.45	8
802.11g_54Mbps	2412	-24.41	8
	2437	-24.27	8
	2462	-24.61	8
802.11n-HT20_MCS7	2412	-25.98	8
	2437	-23.70	8
	2462	-24.14	8
802.11n-HT40_MCS7	2422	-32.09	8
	2437	-31.50	8
	2452	-31.50	8

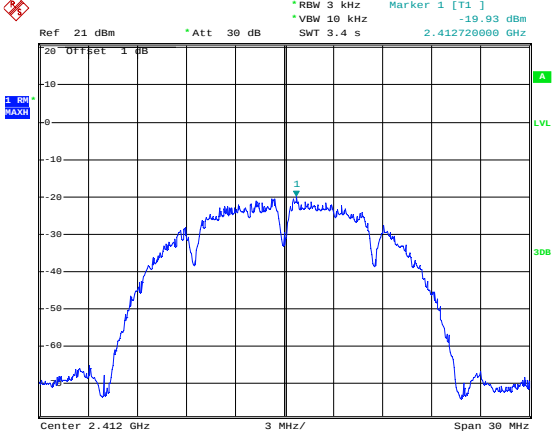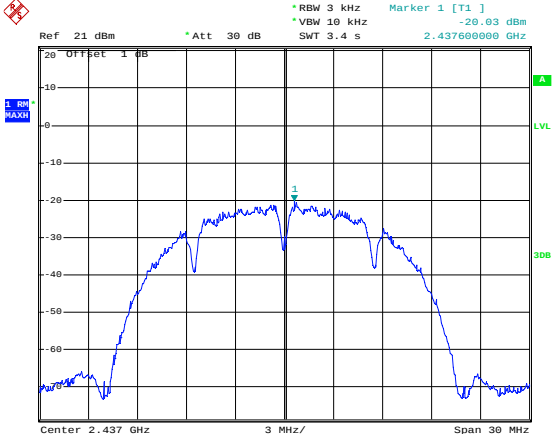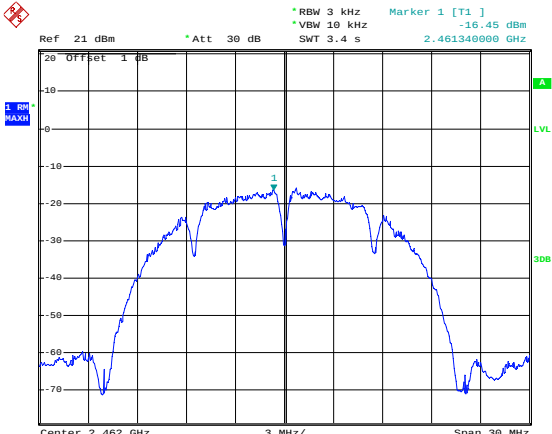802.11b-Low	 Ref 21 dBm *Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -19.93 dBm 2.412720000 GHz Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:22:07
802.11b-Middle	 Ref 21 dBm *Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -20.03 dBm 2.437600000 GHz Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:23:31
802.11b-High	 Ref 21 dBm *Att 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -16.45 dBm 2.461340000 GHz Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:24:33

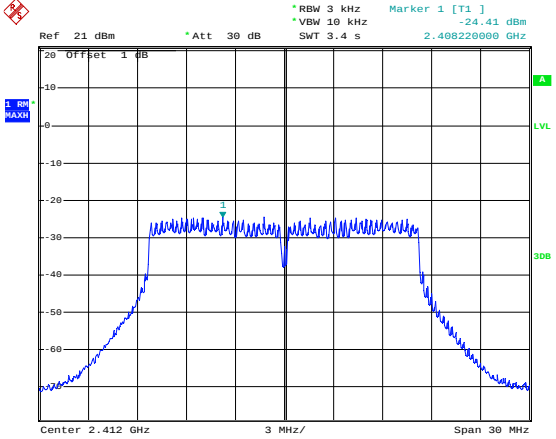
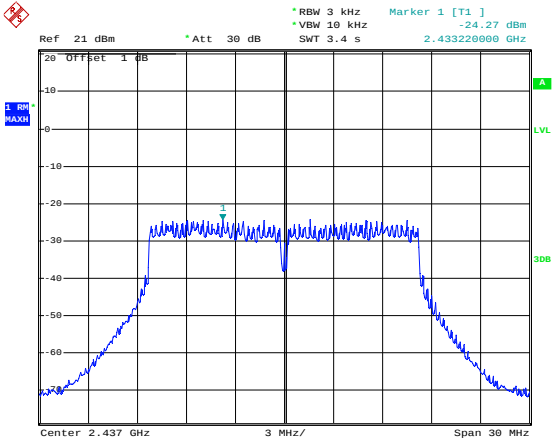
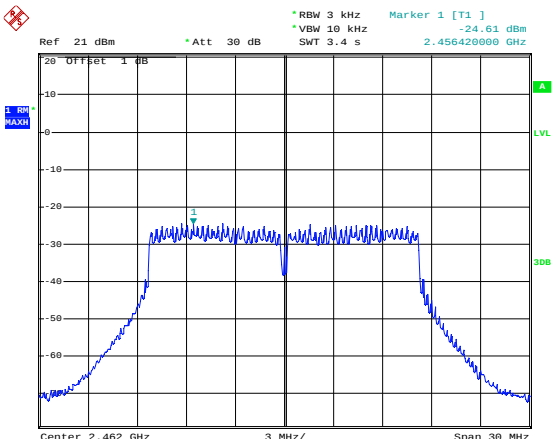
802.11g-Low	 Ref 21 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -24.41 dBm VBW 10 kHz SWT 3.4 s 2.408220000 GHz 20 Offset 1 dB Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:29:00
802.11g-Middle	 Ref 21 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -24.27 dBm VBW 10 kHz SWT 3.4 s 2.433220000 GHz 20 Offset 1 dB Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:31:16
802.11g-High	 Ref 21 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -24.61 dBm VBW 10 kHz SWT 3.4 s 2.456420000 GHz 20 Offset 1 dB Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:32:20

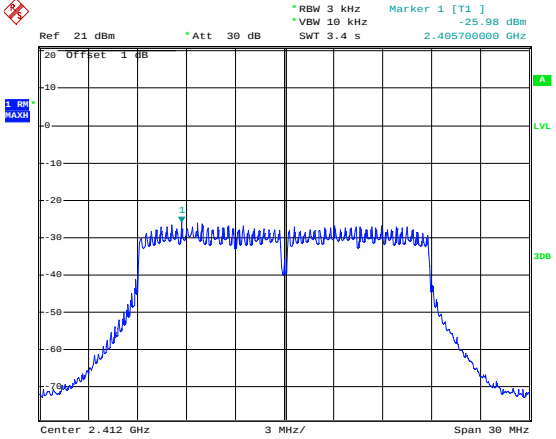
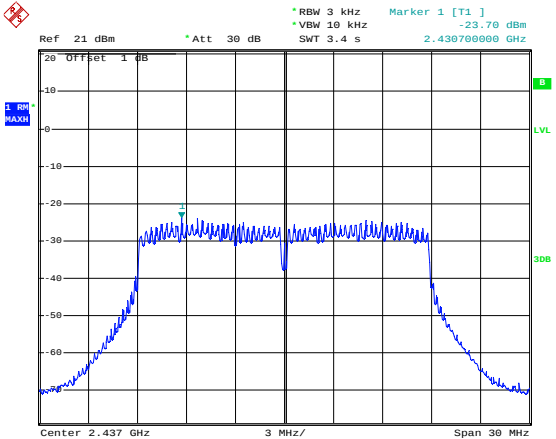
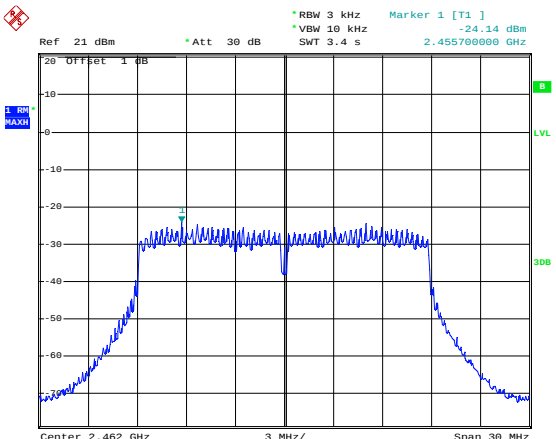
802.11n-HT20-Low	 Ref 21 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -25.98 dBm SWT 3.4 s 2.405700000 GHz 20 Offset 1 dB Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:33:29
802.11n-HT20-Middle	 Ref 21 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -23.70 dBm SWT 3.4 s 2.430700000 GHz 20 Offset 1 dB Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:36:33
802.11n-HT20-High	 Ref 21 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -24.14 dBm SWT 3.4 s 2.455700000 GHz 20 Offset 1 dB Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:37:19




802.11n-HT40-Low	Date: 28.FEB.2022 10:38:03
802.11n-HT40-Middle	Date: 28.FEB.2022 10:38:45
802.11n-HT40-High	Date: 28.FEB.2022 10:40:12




APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.14	≥ 500
	2437	11.10	≥ 500
	2462	10.14	≥ 500
802.11g_54Mbps	2412	16.48	≥ 500
	2437	16.48	≥ 500
	2462	16.38	≥ 500
802.11n-HT20_MCS7	2412	16.80	≥ 500
	2437	17.64	≥ 500
	2462	16.24	≥ 500
802.11n-HT40_MCS7	2422	35.52	≥ 500
	2437	35.68	≥ 500
	2452	35.36	≥ 500

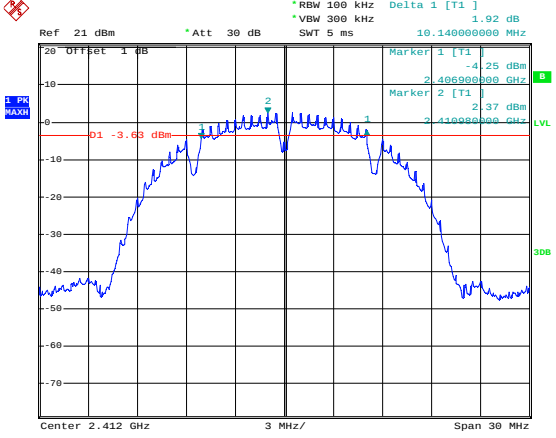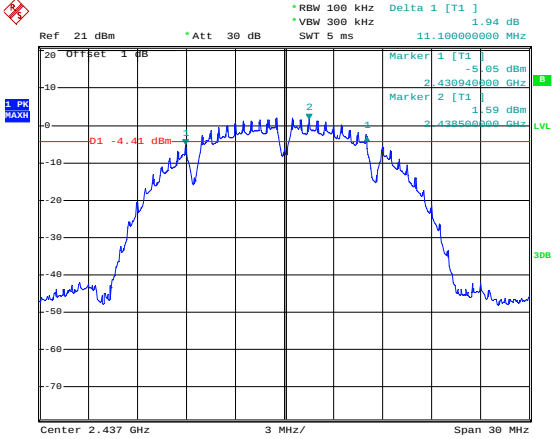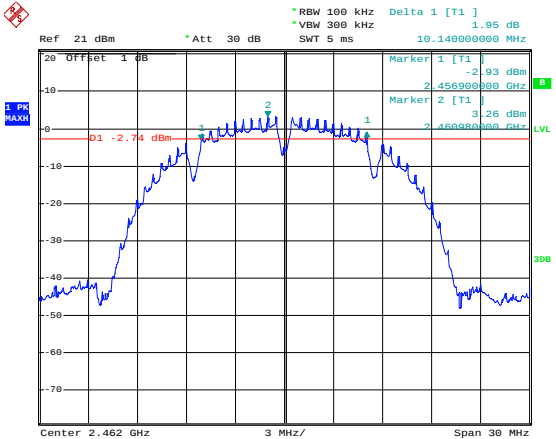802.11b-Low	 Ref 21 dBm * Att 30 dB RBW 100 kHz Delta 1 [T1] 1.92 dB VBW 300 kHz 10.140000000 MHz SWT 5 ms Marker 1 [T1] -4.25 dBm Marker 2 [T1] -2.37 dBm Marker 3 [T1] -2.43 dBm Offset 1 dB Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:45:44
802.11b-Middle	 Ref 21 dBm * Att 30 dB RBW 100 kHz Delta 1 [T1] 1.94 dB VBW 300 kHz 11.100000000 MHz SWT 5 ms Marker 1 [T1] -5.05 dBm Marker 2 [T1] -1.59 dBm Marker 3 [T1] -2.43 dBm Offset 1 dB Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 10:47:28
802.11b-High	 Ref 21 dBm * Att 30 dB RBW 100 kHz Delta 1 [T1] 1.95 dB VBW 300 kHz 10.140000000 MHz SWT 5 ms Marker 1 [T1] -2.93 dBm Marker 2 [T1] -2.45 dBm Marker 3 [T1] -2.26 dBm Offset 1 dB Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 28.FEB.2022 11:04:49

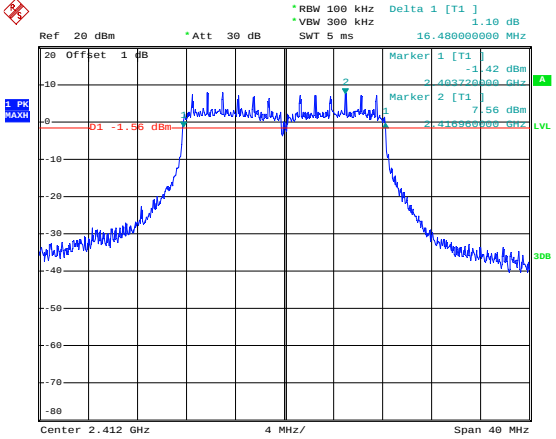
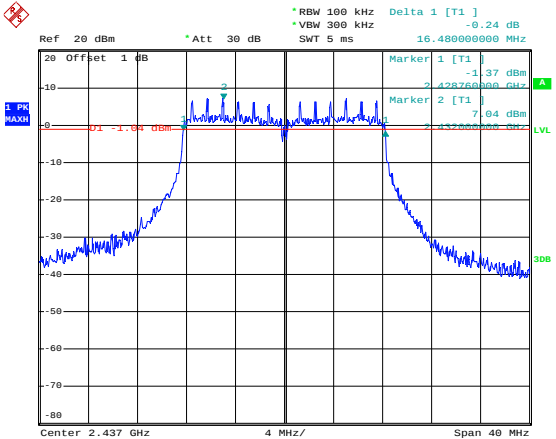
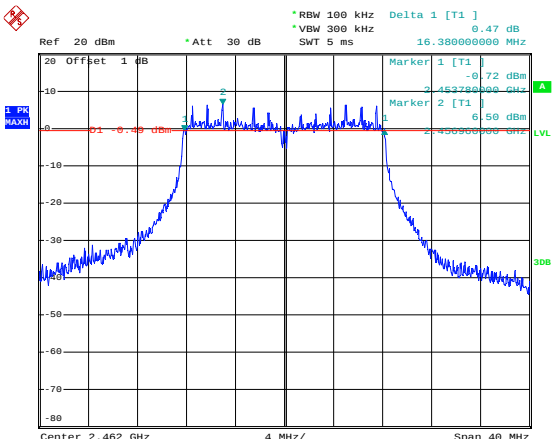
802.11g-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 100 kHz *VBW: 300 kHz Delta 1 [T1]: 1.10 dB SWT: 5 ms 16.480000000 MHz Marker 1 [T1]: -1.42 dBm 2.412700000 GHz A Marker 2 [T1]: 7.56 dBm 2.418000000 GHz LVL Center: 2.412 GHz 4 MHz/ Span: 40 MHz Date: 9.MAR.2022 14:15:11
802.11g-Middle	 Ref: 20 dBm *Att: 30 dB *RBW: 100 kHz *VBW: 300 kHz Delta 1 [T1]: -0.24 dB SWT: 5 ms 16.480000000 MHz Marker 1 [T1]: -1.37 dBm 2.437700000 GHz A Marker 2 [T1]: 7.04 dBm 2.443000000 GHz LVL Center: 2.437 GHz 4 MHz/ Span: 40 MHz Date: 9.MAR.2022 14:17:04
802.11g-High	 Ref: 20 dBm *Att: 30 dB *RBW: 100 kHz *VBW: 300 kHz Delta 1 [T1]: 0.47 dB SWT: 5 ms 16.380000000 MHz Marker 1 [T1]: -0.72 dBm 2.462700000 GHz A Marker 2 [T1]: 6.50 dBm 2.468000000 GHz LVL Center: 2.462 GHz 4 MHz/ Span: 40 MHz Date: 9.MAR.2022 14:23:57

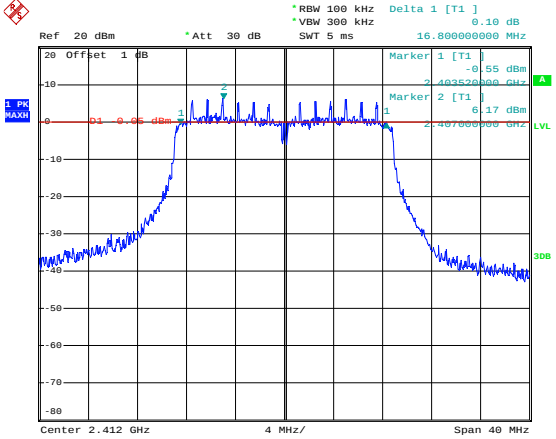
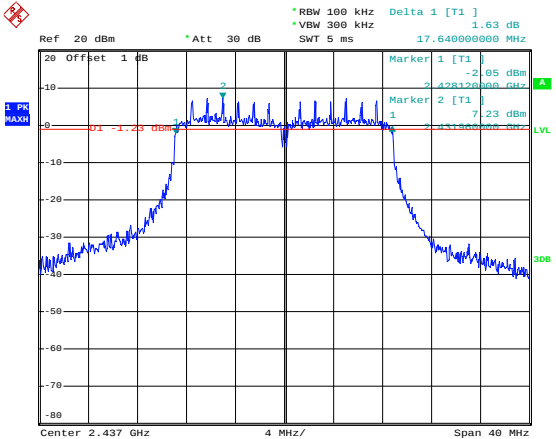
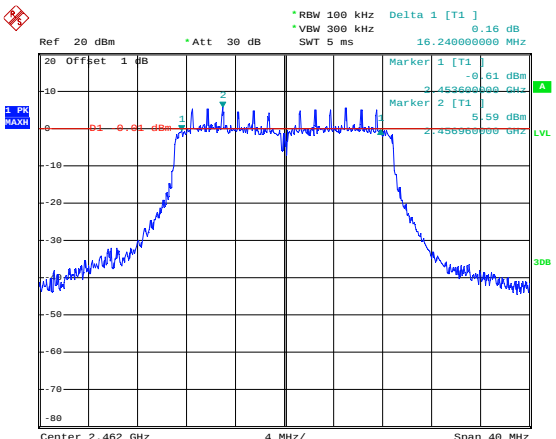
802.11n-HT20-Low	 Ref: 20 dBm *Att: 30 dB *RBW: 100 kHz *VBW: 300 kHz Delta 1 [T1]: 0.10 dB SWT: 5 ms 16.800000000 MHz Marker 1 [T1]: -0.55 dBm 2.403520000 GHz A Marker 2 [T1]: 6.17 dBm 2.407000000 GHz LVL Center: 2.412 GHz 4 MHz/ Span: 40 MHz Date: 9.MAR.2022 14:25:52
802.11n-HT20-Middle	 Ref: 20 dBm *Att: 30 dB *RBW: 100 kHz *VBW: 300 kHz Delta 1 [T1]: 1.63 dB SWT: 5 ms 17.640000000 MHz Marker 1 [T1]: -2.05 dBm 2.428120000 GHz A Marker 2 [T1]: 7.23 dBm 2.431500000 GHz LVL Center: 2.437 GHz 4 MHz/ Span: 40 MHz Date: 9.MAR.2022 14:27:50
802.11n-HT20-High	 Ref: 20 dBm *Att: 30 dB *RBW: 100 kHz *VBW: 300 kHz Delta 1 [T1]: 0.16 dB SWT: 5 ms 16.240000000 MHz Marker 1 [T1]: -0.61 dBm 2.453600000 GHz A Marker 2 [T1]: 5.59 dBm 2.456900000 GHz LVL Center: 2.462 GHz 4 MHz/ Span: 40 MHz Date: 9.MAR.2022 14:29:52

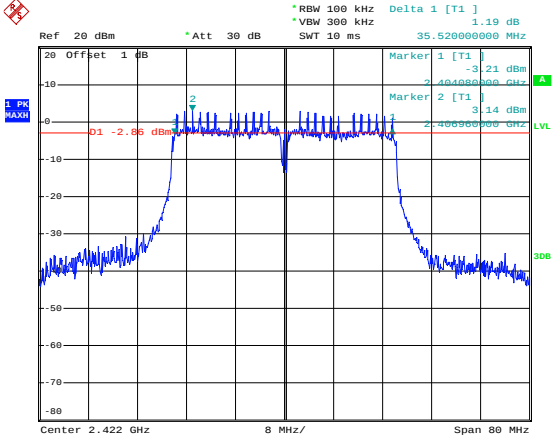
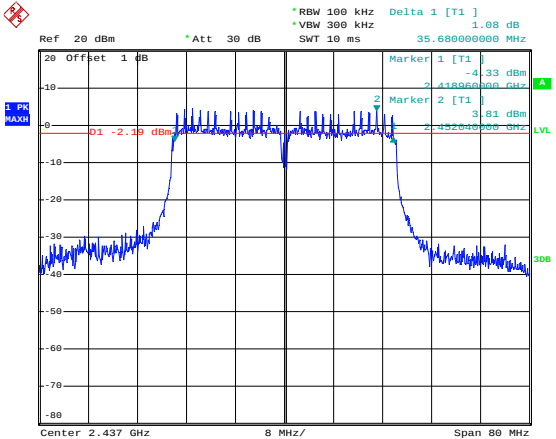
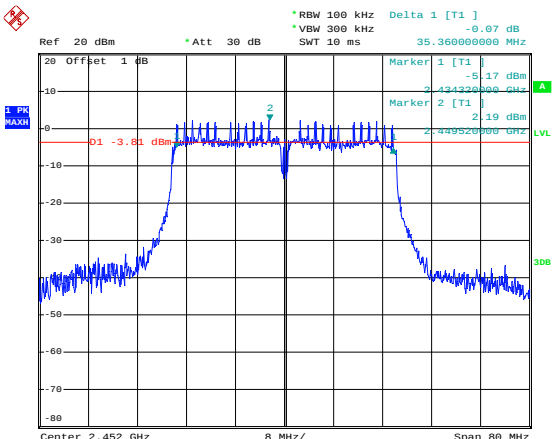
802.11n-HT40-Low	 Ref: 20 dBm *Att: 30 dB RBW 100 kHz Delta 1 [T1] 1.19 dB *VBW 300 kHz SWT 10 ms 35.520000000 MHz Marker 1 [T1] -3.21 dBm Marker 2 [T1] 3.14 dBm Center 2.422 GHz 8 MHz/ Span 80 MHz Date: 9.MAR.2022 14:31:33
802.11n-HT40-Middle	 Ref: 20 dBm *Att: 30 dB RBW 100 kHz Delta 1 [T1] 1.08 dB *VBW 300 kHz SWT 10 ms 35.680000000 MHz Marker 1 [T1] -4.33 dBm Marker 2 [T1] 3.81 dBm Center 2.437 GHz 8 MHz/ Span 80 MHz Date: 9.MAR.2022 14:33:00
802.11n-HT40-High	 Ref: 20 dBm *Att: 30 dB RBW 100 kHz Delta 1 [T1] -0.07 dB *VBW 300 kHz SWT 10 ms 35.360000000 MHz Marker 1 [T1] -5.17 dBm Marker 2 [T1] 2.19 dBm Center 2.452 GHz 8 MHz/ Span 80 MHz Date: 9.MAR.2022 14:33:55




APPENDIX C

Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b _ 11Mbps	2412	15.04	30.00
	2437	14.28	30.00
	2462	15.60	30.00
802.11g_54Mbps	2412	14.63	30.00
	2437	15.02	30.00
	2462	14.70	30.00
802.11n HT20_MCS7	2412	13.06	30.00
	2437	13.33	30.00
	2462	13.19	30.00
802.11n HT40_MCS7	2422	11.84	30.00
	2437	11.44	30.00
	2452	11.16	30.00

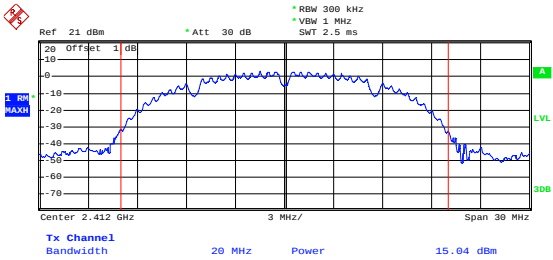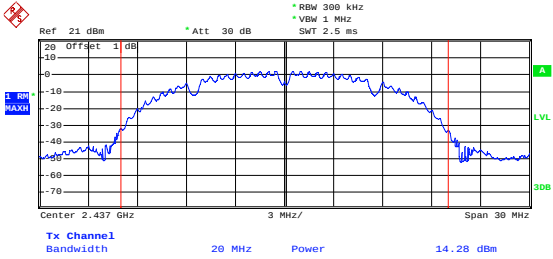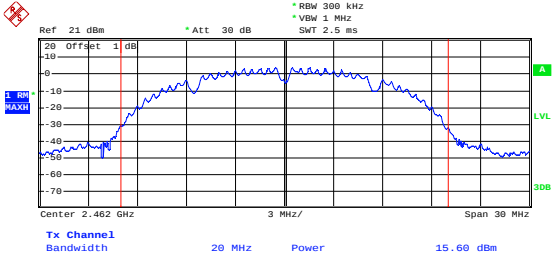802.11b-Low	 Ref 21 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Center 2.412 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.04 dBm Date: 28.FEB.2022 10:05:04
802.11b-Middle	 Ref 21 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Center 2.437 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 14.28 dBm Date: 28.FEB.2022 10:06:17
802.11b-High	 Ref 21 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Center 2.462 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.60 dBm Date: 28.FEB.2022 10:07:49

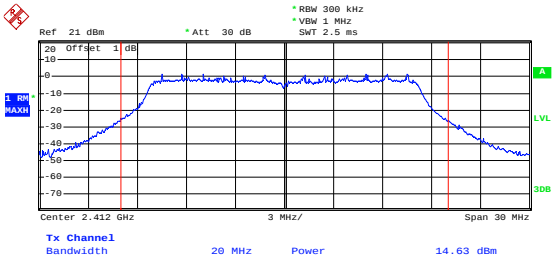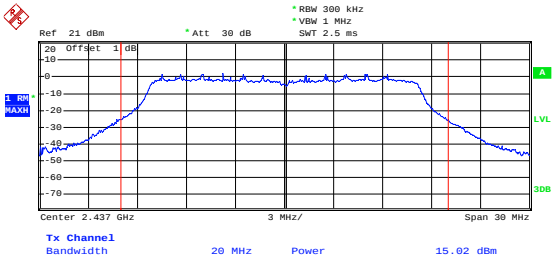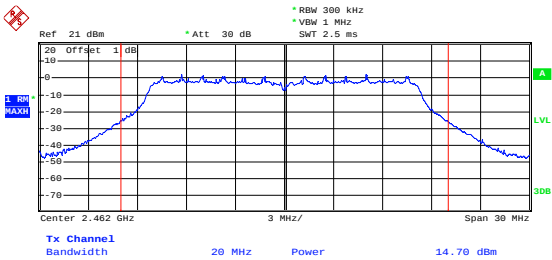802.11g-Low	 Date: 28.FEB.2022 10:09:21
802.11g-Middle	 Date: 28.FEB.2022 10:10:33
802.11g-High	 Date: 28.FEB.2022 10:11:02

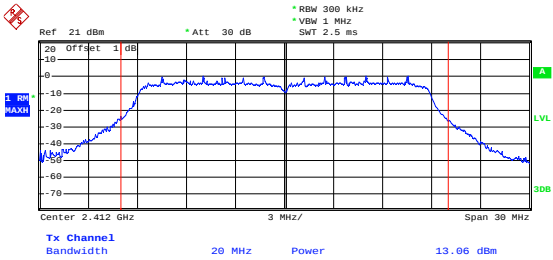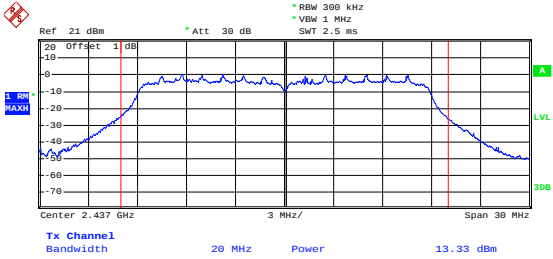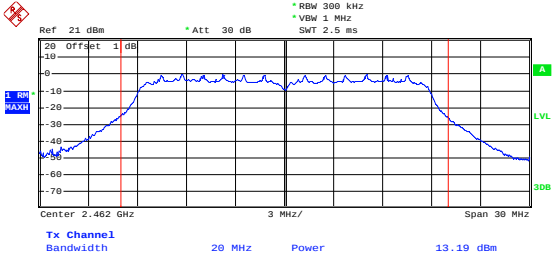
802.11n-HT20-Low	 Date: 28.FEB.2022 10:11:37
802.11n-HT20-Middle	 Date: 28.FEB.2022 10:12:37
802.11n-HT20-High	 Date: 28.FEB.2022 10:13:15

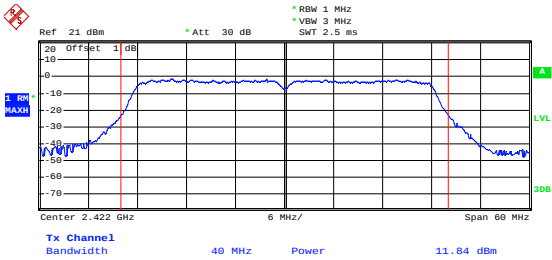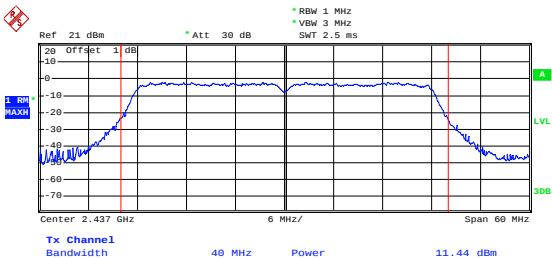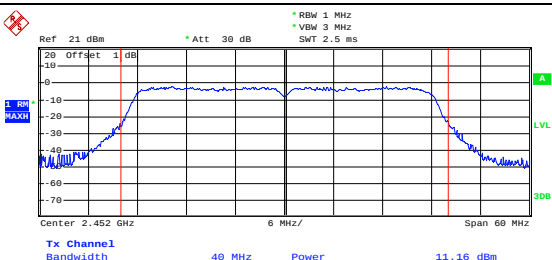802.11n-HT40-Low	 Date: 28.FEB.2022 10:16:33
802.11n-HT40-Middle	 Date: 28.FEB.2022 10:16:53
802.11n-HT40-High	 Date: 28.FEB.2022 10:17:14


APPENDIX D

Conducted Out of Band Emissions

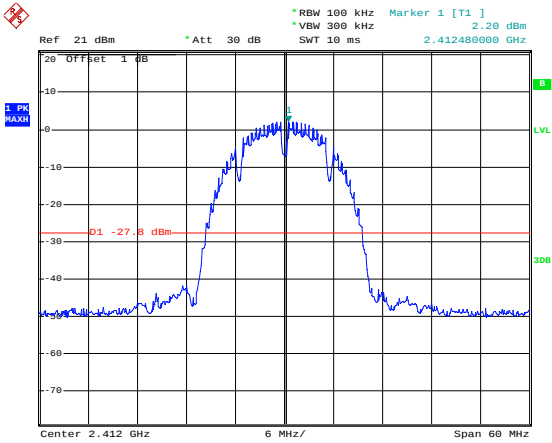802.11b-Low




Date: 28.FEB.2022 11:23:45



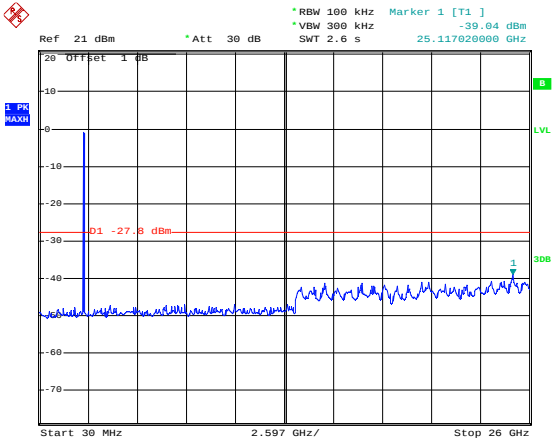


Date: 28.FEB.2022 11:24:00


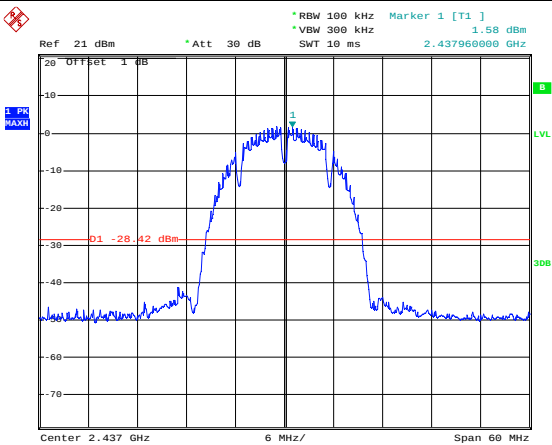
802.11b-Middle




Date: 28.FEB.2022 11:24:35

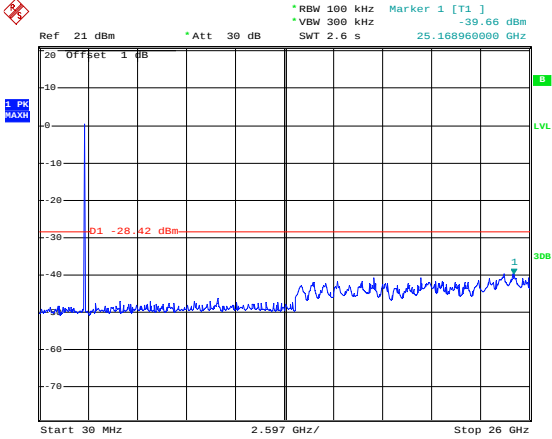
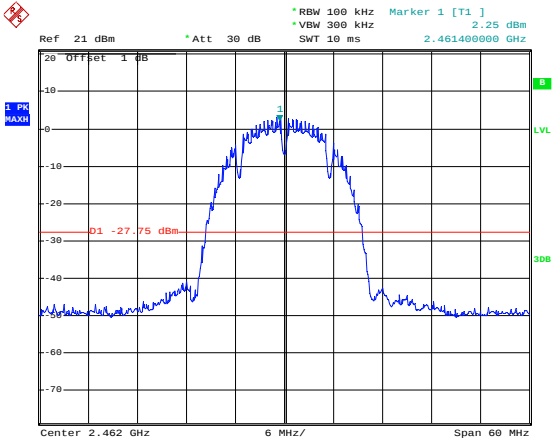
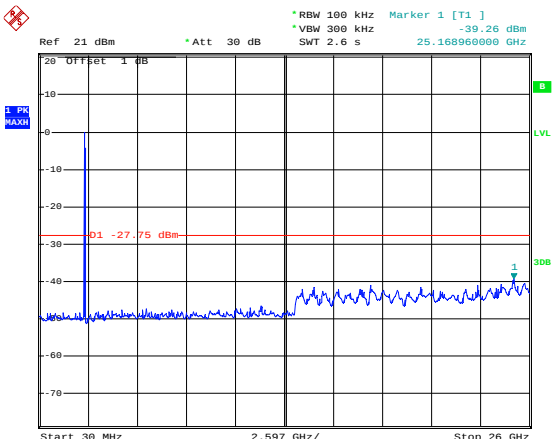
	 Date: 28.FEB.2022 11:24:47
802.11b-High	 Date: 28.FEB.2022 11:25:38
	 Date: 28.FEB.2022 11:25:51

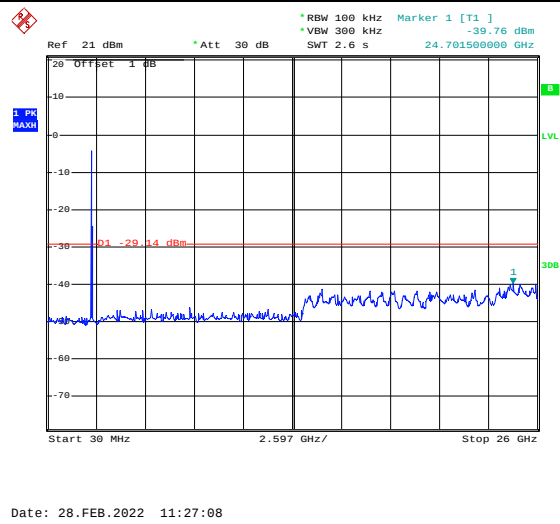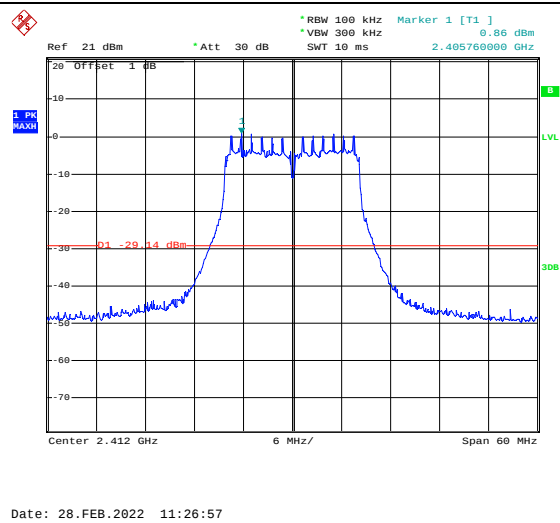802.11g-Low




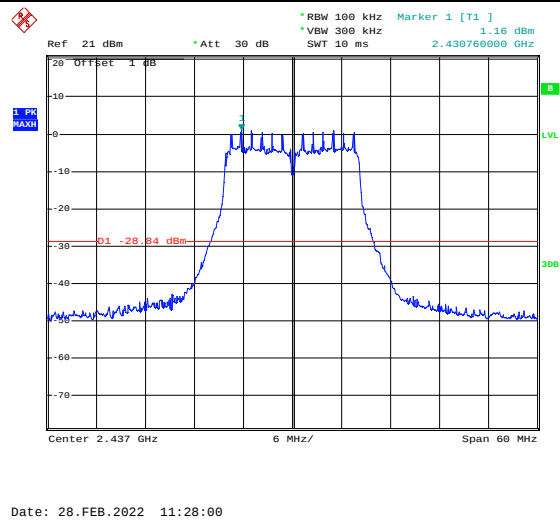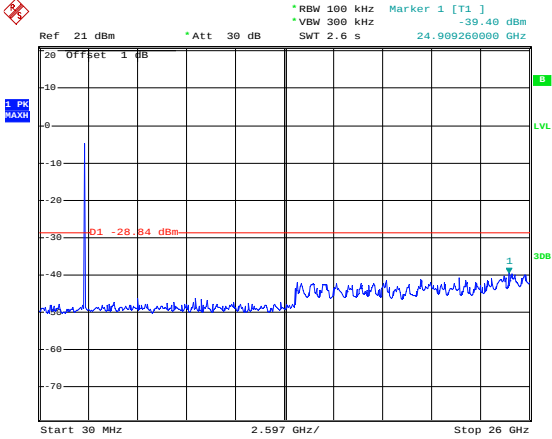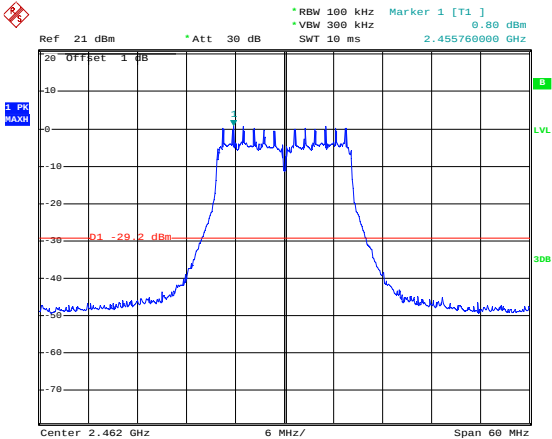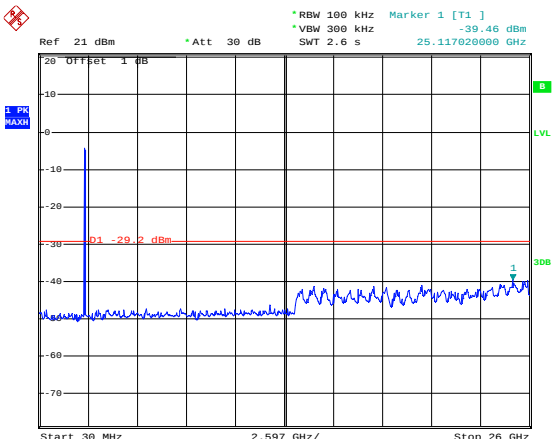802.11g-Middle







	 Date: 28.FEB.2022 11:28:16
802.11g-High	 Date: 28.FEB.2022 11:29:39
	 Date: 28.FEB.2022 11:29:56

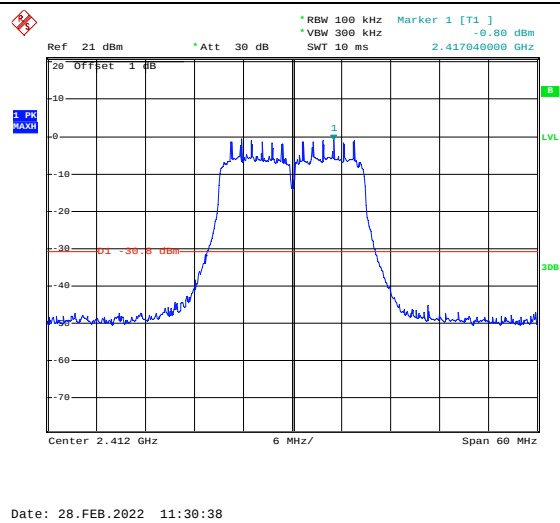802.11n-HT20-Low





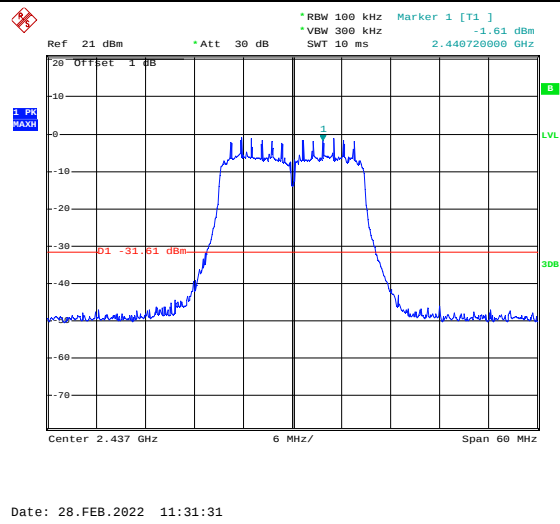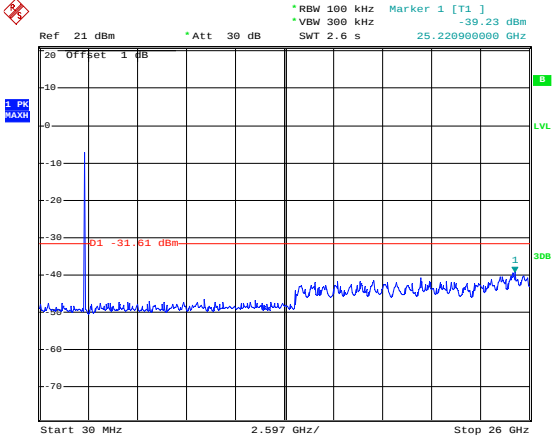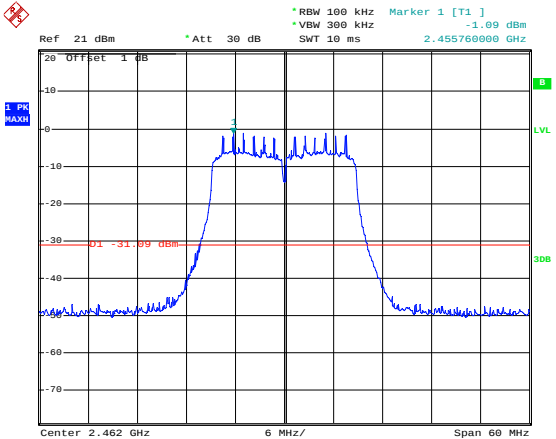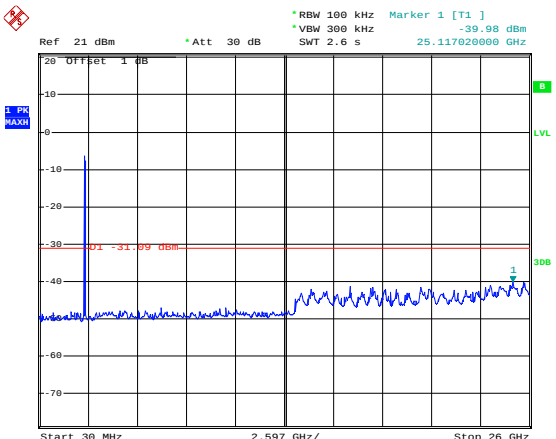802.11n-HT20-Middle







	 Date: 28.FEB.2022 11:31:49
802.11n-HT20-High	 Date: 28.FEB.2022 11:32:33
	 Date: 28.FEB.2022 11:32:46

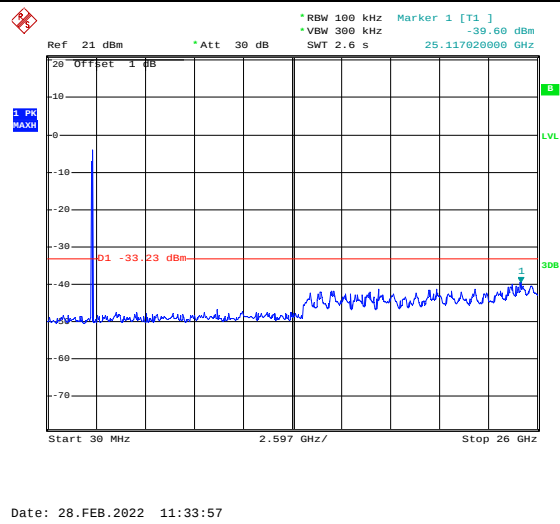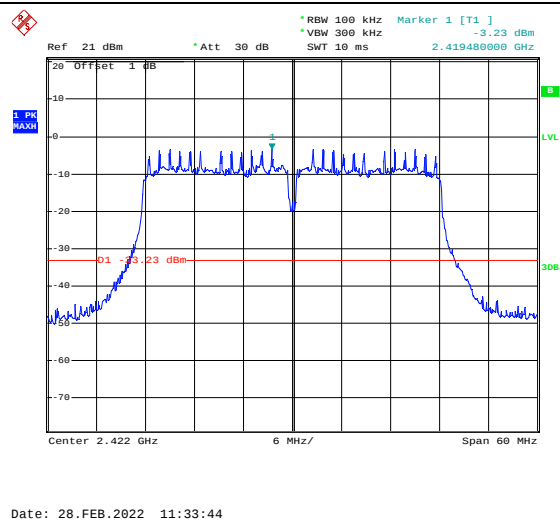802.11n-HT40-Low



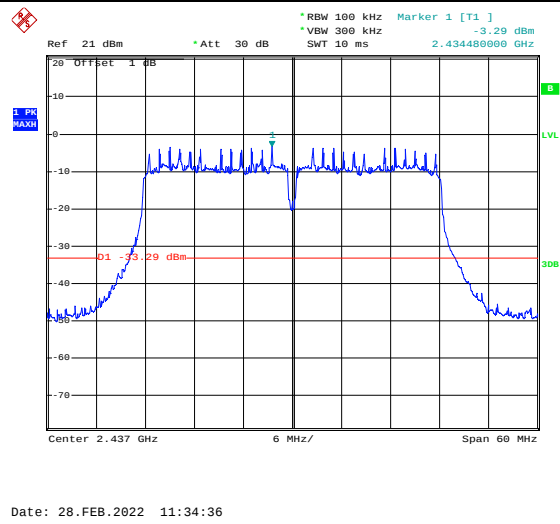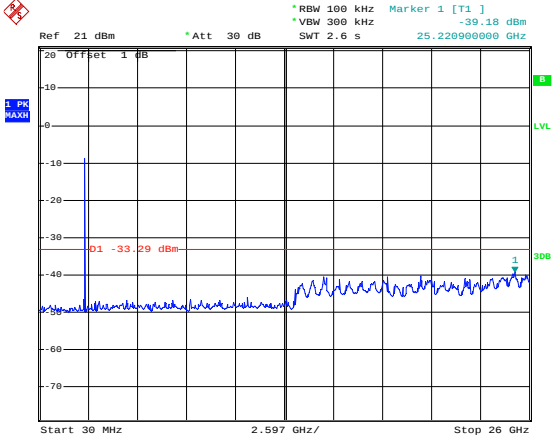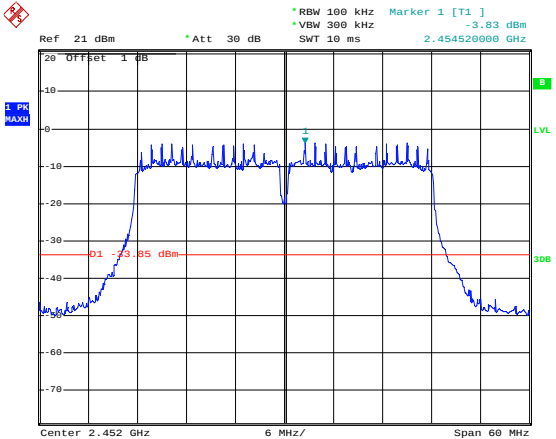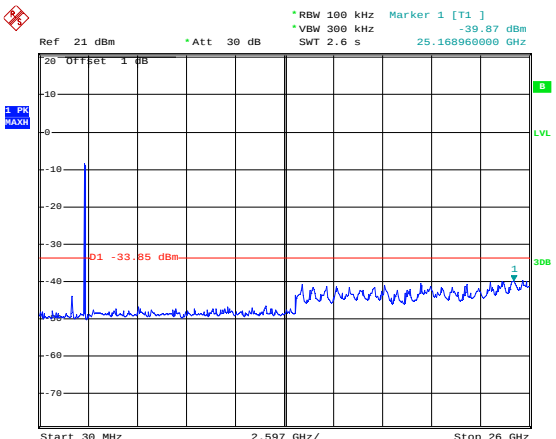802.11n-HT40-Middle



	 Date: 28.FEB.2022 11:35:05
802.11n-HT40-High	 Date: 28.FEB.2022 11:35:44
	 Date: 28.FEB.2022 11:36:07

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****