

RF Exposure Report

FCC ID: 2A4XQ-F7

Report No. : SSP25080098-1E

Applicant : Lianxiang Technology (Shenzhen) Co.,Ltd.

Product Name : 3-in-1 Wireless Charger

Model Name : F7

Test Standard : FCC CFR 47 PART 1, 1.1310

Date of Issue : 2025-08-27

Prepared By : Shenzhen CCUT Quality Technology Co., Ltd.

Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Lianxiang Technology (Shenzhen) Co., Ltd. 4th Floor, Building A3, Haocheng Industrial Park No. 66 Hexiu West Road, Address of Applicant.....:	Heping Community, Fuhai Street, Baoan District, Shenzhen, China 518000
Manufacturer:	Lianxiang Technology (Shenzhen) Co., Ltd. 4th Floor, Building A3, Haocheng Industrial Park No. 66 Hexiu West Road, Address of Manufacturer.....:	Heping Community, Fuhai Street, Baoan District, Shenzhen, China 518000
Product Name:	3-in-1 Wireless Charger	
Brand Name:	-	
Main Model:	F7	
Series Models:	-	
Test Standard:	FCC CFR 47 PART 1, 1.1310 KDB 680106 D01 Wireless Power Transfer v04	
Date of Test:	2025-08-10 to 2025-08-21	
Test Result:	PASS	
Tested By	 (Walker Wu)	
Reviewed By:	 (Lieber Ouyang)	
Authorized Signatory:	 (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Test Facilities.....	7
1.4 List of Measurement Instruments	8
1.5 Measurement Uncertainty.....	8
2. RF Exposure.....	9
2.1 Standard and Limit.....	9
2.2 Test Procedures	9
2.3 Test Data and Results.....	10
Annex A. Test Photos.....	13

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-08-27	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	3-in-1 Wireless Charger
Trade Name:	-
Main Model:	F7
Series Models:	-
Rated Voltage:	Input: 9V=2A, 9V=2.7A, 12V=2A Wireless Output: 15W(Max) Earbuds Wireless Output: 5W Watch Wireless Output: 3W
Test Sample No:	SSP25080098-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC
Operating Frequency:	Wireless charging Output (Phone/Earphone):110.5kHz-205kHz Wireless charging Output (Watch):310kHz-340kHz
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	☐ Portable Device ☒ Mobile Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description		Remark
TM1	Wireless charging 15W (Phone)+adapter charging		
TM2	Wireless charging 5W (Earphone)+adapter charging		
TM3	Wireless charging 3W (Watch)+adapter charging		
TM4	Wireless charging 15W (Phone) + Wireless charging 5W (Earphone) +adapter charging		
TM5	Wireless charging 15W (Phone) + Wireless charging 3W (Watch) +adapter charging		
TM6	Wireless charging 5W (Earphone) + Wireless charging 3W (Watch) +adapter charging		
TM7	Wireless charging 15W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 3W (Watch) +adapter charging		
Note1: All modes have been tested and only the worst mode TM7 data is represented in the report.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
Type-C Cable	100	Unshielded	Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Phone	iPhone	iPhone 12pro	-
Adapter	UGREEN	CD289	90324
Earphone charging case	Xiaomi	FreeBuds Pro2	-
Apple Watch	iPhone	A2855	GK46LFW525

1.3 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.4 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Electromagnet-ic radiation tester	WAVECONTROL	SMP3	23SL0158	2024-10-16	2025-10-15
Electromagnet-ic field probe	WAVECONTROL	WP400-3	24WP240067	2024-10-16	2025-10-15
Test Software	WAVECONTROL	SMP	N/A	N/A	N/A

1.5 Measurement Uncertainty

Test Item	Uncertainty
E-field	0.6 dB
H-field	0.6 dB

2. RF Exposure

2.1 Standard and Limit

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

2.2 Test Procedures

- 1) The RF exposure test was performed in anechoic chamber.
- 2) E and H-field measurements should be made with the center of the probe at a distance of 20cm surrounding the device and 20 cm above the top surface of the primary/client pair.
These measurements should be repeated for three different client battery levels, 1%, 50%, and 99%.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

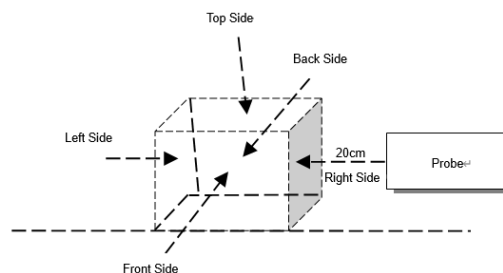

Test Setup Block Diagram

2.3 Test Data and Results

All modes including full load, halfload and no-load have been tested, The report reflects data for the worst TM7 mode only.

Test condition 1: Mode 7 operating mode with client device.

Maximum permissible Exposure			
Battery levels	Test sides	Test distance(cm)	H-field(uT)
<1%	Top	20	0.42
<1%	Left	20	0.34
<1%	Right	20	0.51
<1%	Front	20	0.25
<1%	Back	20	0.27

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	20	2.341	0.34
<1%	Left	20	4.147	0.27
<1%	Right	20	6.321	0.41
<1%	Front	20	3.543	0.2
<1%	Back	20	1.677	0.22
Limit			614	1.63
50% Margin Limit			307	0.815

Note: $A/m = uT/1.25$

Maximum permissible Exposure			
Battery levels	Test sides	Test distance(cm)	H-field(uT)
<50%	Top	20	0.19
<50%	Left	20	0.24
<50%	Right	20	0.23
<50%	Front	20	0.27
<50%	Back	20	0.17

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<50%	Top	20	2.124	0.15
<50%	Left	20	4.311	0.19
<50%	Right	20	6.121	0.18
<50%	Front	20	3.761	0.22
<50%	Back	20	1.358	0.14
Limit			614	1.63
50% Margin Limit			307	0.815

Note: $A/m = uT/1.25$

Maximum permissible Exposure			
Battery levels	Test sides	Test distance(cm)	H-field(uT)
<99%	Top	20	0.43
<99%	Left	20	0.25
<99%	Right	20	0.44
<99%	Front	20	0.33
<99%	Back	20	0.25

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<99%	Top	20	2.451	0.34
<99%	Left	20	4.344	0.2
<99%	Right	20	6.315	0.35
<99%	Front	20	3.226	0.26
<99%	Back	20	2.121	0.2
Limit			614	1.63
50% Margin Limit			307	0.815

Note: $A/m = uT/1.25$

Annex A. Test Photos

Test View 1

******* END OF REPORT *******