



FCC Part 15E Test Report

FCC ID: 2A54Y-HM103A

Applicant: Shenzhen TFIRETEK Technology Co., Ltd.

Address: 204, Building 2, Stech Park, Taoyuan Community, Dalang Street, LongHua District, ShenZhen

Manufacturer: Shenzhen TFIRETEK Technology Co., Ltd.

Address: 204, Building 2, Stech Park, Taoyuan Community, Dalang Street, LongHua District, ShenZhen

EUT: Projector

Trade Mark: N/A

Model Number: HM103-A
HM103-B

Date of Receipt: Nov. 15, 2024

Test Date: Nov. 15, 2024 - Dec. 18, 2024

Date of Report: Dec. 18, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 E 15.407
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-241115038-3ER

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
3.2.8 TEST RESULTS (1GHZ~40GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	39
3.3.1 TEST REQUIREMENT:	39
3.3.2 TEST PROCEDURE	39
3.3.3 DEVIATION FROM TEST STANDARD	39
3.3.4 TEST SETUP	39
3.3.5 EUT OPERATING CONDITIONS	39
4 . PEAK OUTPUT POWER	44
4.1 APPLIED PROCEDURES / LIMIT	44
4.1.1 TEST PROCEDURE	44
4.1.2 DEVIATION FROM STANDARD	44
4.1.3 TEST SETUP	44
4.1.4 EUT OPERATION CONDITIONS	44
4.1.5 TEST RESULTS	45



Table of Contents	Page
5 . POWER SPECTRAL DENSITY TEST	52
5.1 APPLIED PROCEDURES / LIMIT	52
5.1.1 TEST PROCEDURE	52
5.1.2 DEVIATION FROM STANDARD	52
5.1.3 TEST SETUP	52
5.1.4 EUT OPERATION CONDITIONS	52
5.1.5 TEST RESULTS	53
6 . 6DB&26DB&99% BANDWIDTH TEST	60
6.1 APPLIED PROCEDURES / LIMIT	60
6.1.1 TEST PROCEDURE	60
6.1.2 DEVIATION FROM STANDARD	60
6.1.3 TEST SETUP	60
6.1.4 EUT OPERATION CONDITIONS	61
6.1.5 TEST RESULTS	61
7 . DUTY CYCLE TEST SIGNAL	68
7.1 APPLIED PROCEDURES / LIMIT	68
7.1.1 TEST PROCEDURE	68
7.1.2 DEVIATION FROM STANDARD	68
7.1.3 TEST SETUP	68
7.1.4 EUT OPERATION CONDITIONS	68
7.1.5 TEST RESULTS	69
8 . FREQUENCY STABILITY	76
8.1 APPLIED PROCEDURES / LIMIT	76
8.1.1 TEST PROCEDURE	76
8.1.2 DEVIATION FROM STANDARD	76
8.1.3 TEST SETUP	76
8.1.4 EUT OPERATION CONDITIONS	76
8.1.5 TEST RESULTS	77
9 . TRANSMISSION IN THE ABSENCE OF DATA	80
9.1 STANDARD REQUIREMENT	80
9.2 TEST RESULT	80
10 . ANTENNA REQUIREMENT	80
10.1 STANDARD REQUIREMENT	80
10.2 EUT ANTENNA	80
11 . TEST SEUUP PHOTO	80
12 . EUT PHOTO	80



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Peak Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(a) (e)	26dB bandwidth and 99%dB Bandwidth 6dB bandwidth and 99%dB Bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<30MHz)	$\pm 3.54\text{dB}$
5	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
6	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
7	Occupied bandwidth	$\pm 0.28\text{MHz}$
8	PSD	$\pm 0.69\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Time	$\pm 20\text{ms}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Projector
Trademark	N/A
Model No.:	HM103-A HM103-B
Model Difference	All models are same as the samples except model name and appearance color, they have the same structure and circuit.
Operation Frequency:	5180-5240, 5745-5825MHz(802.11a/n/ac(HT20)) 5190-5230, 5755-5795MHz(802.11n/ac(HT40)) 5210MHz , 5775MHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz/80MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps 802.11n: Up to 300Mbps 802.11ac: up to 867Mbps
Antenna Type:	FPC Antenna
Antenna gain:	5.53 dBi
Power Supply:	110-240V ~ 50/60Hz

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	/	/

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	/	/



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Description			
Pretest Mode	Channel	Band 1	Band 4
Mode 1	802.11a/n/acHT20	CH36, CH44, CH48	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH38, CH46	CH151, CH159
Mode 3	802.11acHT80	CH42	CH155
Mode 4	Link Mode		

For Radiated Emission			
Pretest Mode	Channel	Band 1	Band 4
Mode 1	802.11a/n/acHT20	CH36, CH44, CH48	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH38, CH46	CH151, CH159
Mode 3	802.11acHT80	CH42	CH155
Mode 4	Link Mode		

Note: 1. The measurements are performed at the highest, middle, lowest available channels.
2. During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Projector	HM103-A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: Rtwpriv			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Software	60	60	66	66



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation



3.1.4 TEST SETUP

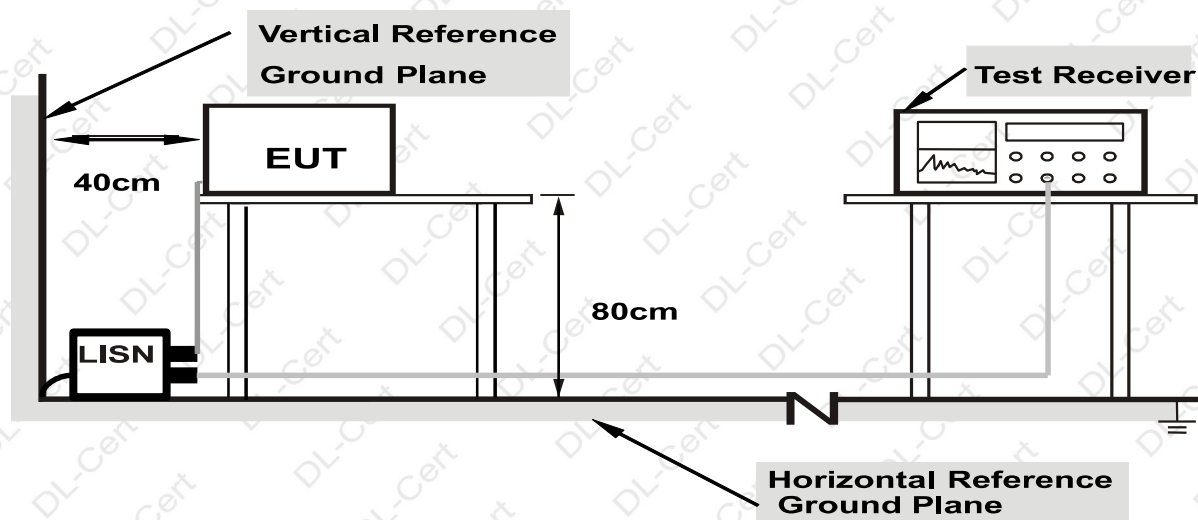

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

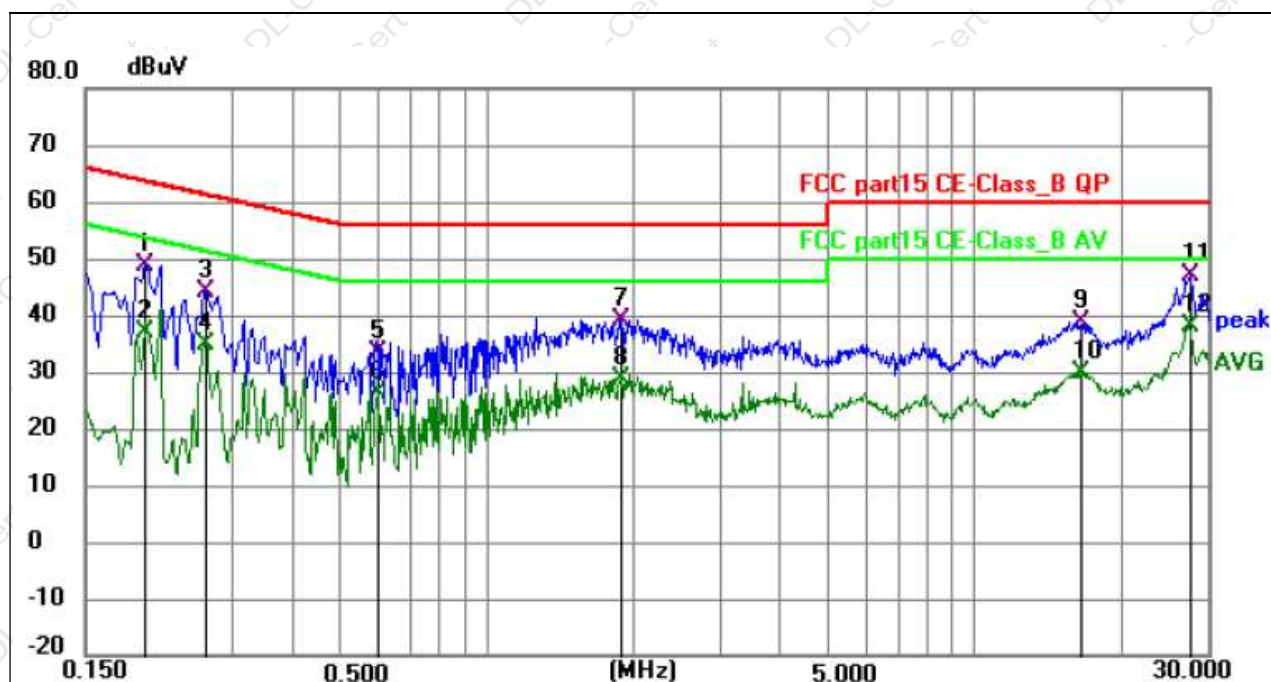


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	38.97	9.91	48.88	63.63	-14.75	QP	P	
2	0.1995	27.21	9.91	37.12	53.63	-16.51	AVG	P	
3	0.2670	34.24	9.95	44.19	61.21	-17.02	QP	P	
4	0.2670	25.01	9.95	34.96	51.21	-16.25	AVG	P	
5	0.5955	23.52	9.75	33.27	56.00	-22.73	QP	P	
6	0.5955	16.41	9.75	26.16	46.00	-19.84	AVG	P	
7	1.8825	29.25	10.00	39.25	56.00	-16.75	QP	P	
8	1.8825	18.63	10.00	28.63	46.00	-17.37	AVG	P	
9	16.5975	28.88	10.00	38.88	60.00	-21.12	QP	P	
10	16.5975	19.74	10.00	29.74	50.00	-20.26	AVG	P	
11	27.6585	36.55	10.31	46.86	60.00	-13.14	QP	P	
12 *	27.6585	27.74	10.31	38.05	50.00	-11.95	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

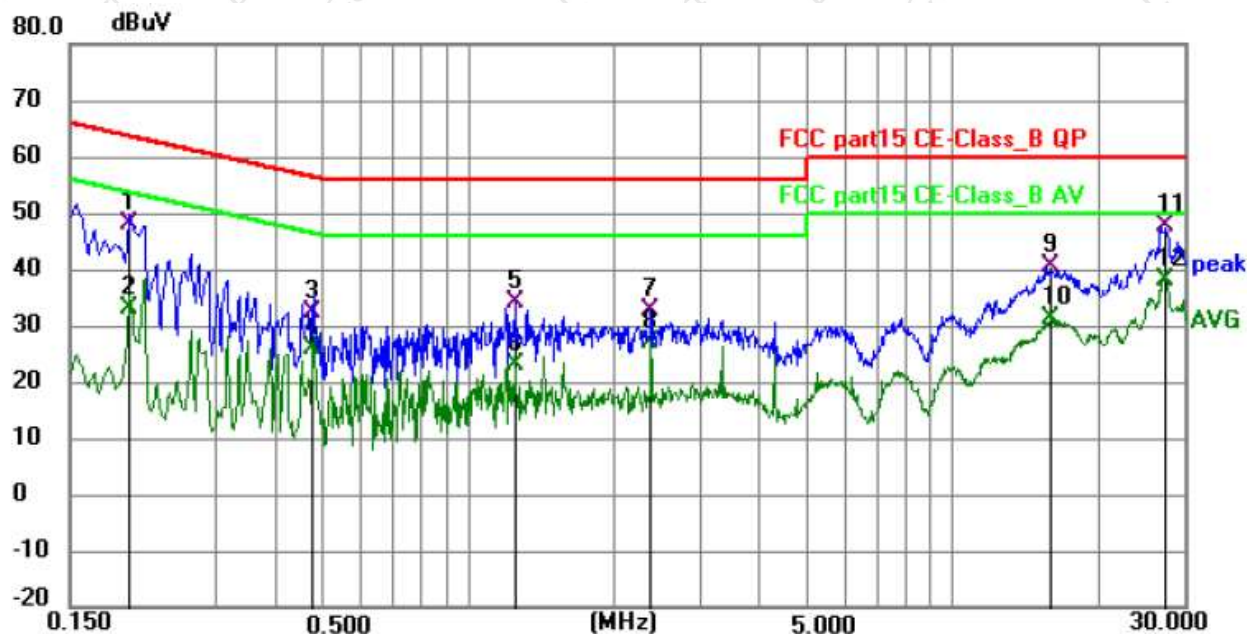

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	38.24	9.91	48.15	63.63	-15.48	QP	P	
2	0.1995	23.04	9.91	32.95	53.63	-20.68	AVG	P	
3	0.4785	22.47	9.88	32.35	56.37	-24.02	QP	P	
4	0.4785	16.06	9.88	25.94	46.37	-20.43	AVG	P	
5	1.2435	24.11	9.98	34.09	56.00	-21.91	QP	P	
6	1.2435	12.99	9.98	22.97	46.00	-23.03	AVG	P	
7	2.3820	22.59	9.97	32.56	56.00	-23.44	QP	P	
8	2.3820	17.09	9.97	27.06	46.00	-18.94	AVG	P	
9	15.9360	30.41	9.99	40.40	60.00	-19.60	QP	P	
10	15.9360	21.24	9.99	31.23	50.00	-18.77	AVG	P	
11	27.3615	37.25	10.30	47.55	60.00	-12.45	QP	P	
12 *	27.3615	27.60	10.30	37.90	50.00	-12.10	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

15.407(b) Undesirable emission limits. Except as shown in paragraph (b) (10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.2.3 DEVIATION FROM TEST STANDARD

No deviation




3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

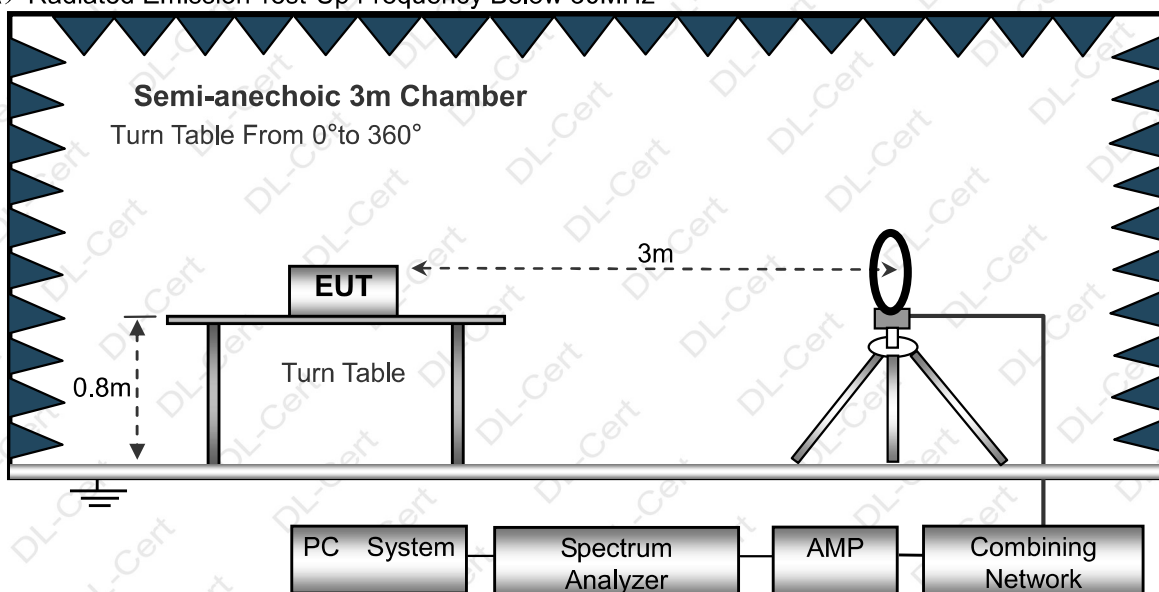


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

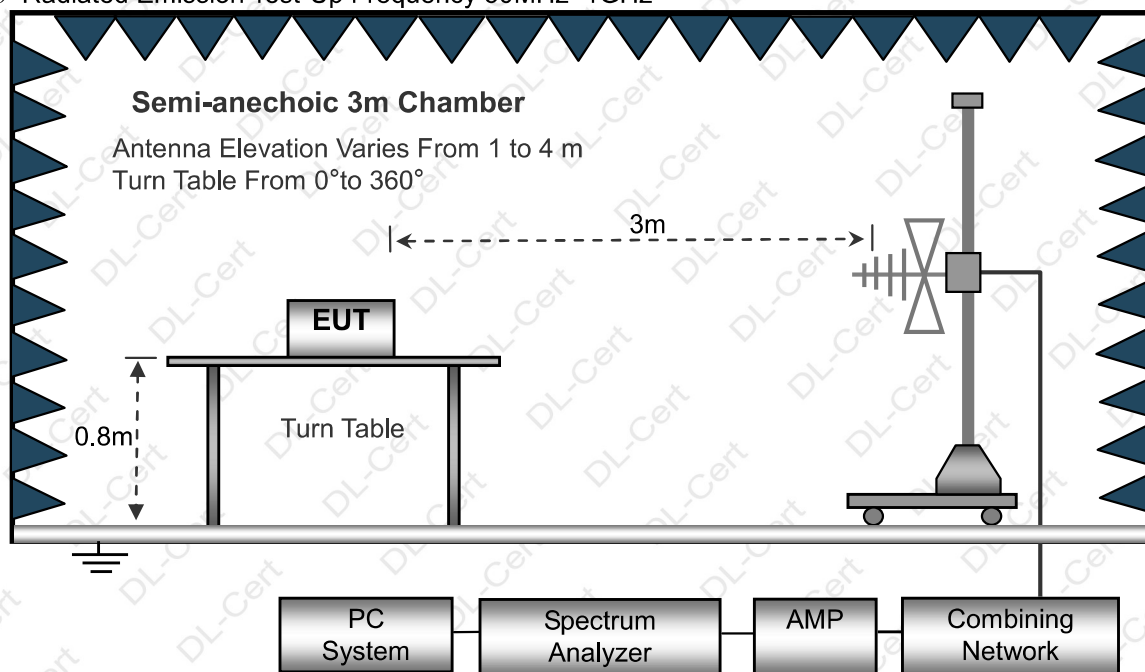



(C) Radiated Emission Test-Up Frequency Above 1GHz

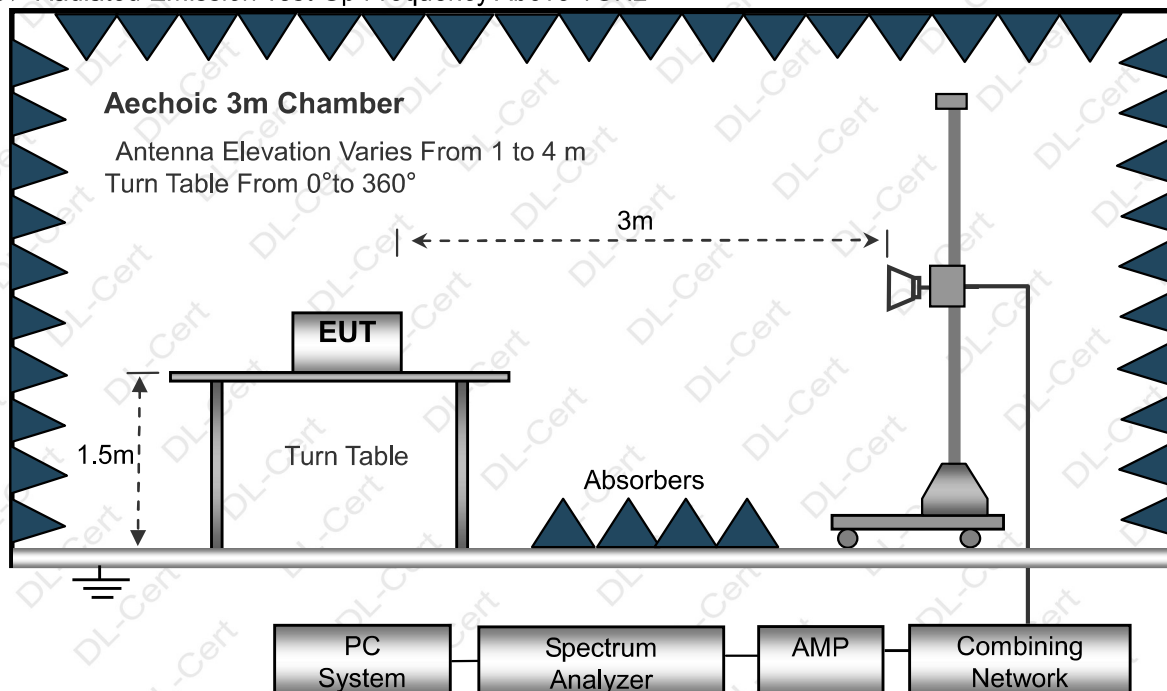**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		51.6613	30.80	-13.13	17.67	40.00	-22.33	QP
2		87.7245	38.54	-17.82	20.72	40.00	-19.28	QP
3		213.7632	38.28	-14.32	23.96	43.50	-19.54	QP
4	*	281.0074	45.41	-12.29	33.12	46.00	-12.88	QP
5		562.6621	32.54	-6.05	26.49	46.00	-19.51	QP
6		744.8659	31.20	-3.25	27.95	46.00	-18.05	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		

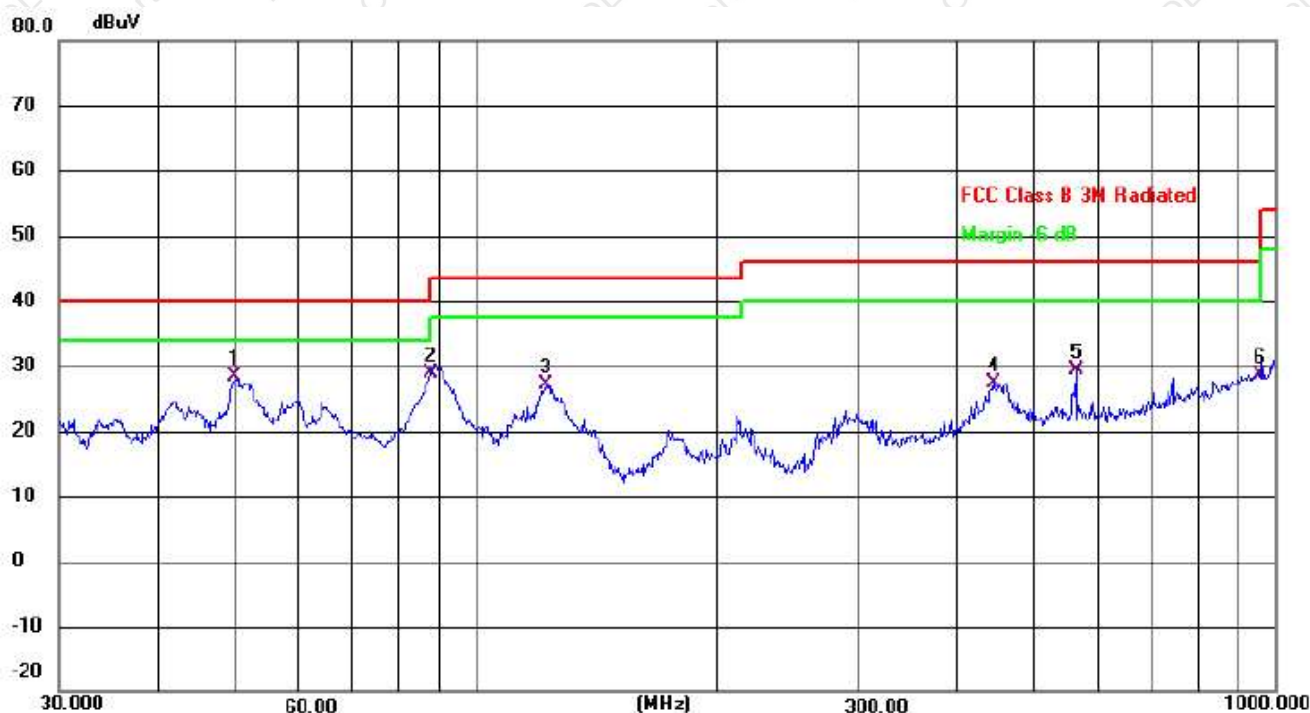

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		49.8813	41.11	-12.84	28.27	40.00	-11.73	QP
2	*	87.7245	46.66	-17.82	28.84	40.00	-11.16	QP
3		121.9753	44.01	-16.80	27.21	43.50	-16.29	QP
4		443.2941	36.04	-8.58	27.46	46.00	-18.54	QP
5		562.6621	35.43	-6.05	29.38	46.00	-16.62	QP
6		955.4379	28.82	-0.07	28.75	46.00	-17.25	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 1

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	55.96	49.05	15.3	37.39	59.6	68.2	-8.6	PK
V	10360	40.82	49.05	15.3	37.39	44.46	54	-9.54	AV
V	15540	52.23	49.16	15.27	40.45	58.79	74	-15.21	PK
V	15540	38.67	49.16	15.27	40.45	45.23	54	-8.77	AV
H	10360	55.68	49.05	15.3	37.39	59.32	68.2	-8.88	PK
H	10360	39.65	49.05	15.3	37.39	43.29	54	-10.71	AV
H	15540	50.78	49.16	15.27	40.45	57.34	74	-16.66	PK
H	15540	38.42	49.16	15.27	40.45	44.98	54	-9.02	AV
operation frequency:5200									
V	10400	56.91	49.09	15.34	37.42	60.58	68.2	-7.62	PK
V	10400	38.94	49.09	15.34	37.42	42.61	54	-11.39	AV
V	15600	51.96	49.18	15.29	40.47	58.54	74	-15.46	PK
V	15600	37.76	49.18	15.29	40.47	44.34	54	-9.66	AV
H	10400	55.44	49.09	15.34	37.42	59.11	68.2	-9.09	PK
H	10400	38.75	49.09	15.34	37.42	42.42	54	-11.58	AV
H	15600	52.51	49.18	15.29	40.47	59.09	74	-14.91	PK
H	15600	38.16	49.18	15.29	40.47	44.74	54	-9.26	AV
operation frequency:5240									
V	10480	57.42	49.11	15.37	37.46	61.14	68.2	-7.06	PK
V	10480	39.34	49.11	15.37	37.46	43.06	54	-10.94	AV
V	15720	51.94	49.21	15.34	40.51	58.58	74	-15.42	PK
V	15720	37.65	49.21	15.34	40.51	44.29	54	-9.71	AV
H	10480	56.75	49.11	15.37	31.31	54.32	68.2	-13.88	PK
H	10480	44.94	49.11	15.37	31.31	42.51	54	-11.49	AV
H	15720	51.66	49.21	15.34	40.51	58.3	74	-15.7	PK
H	15720	36.66	49.21	15.34	40.51	43.3	54	-10.7	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	55.51	49.05	15.3	37.39	59.15	68.2	-9.05	PK
V	10360	37.99	49.05	15.3	37.39	41.63	54	-12.37	AV
V	15540	51.67	49.16	15.27	40.45	58.23	74	-15.77	PK
V	15540	38.14	49.16	15.27	40.45	44.70	54	-9.3	AV
H	10360	56.19	49.05	15.3	37.39	59.83	68.2	-8.37	PK
H	10360	39.12	49.05	15.3	37.39	42.76	54	-11.24	AV
H	15540	50.49	49.16	15.27	40.45	57.05	74	-16.95	PK
H	15540	37.90	49.16	15.27	40.45	44.46	54	-9.54	AV
operation frequency:5200									
V	10400	55.47	49.09	15.34	37.42	59.14	68.2	-9.06	PK
V	10400	38.82	49.09	15.34	37.42	42.49	54	-11.51	AV
V	15600	51.42	49.18	15.29	40.47	58.00	74	-16	PK
V	15600	37.69	49.18	15.29	40.47	44.27	54	-9.73	AV
H	10400	54.76	49.09	15.34	37.42	58.43	68.2	-9.77	PK
H	10400	39.63	49.09	15.34	37.42	43.30	54	-10.7	AV
H	15600	53.20	49.18	15.29	40.47	59.78	74	-14.22	PK
H	15600	39.08	49.18	15.29	40.47	45.66	54	-8.34	AV
operation frequency:5240									
V	10480	56.46	49.11	15.37	37.46	60.18	68.2	-8.02	PK
V	10480	40.07	49.11	15.37	37.46	43.79	54	-10.21	AV
V	15720	51.42	49.21	15.34	40.51	58.06	74	-15.94	PK
V	15720	37.75	49.21	15.34	40.51	44.39	54	-9.61	AV
H	10480	57.06	49.11	15.37	31.31	54.63	68.2	-13.57	PK
H	10480	43.91	49.11	15.37	31.31	41.48	54	-12.52	AV
H	15720	50.94	49.21	15.34	40.51	57.58	74	-16.42	PK
H	15720	37.64	49.21	15.34	40.51	44.28	54	-9.72	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	54.63	49.07	15.33	37.41	58.3	68.2	-9.9	PK
V	10380	38.21	49.07	15.33	37.41	41.88	54	-12.12	AV
V	15570	50.92	49.17	15.28	40.46	57.49	74	-16.51	PK
V	15570	37.27	49.17	15.28	40.46	43.84	54	-10.16	AV
H	10380	54.60	49.07	15.33	37.41	58.27	68.2	-9.93	PK
H	10380	38.98	49.07	15.33	37.41	42.65	54	-11.35	AV
H	15570	50.75	49.17	15.28	40.46	57.32	74	-16.68	PK
H	15570	36.55	49.17	15.28	40.46	43.12	54	-10.88	AV
operation frequency:5230									
V	10460	55.61	49.11	15.37	37.46	59.33	68.2	-8.87	PK
V	10460	38.47	49.11	15.37	37.46	42.19	54	-11.81	AV
V	15690	50.85	49.21	15.34	40.51	57.49	74	-16.51	PK
V	15690	37.24	49.21	15.34	40.51	43.88	54	-10.12	AV
H	10460	55.97	49.11	15.37	31.31	53.54	68.2	-14.66	PK
H	10460	43.45	49.11	15.37	31.31	41.02	54	-12.98	AV
H	15690	51.32	49.21	15.34	40.51	57.96	74	-16.04	PK
H	15690	36.74	49.21	15.34	40.51	43.38	54	-10.62	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	55.75	49.05	15.3	37.39	59.39	68.2	-8.81	PK
V	10360	38.56	49.05	15.3	37.39	42.20	54	-11.8	AV
V	15540	50.81	49.16	15.27	40.45	57.37	74	-16.63	PK
V	15540	37.73	49.16	15.27	40.45	44.29	54	-9.71	AV
H	10360	55.73	49.05	15.3	37.39	59.37	68.2	-8.83	PK
H	10360	37.78	49.05	15.3	37.39	41.42	54	-12.58	AV
H	15540	51.85	49.16	15.27	40.45	58.41	74	-15.59	PK
H	15540	38.72	49.16	15.27	40.45	45.28	54	-8.72	AV
operation frequency:5200									
V	10400	55.74	49.09	15.34	37.42	59.41	68.2	-8.79	PK
V	10400	40.63	49.09	15.34	37.42	44.30	54	-9.7	AV
V	15600	51.43	49.18	15.29	40.47	58.01	74	-15.99	PK
V	15600	39.77	49.18	15.29	40.47	46.35	54	-7.65	AV
H	10400	55.05	49.09	15.34	37.42	58.72	68.2	-9.48	PK
H	10400	39.93	49.09	15.34	37.42	43.60	54	-10.4	AV
H	15600	52.98	49.18	15.29	40.47	59.56	74	-14.44	PK
H	15600	38.90	49.18	15.29	40.47	45.48	54	-8.52	AV
operation frequency:5240									
V	10480	56.42	49.11	15.37	37.46	60.14	68.2	-8.06	PK
V	10480	40.19	49.11	15.37	37.46	43.91	54	-10.09	AV
V	15720	51.09	49.21	15.34	40.51	57.73	74	-16.27	PK
V	15720	39.26	49.21	15.34	40.51	45.90	54	-8.1	AV
H	10480	56.45	49.11	15.37	31.31	54.02	68.2	-14.18	PK
H	10480	43.71	49.11	15.37	31.31	41.28	54	-12.72	AV
H	15720	51.80	49.21	15.34	40.51	58.44	74	-15.56	PK
H	15720	38.07	49.21	15.34	40.51	44.71	54	-9.29	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac 40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	54.62	49.07	15.33	37.41	58.29	68.2	-9.91	PK
V	10380	39.17	49.07	15.33	37.41	42.84	54	-11.16	AV
V	15570	51.12	49.17	15.28	40.46	57.69	74	-16.31	PK
V	15570	38.47	49.17	15.28	40.46	45.04	54	-8.96	AV
H	10380	54.54	49.07	15.33	37.41	58.21	68.2	-9.99	PK
H	10380	39.66	49.07	15.33	37.41	43.33	54	-10.67	AV
H	15570	49.99	49.17	15.28	40.46	56.56	74	-17.44	PK
H	15570	38.48	49.17	15.28	40.46	45.05	54	-8.95	AV
operation frequency:5230									
V	10460	55.49	49.11	15.37	37.46	59.21	68.2	-8.99	PK
V	10460	40.43	49.11	15.37	37.46	44.15	54	-9.85	AV
V	15690	51.42	49.21	15.34	40.51	58.06	74	-15.94	PK
V	15690	38.30	49.21	15.34	40.51	44.94	54	-9.06	AV
H	10460	56.28	49.11	15.37	31.31	53.85	68.2	-14.35	PK
H	10460	42.97	49.11	15.37	31.31	40.54	54	-13.46	AV
H	15690	50.81	49.21	15.34	40.51	57.45	74	-16.55	PK
H	15690	39.75	49.21	15.34	40.51	46.39	54	-7.61	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5210									
V	10420	55.24	49.07	15.33	37.41	58.91	68.2	-9.29	PK
V	10420	40.55	49.07	15.33	37.41	44.22	54	-9.78	AV
V	15630	49.86	49.17	15.28	40.46	56.43	74	-17.57	PK
V	15630	38.44	49.17	15.28	40.46	45.01	54	-8.99	AV
H	10420	54.98	49.07	15.33	37.41	58.65	68.2	-9.55	PK
H	10420	40.12	49.07	15.33	37.41	43.79	54	-10.21	AV
H	15630	51.43	49.17	15.28	40.46	58.00	74	-16	PK
H	15630	39.48	49.17	15.28	40.46	46.05	54	-7.95	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11a band 4

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	52.51	49.05	15.3	37.39	56.15	74	-17.85	PK
V	11490	40.52	49.05	15.3	37.39	44.16	54	-9.84	AV
V	17235	53.78	49.16	15.27	40.45	60.34	68.2	-7.86	PK
V	17235	38.66	49.16	15.27	40.45	45.22	54	-8.78	AV
H	11490	50.55	49.05	15.3	37.39	54.19	74	-19.81	PK
H	11490	41.49	49.05	15.3	37.39	45.13	54	-8.87	AV
H	17235	49.52	49.16	15.27	40.45	56.08	68.2	-12.12	PK
H	17235	38.58	49.16	15.27	40.45	45.14	54	-8.86	AV
operation frequency:5785									
V	11570	50.55	49.09	15.34	37.42	54.22	74	-19.78	PK
V	11570	41.18	49.09	15.34	37.42	44.85	54	-9.15	AV
V	17355	49.39	49.18	15.29	40.47	55.97	68.2	-12.23	PK
V	17355	39.31	49.18	15.29	40.47	45.89	54	-8.11	AV
H	11570	49.94	49.09	15.34	37.42	53.61	74	-20.39	PK
H	11570	41.36	49.09	15.34	37.42	45.03	54	-8.97	AV
H	17355	47.60	49.18	15.29	40.47	54.18	68.2	-14.02	PK
H	17355	39.20	49.18	15.29	40.47	45.78	54	-8.22	AV
operation frequency:5825									
V	11650	51.40	49.11	15.37	37.46	55.12	74	-18.88	PK
V	11650	41.19	49.11	15.37	37.46	44.91	54	-9.09	AV
V	17475	48.78	49.21	15.34	40.51	55.42	68.2	-12.78	PK
V	17475	38.73	49.21	15.34	40.51	45.37	54	-8.63	AV
H	11650	56.73	49.11	15.37	31.31	54.30	74	-19.7	PK
H	11650	48.19	49.11	15.37	31.31	45.76	54	-8.24	AV
H	17475	48.49	49.21	15.34	40.51	55.13	68.2	-13.07	PK
H	17475	38.69	49.21	15.34	40.51	45.33	54	-8.67	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	48.66	49.05	15.3	37.39	52.3	74	-21.7	PK
V	11490	41.49	49.05	15.3	37.39	45.13	54	-8.87	AV
V	17235	47.90	49.16	15.27	40.45	54.46	68.2	-13.74	PK
V	17235	39.99	49.16	15.27	40.45	46.55	54	-7.45	AV
H	11490	48.43	49.05	15.3	37.39	52.07	74	-21.93	PK
H	11490	40.86	49.05	15.3	37.39	44.5	54	-9.5	AV
H	17235	47.37	49.16	15.27	40.45	53.93	68.2	-14.27	PK
H	17235	40.10	49.16	15.27	40.45	46.66	54	-7.34	AV
operation frequency:5785									
V	11570	51.63	49.09	15.34	37.42	55.3	74	-18.7	PK
V	11570	41.74	49.09	15.34	37.42	45.41	54	-8.59	AV
V	17355	48.65	49.18	15.29	40.47	55.23	68.2	-12.97	PK
V	17355	39.18	49.18	15.29	40.47	45.76	54	-8.24	AV
H	11570	49.17	49.09	15.34	37.42	52.84	74	-21.16	PK
H	11570	43.25	49.09	15.34	37.42	46.92	54	-7.08	AV
H	17355	48.36	49.18	15.29	40.47	54.94	68.2	-13.26	PK
H	17355	39.37	49.18	15.29	40.47	45.95	54	-8.05	AV
operation frequency:5825									
V	11650	50.51	49.11	15.37	37.46	54.23	74	-19.77	PK
V	11650	40.97	49.11	15.37	37.46	44.69	54	-9.31	AV
V	17475	47.58	49.21	15.34	40.51	54.22	68.2	-13.98	PK
V	17475	40.20	49.21	15.34	40.51	46.84	54	-7.16	AV
H	11650	56.92	49.11	15.37	31.31	54.49	74	-19.51	PK
H	11650	43.92	49.11	15.37	31.31	41.49	54	-12.51	AV
H	17475	48.59	49.21	15.34	40.51	55.23	68.2	-12.97	PK
H	17475	39.99	49.21	15.34	40.51	46.63	54	-7.37	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	48.56	49.07	15.33	37.41	52.23	74	-21.77	PK
V	11510	40.58	49.07	15.33	37.41	44.25	54	-9.75	AV
V	17265	48.84	49.17	15.28	40.46	55.41	68.2	-12.79	PK
V	17265	40.14	49.17	15.28	40.46	46.71	54	-7.29	AV
H	11510	47.86	49.07	15.33	37.41	51.53	74	-22.47	PK
H	11510	40.96	49.07	15.33	37.41	44.63	54	-9.37	AV
H	17265	48.83	49.17	15.28	40.46	55.4	68.2	-12.8	PK
H	17265	38.79	49.17	15.28	40.46	45.36	54	-8.64	AV
operation frequency:5795									
V	11590	49.84	49.11	15.37	37.46	53.56	74	-20.44	PK
V	11590	40.09	49.11	15.37	37.46	43.81	54	-10.19	AV
V	17385	47.01	49.21	15.34	40.51	53.65	68.2	-14.55	PK
V	17385	39.29	49.21	15.34	40.51	45.93	54	-8.07	AV
H	11590	55.91	49.11	15.37	31.31	53.48	74	-20.52	PK
H	11590	43.24	49.11	15.37	31.31	40.81	54	-13.19	AV
H	17385	47.54	49.21	15.34	40.51	54.18	68.2	-14.02	PK
H	17385	39.65	49.21	15.34	40.51	46.29	54	-7.71	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	48.94	49.05	15.3	37.39	52.58	74	-21.42	PK
V	11490	41.83	49.05	15.3	37.39	45.47	54	-8.53	AV
V	17235	48.26	49.16	15.27	40.45	54.82	68.2	-13.38	PK
V	17235	39.18	49.16	15.27	40.45	45.74	54	-8.26	AV
H	11490	48.07	49.05	15.3	37.39	51.71	74	-22.29	PK
H	11490	41.58	49.05	15.3	37.39	45.22	54	-8.78	AV
H	17235	48.44	49.16	15.27	40.45	55	68.2	-13.2	PK
H	17235	38.98	49.16	15.27	40.45	45.54	54	-8.46	AV
operation frequency:5785									
V	11570	48.97	49.09	15.34	37.42	52.64	74	-21.36	PK
V	11570	41.34	49.09	15.34	37.42	45.01	54	-8.99	AV
V	17355	48.85	49.18	15.29	40.47	55.43	68.2	-12.77	PK
V	17355	39.91	49.18	15.29	40.47	46.49	54	-7.51	AV
H	11570	49.17	49.09	15.34	37.42	52.84	74	-21.16	PK
H	11570	42.44	49.09	15.34	37.42	46.11	54	-7.89	AV
H	17355	48.35	49.18	15.29	40.47	54.93	68.2	-13.27	PK
H	17355	39.65	49.18	15.29	40.47	46.23	54	-7.77	AV
operation frequency:5825									
V	11650	49.50	49.11	15.37	37.46	53.22	74	-20.78	PK
V	11650	41.11	49.11	15.37	37.46	44.83	54	-9.17	AV
V	17475	48.23	49.21	15.34	40.51	54.87	68.2	-13.33	PK
V	17475	39.68	49.21	15.34	40.51	46.32	54	-7.68	AV
H	11650	56.35	49.11	15.37	31.31	53.92	74	-20.08	PK
H	11650	43.54	49.11	15.37	31.31	41.11	54	-12.89	AV
H	17475	47.37	49.21	15.34	40.51	54.01	68.2	-14.19	PK
H	17475	40.30	49.21	15.34	40.51	46.94	54	-7.06	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.50	49.07	15.33	37.41	53.17	74	-20.83	PK
V	11510	42.27	49.07	15.33	37.41	45.94	54	-8.06	AV
V	17265	48.08	49.17	15.28	40.46	54.65	68.2	-13.55	PK
V	17265	40.96	49.17	15.28	40.46	47.53	54	-6.47	AV
H	11510	47.97	49.07	15.33	37.41	51.64	74	-22.36	PK
H	11510	41.73	49.07	15.33	37.41	45.4	54	-8.60	AV
H	17265	47.85	49.17	15.28	40.46	54.42	68.2	-13.78	PK
H	17265	40.22	49.17	15.28	40.46	46.79	54	-7.21	AV
operation frequency:5795									
V	11590	49.02	49.11	15.37	37.46	52.74	74	-21.26	PK
V	11590	40.98	49.11	15.37	37.46	44.7	54	-9.30	AV
V	17385	47.90	49.21	15.34	40.51	54.54	68.2	-13.66	PK
V	17385	39.66	49.21	15.34	40.51	46.3	54	-7.70	AV
H	11590	57.14	49.11	15.37	31.31	54.71	74	-19.29	PK
H	11590	44.58	49.11	15.37	31.31	42.15	54	-11.85	AV
H	17385	48.26	49.21	15.34	40.51	54.9	68.2	-13.30	PK
H	17385	39.07	49.21	15.34	40.51	45.71	54	-8.29	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5775									
V	11550	49.71	49.07	15.33	37.41	53.38	74	-20.62	PK
V	11550	42.41	49.07	15.33	37.41	46.08	54	-7.92	AV
V	17325	49.10	49.17	15.28	40.46	55.67	68.2	-12.53	PK
V	17325	39.15	49.17	15.28	40.46	45.72	54	-8.28	AV
H	11550	49.34	49.07	15.33	37.41	53.01	74	-20.99	PK
H	11550	41.72	49.07	15.33	37.41	45.39	54	-8.61	AV
H	17325	48.22	49.17	15.28	40.46	54.79	68.2	-13.41	PK
H	17325	39.61	49.17	15.28	40.46	46.18	54	-7.82	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.