

# TEST REPORT

Applicant Name : shenzhen hisonic audio products co ltd/yusonic  
Address : 18 Caoping Road, DacaoPu Industrial Zone, Pinghu, Shenzhen,  
Guangdong, China  
Report Number : SZNS1220513-20254E-00B  
FCC ID: 2A63Z-BS-STN

**Test Standard (s)**  
FCC PART 15.247


## Sample Description

Product Type: Bluetooth headphone  
Model No.: bs690, bs696, bs698, stn26, stn27  
Date Received: 2022-05-13  
Date of Test: 2022-05-17 to 2022-05-19  
Report Date: 2022-05-23

|              |       |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**



Black Ding  
EMC Engineer

**Approved By:**



Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “★”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

## **TABLE OF CONTENTS**

|                                                                              |           |
|------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION</b>                                                   | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)                           | 4         |
| OBJECTIVE                                                                    | 4         |
| TEST METHODOLOGY                                                             | 4         |
| MEASUREMENT UNCERTAINTY                                                      | 5         |
| TEST FACILITY                                                                | 5         |
| <b>SYSTEM TEST CONFIGURATION</b>                                             | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION                                            | 6         |
| EUT EXERCISE SOFTWARE                                                        | 6         |
| SPECIAL ACCESSORIES                                                          | 6         |
| EQUIPMENT MODIFICATIONS                                                      | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS                                           | 6         |
| <b>SUMMARY OF TEST RESULTS</b>                                               | <b>9</b>  |
| <b>TEST EQUIPMENT LIST</b>                                                   | <b>10</b> |
| <b>FCC§15.247 (i), §1.1307 (b) &amp; §2.1093 – RF EXPOSURE</b>               | <b>11</b> |
| APPLICABLE STANDARD                                                          | 11        |
| TEST RESULT:                                                                 | 11        |
| <b>FCC §15.203 – ANTENNA REQUIREMENT</b>                                     | <b>12</b> |
| APPLICABLE STANDARD                                                          | 12        |
| ANTENNA CONNECTOR CONSTRUCTION                                               | 12        |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS</b>                         | <b>13</b> |
| APPLICABLE STANDARD                                                          | 13        |
| EUT SETUP                                                                    | 13        |
| EMI TEST RECEIVER SETUP                                                      | 13        |
| TEST PROCEDURE                                                               | 14        |
| FACTOR & MARGIN CALCULATION                                                  | 14        |
| TEST DATA                                                                    | 14        |
| <b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS</b>            | <b>19</b> |
| APPLICABLE STANDARD                                                          | 19        |
| EUT SETUP                                                                    | 19        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP                                  | 20        |
| TEST PROCEDURE                                                               | 20        |
| FACTOR & MARGIN CALCULATION                                                  | 20        |
| TEST DATA                                                                    | 20        |
| <b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH</b> | <b>28</b> |
| APPLICABLE STANDARD                                                          | 28        |
| TEST PROCEDURE                                                               | 28        |
| TEST DATA                                                                    | 28        |
| <b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER</b>                   | <b>36</b> |
| APPLICABLE STANDARD                                                          | 36        |
| TEST PROCEDURE                                                               | 36        |
| TEST DATA                                                                    | 36        |
| <b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE</b>             | <b>42</b> |
| APPLICABLE STANDARD                                                          | 42        |

|                                                      |           |
|------------------------------------------------------|-----------|
| TEST PROCEDURE .....                                 | 42        |
| TEST DATA .....                                      | 42        |
| <b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b> | <b>45</b> |
| APPLICABLE STANDARD .....                            | 45        |
| TEST PROCEDURE .....                                 | 45        |
| TEST DATA .....                                      | 45        |

---

**GENERAL INFORMATION**

---

**Product Description for Equipment under Test (EUT)**

|                                     |                                                            |
|-------------------------------------|------------------------------------------------------------|
| Product                             | Bluetooth headphone                                        |
| Tested Model                        | bs690                                                      |
| Multiple Model                      | bs696, bs698, stn26, stn27                                 |
| Model difference                    | Please refer to DOS letter.                                |
| Frequency Range                     | BLE: 2402-2480MHz                                          |
| Maximum conducted Peak output power | -2.41dBm                                                   |
| Modulation Technique                | BLE 1M/2M                                                  |
| Antenna Specification*              | Internal PCB Antenna: -0.58dBi (provided by the applicant) |
| Voltage Range                       | DC3.7V from battery or DC 5V from Adapter                  |
| Sample number                       | SZNS1220513-20254E-RF-S1                                   |
| Sample/EUT Status                   | Good condition                                             |

**Objective**

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

**Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

| Parameter                          |                 | Uncertainty |
|------------------------------------|-----------------|-------------|
| Occupied Channel Bandwidth         |                 | 5%          |
| RF output power, conducted         |                 | 0.73dB      |
| Unwanted Emission, conducted       |                 | 1.6dB       |
| AC Power Lines Conducted Emissions |                 | 2.72dB      |
| Emissions,<br>Radiated             | 30MHz - 1GHz    | 4.28dB      |
|                                    | 1GHz - 18GHz    | 4.98dB      |
|                                    | 18GHz - 26.5GHz | 5.06dB      |
| Temperature                        |                 | 1°C         |
| Humidity                           |                 | 6%          |
| Supply voltages                    |                 | 0.4%        |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | 21      | 2444            |
| ...     | ...             | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | ...     | ...             |
| 18      | 2438            | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

EUT was tested with Channel 0, 19 and 39.

### EUT Exercise Software

Software “FCC\_assist\_1.0.2.2”\* was used during testing and the power level was Default \*.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

| Manufacturer | Description  | Model           | Serial Number  |
|--------------|--------------|-----------------|----------------|
| HUAWEI       | Adapter 1    | HW-050100C01    | H779KBK6V19398 |
| hoop         | Adapter 2    | KA06E-0501000US | 1929           |
| Unknown      | Earphone     | Unknown         | Unknown        |
| Lenovo       | Mobile phone | ZAL712AA601AB   | HGEG78LJ       |


### External I/O Cable

| Cable Description                      | Length (m) | From/Port | To        |
|----------------------------------------|------------|-----------|-----------|
| Un-shielding Detachable USB Cable      | 0.5        | EUT       | Adapter 1 |
| Un-shielding Detachable USB Cable      | 1.0        | EUT       | Adapter 2 |
| Un-shielding Detachable Earphone Cable | 1.0        | EUT       | Earphone  |
| Un-shielding Detachable Aux Cable      | 0.5        | EUT       | Phone     |


**Block Diagram of Test Setup**

Model: bs690

For conducted emission:

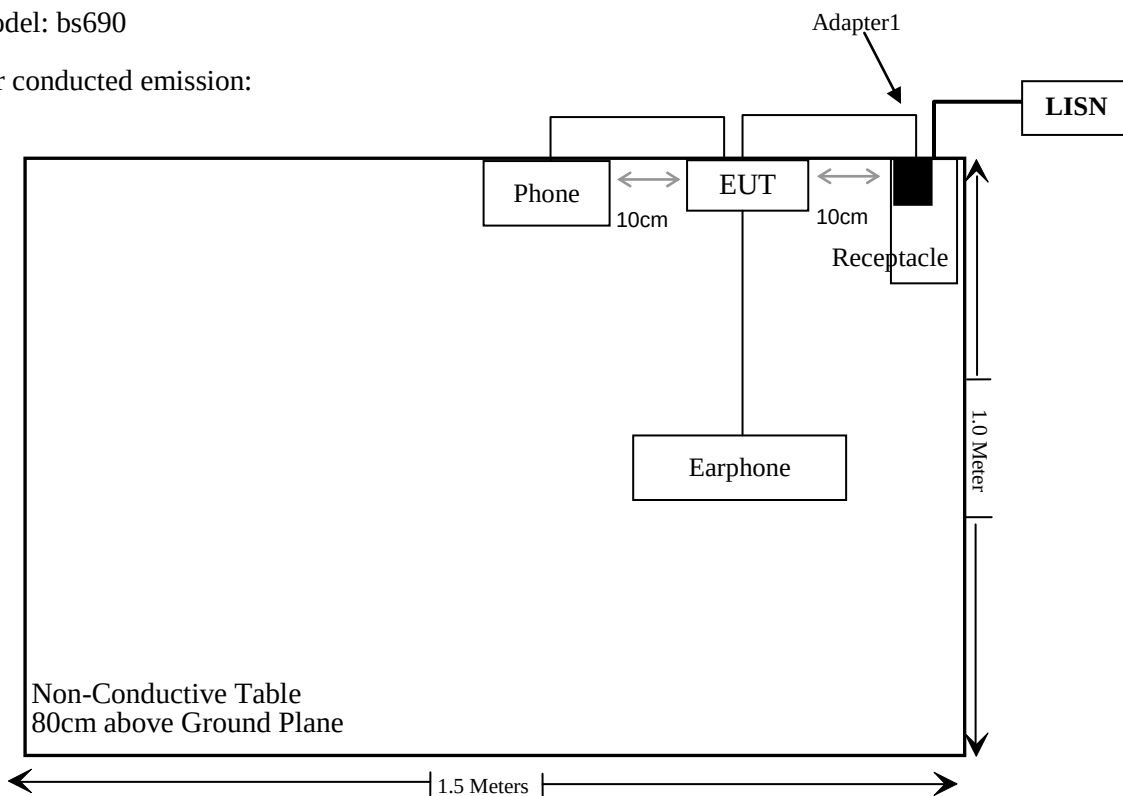


For radiated emission:

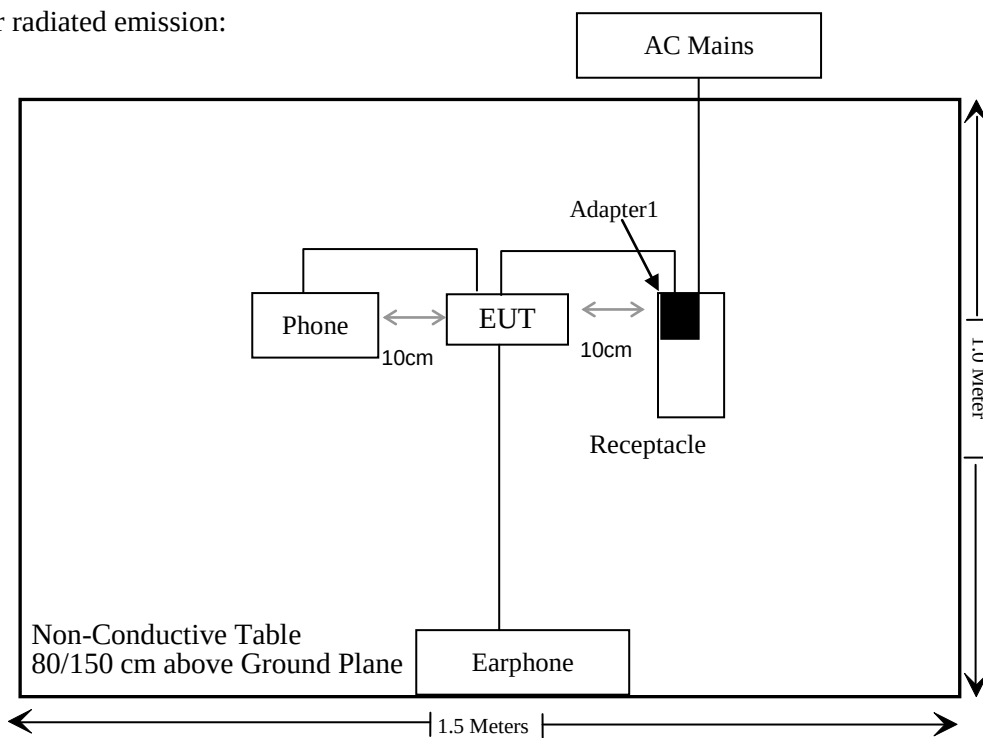


Model: bs698

For conducted emission:

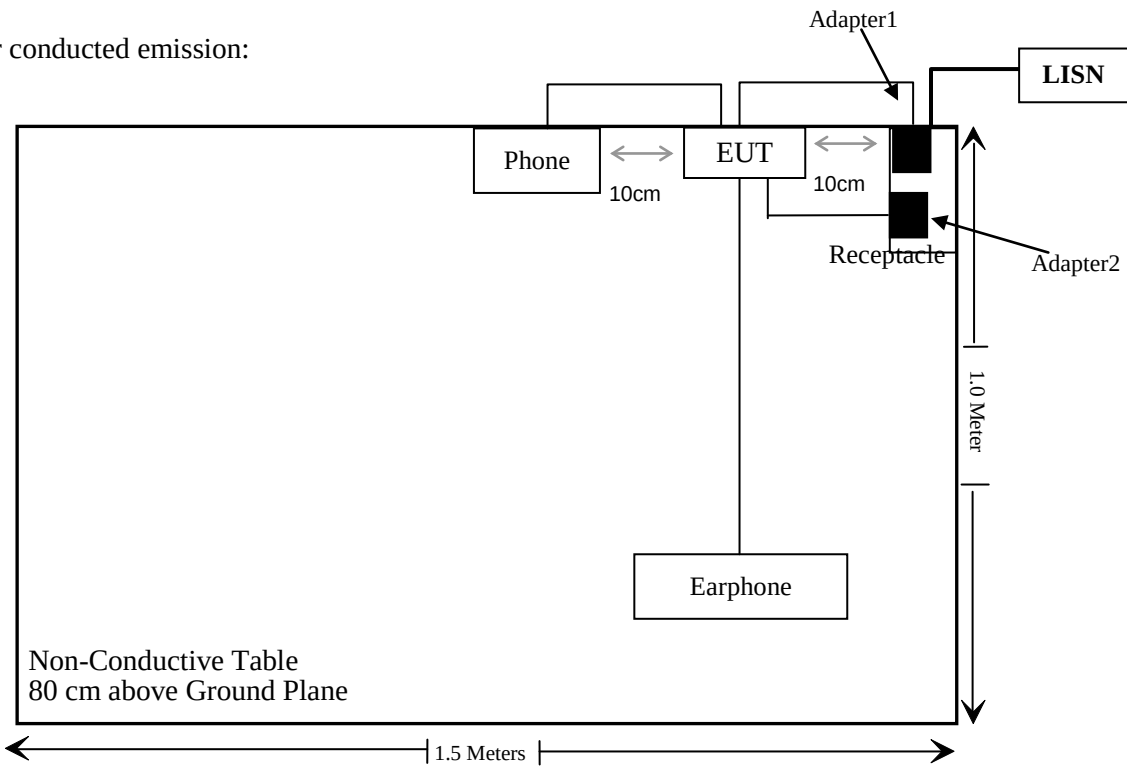

For radiated emission: For Below 1GHz

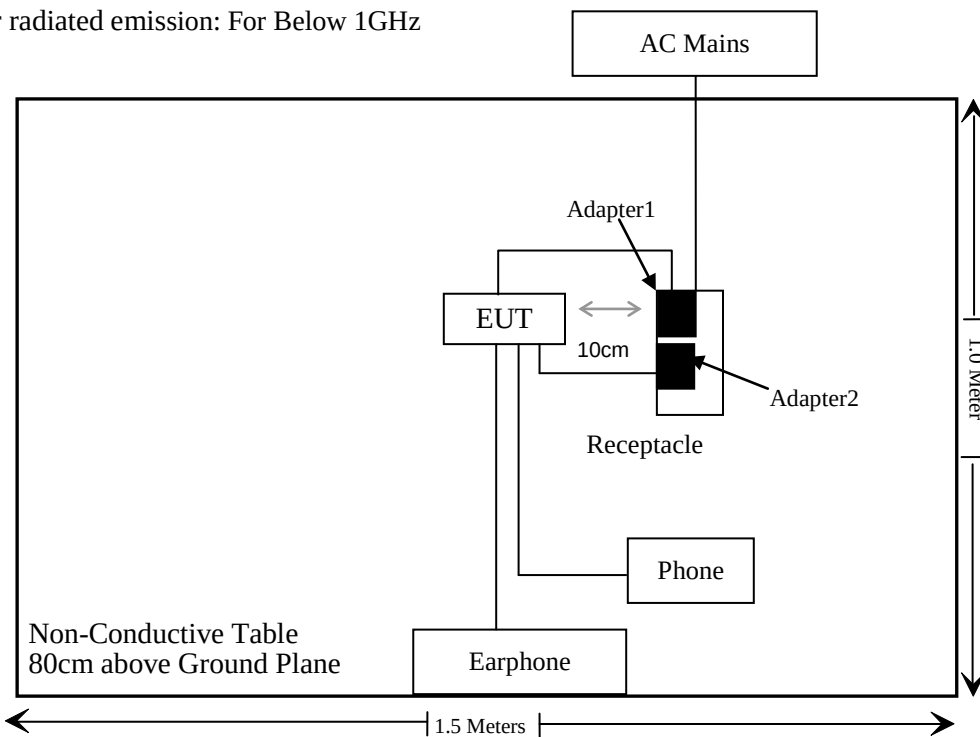



## SUMMARY OF TEST RESULTS

| FCC Rules                             | Description of Test                          | Result    |
|---------------------------------------|----------------------------------------------|-----------|
| FCC§15.247 (i), §1.1307 (b) & §2.1093 | RF Exposure                                  | Compliant |
| §15.203                               | Antenna Requirement                          | Compliant |
| §15.207(a)                            | AC Line Conducted Emissions                  | Compliant |
| §15.205, §15.209, §15.247(d)          | Spurious Emissions                           | Compliant |
| §15.247 (a)(2)                        | 6 dB Emission Bandwidth & Occupied Bandwidth | Compliant |
| §15.247(b)(3)                         | Maximum Conducted Output Power               | Compliant |
| §15.247(d)                            | 100 kHz Bandwidth of Frequency Band Edge     | Compliant |
| §15.247(e)                            | Power Spectral Density                       | Compliant |

**TEST EQUIPMENT LIST**

| Manufacturer                                     | Description                  | Model                | Serial Number      | Calibration Date | Calibration Due Date |
|--------------------------------------------------|------------------------------|----------------------|--------------------|------------------|----------------------|
| Conducted Emission Test                          |                              |                      |                    |                  |                      |
| Rohde & Schwarz                                  | EMI Test Receiver            | ESCI                 | 100784             | 2021/12/13       | 2022/12/12           |
| Rohde & Schwarz                                  | L.I.S.N.                     | ENV216               | 101314             | 2021/12/13       | 2022/12/12           |
| Anritsu Corp                                     | 50 Coaxial Switch            | MP59B                | 6100237248         | 2021/12/13       | 2022/12/12           |
| Unknown                                          | RF Coaxial Cable             | No.17                | N0350              | 2021/12/14       | 2022/12/13           |
| Conducted Emission Test Software: e3 19821b (V9) |                              |                      |                    |                  |                      |
| Radiated Emissions Test                          |                              |                      |                    |                  |                      |
| Rohde & Schwarz                                  | Test Receiver                | ESR                  | 102725             | 2021/12/13       | 2022/12/12           |
| Rohde & Schwarz                                  | Spectrum Analyzer            | FSV40                | 101949             | 2021/12/13       | 2022/12/12           |
| SONOMA INSTRUMENT                                | Amplifier                    | 310 N                | 186131             | 2021/11/09       | 2022/11/08           |
| A.H. Systems, inc.                               | Preamplifier                 | PAM-0118P            | 135                | 2021/11/09       | 2022/11/08           |
| Quinstar                                         | Amplifier                    | QLW-184055<br>36-J0  | 15964001002        | 2021/11/11       | 2022/11/10           |
| Schwarzbeck                                      | Bilog Antenna                | VULB9163             | 9163-323           | 2021/07/06       | 2024/07/05           |
| Schwarzbeck                                      | Horn Antenna                 | BBHA9120D            | 9120D-1067         | 2020/01/05       | 2023/01/04           |
| Schwarzbeck                                      | HORN ANTENNA                 | BBHA9170             | 9170-359           | 2020/01/05       | 2023/01/04           |
| Wainwright                                       | High Pass Filter             | WHKX3.6/18<br>G-10SS | 5                  | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.10                | N050               | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.11                | N1000              | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.12                | N040               | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.13                | N300               | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.14                | N800               | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.15                | N600               | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.16                | N650               | 2021/12/14       | 2022/12/13           |
| Radiated Emission Test Software: e3 19821b (V9)  |                              |                      |                    |                  |                      |
| RF Conducted Test                                |                              |                      |                    |                  |                      |
| Rohde & Schwarz                                  | Spectrum Analyzer            | FSV-40               | 101495             | 2021/12/13       | 2022/12/12           |
| Rohde & Schwarz                                  | Open Switch and Control Unit | OSP120 +<br>OSP-B157 | 101244 +<br>100866 | 2021/12/13       | 2022/12/12           |
| WEINSCHTEL                                       | 10dB Attenuator              | 5324                 | AU 3842            | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable             | No.32                | RF-02              | Each time        |                      |

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b) & §2.1093 – RF EXPOSURE

### Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2 – 1-mW test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

### Test Result:

#### For worst case:

| Mode | Frequency | Maximum Tune-up Conducted Power |      | Ant. Gain | EIRP  |      | 1-mW test Exemption |
|------|-----------|---------------------------------|------|-----------|-------|------|---------------------|
|      | (MHz)     | (dBm)                           | (mW) | (dBi)     | (dBm) | (mW) |                     |
| BLE  | 2402-2480 | -2                              | 0.63 | -0.58     | -2.58 | 0.55 | Yes                 |

**Result:** Compliant.

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Antenna Connector Construction**

The EUT has one internal PCB Antenna arrangement, which was permanently attached and the antenna gain is -0.58dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

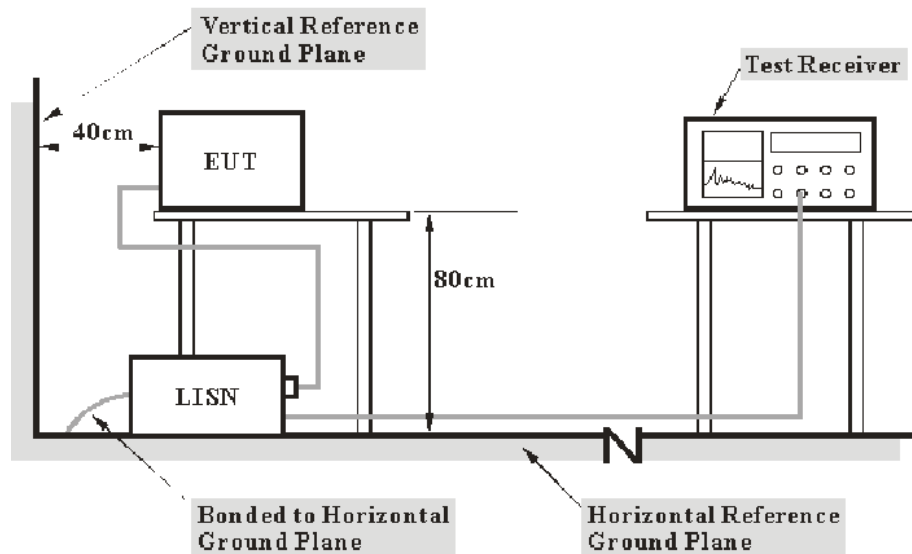

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Jason Liu on 2022-05-17.*

*EUT operation mode: Charging + BLE Transmitting*


**Model: bs690**

AC 120V/60Hz Line:

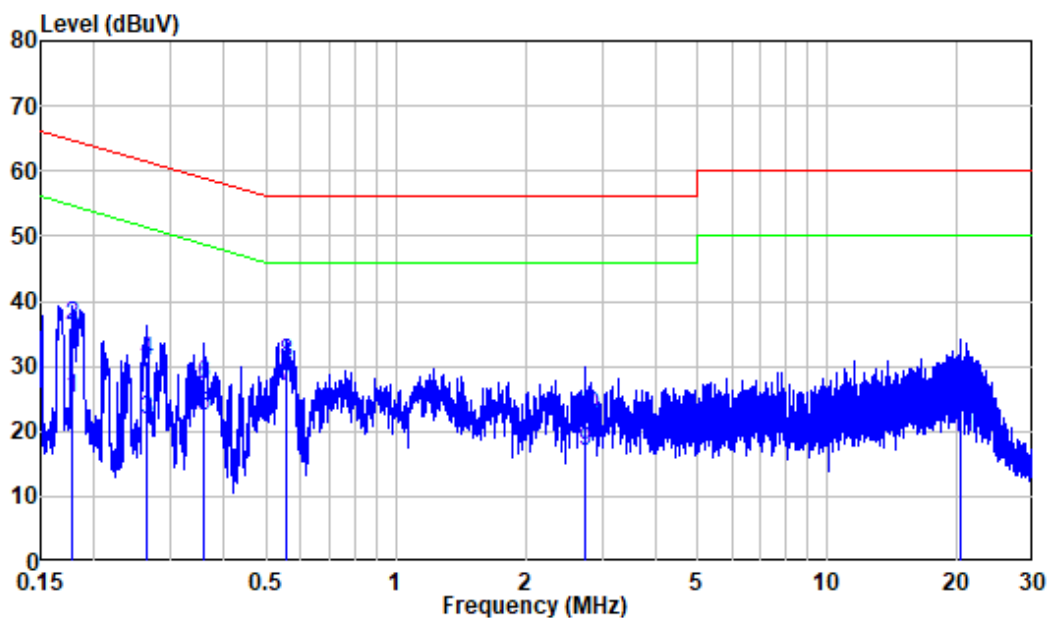

Site : Shielding Room  
 Condition: Line  
 Job No. : SZNS1220513-20254E-RF  
 Mode : Charging + BLE Transmitting  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.177  | 9.80   | 15.19         | 24.99 | 54.62         | -29.63        | Average |
| 2  | 0.177  | 9.80   | 26.33         | 36.13 | 64.62         | -28.49        | QP      |
| 3  | 0.264  | 9.80   | 11.83         | 21.63 | 51.30         | -29.67        | Average |
| 4  | 0.264  | 9.80   | 21.02         | 30.82 | 61.30         | -30.48        | QP      |
| 5  | 0.358  | 9.80   | 12.46         | 22.26 | 48.77         | -26.51        | Average |
| 6  | 0.358  | 9.80   | 17.51         | 27.31 | 58.77         | -31.46        | QP      |
| 7  | 0.558  | 9.81   | 17.07         | 26.88 | 46.00         | -19.12        | Average |
| 8  | 0.558  | 9.81   | 20.75         | 30.56 | 56.00         | -25.44        | QP      |
| 9  | 2.750  | 9.83   | 7.15          | 16.98 | 46.00         | -29.02        | Average |
| 10 | 2.750  | 9.83   | 12.60         | 22.43 | 56.00         | -33.57        | QP      |
| 11 | 20.418 | 10.00  | 9.15          | 19.15 | 50.00         | -30.85        | Average |
| 12 | 20.418 | 10.00  | 16.57         | 26.57 | 60.00         | -33.43        | QP      |

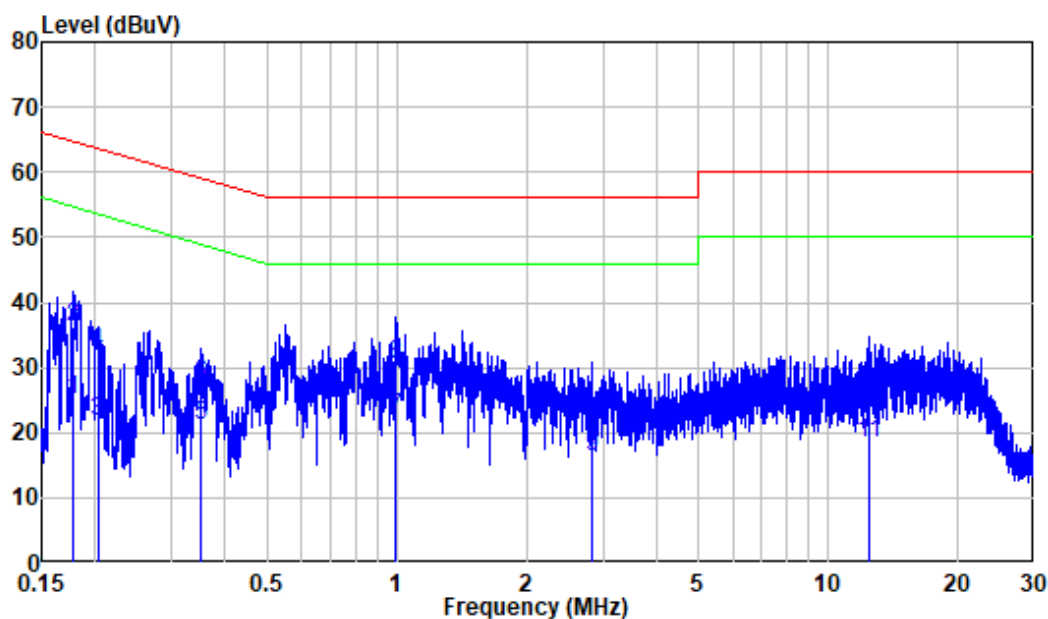**AC 120V/60Hz Neutral:**


Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZNS1220513-20254E-RF  
 Mode : Charging + BLE Transmitting  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.178  | 9.80   | 15.12         | 24.92 | 54.56         | -29.64        | Average |
| 2  | 0.178  | 9.80   | 26.34         | 36.14 | 64.56         | -28.42        | QP      |
| 3  | 0.202  | 9.80   | 11.98         | 21.78 | 53.51         | -31.73        | Average |
| 4  | 0.202  | 9.80   | 22.42         | 32.22 | 63.51         | -31.29        | QP      |
| 5  | 0.352  | 9.80   | 11.40         | 21.20 | 48.91         | -27.71        | Average |
| 6  | 0.352  | 9.80   | 17.58         | 27.38 | 58.91         | -31.53        | QP      |
| 7  | 0.996  | 9.81   | 12.63         | 22.44 | 46.00         | -23.56        | Average |
| 8  | 0.996  | 9.81   | 20.76         | 30.57 | 56.00         | -25.43        | QP      |
| 9  | 2.830  | 9.83   | 6.39          | 16.22 | 46.00         | -29.78        | Average |
| 10 | 2.830  | 9.83   | 12.20         | 22.03 | 56.00         | -33.97        | QP      |
| 11 | 12.392 | 10.02  | 8.34          | 18.36 | 50.00         | -31.64        | Average |
| 12 | 12.392 | 10.02  | 15.10         | 25.12 | 60.00         | -34.88        | QP      |




Model: bs698

AC 120V/60Hz Line:

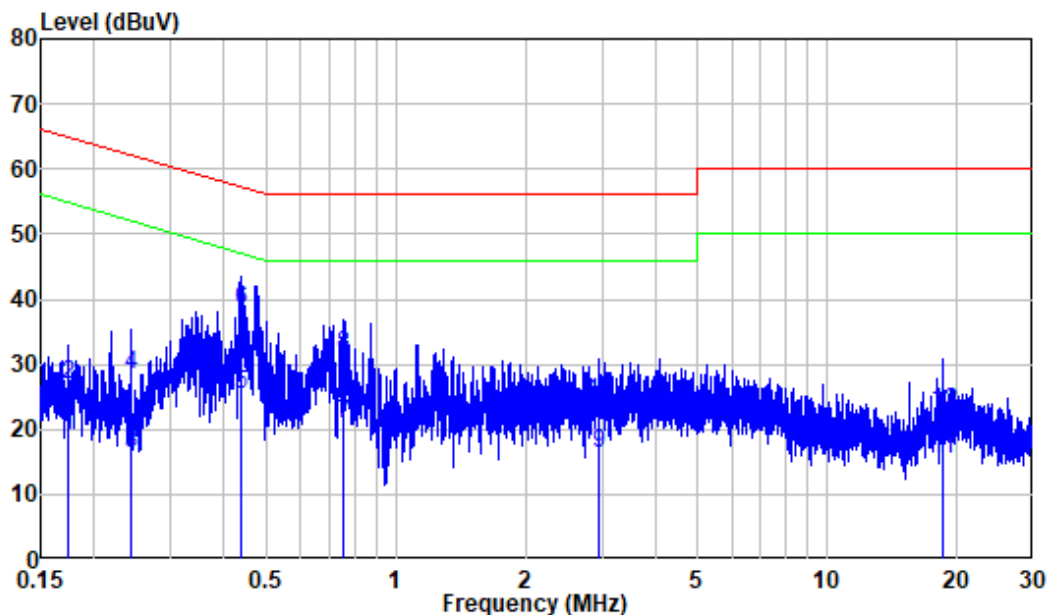

Site : Shielding Room  
 Condition: Line  
 Job No. : SZNS1220513-20254E-RF  
 Mode : Charging + BLE Transmitting  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.174  | 9.80   | 9.20          | 19.00 | 54.77         | -35.77        | Average |
| 2  | 0.174  | 9.80   | 17.21         | 27.01 | 64.77         | -37.76        | QP      |
| 3  | 0.243  | 9.80   | 6.37          | 16.17 | 52.01         | -35.84        | Average |
| 4  | 0.243  | 9.80   | 18.43         | 28.23 | 62.01         | -33.78        | QP      |
| 5  | 0.438  | 9.80   | 15.47         | 25.27 | 47.09         | -21.82        | Average |
| 6  | 0.438  | 9.80   | 28.55         | 38.35 | 57.09         | -18.74        | QP      |
| 7  | 0.758  | 9.81   | 10.91         | 20.72 | 46.00         | -25.28        | Average |
| 8  | 0.758  | 9.81   | 21.52         | 31.33 | 56.00         | -24.67        | QP      |
| 9  | 2.960  | 9.83   | 6.53          | 16.36 | 46.00         | -29.64        | Average |
| 10 | 2.960  | 9.83   | 14.29         | 24.12 | 56.00         | -31.88        | QP      |
| 11 | 18.499 | 9.98   | 5.53          | 15.51 | 50.00         | -34.49        | Average |
| 12 | 18.499 | 9.98   | 12.70         | 22.68 | 60.00         | -37.32        | QP      |


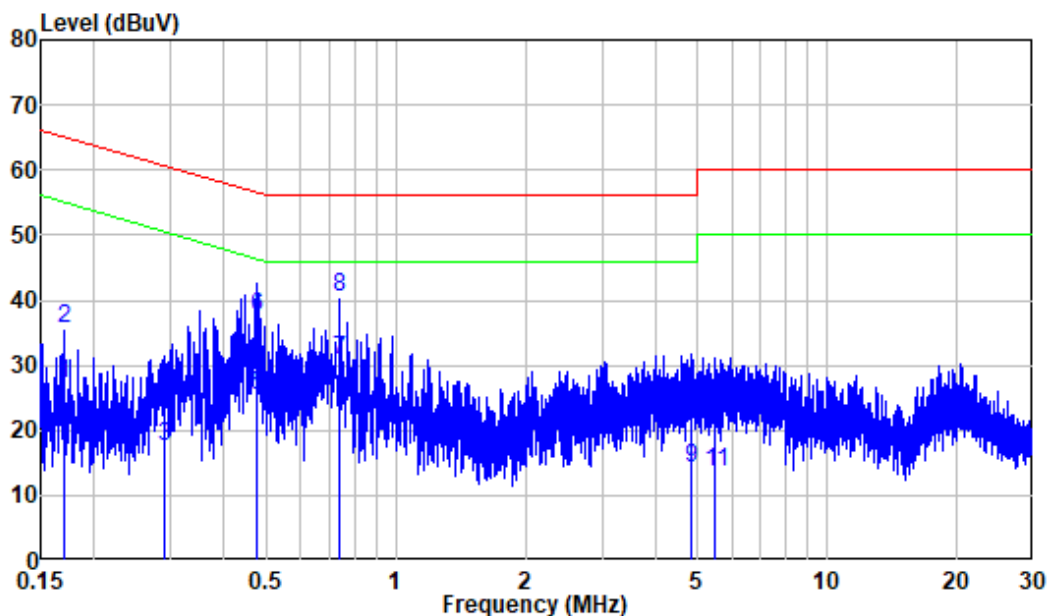
**AC 120V/60Hz Neutral:**

Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZNS1220513-20254E-RF  
 Mode : Charging + BLE Transmitting  
 Power : AC 120V 60Hz

|    | Freq  | Factor | Read Level | Level | Limit | Over   | Remark  |
|----|-------|--------|------------|-------|-------|--------|---------|
|    | MHz   | dB     | dBuV       | dBuV  | dBuV  | dB     |         |
| 1  | 0.170 | 9.80   | 17.36      | 27.16 | 54.98 | -27.82 | Average |
| 2  | 0.170 | 9.80   | 25.91      | 35.71 | 64.98 | -29.27 | QP      |
| 3  | 0.290 | 9.80   | 7.60       | 17.40 | 50.54 | -33.14 | Average |
| 4  | 0.290 | 9.80   | 15.99      | 25.79 | 60.54 | -34.75 | QP      |
| 5  | 0.475 | 9.80   | 15.64      | 25.44 | 46.42 | -20.98 | Average |
| 6  | 0.475 | 9.80   | 27.57      | 37.37 | 56.42 | -19.05 | QP      |
| 7  | 0.740 | 9.81   | 20.96      | 30.77 | 46.00 | -15.23 | Average |
| 8  | 0.740 | 9.81   | 30.57      | 40.38 | 56.00 | -15.62 | QP      |
| 9  | 4.832 | 9.88   | 4.43       | 14.31 | 46.00 | -31.69 | Average |
| 10 | 4.832 | 9.88   | 13.92      | 23.80 | 56.00 | -32.20 | QP      |
| 11 | 5.509 | 9.92   | 3.80       | 13.72 | 50.00 | -36.28 | Average |
| 12 | 5.509 | 9.92   | 12.89      | 22.81 | 60.00 | -37.19 | QP      |

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

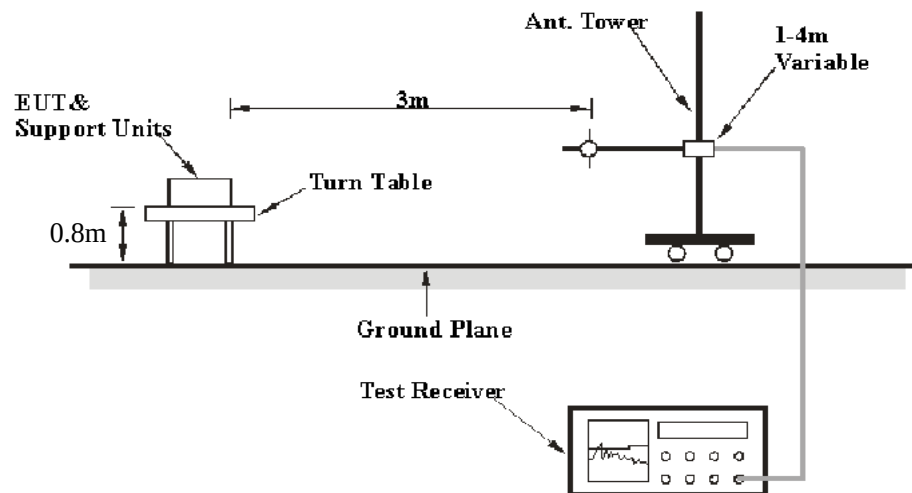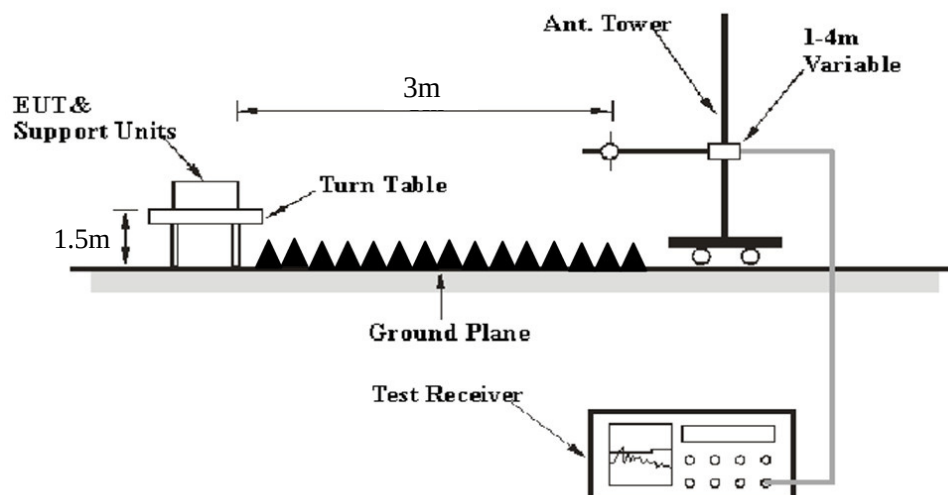**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W               | IF B/W  | Measurement |
|-------------------|---------|-------------------------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz                 | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz                   | /       | PK          |
|                   | 1MHz    | 10 Hz <sup>Note 1</sup> | /       | Average     |
|                   | 1MHz    | > 1/T <sup>Note 2</sup> | /       | Average     |

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$


## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24 °C     |
| Relative Humidity: | 53 %      |
| ATM Pressure:      | 101.2 kPa |

The testing was performed by Level Li on 2022-05-18.

EUT operation mode: Transmitting (Scan with BLE 1M/BLE 2M mode at X axis, Y axis, Z axis, the worst case is at X axis)

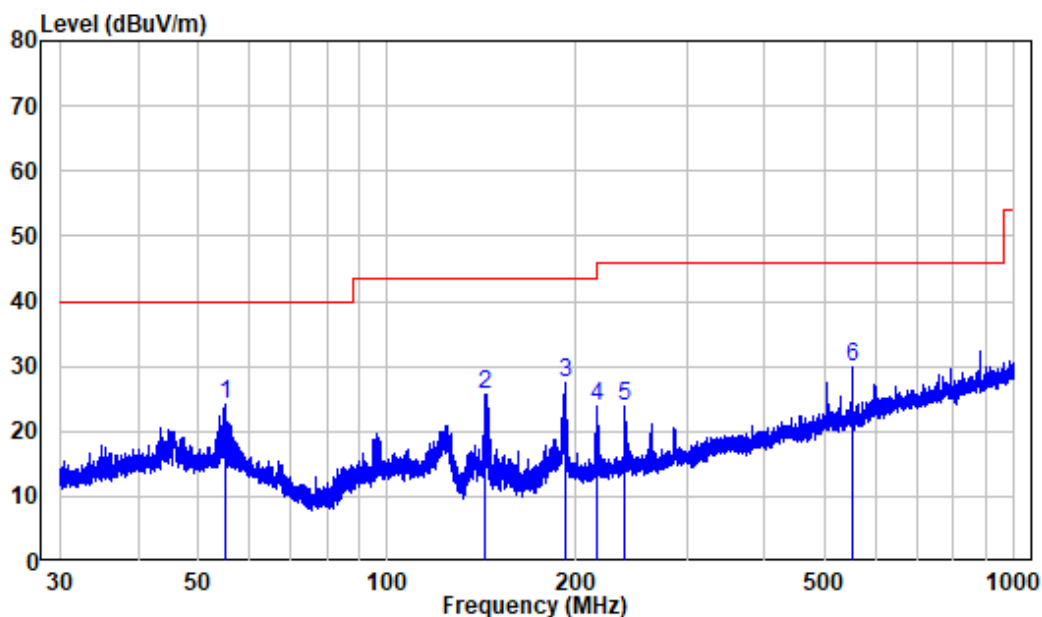**Below 1GHz: BLE 2M Middle Channel (worst case)***Model: bs690***Horizontal**


Site : chamber

Condition: 3m HORIZONTAL

Job No. : SZNS1220513-20254E-RF

Test Mode: BLE Transmitting

|   | Freq    | Factor | Read Level | Level  | Limit  | Over   | Remark |
|---|---------|--------|------------|--------|--------|--------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 | 55.076  | -10.28 | 34.52      | 24.24  | 40.00  | -15.76 | Peak   |
| 2 | 143.515 | -15.52 | 41.07      | 25.55  | 43.50  | -17.95 | Peak   |
| 3 | 191.997 | -11.25 | 38.70      | 27.45  | 43.50  | -16.05 | Peak   |
| 4 | 216.024 | -11.63 | 35.42      | 23.79  | 46.00  | -22.21 | Peak   |
| 5 | 239.147 | -10.92 | 34.67      | 23.75  | 46.00  | -22.25 | Peak   |
| 6 | 552.157 | -4.07  | 33.95      | 29.88  | 46.00  | -16.12 | Peak   |

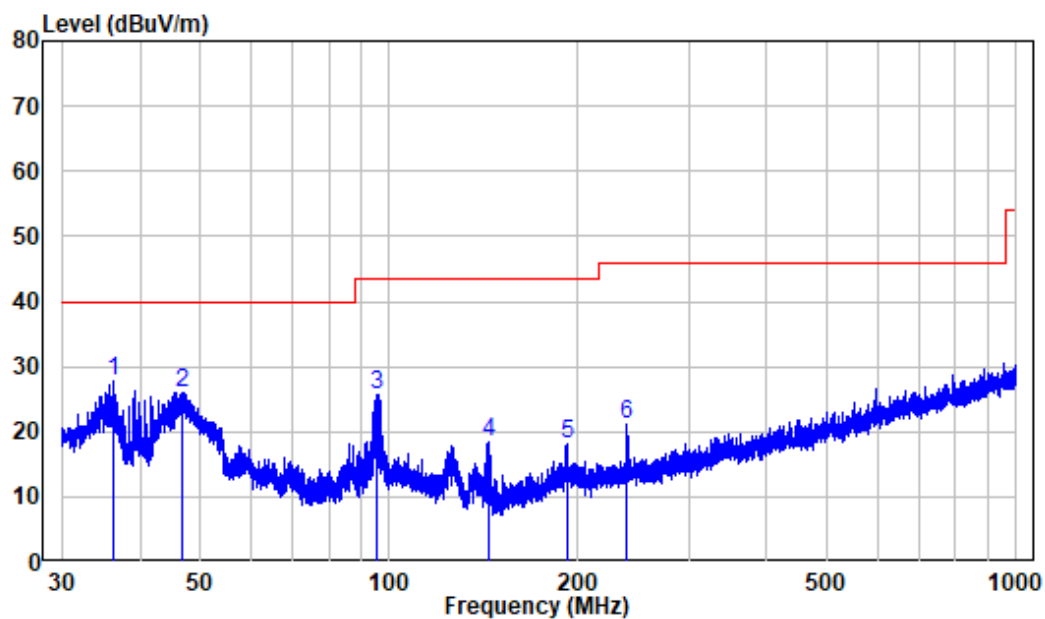**Vertical**

Site : chamber

Condition: 3m VERTICAL


Job No. : SZNS1220513-20254E-RF

Test Mode: BLE Transmitting

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 36.206  | -11.16 | 38.84         | 27.68  | 40.00         | -12.32        | Peak   |
| 2 | 46.564  | -10.00 | 36.11         | 26.11  | 40.00         | -13.89        | Peak   |
| 3 | 95.469  | -12.40 | 38.09         | 25.69  | 43.50         | -17.81        | Peak   |
| 4 | 144.019 | -15.52 | 34.00         | 18.48  | 43.50         | -25.02        | Peak   |
| 5 | 192.503 | -11.27 | 29.38         | 18.11  | 43.50         | -25.39        | Peak   |
| 6 | 239.147 | -10.92 | 31.92         | 21.00  | 46.00         | -25.00        | Peak   |

Model: bs698

### Horizontal

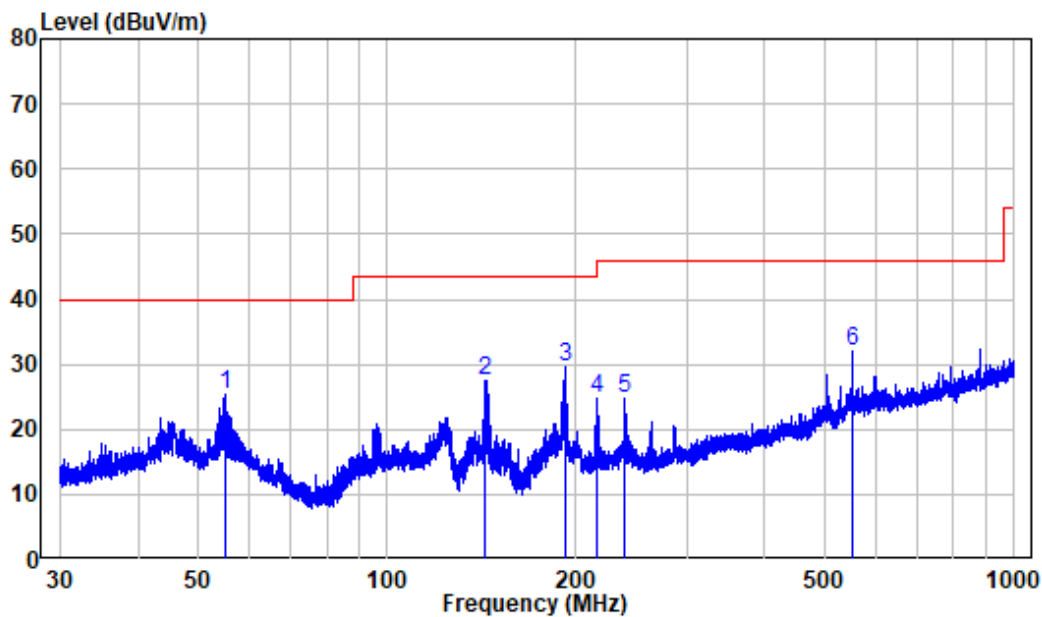


Site : chamber

Condition: 3m HORIZONTAL

Job No. : SZNS1220513-20254E-RF

Test Mode: BLE Transmitting

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 55.076  | -10.28 | 35.52         | 25.24  | 40.00         | -14.76        | Peak   |
| 2 | 143.515 | -15.52 | 43.07         | 27.55  | 43.50         | -15.95        | Peak   |
| 3 | 191.997 | -11.25 | 40.70         | 29.45  | 43.50         | -14.05        | Peak   |
| 4 | 216.024 | -11.63 | 36.42         | 24.79  | 46.00         | -21.21        | Peak   |
| 5 | 239.147 | -10.92 | 35.67         | 24.75  | 46.00         | -21.25        | Peak   |
| 6 | 552.157 | -4.07  | 35.95         | 31.88  | 46.00         | -14.12        | Peak   |

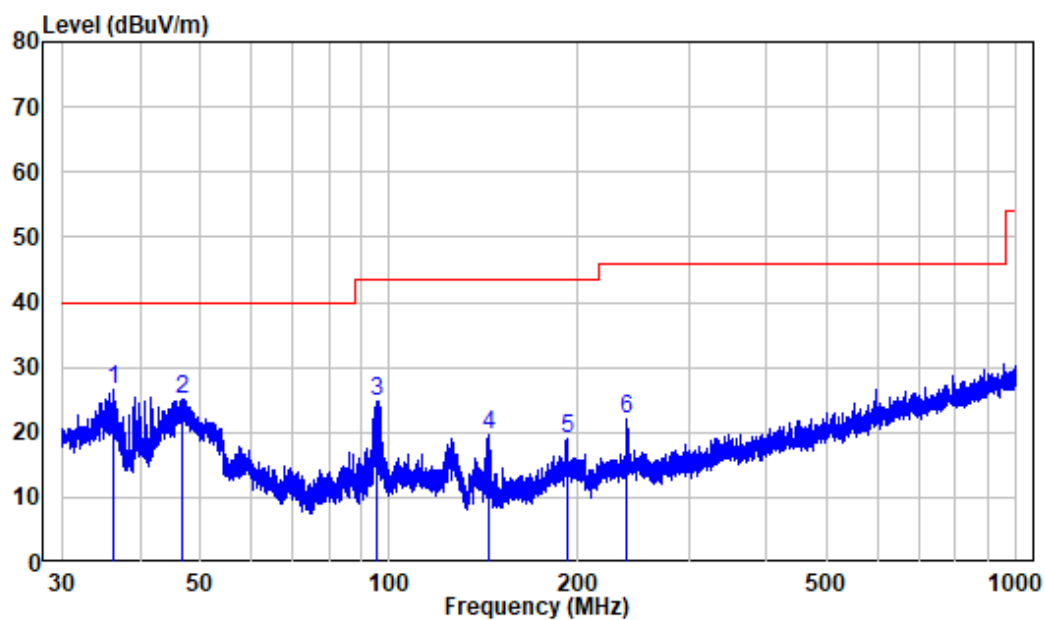**Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS1220513-20254E-RF

Test Mode: BLE Transmitting

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 36.206  | -11.16 | 37.84      | 26.68  | 40.00      | -13.32     | Peak   |
| 2 | 46.564  | -10.00 | 35.11      | 25.11  | 40.00      | -14.89     | Peak   |
| 3 | 95.469  | -12.40 | 37.09      | 24.69  | 43.50      | -18.81     | Peak   |
| 4 | 144.019 | -15.52 | 35.00      | 19.48  | 43.50      | -24.02     | Peak   |
| 5 | 192.503 | -11.27 | 30.38      | 19.11  | 43.50      | -24.39     | Peak   |
| 6 | 239.147 | -10.92 | 32.92      | 22.00  | 46.00      | -24.00     | Peak   |



**Above 1GHz: (Worst case for Model bs690)**

| Frequency<br>(MHz)    | Receiver          |       | Turntable<br>Angle | Rx Antenna |       | Factor<br>(dB/m) | Absolute<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
|-----------------------|-------------------|-------|--------------------|------------|-------|------------------|-------------------------------|-------------------|----------------|
|                       | Reading<br>(dBuV) | PK/AV | Degree             | Height     | Polar |                  |                               |                   |                |
|                       |                   |       |                    | (m)        | (H/V) |                  |                               |                   |                |
| BLE 1M Low Channel    |                   |       |                    |            |       |                  |                               |                   |                |
| 2310                  | 45.71             | PK    | 115                | 2.0        | H     | -7.23            | 38.48                         | 74                | -35.52         |
| 2310                  | 45.55             | PK    | 288                | 1.5        | V     | -7.23            | 38.32                         | 74                | -35.68         |
| 2390                  | 53.96             | PK    | 308                | 1.4        | H     | -7.21            | 46.75                         | 74                | -27.25         |
| 2390                  | 53.63             | PK    | 167                | 2.1        | V     | -7.21            | 46.42                         | 74                | -27.58         |
| 4804                  | 45.27             | PK    | 234                | 1.5        | H     | -3.52            | 41.75                         | 74                | -32.25         |
| 4804                  | 44.15             | PK    | 78                 | 1.7        | V     | -3.52            | 40.63                         | 74                | -33.37         |
| BLE 1M Middle Channel |                   |       |                    |            |       |                  |                               |                   |                |
| 4880                  | 46.36             | PK    | 64                 | 1.6        | H     | -3.38            | 42.98                         | 74                | -31.02         |
| 4880                  | 44.8              | PK    | 110                | 1.5        | V     | -3.38            | 41.42                         | 74                | -32.58         |
| BLE 1M High Channel   |                   |       |                    |            |       |                  |                               |                   |                |
| 2483.5                | 52.63             | PK    | 142                | 1.4        | H     | -7.2             | 45.43                         | 74                | -28.57         |
| 2483.5                | 52.34             | PK    | 160                | 1.8        | V     | -7.2             | 45.14                         | 74                | -28.86         |
| 2500                  | 48.93             | PK    | 229                | 2.2        | H     | -7.18            | 41.75                         | 74                | -32.25         |
| 2500                  | 51.03             | PK    | 156                | 1.8        | V     | -7.18            | 43.85                         | 74                | -30.15         |
| 4960                  | 46.57             | PK    | 77                 | 1.5        | H     | -3.01            | 43.56                         | 74                | -30.44         |
| 4960                  | 45.7              | PK    | 322                | 1.6        | V     | -3.01            | 42.69                         | 74                | -31.31         |
| BLE 2M Low Channel    |                   |       |                    |            |       |                  |                               |                   |                |
| 2310                  | 44.55             | PK    | 311                | 2.1        | H     | -7.23            | 37.32                         | 74                | -36.68         |
| 2310                  | 45.98             | PK    | 238                | 1.6        | V     | -7.23            | 38.75                         | 74                | -35.25         |
| 2390                  | 53.63             | PK    | 176                | 1.4        | H     | -7.21            | 46.42                         | 74                | -27.58         |
| 2390                  | 54.82             | PK    | 298                | 2.0        | V     | -7.21            | 47.61                         | 74                | -26.39         |
| 4804                  | 44.97             | PK    | 200                | 1.9        | H     | -3.52            | 41.45                         | 74                | -32.55         |
| 4804                  | 45.51             | PK    | 8                  | 1.9        | V     | -3.52            | 41.99                         | 74                | -32.01         |
| BLE 2M Middle Channel |                   |       |                    |            |       |                  |                               |                   |                |
| 4880                  | 47.21             | PK    | 195                | 1.4        | H     | -3.38            | 43.83                         | 74                | -30.17         |
| 4880                  | 47.37             | PK    | 269                | 1.8        | V     | -3.38            | 43.99                         | 74                | -30.01         |
| BLE 2M High Channel   |                   |       |                    |            |       |                  |                               |                   |                |
| 2483.5                | 53.67             | PK    | 268                | 1.7        | H     | -7.2             | 46.47                         | 74                | -27.53         |
| 2483.5                | 54.62             | PK    | 225                | 1.6        | V     | -7.2             | 47.42                         | 74                | -26.58         |
| 2500                  | 50.8              | PK    | 6                  | 1.5        | H     | -7.18            | 43.62                         | 74                | -30.38         |
| 2500                  | 51.6              | PK    | 300                | 1.8        | V     | -7.18            | 44.42                         | 74                | -29.58         |
| 4960                  | 45.76             | PK    | 50                 | 2.1        | H     | -3.01            | 42.75                         | 74                | -31.25         |
| 4960                  | 45.25             | PK    | 95                 | 1.6        | V     | -3.01            | 42.24                         | 74                | -31.76         |

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

**BLE 2M Middle Channel (worst case)**

**Horizontal**

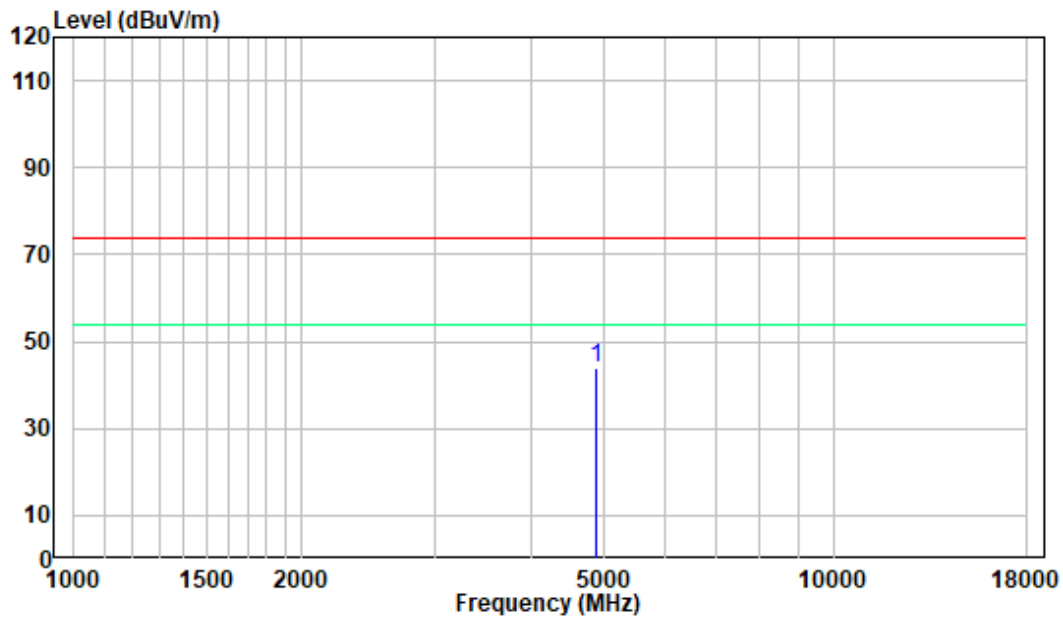


**Vertical**

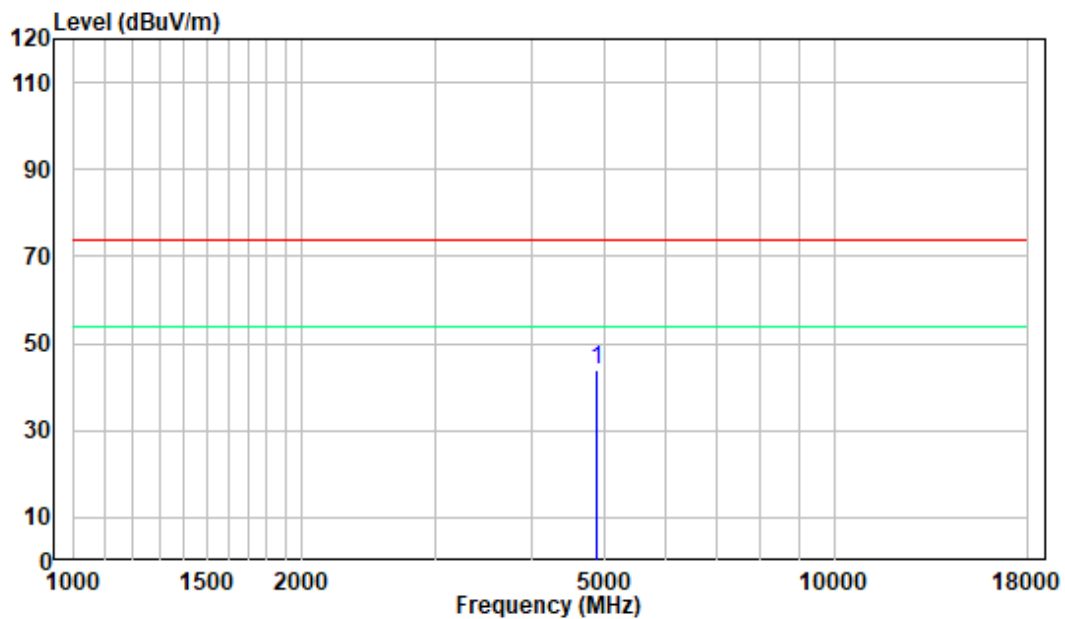


**18-25GHz:** (Pre-Scan plots)

**BLE 2M Middle Channel (worst case)**

**Horizontal**

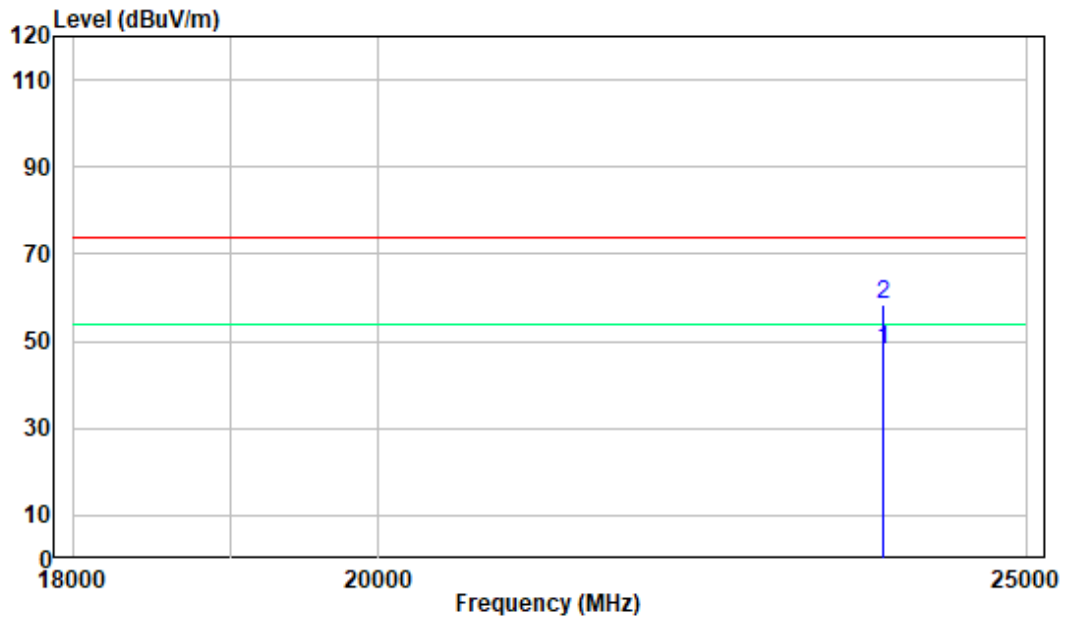

**Vertical**

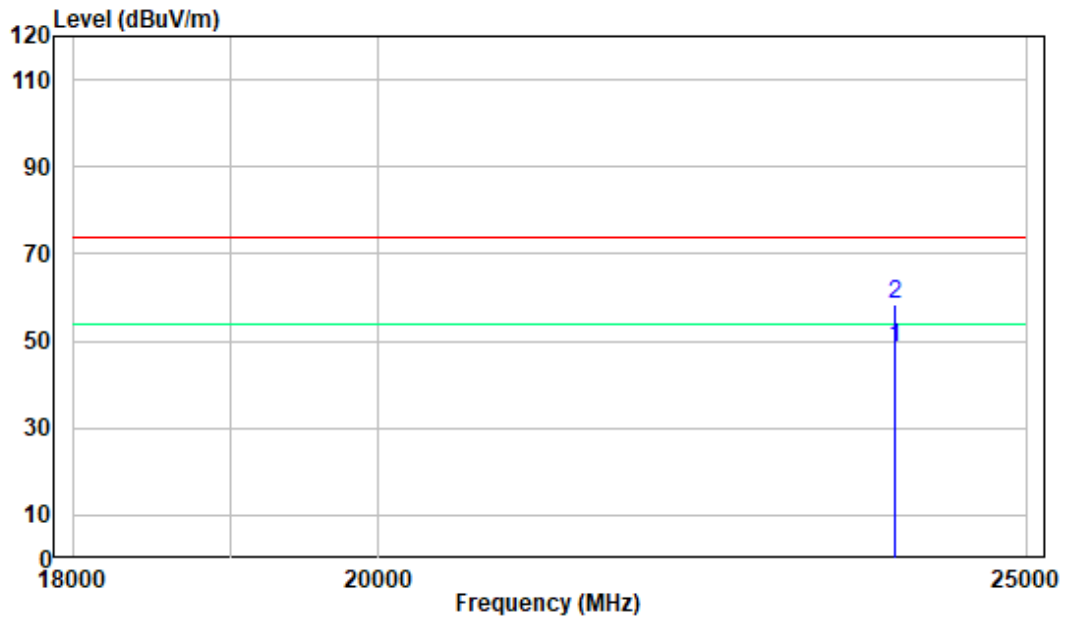


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.
- 5.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 101.2 kPa |

The testing was performed by Jeff Jiang on 2022-05-19.

EUT operation mode: Transmitting

**Test Result****6 dB EMISSION BANDWIDTH:**

| TestMode | Antenna | Channel | DTS BW [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|--------------|----------|----------|------------|---------|
| BLE 1M   | Ant1    | 2402    | 0.512        | 2401.696 | 2402.208 | 0.5        | PASS    |
|          |         | 2440    | 0.512        | 2439.696 | 2440.208 | 0.5        | PASS    |
|          |         | 2480    | 0.512        | 2479.700 | 2480.212 | 0.5        | PASS    |
| BLE 2M   | Ant1    | 2402    | 0.864        | 2401.444 | 2402.308 | 0.5        | PASS    |
|          |         | 2440    | 0.864        | 2439.444 | 2440.308 | 0.5        | PASS    |
|          |         | 2480    | 0.864        | 2479.444 | 2480.308 | 0.5        | PASS    |


**OCCUPIED BANDWIDTH**

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|----------|----------|------------|---------|
| BLE 1M   | Ant1    | 2402    | 1.027     | 2401.528 | 2402.555 | ---        | PASS    |
|          |         | 2440    | 1.027     | 2439.528 | 2440.555 | ---        | PASS    |
|          |         | 2480    | 1.027     | 2479.528 | 2480.555 | ---        | PASS    |
| BLE 2M   | Ant1    | 2402    | 2.042     | 2401.025 | 2403.067 | ---        | PASS    |
|          |         | 2440    | 2.046     | 2439.021 | 2441.067 | ---        | PASS    |
|          |         | 2480    | 2.046     | 2479.025 | 2481.071 | ---        | PASS    |


Please refer to the below plots:

## 6 dB EMISSION BANDWIDTH


## BLE\_1M\_Ant1\_2402

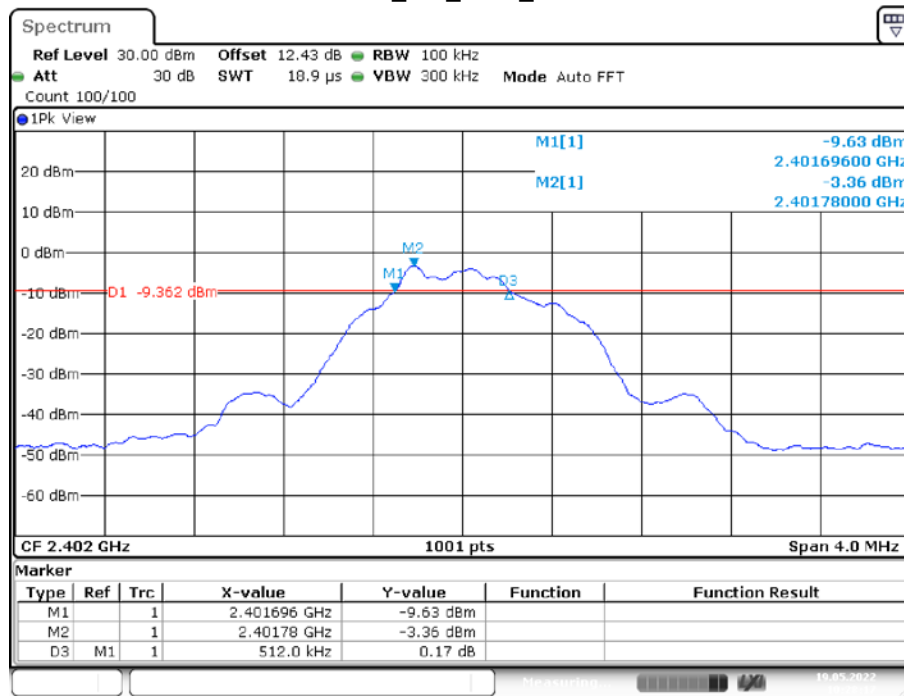

## BLE\_1M\_Ant1\_2440

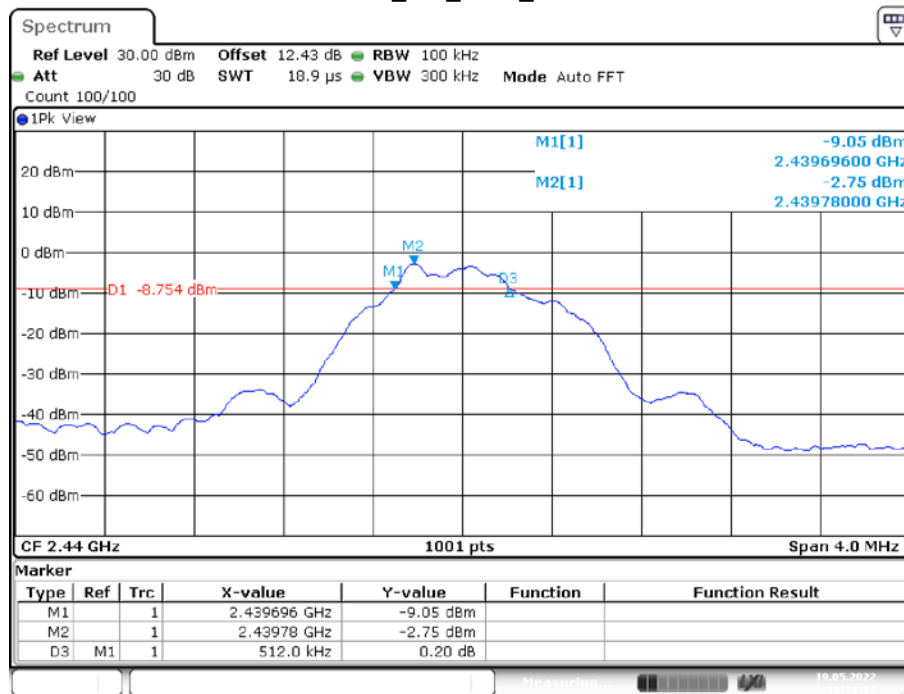


## BLE\_1M\_Ant1\_2480

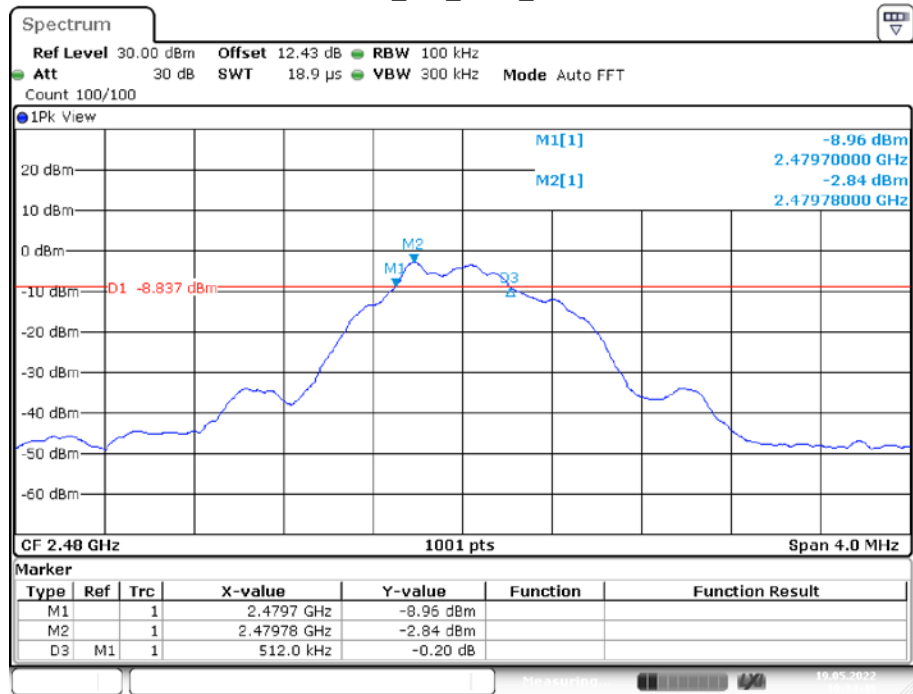


Date: 19.MAY.2022 10:34:49

## BLE\_2M\_Ant1\_2402

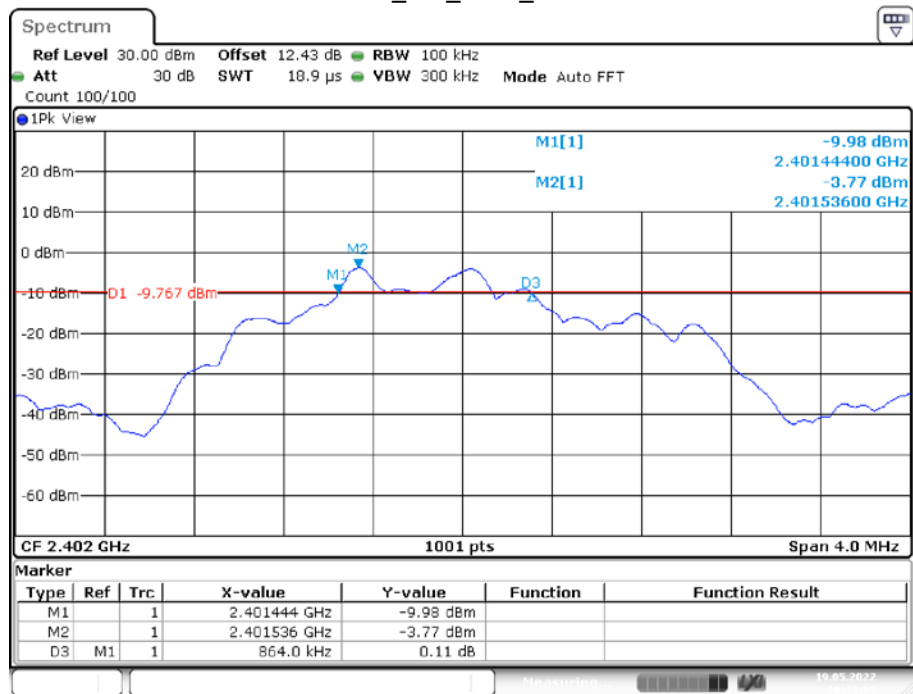


Date: 19.MAY.2022 10:43:08

## BLE\_2M\_Ant1\_2440

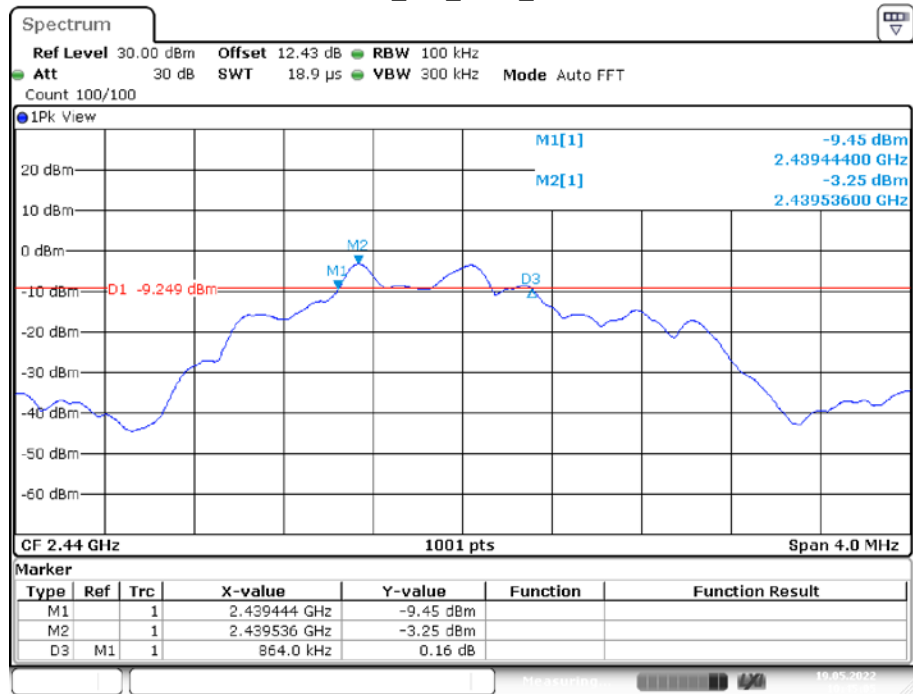

## BLE\_2M\_Ant1\_2480

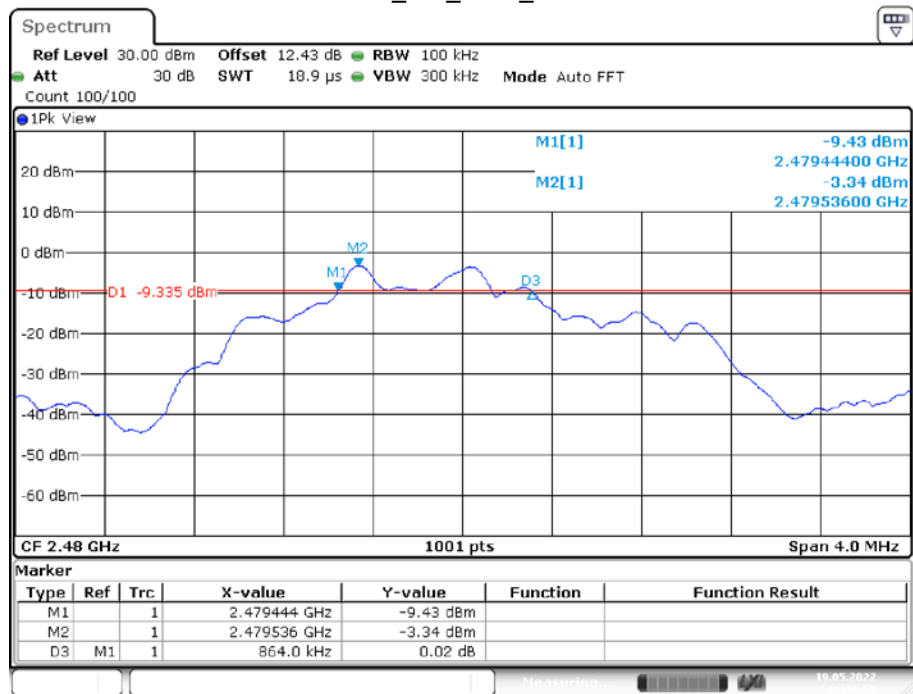



## OCCUPIED BANDWIDTH

## BLE\_1M\_Ant1\_2402



## BLE\_1M\_Ant1\_2440




## BLE\_1M\_Ant1\_2480




Date: 19.MAY.2022 10:35:07

## BLE\_2M\_Ant1\_2402

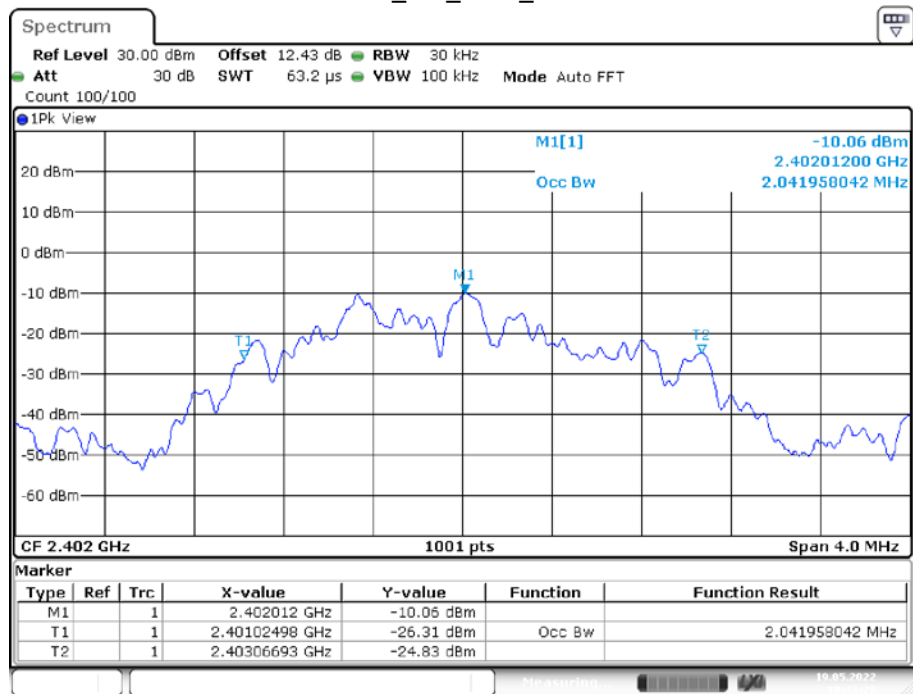


Date: 19.MAY.2022 10:43:28

## BLE\_2M\_Ant1\_2440

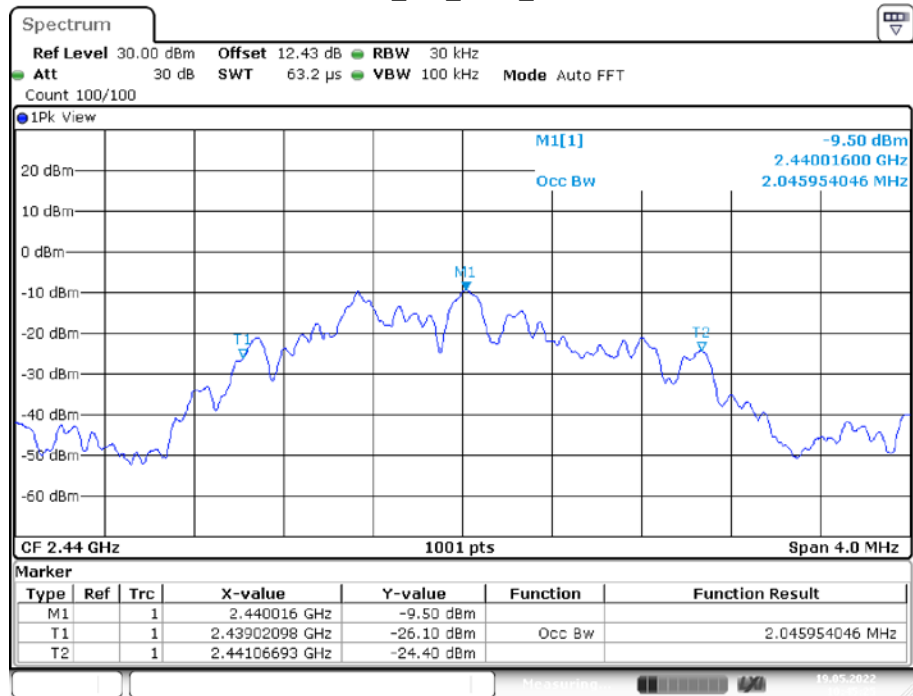

Date: 19.MAY.2022 10:45:25

## BLE\_2M\_Ant1\_2480

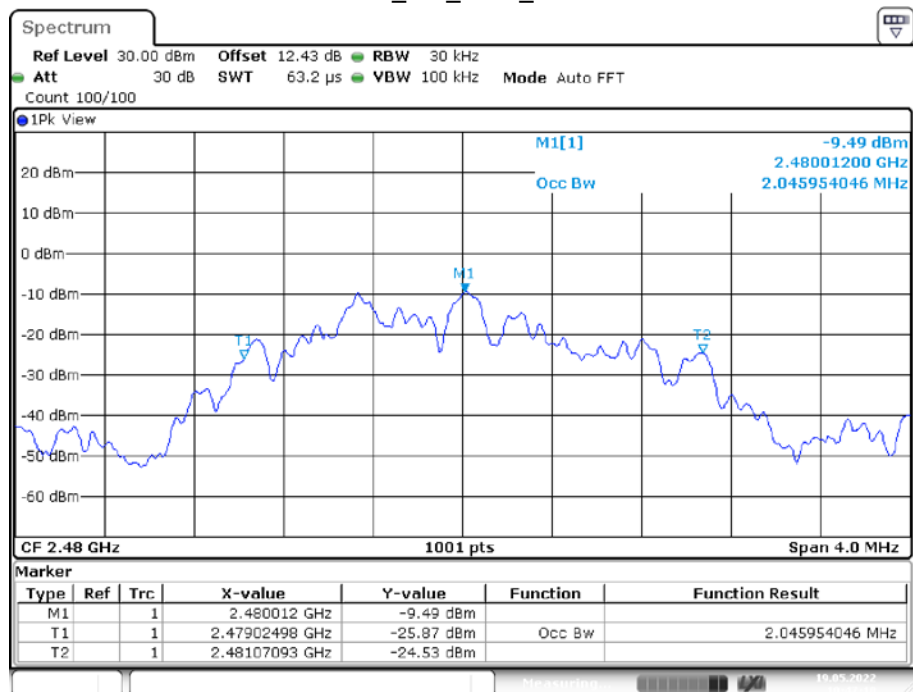

Date: 19.MAY.2022 10:47:10


## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 101.2 kPa |

The testing was performed by Jeff Jiang on 2022-05-19.


EUT operation mode: Transmitting

### Test Result

| TestMode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|---------|-------------|------------|---------|
| BLE 1M   | Ant1    | 2402    | -3.14       | <=30       | PASS    |
|          |         | 2440    | -2.56       | <=30       | PASS    |
|          |         | 2480    | -2.66       | <=30       | PASS    |
| BLE 2M   | Ant1    | 2402    | -2.97       | <=30       | PASS    |
|          |         | 2440    | -2.41       | <=30       | PASS    |
|          |         | 2480    | -2.52       | <=30       | PASS    |


Please refer to the below plots:

## BLE 1M\_Ant1\_2402MHz

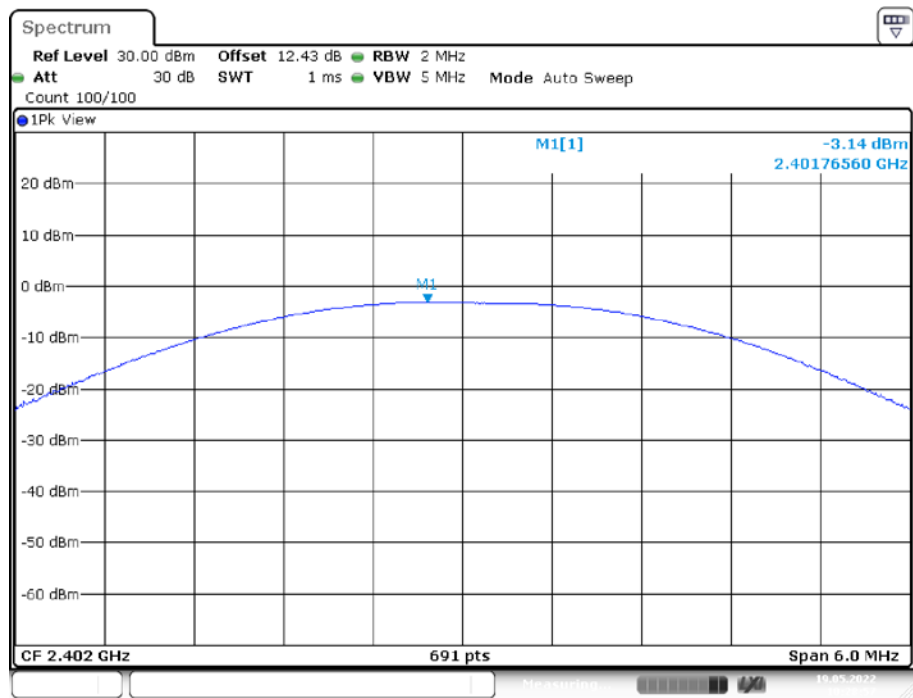


Date: 19.MAY.2022 10:28:57

## BLE 1M\_Ant1\_2440MHz

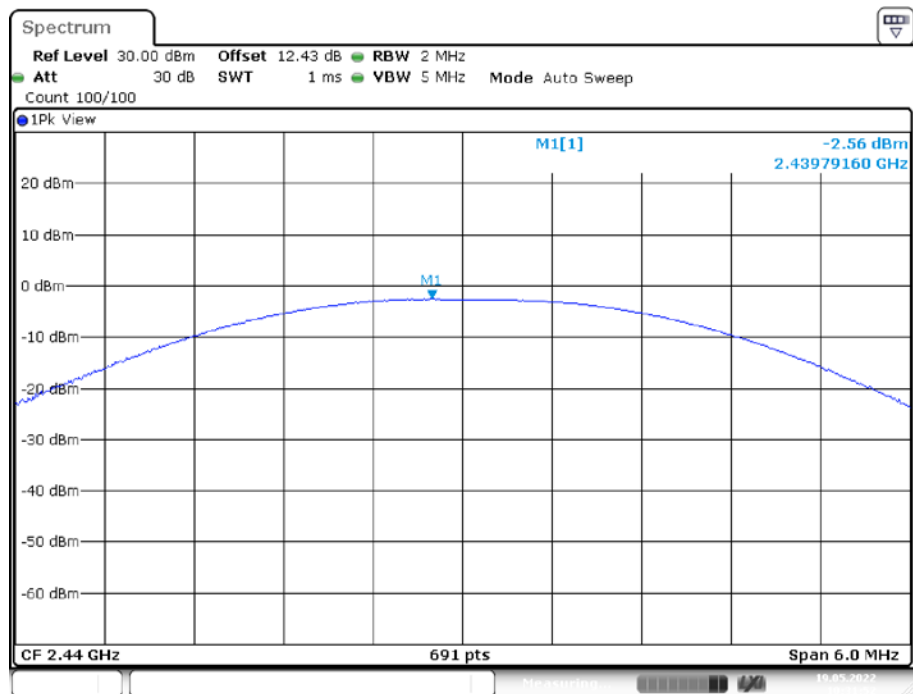


Date: 19.MAY.2022 10:31:52

## BLE 1M\_Ant1\_2480MHz

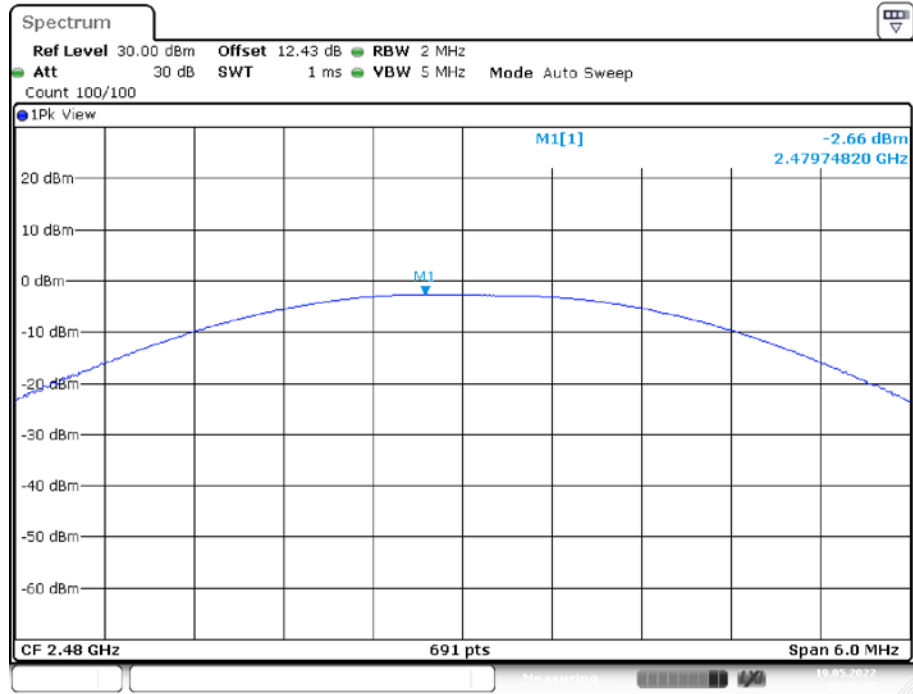


Date: 19.MAY.2022 10:35:20

## BLE 2M\_Ant1\_2402MHz

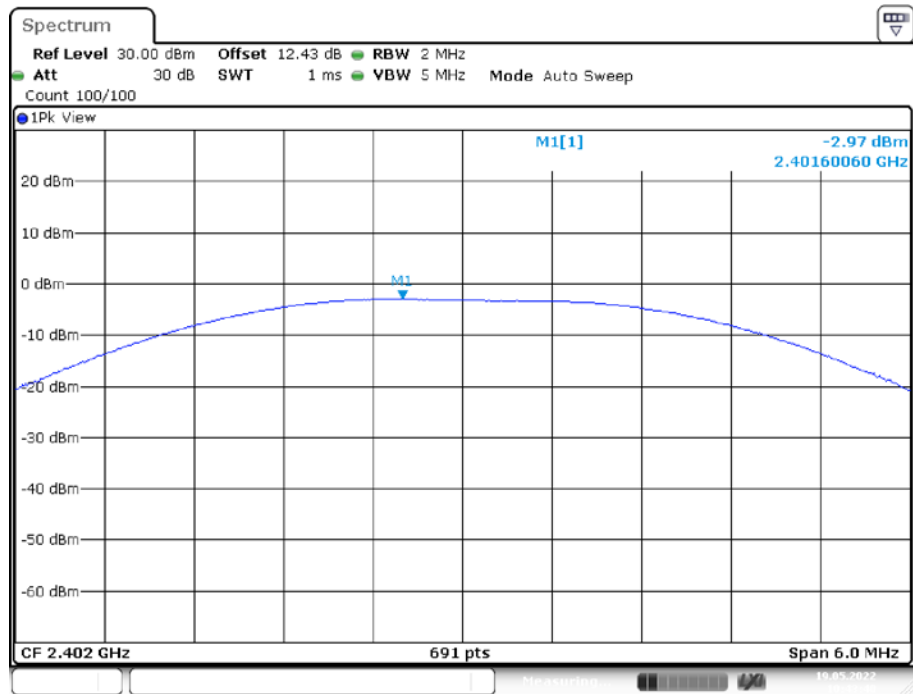


Date: 19.MAY.2022 10:43:40

## BLE 2M\_Ant1\_2440MHz

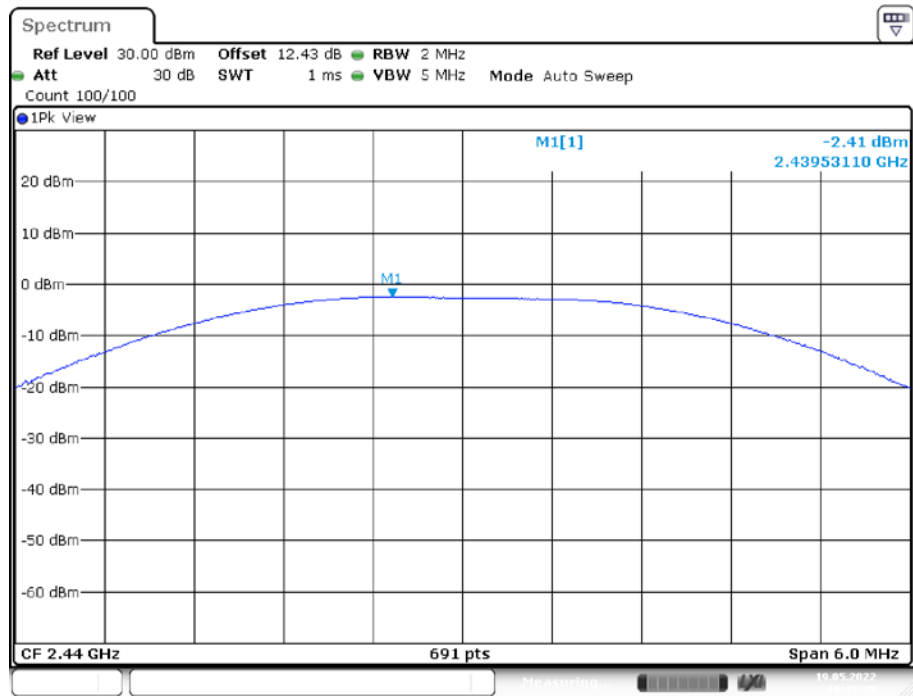

Date: 19.MAY.2022 10:45:38

## BLE 2M\_Ant1\_2480MHz

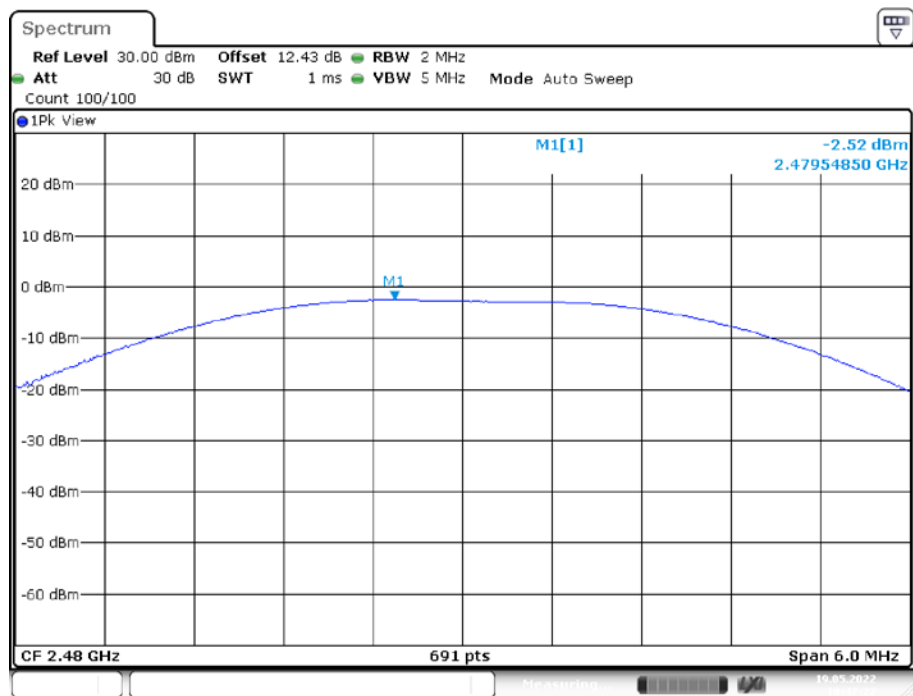


Date: 19.MAY.2022 10:47:22

## Duty Cycle

| Test Mode | Antenna | Channel | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] |
|-----------|---------|---------|----------------------------|--------------------------|----------------|
| BLE 1M    | Ant1    | 2440    | 0.09                       | 0.62                     | 14.52          |
| BLE 2M    | Ant1    | 2440    | 0.09                       | 0.62                     | 14.52          |


Please refer to the below plots:

## BLE 1M\_Ant1\_2440MHz

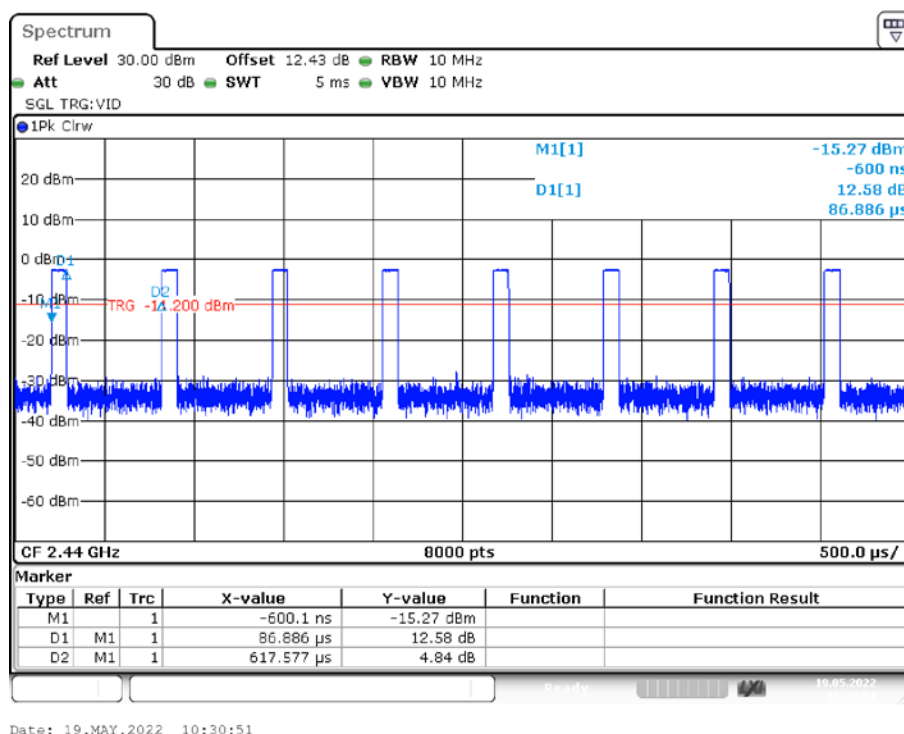



## BLE 2\_Ant1\_2440MHz

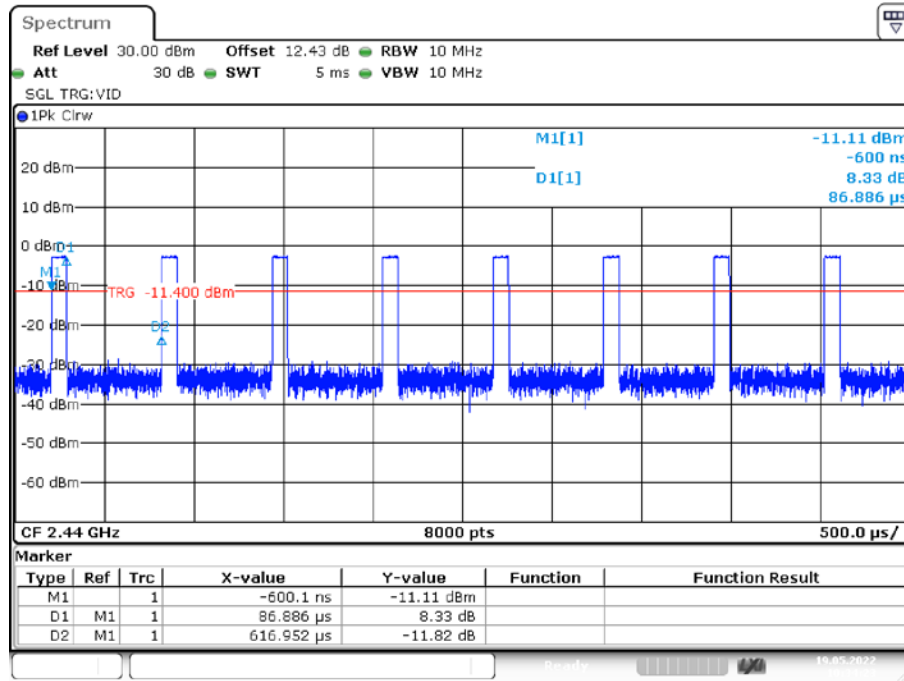


Date: 19.MAY.2022 10:34:23

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE****Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**


|                    |           |
|--------------------|-----------|
| Temperature:       | 25°C      |
| Relative Humidity: | 45%       |
| ATM Pressure:      | 101.2 kPa |

*The testing was performed by Jeff Jiang on 2022-05-19.*

*EUT operation mode: Transmitting*


Test Result: Pass

## BLE 1M\_Ant1\_Low\_2402MHz

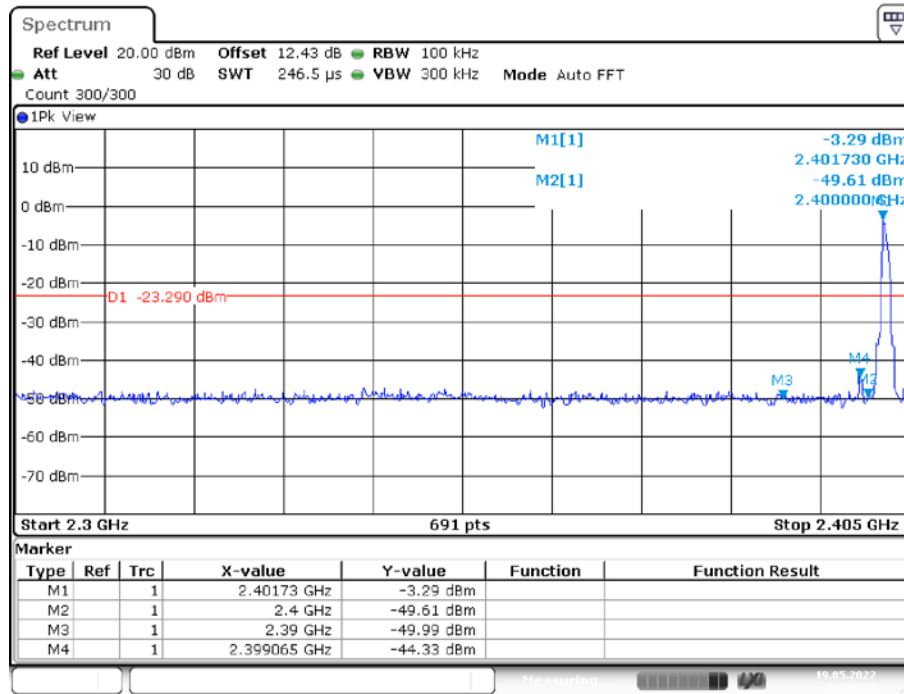


Date: 19.MAY.2022 10:30:11

## BLE 1M\_Ant1\_High\_2480MHz

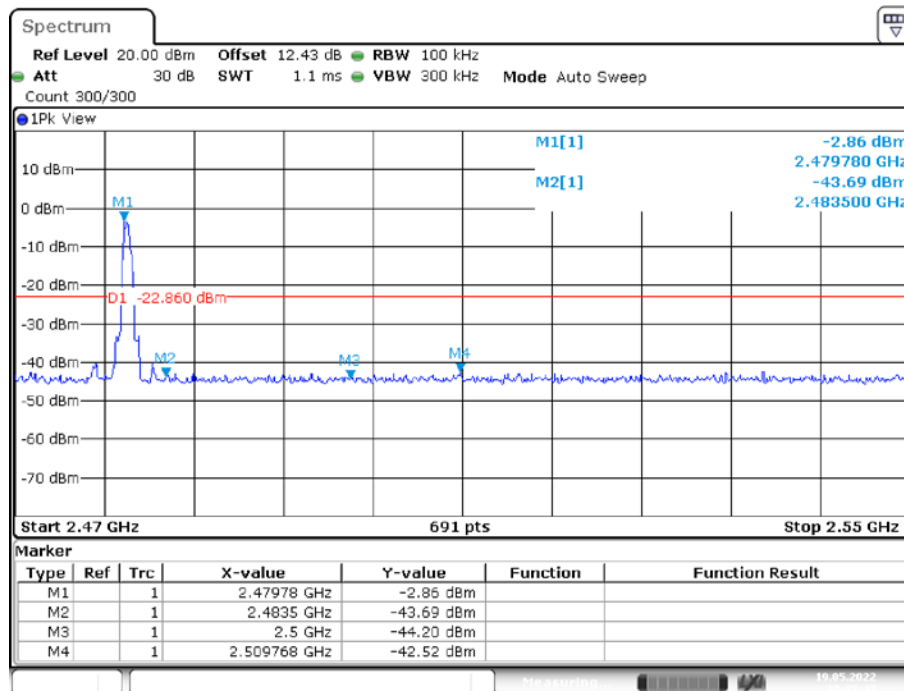


Date: 19.MAY.2022 10:35:47

## BLE 2M\_Ant1\_Low\_2402MHz

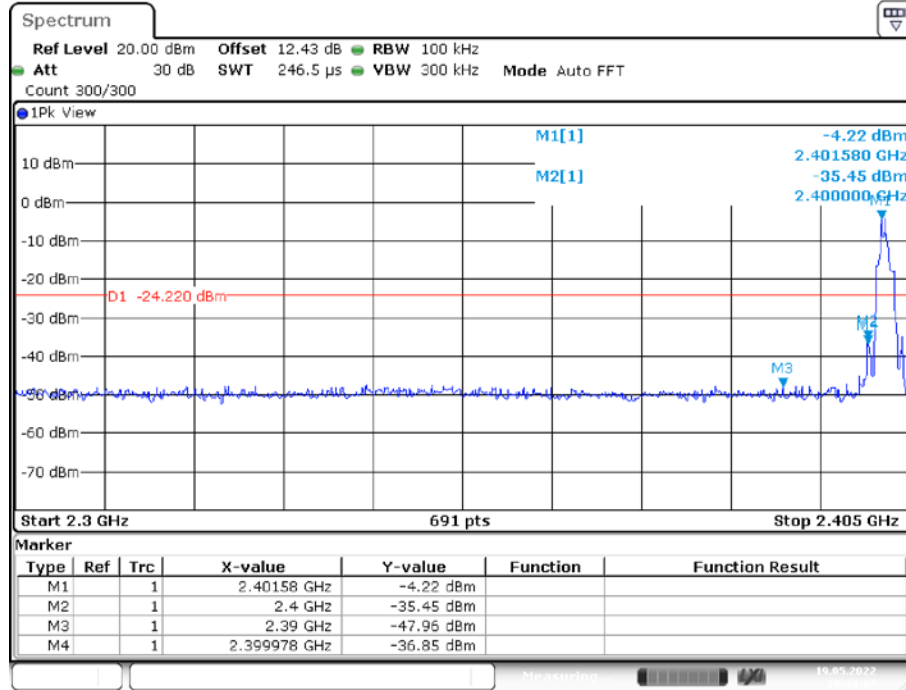

Date: 19.MAY.2022 10:44:07

## BLE 2M\_Ant1\_High\_2480MHz

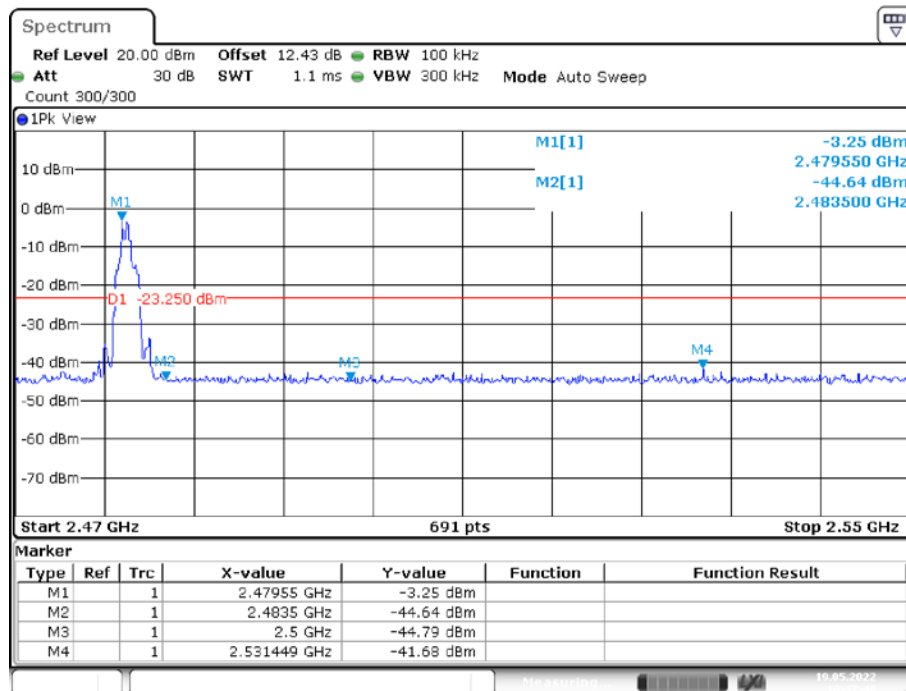

Date: 19.MAY.2022 10:47:49


## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 101.2 kPa |

The testing was performed by Jeff Jiang on 2022-05-19.


EUT operation mode: Transmitting

#### Test Result

| Test Mode | Antenna | Channel | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|---------|------------------|-----------------|---------|
| BLE 1M    | Ant1    | 2402    | -23              | $\leq 8$        | PASS    |
|           |         | 2440    | -22.41           | $\leq 8$        | PASS    |
|           |         | 2480    | -22.42           | $\leq 8$        | PASS    |
| BLE 2M    | Ant1    | 2402    | -25.8            | $\leq 8$        | PASS    |
|           |         | 2440    | -25.29           | $\leq 8$        | PASS    |
|           |         | 2480    | -25.4            | $\leq 8$        | PASS    |


Please refer to the below plots:

## BLE 1M\_Ant1\_2402MHz

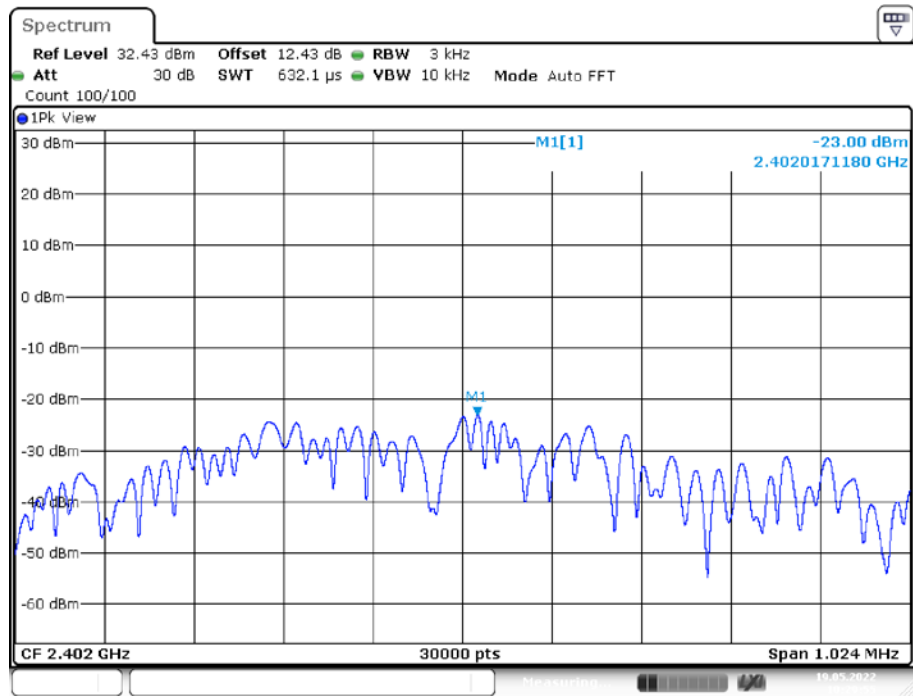


Date: 19.MAY.2022 10:29:56

## BLE 1M\_Ant1\_2440MHz

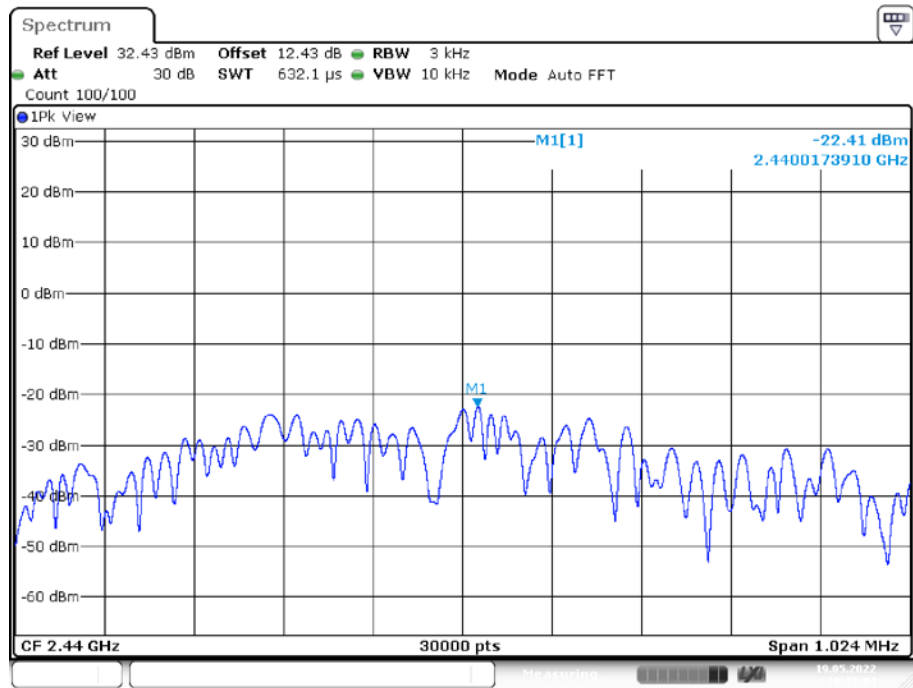


Date: 19.MAY.2022 10:32:04

## BLE 1M\_Ant1\_2480MHz

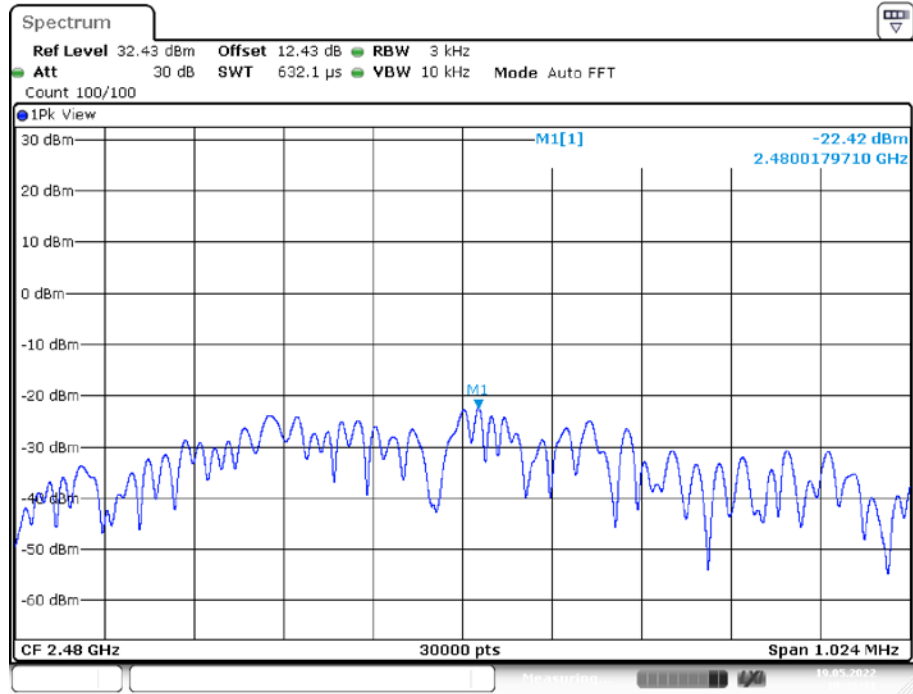


Date: 19.MAY.2022 10:35:32

## BLE 2M\_Ant1\_2402MHz

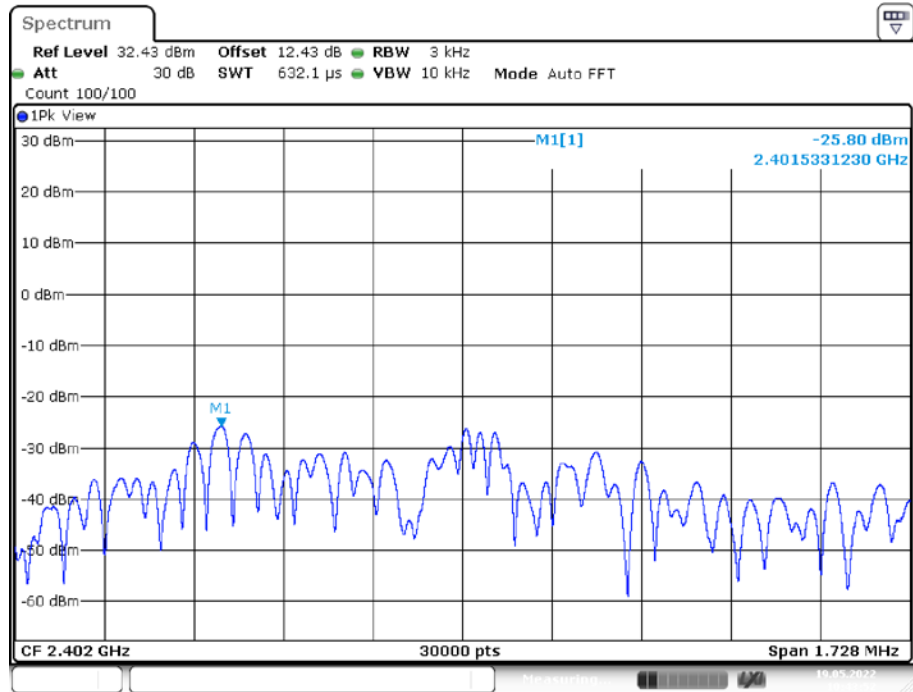


Date: 19.MAY.2022 10:43:52

## BLE 2M\_Ant1\_2440MHz

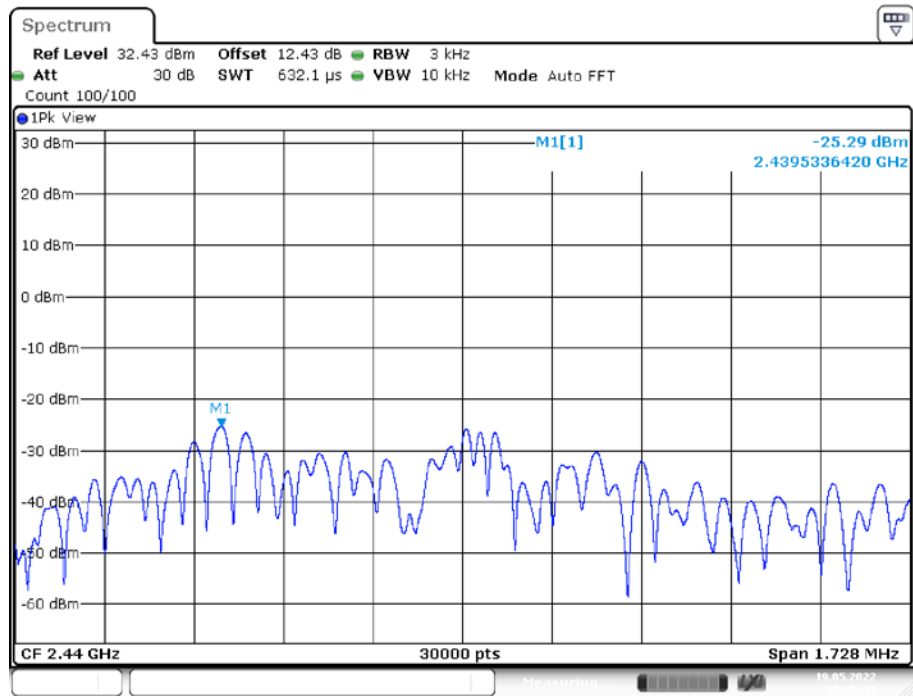

Date: 19.MAY.2022 10:45:50

## BLE 2M\_Ant1\_2480MHz

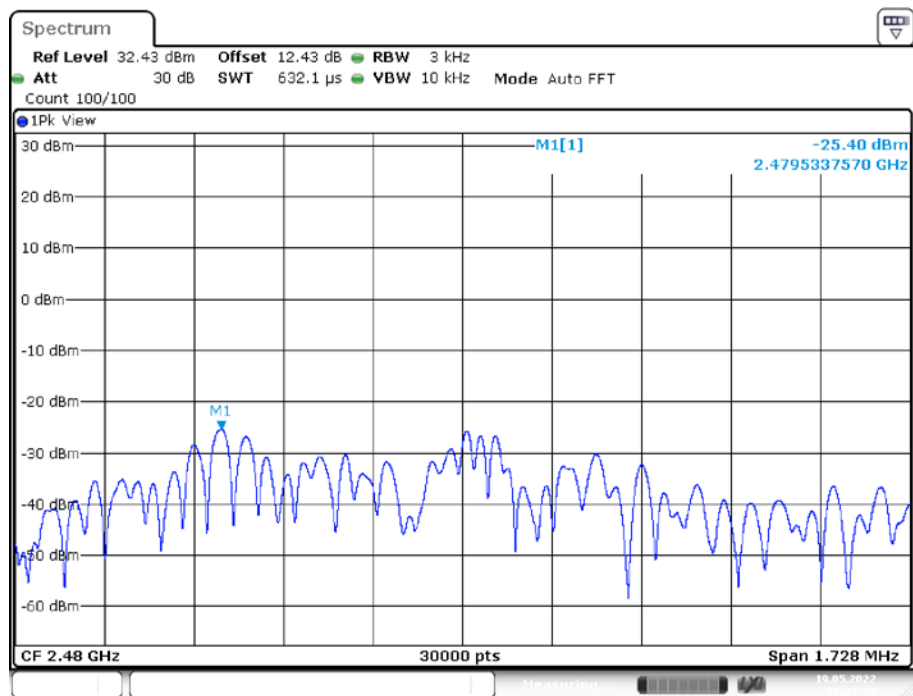

Date: 19.MAY.2022 10:47:34

\*\*\*\*\* END OF REPORT \*\*\*\*\*