



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20220500896E-01
Applicant: Shenzhen Median Technology Co., LTD.
Address of Applicant: Room1601-1603, 16/F, Tower A,KaiDAR Group Center Building,
168XiliTongShaRoad, NanShan District, ShenZhen City, Guangdong Province
Equipment Under Test (EUT):
Product: XIAOAN dry burning prevention terminal
Model No.: MD-01
Test Model No.: MD-01
Brand Name: 
小安智视
FCC ID: 2A643-MD-01
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2022-05-27
Date of Test: 2022-05-27 to 2022-06-08
Date of Issue: 2022-06-20
Test Result : PASS*

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

K. Liao

(K Liao)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20220500896E-01	Rev.01	Initial report	2022-06-20

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	8
4.5 DESCRIPTION OF SUPPORT UNITS	12
4.6 TEST LOCATION	12
4.7 TEST FACILITY	12
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	13
4.9 DEVIATION FROM STANDARDS	13
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	13
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	13
4.12 EQUIPMENT LIST	14
5 TEST RESULTS AND MEASUREMENT DATA	15
5.1 ANTENNA REQUIREMENT	15
5.2 CONDUCTED EMISSIONS	16
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	20
<i>Test Result</i>	21
<i>Test Graphs</i>	22
5.4 6dB OCCUPY BANDWIDTH	28
<i>Test Result</i>	29
<i>Test Graphs</i>	30
5.5 POWER SPECTRAL DENSITY	36
<i>Test Result</i>	37
<i>Test Graphs</i>	38
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	44
<i>Test Result</i>	45
5.6.1 <i>Test Graphs</i>	46
5.7 RF CONDUCTED SPURIOUS EMISSIONS	50
<i>Test Result</i>	51
<i>Test Graphs</i>	53
5.8 RADIATED SPURIOUS EMISSIONS	71
5.8.1 <i>Radiated emission below 1GHz</i>	74
5.8.2 <i>Transmitter emission above 1GHz</i>	76
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	78
6 PHOTOGRAPHS - EUT TEST SETUP	84
6.1 RADIATED SPURIOUS EMISSION	84
6.2 CONDUCTED EMISSION	85
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	86

4 General Information

4.1 Client Information

Applicant:	Shenzhen Median Technology Co., LTD.
Address of Applicant:	Room1601-1603, 16/F, Tower A,KaiDAR Group Center Building, 168XiliTongShaRoad, NanShan District, ShenZhen City, Guangdong Province
Manufacturer:	Shenzhen Median Technology Co., LTD.
Address of Manufacturer:	Room1601-1603, 16/F, Tower A,KaiDAR Group Center Building, 168XiliTongShaRoad, NanShan District, ShenZhen City, Guangdong Province
Factory:	Shenzhen Median Technology Co., LTD.
Address of Factory:	Room1601-1603, 16/F, Tower A,KaiDAR Group Center Building, 168XiliTongShaRoad, NanShan District, ShenZhen City, Guangdong Province

4.2 General Description of EUT

Product Name:	XIAOAN dry burning prevention terminal
Model No.:	MD-01
Test Model No.:	MD-01
Trade Mark:	 小安智视
Software Version:	V2.1
Hardware Version:	V01
Power Supply:	Power by DC 5V for adapter
EUT Supports Radios application:	BT: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) :

	6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Test Software of EUT:	EspRFTTestTool_v2.8_Manual
Antenna Type:	PCB antenna
Antenna Gain:	1dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.


Run Software:
 The screenshot shows the EspRFTTestTool software interface. The 'Manual Test' tab is selected. Under 'Chip Type', 'ESP32' is chosen. 'COM' is set to 'COM16' and 'BaudRate' is '115200'. There are 'open' and 'close' buttons. Below this, there's a status area showing 'IDLE' and a progress bar at 0%. There are 'RAM' and 'Load Bin' buttons. The 'WIFI Test' tab is active. 'Test Mode' is set to 'TX continuous'. 'WIFI Rate' is '11b 1M', 'BandWidth' is '20M', and 'Channel' is '13/2472'. 'Attenuation(0.25dB)' is '20', 'Duty Cycle' is 'default', 'Certification EN' is unchecked, and 'Certification Code' is 'SRRC'. There are 'start' and 'stop' buttons. A 'Log' window at the bottom shows the following messages: <pre> DEBUG: cbw40m_en: 0 DEBUG: tx_contin_en: 1 DEBUG: wifitxout: 13 0x0 20 DEBUG: cbw40m_en: 0 DEBUG: wifi tx continuous test! DEBUG: Wifi tx out: channel=13, rate=0x0, BK=20, length=4095, delay=0 </pre> On the right side of the log window, there are checkboxes for 'Show Send' and 'Show Time', and buttons for 'Log Clear' and 'Log Save'.

Operated Mode for Worst Duty Cycle:		
Test Mode	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	100	0
IEEE802.11g	100	0
IEEE802.11n (HT20)	100	0
IEEE802.11n (HT40)	100	0

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_IEEE802.11b Duty Cycle:

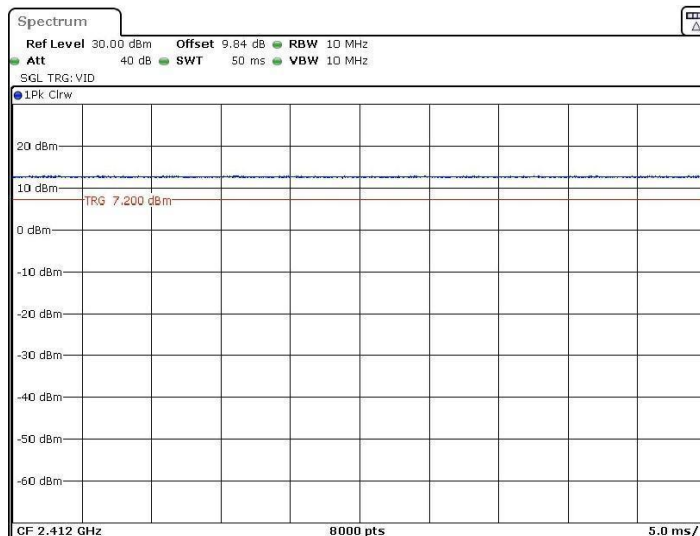


Date: 6 JUN 2022 07:48:50

Test Graph_IEEE802.11g Duty Cycle:

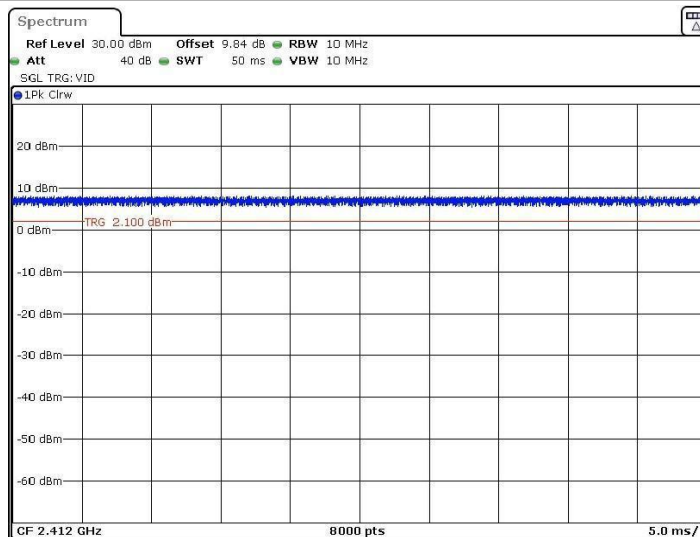


Date: 6 JUN 2022 08:04:47

Test Graph_IEEE802.11 n (HT20) Duty Cycle:

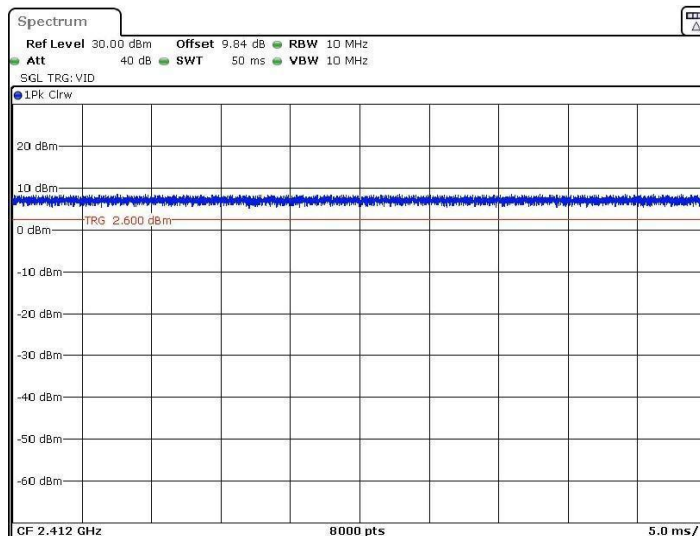

Date: 6 JUN 2022 08:15:18

Test Graph_IEEE802.11 n (HT40) Duty Cycle:

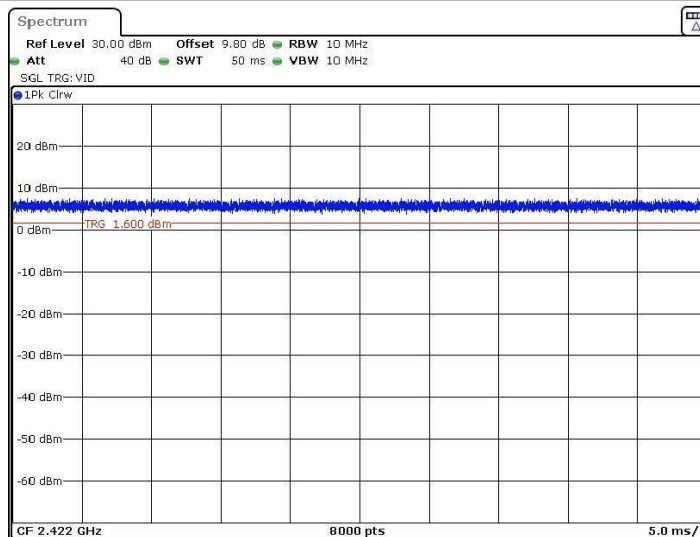

Date: 6 JUN 2022 08:26:58

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2021/09/10	2022/09/09
Spectrum analyzer	R&S	FSU26	CQA-038	2021/09/10	2022/09/09
Spectrum analyzer	R&S	FSU40	CQA-075	2021/09/10	2022/09/09
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2021/09/10	2022/09/09
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/09/10	2022/09/09
Preamplifier	EMCI	EMC184055SE	CQA-089	2021/09/10	2022/09/09
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2021/09/10	2022/09/09
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2021/09/10	2022/09/09
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2021/09/10	2022/09/09
Antenna Connector	CQA	RFC-01	CQA-080	2021/09/10	2022/09/09
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2021/09/10	2022/09/09
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2021/09/10	2022/09/09
Power meter	R&S	NRVD	CQA-029	2021/09/10	2022/09/09
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/09/10	2022/09/09
EMI Test Receiver	R&S	ESR7	CQA-005	2021/09/10	2022/09/09
LISN	R&S	ENV216	CQA-003	2021/09/10	2022/09/09
Coaxial cable	CQA	N/A	CQA-C009	2021/09/10	2022/09/09
DC power	KEYSIGHT	E3631A	CQA-028	2021/09/10	2022/09/09

Test software:

	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is PCB antenna. The best case gain of the antenna is 1 dBi.	


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:	Shielding Room AC Mains LISN1 EUT AE LISN2 AC Mains Test Receiver 80cm 80cm 80cm Ground Reference Plane		

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

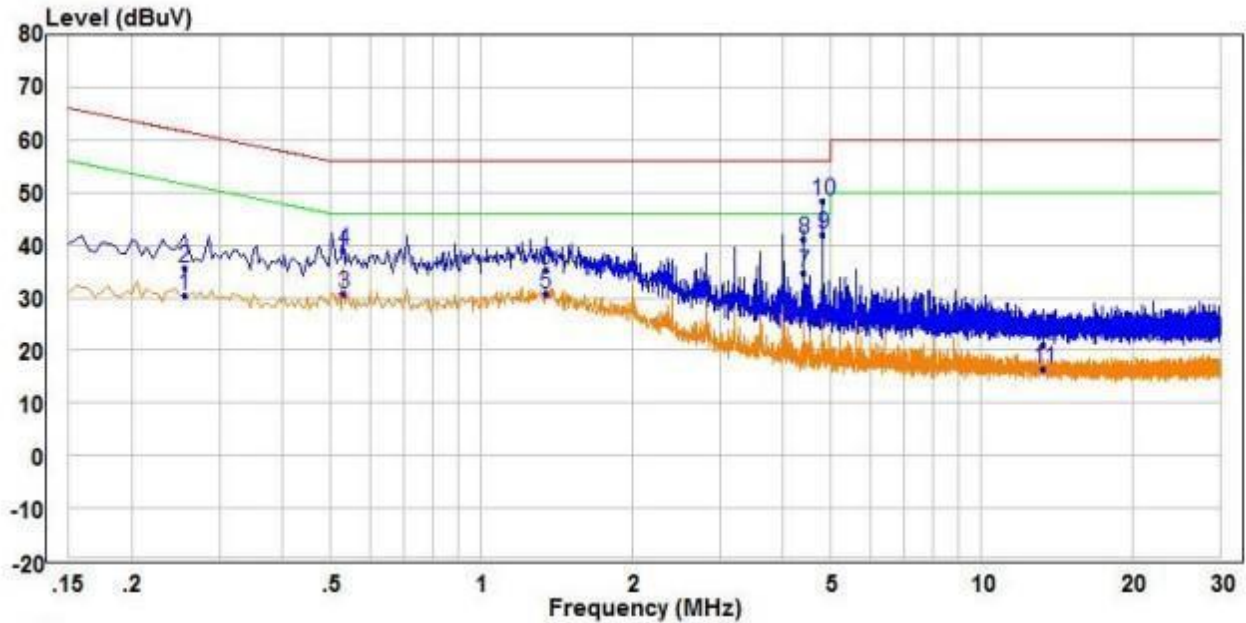


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.255	20.85	9.54	30.39	51.59	-21.20	Average	Line
2	0.255	26.07	9.54	35.61	61.59	-25.98	QP	Line
3	0.530	21.13	9.73	30.86	46.00	-15.14	Average	Line
4	0.530	29.34	9.73	39.07	56.00	-16.93	QP	Line
5	1.345	20.16	10.53	30.69	46.00	-15.31	Average	Line
6	1.345	24.93	10.53	35.46	56.00	-20.54	QP	Line
7	4.420	24.88	9.99	34.87	46.00	-11.13	Average	Line
8	4.420	31.23	9.99	41.22	56.00	-14.78	QP	Line
9 PP	4.820	32.07	9.81	41.88	46.00	-4.12	Average	Line
10 QP	4.820	38.46	9.81	48.27	56.00	-7.73	QP	Line
11	13.340	6.58	9.78	16.36	50.00	-33.64	Average	Line
12	13.340	11.37	9.78	21.15	60.00	-38.85	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

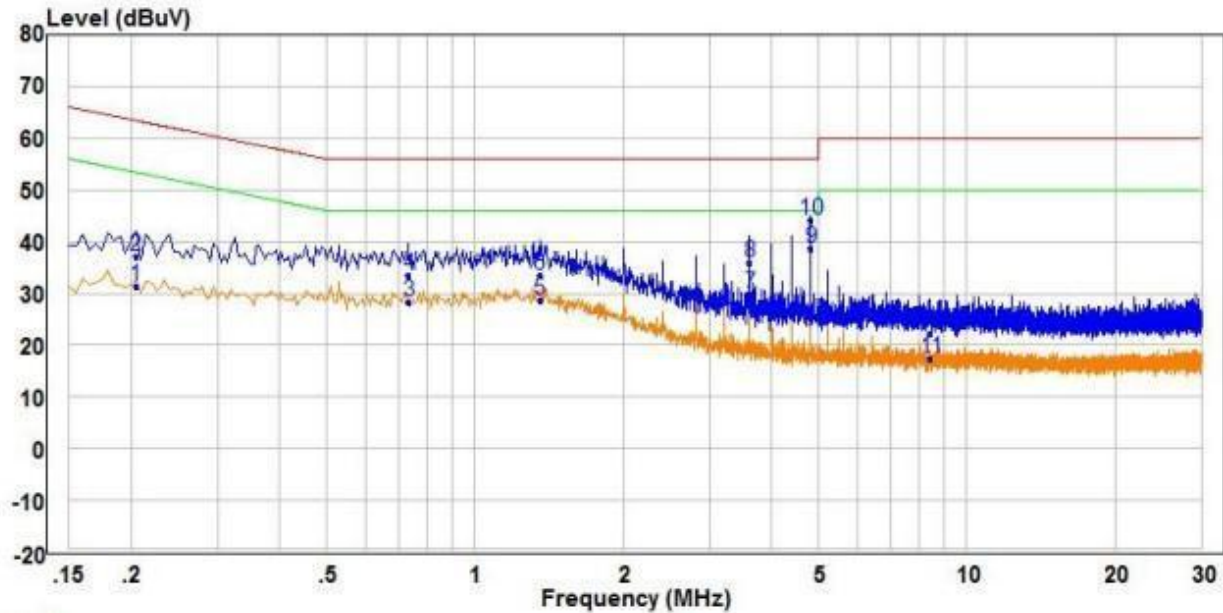


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.205	21.91	9.60	31.51	53.41	-21.90	Average	Neutral
2	0.205	27.43	9.60	37.03	63.41	-26.38	QP	Neutral
3	0.735	18.61	9.88	28.49	46.00	-17.51	Average	Neutral
4	0.735	23.75	9.88	33.63	56.00	-22.37	QP	Neutral
5	1.355	18.79	9.72	28.51	46.00	-17.49	Average	Neutral
6	1.355	23.81	9.72	33.53	56.00	-22.47	QP	Neutral
7	3.615	20.19	9.78	29.97	46.00	-16.03	Average	Neutral
8	3.615	26.12	9.78	35.90	56.00	-20.10	QP	Neutral
9 PP	4.820	28.87	9.81	38.68	46.00	-7.32	Average	Neutral
10 QP	4.820	34.44	9.81	44.25	56.00	-11.75	QP	Neutral
11	8.430	7.42	9.85	17.27	50.00	-32.73	Average	Neutral
12	8.430	12.42	9.85	22.27	60.00	-37.73	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Conducted Peak & Average Output Power

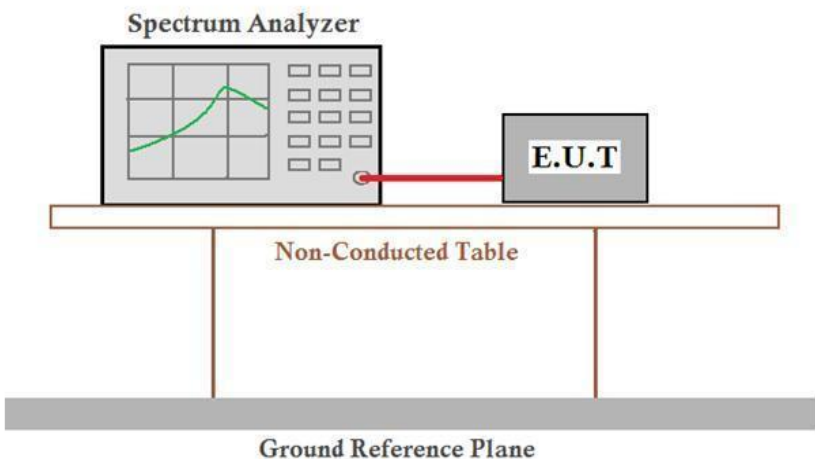
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	10.23	≤30	PASS
		2437	11.53	≤30	PASS
		2462	10.84	≤30	PASS
11G	Ant1	2412	4.14	≤30	PASS
		2437	5.21	≤30	PASS
		2462	4.81	≤30	PASS
11N20SISO	Ant1	2412	4.15	≤30	PASS
		2437	4.98	≤30	PASS
		2462	4.61	≤30	PASS
11N40SISO	Ant1	2422	4.07	≤30	PASS
		2437	4.05	≤30	PASS
		2452	4.07	≤30	PASS


Test Graphs

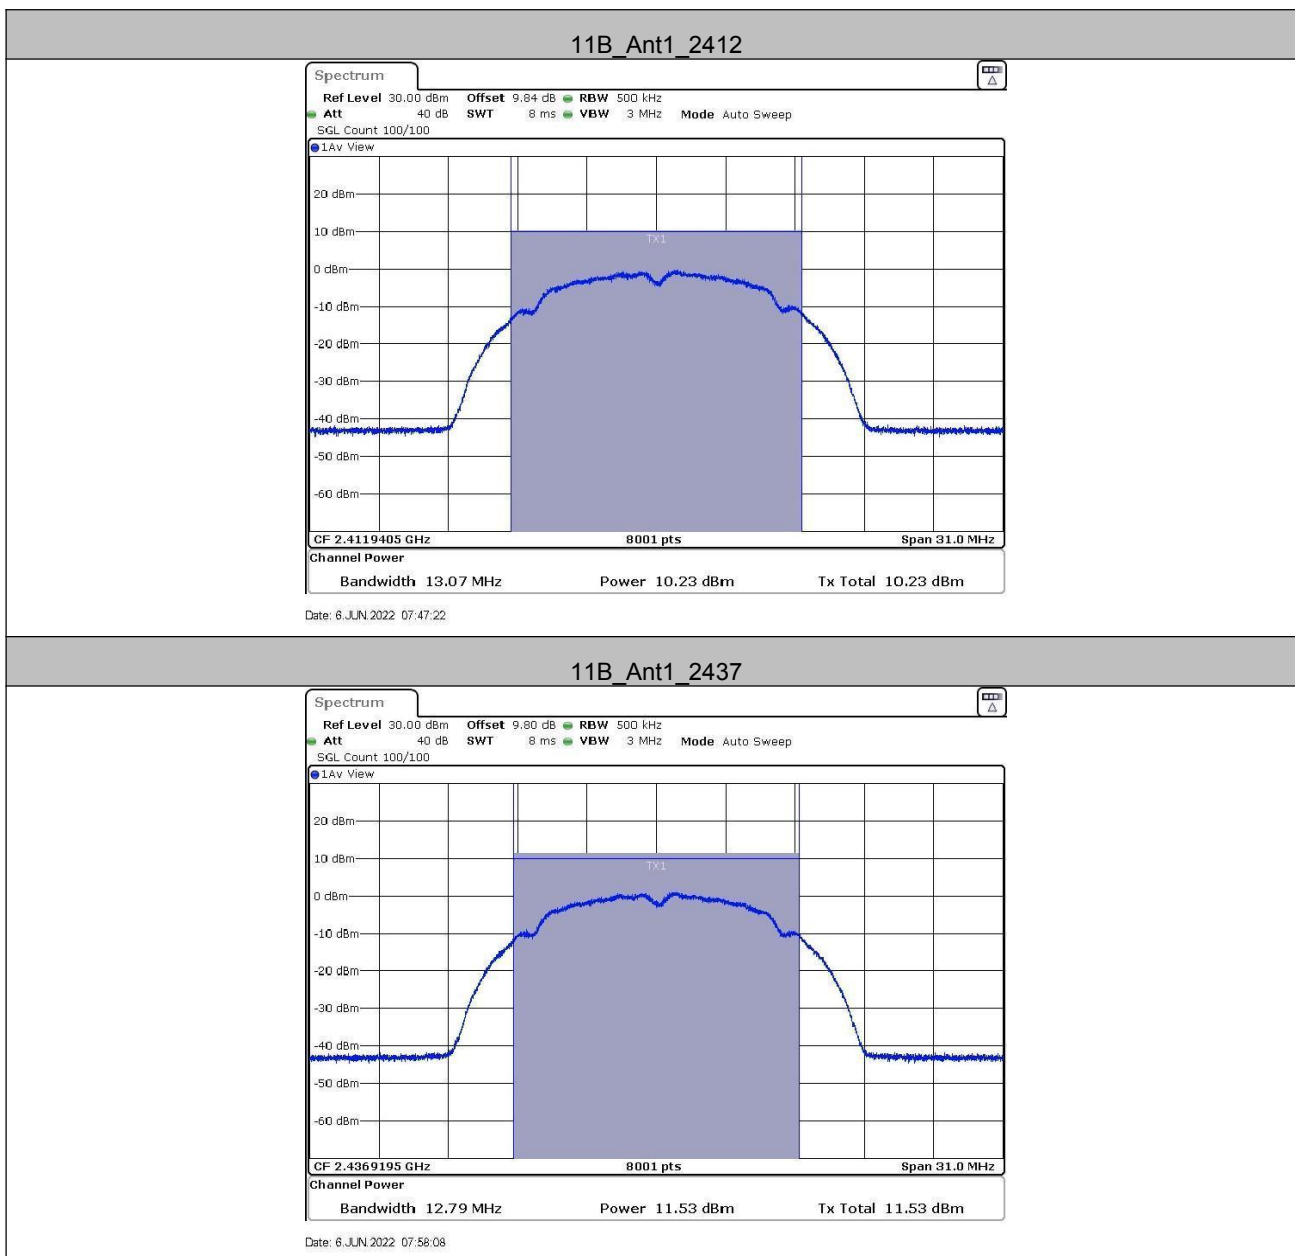

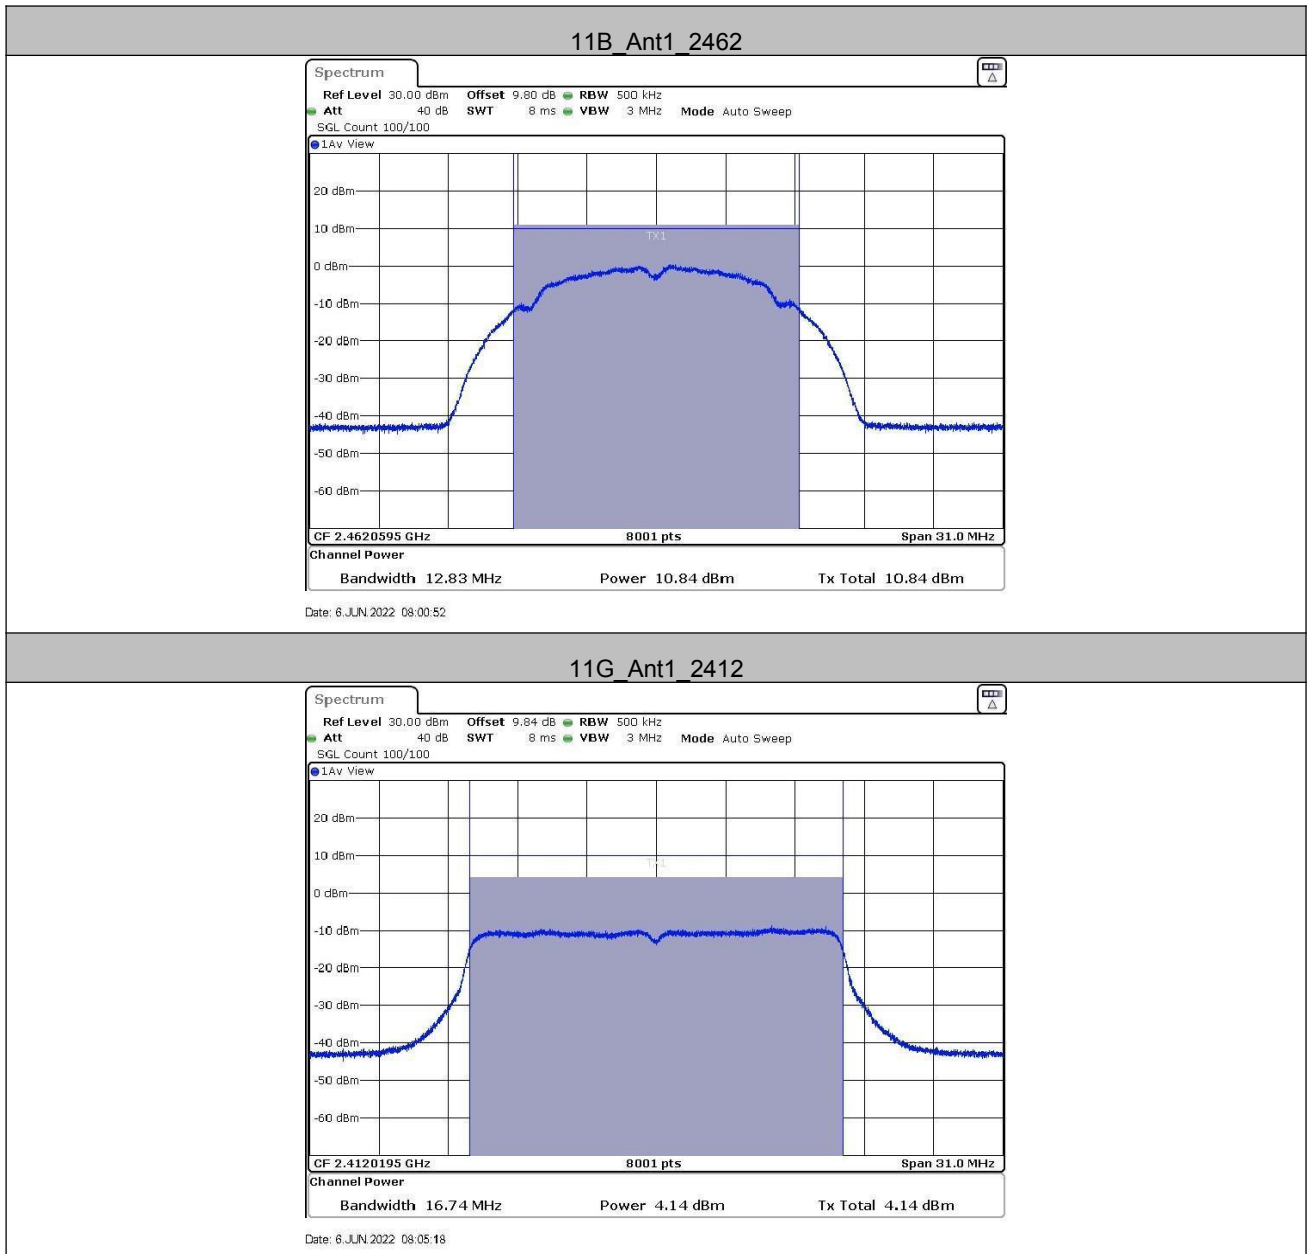

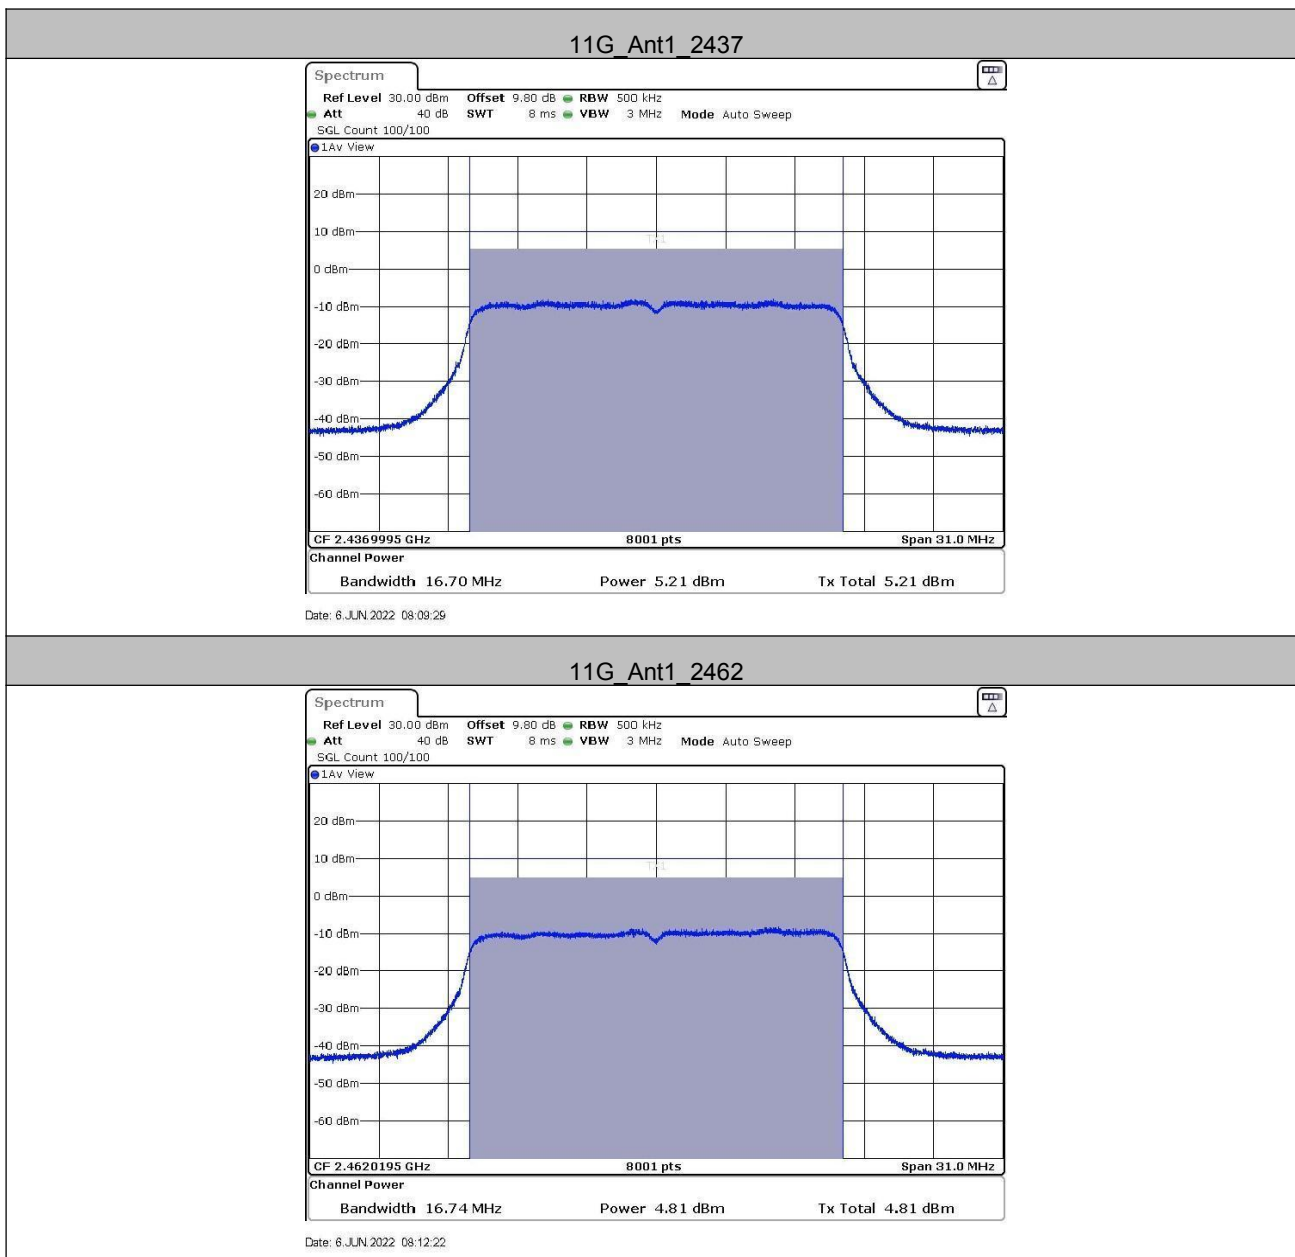


11N20SISO_Ant1_2412

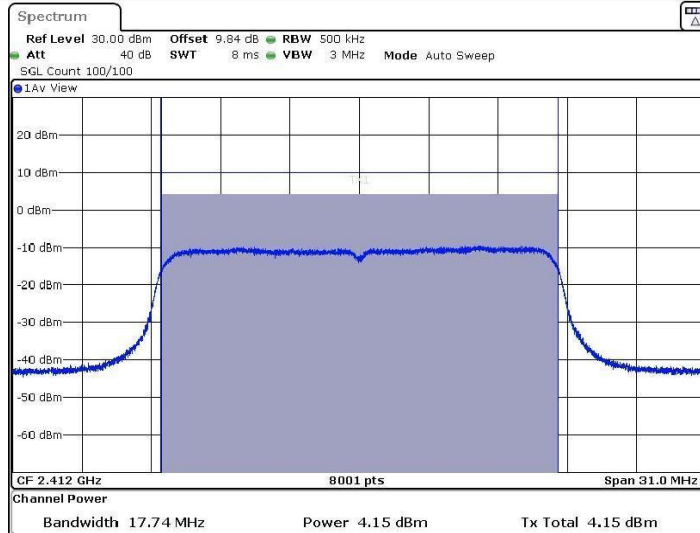


Date: 6 JUN 2022 08:15:49

11N20SISO_Ant1_2437

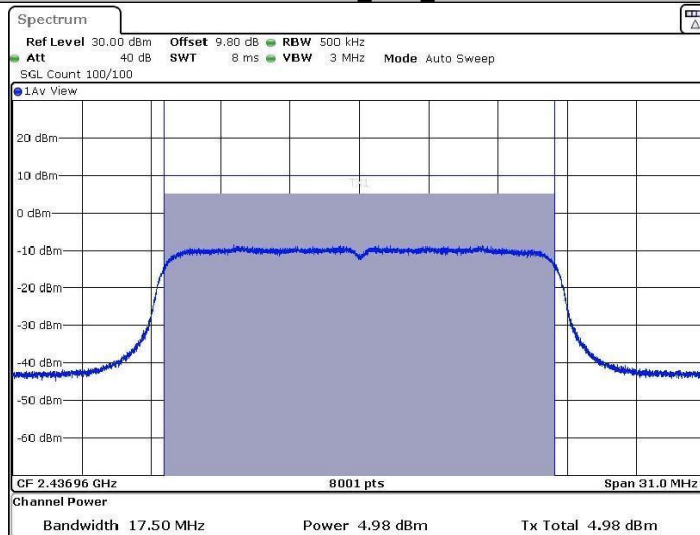


Date: 6 JUN 2022 08:19:33

11N20SISO_Ant1_2462

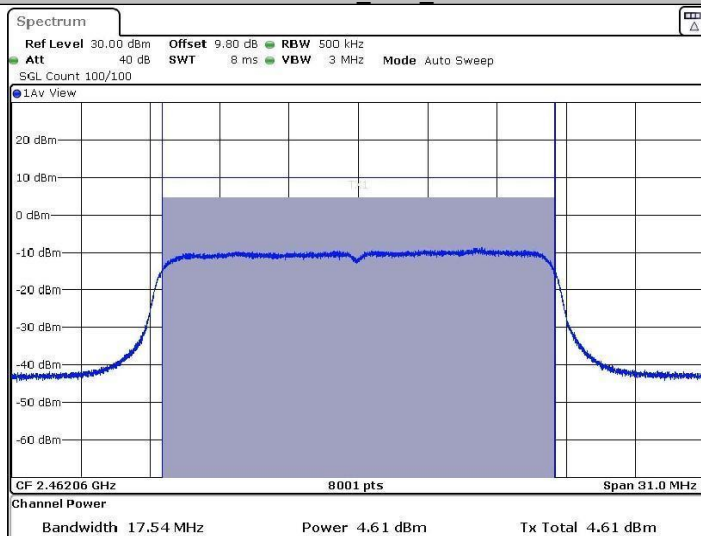


Date: 6 JUN 2022 08:22:26

11N40SISO_Ant1_2422

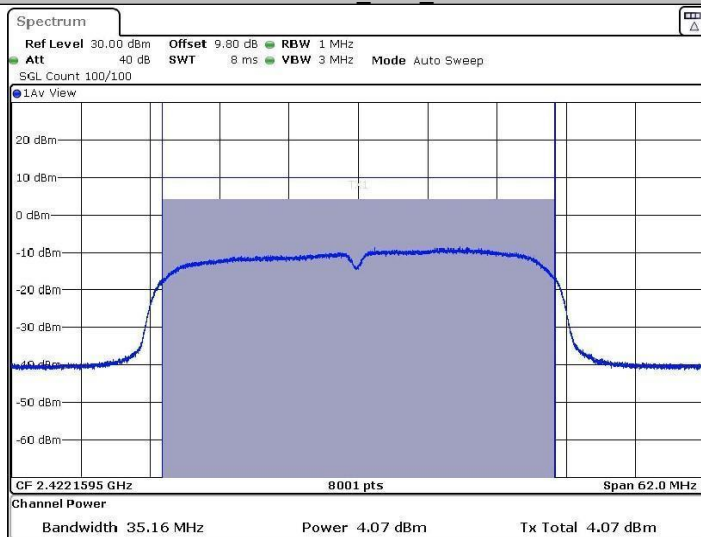


Date: 6 JUN 2022 08:27:30

11N40SISO_Ant1_2437

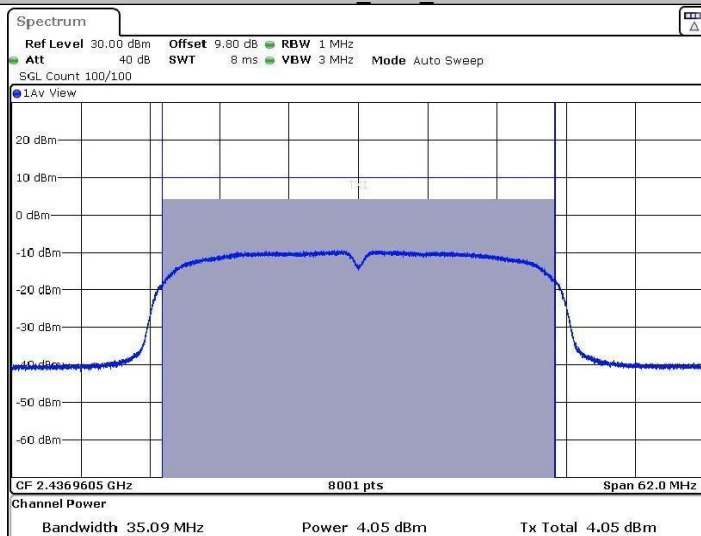


Date: 6 JUN 2022 08:31:45

11N40SISO_Ant1_2452

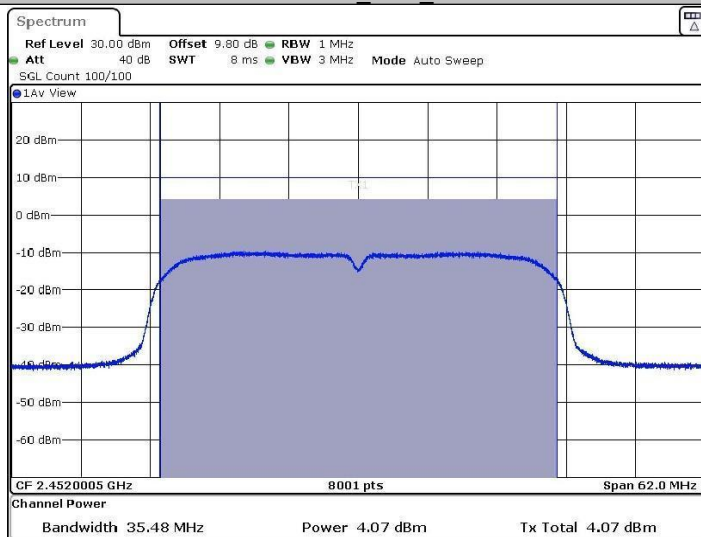

Date: 6 JUN 2022 08:34:31


5.4 6dB Occupy Bandwidth

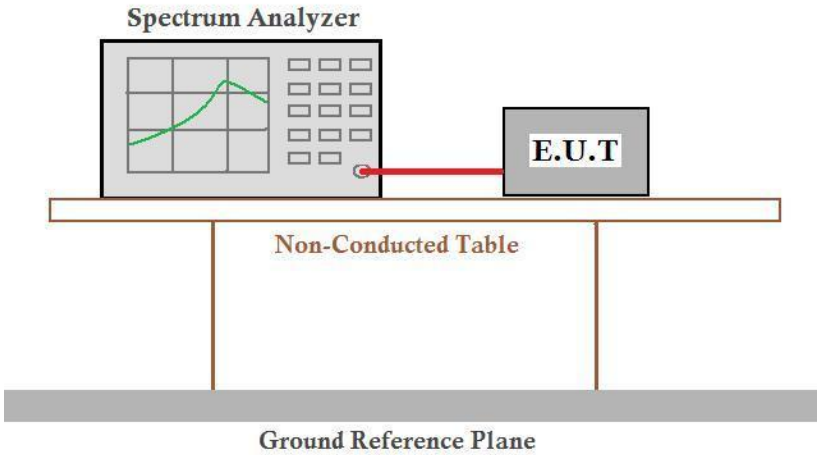Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.200	2407.400	2416.600	0.5	PASS
		2437	9.160	2432.400	2441.560	0.5	PASS
		2462	9.200	2457.400	2466.600	0.5	PASS
11G	Ant1	2412	16.560	2403.720	2420.280	0.5	PASS
		2437	16.480	2428.720	2445.200	0.5	PASS
		2462	16.520	2453.760	2470.280	0.5	PASS
11N20SISO	Ant1	2412	17.680	2403.160	2420.840	0.5	PASS
		2437	17.400	2428.400	2445.800	0.5	PASS
		2462	17.440	2453.400	2470.840	0.5	PASS
11N40SISO	Ant1	2422	33.200	2405.600	2438.800	0.5	PASS
		2437	33.360	2420.360	2453.720	0.5	PASS
		2452	34.000	2434.960	2468.960	0.5	PASS

Test Graphs

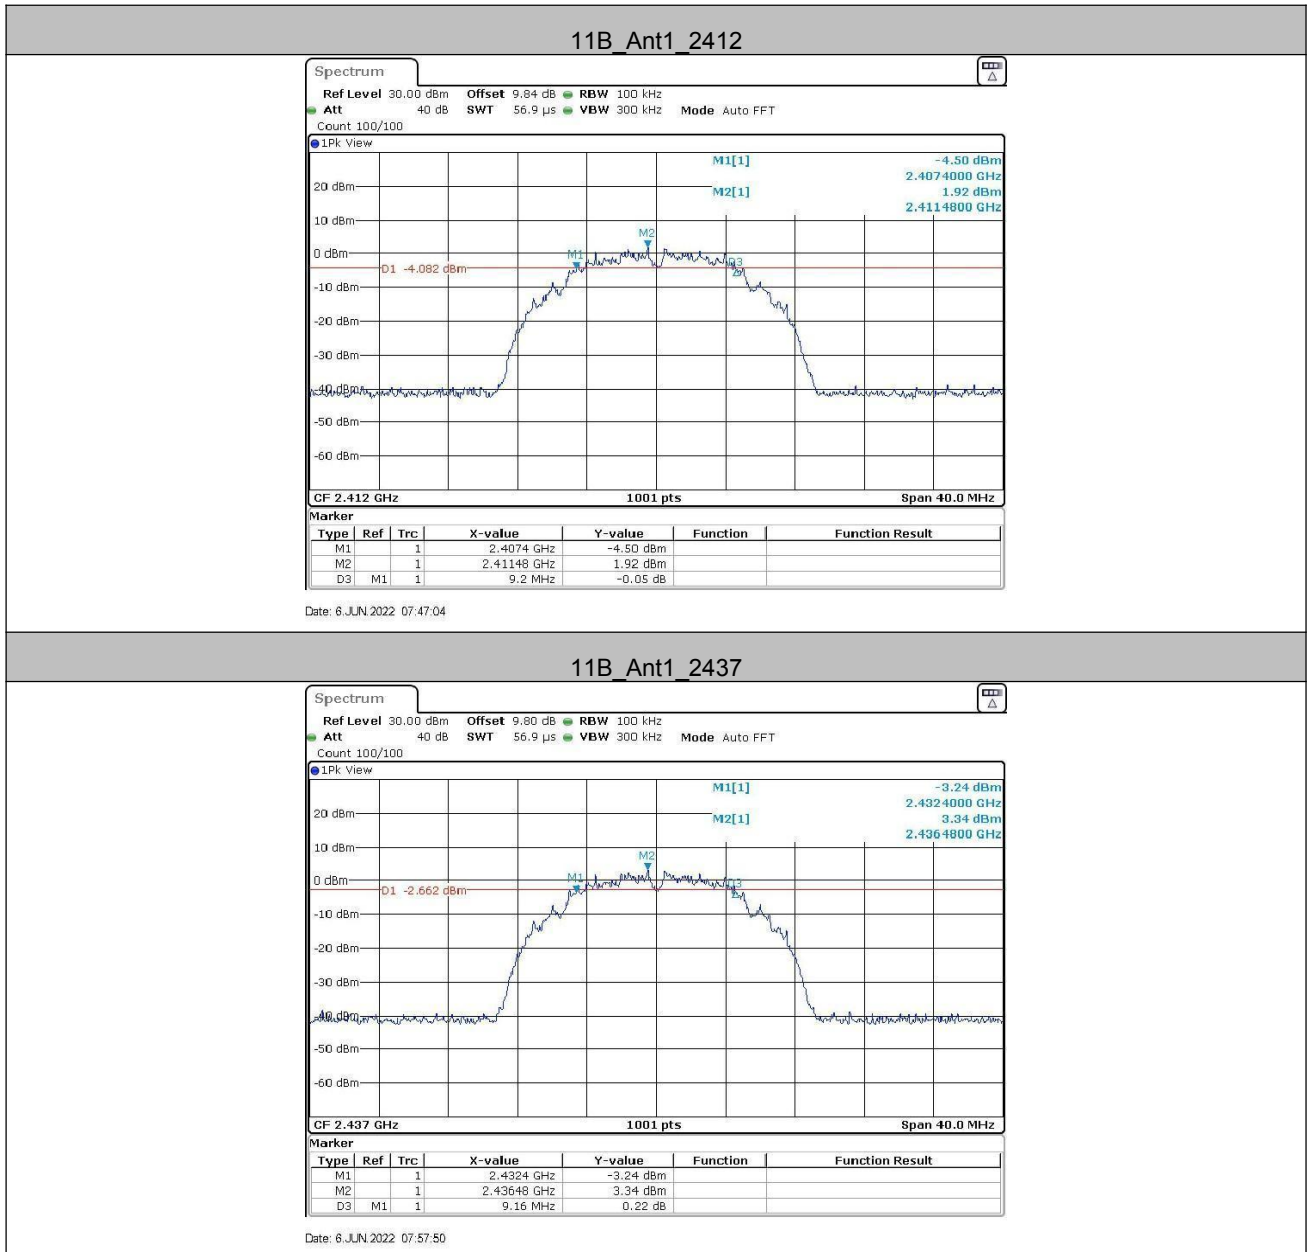


11B_Ant1_2462

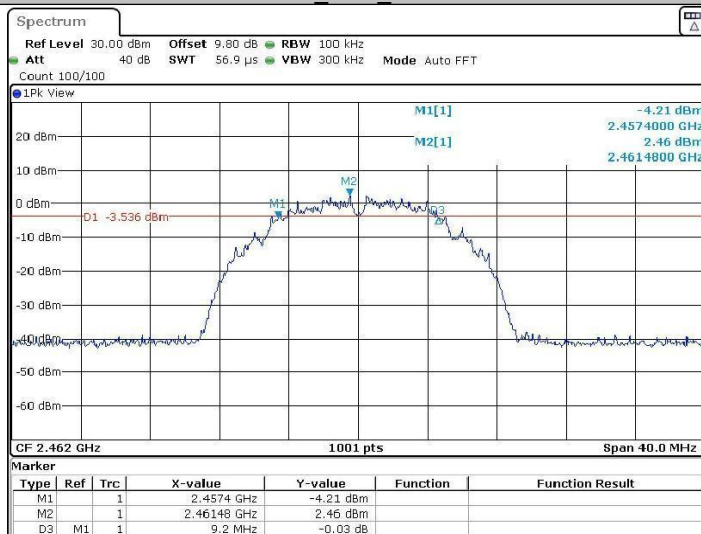


Date: 6 JUN 2022 08:00:34

11G_Ant1_2412

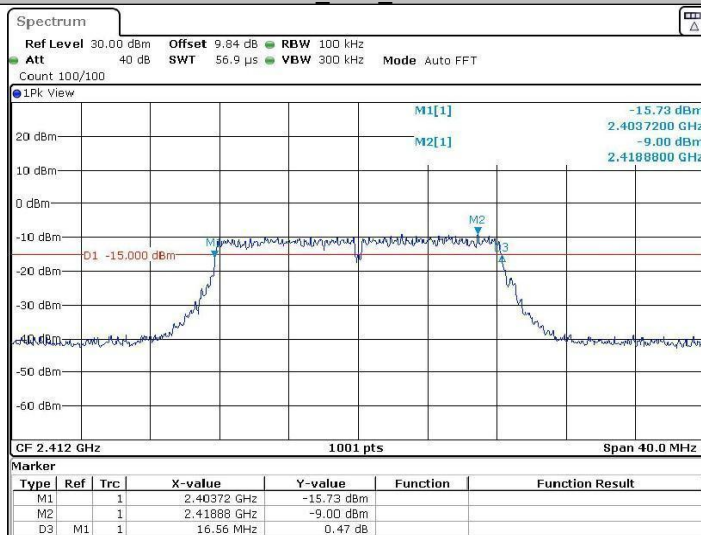


Date: 6 JUN 2022 08:05:00

11G_Ant1_2437

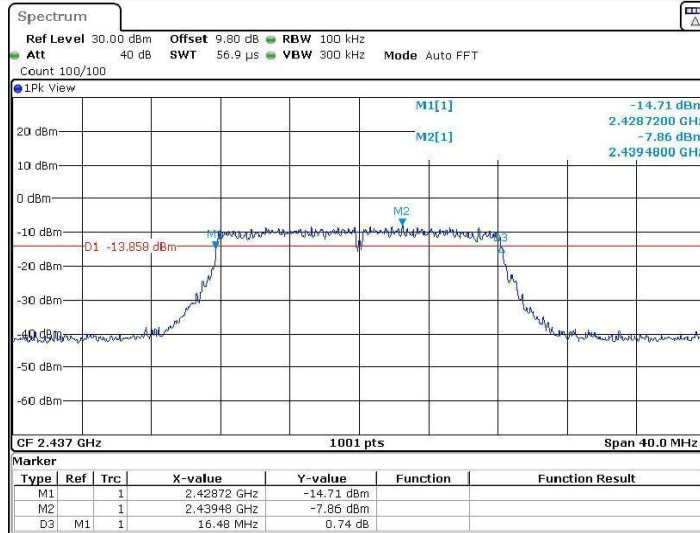


Date: 6 JUN 2022 08:09:12

11G_Ant1_2462

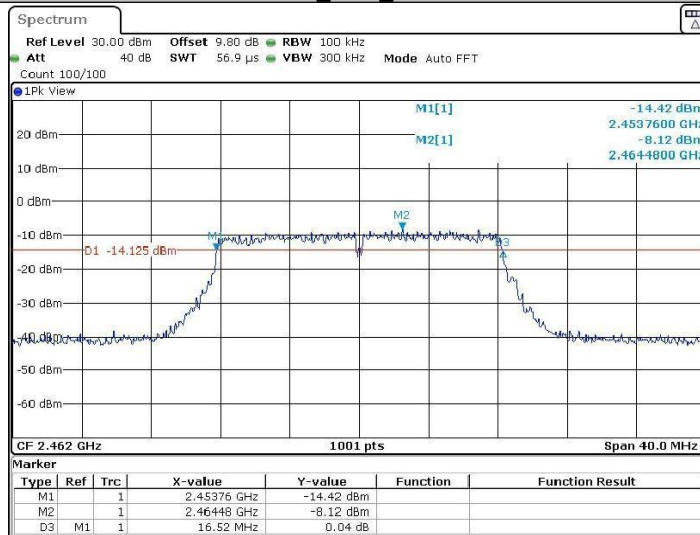


Date: 6 JUN 2022 08:12:04

11N20SISO_Ant1_2412

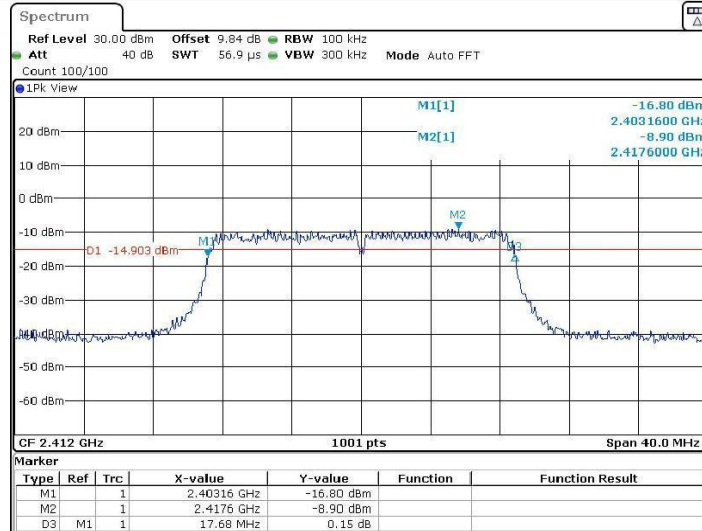


Date: 6 JUN 2022 08:15:31

11N20SISO_Ant1_2437

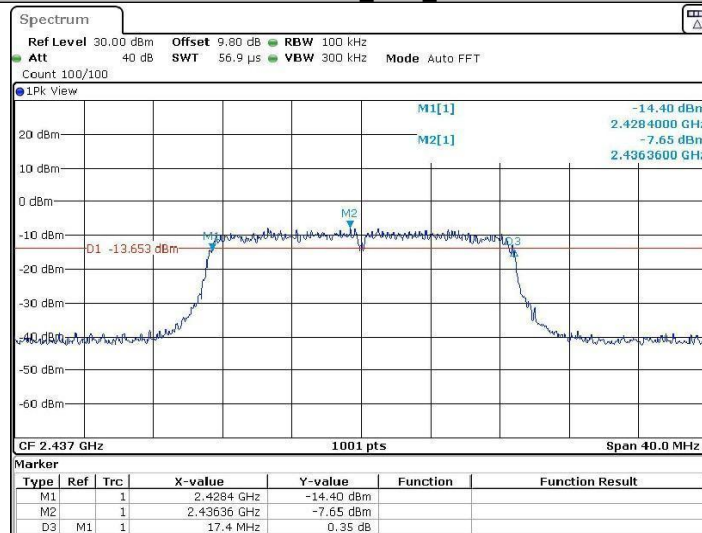


Date: 6 JUN 2022 08:19:15

11N20SISO_Ant1_2462

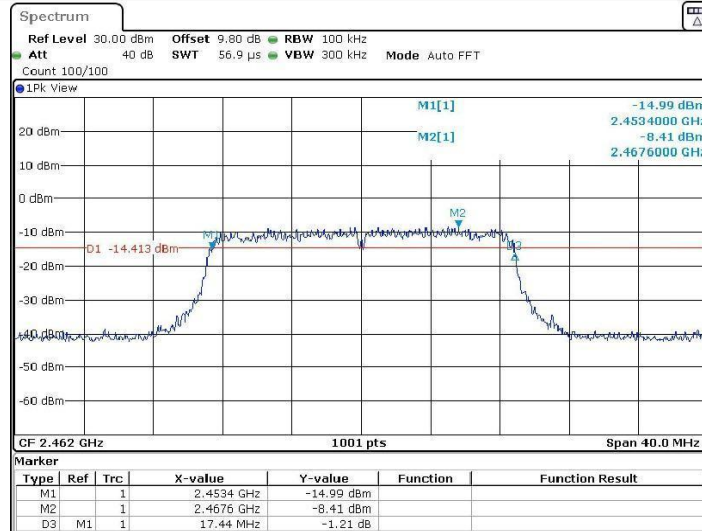


Date: 6 JUN 2022 08:22:08

11N40SISO_Ant1_2422

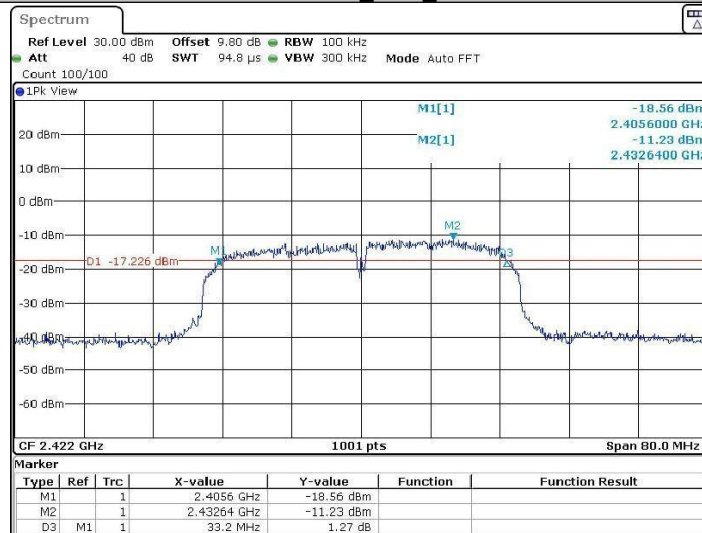


Date: 6 JUN 2022 08:27:12

11N40SISO_Ant1_2437

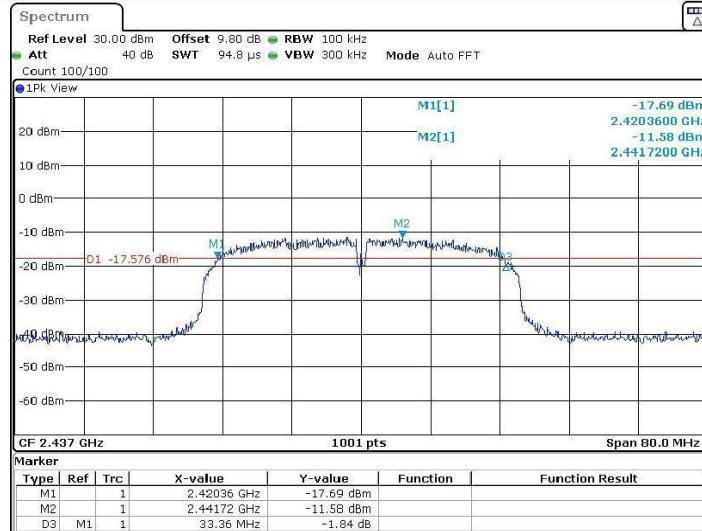


Date: 6 JUN 2022 08:31:27

11N40SISO_Ant1_2452

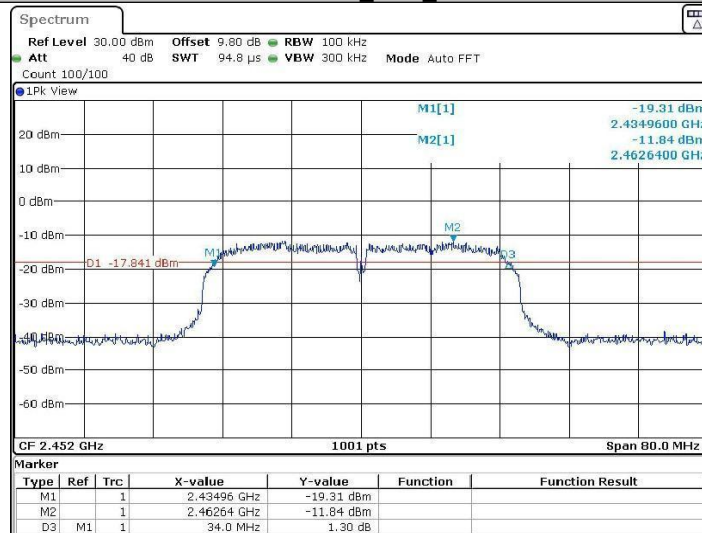

Date: 6 JUN 2022 08:34:13


5.5 Power Spectral Density

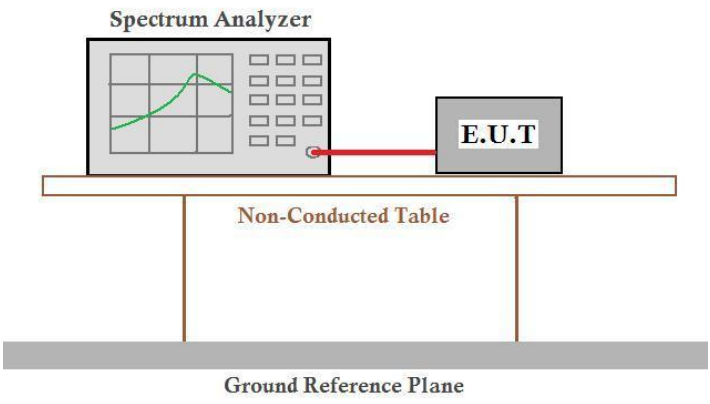Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass


Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.78	≤8	PASS
		2437	-14.14	≤8	PASS
		2462	-15.15	≤8	PASS
11G	Ant1	2412	-21.44	≤8	PASS
		2437	-19.21	≤8	PASS
		2462	-19.84	≤8	PASS
11N20SISO	Ant1	2412	-21.54	≤8	PASS
		2437	-19.59	≤8	PASS
		2462	-19.65	≤8	PASS
11N40SISO	Ant1	2422	-20.96	≤8	PASS
		2437	-21.29	≤8	PASS
		2452	-21.69	≤8	PASS


Test Graphs

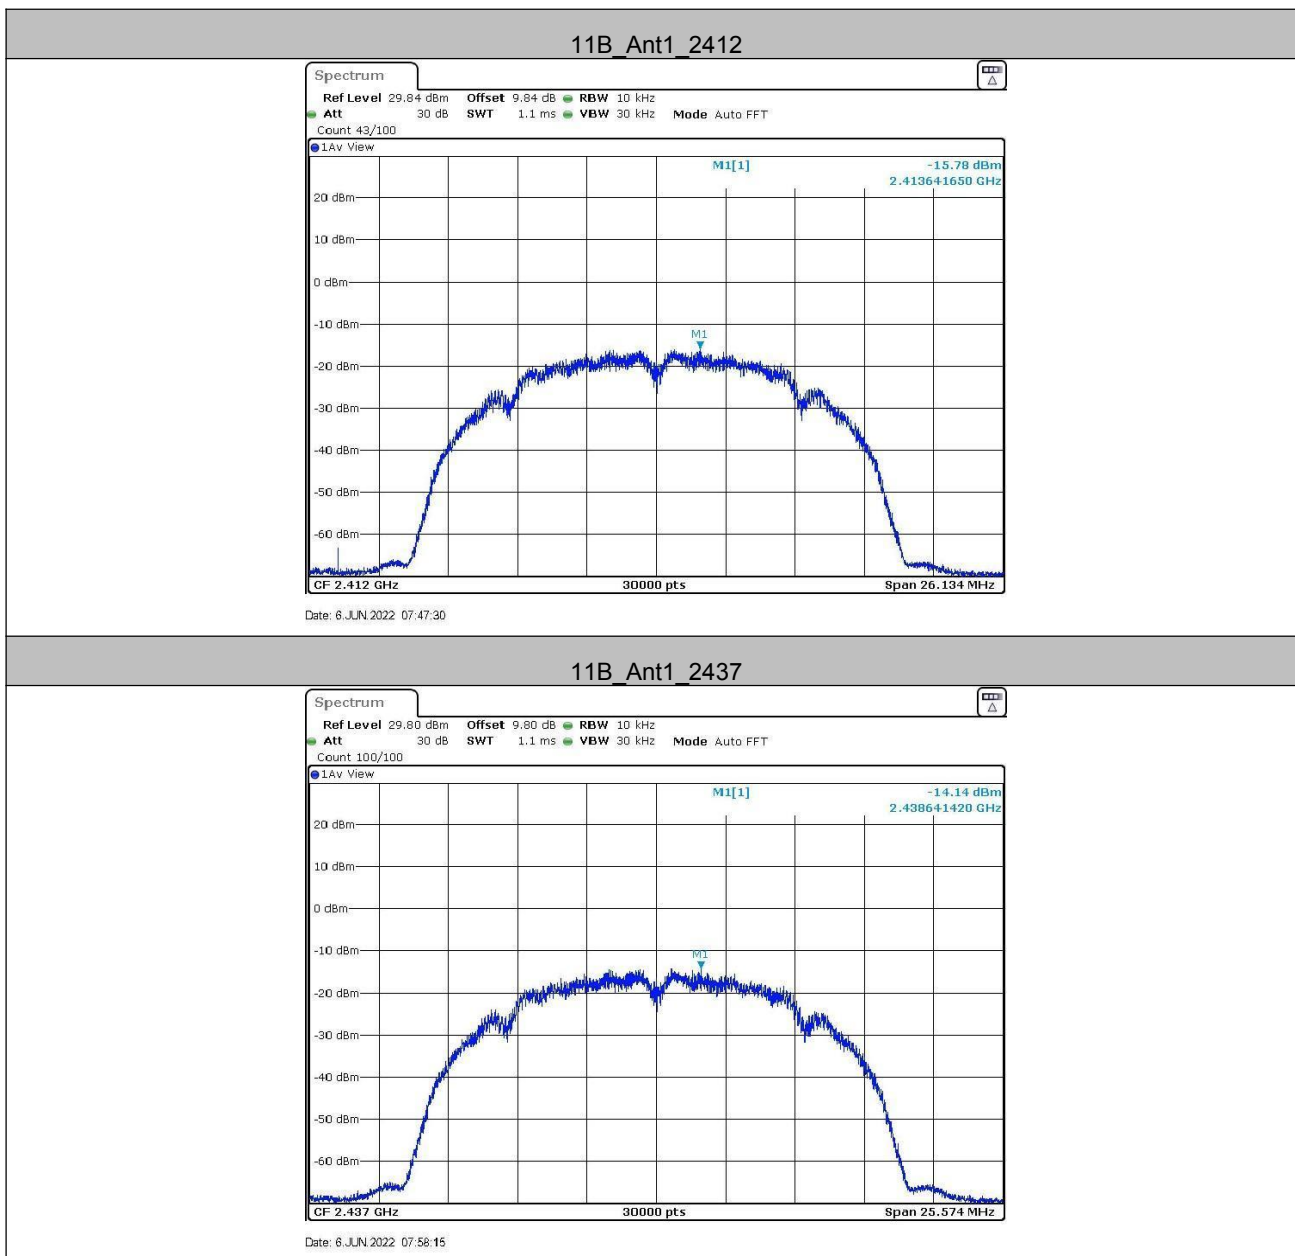


11B_Ant1_2462

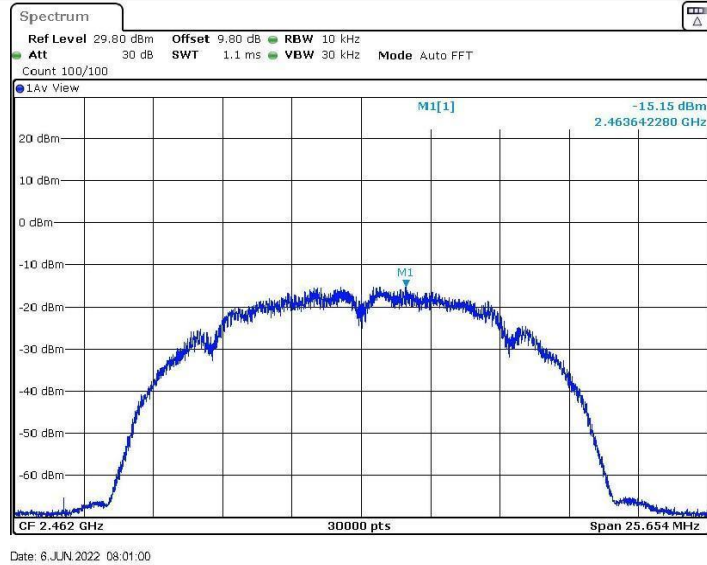


11G_Ant1_2412

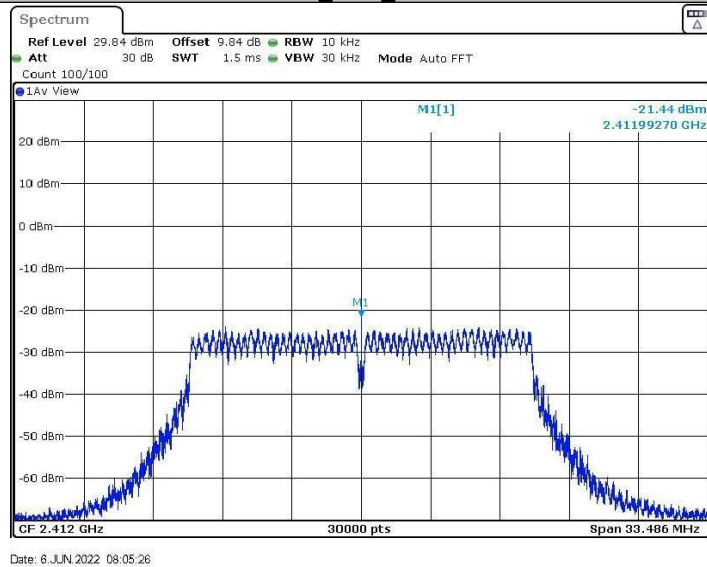


11G_Ant1_2437

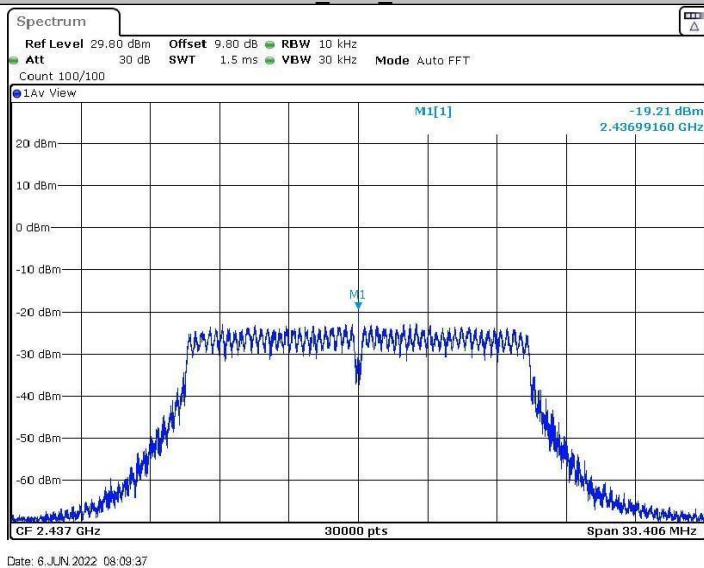


11G_Ant1_2462

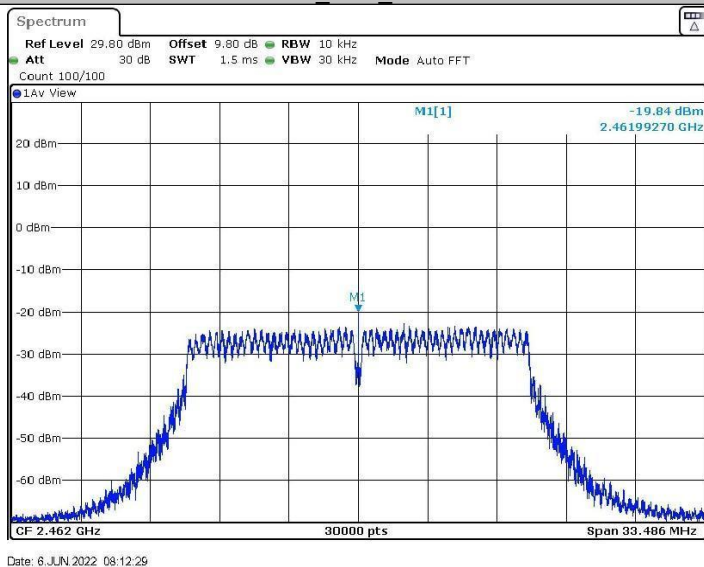


11N20SISO_Ant1_2412

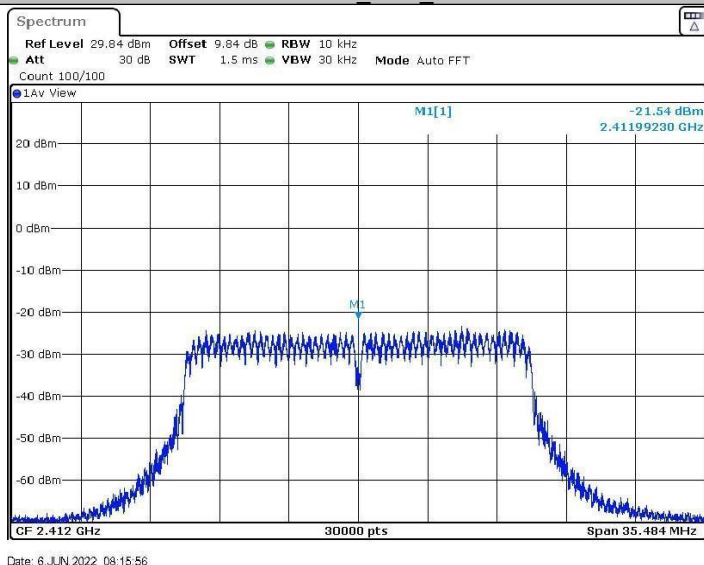


11N20SISO_Ant1_2437

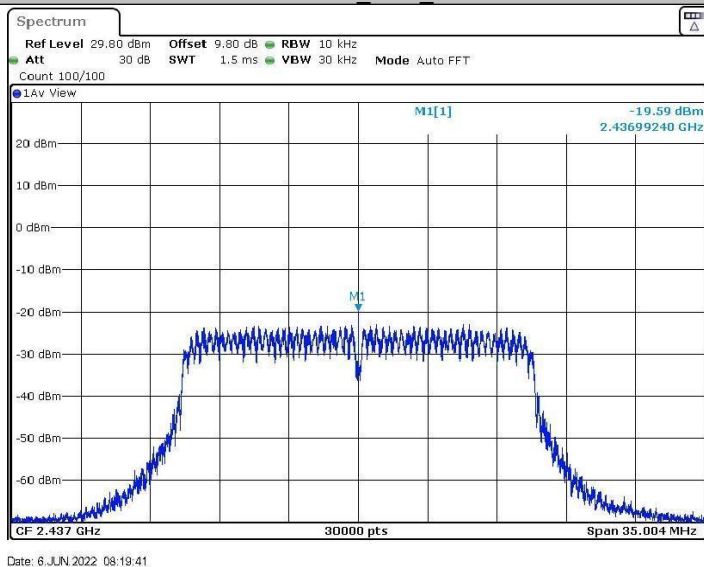


11N20SISO_Ant1_2462

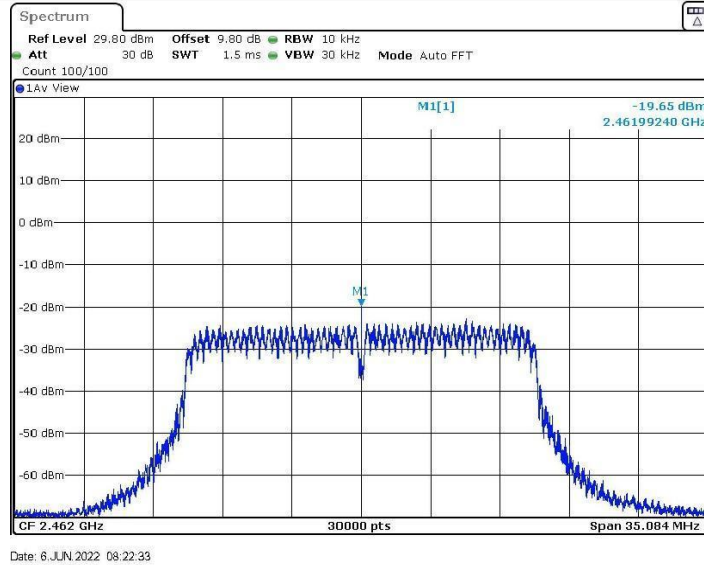


11N40SISO_Ant1_2422

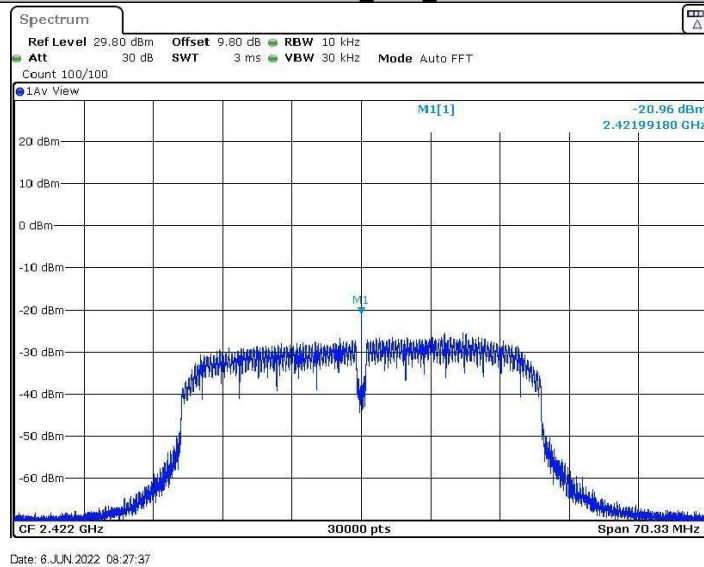




5.6 Band-edge for RF Conducted Emissions

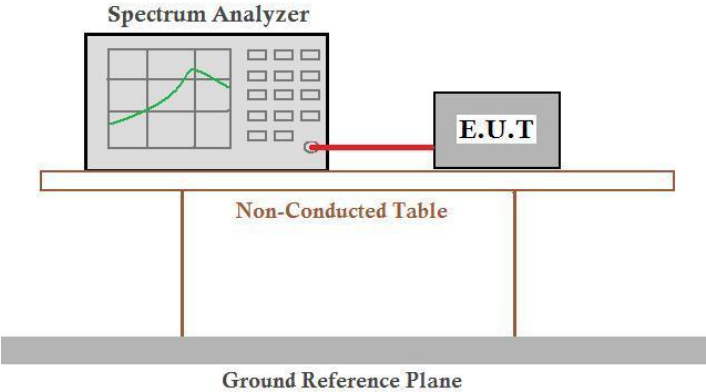Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	1.64	-47.95	≤ -28.36	PASS
		High	2462	1.80	-47.57	≤ -28.2	PASS
11G	Ant1	Low	2412	-8.46	-45.09	≤ -38.46	PASS
		High	2462	-7.67	-47.31	≤ -37.67	PASS
11N20SISO	Ant1	Low	2412	-9.00	-45.43	≤ -39	PASS
		High	2462	-8.58	-47.27	≤ -38.58	PASS
11N40SISO	Ant1	Low	2422	-11.06	-45.66	≤ -41.06	PASS
		High	2452	-11.48	-47.15	≤ -41.48	PASS

5.6.1 Test Graphs

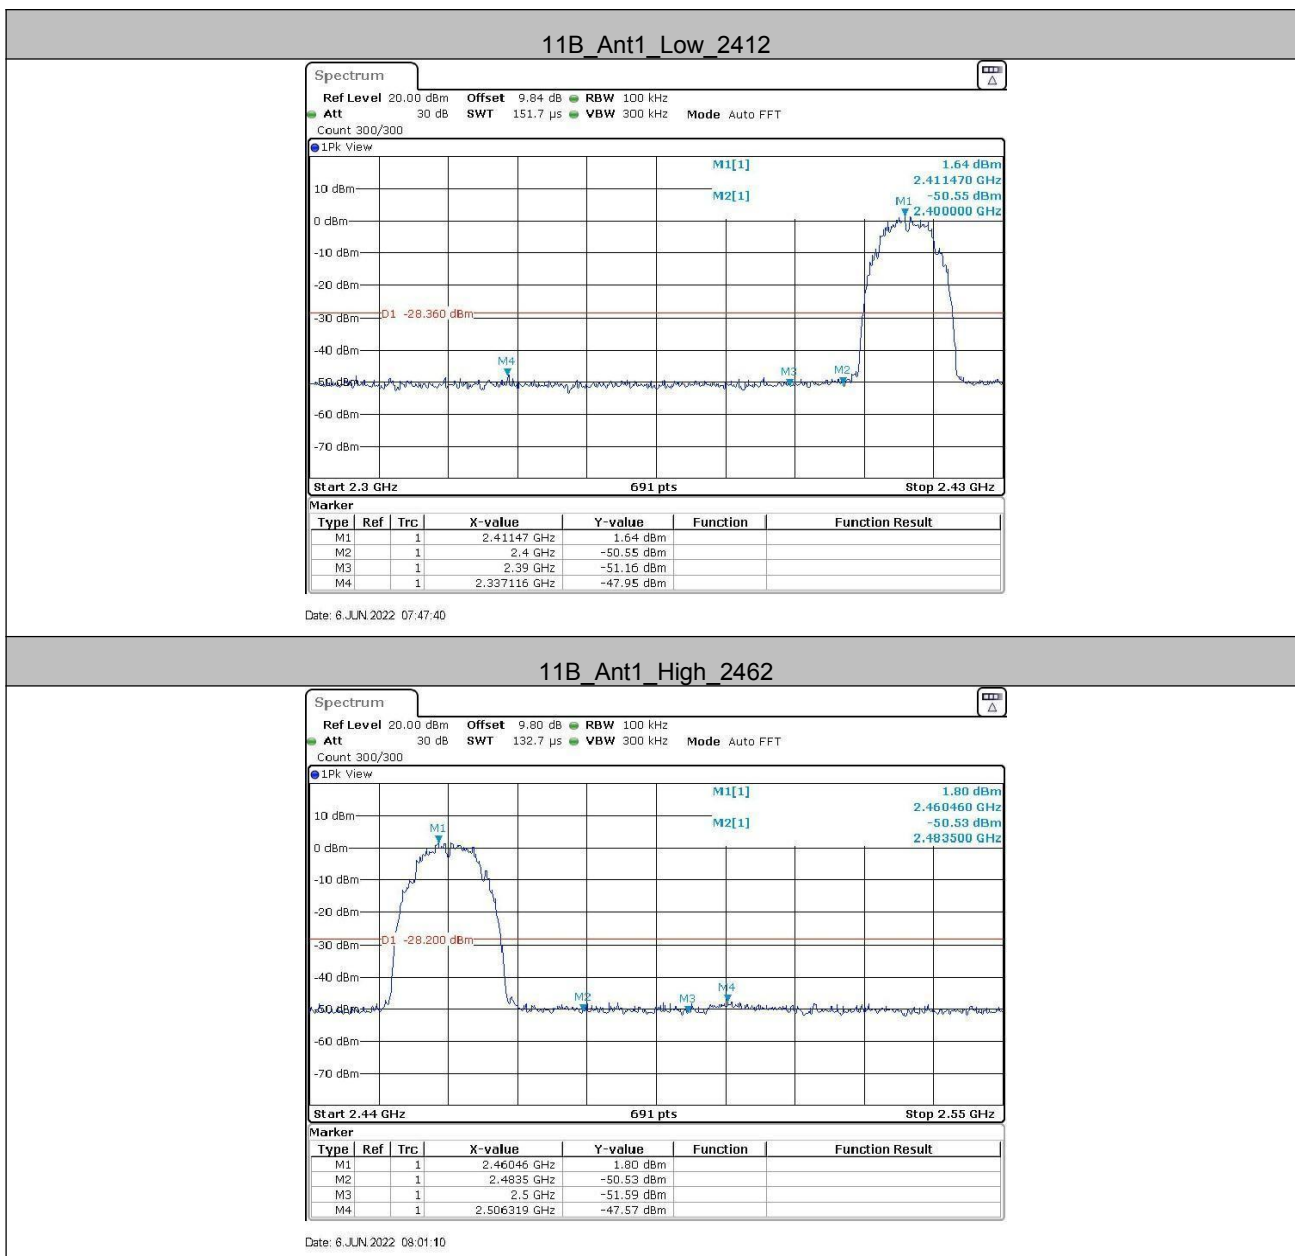


11G_Ant1_Low_2412

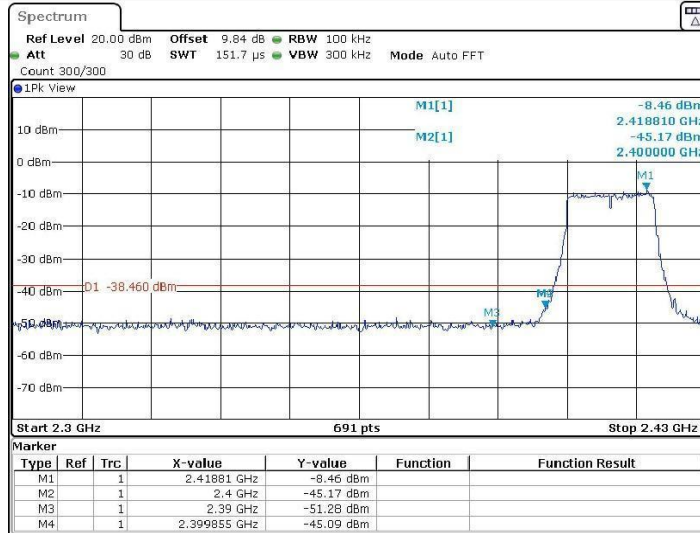


Date: 6 JUN 2022 08:05:35

11G_Ant1_High_2462

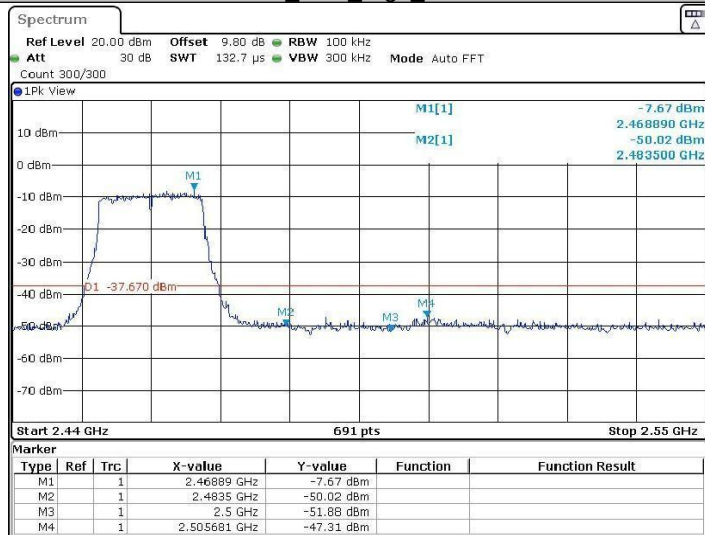


Date: 6 JUN 2022 08:12:39

11N20SISO_Ant1_Low_2412

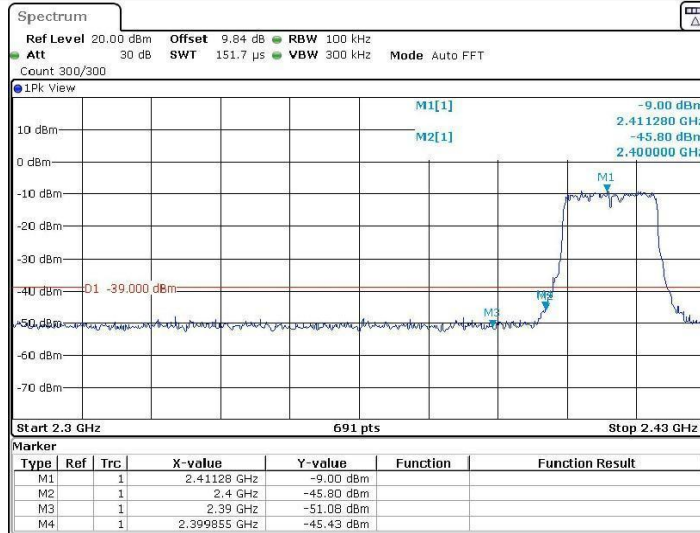


Date: 6 JUN 2022 08:16:06

11N20SISO_Ant1_High_2462

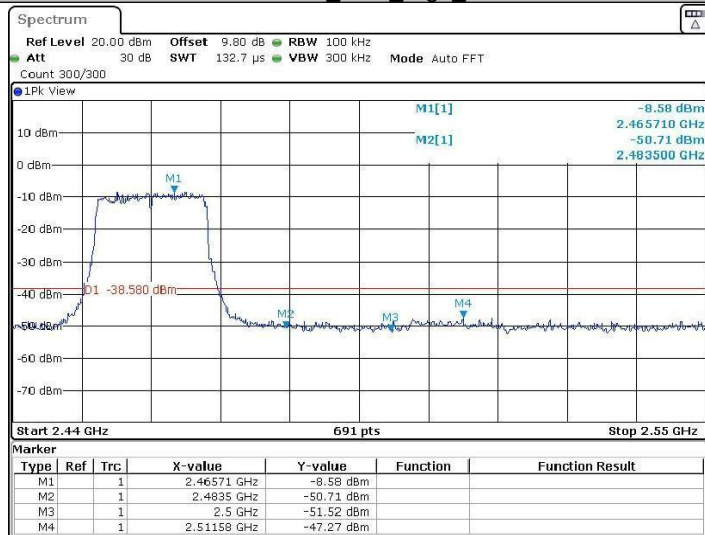


Date: 6 JUN 2022 08:22:43

11N40SISO_Ant1_Low_2422

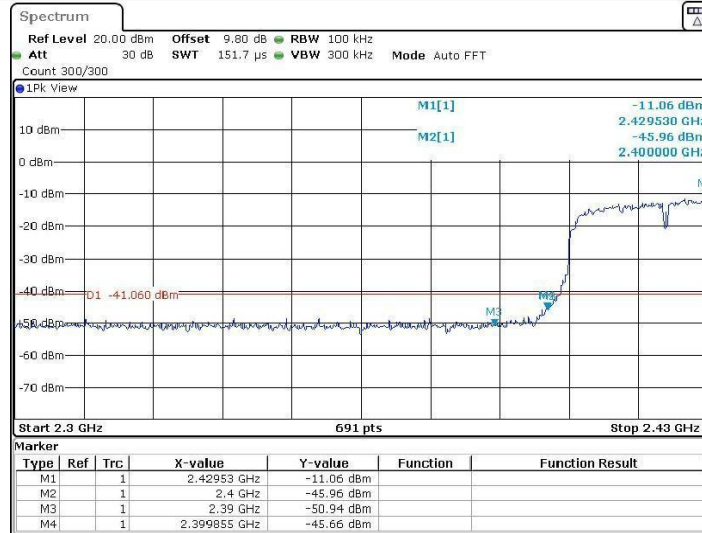


Date: 6 JUN 2022 08:27:47

11N40SISO_Ant1_High_2452

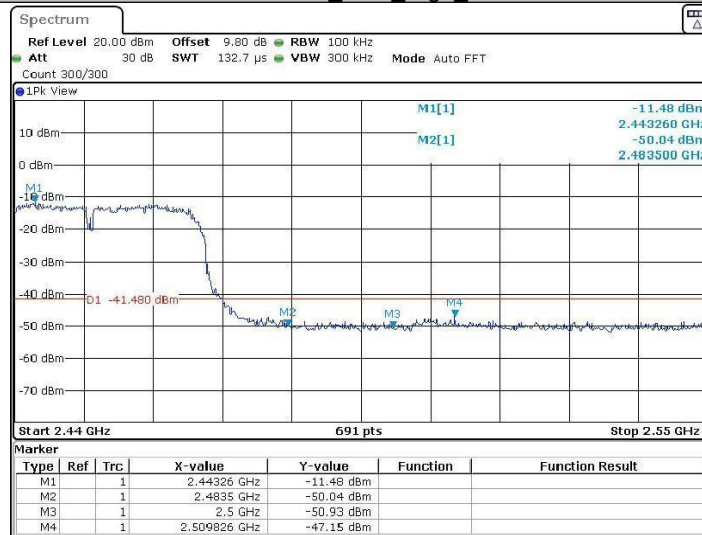

Date: 6 JUN 2022 08:34:49

5.7 RF Conducted Spurious Emissions

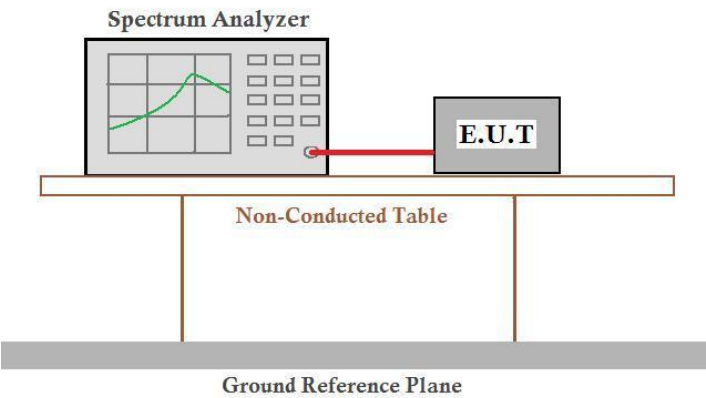
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result


TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	1.28	1.28	---	PASS
			30~1000	1.28	-54.68	≤-28.72	PASS
			1000~26500	1.28	-46.31	≤-28.72	PASS
		2437	Reference	2.98	2.98	---	PASS
			30~1000	2.98	-54.06	≤-27.02	PASS
			1000~26500	2.98	-46.84	≤-27.02	PASS
		2462	Reference	1.99	1.99	---	PASS
			30~1000	1.99	-54.16	≤-28.01	PASS
			1000~26500	1.99	-47.62	≤-28.01	PASS
11G	Ant1	2412	Reference	-8.14	-8.14	---	PASS
			30~1000	-8.14	-56.26	≤-38.14	PASS
			1000~26500	-8.14	-44.17	≤-38.14	PASS
		2437	Reference	-7.87	-7.87	---	PASS
			30~1000	-7.87	-56.27	≤-37.87	PASS
			1000~26500	-7.87	-46.04	≤-37.87	PASS
		2462	Reference	-7.73	-7.73	---	PASS
			30~1000	-7.73	-56.35	≤-37.73	PASS
			1000~26500	-7.73	-46.74	≤-37.73	PASS
11N20SISO	Ant1	2412	Reference	-8.92	-8.92	---	PASS
			30~1000	-8.92	-56.45	≤-38.92	PASS
			1000~26500	-8.92	-44.49	≤-38.92	PASS
		2437	Reference	-7.91	-7.91	---	PASS
			30~1000	-7.91	-55.32	≤-37.91	PASS
			1000~26500	-7.91	-45.77	≤-37.91	PASS
		2462	Reference	-8.61	-8.61	---	PASS
			30~1000	-8.61	-56.68	≤-38.61	PASS
			1000~26500	-8.61	-46.43	≤-38.61	PASS
11N40SISO	Ant1	2422	Reference	-10.61	-10.61	---	PASS
			30~1000	-10.61	-56.18	≤-40.61	PASS
			1000~26500	-10.61	-45.26	≤-40.61	PASS
		2437	Reference	-11.56	-11.56	---	PASS
			30~1000	-11.56	-55.92	≤-41.56	PASS
			1000~26500	-11.56	-45.92	≤-41.56	PASS
		2452	Reference	-11.67	-11.67	---	PASS

			30~1000	-11.67	-56.57	≤ 41.67	PASS
			1000~26500	-11.67	-45.05	≤ 41.67	PASS

Test Graphs

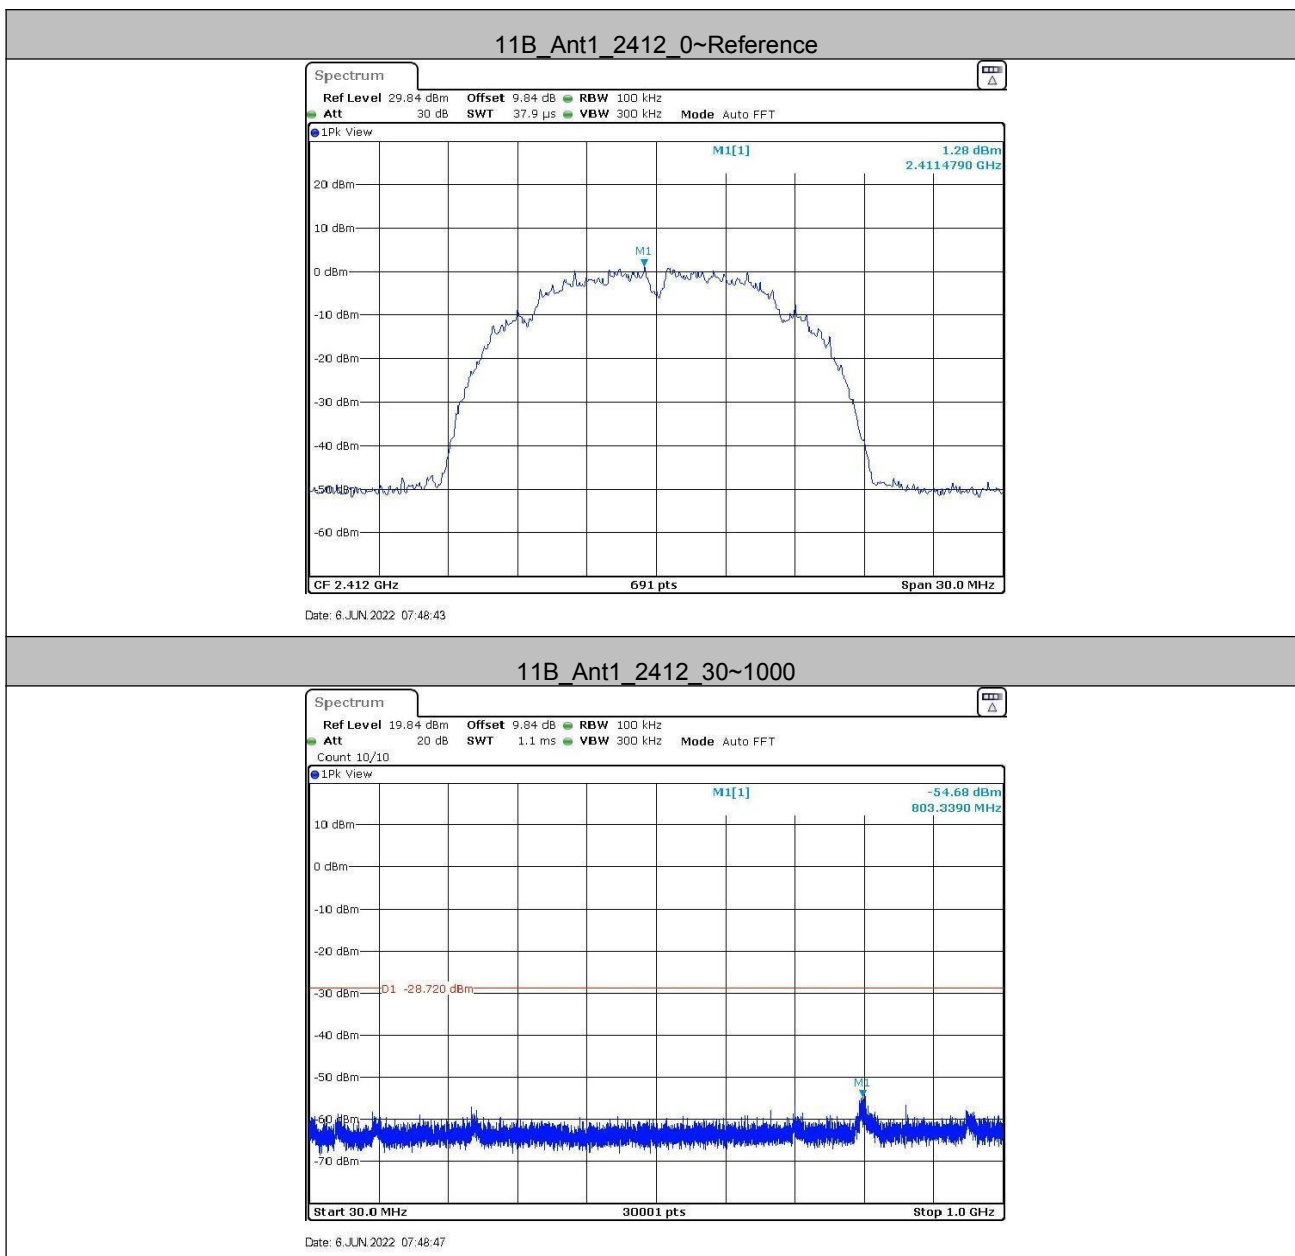

11B_Ant1_2412_1000~26500

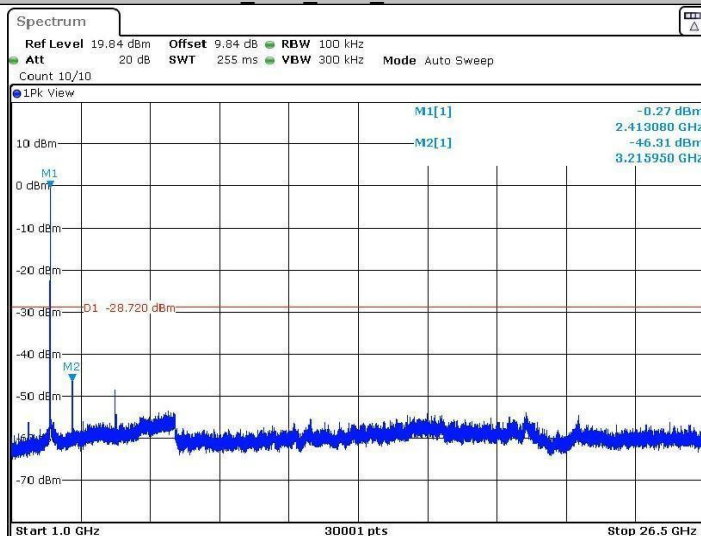


Date: 6 JUN 2022 07:49:09

11B_Ant1_2437_0~Reference




Date: 6 JUN 2022 07:58:22

11B_Ant1_2437_30~1000

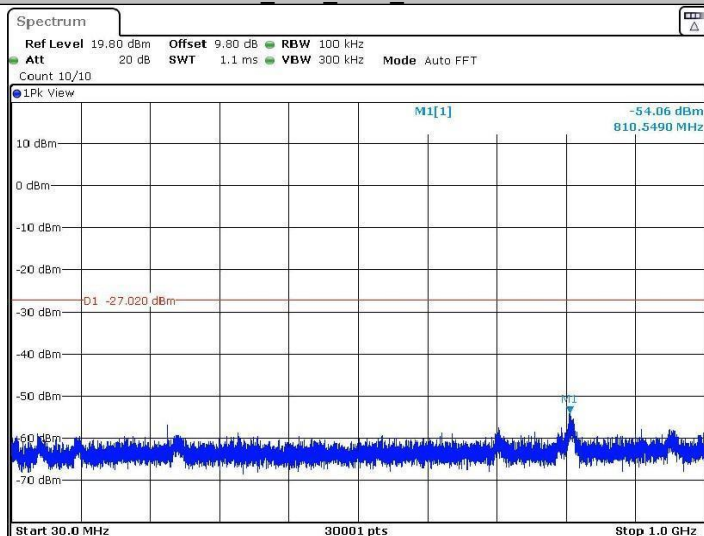


Date: 6 JUN 2022 07:58:26

11B_Ant1_2437_1000~26500

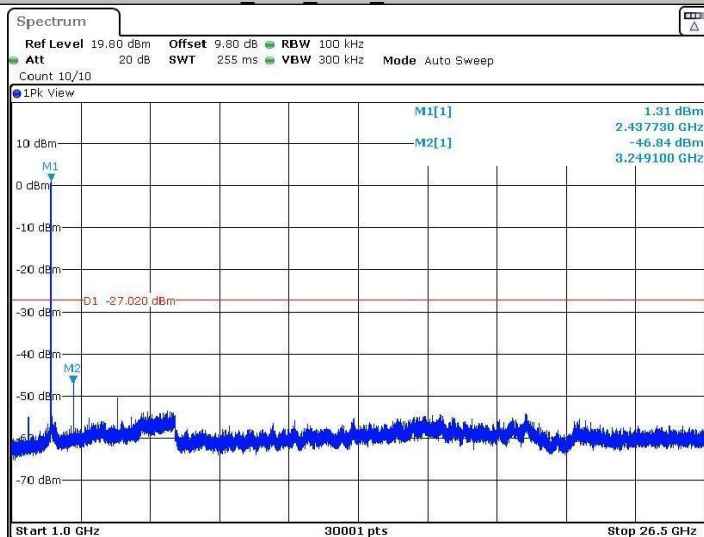


Date: 6 JUN 2022 07:58:48

11B_Ant1_2462_0~Reference

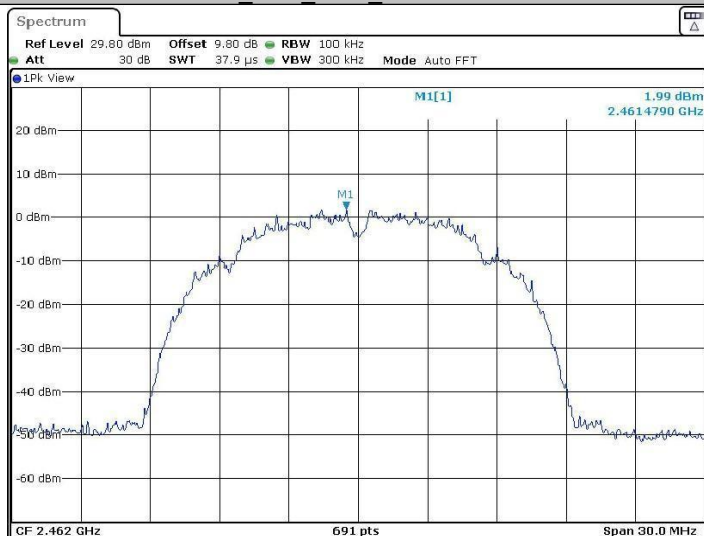


Date: 6 JUN 2022 08:03:21

11B_Ant1_2462_30~1000

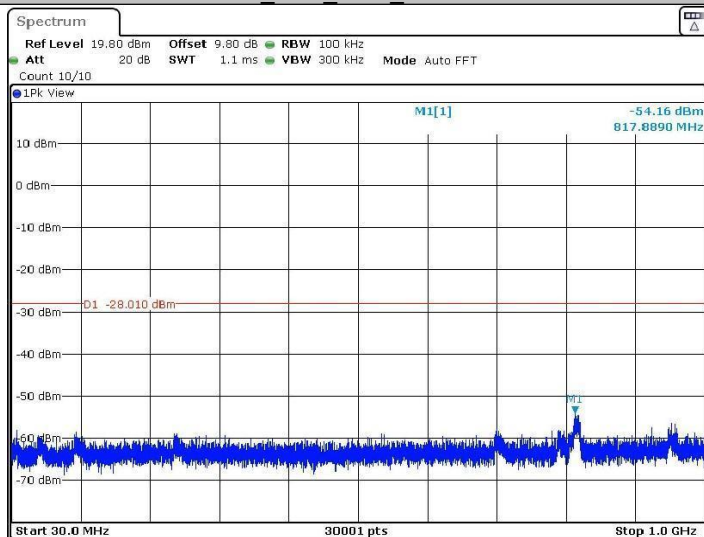


Date: 6 JUN 2022 08:03:25

11B_Ant1_2462_1000~26500

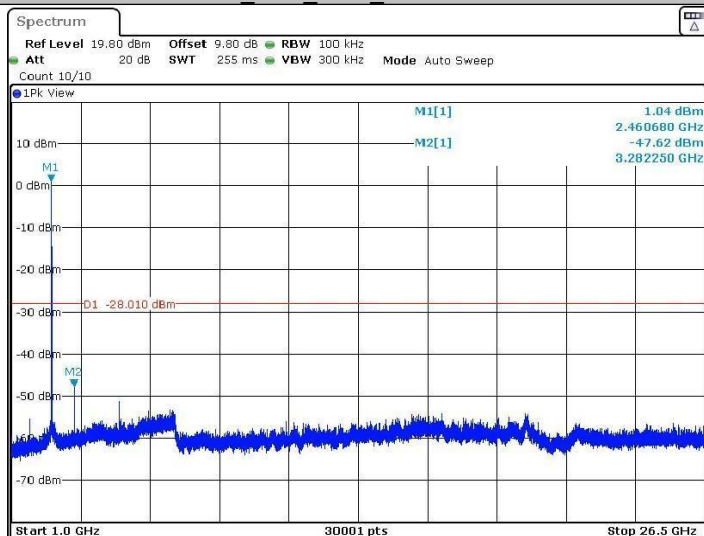


Date: 6 JUN 2022 08:03:47

11G_Ant1_2412_0~Reference

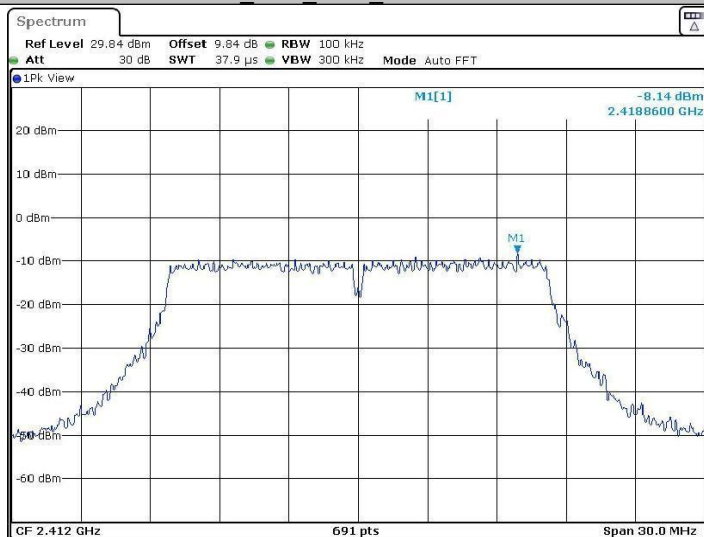


Date: 6 JUN 2022 08:06:38

11G_Ant1_2412_30~1000

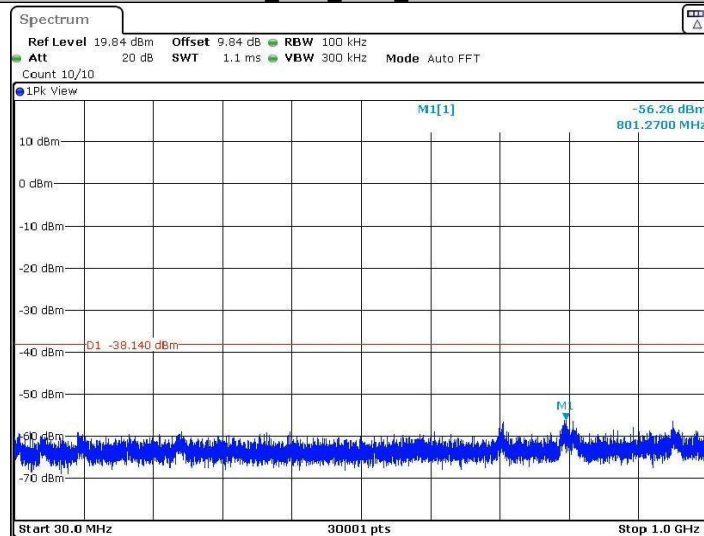


Date: 6 JUN 2022 08:06:42

11G_Ant1_2412_1000~26500

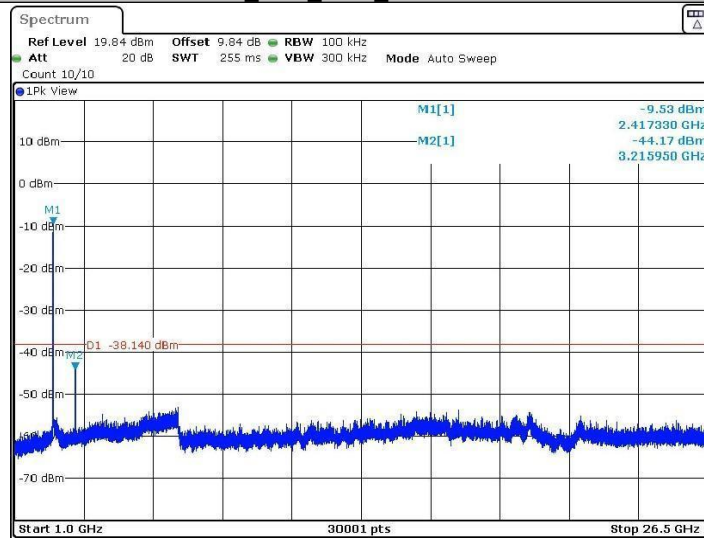


Date: 6 JUN 2022 08:07:04

11G_Ant1_2437_0~Reference

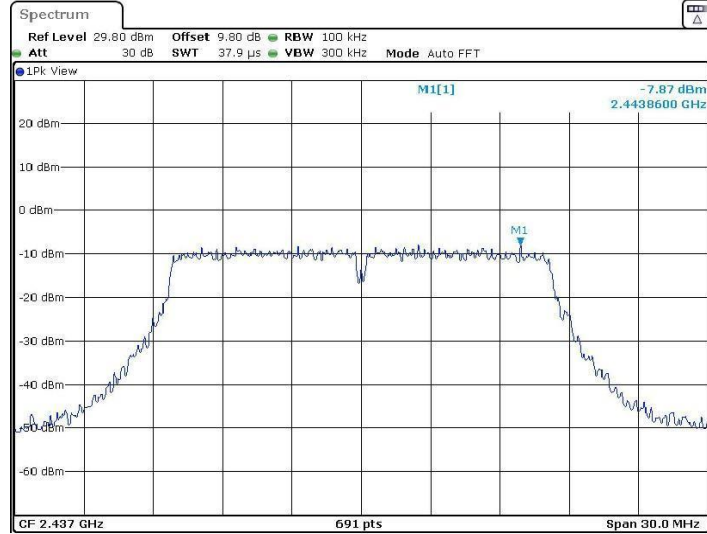


Date: 6 JUN 2022 08:09:43

11G_Ant1_2437_30~1000

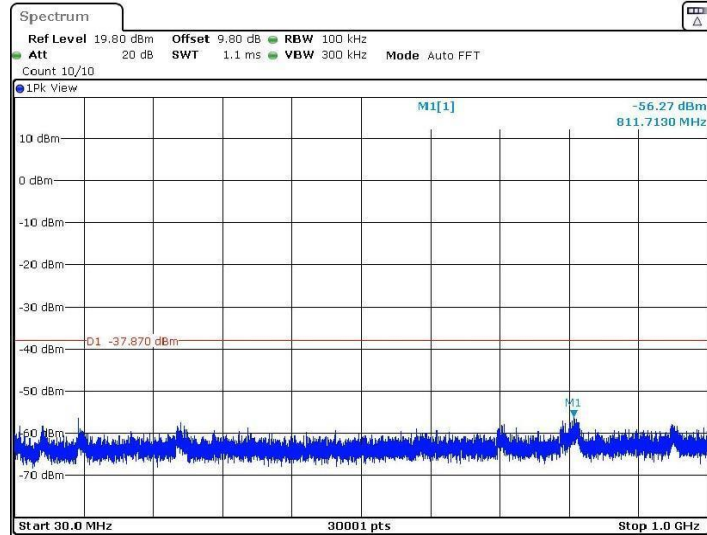


Date: 6 JUN 2022 08:09:48

11G_Ant1_2437_1000~26500

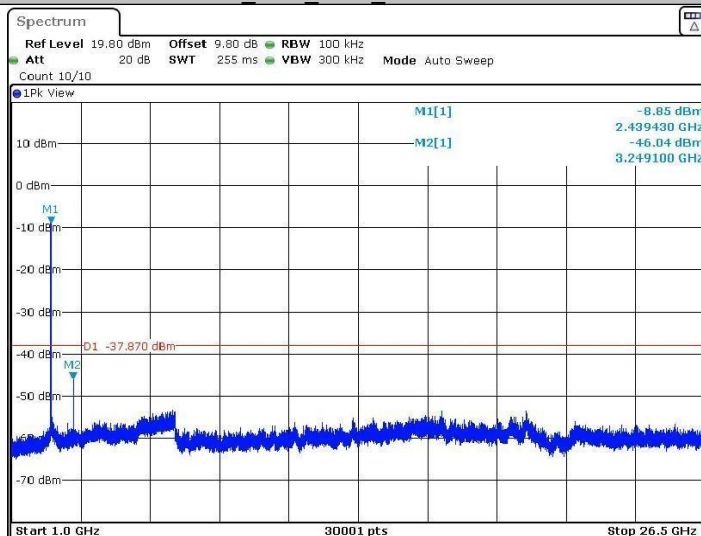

Date: 6 JUN 2022 08:10:10

11G_Ant1_2462_0~Reference

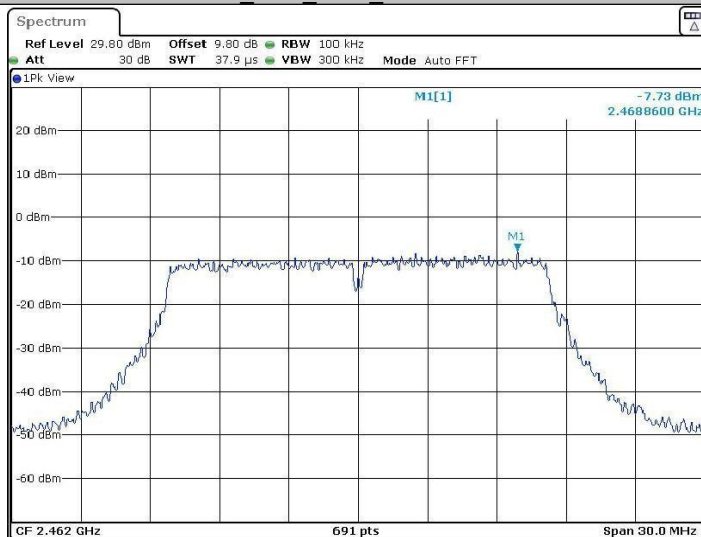

Date: 6 JUN 2022 08:13:41