



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GRCTR220502007-01

FCC ID.....: 2A66T-QI-KETOAIR

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: May. 30, 2022

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiazitang
Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: Qi Diagnostics Limited

Address.....: 10/F, 20 Bute Street, Mongkok, Kowloon, Hong Kong

Test specification.....:

Standard.....: FCC Part 15.247

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: KetoAir Breathalyzer

Trade Mark.....: /

Manufacturer.....: Qi Diagnostics Limited

Model/Type reference.....: KETOAIR-1

Listed Models	KETOAIR-1A,KETOAIR-1B,KETOAIR-1C,KETOAIR-1D,KETOAIR-1E,KETOAIR-1F,KETOAIR-1G,KETOAIR-1H,KETOAIR-1I, KETOAIR-1J,KETOAIR-1K,KETOAIR-1L,KETOAIR-1M,KETOAIR-1N,KETOAIR-1O,KETOAIR-1P,KETOAIR-1Q,KETOAIR-1R, KETOAIR-1S,KETOAIR-1T,KETOAIR-1U,KETOAIR-1V,KETOAIR-1W,KETOAIR-1X,KETOAIR-1Y,KETOAIR-1Z,KETOAIR-1.2A, KETOAIR-1.2B,KETOAIR-1.2C,KETOAIR-1.2D,KETOAIR-1.2E, KETOAIR-1.2F,KETOAIR-1.2G,KETOAIR-1.2H,KETOAIR-1.2I, KETOAIR-1.2J,KETOAIR-1.2K,KETOAIR-1.2L,KETOAIR-1.2M, KETOAIR-1.2N,KETOAIR-1.2O,KETOAIR-1.2P,KETOAIR-1.2Q, KETOAIR-1.2R,KETOAIR-1.2S,KETOAIR-1.2T,KETOAIR-1.2U, KETOAIR-1.2V,KETOAIR-1.2W,KETOAIR-1.2X,KETOAIR-1.2Y, KETOAIR-1.2Z,KETOAIR-1.3A,KETOAIR-1.3B,KETOAIR-1.3C, KETOAIR-1.3D,KETOAIR-1.3E,KETOAIR-1.4A,KETOAIR-1.4B, KETOAIR-1.4C,KETOAIR-1.4D,KETOAIR-1.4E,KETOAIR-1.5A, KETOAIR-1.5B,KETOAIR-1.5C,KETOAIR-1.5D,KETOAIR-1.5E, KETOAIR-1001A,KETOAIR-1001B,KETOAIR-1001C,KETOAIR-1001D,KETOAIR-1001E,KETOAIR-1001F,KETOAIR-1001G, KETOAIR-1001H,KETOAIR-1001I,KETOAIR-1001J,KETOAIR-1002A,KETOAIR-1002B,KETOAIR-1002C,KETOAIR-1002D, KETOAIR-1002E,KETOAIR-1002F,KETOAIR-1002G,KETOAIR-1002H, KETOAIR-1002I, KETOAIR-1002J
Firmware Version.....	V2.3
Hardware Version.....	V2.3
Modulation	GFSK
Frequency.....	From 2402MHz to 2480MHz
Ratings.....	5.0V $\overline{\text{---}}$,1.0A(charged by DC 5V Power Adapter) or 3.7V $\overline{\text{---}}$,210mAh (By Li-ion rechargeable battery)
Result.....	PASS

TEST REPORT

Equipment under Test : KetoAir Breathalyzer

Model /Type : KETOAIR-1

Listed Models : KETOAIR-1A,KETOAIR-1B,KETOAIR-1C,KETOAIR-1D,KETOAIR-1E,KETOAIR-1F,KETOAIR-1G,KETOAIR-1H,KETOAIR-1I,KETOAIR-1J,KETOAIR-1K,KETOAIR-1L,KETOAIR-1M,KETOAIR-1N,KETOAIR-1O,KETOAIR-1P,KETOAIR-1Q,KETOAIR-1R,KETOAIR-1S,KETOAIR-1T,KETOAIR-1U,KETOAIR-1V,KETOAIR-1W,KETOAIR-1X,KETOAIR-1Y,KETOAIR-1Z,KETOAIR-1.2A,KETOAIR-1.2B,KETOAIR-1.2C,KETOAIR-1.2D,KETOAIR-1.2E,KETOAIR-1.2F,KETOAIR-1.2G,KETOAIR-1.2H,KETOAIR-1.2I,KETOAIR-1.2J,KETOAIR-1.2K,KETOAIR-1.2L,KETOAIR-1.2M,KETOAIR-1.2N,KETOAIR-1.2O,KETOAIR-1.2P,KETOAIR-1.2Q,KETOAIR-1.2R,KETOAIR-1.2S,KETOAIR-1.2T,KETOAIR-1.2U,KETOAIR-1.2V,KETOAIR-1.2W,KETOAIR-1.2X,KETOAIR-1.2Y,KETOAIR-1.2Z,KETOAIR-1.3A,KETOAIR-1.3B,KETOAIR-1.3C,KETOAIR-1.3D,KETOAIR-1.3E,KETOAIR-1.4A,KETOAIR-1.4B,KETOAIR-1.4C,KETOAIR-1.4D,KETOAIR-1.4E,KETOAIR-1.5A,KETOAIR-1.5B,KETOAIR-1.5C,KETOAIR-1.5D,KETOAIR-1.5E,KETOAIR-1001A,KETOAIR-1001B,KETOAIR-1001C,KETOAIR-1001D,KETOAIR-1001E,KETOAIR-1001F,KETOAIR-1001G,KETOAIR-1001H,KETOAIR-1001I,KETOAIR-1001J,KETOAIR-1002A,KETOAIR-1002B,KETOAIR-1002C,KETOAIR-1002D,KETOAIR-1002E,KETOAIR-1002F,KETOAIR-1002G,KETOAIR-1002H,KETOAIR-1002I,KETOAIR-1002J

Applicant : Qi Diagnostics Limited

Address : 10/F, 20 Bute Street, Mongkok, Kowloon, Hong Kong

Manufacturer : Qi Diagnostics Limited

Address : 10/F, 20 Bute Street, Mongkok, Kowloon, Hong Kong

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	5
2 SUMMARY	6
2.1 General Remarks	6
2.2 Product Description	6
2.3 Equipment Under Test	7
2.4 Short description of the Equipment under Test (EUT)	7
2.5 EUT operation mode	7
2.6 Block Diagram of Test Setup	7
2.7 Related Submittal(s) / Grant (s)	7
2.8 Modifications	7
3 TEST ENVIRONMENT	8
3.1 Address of the test laboratory	8
3.2 Test Facility	8
3.3 Environmental conditions	8
3.4 Summary of measurement results	9
3.5 Statement of the measurement uncertainty	9
3.6 Equipments Used during the Test	10
4 TEST CONDITIONS AND RESULTS	11
4.1 AC Power Conducted Emission	11
4.2 Radiated Emissions and Band Edge	14
4.3 Maximum Peak Output Power	20
4.4 Power Spectral Density	21
4.5 6dB Bandwidth	23
4.6 Out-of-band Emissions	25
4.7 Antenna Requirement	29
5 TEST SETUP PHOTOS OF THE EUT	30
6 PHOTOS OF THE EUT	31

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	May. 20, 2022
Testing commenced on	:	May. 20, 2022
Testing concluded on	:	May. 30, 2022

2.2 Product Description

Product Description:	KetoAir Breathalyzer
Model/Type reference:	KETOAIR-1
Listed Models:	KETOAIR-1A,KETOAIR-1B,KETOAIR-1C,KETOAIR-1D,KETOAIR-1E,KETOAIR-1F,KETOAIR-1G,KETOAIR-1H,KETOAIR-1I, KETOAIR-1J,KETOAIR-1K, KETOAIR-1L,KETOAIR-1M,KETOAIR-1N,KETOAIR-1O,KETOAIR-1P,KETOAIR-1Q,KETOAIR-1R, KETOAIR-1S,KETOAIR-1T,KETOAIR-1U,KETOAIR-1V, KETOAIR-1W,KETOAIR-1X,KETOAIR-1Y,KETOAIR-1Z,KETOAIR-1.2A, KETOAIR-1.2B,KETOAIR-1.2C,KETOAIR-1.2D,KETOAIR-1.2E, KETOAIR-1.2F, KETOAIR-1.2G,KETOAIR-1.2H,KETOAIR-1.2I, KETOAIR-1.2J,KETOAIR-1.2K,KETOAIR-1.2L,KETOAIR-1.2M, KETOAIR-1.2N,KETOAIR-1.2O,KETOAIR-1.2P,KETOAIR-1.2Q, KETOAIR-1.2R,KETOAIR-1.2S,KETOAIR-1.2T,KETOAIR-1.2U, KETOAIR-1.2V,KETOAIR-1.2W,KETOAIR-1.2X,KETOAIR-1.2Y, KETOAIR-1.2Z,KETOAIR-1.3A,KETOAIR-1.3B,KETOAIR-1.3C, KETOAIR-1.3D,KETOAIR-1.3E,KETOAIR-1.4A,KETOAIR-1.4B, KETOAIR-1.4C,KETOAIR-1.4D,KETOAIR-1.4E,KETOAIR-1.5A, KETOAIR-1.5B,KETOAIR-1.5C,KETOAIR-1.5D,KETOAIR-1.5E, KETOAIR-1001A,KETOAIR-1001B,KETOAIR-1001C, KETOAIR-1001D, KETOAIR-1001E,KETOAIR-1001F,KETOAIR-1001G, KETOAIR-1001H, KETOAIR-1001I,KETOAIR-1001J,KETOAIR-1002A,KETOAIR-1002B,KETOAIR-1002C,KETOAIR-1002D, KETOAIR-1002E,KETOAIR-1002F,KETOAIR-1002G, KETOAIR-1002H, KETOAIR-1002I, KETOAIR-1002J. (The products are identical in interior structure, electrical circuits and components, just model names and color are different.)
Power supply:	5.0V $\pm$ 0.1V,1.0A(charged by DC 5V Power Adapter) or 3.7V $\pm$ 0.1V,210mAh (By Li-ion rechargeable battery)
Adapter information (Auxiliary test supplied by test Lab):	Model:YC-01 Input:AC100-240V 50/60Hz, 0.5A Output:DC 5V,3A
Testing sample ID:	GRCTR220502007-1# (Engineer sample), GRCTR220502007-2# (Normal sample)
Bluetooth BLE	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	Internal antenna
Antenna gain*(Supplied by the customer):	0.5 dBi
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.	

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 5.0V From external circuit

2.4 Short description of the Equipment under Test (EUT)

This is a KetoAir Breathalyzer.

For more details, refer to the user's manual of the EUT.


2.5 EUT operation mode

The Applicant provides communication tools software(RtlBluetoothMP) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 40 channels provided to the EUT and Channel 00/19/39 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

2.6 Block Diagram of Test Setup

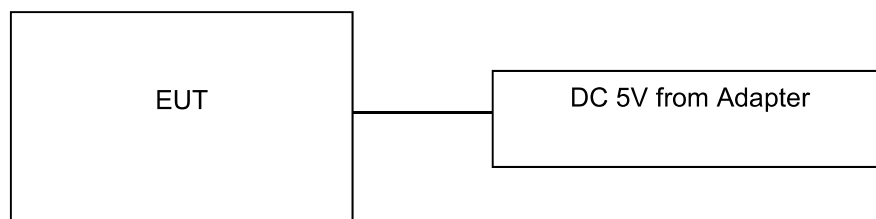

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(e)	Power spectral density	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(a)(2)	Spectrum bandwidth – 6 dB bandwidth	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(b)(3)	Maximum output Peak power	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(d)	Band edge compliance conducted	BLE 1Mbps	☒ Lowest ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Highest	complies
§15.205	Band edge compliance radiated	BLE 1Mbps	☒ Lowest ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Highest	complies
§15.247(d)	TX spurious emissions conducted	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(d)	TX spurious emissions radiated	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	BLE 1Mbps	☒ Lowest ☒ Middle ☒ Highest	complies
§15.209(a)	TX spurious Emissions radiated Below 1GHz	BLE 1Mbps	-/-	BLE 1Mbps	-/-	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	BLE 1Mbps	-/-	BLE 1Mbps	-/-	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2021/10/30	2022/10/29
LISN	R&S	ENV216	GRCTEE010	2021/10/30	2022/10/29
EMI Test Receiver	R&S	ESPI	GRCTEE017	2021/10/30	2022/10/29
EMI Test Receiver	R&S	ESCI	GRCTEE008	2021/10/30	2022/10/29
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2021/10/30	2022/10/29
Spectrum Analyzer	R&S	FSP	GRCTEE003	2021/10/20	2022/10/19
Vector Signal generator	Agilent	N5181A	GRCTEE007	2021/10/30	2022/10/29
Analog Signal Generator	R&S	SML03	GRCTEE006	2021/10/30	2022/10/29
Climate Chamber	QIYA	LCD-9530	GRCTES016	2021/10/30	2022/10/29
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2020/10/25	2023/10/24
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2020/10/25	2023/10/24
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2020/10/25	2023/10/24
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2021/1/18	2024/1/17
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2021/10/30	2022/10/29
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2021/10/30	2022/10/29
Amplifier	Taiwan chengyi	EMC184045SE	GRCTEE050	2021/10/30	2022/10/29
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2021/10/30	2022/10/29
Directional coupler	NARDA	4226-10	GRCTEE004	2021/10/30	2022/10/29
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2021/10/30	2022/10/29
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2021/10/30	2022/10/29
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2021/10/30	2022/10/29
Power Sensor	Agilent	U2021XA	GRCTEE070	2021/10/30	2022/10/29
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

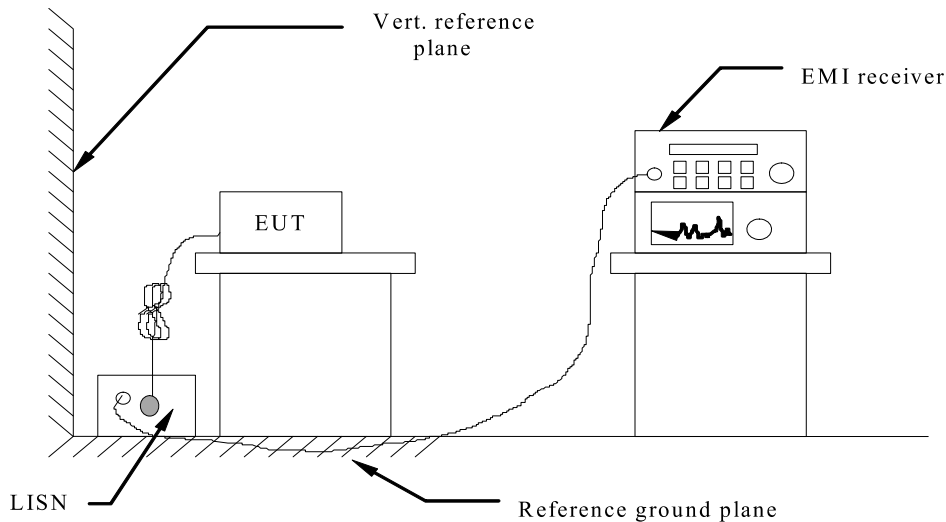

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:


1. BLE 1Mbps was tested at Low, Middle, and High channel; only the worst result of BLE 1Mbps High channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Power supply:

DC 5V from Adapter AC
120V/60Hz

Polarization

L

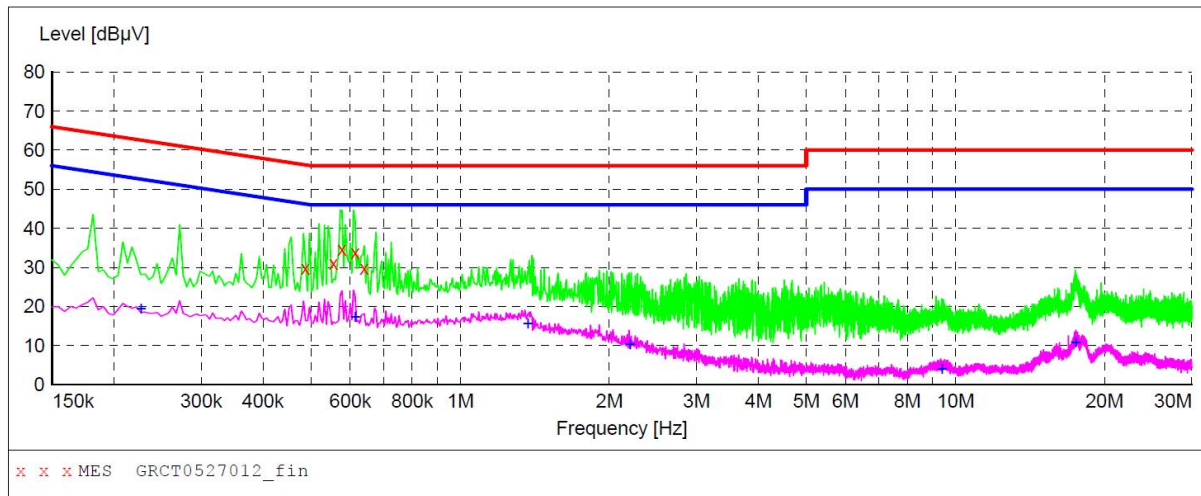**MEASUREMENT RESULT: "GRCT0527012_fin"**

5/27/2022 3:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.487500	29.90	9.7	56	26.3	QP	L1	GND
0.555000	31.10	9.7	56	24.9	QP	L1	GND
0.577500	34.70	9.7	56	21.3	QP	L1	GND
0.613500	33.90	9.7	56	22.1	QP	L1	GND
0.640500	29.80	9.7	56	26.2	QP	L1	GND

MEASUREMENT RESULT: "GRCT0527012_fin2"

5/27/2022 3:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.226500	19.40	9.7	53	33.2	AV	L1	GND
0.613500	17.30	9.7	46	28.7	AV	L1	GND
1.369500	15.70	9.9	46	30.3	AV	L1	GND
2.202000	10.40	9.9	46	35.6	AV	L1	GND
9.388500	4.00	10.1	50	46.0	AV	L1	GND
17.488500	10.80	10.2	50	39.2	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 5V from Adapter AC
120V/60Hz

Polarization

N

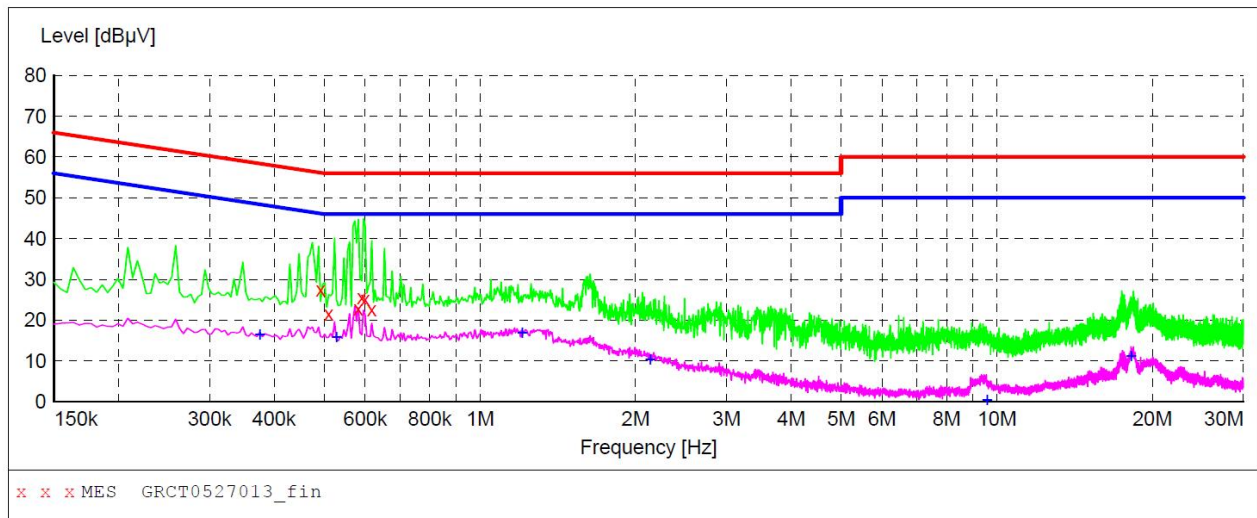**MEASUREMENT RESULT: "GRCT0527013_fin"**

5/27/2022 3:44PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	27.40	9.7	56	28.7	QP	N	GND
0.510000	21.60	9.7	56	34.4	QP	N	GND
0.582000	22.80	9.7	56	33.2	QP	N	GND
0.591000	25.70	9.7	56	30.3	QP	N	GND
0.600000	25.20	9.7	56	30.8	QP	N	GND
0.618000	22.70	9.7	56	33.3	QP	N	GND

MEASUREMENT RESULT: "GRCT0527013_fin2"

5/27/2022 3:44PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.375000	16.50	9.7	48	31.9	AV	N	GND
0.528000	15.80	9.7	46	30.2	AV	N	GND
1.207500	17.00	9.9	46	29.0	AV	N	GND
2.134500	10.30	9.9	46	35.7	AV	N	GND
9.573000	0.50	10.1	50	49.5	AV	N	GND
18.199500	11.20	10.2	50	38.8	AV	N	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)


2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)


4.2 Radiated Emissions and Band Edge

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

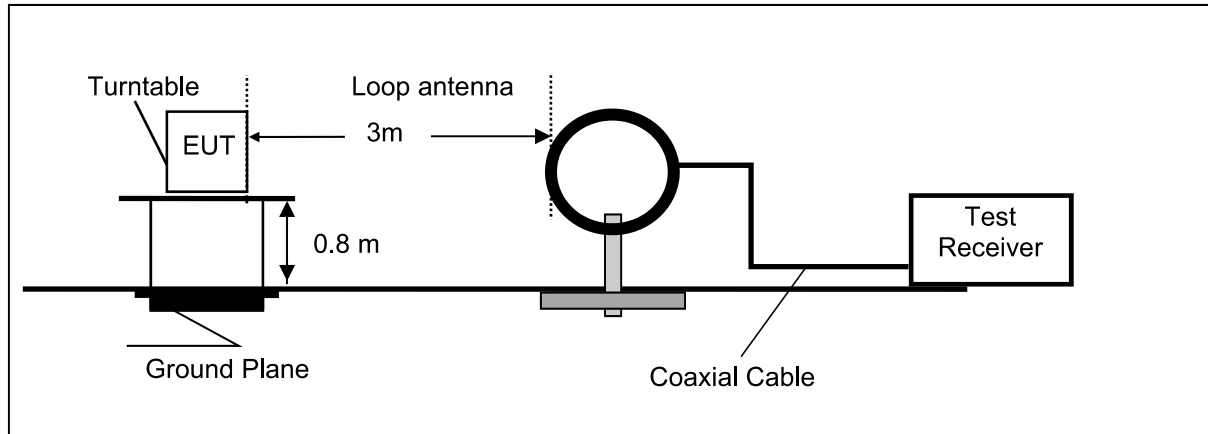

Frequency range 30MHz – 1000MHz

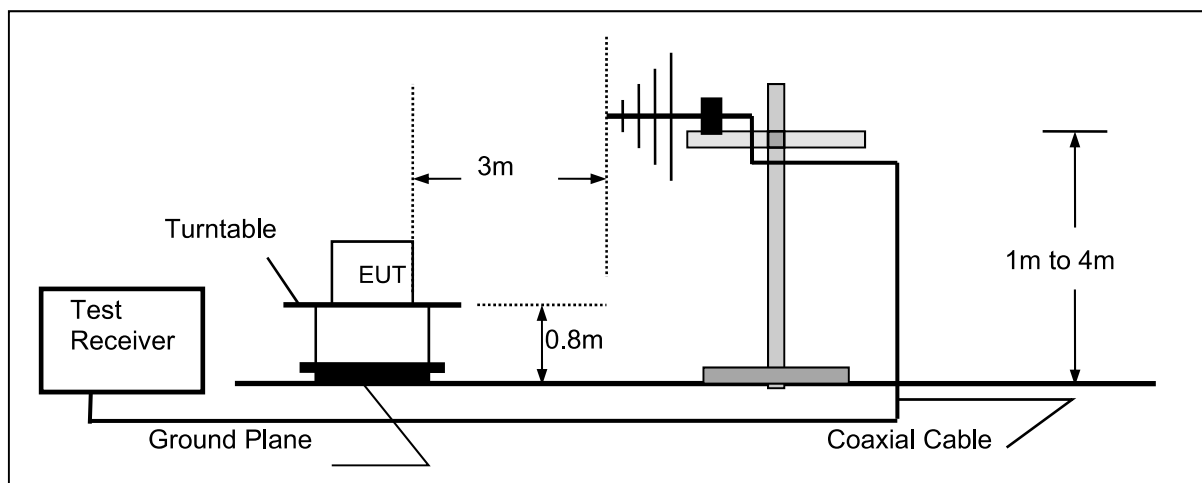

Frequency range above 1GHz-25GHz

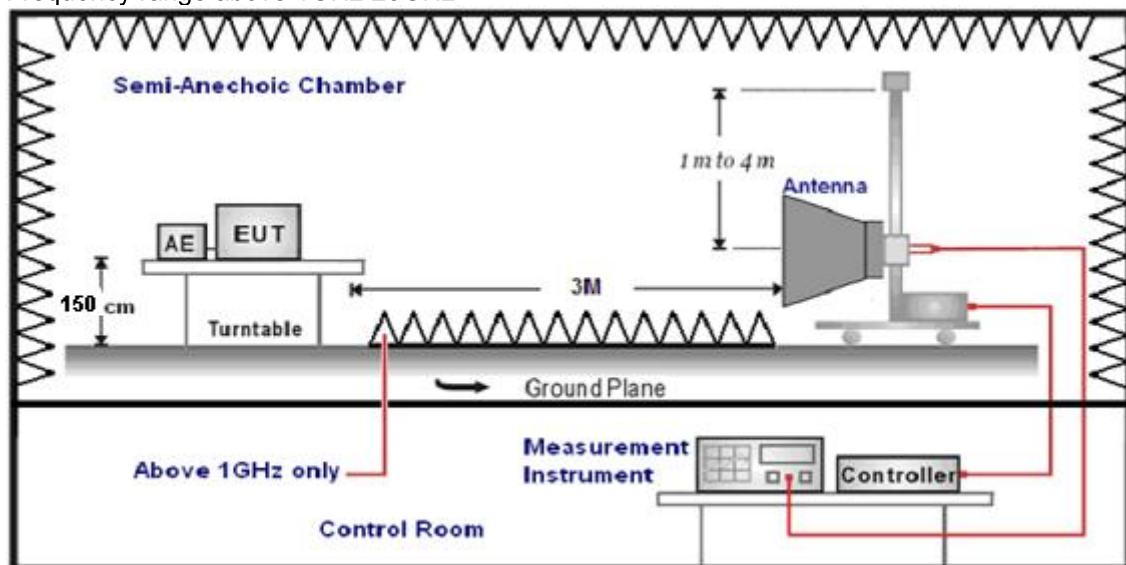

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz, the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.


The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. BLE 1Mbps were tested at Low, Middle, and High channel and recorded worst mode at BLE 1Mbps.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

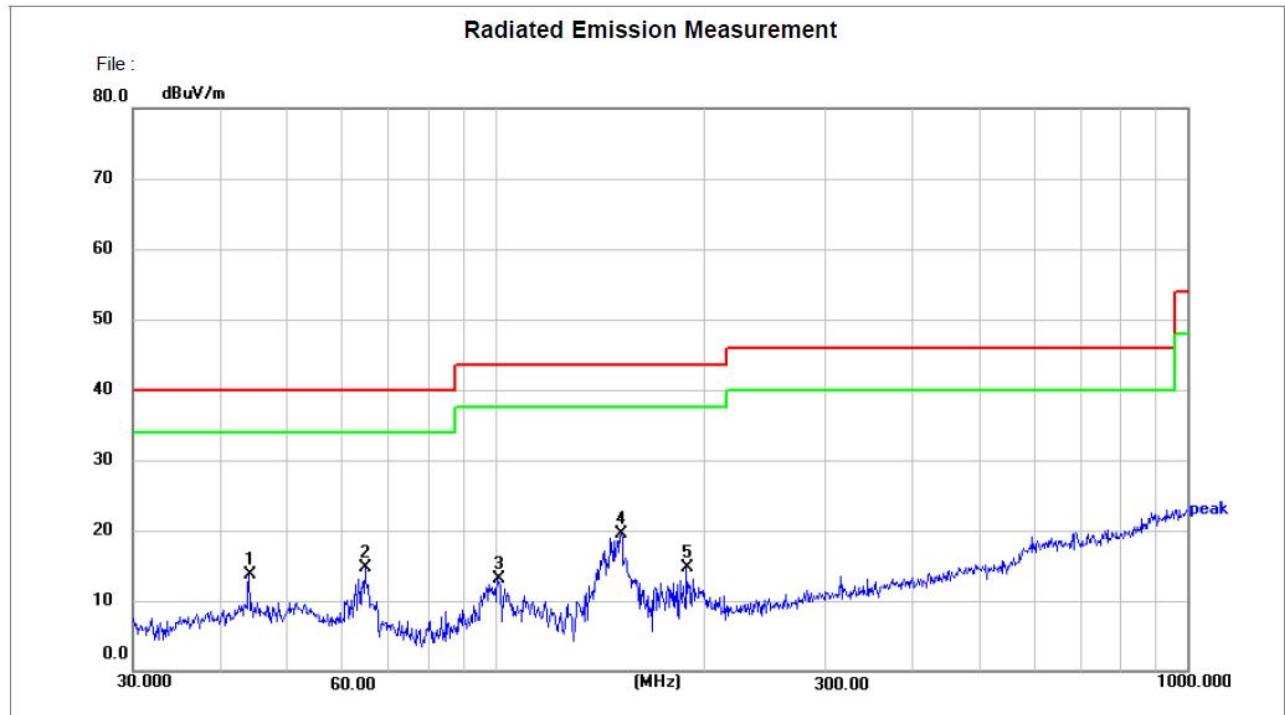For 30MHz-1GHz**Horizontal**

Site LAB

Polarization: *Horizontal*

Temperature: 24.5(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 52 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.1202	31.59	-17.95	13.64	40.00	-26.36	peak	200	307	P	
2	64.8865	35.02	-20.29	14.73	40.00	-25.27	peak	200	357	P	
3	100.9339	32.10	-18.97	13.13	43.50	-30.37	peak	200	8	P	
4 *	152.1297	41.12	-21.69	19.43	43.50	-24.07	peak	200	66	P	
5	189.0743	34.41	-19.79	14.62	43.50	-28.88	peak	200	112	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

Vertical

Radiated Emission Measurement



Site LAB

Limit: FCC Part15 RE-Class B_30-1000MHz

EUT:

M/N:

Mode:

Note:

Polarization: *Vertical*

Power: AC120V/60Hz

Distance: 3m

Temperature: 24.5(C)

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	37.4165	43.74	-19.07	24.67	40.00	-15.33	peak	100	26	P	
2	54.6429	35.64	-18.08	17.56	40.00	-22.44	peak	100	351	P	
3	64.6594	44.56	-20.24	24.32	40.00	-15.68	peak	100	266	P	
4	94.4284	38.10	-19.94	18.16	43.50	-25.34	peak	100	19	P	
5	157.5588	43.67	-21.80	21.87	43.50	-21.63	peak	100	130	P	
6	199.9856	36.09	-18.97	17.12	43.50	-26.38	peak	100	58	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)