

# FCC TEST REPORT

## FCC ID:2A68U-ECL01

Report Number.....: ZKT-221226L9674-01

Date of Test.....: Dec. 14, 2022 -- Dec. 29, 2022

Date of issue.....: Dec. 29, 2022

Total number of pages.....: 82

Test Result .....: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address .....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name .....: Evvr ApS

Address .....: Fredericiagade 15B, st. th, 1310 Copenhagen K

Manufacturer's name .....: Evvr ApS

Address .....: Fredericiagade 15B, st. th, 1310 Copenhagen K

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure.....: ANSI C63.10:2013  
KDB558074 D0115.247 Meas Guidance v 05r02

Non-standard test method .....: N/A

**Test Report Form No**.....: TRF-EL-112\_V0

**Test Report Form(s) Originator**.....: ZKT Testing

**Master TRF** .....: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Evvr Center Lite

Trademark .....: Evvr

Model/Type reference.....: ECL-NAZWZBBTG1,ECL-EUZWZBBTG1, ECL-OAZWZBBTG1


Ratings.....: DC 5V/2A from adapter

Testing procedure and testing location:


Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial  
Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature).....: Lake Xie



## Table of Contents

|                                                     | Page      |
|-----------------------------------------------------|-----------|
| <b>1. VERSION</b>                                   | <b>5</b>  |
| <b>2. TEST SUMMARY</b>                              | <b>6</b>  |
| 2.1 TEST FACILITY                                   | 6         |
| 2.2 MEASUREMENT UNCERTAINTY                         | 7         |
| <b>3. GENERAL INFORMATION</b>                       | <b>8</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT                      | 8         |
| 3.2 Test Setup Configuration                        | 9         |
| 3.3 Support Equipment                               | 9         |
| 3.4 Test Mode                                       | 10        |
| 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS              | 11        |
| <b>4. EMC EMISSION TEST</b>                         | <b>12</b> |
| 4.1 Conducted emissions                             | 12        |
| 4.1.1 POWER LINE CONDUCTED EMISSION Limits          | 12        |
| 4.1.2 TEST PROCEDURE                                | 12        |
| 4.1.3 DEVIATION FROM TEST STANDARD                  | 12        |
| 4.1.4 TEST SETUP                                    | 13        |
| 4.1.5 EUT OPERATING CONDITIONS                      | 13        |
| 4.1.6 Test Result                                   | 14        |
| 4.2 Radiated emissions                              | 16        |
| 4.2.1 Radiated Emission Limits                      | 16        |
| 4.2.2 TEST PROCEDURE                                | 16        |
| 4.2.3 DEVIATION FROM TEST STANDARD                  | 17        |
| 4.2.4 TEST SETUP                                    | 17        |
| 4.2.5 EUT OPERATING CONDITIONS                      | 18        |
| 4.2.6 TEST RESULTS                                  | 19        |
| <b>5. RADIATED BAND EMISSION MEASUREMENT</b>        | <b>25</b> |
| 5.1 Test Requirement:                               | 25        |
| 5.2 TEST PROCEDURE                                  | 25        |
| 5.3 DEVIATION FROM TEST STANDARD                    | 26        |
| 5.4 TEST SETUP                                      | 26        |
| 5.5 EUT OPERATING CONDITIONS                        | 26        |
| 5.6 TEST RESULT                                     | 27        |
| <b>6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b> | <b>29</b> |
| 6.1 Limit                                           | 29        |
| 6.2 Test Setup                                      | 29        |
| 6.3 Test procedure                                  | 29        |
| 6.4 DEVIATION FROM STANDARD                         | 29        |
| 6.5 Test Result                                     | 29        |
| 7.1 Test Setup                                      | 30        |
| 7.2 Limit                                           | 30        |
| 7.3 Test procedure                                  | 30        |
| 7.4 DEVIATION FROM STANDARD                         | 30        |

|                                                      |           |
|------------------------------------------------------|-----------|
| 7.5 Test Result .....                                | 30        |
| <b>8. MAXIMUM PEAK OUTPUT POWER .....</b>            | <b>31</b> |
| 8.1 Block Diagram Of Test Setup .....                | 31        |
| 8.2 Limit .....                                      | 31        |
| 8.3 Test procedure .....                             | 31        |
| 8.4 DEVIATION FROM STANDARD .....                    | 31        |
| 8.5 Test Result .....                                | 31        |
| <b>9. HOPPING CHANNEL SEPARATION .....</b>           | <b>32</b> |
| 9.1 Test Setup .....                                 | 32        |
| 9.2 Test procedure .....                             | 32        |
| 9.3 DEVIATION FROM STANDARD .....                    | 32        |
| 9.4 Test Result .....                                | 32        |
| <b>10.NUMBER OF HOPPING FREQUENCY .....</b>          | <b>33</b> |
| 10.1 Test Setup .....                                | 33        |
| 10.2 Test procedure .....                            | 33        |
| 10.3 DEVIATION FROM STANDARD .....                   | 33        |
| 10.4 Test Result .....                               | 33        |
| <b>11. DWELL TIME .....</b>                          | <b>34</b> |
| 11.1 Test Setup .....                                | 34        |
| 11.2 Test procedure .....                            | 34        |
| 11.3 DEVIATION FROM STANDARD .....                   | 34        |
| 11.4 Test Result .....                               | 34        |
| <b>12. ANTENNA REQUIREMENT .....</b>                 | <b>35</b> |
| <b>13.Appendix1 .....</b>                            | <b>36</b> |
| 13.1 -20DB BANDWIDTH .....                           | 36        |
| 13.2. 99% OCCUPIED BANDWIDTH .....                   | 41        |
| 13.3. PEAK OUTPUT POWER .....                        | 46        |
| 13.4. SPURIOUS EMISSIONS .....                       | 51        |
| 13.5. BANDEDGE .....                                 | 60        |
| 13.6. CARRIER FREQUENCIES SEPARATION (HOPPING) ..... | 73        |
| 13.7. NUMBER OF HOPPING CHANNEL (HOPPING) .....      | 75        |
| 13.8 DWELL TIME (HOPPING) .....                      | 77        |
| <b>14. TEST SETUP PHOTO .....</b>                    | <b>82</b> |
| <b>15. EUT CONSTRUCTIONAL DETAILS .....</b>          | <b>82</b> |

**1. VERSION**

| Report No.         | Version | Description             | Approved      |
|--------------------|---------|-------------------------|---------------|
| ZKT-221226L9674-01 | Rev.01  | Initial issue of report | Dec. 29, 2022 |
|                    |         |                         |               |
|                    |         |                         |               |

## 2. TEST SUMMARY

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                                  |        |        |
|---------------------------------|----------------------------------|--------|--------|
| Standard Section                | Test Item                        | Result | Remark |
| 15.203/15.247 (c)               | Antenna Requirement              | PASS   |        |
| 15.207                          | AC Power Line Conducted Emission | PASS   |        |
| 15.247 (b)(1)                   | Conducted Peak Output Power      | PASS   |        |
| 15.247 (a)(1)                   | 20dB Occupied Bandwidth          | PASS   |        |
| 15.247 (a)(1)                   | Carrier Frequencies Separation   | PASS   |        |
| 15.247 (a)(1)(iii)              | Hopping Channel Number           | PASS   |        |
| 15.247 (a)(1)(iii)              | Dwell Time                       | PASS   |        |
| 15.205/15.209                   | Radiated Emission                | PASS   |        |
| 15.247(d)                       | Band Edge                        | PASS   |        |

### NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.  
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,  
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225  
Designation Number: CN1299  
IC Registered No.: 27033

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                         | Uncertainty               |
|-----|------------------------------|---------------------------|
| 1   | Conducted Emission Test      | $\pm 1.38\text{dB}$       |
| 2   | RF power conducted           | $\pm 0.16\text{dB}$       |
| 3   | Spurious emissions conducted | $\pm 0.21\text{dB}$       |
| 4   | All emissions radiated(<1G)  | $\pm 4.68\text{dB}$       |
| 5   | All emissions radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Temperature                  | $\pm 0.5^{\circ}\text{C}$ |
| 7   | Humidity                     | $\pm 2\%$                 |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                        |                                                                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:          | Evvr Center Lite                                                                                                                                             |
| Model No.:             | ECL-NAZWZBBTG1                                                                                                                                               |
| Serial No.:            | ECL-EUZWZBBTG1, ECL-OAZWZBBTG1                                                                                                                               |
| Model difference:      | The product has many models, only the model name is different, and the other parts such as the circuit principle, pcb and electrical structure are the same. |
| Hardware Version:      | V1.0                                                                                                                                                         |
| Software Version:      | V1.0                                                                                                                                                         |
| Sample(s) Status:      | Engineer sample                                                                                                                                              |
| Channel numbers:       | 79                                                                                                                                                           |
| Channel separation:    | 2402MHz~2480MHz                                                                                                                                              |
| Modulation technology: | GFSK, $\pi/4$ DQPSK, 8DPSK                                                                                                                                   |
| Antenna Type:          | Internal antenna                                                                                                                                             |
| Antenna gain:          | 4.26dBi                                                                                                                                                      |
| Power supply:          | DC 5V/2A from adapter                                                                                                                                        |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 21      | 2422MHz   | 41      | 2442MHz   | 61      | 2462MHz   |
| 2                                   | 2403MHz   | 22      | 2423MHz   | 42      | 2443MHz   | 62      | 2463MHz   |
| 3                                   | 2404MHz   | 23      | 2424MHz   | 43      | 2444MHz   | 63      | 2464MHz   |
| 4                                   | 2405MHz   | 24      | 2425MHz   | 44      | 2445MHz   | 64      | 2465MHz   |
| 5                                   | 2406MHz   | 25      | 2426MHz   | 45      | 2446MHz   | 65      | 2466MHz   |
| 6                                   | 2407MHz   | 26      | 2427MHz   | 46      | 2447MHz   | 66      | 2467MHz   |
| 7                                   | 2408MHz   | 27      | 2428MHz   | 47      | 2448MHz   | 67      | 2468MHz   |
| 8                                   | 2409MHz   | 28      | 2429MHz   | 48      | 2449MHz   | 68      | 2469MHz   |
| 9                                   | 2410MHz   | 29      | 2430MHz   | 49      | 2450MHz   | 69      | 2470MHz   |
| 10                                  | 2411MHz   | 30      | 2431MHz   | 50      | 2451MHz   | 70      | 2471MHz   |
| 11                                  | 2412MHz   | 31      | 2432MHz   | 51      | 2452MHz   | 71      | 2472MHz   |
| 12                                  | 2413MHz   | 32      | 2433MHz   | 52      | 2453MHz   | 72      | 2473MHz   |
| 13                                  | 2414MHz   | 33      | 2434MHz   | 53      | 2454MHz   | 73      | 2474MHz   |
| 14                                  | 2415MHz   | 34      | 2435MHz   | 54      | 2455MHz   | 74      | 2475MHz   |
| 15                                  | 2416MHz   | 35      | 2436MHz   | 55      | 2456MHz   | 75      | 2476MHz   |
| 16                                  | 2417MHz   | 36      | 2437MHz   | 56      | 2457MHz   | 76      | 2477MHz   |
| 17                                  | 2418MHz   | 37      | 2438MHz   | 57      | 2458MHz   | 77      | 2478MHz   |
| 18                                  | 2419MHz   | 38      | 2439MHz   | 58      | 2459MHz   | 78      | 2479MHz   |
| 19                                  | 2420MHz   | 39      | 2440MHz   | 59      | 2460MHz   | 79      | 2480MHz   |
| 20                                  | 2421MHz   | 40      | 2441MHz   | 60      | 2461MHz   |         |           |


Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:


| Test channel        | Frequency |
|---------------------|-----------|
| The lowest channel  | 2402MHz   |
| The middle channel  | 2441MHz   |
| The Highest channel | 2480MHz   |

### 3.2 Test Setup Configuration

#### Conducted Emission



#### Radiated Emission



#### Conducted Spurious



### 3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment              | Mfr/Brand | Model/Type No.  | Series No. | Note |
|------|------------------------|-----------|-----------------|------------|------|
| 1    | Switching Power Supply | Evvr ApS  | XSD-0502000DEXU | /          | /    |
|      |                        |           |                 |            |      |
|      |                        |           |                 |            |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| 1    | /             | /            | /      | /    |
|      |               |              |        |      |
|      |               |              |        |      |

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

#### 3.4 Test Mode

|                                                                                                                                                                                                                                       |                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode. |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                 |

### 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation Test equipment

| Item | Equipment                        | Manufacturer   | Type No.        | Serial No.        | Last calibration | Calibrated until |
|------|----------------------------------|----------------|-----------------|-------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz) | KEYSIGHT       | 9020A           | MY55370835        | Oct. 18, 2022    | Oct. 17, 2023    |
| 2    | Spectrum Analyzer (1GHz-40GHz)   | R&S            | FSQ             | 100363            | Oct. 17, 2022    | Oct. 16, 2023    |
| 3    | EMI Test Receiver (9kHz-7GHz)    | R&S            | ESCI7           | 101169            | Oct. 18, 2022    | Oct. 17, 2023    |
| 4    | Bilog Antenna (30MHz-1500MHz)    | Schwarzbeck    | VULB9168        | N/A               | Oct. 17, 2022    | Oct. 16, 2023    |
| 5    | Horn Antenna (1GHz-18GHz)        | Agilent        | AH-118          | 071145            | Oct. 17, 2022    | Oct. 16, 2023    |
| 6    | Loop Antenna                     | TESEQ          | HLA6121         | 58357             | Oct. 17, 2022    | Oct. 16, 2023    |
| 7    | Amplifier (30-1000MHz)           | EM Electronics | EM330 Amplifier | 060747            | Oct. 17, 2022    | Oct. 16, 2023    |
| 8    | Amplifier (1GHz-26.5GHz)         | Agilent        | 8449B           | 3008A00315        | Oct. 18, 2022    | Oct. 17, 2023    |
| 9    | RF cables1 (9kHz-30MHz)          | N/A            | 9kHz-30MHz      | N/A               | Oct. 18, 2022    | Oct. 17, 2023    |
| 10   | RF cables2 (30MHz-1GHz)          | N/A            | 30MHz-1GHz      | N/A               | Oct. 18, 2022    | Oct. 17, 2023    |
| 11   | RF cables3 (1GHz-40GHz)          | N/A            | 1GHz-40GHz      | N/A               | Oct. 18, 2022    | Oct. 17, 2023    |
| 12   | ESG Signal Generator             | Agilent        | E4421B          | N/A               | Oct. 18, 2022    | Oct. 17, 2023    |
| 13   | Signal Generator                 | Agilent        | N5182A          | N/A               | Oct. 22, 2022    | Oct. 21, 2023    |
| 14   | Magnetic Field Probe Tester      | Narda          | ELT-400         | 0-0344            | Oct. 17, 2022    | Oct. 16, 2023    |
| 15   | MWRF Power Meter Test system     | MW             | MW100-RPC B     | N/A               | Oct. 22, 2022    | Oct. 21, 2023    |
| 16   | D.C. Power Supply                | LongWei        | TPR-6405D       | N/A               | \                | \                |
| 17   | EMC Software                     | Frad           | EZ-EMC          | Ver.EMC-CON 3A1.1 | \                | \                |
| 18   | RF Software                      | MW             | MTS8310         | V2.0.0.0          | \                | \                |
| 19   | Turntable                        | MF             | MF-7802BS       | N/A               | \                | \                |
| 20   | Antenna tower                    | MF             | MF-7802BS       | N/A               | \                | \                |

#### Conduction Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No.        | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|-------------------|------------------|------------------|
| 1    | LISN              | R&S          | ENV216   | 101471            | Oct. 22, 2022    | Oct. 21, 2023    |
| 2    | LISN              | CYBERTEK     | EM5040A  | E1850400149       | Oct. 22, 2022    | Oct. 21, 2023    |
| 3    | Test Cable        | N/A          | C01      | N/A               | Oct. 18, 2022    | Oct. 17, 2023    |
| 4    | Test Cable        | N/A          | C02      | N/A               | Oct. 18, 2022    | Oct. 17, 2023    |
| 5    | EMI Test Receiver | R&S          | ESCI3    | 101393            | Oct. 17, 2022    | Oct. 16, 2023    |
| 6    | EMC Software      | Frad         | EZ-EMC   | Ver.EMC-CON 3A1.1 | \                | \                |

#### 4. EMC EMISSION TEST

##### 4.1 Conducted emissions

|                       |                                      |
|-----------------------|--------------------------------------|
| Test Requirement:     | FCC Part15 C Section 15.207          |
| Test Method:          | ANSI C63.10:2013                     |
| Test Frequency Range: | 150KHz to 30MHz                      |
| Receiver setup:       | RBW=9KHz, VBW=30KHz, Sweep time=auto |

##### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

(1) \*Decreases with the logarithm of the frequency.


##### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

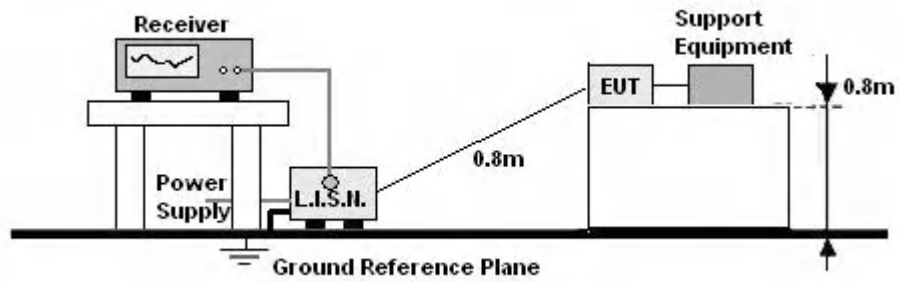


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 Test Result

|                |              |                    |                     |
|----------------|--------------|--------------------|---------------------|
| Temperature:   | 26°C         | Relative Humidity: | 54%                 |
| Pressure:      | 101kPa       | Phase :            | L                   |
| Test Voltage : | AC 120V/60Hz | Test Mode          | GFSK-lowest channel |

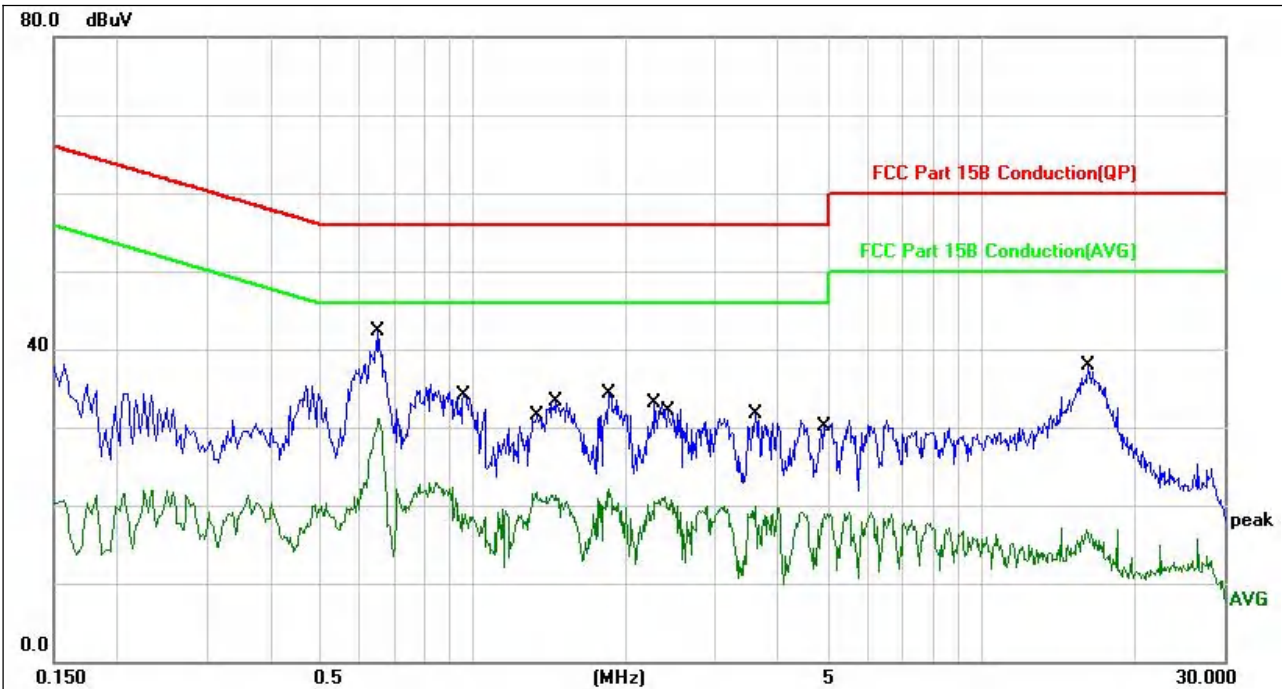


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.6540       | 32.19                    | 10.21                   | 42.40                    | 56.00         | -13.60     | QP       |         |
| 2   |     | 0.6540       | 20.95                    | 10.21                   | 31.16                    | 46.00         | -14.84     | AVG      |         |
| 3   |     | 0.9620       | 23.86                    | 10.17                   | 34.03                    | 56.00         | -21.97     | QP       |         |
| 4   |     | 1.3340       | 11.61                    | 10.13                   | 21.74                    | 46.00         | -24.26     | AVG      |         |
| 5   |     | 1.4580       | 23.17                    | 10.11                   | 33.28                    | 56.00         | -22.72     | QP       |         |
| 6   |     | 1.8540       | 24.14                    | 10.06                   | 34.20                    | 56.00         | -21.80     | QP       |         |
| 7   |     | 1.8540       | 12.12                    | 10.06                   | 22.18                    | 46.00         | -23.82     | AVG      |         |
| 8   |     | 2.2780       | 23.15                    | 10.02                   | 33.17                    | 56.00         | -22.83     | QP       |         |
| 9   |     | 2.3940       | 11.05                    | 10.02                   | 21.07                    | 46.00         | -24.93     | AVG      |         |
| 10  |     | 3.5940       | 10.00                    | 9.83                    | 19.83                    | 46.00         | -26.17     | AVG      |         |
| 11  |     | 4.9099       | 8.97                     | 9.96                    | 18.93                    | 46.00         | -27.07     | AVG      |         |
| 12  |     | 16.1659      | 27.95                    | 9.87                    | 37.82                    | 60.00         | -22.18     | QP       |         |

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

|                |              |                    |                     |
|----------------|--------------|--------------------|---------------------|
| Temperature:   | 26°C         | Relative Humidity: | 54%                 |
| Pressure:      | 101kPa       | Phase :            | N                   |
| Test Voltage : | AC 120V/60Hz | Test Mode          | GFSK-lowest channel |

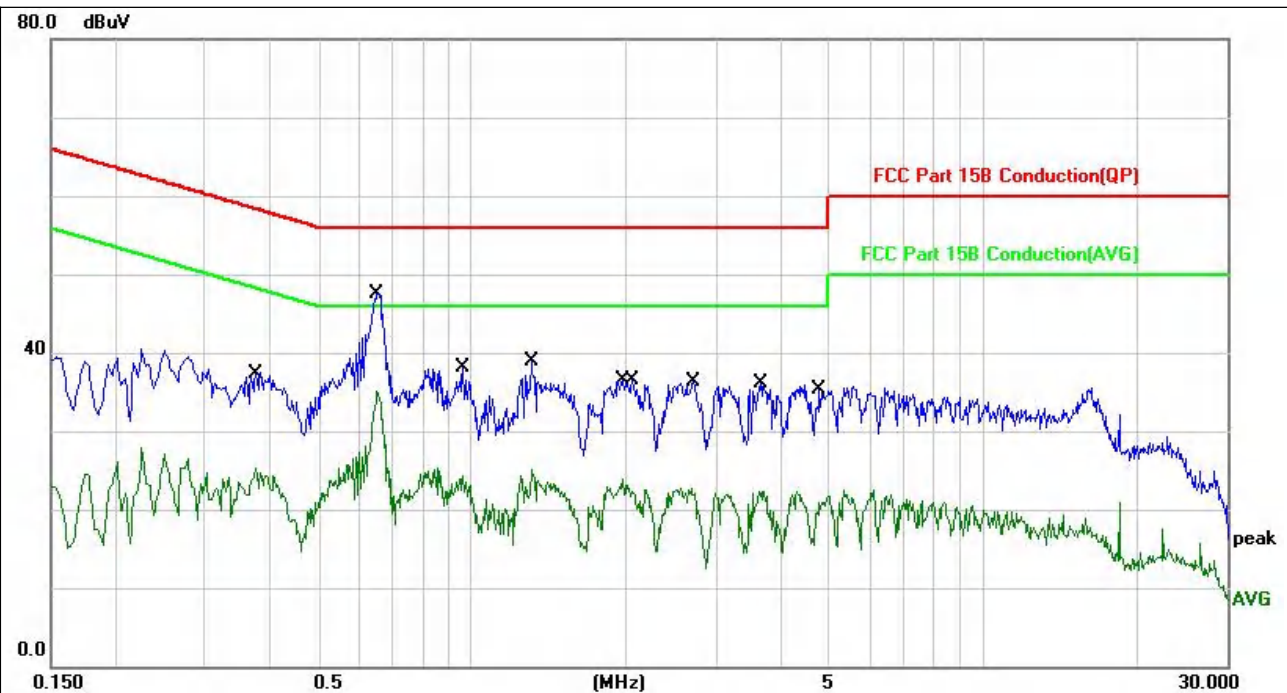

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.3780       | 15.09                    | 10.20                   | 25.29                    | 48.32         | -23.03     | AVG      |         |
| 2   | *   | 0.6540       | 37.37                    | 10.21                   | 47.58                    | 56.00         | -8.42      | QP       |         |
| 3   |     | 0.6540       | 24.82                    | 10.21                   | 35.03                    | 46.00         | -10.97     | AVG      |         |
| 4   |     | 0.9620       | 27.87                    | 10.17                   | 38.04                    | 56.00         | -17.96     | QP       |         |
| 5   |     | 1.3060       | 28.86                    | 10.13                   | 38.99                    | 56.00         | -17.01     | QP       |         |
| 6   |     | 1.3060       | 14.93                    | 10.13                   | 25.06                    | 46.00         | -20.94     | AVG      |         |
| 7   |     | 1.9700       | 13.79                    | 10.04                   | 23.83                    | 46.00         | -22.17     | AVG      |         |
| 8   |     | 2.0579       | 26.45                    | 10.04                   | 36.49                    | 46.00         | -9.51      | AVG      |         |
| 9   |     | 2.6860       | 12.76                    | 10.01                   | 22.77                    | 46.00         | -23.23     | AVG      |         |
| 10  |     | 3.6660       | 26.26                    | 9.83                    | 36.09                    | 56.00         | -19.91     | QP       |         |
| 11  |     | 3.7180       | 12.51                    | 9.82                    | 22.33                    | 46.00         | -23.67     | AVG      |         |
| 12  |     | 4.7819       | 25.36                    | 9.94                    | 35.30                    | 56.00         | -20.70     | QP       |         |

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

#### 4.2 Radiated emissions

|                       |                             |            |        |        |            |
|-----------------------|-----------------------------|------------|--------|--------|------------|
| Test Requirement:     | FCC Part15 C Section 15.209 |            |        |        |            |
| Test Method:          | ANSI C63.10:2013            |            |        |        |            |
| Test Frequency Range: | 9kHz to 25GHz               |            |        |        |            |
| Test site:            | Measurement Distance: 3m    |            |        |        |            |
| Receiver setup:       | Frequency                   | Detector   | RBW    | VBW    | Value      |
|                       | 9KHz-150KHz                 | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
|                       | 150KHz-30MHz                | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
|                       | 30MHz-1GHz                  | Quasi-peak | 120KHz | 300KHz | Quasi-peak |
|                       | Above 1GHz                  | Peak       | 1MHz   | 3MHz   | Peak       |
|                       |                             | Peak       | 1MHz   | 10Hz   | Average    |

##### 4.2.1 Radiated Emission Limits

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

##### LIMITS OF RADIATED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

##### 4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

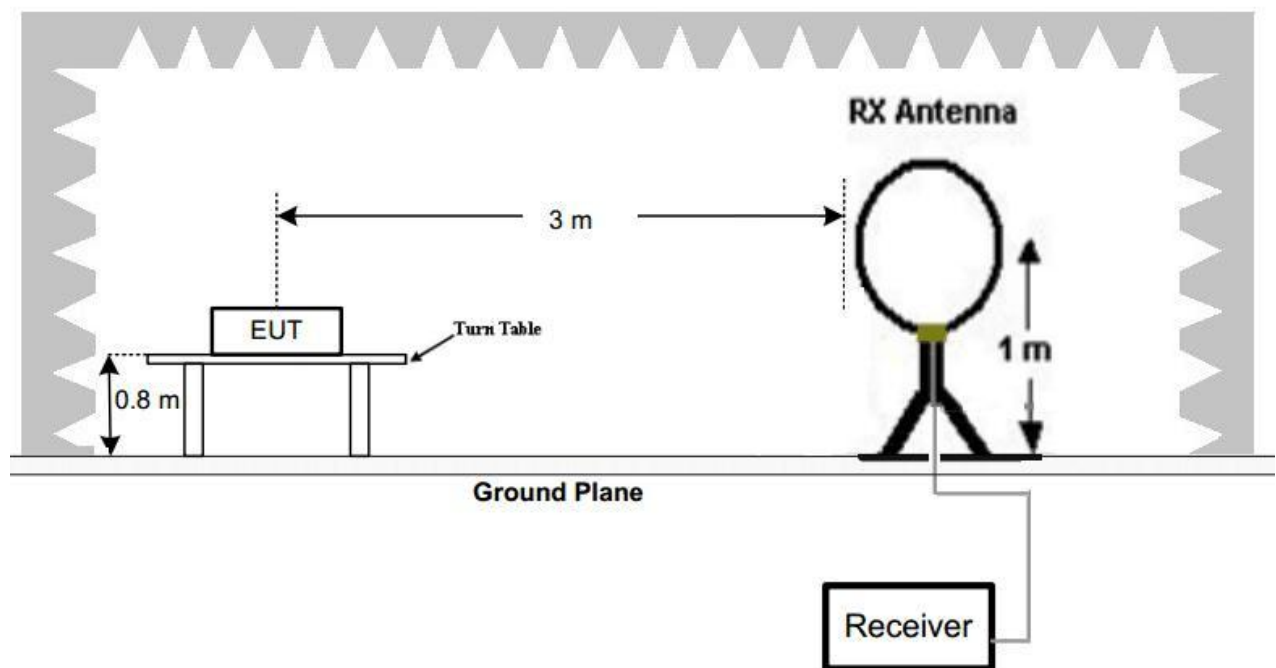

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

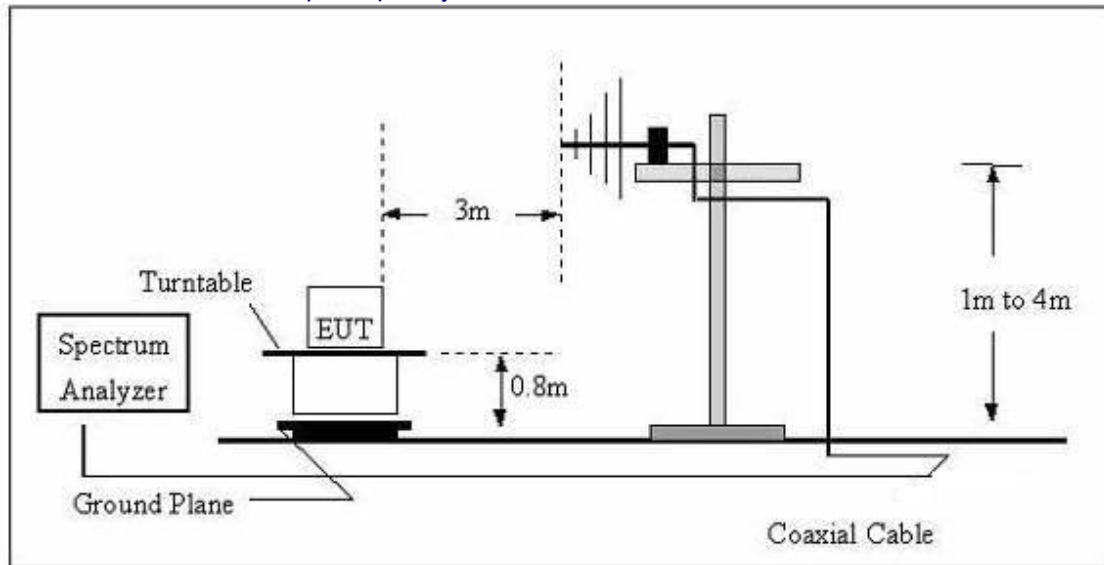

(C) Radiated Emission Test-Up Frequency Above 1GHz

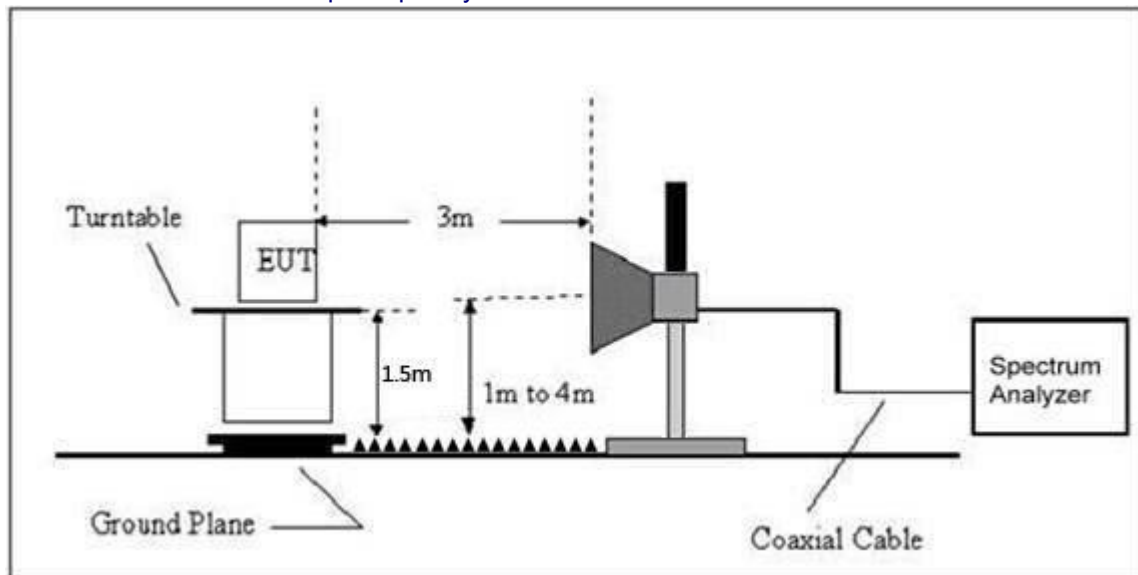

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


#### 4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                 |
| Pressure:     | 101kPa       | Polarization:      | Horizontal          |
| Test Voltage: | AC 120V/60Hz | Test Mode          | GFSK-lowest channel |

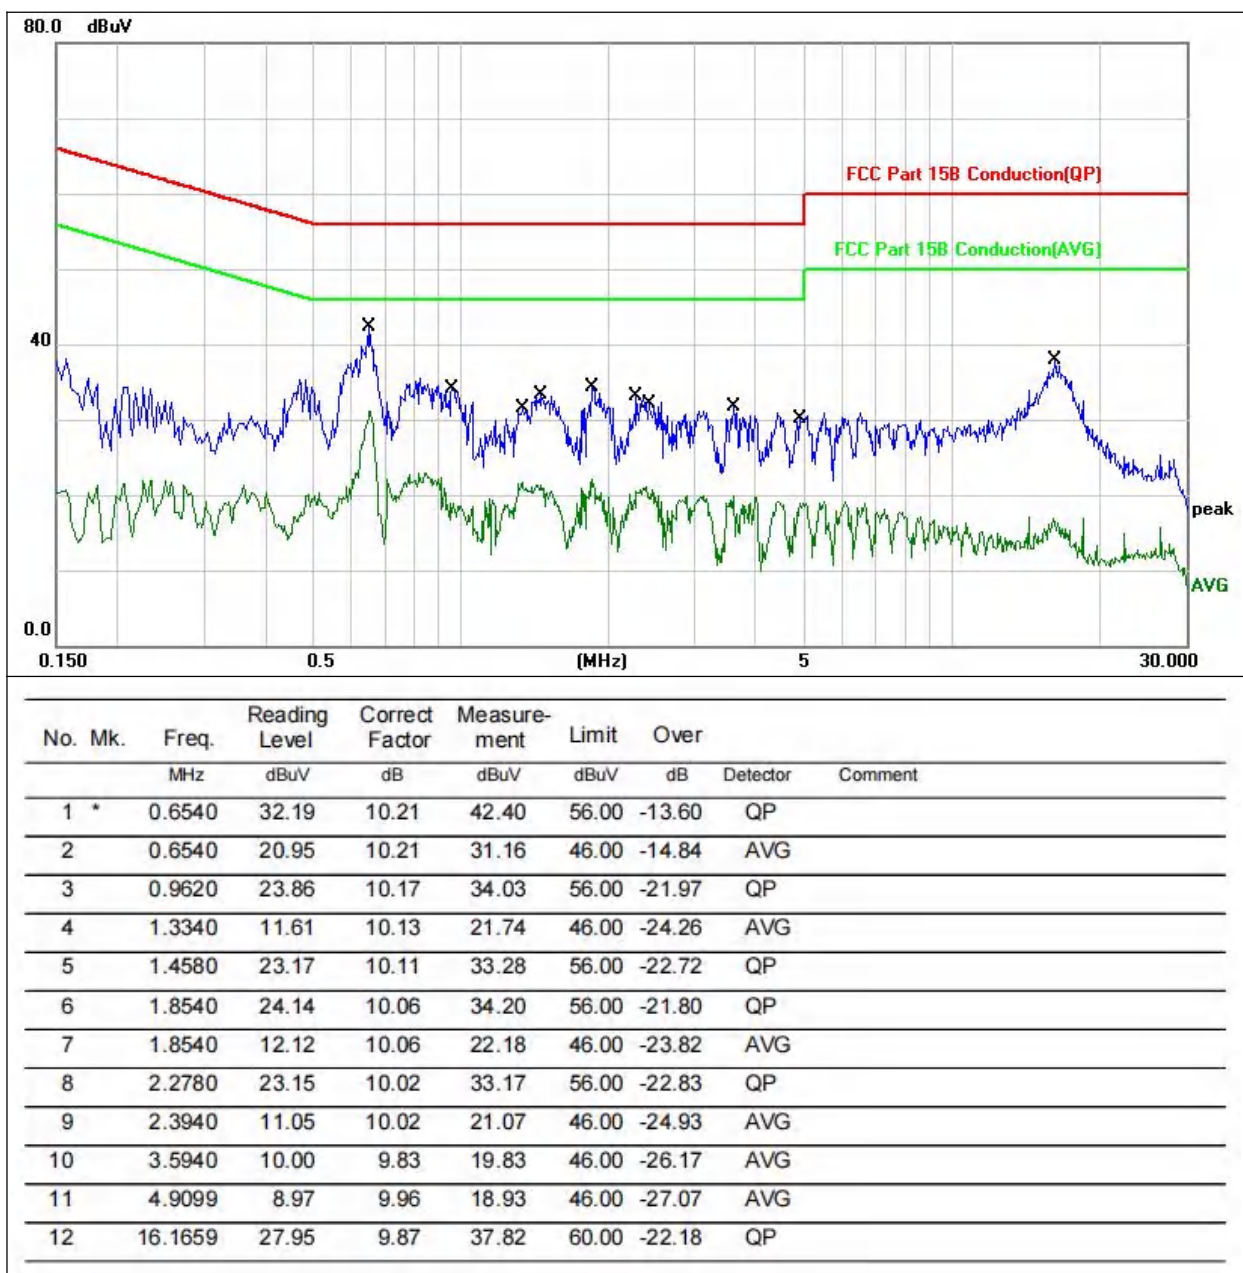

|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                 |
| Pressure:     | 101kPa       | Polarization:      | Vertical            |
| Test Voltage: | AC 120V/60Hz | Test Mode          | GFSK-lowest channel |

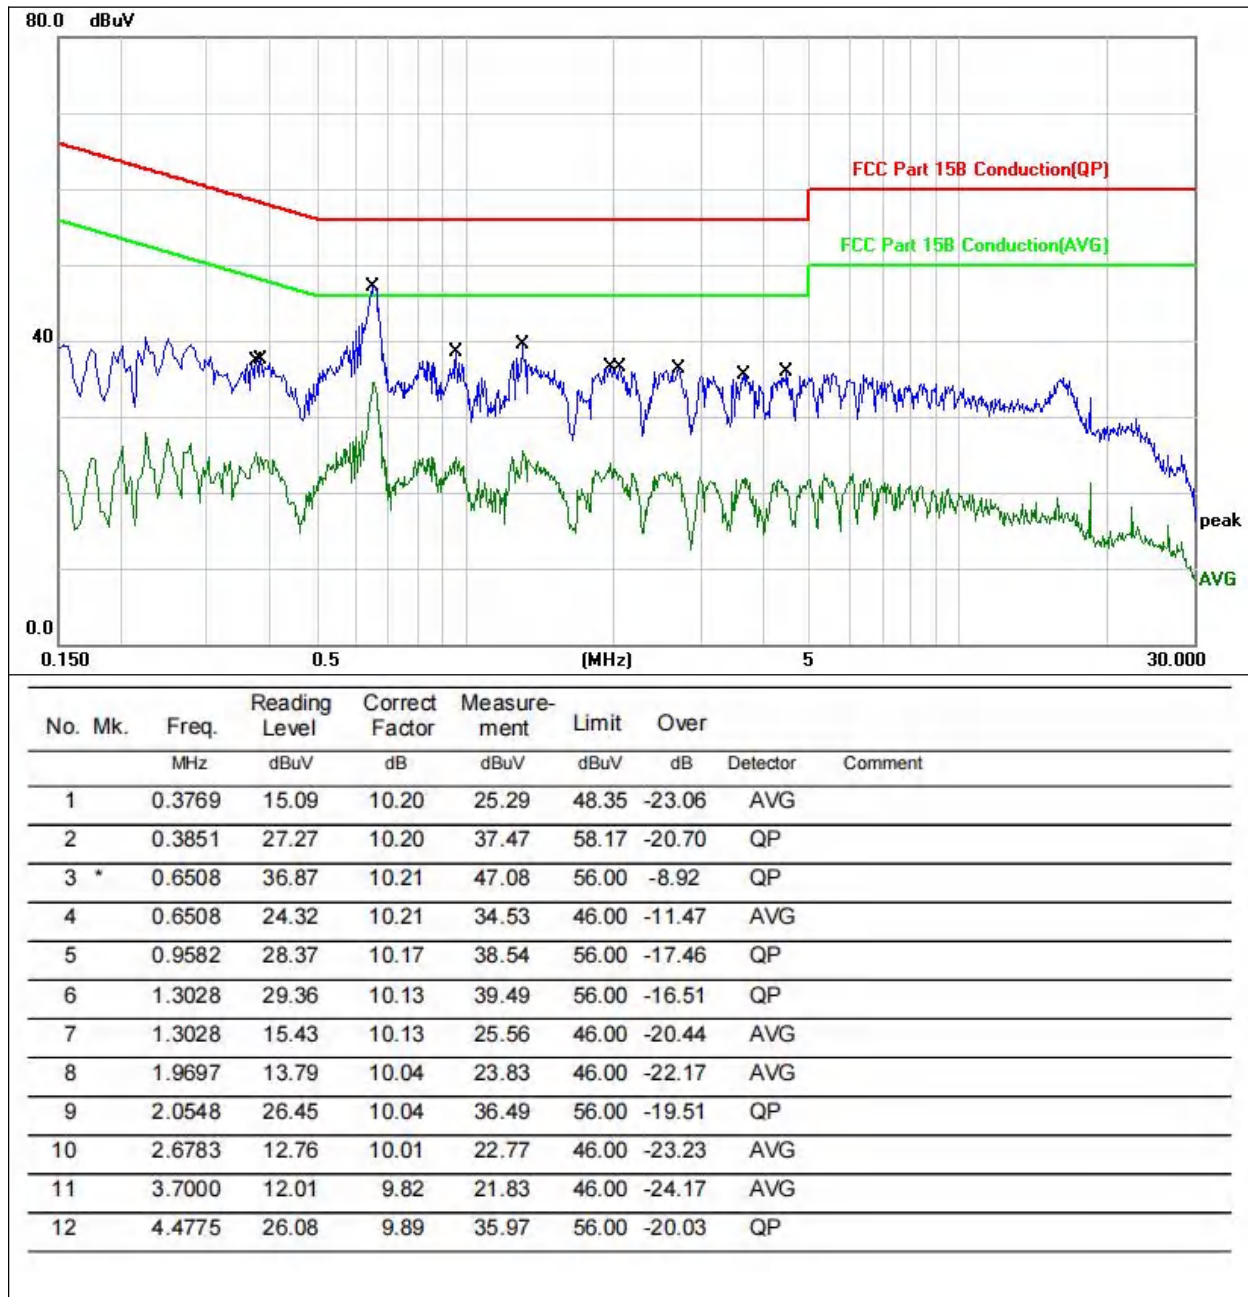

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case

1GHz~25GHz

GFSK

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Low Channel:2402MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                   | 4804      | 55.52            | 30.55             | 5.77          | 24.66             | 55.40             | 74.00    | -18.60 | Pk               |
| V                   | 4804      | 40.00            | 30.55             | 5.77          | 24.66             | 39.88             | 54.00    | -14.12 | AV               |
| V                   | 7206      | 53.82            | 30.33             | 6.32          | 24.55             | 54.36             | 74.00    | -19.64 | Pk               |
| V                   | 7206      | 41.18            | 30.33             | 6.32          | 24.55             | 41.72             | 54.00    | -12.28 | AV               |
| V                   | 9608      | 50.05            | 30.85             | 7.45          | 24.69             | 51.34             | 74.00    | -22.66 | Pk               |
| V                   | 9608      | 38.37            | 30.85             | 7.45          | 24.69             | 39.66             | 54.00    | -14.34 | AV               |
| H                   | 4804      | 56.22            | 30.55             | 5.77          | 24.66             | 56.10             | 74.00    | -17.90 | Pk               |
| H                   | 4804      | 40.08            | 30.55             | 5.77          | 24.66             | 39.96             | 54.00    | -14.04 | AV               |
| H                   | 7206      | 53.75            | 30.33             | 6.32          | 24.55             | 54.29             | 74.00    | -19.71 | Pk               |
| H                   | 7206      | 41.67            | 30.33             | 6.32          | 24.55             | 42.21             | 54.00    | -11.79 | AV               |
| H                   | 9608      | 51.27            | 30.85             | 7.45          | 24.69             | 52.56             | 74.00    | -21.44 | Pk               |
| H                   | 9608      | 38.00            | 30.85             | 7.45          | 24.69             | 39.29             | 54.00    | -14.71 | AV               |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Middle Channel:2441MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                      | 4882      | 54.31            | 30.55             | 5.77          | 24.66             | 54.19             | 74.00    | -19.81 | Pk               |
| V                      | 4882      | 40.39            | 30.55             | 5.77          | 24.66             | 40.27             | 54.00    | -13.73 | AV               |
| V                      | 7323      | 54.33            | 30.33             | 6.32          | 24.55             | 54.87             | 74.00    | -19.13 | Pk               |
| V                      | 7323      | 39.49            | 30.33             | 6.32          | 24.55             | 40.03             | 54.00    | -13.97 | AV               |
| V                      | 9764      | 50.12            | 30.85             | 7.45          | 24.69             | 51.41             | 74.00    | -22.59 | Pk               |
| V                      | 9764      | 38.48            | 30.85             | 7.45          | 24.69             | 39.77             | 54.00    | -14.23 | AV               |
| H                      | 4882      | 55.17            | 30.55             | 5.77          | 24.66             | 55.05             | 74.00    | -18.95 | Pk               |
| H                      | 4882      | 39.61            | 30.55             | 5.77          | 24.66             | 39.49             | 54.00    | -14.51 | AV               |
| H                      | 7323      | 53.90            | 30.33             | 6.32          | 24.55             | 54.44             | 74.00    | -19.56 | Pk               |
| H                      | 7323      | 39.36            | 30.33             | 6.32          | 24.55             | 39.90             | 54.00    | -14.10 | AV               |
| H                      | 9764      | 51.36            | 30.85             | 7.45          | 24.69             | 52.65             | 74.00    | -21.35 | Pk               |
| H                      | 9764      | 37.92            | 30.85             | 7.45          | 24.69             | 39.21             | 54.00    | -14.79 | AV               |

| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| High Channel:2480MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                    | 4960      | 55.59            | 30.55             | 5.77          | 24.66             | 55.47             | 74.00    | -18.53 | Pk               |
| V                    | 4960      | 40.26            | 30.55             | 5.77          | 24.66             | 40.14             | 54.00    | -13.86 | AV               |
| V                    | 7440      | 54.00            | 30.33             | 6.32          | 24.55             | 54.54             | 74.00    | -19.46 | Pk               |
| V                    | 7440      | 40.89            | 30.33             | 6.32          | 24.55             | 41.43             | 54.00    | -12.57 | AV               |
| V                    | 9920      | 51.45            | 30.85             | 7.45          | 24.69             | 52.74             | 74.00    | -21.26 | Pk               |
| V                    | 9920      | 37.95            | 30.85             | 7.45          | 24.69             | 39.24             | 54.00    | -14.76 | AV               |
| H                    | 4960      | 53.86            | 30.55             | 5.77          | 24.66             | 53.74             | 74.00    | -20.26 | Pk               |
| H                    | 4960      | 41.24            | 30.55             | 5.77          | 24.66             | 41.12             | 54.00    | -12.88 | AV               |
| H                    | 7440      | 53.92            | 30.33             | 6.32          | 24.55             | 54.46             | 74.00    | -19.54 | Pk               |
| H                    | 7440      | 41.10            | 30.33             | 6.32          | 24.55             | 41.64             | 54.00    | -12.36 | AV               |
| H                    | 9920      | 51.27            | 30.85             | 7.45          | 24.69             | 52.56             | 74.00    | -21.44 | Pk               |
| H                    | 9920      | 38.99            | 30.85             | 7.45          | 24.69             | 40.28             | 54.00    | -13.72 | AV               |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

$\pi/4$ -DQPSK

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Low Channel:2402MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                   | 4804      | 55.42            | 30.55             | 5.77          | 24.66             | 55.30             | 74.00    | -18.70 | Pk               |
| V                   | 4804      | 39.95            | 30.55             | 5.77          | 24.66             | 39.83             | 54.00    | -14.17 | AV               |
| V                   | 7206      | 53.70            | 30.33             | 6.32          | 24.55             | 54.24             | 74.00    | -19.76 | Pk               |
| V                   | 7206      | 40.50            | 30.33             | 6.32          | 24.55             | 41.04             | 54.00    | -12.96 | AV               |
| V                   | 9608      | 52.58            | 30.85             | 7.45          | 24.69             | 53.87             | 74.00    | -20.13 | Pk               |
| V                   | 9608      | 37.11            | 30.85             | 7.45          | 24.69             | 38.40             | 54.00    | -15.60 | AV               |
| H                   | 4804      | 53.77            | 30.55             | 5.77          | 24.66             | 53.65             | 74.00    | -20.35 | Pk               |
| H                   | 4804      | 40.65            | 30.55             | 5.77          | 24.66             | 40.53             | 54.00    | -13.47 | AV               |
| H                   | 7206      | 54.43            | 30.33             | 6.32          | 24.55             | 54.97             | 74.00    | -19.03 | Pk               |
| H                   | 7206      | 40.46            | 30.33             | 6.32          | 24.55             | 41.00             | 54.00    | -13.00 | AV               |
| H                   | 9608      | 51.09            | 30.85             | 7.45          | 24.69             | 52.38             | 74.00    | -21.62 | Pk               |
| H                   | 9608      | 39.16            | 30.85             | 7.45          | 24.69             | 40.45             | 54.00    | -13.55 | AV               |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Middle Channel:2441MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                      | 4882      | 56.08            | 30.55             | 5.77          | 24.66             | 55.96             | 74.00    | -18.04 | Pk               |
| V                      | 4882      | 40.25            | 30.55             | 5.77          | 24.66             | 40.13             | 54.00    | -13.87 | AV               |
| V                      | 7323      | 54.16            | 30.33             | 6.32          | 24.55             | 54.70             | 74.00    | -19.30 | Pk               |
| V                      | 7323      | 39.87            | 30.33             | 6.32          | 24.55             | 40.41             | 54.00    | -13.59 | AV               |
| V                      | 9764      | 50.85            | 30.85             | 7.45          | 24.69             | 52.14             | 74.00    | -21.86 | Pk               |
| V                      | 9764      | 36.71            | 30.85             | 7.45          | 24.69             | 38.00             | 54.00    | -16.00 | AV               |
| H                      | 4882      | 54.79            | 30.55             | 5.77          | 24.66             | 54.67             | 74.00    | -19.33 | Pk               |
| H                      | 4882      | 41.27            | 30.55             | 5.77          | 24.66             | 41.15             | 54.00    | -12.85 | AV               |
| H                      | 7323      | 53.39            | 30.33             | 6.32          | 24.55             | 53.93             | 74.00    | -20.07 | Pk               |
| H                      | 7323      | 41.62            | 30.33             | 6.32          | 24.55             | 42.16             | 54.00    | -11.84 | AV               |
| H                      | 9764      | 52.25            | 30.85             | 7.45          | 24.69             | 53.54             | 74.00    | -20.46 | Pk               |
| H                      | 9764      | 37.69            | 30.85             | 7.45          | 24.69             | 38.98             | 54.00    | -15.02 | AV               |

| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| High Channel:2480MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                    | 4960      | 55.76            | 30.55             | 5.77          | 24.66             | 55.64             | 74.00    | -18.36 | Pk               |
| V                    | 4960      | 40.18            | 30.55             | 5.77          | 24.66             | 40.06             | 54.00    | -13.94 | AV               |
| V                    | 7440      | 53.57            | 30.33             | 6.32          | 24.55             | 54.11             | 74.00    | -19.89 | Pk               |
| V                    | 7440      | 40.91            | 30.33             | 6.32          | 24.55             | 41.45             | 54.00    | -12.55 | AV               |
| V                    | 9920      | 50.00            | 30.85             | 7.45          | 24.69             | 51.29             | 74.00    | -22.71 | Pk               |
| V                    | 9920      | 37.28            | 30.85             | 7.45          | 24.69             | 38.57             | 54.00    | -15.43 | AV               |
| H                    | 4960      | 55.05            | 30.55             | 5.77          | 24.66             | 54.93             | 74.00    | -19.07 | Pk               |
| H                    | 4960      | 39.91            | 30.55             | 5.77          | 24.66             | 39.79             | 54.00    | -14.21 | AV               |

|   |      |       |       |      |       |       |       |        |    |
|---|------|-------|-------|------|-------|-------|-------|--------|----|
| H | 7440 | 52.82 | 30.33 | 6.32 | 24.55 | 53.36 | 74.00 | -20.64 | Pk |
| H | 7440 | 39.45 | 30.33 | 6.32 | 24.55 | 39.99 | 54.00 | -14.01 | AV |
| H | 9920 | 51.89 | 30.85 | 7.45 | 24.69 | 53.18 | 74.00 | -20.82 | Pk |
| H | 9920 | 38.21 | 30.85 | 7.45 | 24.69 | 39.50 | 54.00 | -14.50 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

#### 8-DPSK

| Polar<br>(H/V)      | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| Low Channel:2402MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                   | 4804               | 55.54                      | 30.55                     | 5.77                  | 24.66                     | 55.42                         | 74.00              | -18.58         | Pk               |
| V                   | 4804               | 40.47                      | 30.55                     | 5.77                  | 24.66                     | 40.35                         | 54.00              | -13.65         | AV               |
| V                   | 7206               | 53.42                      | 30.33                     | 6.32                  | 24.55                     | 53.96                         | 74.00              | -20.04         | Pk               |
| V                   | 7206               | 40.18                      | 30.33                     | 6.32                  | 24.55                     | 40.72                         | 54.00              | -13.28         | AV               |
| V                   | 9608               | 52.65                      | 30.85                     | 7.45                  | 24.69                     | 53.94                         | 74.00              | -20.06         | Pk               |
| V                   | 9608               | 36.43                      | 30.85                     | 7.45                  | 24.69                     | 37.72                         | 54.00              | -16.28         | AV               |
| H                   | 4804               | 56.26                      | 30.55                     | 5.77                  | 24.66                     | 56.14                         | 74.00              | -17.86         | Pk               |
| H                   | 4804               | 42.01                      | 30.55                     | 5.77                  | 24.66                     | 41.89                         | 54.00              | -12.11         | AV               |
| H                   | 7206               | 53.43                      | 30.33                     | 6.32                  | 24.55                     | 53.97                         | 74.00              | -20.03         | Pk               |
| H                   | 7206               | 40.82                      | 30.33                     | 6.32                  | 24.55                     | 41.36                         | 54.00              | -12.64         | AV               |
| H                   | 9608               | 51.67                      | 30.85                     | 7.45                  | 24.69                     | 52.96                         | 74.00              | -21.04         | Pk               |
| H                   | 9608               | 36.65                      | 30.85                     | 7.45                  | 24.69                     | 37.94                         | 54.00              | -16.06         | AV               |

| Polar<br>(H/V)         | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|------------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| Middle Channel:2441MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                      | 4882               | 55.95                      | 30.55                     | 5.77                  | 24.66                     | 55.83                         | 74.00              | -18.17         | Pk               |
| V                      | 4882               | 40.65                      | 30.55                     | 5.77                  | 24.66                     | 40.53                         | 54.00              | -13.47         | AV               |
| V                      | 7323               | 53.37                      | 30.33                     | 6.32                  | 24.55                     | 53.91                         | 74.00              | -20.09         | Pk               |
| V                      | 7323               | 41.24                      | 30.33                     | 6.32                  | 24.55                     | 41.78                         | 54.00              | -12.22         | AV               |
| V                      | 9764               | 50.81                      | 30.85                     | 7.45                  | 24.69                     | 52.10                         | 74.00              | -21.90         | Pk               |
| V                      | 9764               | 38.27                      | 30.85                     | 7.45                  | 24.69                     | 39.56                         | 54.00              | -14.44         | AV               |
| H                      | 4882               | 56.09                      | 30.55                     | 5.77                  | 24.66                     | 55.97                         | 74.00              | -18.03         | Pk               |
| H                      | 4882               | 39.72                      | 30.55                     | 5.77                  | 24.66                     | 39.60                         | 54.00              | -14.40         | AV               |
| H                      | 7323               | 54.30                      | 30.33                     | 6.32                  | 24.55                     | 54.84                         | 74.00              | -19.16         | Pk               |
| H                      | 7323               | 41.76                      | 30.33                     | 6.32                  | 24.55                     | 42.30                         | 54.00              | -11.70         | AV               |
| H                      | 9764               | 51.61                      | 30.85                     | 7.45                  | 24.69                     | 52.90                         | 74.00              | -21.10         | Pk               |
| H                      | 9764               | 38.98                      | 30.85                     | 7.45                  | 24.69                     | 40.27                         | 54.00              | -13.73         | AV               |

| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| High Channel:2480MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                    | 4960               | 55.56                      | 30.55                     | 5.77                  | 24.66                     | 55.44                         | 74.00              | -18.56         | Pk               |
| V                    | 4960               | 41.57                      | 30.55                     | 5.77                  | 24.66                     | 41.45                         | 54.00              | -12.55         | AV               |

|   |      |       |       |      |       |       |       |        |    |
|---|------|-------|-------|------|-------|-------|-------|--------|----|
| V | 7440 | 52.79 | 30.33 | 6.32 | 24.55 | 53.33 | 74.00 | -20.67 | Pk |
| V | 7440 | 41.45 | 30.33 | 6.32 | 24.55 | 41.99 | 54.00 | -12.01 | AV |
| V | 9920 | 51.60 | 30.85 | 7.45 | 24.69 | 52.89 | 74.00 | -21.11 | Pk |
| V | 9920 | 36.34 | 30.85 | 7.45 | 24.69 | 37.63 | 54.00 | -16.37 | AV |
| H | 4960 | 56.17 | 30.55 | 5.77 | 24.66 | 56.05 | 74.00 | -17.95 | Pk |
| H | 4960 | 41.18 | 30.55 | 5.77 | 24.66 | 41.06 | 54.00 | -12.94 | AV |
| H | 7440 | 54.03 | 30.33 | 6.32 | 24.55 | 54.57 | 74.00 | -19.43 | Pk |
| H | 7440 | 39.99 | 30.33 | 6.32 | 24.55 | 40.53 | 54.00 | -13.47 | AV |
| H | 9920 | 50.73 | 30.85 | 7.45 | 24.69 | 52.02 | 74.00 | -21.98 | Pk |
| H | 9920 | 38.51 | 30.85 | 7.45 | 24.69 | 39.80 | 54.00 | -14.20 | AV |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 5. RADIATED BAND EMISSION MEASUREMENT

### 5.1 Test Requirement:

|                       |                                                                                                    |          |      |      |         |
|-----------------------|----------------------------------------------------------------------------------------------------|----------|------|------|---------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                             |          |      |      |         |
| Test Method:          | ANSI C63.10: 2013                                                                                  |          |      |      |         |
| Test Frequency Range: | All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed. |          |      |      |         |
| Test site:            | Measurement Distance: 3m                                                                           |          |      |      |         |
| Receiver setup:       | Frequency                                                                                          | Detector | RBW  | VBW  | Value   |
|                       | Above 1GHz                                                                                         | Peak     | 1MHz | 3MHz | Peak    |
|                       |                                                                                                    | Average  | 1MHz | 3MHz | Average |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 2300MHz                                          |
| Stop Frequency                        | 2520                                             |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

### 5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

#### Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.3 DEVIATION FROM TEST STANDARD

No deviation

### 5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

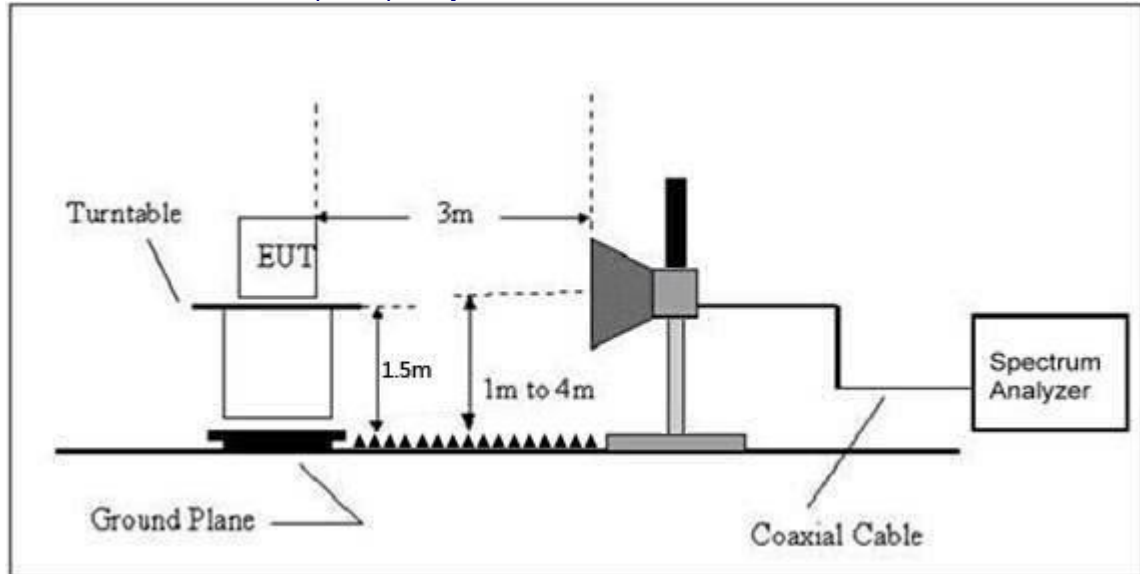

### 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.6 TEST RESULT

|                | Polar<br>(H/V)        | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin | Detector<br>Type | Result |
|----------------|-----------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-------------------|--------|------------------|--------|
| GFSK           | Low Channel: 2402MHz  |                    |                            |                           |                       |                             |                               |                   |        |                  |        |
|                | H                     | 2390.00            | 53.60                      | 30.22                     | 4.85                  | 23.98                       | 52.21                         | 74                | -21.79 | PK               | PASS   |
|                | H                     | 2390.00            | 38.66                      | 30.22                     | 4.85                  | 23.98                       | 37.27                         | 54                | -16.73 | AV               | PASS   |
|                | H                     | 2400.00            | 52.77                      | 30.22                     | 4.85                  | 23.98                       | 51.38                         | 74                | -22.62 | PK               | PASS   |
|                | H                     | 2400.00            | 39.33                      | 30.22                     | 4.85                  | 23.98                       | 37.94                         | 54                | -16.06 | AV               | PASS   |
|                | V                     | 2390.00            | 49.78                      | 30.22                     | 4.85                  | 23.98                       | 48.39                         | 74                | -25.61 | PK               | PASS   |
|                | V                     | 2390.00            | 42.23                      | 30.22                     | 4.85                  | 23.98                       | 40.84                         | 54                | -13.16 | AV               | PASS   |
|                | V                     | 2400.00            | 52.46                      | 30.22                     | 4.85                  | 23.98                       | 51.07                         | 74                | -22.93 | PK               | PASS   |
|                | V                     | 2400.00            | 39.71                      | 30.22                     | 4.85                  | 23.98                       | 38.32                         | 54                | -15.68 | AV               | PASS   |
|                | High Channel: 2480MHz |                    |                            |                           |                       |                             |                               |                   |        |                  |        |
|                | H                     | 2483.50            | 56.57                      | 30.22                     | 4.85                  | 23.98                       | 55.18                         | 74                | -18.82 | PK               | PASS   |
|                | H                     | 2485.50            | 38.48                      | 30.22                     | 4.85                  | 23.98                       | 37.09                         | 54                | -16.91 | AV               | PASS   |
|                | H                     | 2500.00            | 53.75                      | 30.22                     | 4.85                  | 23.98                       | 52.36                         | 74                | -21.64 | PK               | PASS   |
|                | H                     | 2500.00            | 40.51                      | 30.22                     | 4.85                  | 23.98                       | 39.12                         | 54                | -14.88 | AV               | PASS   |
|                | V                     | 2483.50            | 53.35                      | 30.22                     | 4.85                  | 23.98                       | 51.96                         | 74                | -22.04 | PK               | PASS   |
|                | V                     | 2485.50            | 40.33                      | 30.22                     | 4.85                  | 23.98                       | 38.94                         | 54                | -15.06 | AV               | PASS   |
|                | V                     | 2500.00            | 53.27                      | 30.22                     | 4.85                  | 23.98                       | 51.88                         | 74                | -22.12 | PK               | PASS   |
|                | V                     | 2500.00            | 37.12                      | 30.22                     | 4.85                  | 23.98                       | 35.73                         | 54                | -18.27 | AV               | PASS   |
| $\pi/4$ -DQPSK | Low Channel: 2402MHz  |                    |                            |                           |                       |                             |                               |                   |        |                  |        |
|                | H                     | 2390.00            | 55.46                      | 30.22                     | 4.85                  | 23.98                       | 54.07                         | 74                | -19.93 | PK               | PASS   |
|                | H                     | 2390.00            | 36.02                      | 30.22                     | 4.85                  | 23.98                       | 34.63                         | 54                | -19.37 | AV               | PASS   |
|                | H                     | 2400.00            | 53.76                      | 30.22                     | 4.85                  | 23.98                       | 52.37                         | 74                | -21.63 | PK               | PASS   |
|                | H                     | 2400.00            | 38.10                      | 30.22                     | 4.85                  | 23.98                       | 36.71                         | 54                | -17.29 | AV               | PASS   |
|                | V                     | 2390.00            | 49.86                      | 30.22                     | 4.85                  | 23.98                       | 48.47                         | 74                | -25.53 | PK               | PASS   |
|                | V                     | 2390.00            | 41.41                      | 30.22                     | 4.85                  | 23.98                       | 40.02                         | 54                | -13.98 | AV               | PASS   |
|                | V                     | 2400.00            | 52.50                      | 30.22                     | 4.85                  | 23.98                       | 51.11                         | 74                | -22.89 | PK               | PASS   |
|                | V                     | 2400.00            | 39.39                      | 30.22                     | 4.85                  | 23.98                       | 38.00                         | 54                | -16.00 | AV               | PASS   |
|                | High Channel: 2480MHz |                    |                            |                           |                       |                             |                               |                   |        |                  |        |
|                | H                     | 2483.50            | 53.10                      | 30.22                     | 4.85                  | 23.98                       | 51.71                         | 74                | -22.29 | PK               | PASS   |
|                | H                     | 2485.50            | 36.19                      | 30.22                     | 4.85                  | 23.98                       | 34.80                         | 54                | -19.20 | AV               | PASS   |
|                | H                     | 2500.00            | 51.81                      | 30.22                     | 4.85                  | 23.98                       | 50.42                         | 74                | -23.58 | PK               | PASS   |
|                | H                     | 2500.00            | 38.41                      | 30.22                     | 4.85                  | 23.98                       | 37.02                         | 54                | -16.98 | AV               | PASS   |
|                | V                     | 2483.50            | 50.92                      | 30.22                     | 4.85                  | 23.98                       | 49.53                         | 74                | -24.47 | PK               | PASS   |
|                | V                     | 2485.50            | 40.45                      | 30.22                     | 4.85                  | 23.98                       | 39.06                         | 54                | -14.94 | AV               | PASS   |
|                | V                     | 2500.00            | 51.15                      | 30.22                     | 4.85                  | 23.98                       | 49.76                         | 74                | -24.24 | PK               | PASS   |
|                | V                     | 2500.00            | 39.12                      | 30.22                     | 4.85                  | 23.98                       | 37.73                         | 54                | -16.27 | AV               | PASS   |
| 8-DPSK         | Low Channel: 2402MHz  |                    |                            |                           |                       |                             |                               |                   |        |                  |        |
|                | H                     | 2390.00            | 53.47                      | 30.22                     | 4.85                  | 23.98                       | 52.08                         | 74                | -21.92 | PK               | PASS   |
|                | H                     | 2390.00            | 37.90                      | 30.22                     | 4.85                  | 23.98                       | 36.51                         | 54                | -17.49 | AV               | PASS   |
|                | H                     | 2400.00            | 52.83                      | 30.22                     | 4.85                  | 23.98                       | 51.44                         | 74                | -22.56 | PK               | PASS   |
|                | H                     | 2400.00            | 38.65                      | 30.22                     | 4.85                  | 23.98                       | 37.26                         | 54                | -16.74 | AV               | PASS   |
|                | V                     | 2390.00            | 51.06                      | 30.22                     | 4.85                  | 23.98                       | 49.67                         | 74                | -24.33 | PK               | PASS   |
|                | V                     | 2390.00            | 41.82                      | 30.22                     | 4.85                  | 23.98                       | 40.43                         | 54                | -13.57 | AV               | PASS   |
|                | V                     | 2400.00            | 52.69                      | 30.22                     | 4.85                  | 23.98                       | 51.30                         | 74                | -22.70 | PK               | PASS   |
|                | V                     | 2400.00            | 39.18                      | 30.22                     | 4.85                  | 23.98                       | 37.79                         | 54                | -16.21 | AV               | PASS   |
|                | High Channel: 2480MHz |                    |                            |                           |                       |                             |                               |                   |        |                  |        |
|                | H                     | 2483.50            | 53.98                      | 30.22                     | 4.85                  | 23.98                       | 52.59                         | 74                | -21.41 | PK               | PASS   |
|                | H                     | 2485.50            | 36.48                      | 30.22                     | 4.85                  | 23.98                       | 35.09                         | 54                | -18.91 | AV               | PASS   |
|                | H                     | 2500.00            | 52.04                      | 30.22                     | 4.85                  | 23.98                       | 50.65                         | 74                | -23.35 | PK               | PASS   |
|                | H                     | 2500.00            | 38.04                      | 30.22                     | 4.85                  | 23.98                       | 36.65                         | 54                | -17.35 | AV               | PASS   |
|                | V                     | 2483.50            | 53.66                      | 30.22                     | 4.85                  | 23.98                       | 52.27                         | 74                | -21.73 | PK               | PASS   |
|                | V                     | 2485.50            | 41.28                      | 30.22                     | 4.85                  | 23.98                       | 39.89                         | 54                | -14.11 | AV               | PASS   |
|                | V                     | 2500.00            | 51.58                      | 30.22                     | 4.85                  | 23.98                       | 50.19                         | 74                | -23.81 | PK               | PASS   |

**Remark:** 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin = Emission Level - Limit

## 6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

|                   |                                         |
|-------------------|-----------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)         |
| Test Method:      | KDB558074 D0115.247 Meas Guidancev05r02 |

### 6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.2 Test Setup



### 6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

### 6.4 DEVIATION FROM STANDARD

No deviation.

### 6.5 Test Result

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

#### 7. 20dB Bandwidth

|                   |                                    |
|-------------------|------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method:      | ANSI C63.10:2013                   |

##### 7.1 Test Setup



##### 7.2 Limit

N/A

##### 7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

##### 7.4 DEVIATION FROM STANDARD

No deviation.


##### 7.5 Test Result

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

## 8. Maximum Peak Output Power

|                   |                                    |
|-------------------|------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(1) |
| Test Method:      | ANSI C63.10:2013                   |
| Limit:            | 21                                 |

### 8.1 Block Diagram Of Test Setup

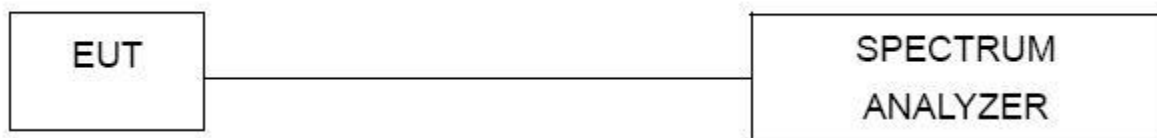

### 8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.  
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 8.4 DEVIATION FROM STANDARD

No deviation.

### 8.5 Test Result

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

## 9. Hopping Channel Separation

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)                           |
| Test Method:      | ANSI C63.10:2013                                             |
| Receiver setup:   | RBW=100KHz, VBW=300KHz, detector=Peak                        |
| Limit:            | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater) |

### 9.1 Test Setup



### 9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 9.3 DEVIATION FROM STANDARD

No deviation.


### 9.4 Test Result

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

## 10.NUMBER OF HOPPING FREQUENCY

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)(iii)                                  |
| Test Method:      | ANSI C63.10:2013                                                         |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak |
| Limit:            | 15 channels                                                              |

### 10.1 Test Setup

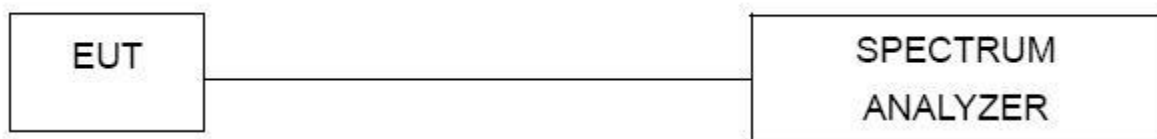

### 10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 Test Result

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

## 11. DWELL TIME

|                   |                                             |
|-------------------|---------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)(iii)     |
| Test Method:      | ANSI C63.10:2013                            |
| Receiver setup:   | RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak |
| Limit:            | 0.4 Second                                  |

### 11.1 Test Setup



### 11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


### 11.3 DEVIATION FROM STANDARD

No deviation.

### 11.4 Test Result

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS


## 12. Antenna Requirement
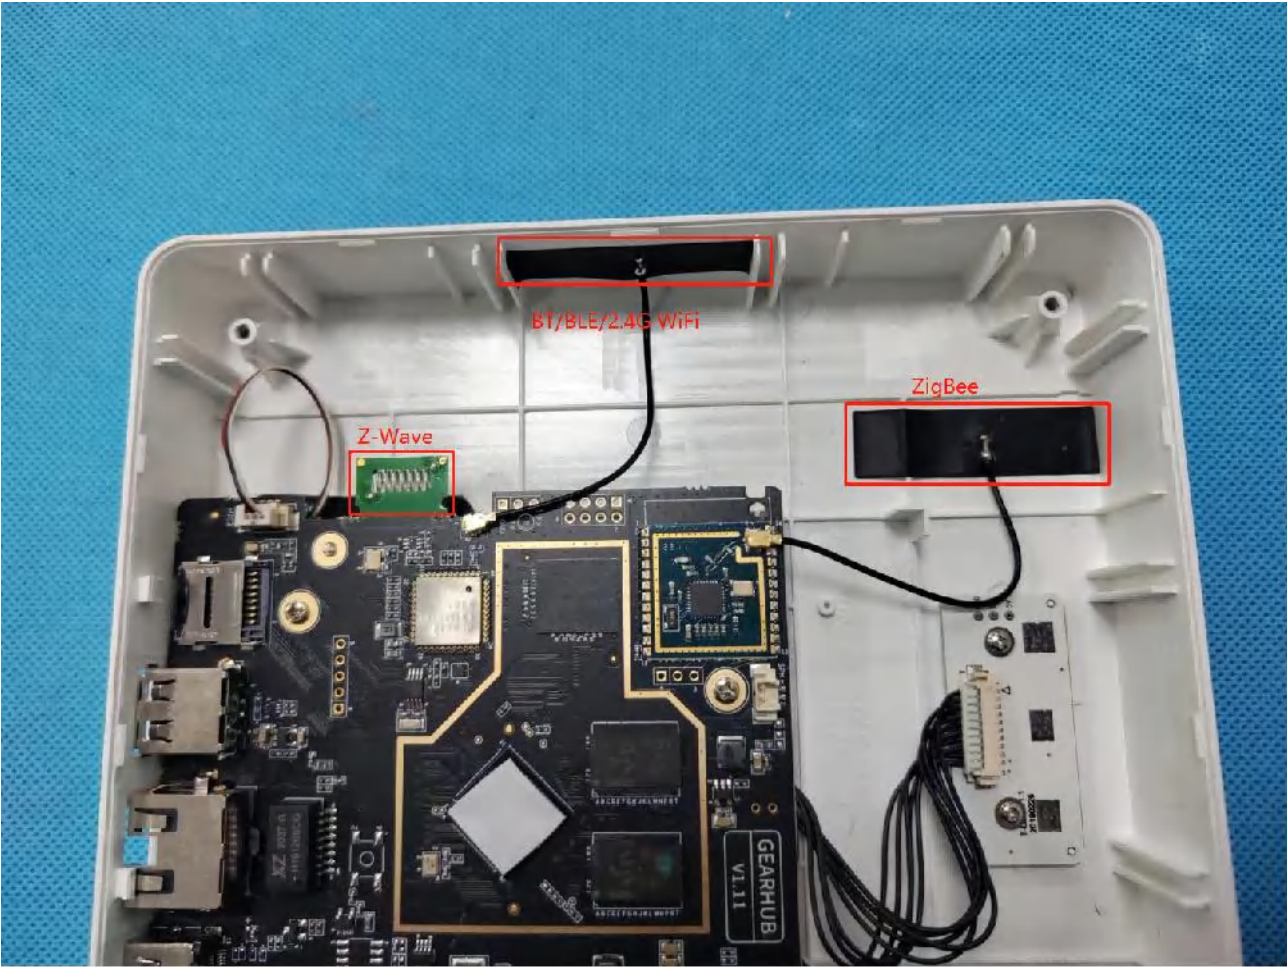
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | FCC Part15 C Section 15.203 /247(c) |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>    |                                     |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
| <p>The antenna is Internal antenna, the best case gain of the antennas are 4.26dBi, reference to the below photo for details ANT for BT</p>  <p>The photograph shows the internal components of a white plastic enclosure. A black printed circuit board (PCB) is visible, featuring various electronic components. Three specific antenna areas are highlighted with red rectangles and labels: 1. A small green PCB labeled 'Z-Wave' is connected to the main board. 2. A black rectangular antenna labeled 'BT/Bluetooth/2.4G WiFi' is mounted on the top edge of the enclosure. 3. A black rectangular antenna labeled 'ZigBee' is mounted on the right side of the enclosure. The PCB also has a 'GEARHUB V1.11' label and other components like a large silver heat sink and various connectors.</p> |                                     |

## 13.Appendix1

### 13.1 -20DB BANDWIDTH

| Condition | Antenna | Modulation | Frequency (MHz) | -20dB BW(MHz) | if larger than CFS |
|-----------|---------|------------|-----------------|---------------|--------------------|
| NVNT      | ANT1    | 1-DH5      | 2402.00         | 1.014         | Yes                |
| NVNT      | ANT1    | 1-DH5      | 2441.00         | 1.011         | Yes                |
| NVNT      | ANT1    | 1-DH5      | 2480.00         | 1.020         | Yes                |
| NVNT      | ANT1    | 2-DH5      | 2402.00         | 1.356         | Yes                |
| NVNT      | ANT1    | 2-DH5      | 2441.00         | 1.360         | Yes                |
| NVNT      | ANT1    | 2-DH5      | 2480.00         | 1.378         | Yes                |
| NVNT      | ANT1    | 3-DH5      | 2402.00         | 1.315         | Yes                |
| NVNT      | ANT1    | 3-DH5      | 2441.00         | 1.313         | Yes                |
| NVNT      | ANT1    | 3-DH5      | 2480.00         | 1.326         | Yes                |

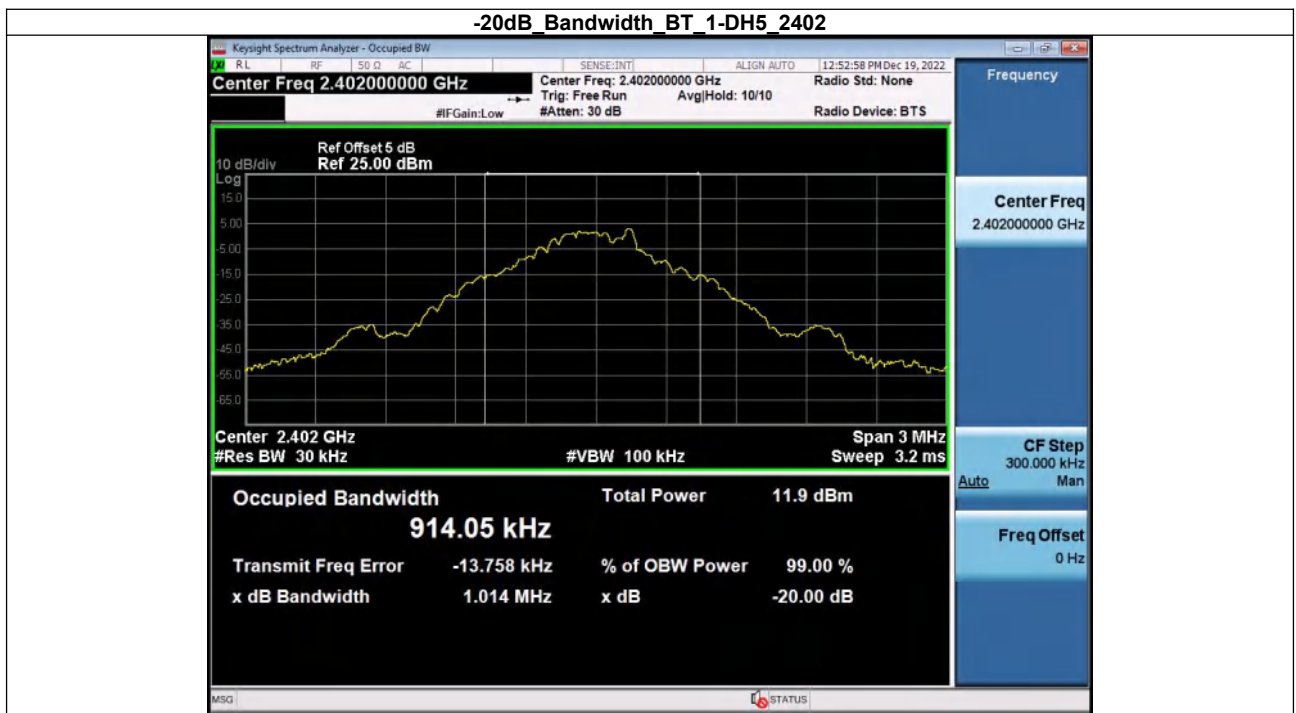


-20dB Bandwidth BT 1-DH5\_2441




-20dB Bandwidth BT 1-DH5\_2480





-20dB Bandwidth BT 2-DH5\_2402

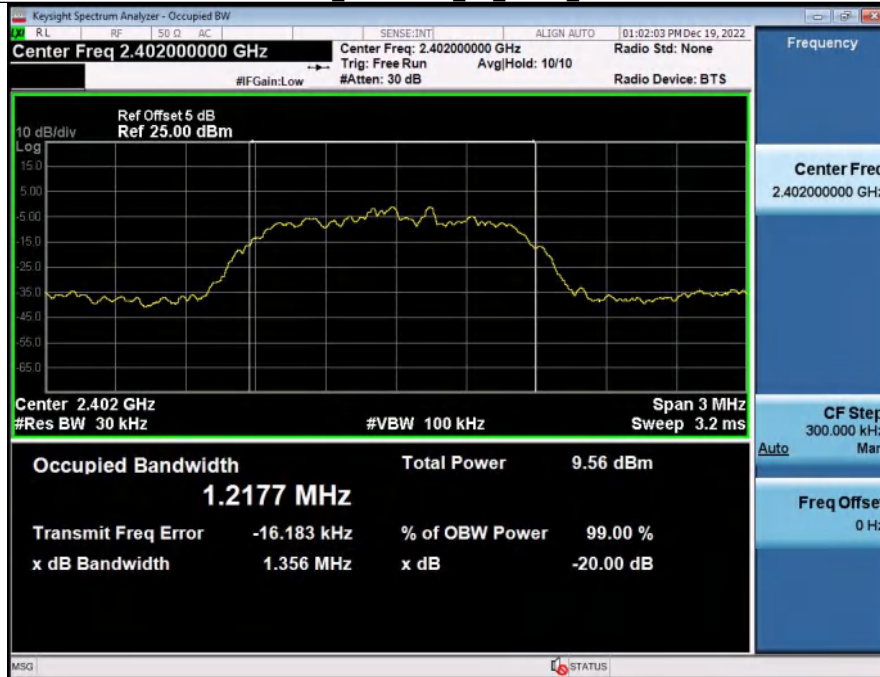


-20dB Bandwidth BT 2-DH5\_2441

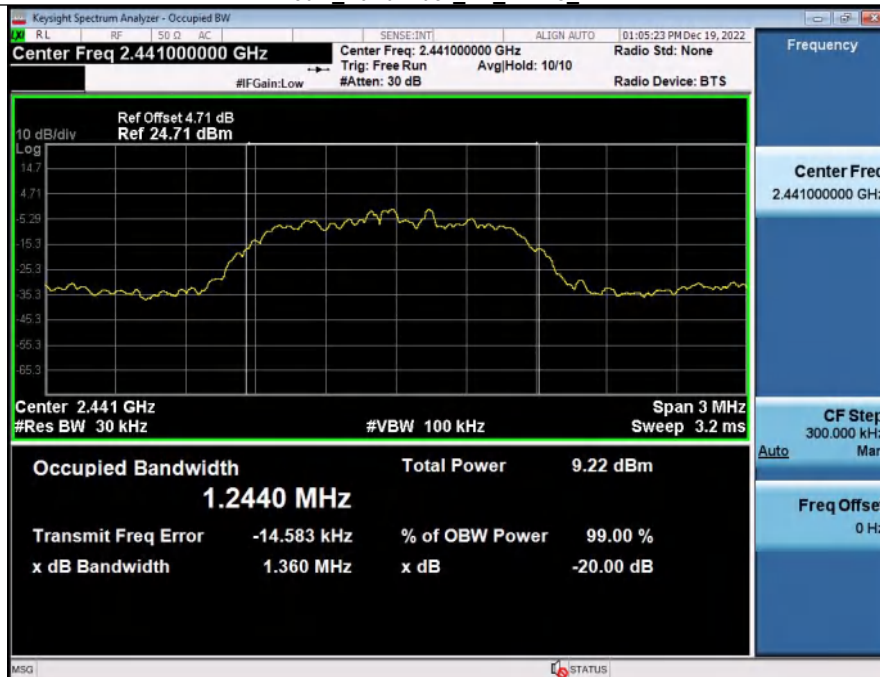


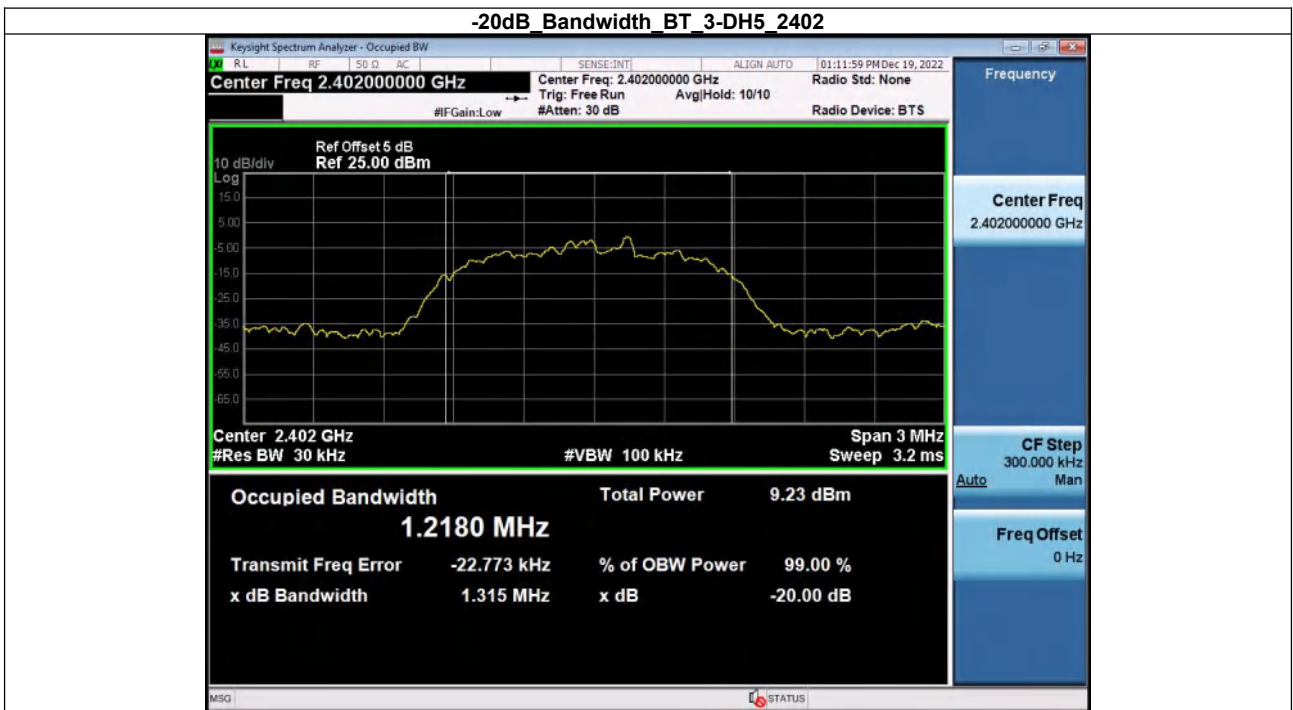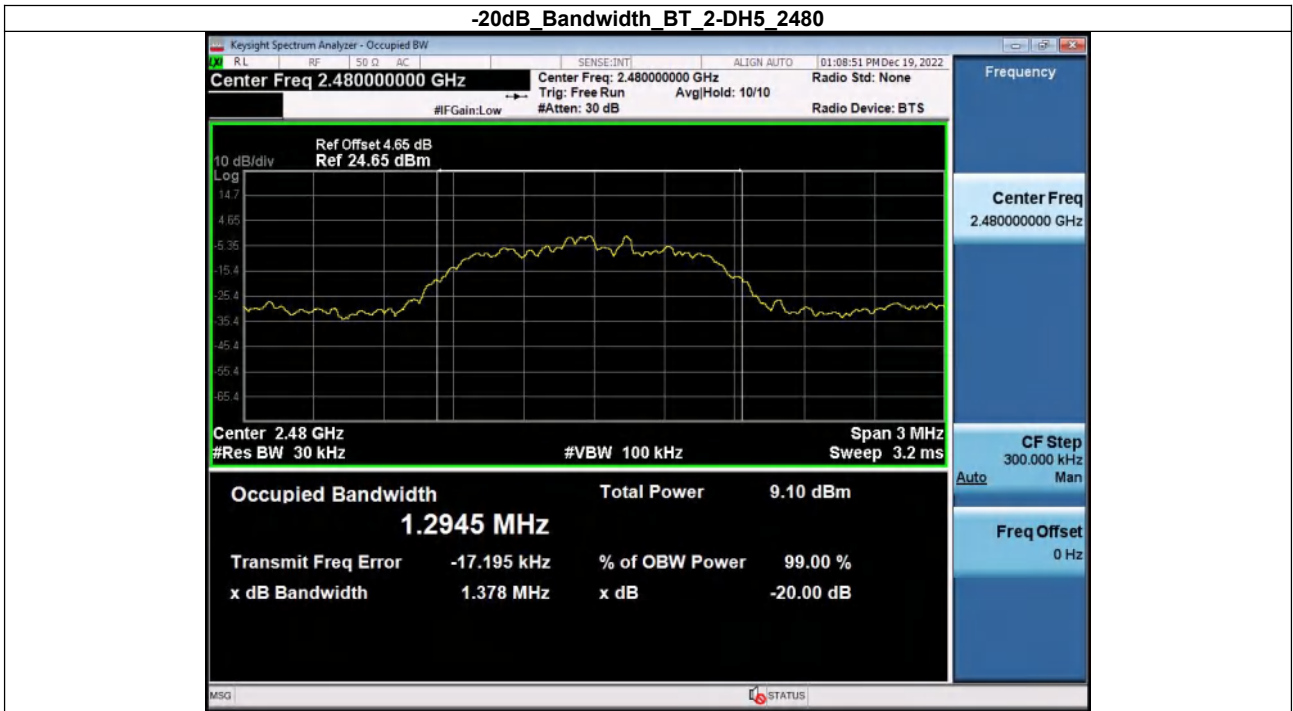

-20dB Bandwidth BT 3-DH5\_2441

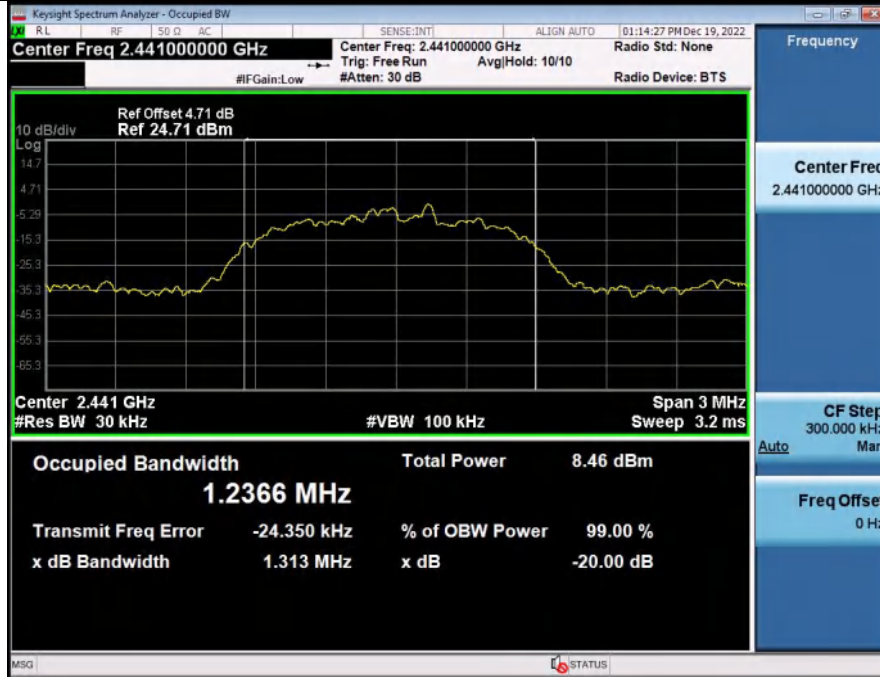


-20dB Bandwidth BT 3-DH5\_2480

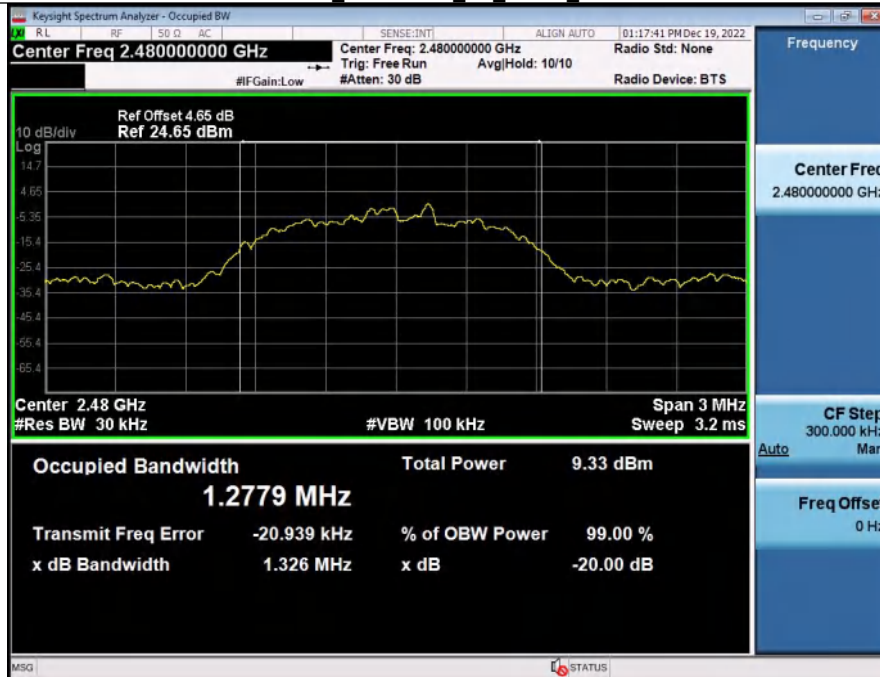


### 13.2. 99% OCCUPIED BANDWIDTH

| Condition | Antenna | Modulation | Frequency (MHz) | 99% BW (MHz) |
|-----------|---------|------------|-----------------|--------------|
| NVNT      | ANT1    | 1-DH5      | 2402.00         | 0.906        |
| NVNT      | ANT1    | 1-DH5      | 2441.00         | 0.911        |
| NVNT      | ANT1    | 1-DH5      | 2480.00         | 0.912        |
| NVNT      | ANT1    | 2-DH5      | 2402.00         | 1.215        |
| NVNT      | ANT1    | 2-DH5      | 2441.00         | 1.241        |
| NVNT      | ANT1    | 2-DH5      | 2480.00         | 1.297        |
| NVNT      | ANT1    | 3-DH5      | 2402.00         | 1.220        |
| NVNT      | ANT1    | 3-DH5      | 2441.00         | 1.237        |
| NVNT      | ANT1    | 3-DH5      | 2480.00         | 1.277        |

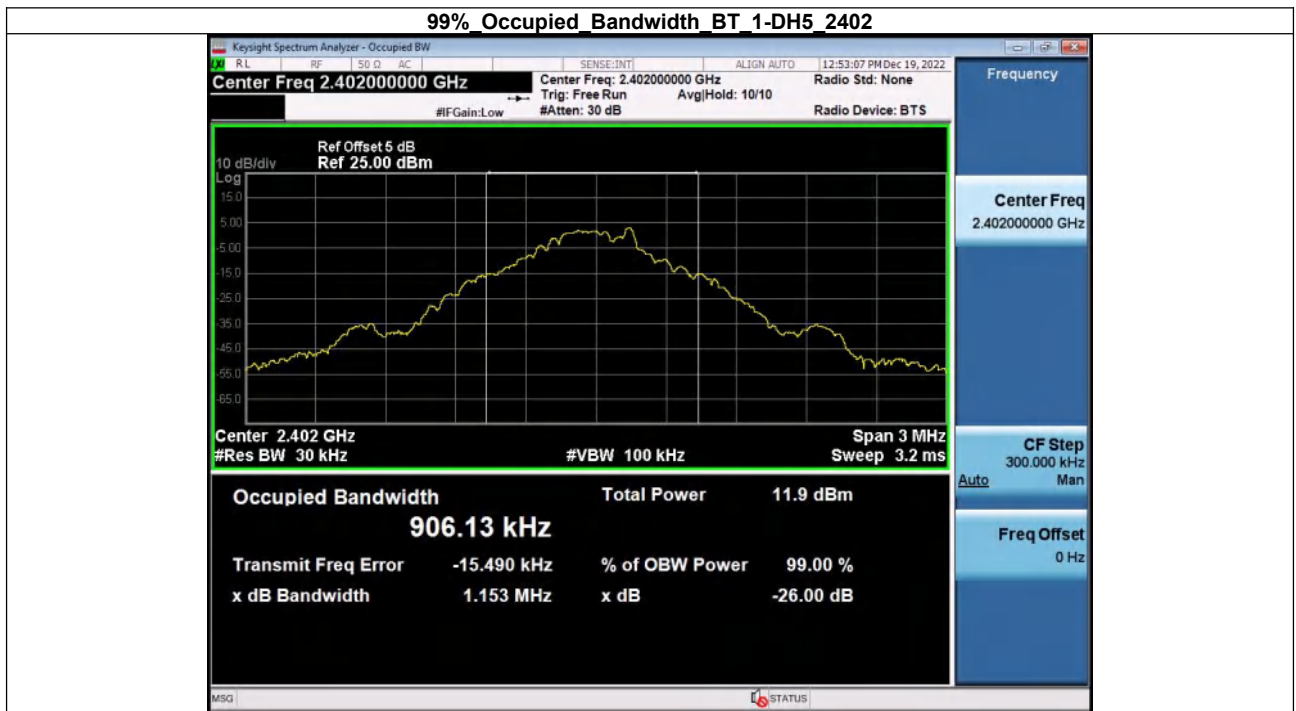


99% Occupied Bandwidth BT 1-DH5 2441

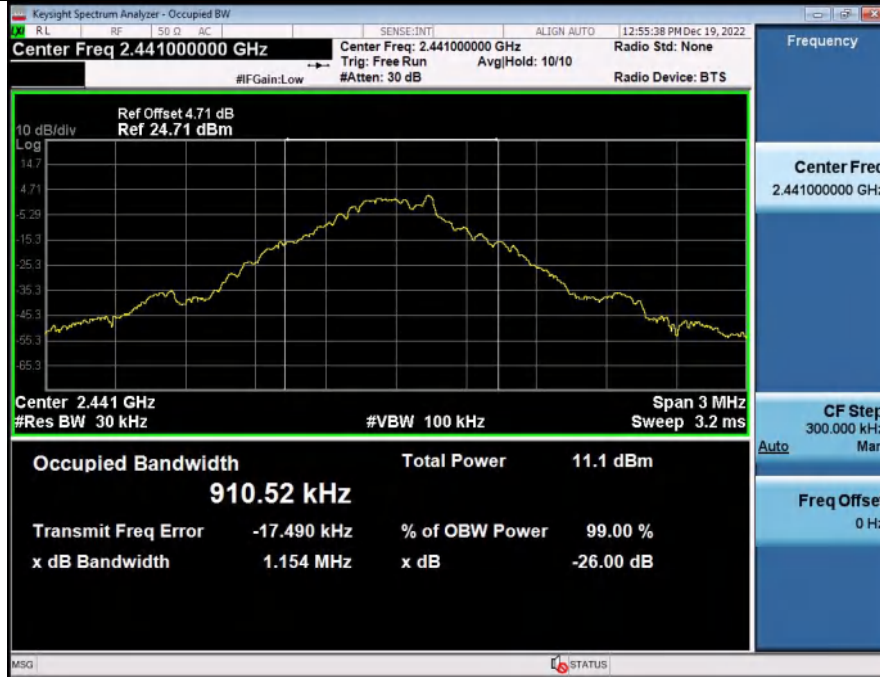


99% Occupied Bandwidth BT 1-DH5 2480




99% Occupied Bandwidth BT 2-DH5\_2402

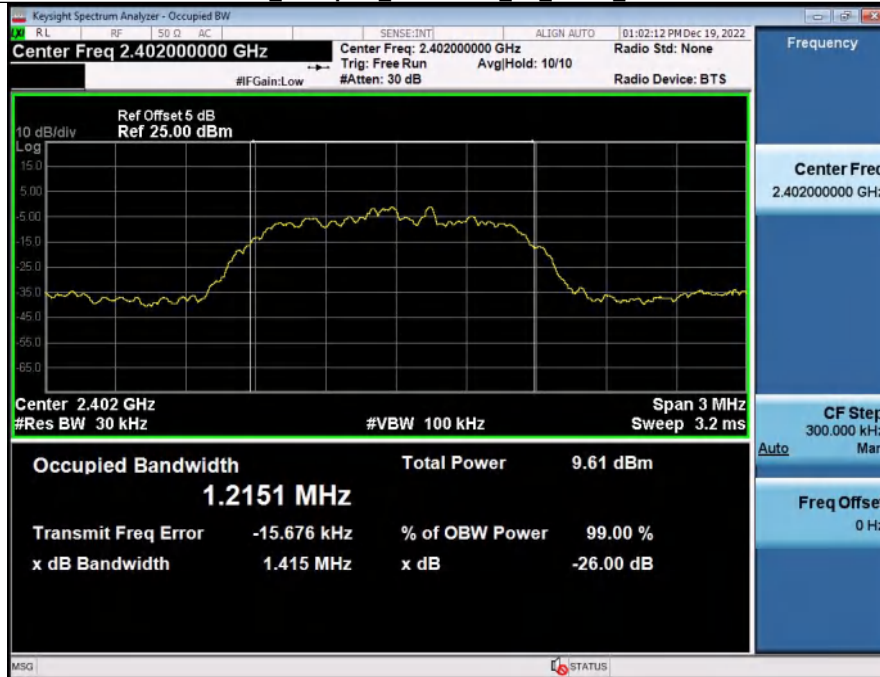


99% Occupied Bandwidth BT 2-DH5\_2441

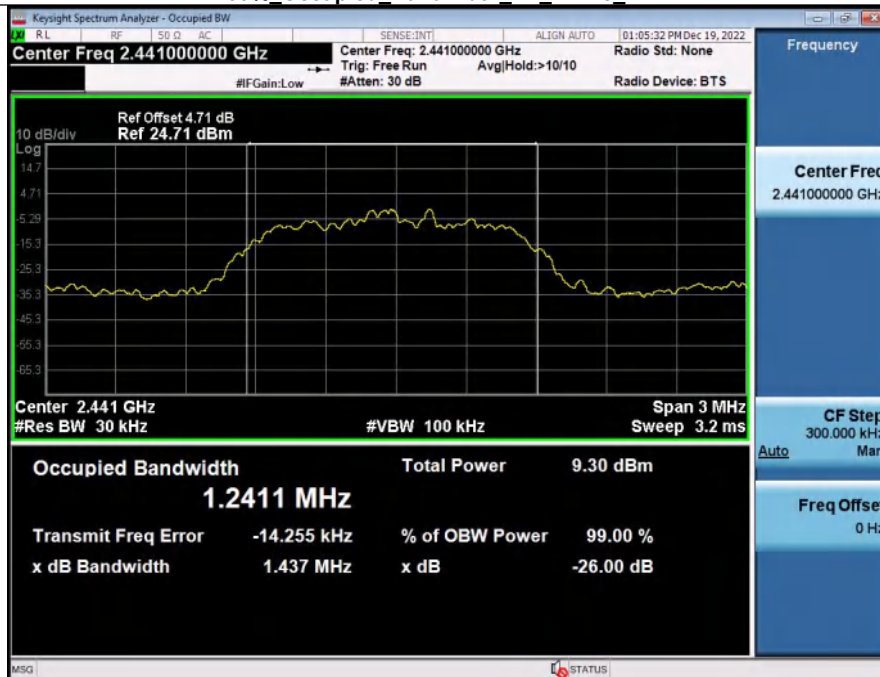


99% Occupied Bandwidth BT 2-DH5 2480

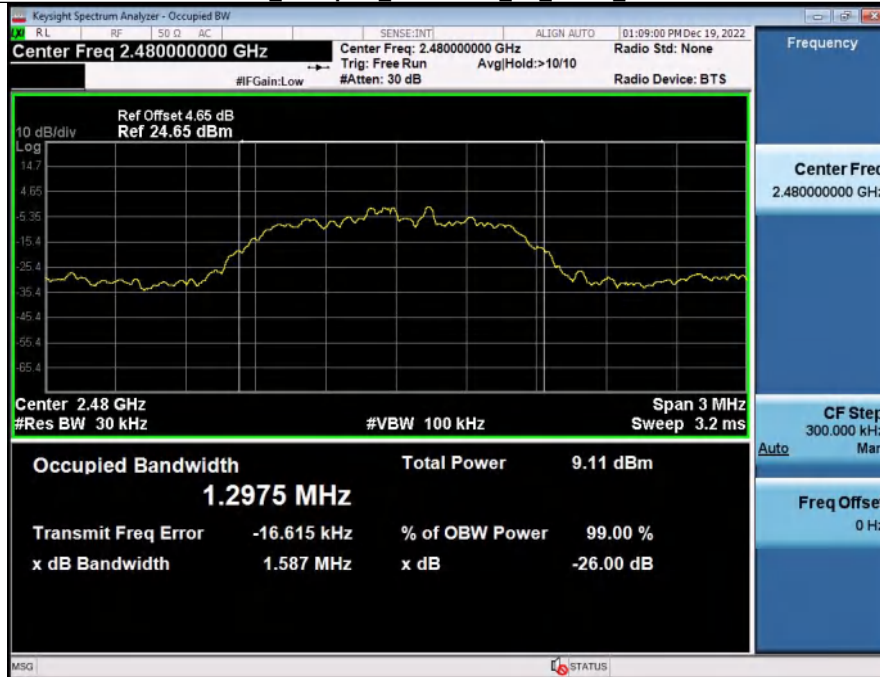


99% Occupied Bandwidth BT 3-DH5 2402

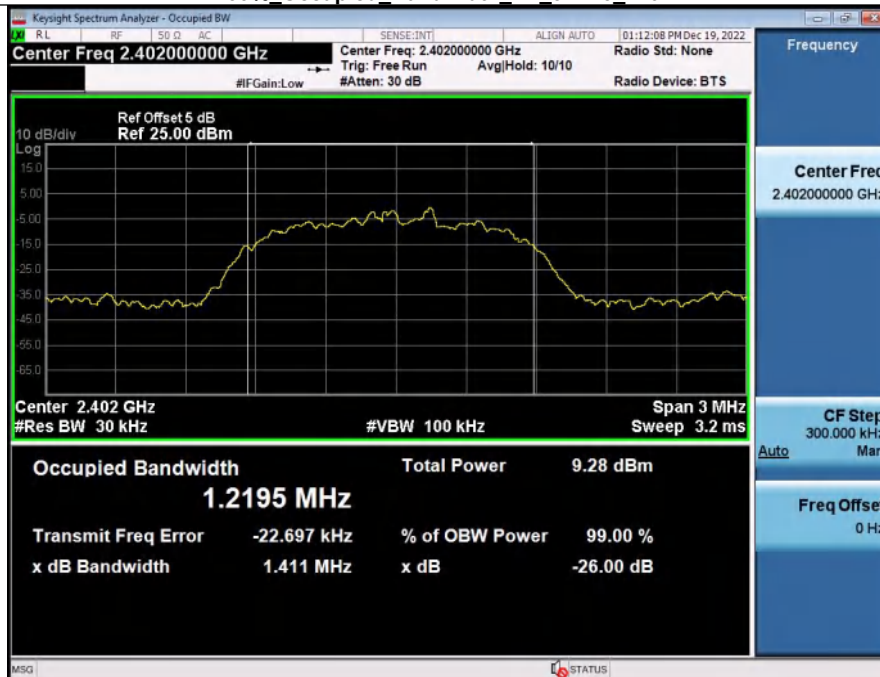

99% Occupied Bandwidth BT 3-DH5 2441

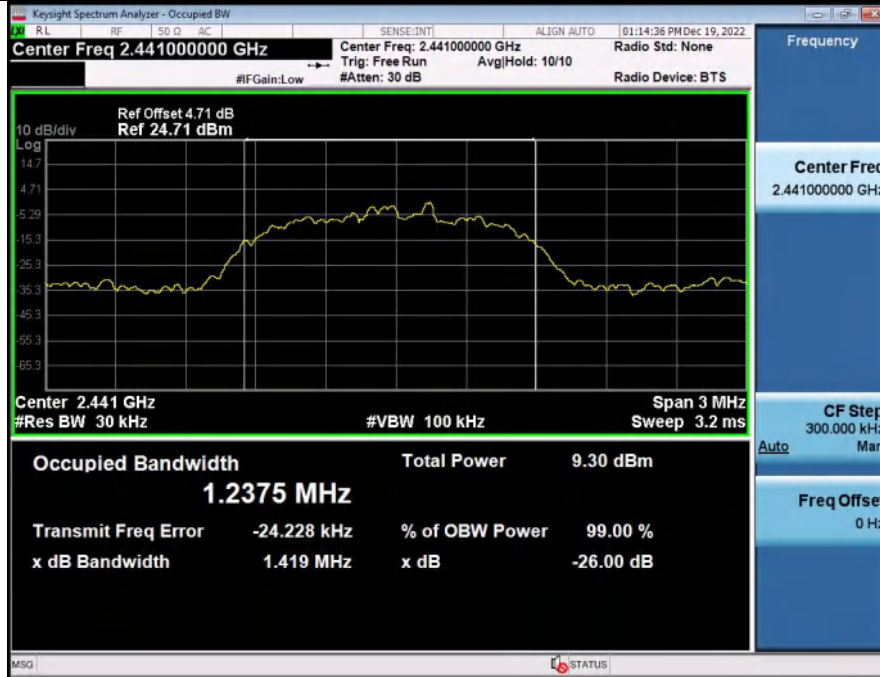

99% Occupied Bandwidth BT 3-DH5 2480

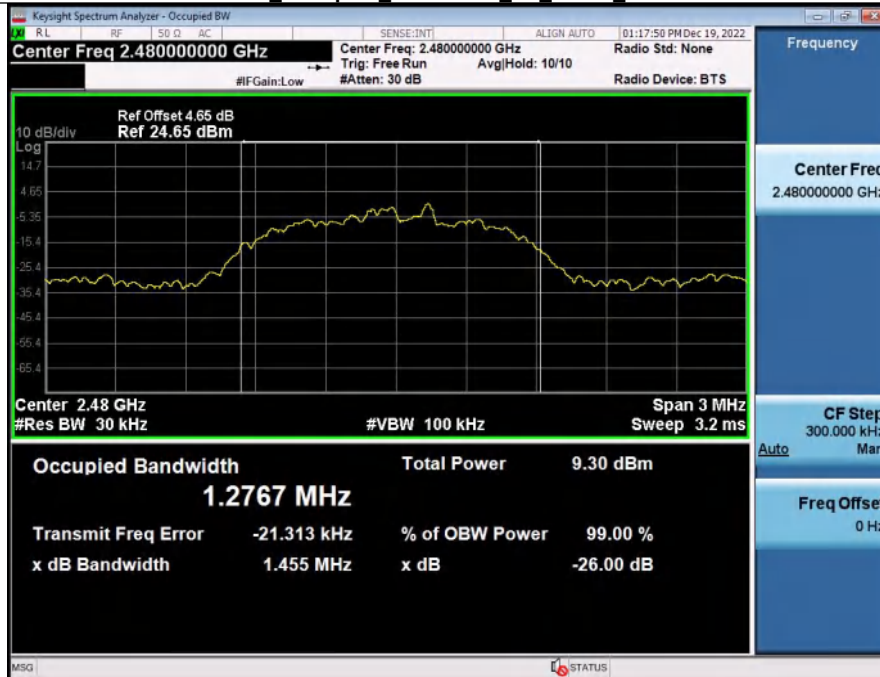


### 13.3. PEAK OUTPUT POWER


| Condition | Antenna | Modulation | Frequency (MHz) | Max. Conducted Power(dBm) | Max. Conducted Power(mW) | Limit(mW) | Result |
|-----------|---------|------------|-----------------|---------------------------|--------------------------|-----------|--------|
| NVNT      | ANT1    | 1-DH5      | 2402.00         | 4.46                      | 2.79                     | 125       | Pass   |
| NVNT      | ANT1    | 1-DH5      | 2441.00         | 3.85                      | 2.43                     | 125       | Pass   |
| NVNT      | ANT1    | 1-DH5      | 2480.00         | 3.28                      | 2.13                     | 125       | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2402.00         | 3.82                      | 2.41                     | 125       | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2441.00         | 3.24                      | 2.11                     | 125       | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2480.00         | 2.48                      | 1.77                     | 125       | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2402.00         | 4.20                      | 2.63                     | 125       | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2441.00         | 3.02                      | 2.00                     | 125       | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2480.00         | 2.69                      | 1.86                     | 125       | Pass   |




Peak\_Output\_Power\_BT\_1-DH5\_2441

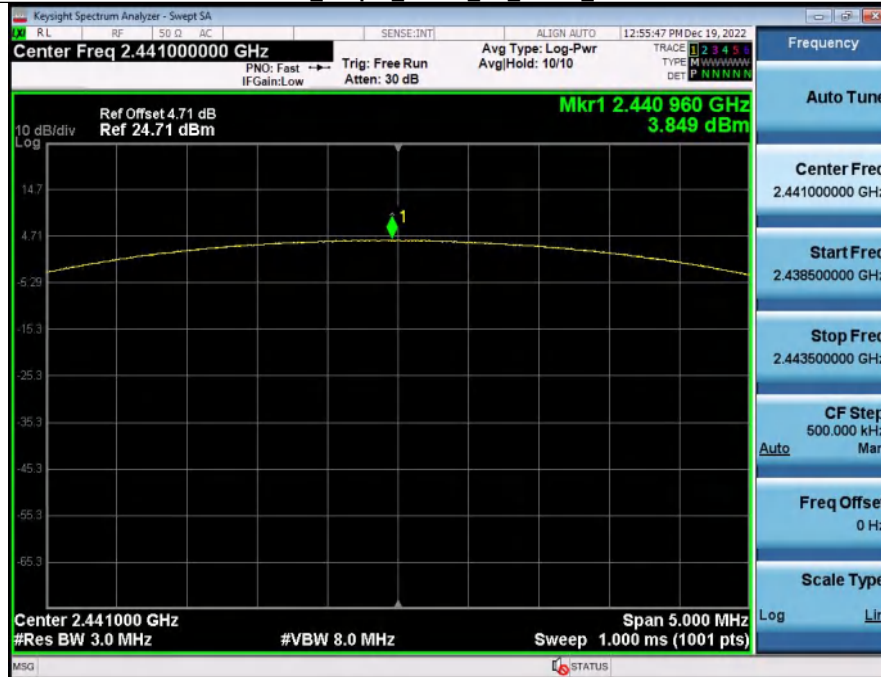


Peak\_Output\_Power\_BT\_1-DH5\_2480

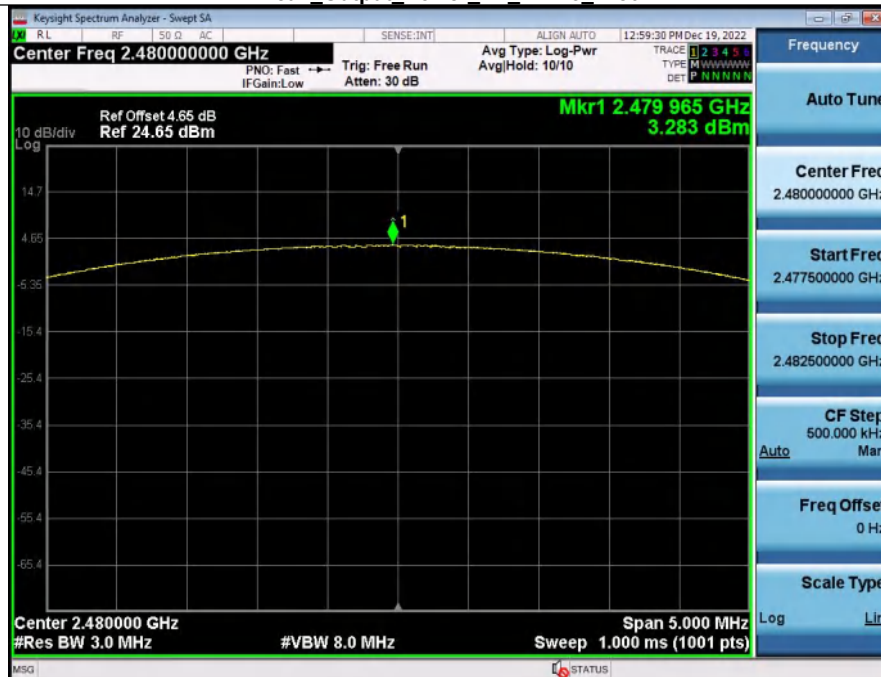


Peak\_Output\_Power\_BT\_2-DH5\_2402

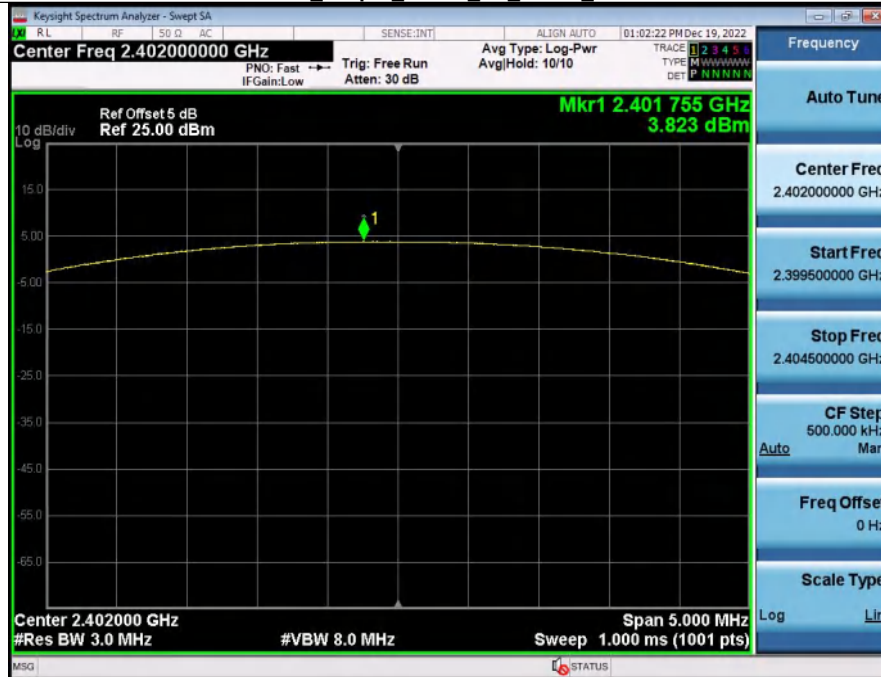


Peak\_Output\_Power\_BT\_2-DH5\_2441

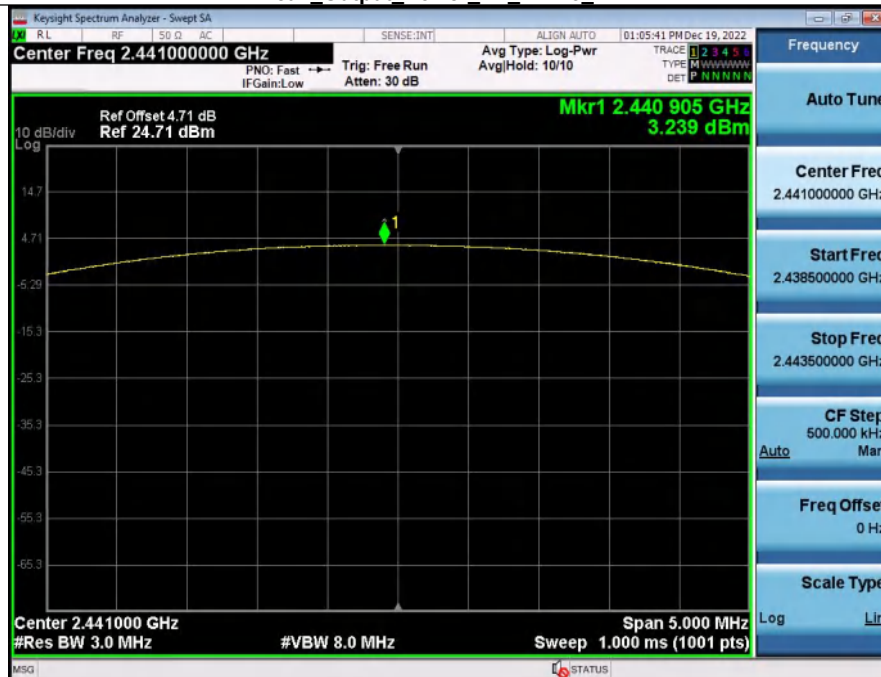


### Peak Output Power BT\_2-DH5\_2480

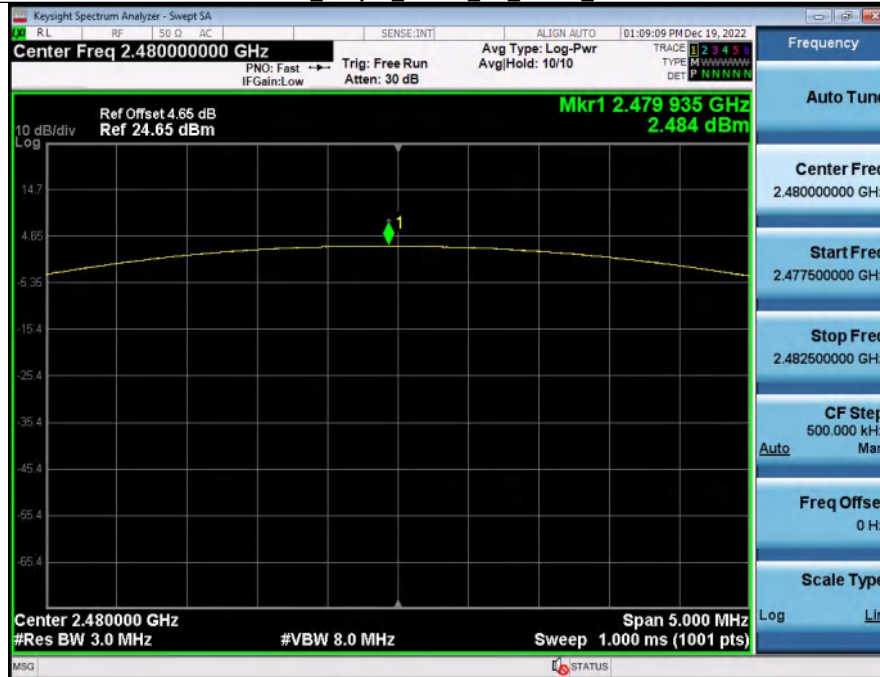


### Peak Output Power BT\_3-DH5\_2402

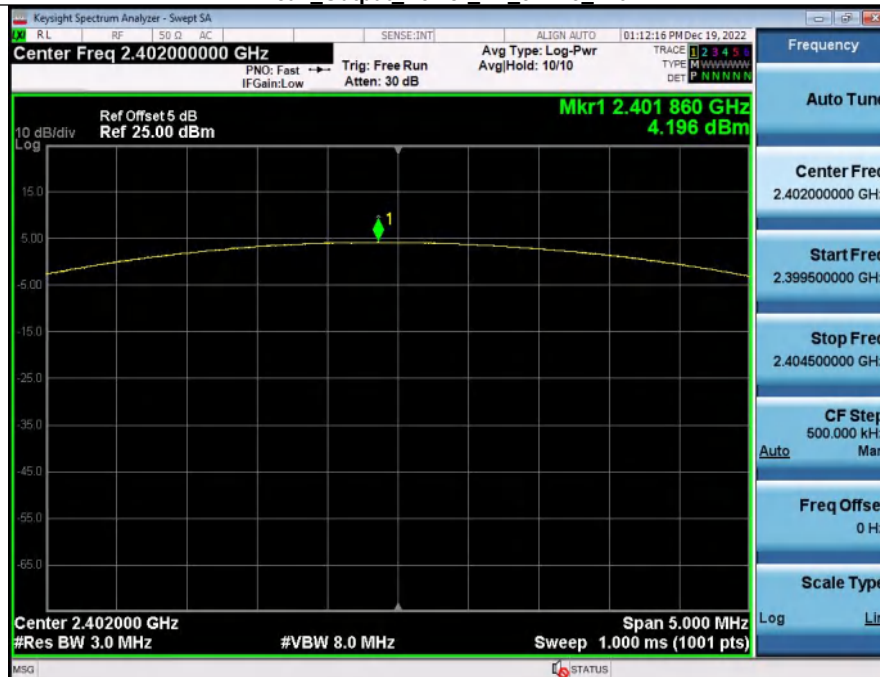

Peak\_Output\_Power\_BT\_3-DH5\_2441

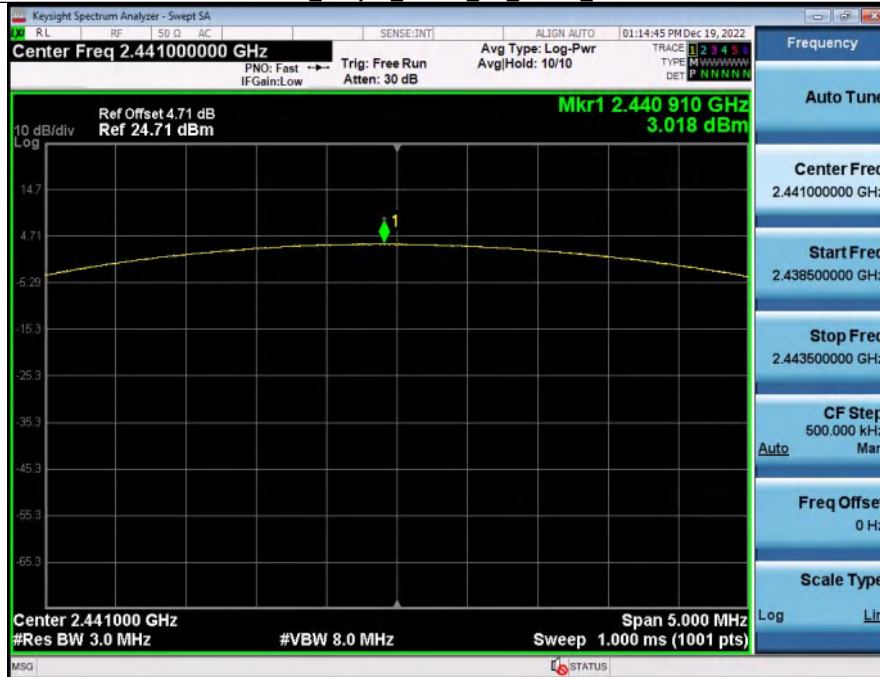

Peak\_Output\_Power\_BT\_3-DH5\_2480

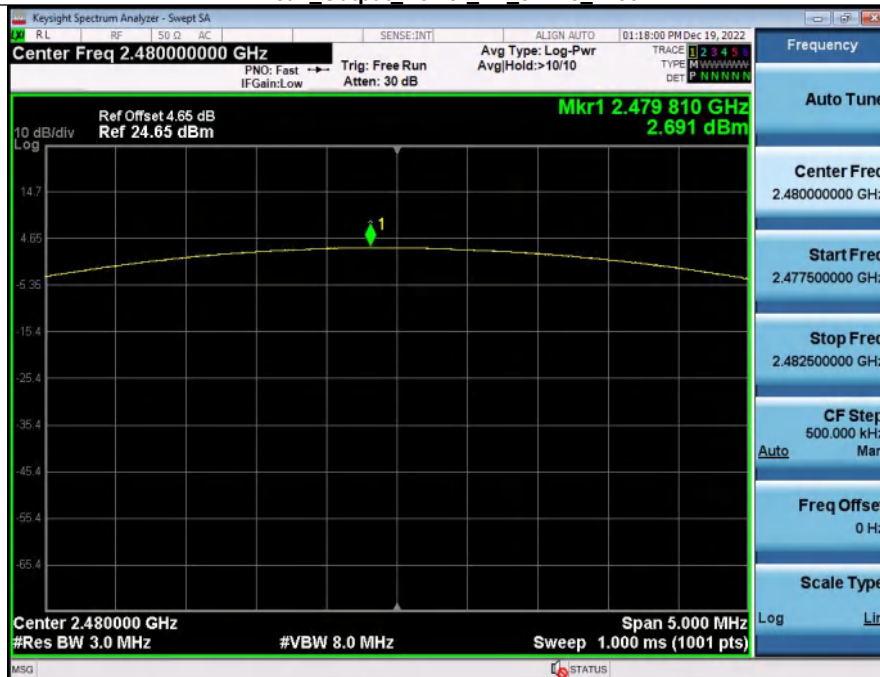


#### 13.4. SPURIOUS EMISSIONS

| Condition | Antenna | Modulation | TX Mode | Spurious MAX.Value(dBm) | Limit  | Result |
|-----------|---------|------------|---------|-------------------------|--------|--------|
| NVNT      | ANT1    | 1-DH5      | 2402.00 | -39.27                  | -15.90 | Pass   |
| NVNT      | ANT1    | 1-DH5      | 2441.00 | -40.61                  | -16.61 | Pass   |
| NVNT      | ANT1    | 1-DH5      | 2480.00 | -40.21                  | -17.32 | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2402.00 | -39.56                  | -18.90 | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2441.00 | -40.65                  | -19.08 | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2480.00 | -40.42                  | -19.17 | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2402.00 | -40.26                  | -19.48 | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2441.00 | -40.14                  | -19.24 | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2480.00 | -39.26                  | -19.18 | Pass   |

1 Reference Level BT 1-DH5 2402




2 Spurious Emissions BT 1-DH5 2402

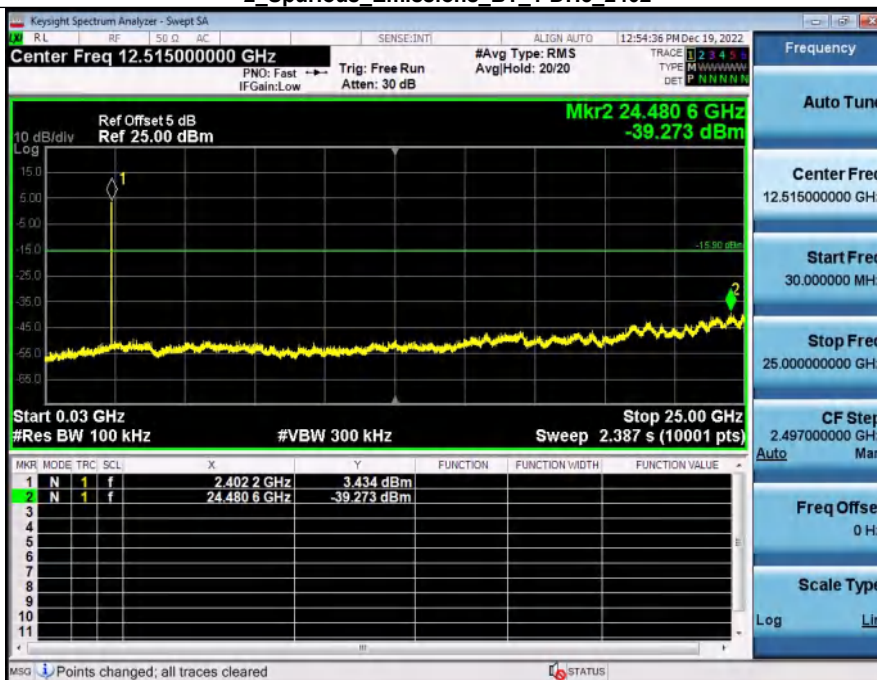


1 Reference Level BT 1-DH5 2441




## 2\_Spurious\_Emissions\_BT\_1-DH5\_2441

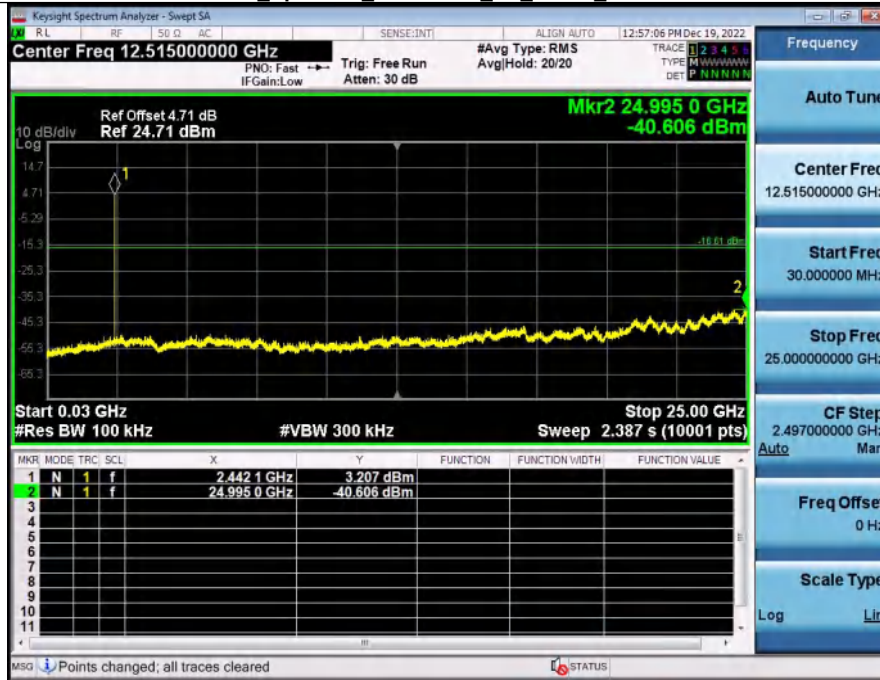

### 1\_Reference\_Level\_BT\_1-DH5\_2480

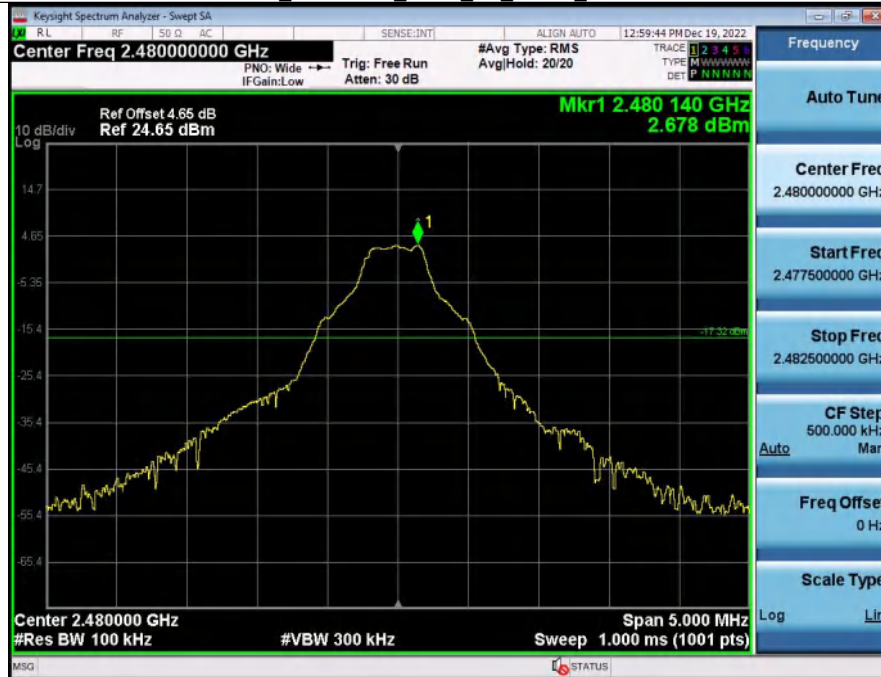


### 2\_Spurious\_Emissions\_BT\_1-DH5\_2480

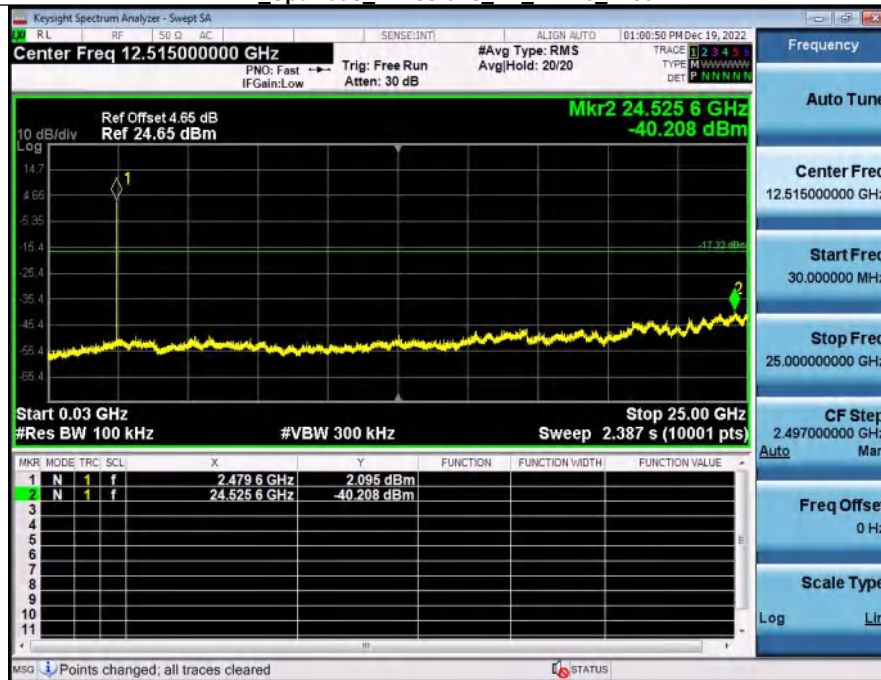

### 1 Reference Level BT 2-DH5 2402




### 2 Spurious Emissions BT 2-DH5 2402

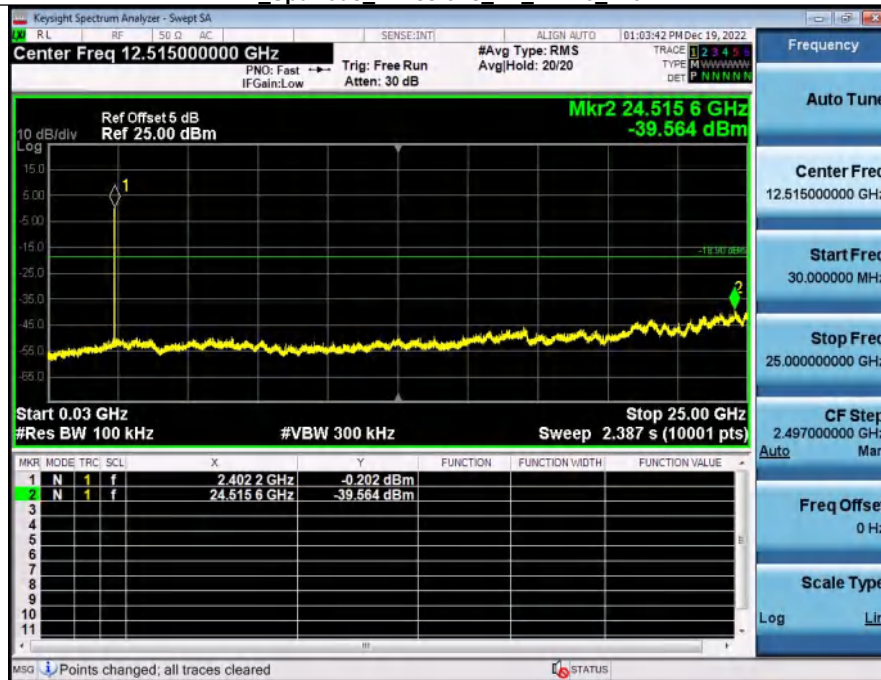

### 1 Reference Level BT 2-DH5 2441




### 2 Spurious Emissions BT 2-DH5 2441

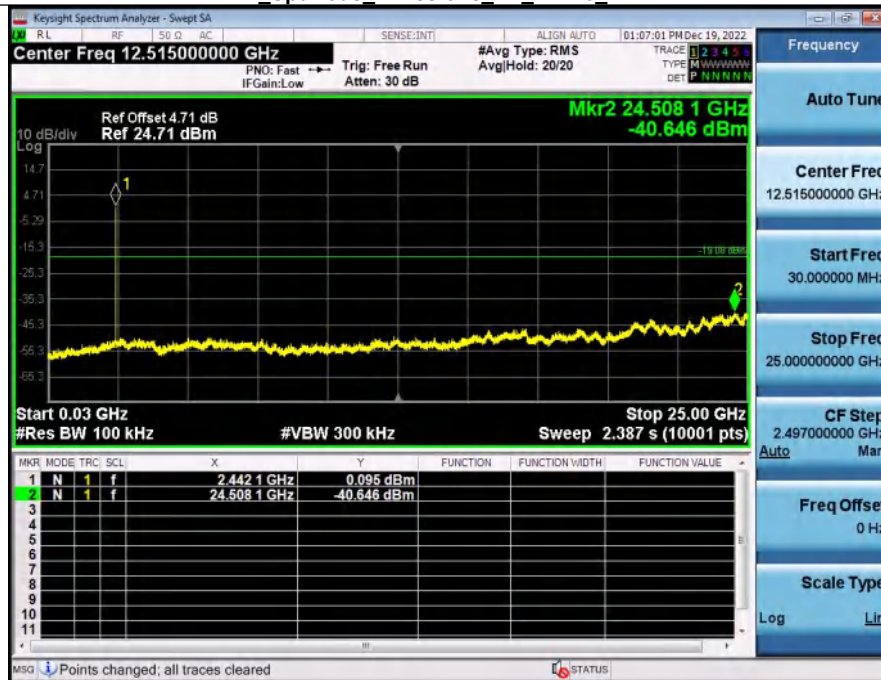

### 1 Reference Level BT 2-DH5 2480




### 2 Spurious Emissions BT 2-DH5 2480

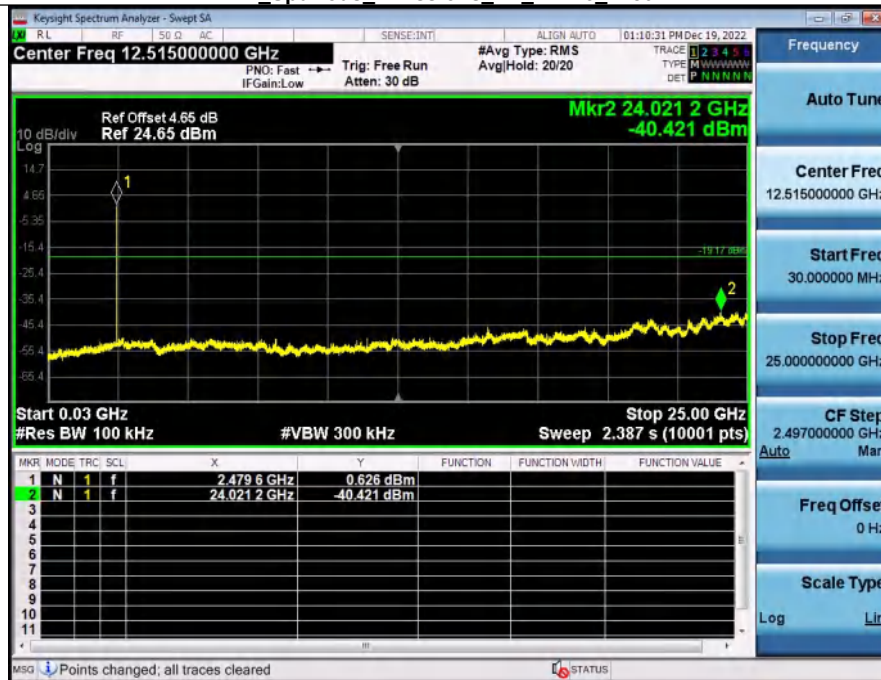

1 Reference Level BT 3-DH5 2402




2 Spurious Emissions BT 3-DH5 2402

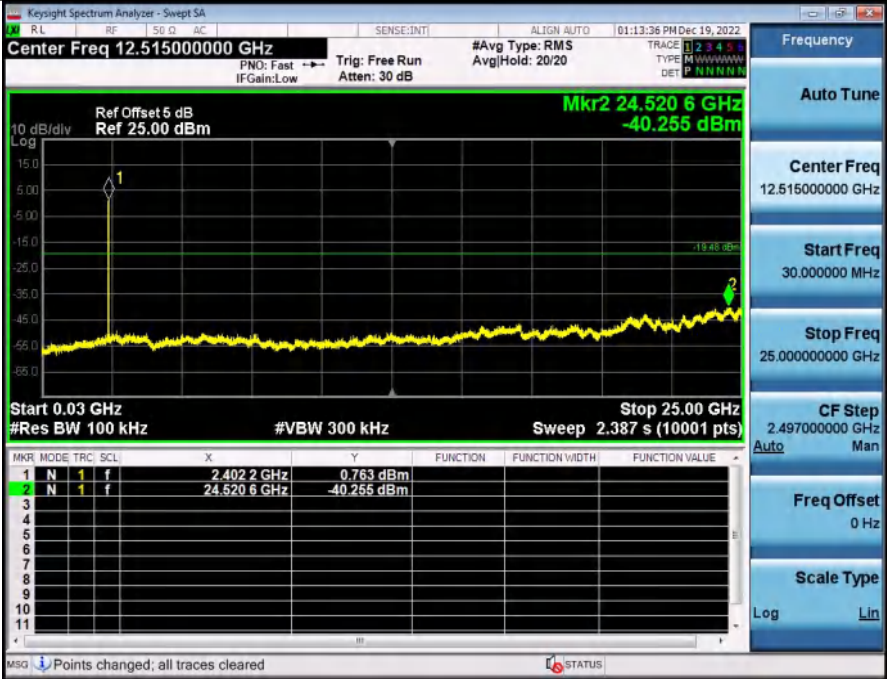


### 1 Reference Level BT 3-DH5 2441




### 2 Spurious Emissions BT 3-DH5 2441

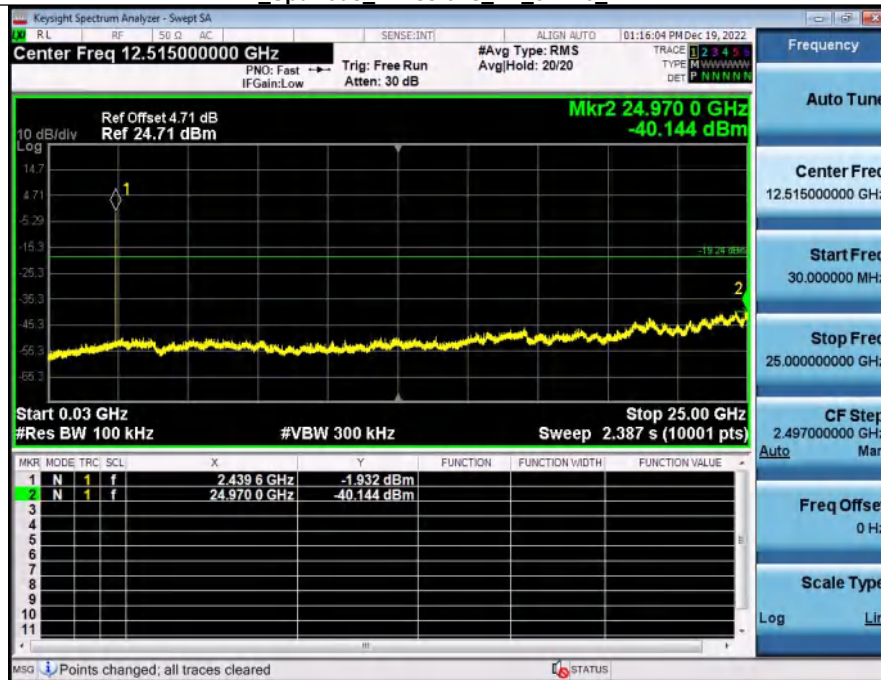

### 1 Reference Level BT 3-DH5 2480

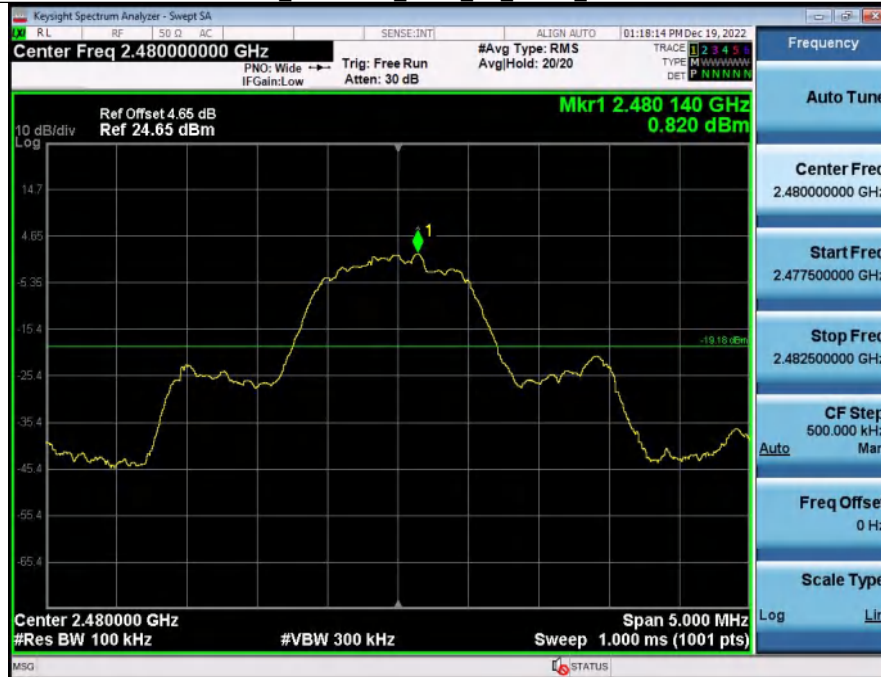

### 2 Spurious Emissions BT 3-DH5 2480

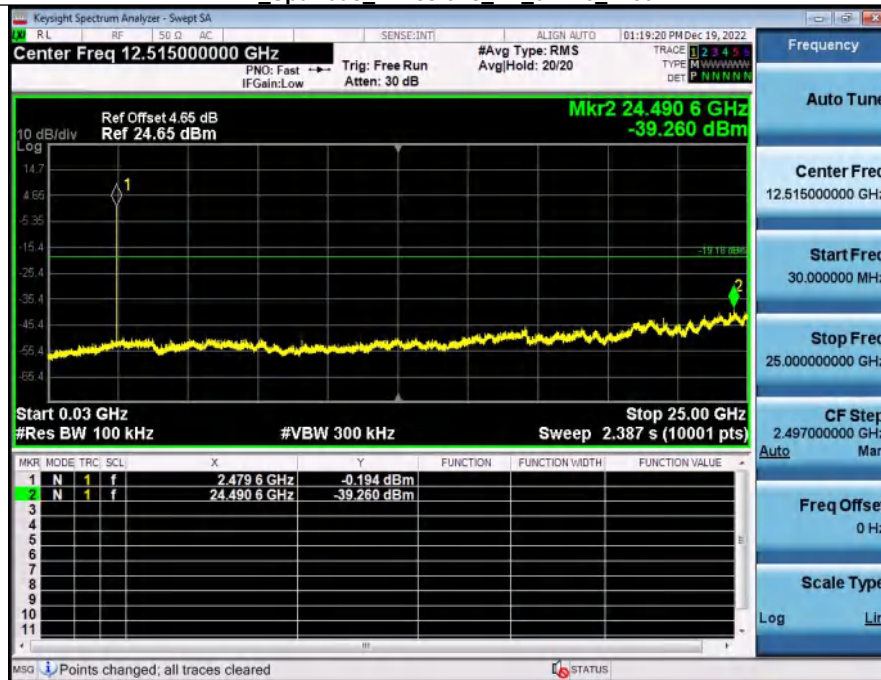


### 13.5. BANDEDGE

| Condition | Antenna | Modulation | TX Mode     | Bandedge MAX.Value | Limit  | Result |
|-----------|---------|------------|-------------|--------------------|--------|--------|
| NVNT      | ANT1    | 1-DH5      | 2402.00     | -52.10             | -15.90 | Pass   |
| NVNT      | ANT1    | 1-DH5      | Hopping_LCH | -51.69             | -16.27 | Pass   |
| NVNT      | ANT1    | 1-DH5      | 2480.00     | -52.26             | -17.32 | Pass   |
| NVNT      | ANT1    | 1-DH5      | Hopping_HCH | -52.28             | -16.84 | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2402.00     | -46.19             | -18.90 | Pass   |
| NVNT      | ANT1    | 2-DH5      | Hopping_LCH | -49.37             | -19.69 | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2480.00     | -50.07             | -19.17 | Pass   |
| NVNT      | ANT1    | 2-DH5      | Hopping_HCH | -51.74             | -19.29 | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2402.00     | -46.69             | -19.48 | Pass   |
| NVNT      | ANT1    | 3-DH5      | Hopping_LCH | -48.98             | -19.16 | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2480.00     | -50.19             | -19.18 | Pass   |
| NVNT      | ANT1    | 3-DH5      | Hopping_HCH | -52.25             | -19.53 | Pass   |


1\_Reference\_Level\_BT\_1-DH5\_2402




2\_Bandedge\_BT\_1-DH5\_2402

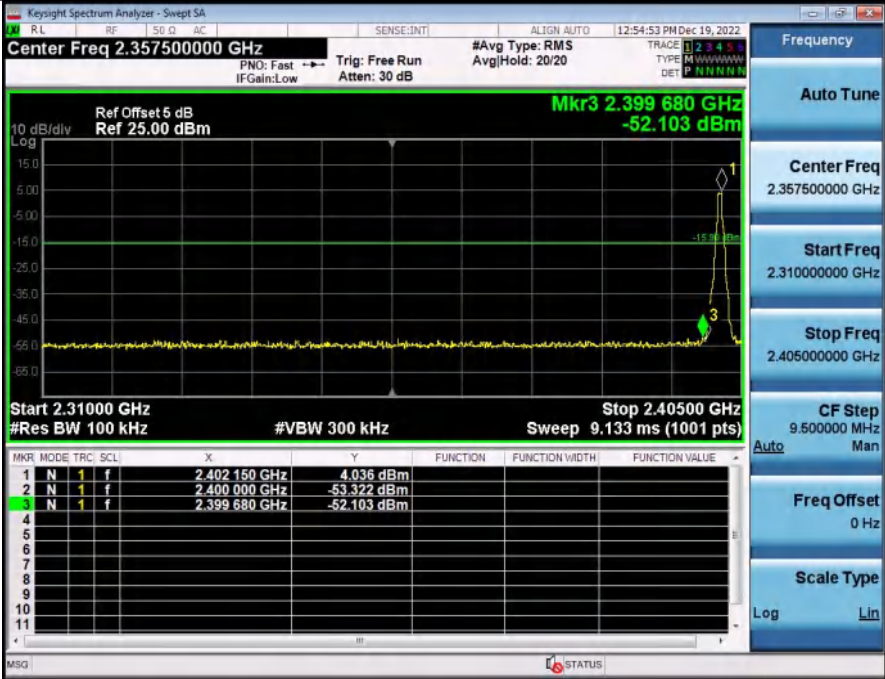

1 Reference\_Level\_BT\_1-DH5\_Hopping

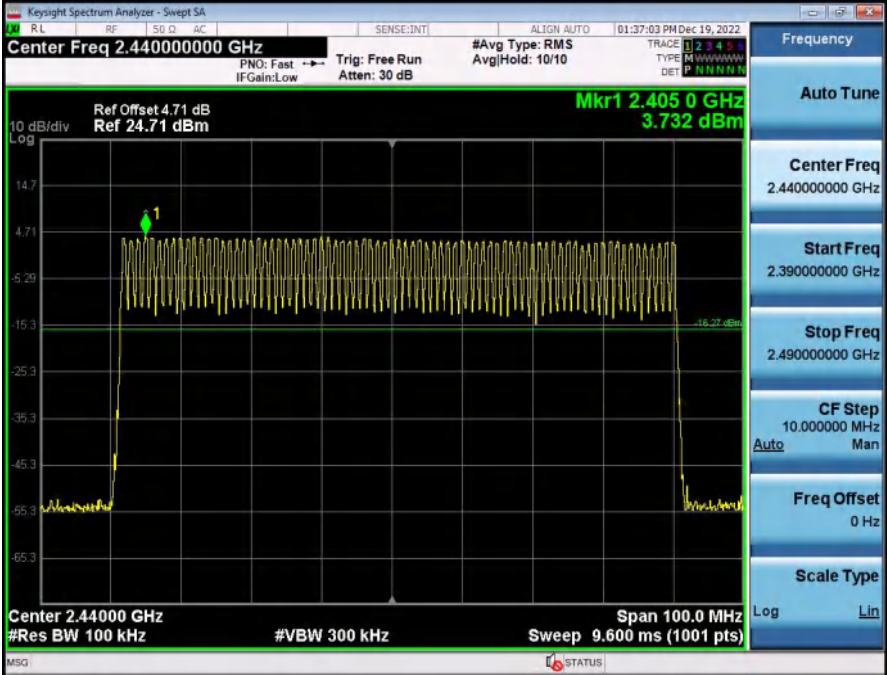


2 Band Edge (Hopping) BT 1-DH5\_Hopping

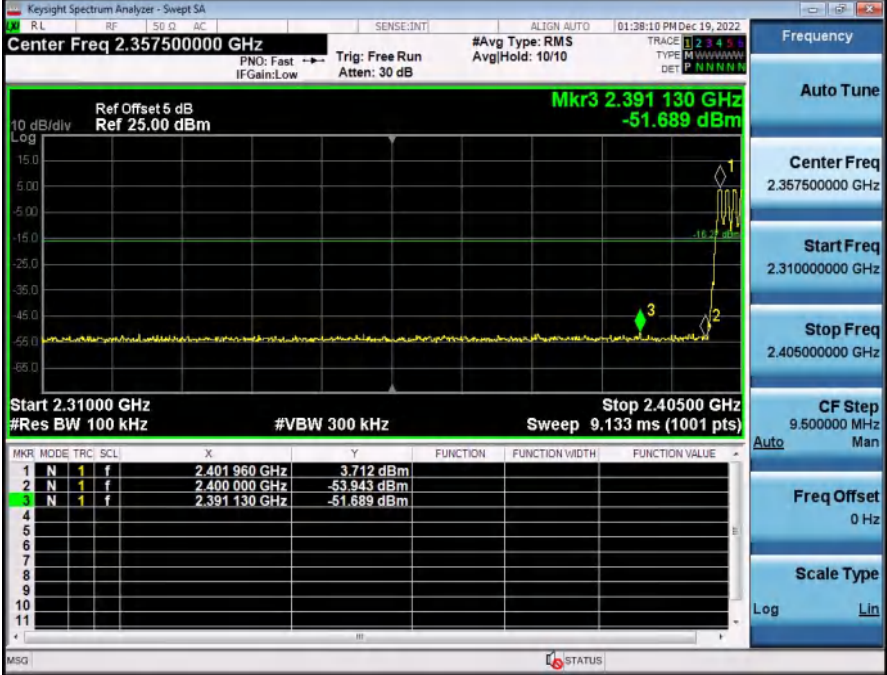


1\_Reference\_Level\_BT\_1-DH5\_2480




2\_Bandedge\_BT\_1-DH5\_2480

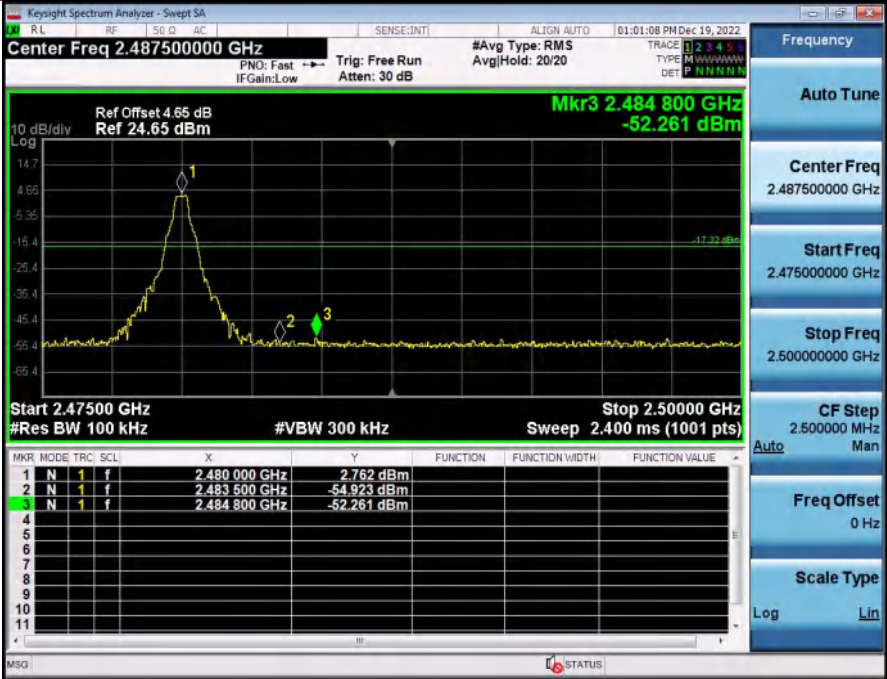

### 1 Reference\_Level\_BT\_1-DH5\_Hopping

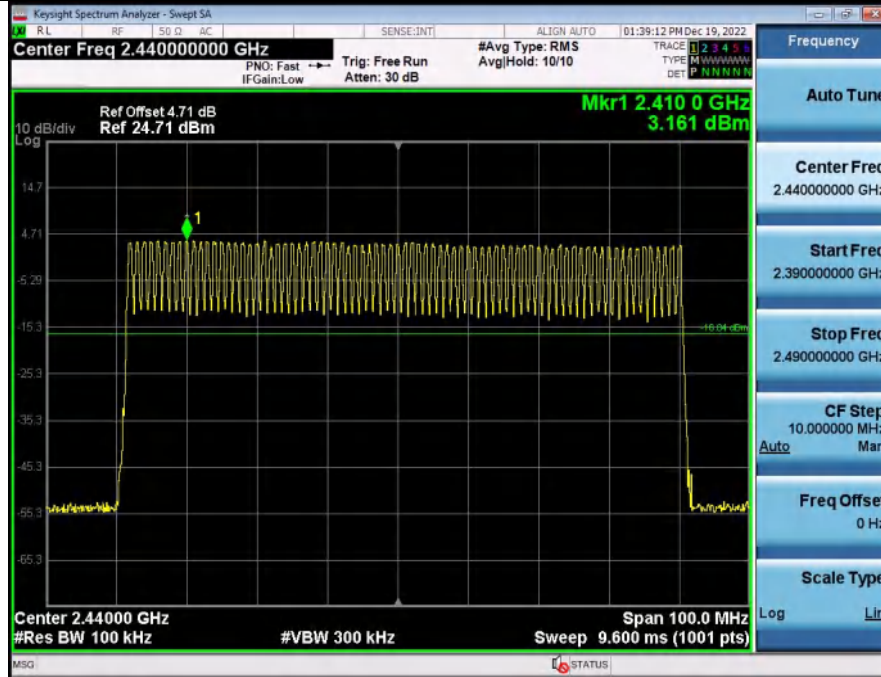


### 2 Band Edge (Hopping) BT 1-DH5\_Hopping

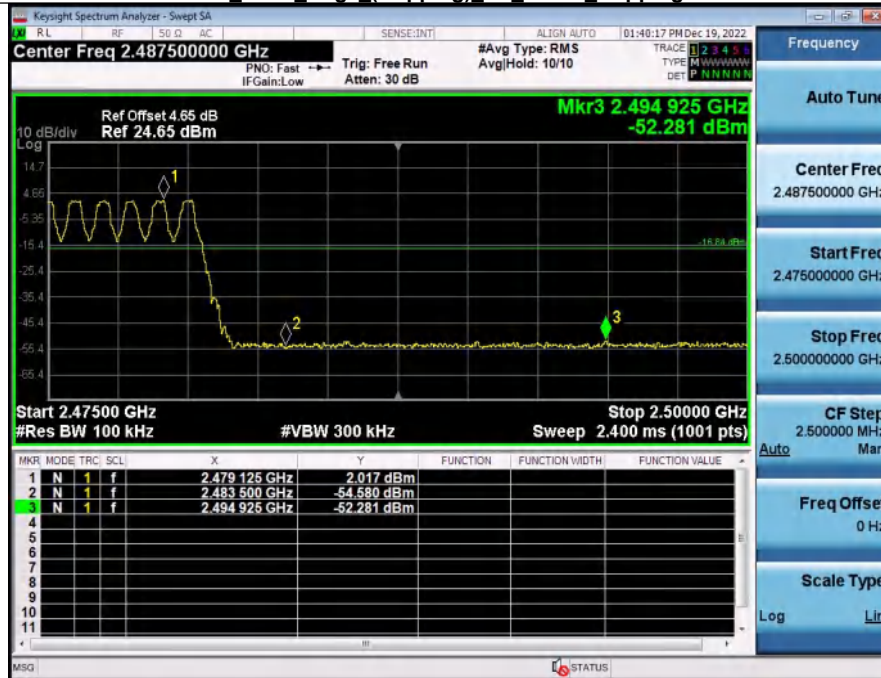


### 1 Reference Level BT 2-DH5 2402




### 2 Bandedge BT 2-DH5 2402

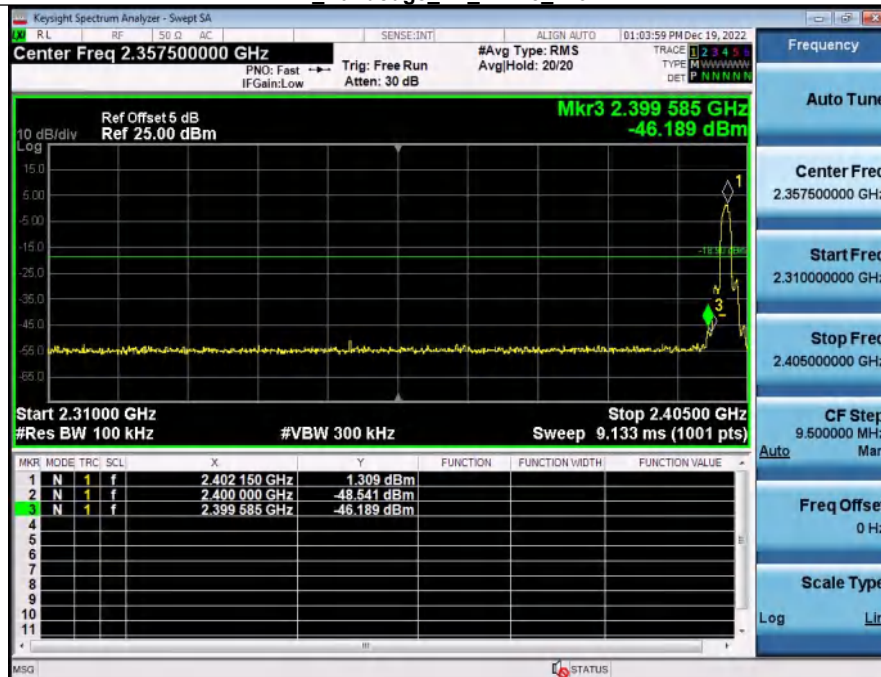

1 Reference\_Level\_BT\_2-DH5\_Hopping

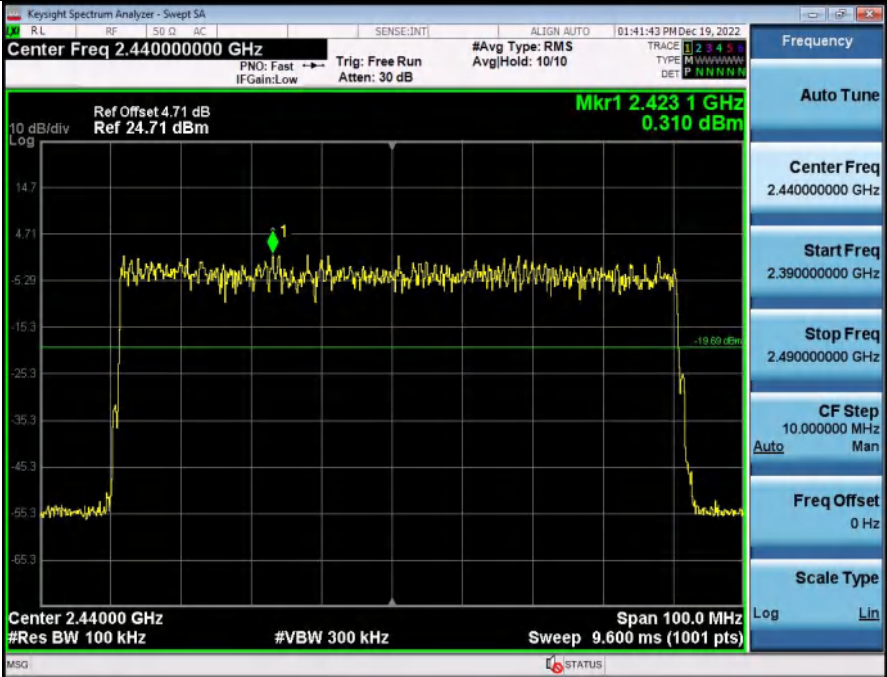

2 Band Edge (Hopping) BT 2-DH5 Hopping

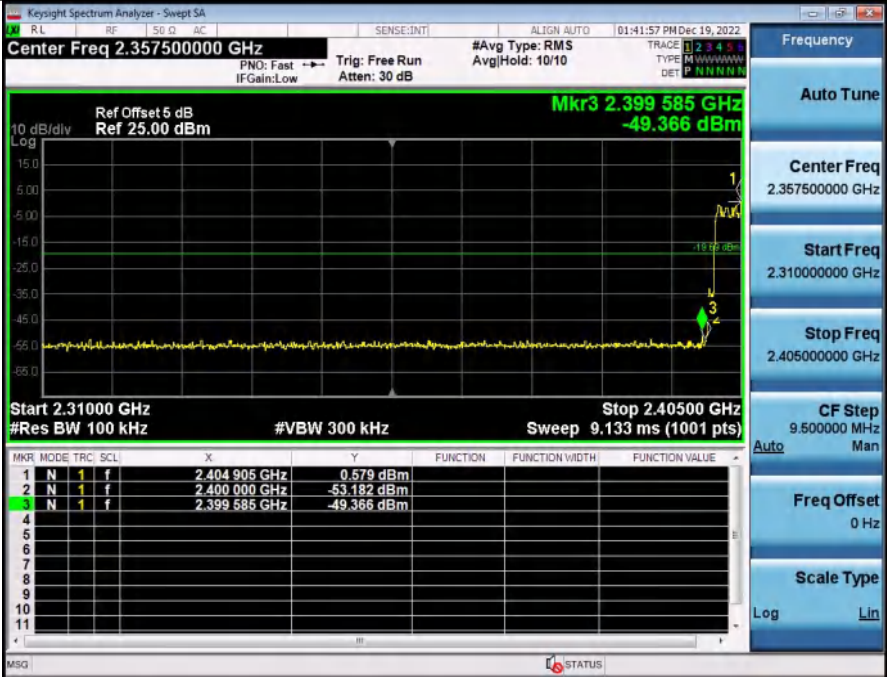


### 1 Reference Level BT 2-DH5 2480



### 2 Bandedge BT 2-DH5 2480




1 Reference\_Level\_BT\_2-DH5\_Hopping

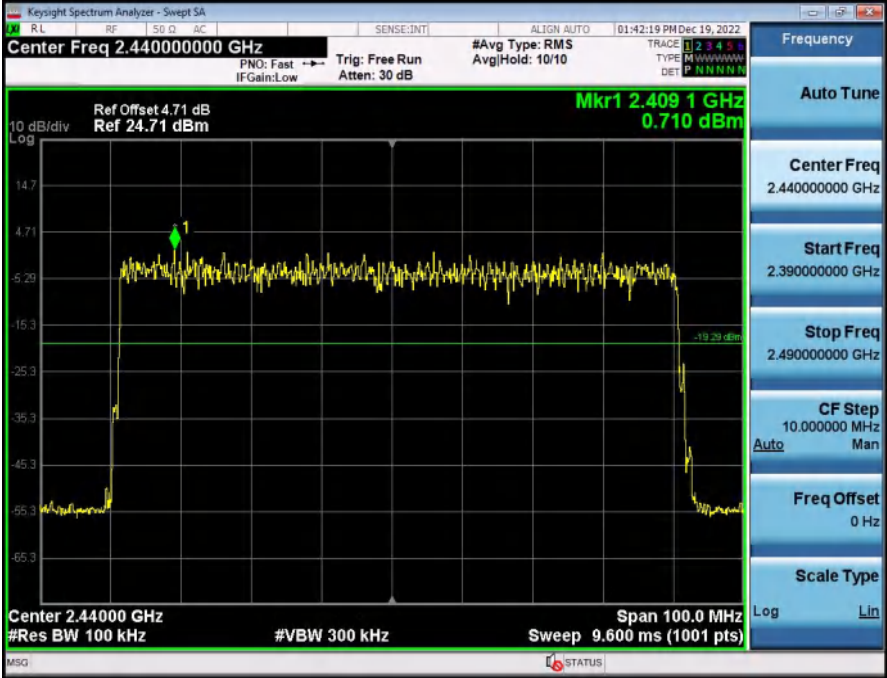


2 Band Edge (Hopping) BT 2-DH5 Hopping




### 1 Reference Level BT\_3-DH5\_2402

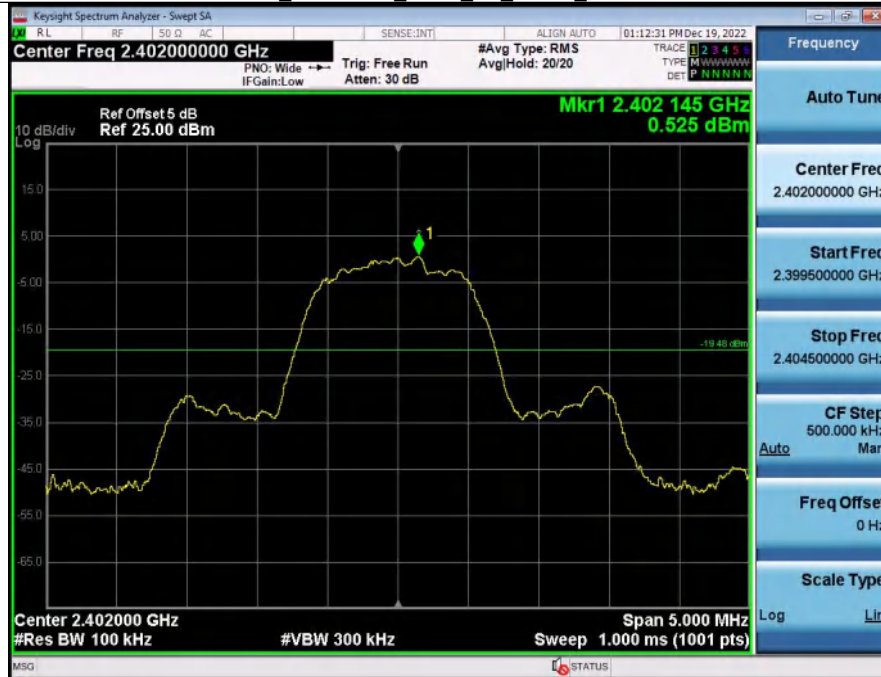


### 2 Bandedge BT\_3-DH5\_2402

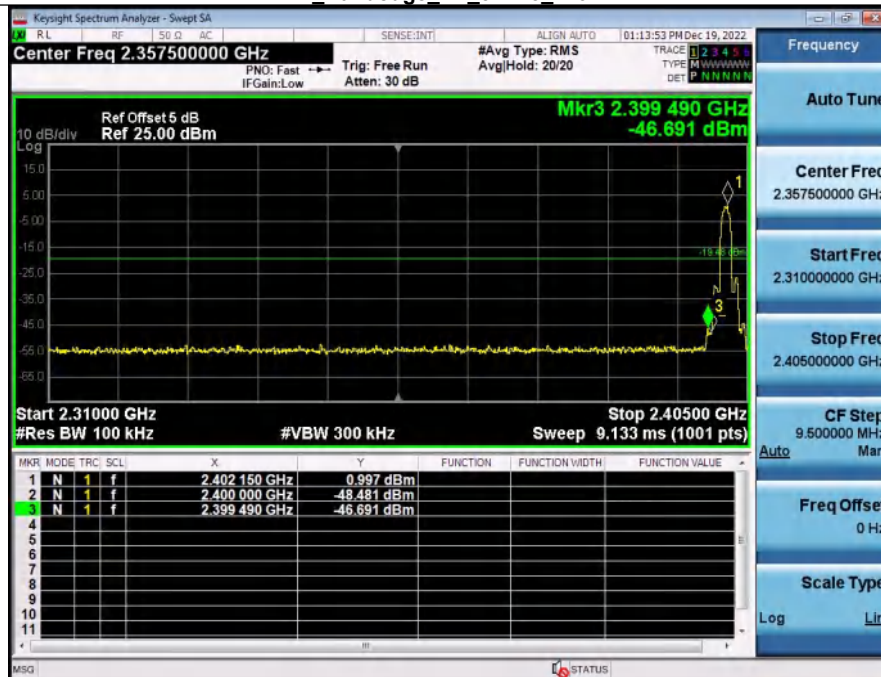

1 Reference\_Level\_BT\_3-DH5\_Hopping

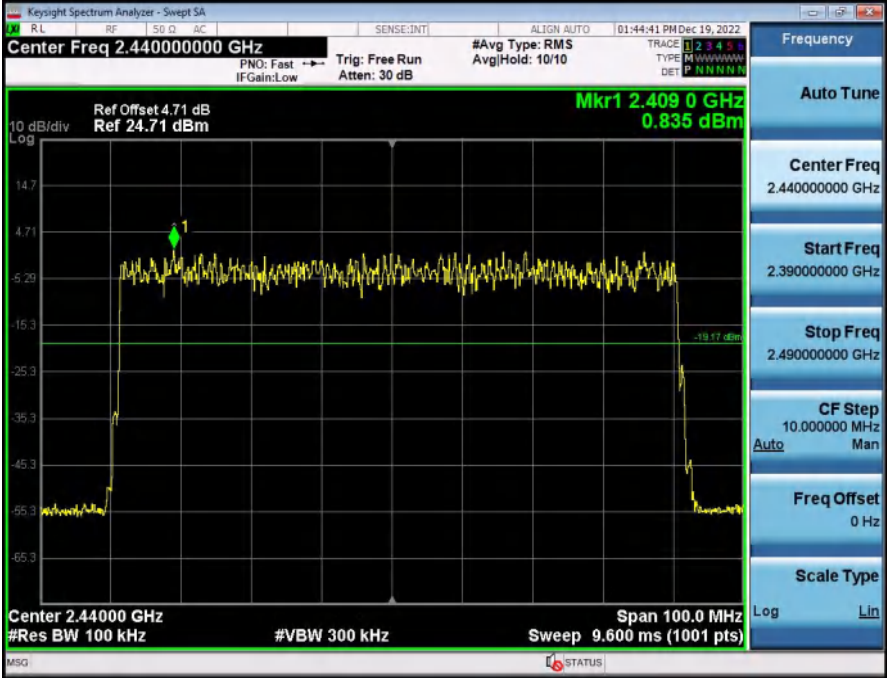

2 Band Edge (Hopping) BT 3-DH5 Hopping

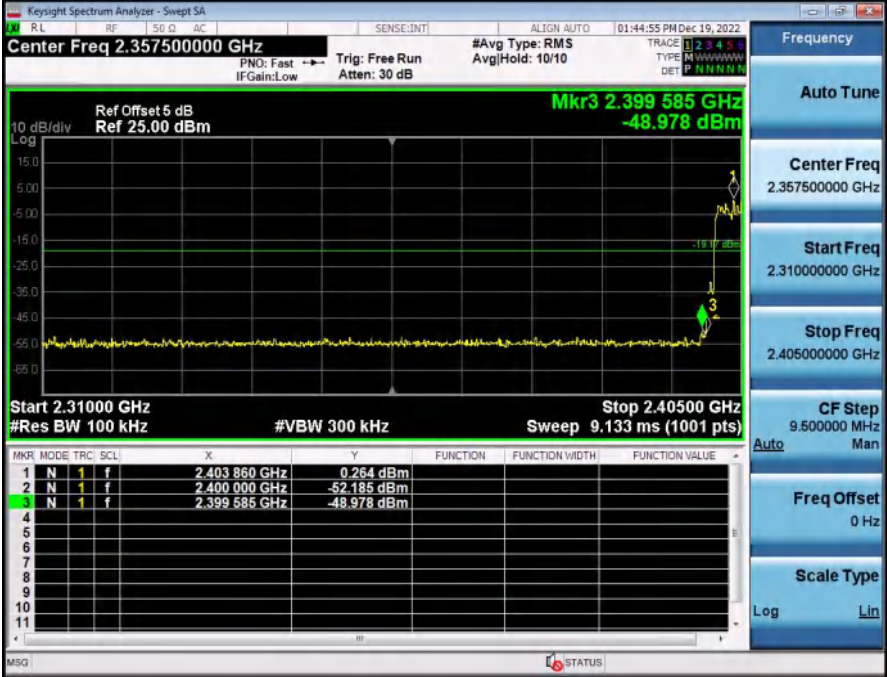


1 Reference Level BT\_3-DH5\_2480




2 Bandedge BT\_3-DH5\_2480



1 Reference\_Level\_BT\_3-DH5\_Hopping

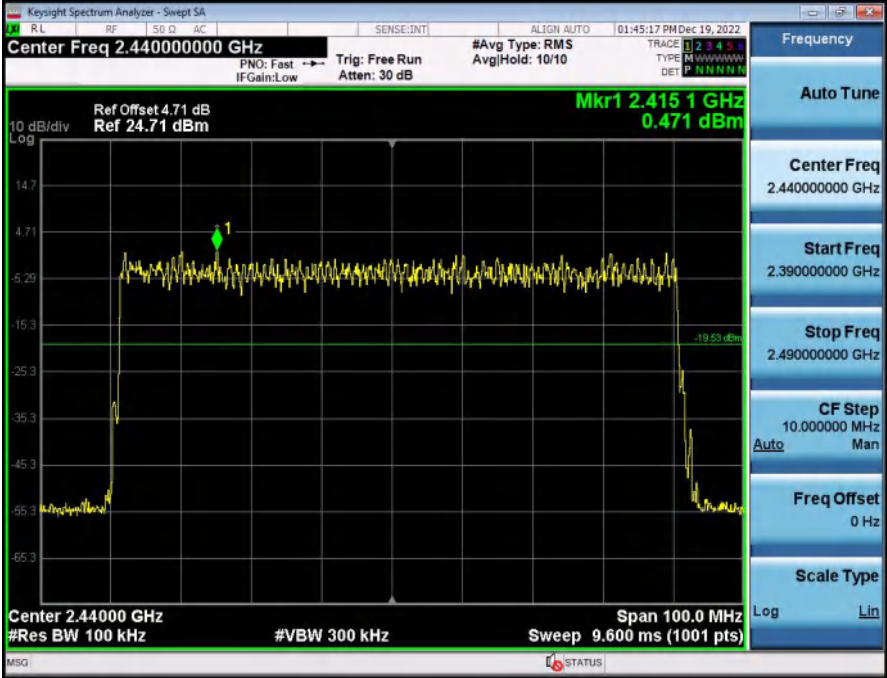

2 Band Edge (Hopping) BT 3-DH5 Hopping

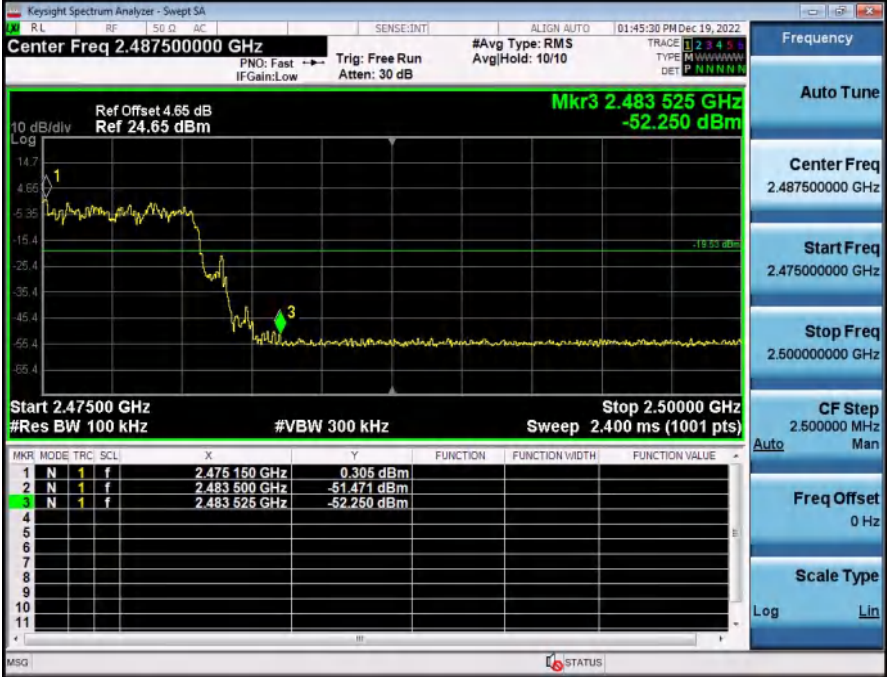

### 13.6. CARRIER FREQUENCIES SEPARATION (HOPPING)

| Condition | Antenna | Modulation | Frequency(MHz) | Hopping NO.0 (MHz) | Hopping NO.1 (MHz) | Carrier Frequencies Separation(MHz) | Limit(MHz) | Result |
|-----------|---------|------------|----------------|--------------------|--------------------|-------------------------------------|------------|--------|
| NVNT      | ANT1    | 1-DH5      | 2402.00        | 2401.981           | 2402.992           | 1.01                                | 0.676      | Pass   |
| NVNT      | ANT1    | 2-DH5      | 2402.00        | 2401.960           | 2402.998           | 1.04                                | 0.904      | Pass   |
| NVNT      | ANT1    | 3-DH5      | 2402.00        | 2401.891           | 2402.887           | 1.00                                | 0.877      | Pass   |

Carrier\_Frequencies\_Separation\_(Hopping)\_BT\_1-DH5\_Hopping





Carrier\_Frequencies\_Separation\_(Hopping)\_BT\_2-DH5\_Hopping






### 13.7. NUMBER OF HOPPING CHANNEL (HOPPING)


| Condition | Antenna | Modulation | Hopping Num | Limit | Result |
|-----------|---------|------------|-------------|-------|--------|
| NVNT      | ANT1    | 1-DH5      | 79          | 15    | Pass   |
| NVNT      | ANT1    | 2-DH5      | 79          | 15    | Pass   |
| NVNT      | ANT1    | 3-DH5      | 79          | 15    | Pass   |

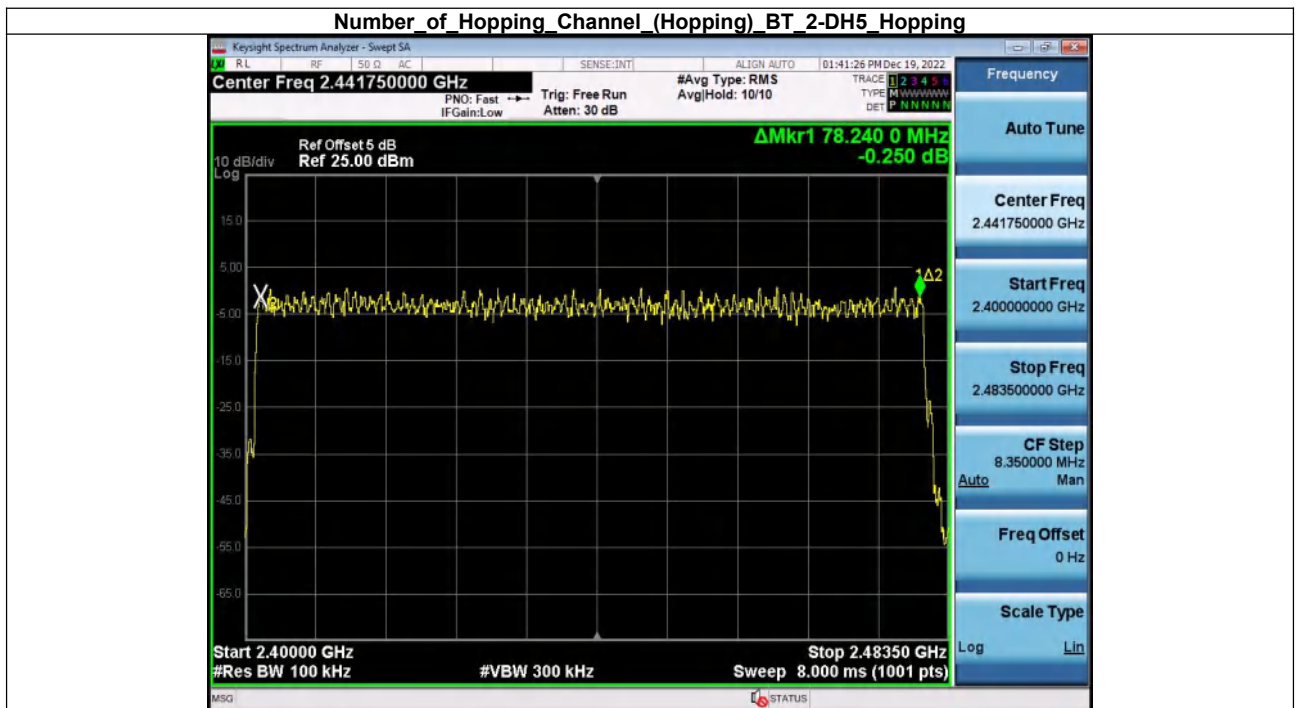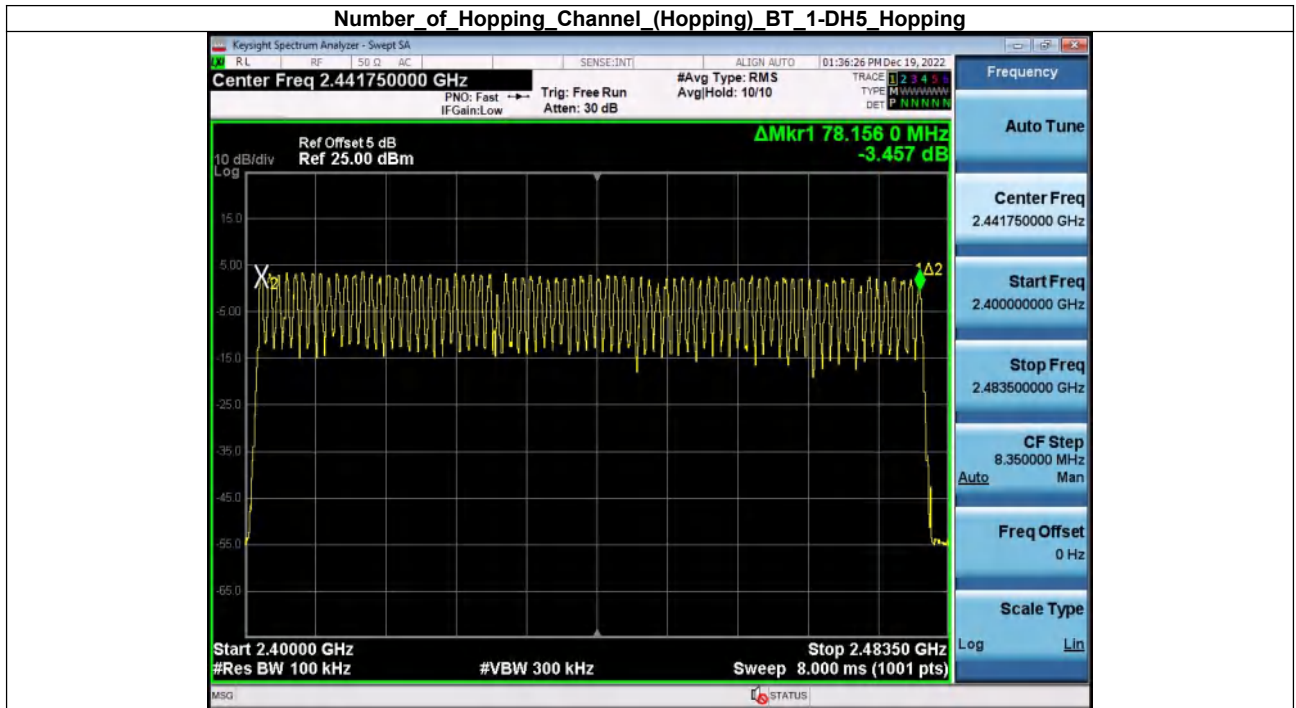

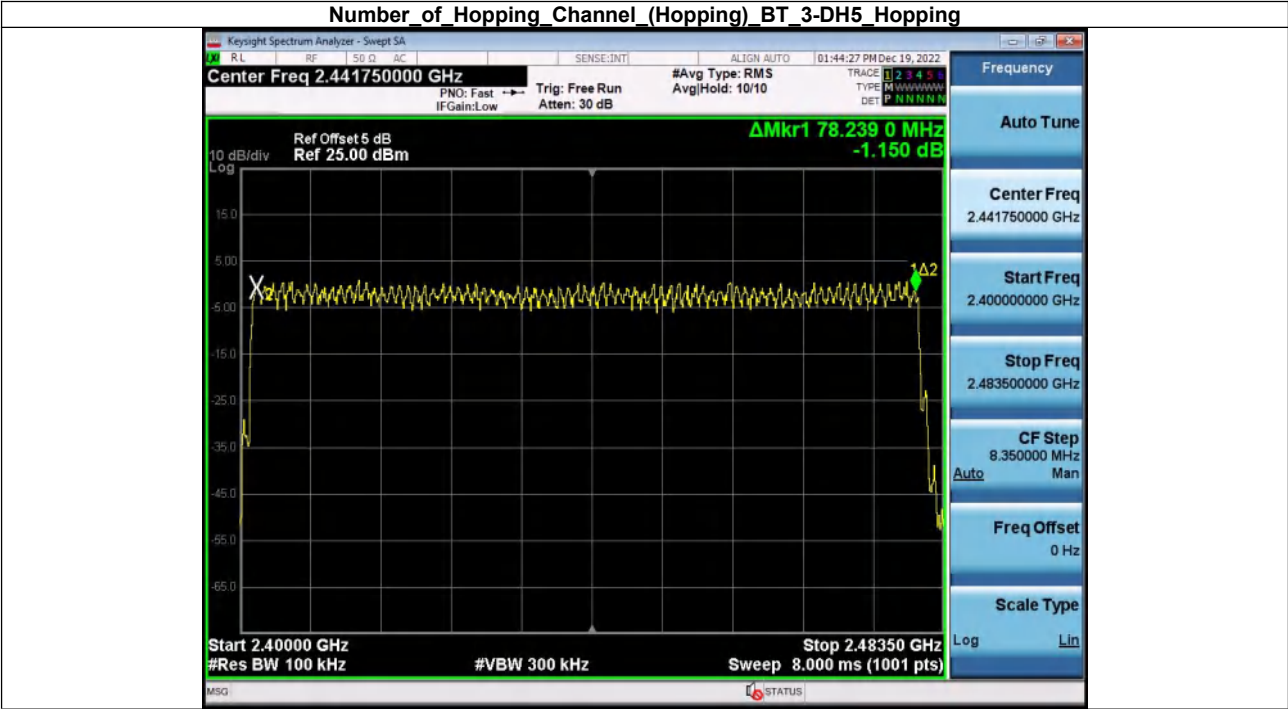


### 13.8 DWELL TIME (HOPPING)


| Condition | Antenna | Packet Type | Pulse Time(ms) | Dwell Time(ms) | Limit(s) | Result |
|-----------|---------|-------------|----------------|----------------|----------|--------|
| NVNT      | ANT1    | 1-DH1       | 0.384          | 122.880        | 0.40     | Pass   |
| NVNT      | ANT1    | 1-DH3       | 1.640          | 262.400        | 0.40     | Pass   |
| NVNT      | ANT1    | 1-DH5       | 2.888          | 308.053        | 0.40     | Pass   |
| NVNT      | ANT1    | 2-DH1       | 0.390          | 124.800        | 0.40     | Pass   |
| NVNT      | ANT1    | 2-DH3       | 1.642          | 262.720        | 0.40     | Pass   |
| NVNT      | ANT1    | 2-DH5       | 2.890          | 308.267        | 0.40     | Pass   |
| NVNT      | ANT1    | 3-DH1       | 0.390          | 124.800        | 0.40     | Pass   |
| NVNT      | ANT1    | 3-DH3       | 1.641          | 262.560        | 0.40     | Pass   |
| NVNT      | ANT1    | 3-DH5       | 2.892          | 308.480        | 0.40     | Pass   |

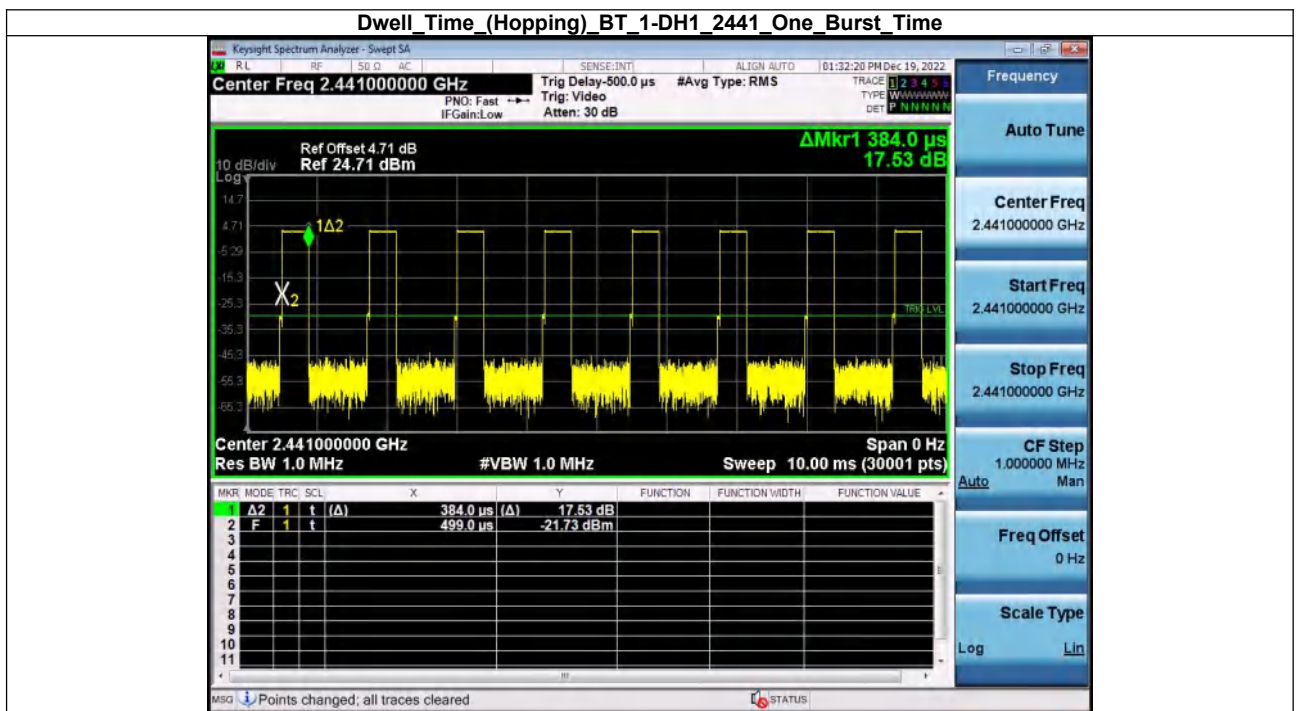


Dwell Time (Hopping) BT\_1-DH3\_2441\_One\_Burst\_Time

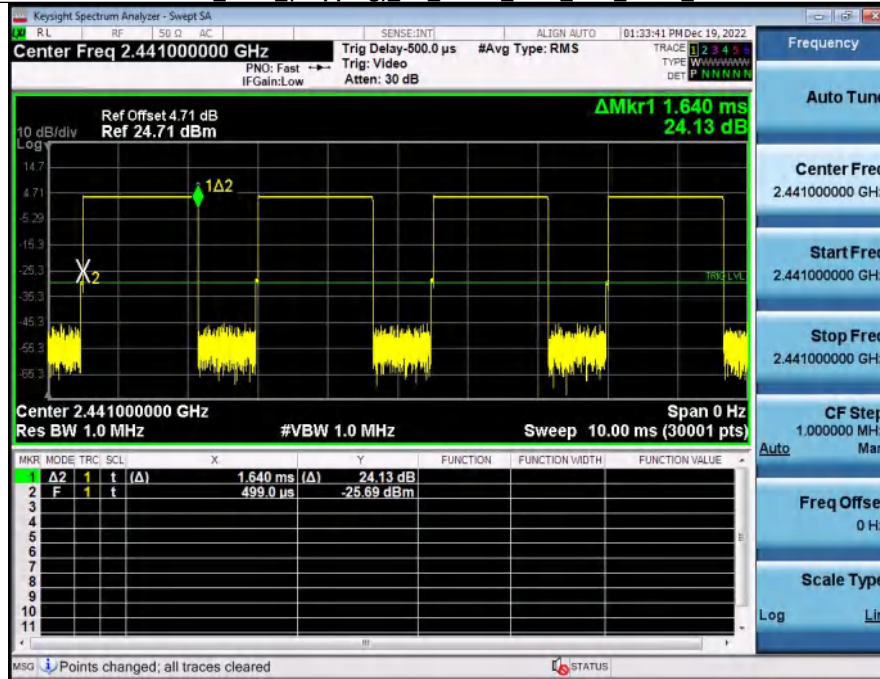


Dwell Time (Hopping) BT\_1-DH5\_2441\_One\_Burst\_Time

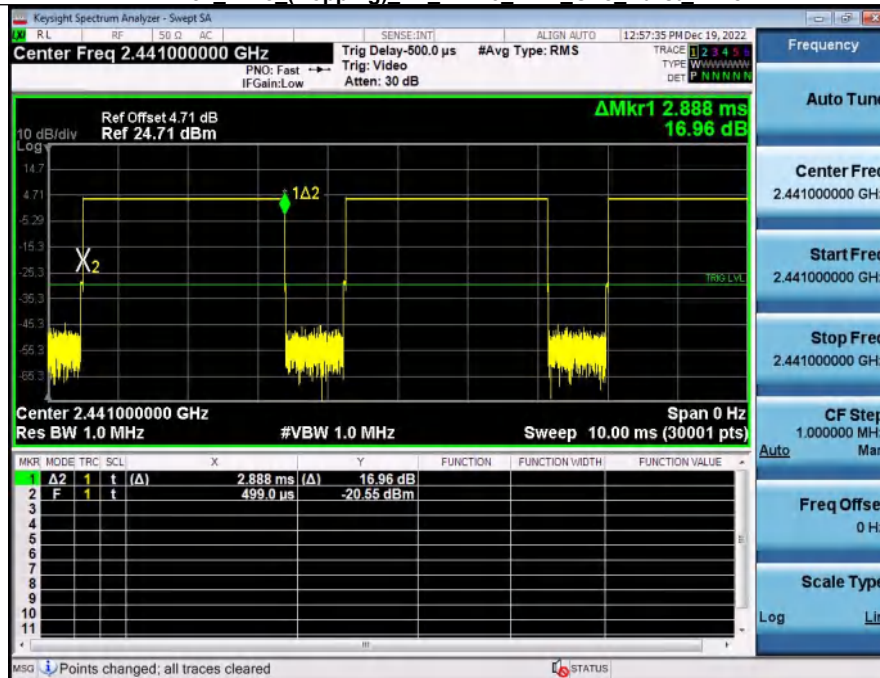


### Dwell Time (Hopping) BT 2-DH1 2441 One Burst Time

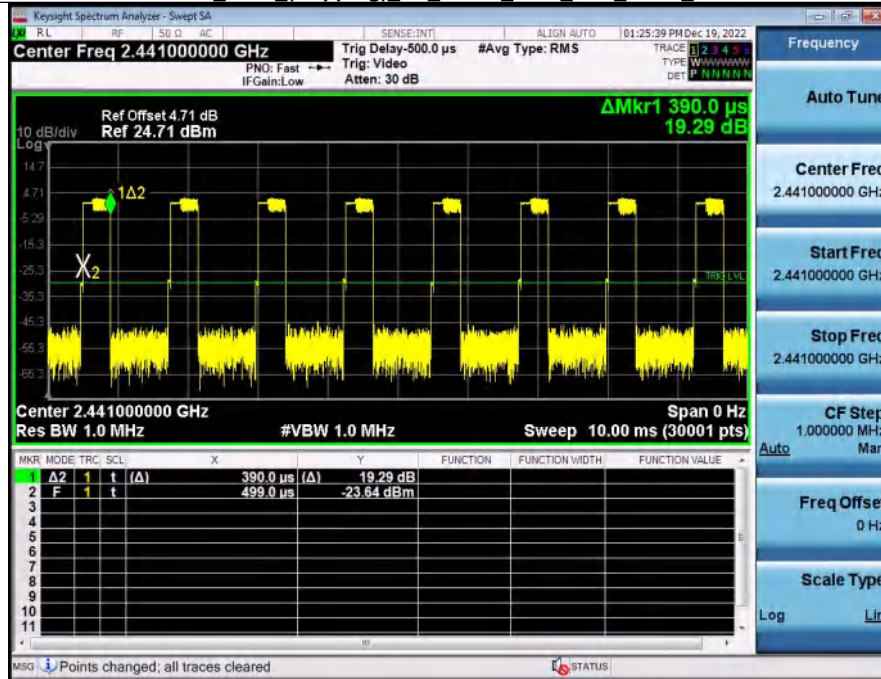


### Dwell Time (Hopping) BT 2-DH3 2441 One Burst Time


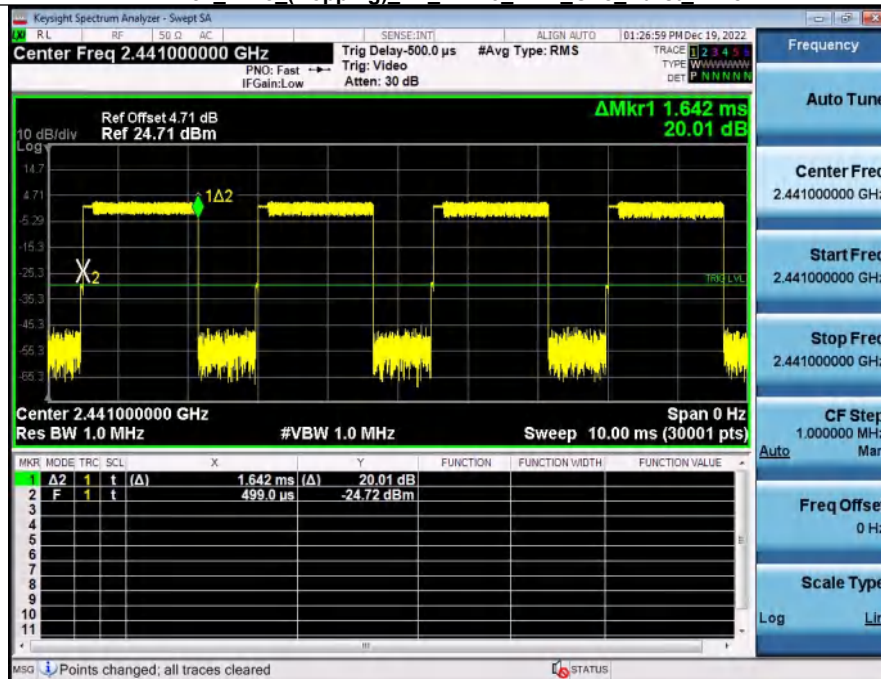


### Dwell Time (Hopping) BT 2-DH5 2441 One Burst Time

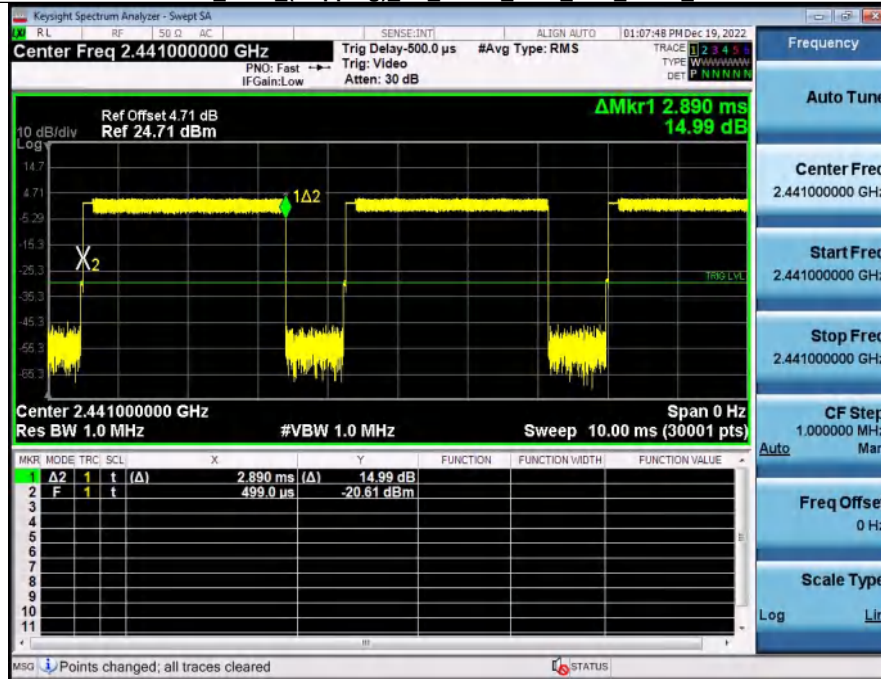

### Dwell Time (Hopping) BT 3-DH1 2441 One Burst Time

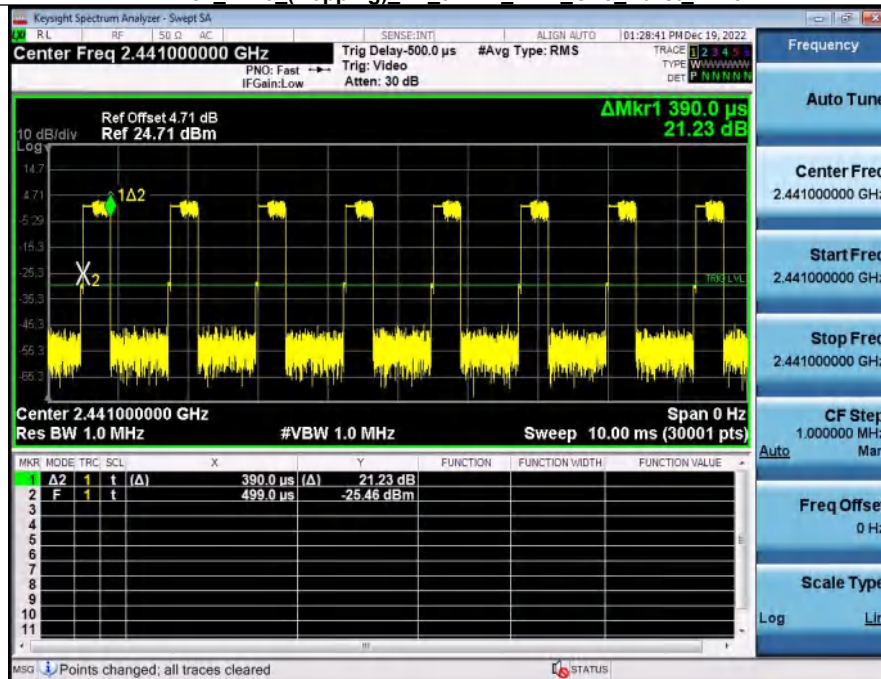

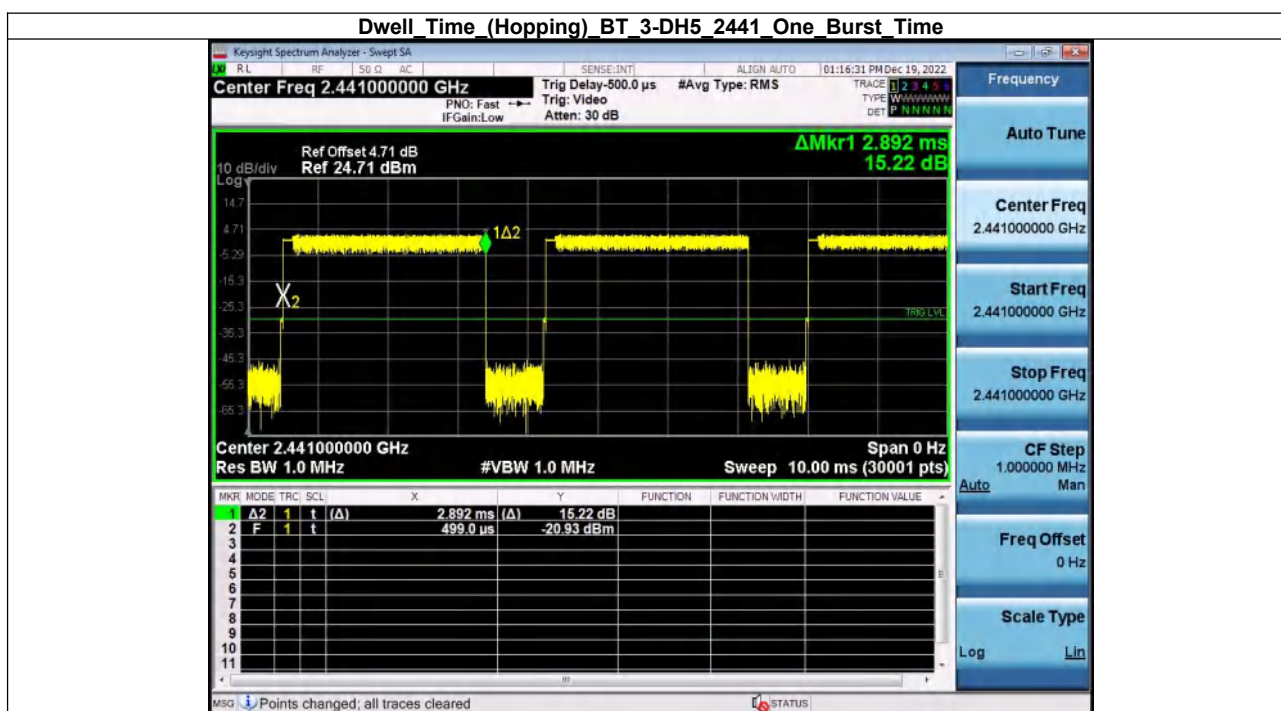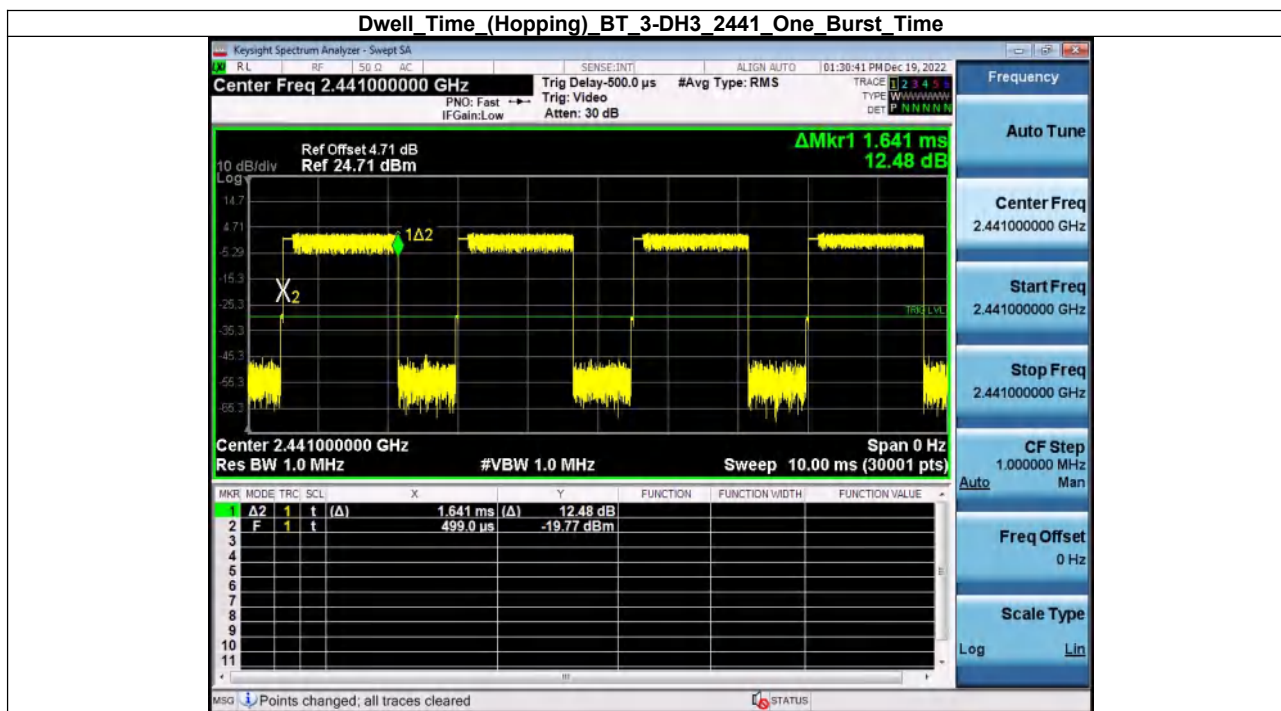

**14. Test Setup Photo**

Please refer to Setup Photo file

**15. EUT Constructional Details**

Please refer to external photos file and internal photos file

**\*\*\*\*\* END OF REPORT \*\*\*\*\***