

FCC TEST REPORT

Client Name : Shenzhen Merpower Electronic Co., Ltd

Address : 715A, Building 8, 1970 Science Park, Mingkang Road,
Longhua, Shenzhen, China

Product Name : Outdoor Power bank

Date : Jul. 05, 2022



Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Code: AB-RF-05-a



Hotline

400-003-0500

www.anbotech.com

Contents

1. General Information	4
1.1. Client Information	4
1.2. Description of Device (EUT)	4
1.3. Auxiliary Equipment Used During Test	5
1.4. Description of Test Modes	5
1.5. Description Of Test Setup	6
1.6. Test Equipment List	7
1.7. Measurement Uncertainty	8
1.8. Description of Test Facility	8
2. Summary of Test Results	9
3. Conducted Emission Test	10
3.1. Test Standard and Limit	10
3.2. Test Setup	10
3.3. Test Procedure	10
3.4. Test Data	10
4. Radiation Spurious Emission	13
4.1. Test Standard and Limit	13
4.2. Test Setup	13
4.3. Test Procedure	14
4.4. Test Data	14
5. Antenna Requirement	19
5.1. Test Standard and Requirement	19
5.2. Antenna Connected Construction	19
APPENDIX I -- TEST SETUP PHOTOGRAPH	20
APPENDIX II -- EXTERNAL PHOTOGRAPH	22
APPENDIX III -- INTERNAL PHOTOGRAPH	27



TEST REPORT

Applicant : Shenzhen Merpower Electronic Co., Ltd
Manufacturer : Dongguan Yihang Electronic CO.,Ltd
Product Name : Outdoor Power bank
Model No. : GP50, ES960
Trade Mark : N.A.
Rating(s) : DC input: 18-24V= 4A
USB-C input: 5V= 3A, 9V= 3A, 12V= 3A, 15V= 3A, 20V= 3A
USB-C output: 5V= 3A, 9V= 3A, 12V= 3A, 15V= 3A, 20V= 3A
USB 1&2 output: 5V= 3A, 9V= 2A, 12V= 1.5A
DC output: 12V= 5A, 16.5V= 4A, 20V= 3.5A, 24V= 3.5A
Cigar lighter output1&2: 12V= 15A
Wireless output: 10W(MAX)
Battery capacity: DC 3.2V, 96000mAh

Test Standard(s) : **FCC Part15 Subpart C, Paragraph 15.209**

Test Method(s) : **ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Jun. 06, 2022

Date of Test

Jun. 06~17, 2022

Prepared By

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Merpower Electronic Co., Ltd
Address	:	715A, Building 8, 1970 Science Park, Mingkang Road, Longhua, Shenzhen, China
Manufacturer	:	Dongguan Yihang Electronic CO.,Ltd
Address	:	2F B1 Xi Teng 1+1Industrial district Beian Huangjiang DongGuan guangdong
Factory	:	Dongguan Yihang Electronic CO.,Ltd
Address	:	2F B1 Xi Teng 1+1Industrial district Beian Huangjiang DongGuan guangdong

1.2. Description of Device (EUT)

Product Name	:	Outdoor Power bank
Model No.	:	GP50, ES960 (Note: All samples are the same except the model number, so we prepare "GP50" for test only.)
Trade Mark	:	N.A.
Test Power Supply	:	AC 120V/60Hz for Adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	110.1-205KHz
	Modulation Type:	PWM
	Antenna Type:	Inductive loop coil Antenna
	Antenna Gain(Peak):	0 dBi (Provided by customer)
	Adapter:	M/N: LY005SPS-200200U Input: 100-240V~50-60Hz 1.5A Output: 20V---2A
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



1.3. Auxiliary Equipment Used During Test

Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2577 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year
------------------------	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Battery Charging Mode+ WPT Mode(DC in)
Mode 2	Battery Charging Mode+ WPT Mode (Type-C in)
Mode 3	WPT Mode



For Conducted Emission	
Final Test Mode	Description
Mode 1	Battery Charging Mode+ WPT Mode(DC in)
Mode 2	Battery Charging Mode+ WPT Mode (Type-C in)

For Radiated Emission	
Final Test Mode	Description
Mode 1	Battery Charging Mode+ WPT Mode(DC in)
Mode 2	Battery Charging Mode+ WPT Mode (Type-C in)
Mode 3	WPT Mode

Note: (1)Test channel is 0.1388MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 10W) was recorded in the report.

1.5. Description Of Test Setup

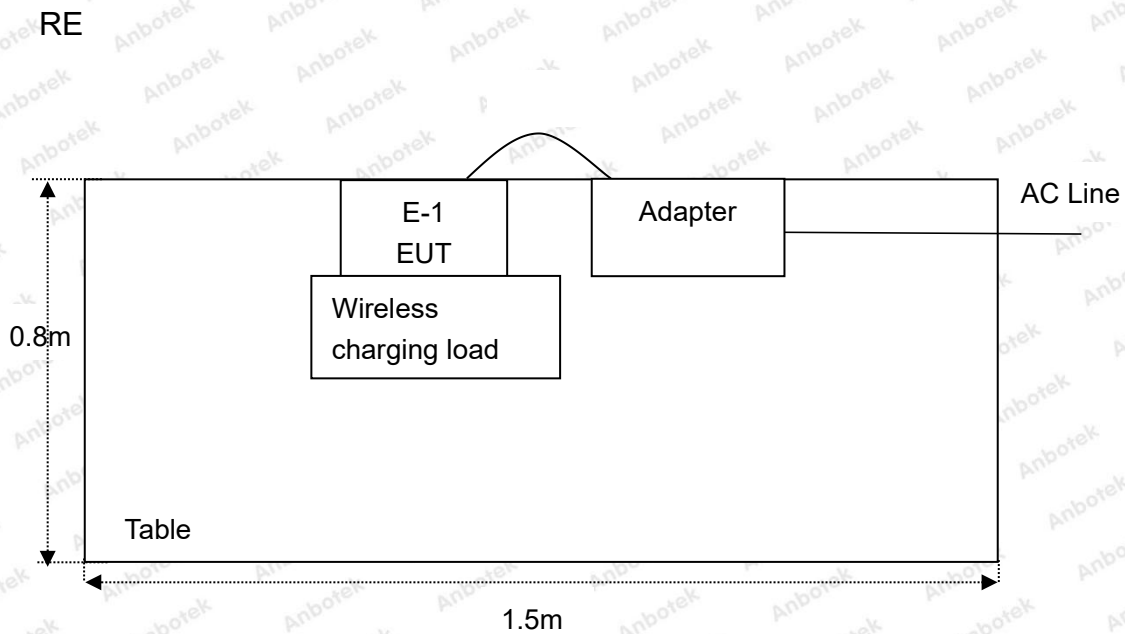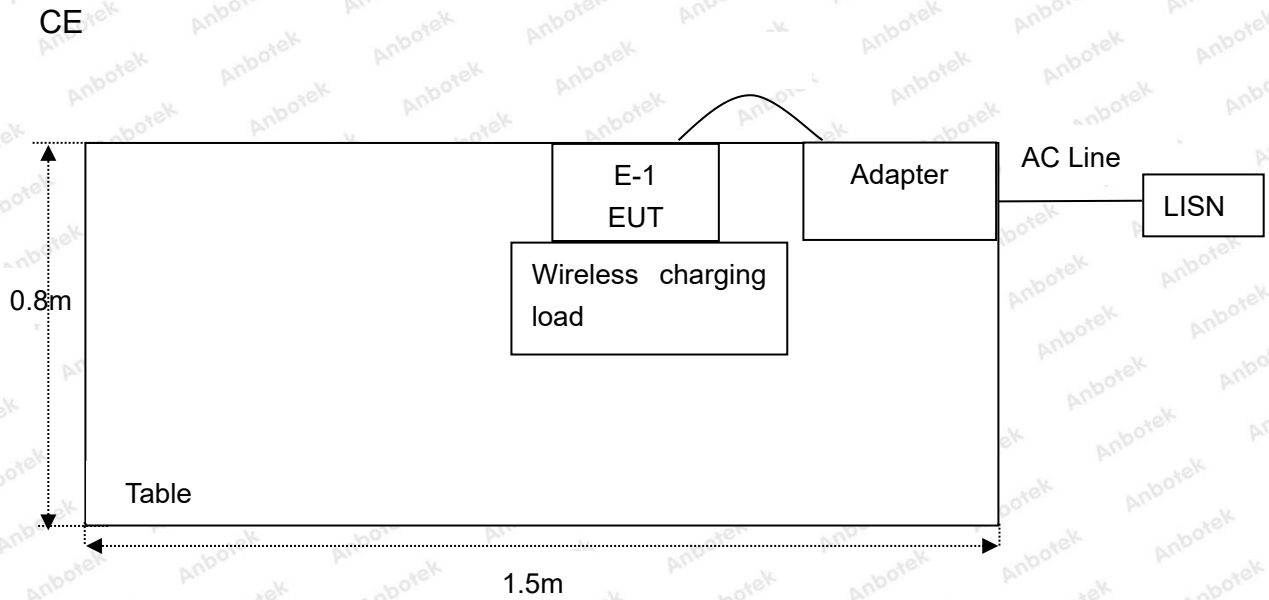

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

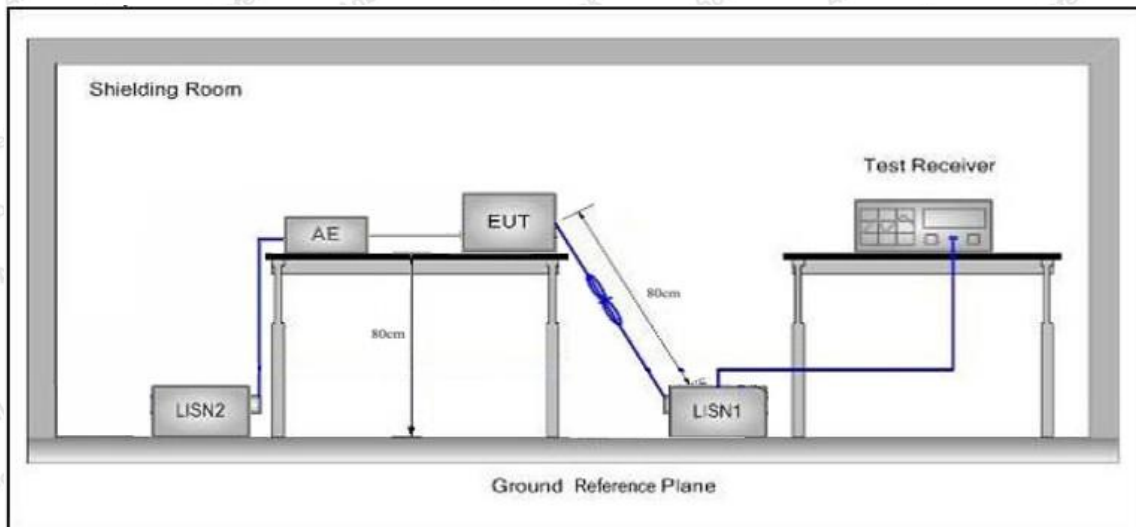

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Code:AB-RF-05-a




Hotline

400-003-0500

www.anbotech.com

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 23.9°C Hum.: 47%

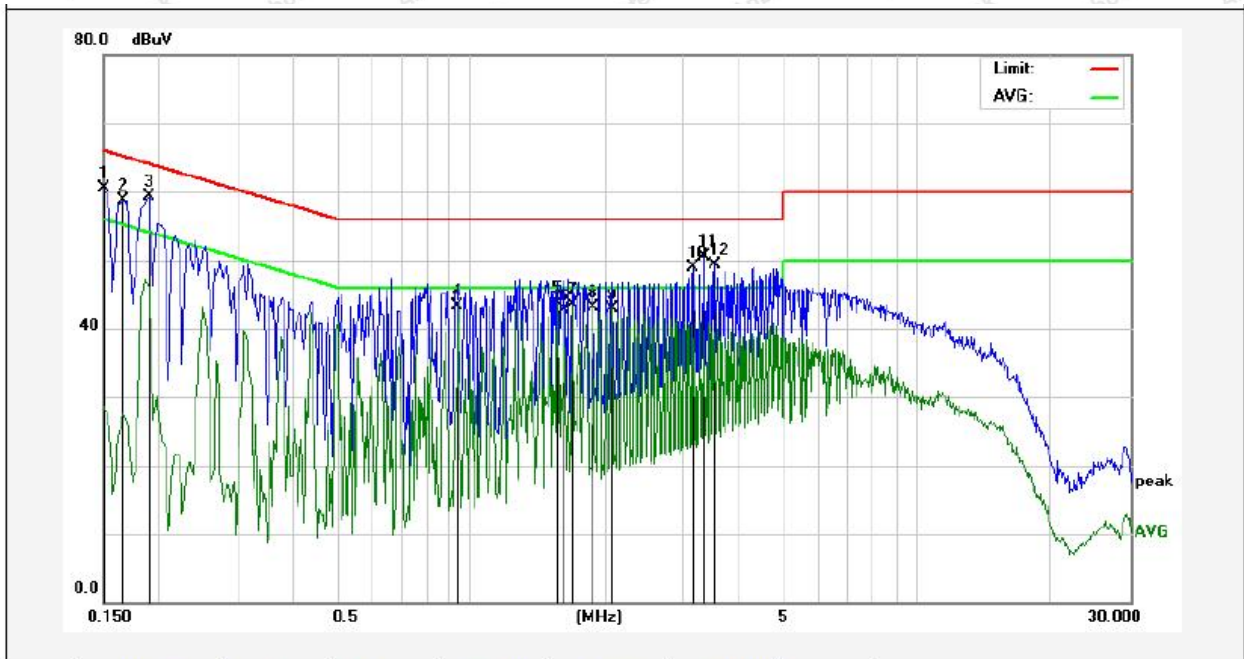

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	60.38	0.11	60.49	65.99	-5.50	QP	
2	0.1660	58.60	0.12	58.72	65.15	-6.43	QP	
3	0.1900	59.24	0.12	59.36	64.03	-4.67	QP	
4	0.9380	43.06	0.15	43.21	46.00	-2.79	AVG	
5	1.5620	43.61	0.13	43.74	46.00	-2.26	AVG	
6	1.6260	42.60	0.13	42.73	46.00	-3.27	AVG	
7	1.6860	43.41	0.13	43.54	46.00	-2.46	AVG	
8	1.8780	43.08	0.12	43.20	46.00	-2.80	AVG	
9	2.0700	42.79	0.12	42.91	46.00	-3.09	AVG	
10	3.1420	48.87	0.12	48.99	56.00	-7.01	QP	
11	3.3260	50.36	0.12	50.48	56.00	-5.52	QP	
12	3.5100	49.27	0.12	49.39	56.00	-6.61	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.9°C Hum.: 47%

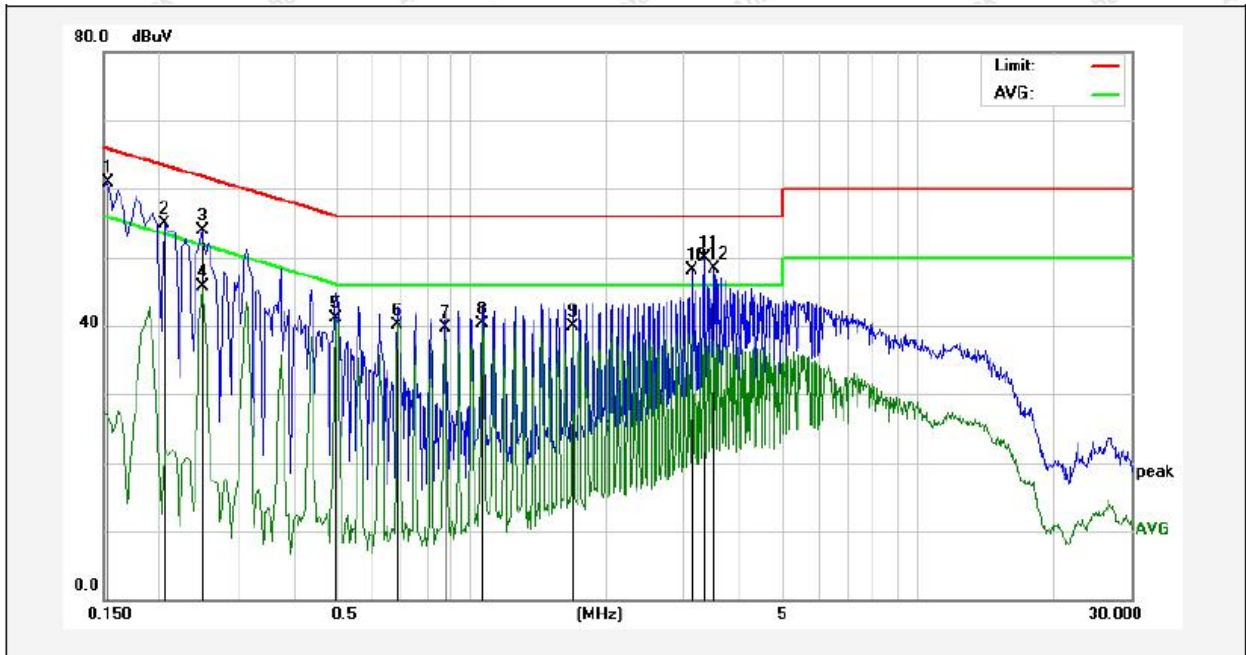

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	60.88	0.12	61.00	65.78	-4.78	QP	
2	0.2060	54.73	0.12	54.85	63.36	-8.51	QP	
3	0.2500	53.87	0.12	53.99	61.75	-7.76	QP	
4	0.2500	45.59	0.12	45.71	51.75	-6.04	AVG	
5	0.4980	40.86	0.15	41.01	46.03	-5.02	AVG	
6	0.6860	40.05	0.15	40.20	46.00	-5.80	AVG	
7	0.8740	39.60	0.15	39.75	46.00	-6.25	AVG	
8	1.0620	40.24	0.15	40.39	46.00	-5.61	AVG	
9	1.6900	39.81	0.13	39.94	46.00	-6.06	AVG	
10	3.1300	48.04	0.12	48.16	56.00	-7.84	QP	
11	3.3180	49.72	0.12	49.84	56.00	-6.16	QP	
12	3.5060	48.12	0.12	48.24	56.00	-7.76	QP	

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1) The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

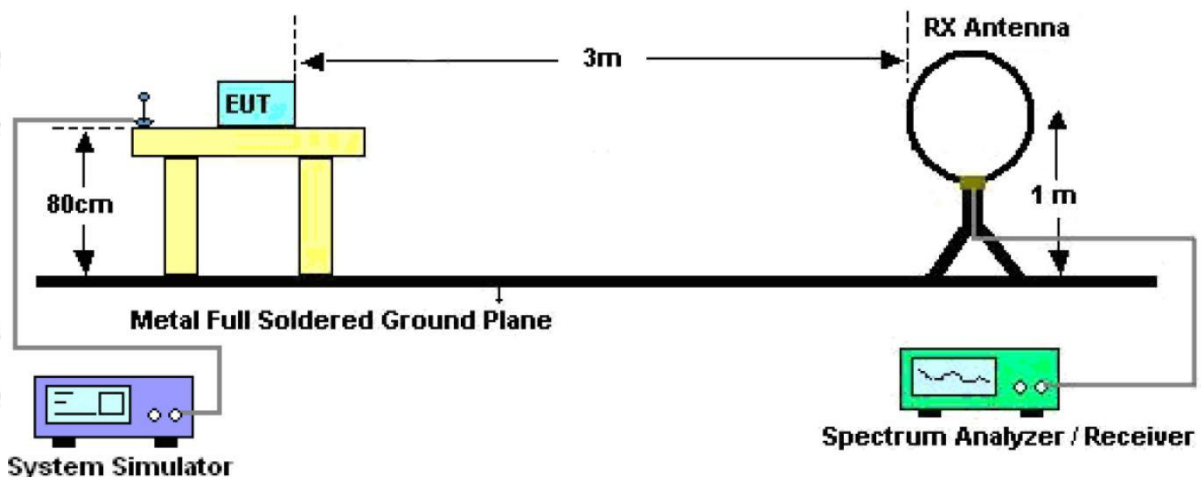


Figure 1. Below 30MHz

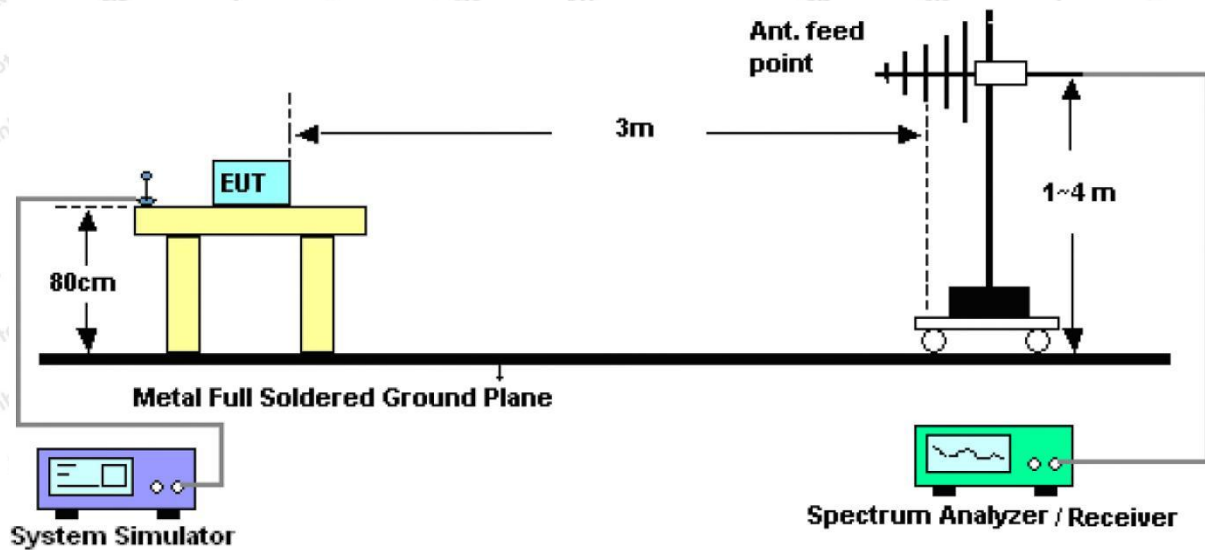


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS


Note: The data is in TX mode, and this is the worst mode.

Test Results

(Between 9KHz – 30MHz)

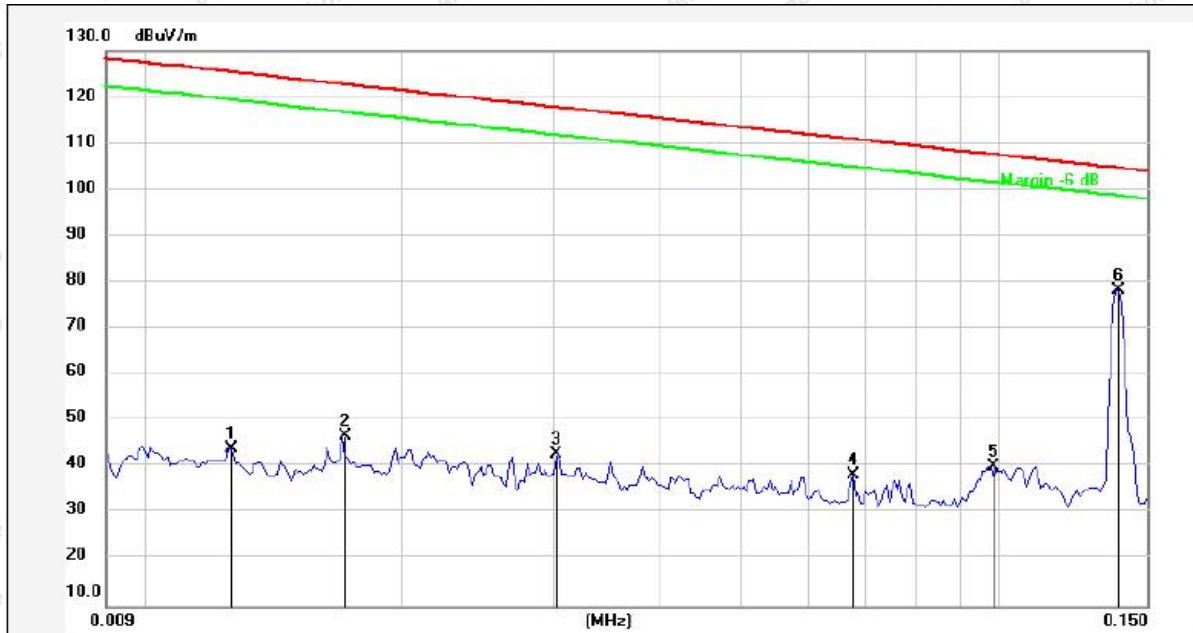Standard: FCC PART15 C _3m**Power Source:** AC 120V, 60Hz for adapter**Test item:** Radiation Test**Temp.(C)/Hum.(%RH):** 22.4°C/49%RH**Test Mode:** Mode 1**Distance:** 3m

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0126	23.81	20.14	43.95	125.40	-81.45	AV			
2	0.0171	26.69	20.14	46.83	122.77	-75.94	AV			
3	0.0303	22.44	20.54	42.98	117.83	-74.85	AV			
4	0.0675	18.05	20.37	38.42	110.91	-72.49	AV			
5	0.0984	19.97	20.29	40.26	107.66	-67.40	AV			
6	0.1388	58.02	20.33	78.35	104.69	-26.34	AV			

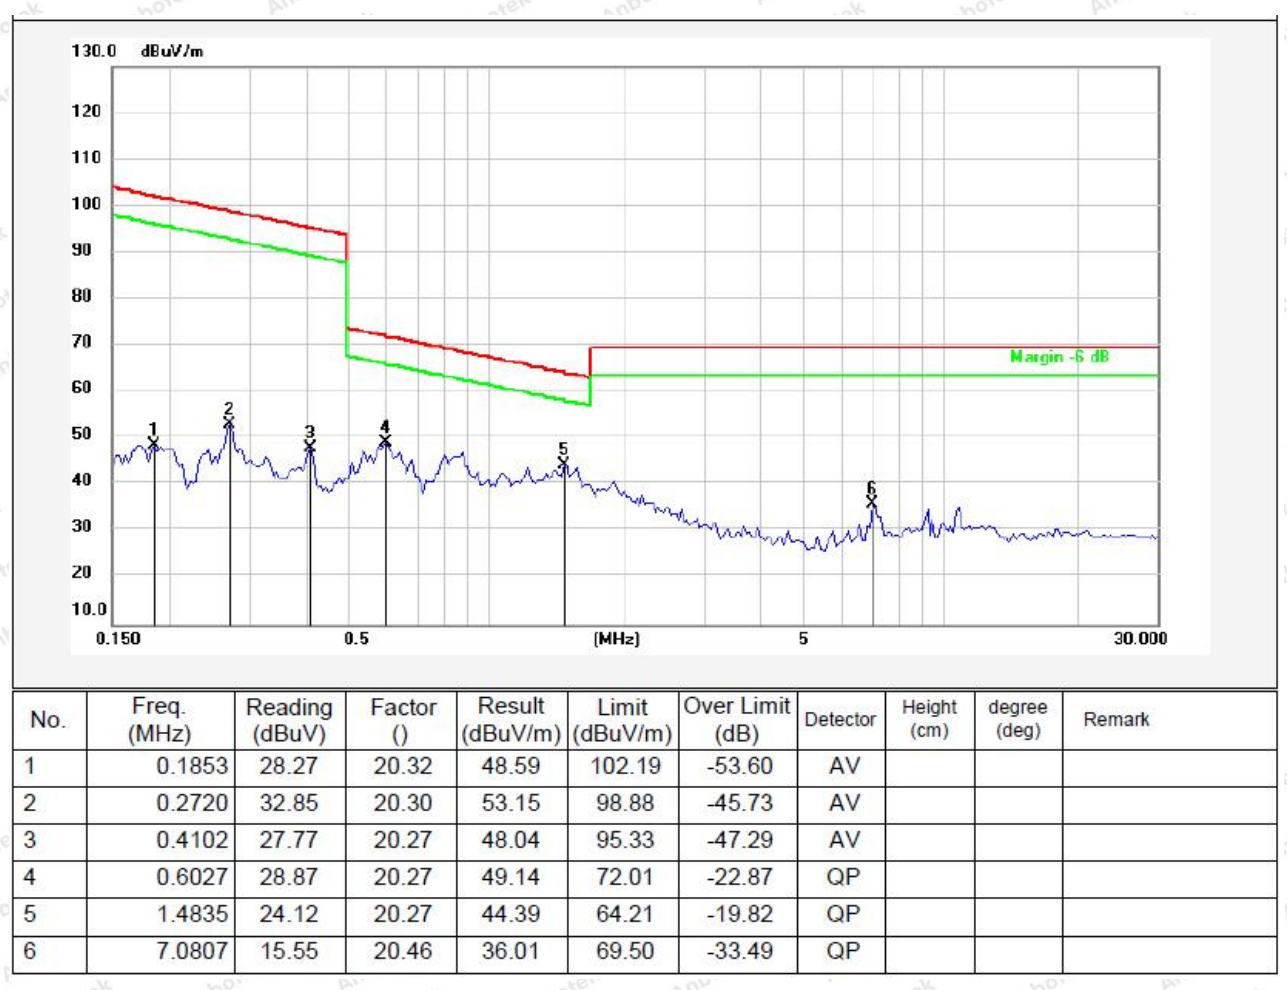

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz –1000 MHz)

Standard:	FCC PART15 C _3m	Polarization:	Horizontal
Test item:	Radiation Test	Power Source:	AC 120V, 60Hz for adapter
Test Mode:	Mode 1	Temp.(C)/Hum.(%RH):	24.1℃/48%RH
Distance:	3m		



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	76.2442	47.61	-22.33	25.28	40.00	-14.72	QP			
2	165.4866	61.71	-23.79	37.92	43.50	-5.58	QP			
3	183.2005	62.92	-23.04	39.88	43.50	-3.62	QP			
4	251.1804	60.02	-21.39	38.63	46.00	-7.37	QP			
5	362.9844	46.51	-16.03	30.48	46.00	-15.52	QP			
6	893.8567	39.00	-6.37	32.63	46.00	-13.37	QP			

Standard: FCC PART15 C _3m **Polarization:** Vertical
Test item: Radiation Test **Power Source:** AC 120V, 60Hz for adapter
Test Mode: Mode 1 **Temp.(C)/Hum.(%RH):** 24.1℃/48%RH
Distance: 3m



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.7518	38.28	-15.20	23.08	40.00	-16.92	QP			
2	59.8588	39.28	-17.49	21.79	40.00	-18.21	QP			
3	162.6106	56.69	-21.52	35.17	43.50	-8.33	QP			
4	186.4406	60.74	-20.30	40.44	43.50	-3.06	QP			
5	428.0192	36.62	-14.01	22.61	46.00	-23.39	QP			
6	896.9964	37.88	-6.29	31.59	46.00	-14.41	QP			

5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test



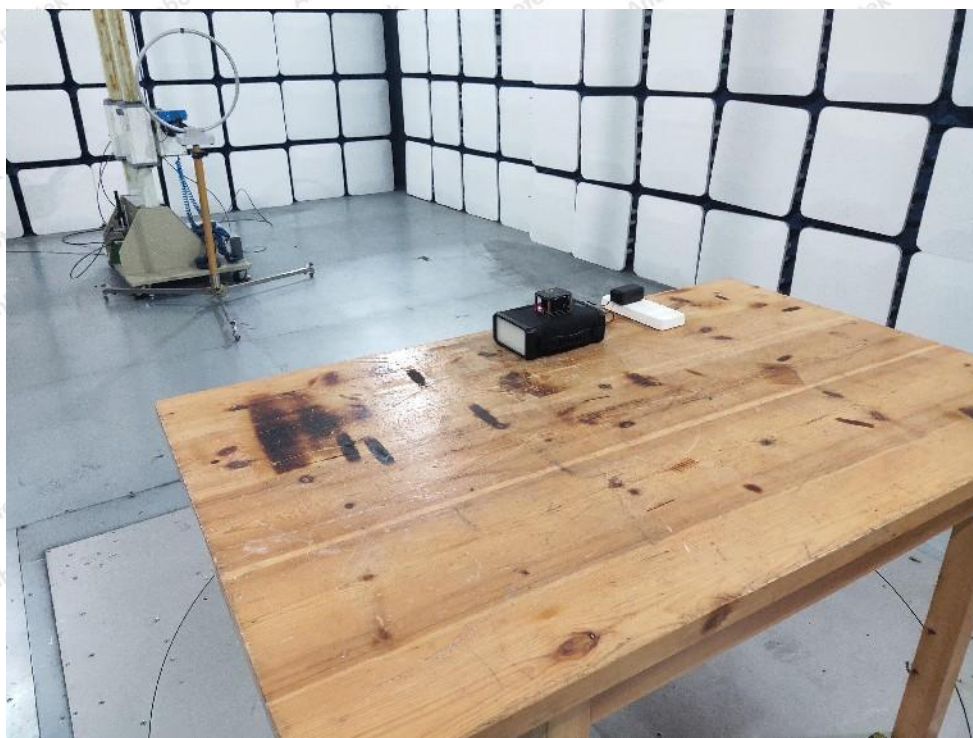


APPENDIX II -- EXTERNAL PHOTOGRAPH










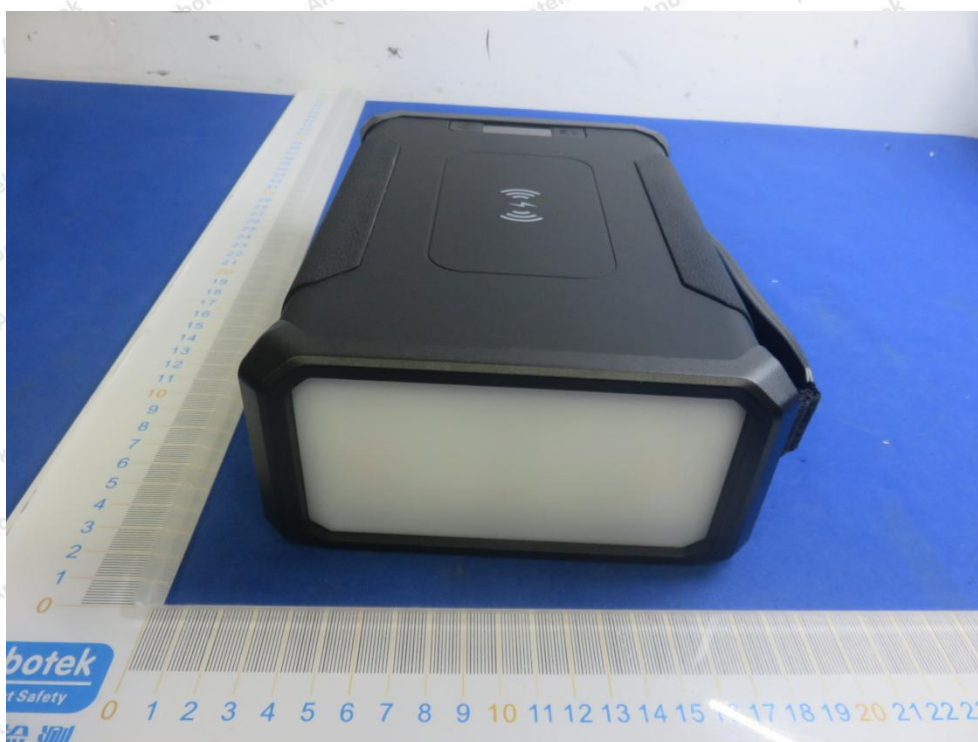


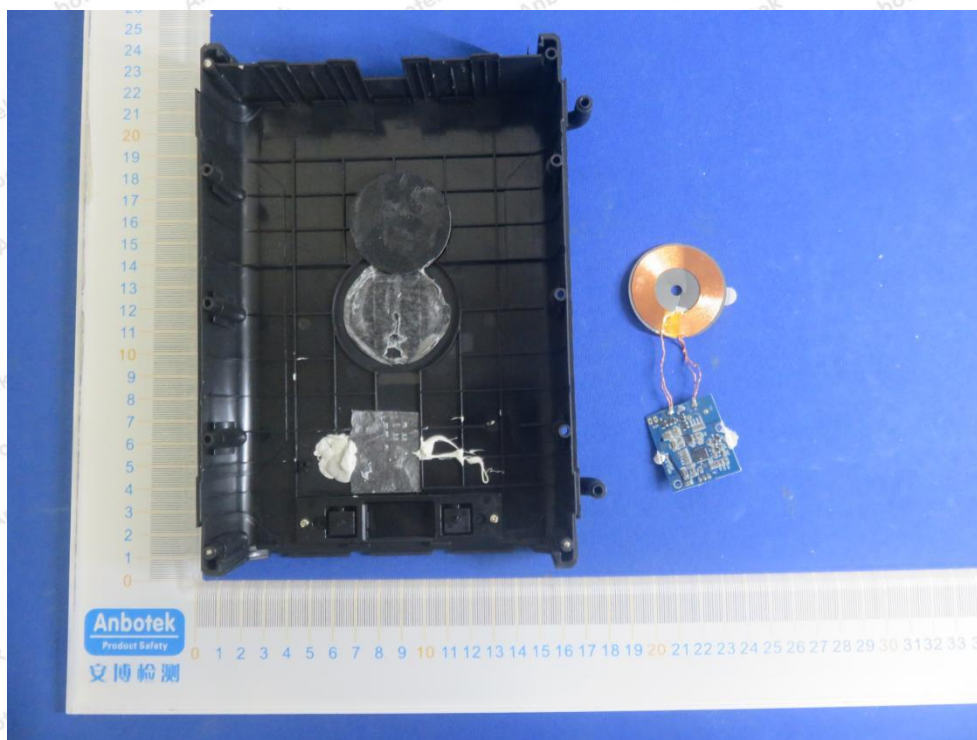




APPENDIX III -- INTERNAL PHOTOGRAPH


ANT

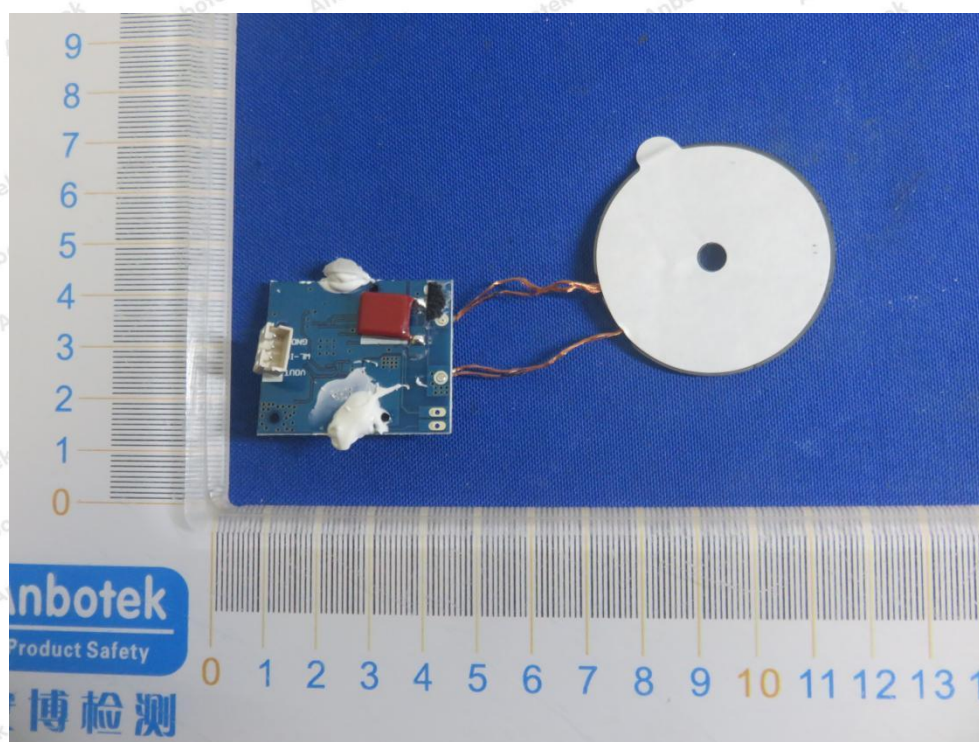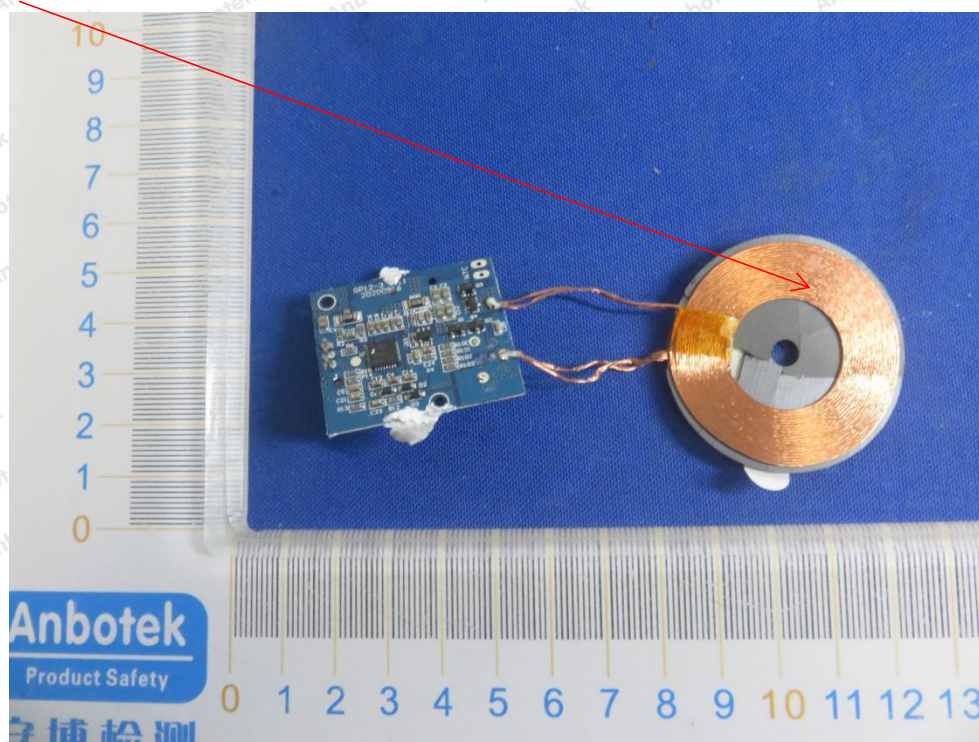

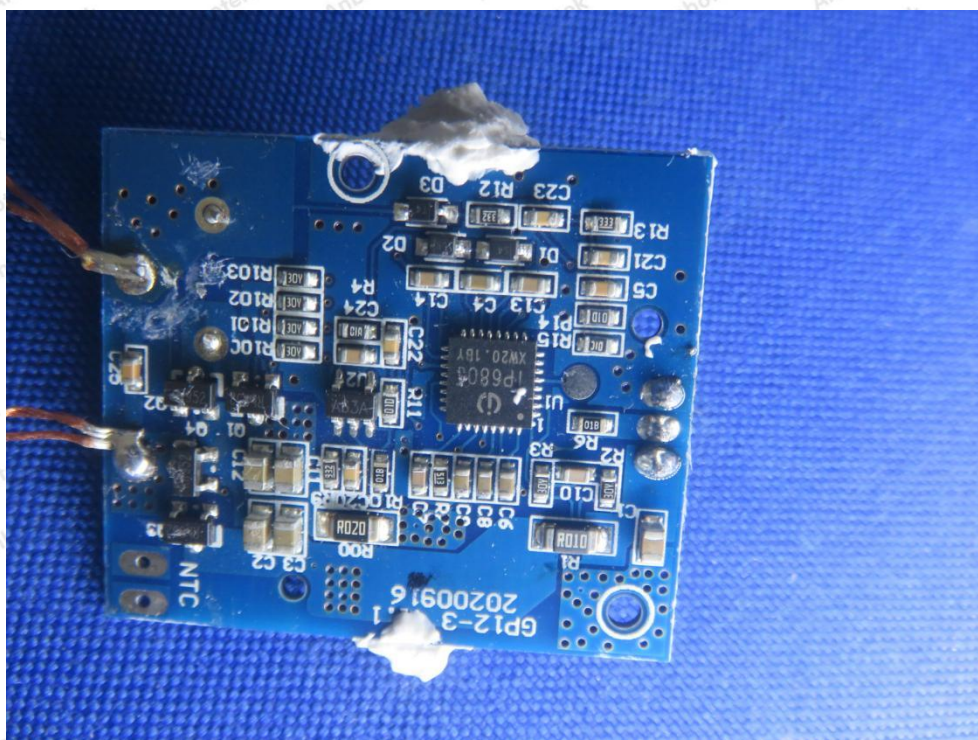

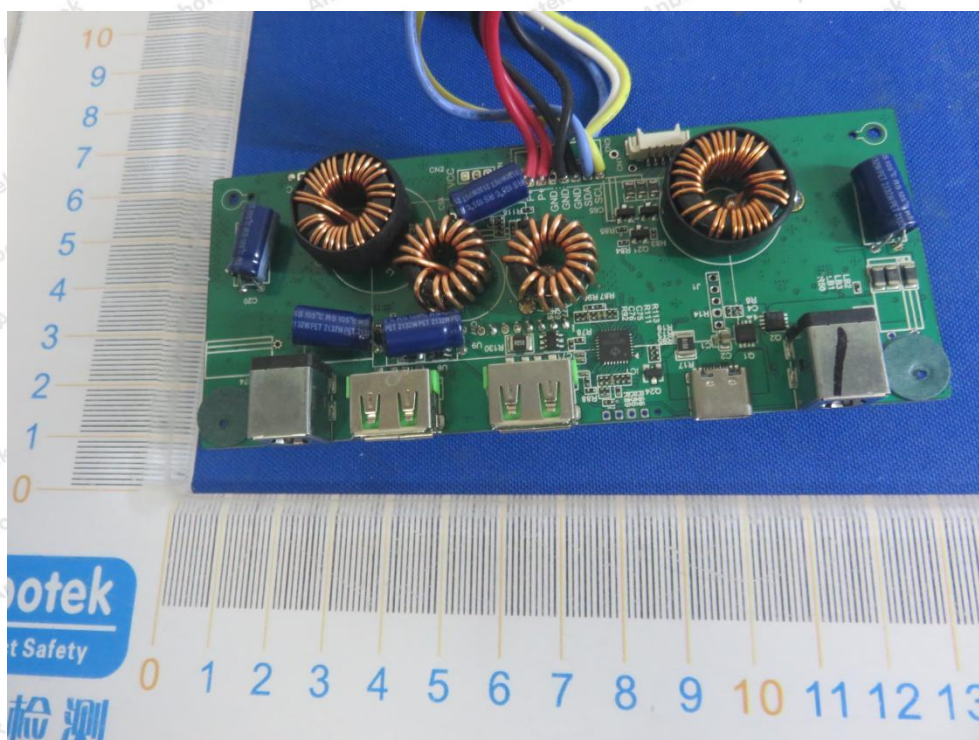

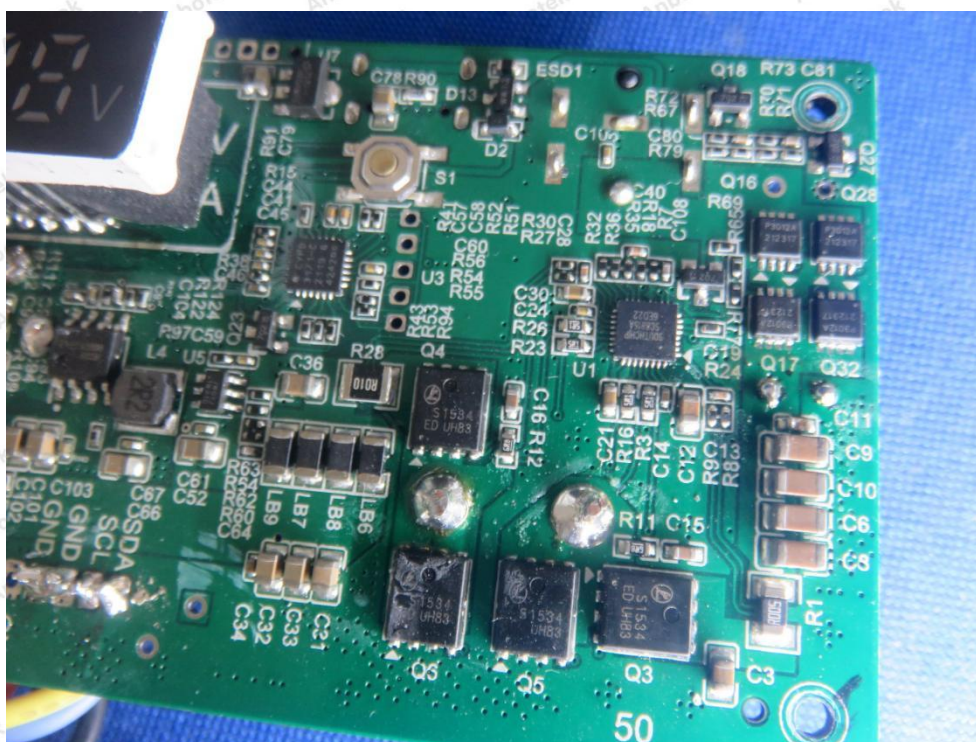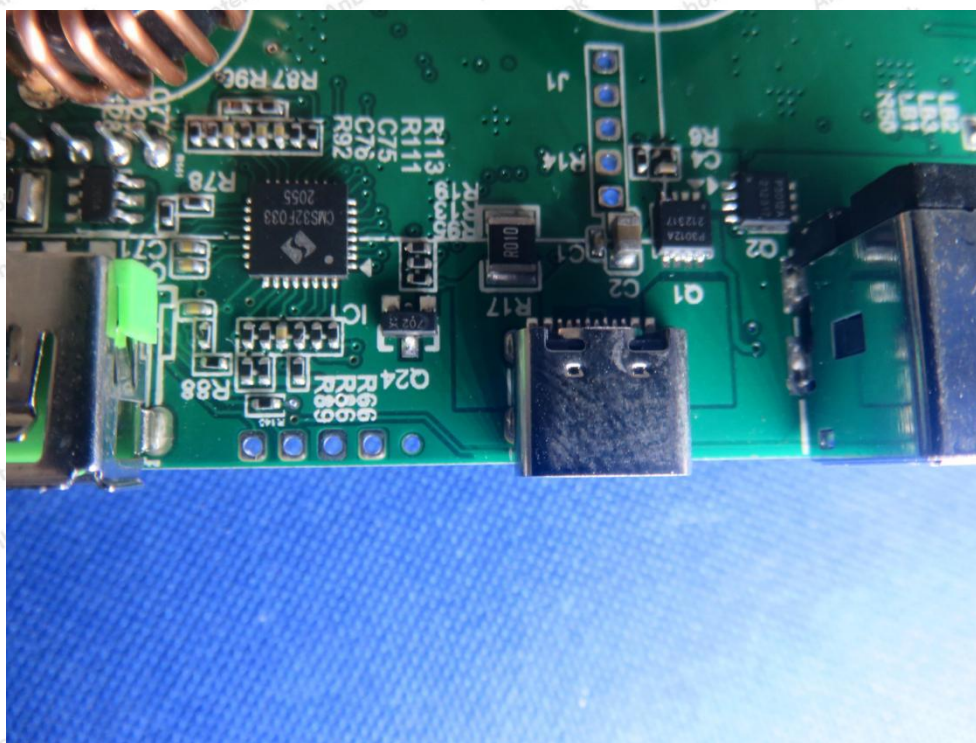

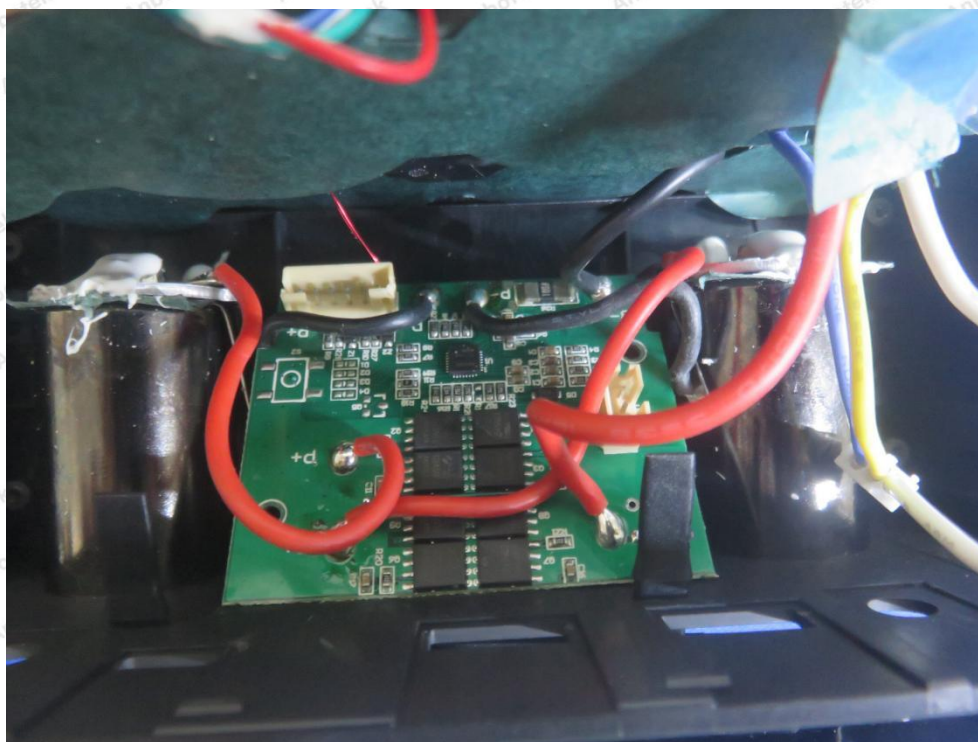

----- End of Report -----