

TEST REPORT

Product : H2D Pro
Trade mark : bambulab
Model/Type reference : PF003-E
Serial Number : N/A
Report Number : EED32R80632601
FCC ID : 2A6J8-PF003E
Date of Issue : Jul. 22, 2025
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Shenzhen Tuozhu Technology Co., Ltd.
903, West Zone, Hengchang Science and Technology Building,
No. 2228 Linhai Avenue, Nanshan Street, Qianhai Shengang
Cooperation Zone, Shenzhen

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Park, Zone 70, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Keven Tan.

Reviewed by:

Frazer Li

Approved by:

Keven Tan
Aaron Ma

Date:

Jul. 22, 2025



Check No.: 5232270425

1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST CONFIGURATION	6
3.4 TEST ENVIRONMENT	7
3.5 DESCRIPTION OF SUPPORT UNITS	7
3.6 TEST LOCATION	7
3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
4 EQUIPMENT LIST	9
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 AC POWER LINE CONDUCTED EMISSIONS	13
5.3 MAXIMUM CONDUCTED OUTPUT POWER	20
5.4 DTS BANDWIDTH	21
5.5 MAXIMUM POWER SPECTRAL DENSITY	22
5.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	23
5.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	24
6 APPENDIX A	90
7 PHOTOGRAPHS OF TEST SETUP	91
8 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	93

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band edge measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

3 General Information

3.1 Client Information

Applicant:	Shenzhen Tuozhu Technology Co., Ltd.
Address of Applicant:	903, West Zone, Hengchang Science andTechnology Building, No. 2228 Linhai Avenue, Nanshan Street,Qianhai Shengang Cooperation Zone, Shenzhen
Manufacturer:	Shenzhen Tuozhu Technology Co., Ltd.
Address of Manufacturer:	903, West Zone, Hengchang Science andTechnology Building, No. 2228 Linhai Avenue, Nanshan Street,Qianhai Shengang Cooperation Zone, Shenzhen
Factory:	Shenzhen Zhuhe Technology Co.,Ltd.
Address of Factory:	Building M, No.28 Dayang Road, Rentian Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province

3.2 General Description of EUT

Product Name:	H2D Pro
Model No.:	PF003-E
Trade mark:	bambulab
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fixed Location
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Number of Channel:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Antenna Type:	Internal Antenna
Antenna Gain:	2dBi
Power Supply:	Model: MS-TA460J240-350B0 INPUT: 100-240V~ 50/60Hz 5A max. OUTPUT: 350.4W 24.0V/14.6A
	Model: PMR-24V320W1AT INPUT: 100-240V~ 50/60Hz 4A OUTPUT: 24.0V/13.4A
	Model: A-350FKD-24P-B0 INPUT: 100-240V~ 50/60Hz 4.5A OUTPUT: 24.0V/14.6A
Test Voltage:	AC 110V
Sample Received Date:	May 30, 2025
Sample tested Date:	May 30, 2025 to Jul. 08, 2025

Operation Frequency each of channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel (802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

3.3 Test Configuration

EUT Test Software Settings:	
Test Software:	MQTTX
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(HT20) and MCS0 for 802.11n(HT40).	

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Asus	FL8700JP1065-0D8GXYQ2X10	FCC&CE	CTI

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-05-2024	12-04-2025
Signal Generator	Keysight	N5182B	MY53051549	11-30-2024	11-29-2025
DC Power	Keysight	E3642A	MY56376072	11-30-2024	11-29-2025
Communication test set	R&S	CMW500	169004	03-03-2025	03-02-2026
RF control unit(power unit)	JS Tonscend	JS0806-2	22G8060592	07-22-2024	07-21-2025
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	05-12-2025	05-11-2026
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-30-2024	11-29-2025
Temperature/Humidity Indicator	biaozhi	HM10	1804186	05-26-2025	05-25-2026
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.3.20	---	---
Spectrum Analyzer	R&S	FSV3044	101509	02-14-2025	02-13-2026

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---

Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-18-2024 06-07-2025	06-17-2025 06-06-2026
ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test

Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESCI7	100938-003	09/07/2024	09/06/2025
Spectrum Analyzer	R&S	FSV40	101200	07/18/2024	07/17/2025
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/14/2025	05/13/2026
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	05/26/2025	05/25/2026
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-04-2025	01-03-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-14-2025	01-13-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-14-2025	01-13-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-12-2025	04-11-2026
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-12-2025	04-11-2026
Horn Antenna	ETS-LINDGREN	3117	57407	07-03-2024 06-29-2025	07-02-2025 06-28-2026
Preamplifier	EMCI	EMC001330	980563	03-03-2025	03-02-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-18-2024	07-17-2025
Preamplifier	Tonscend	EMC051845SE	980380	12-05-2024	12-04-2025
Communication test set	R&S	CMW500	102898	01-04-2025	01-03-2026
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	03-31-2025	03-30-2026
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos The antenna is Internal antenna. The best case gain of the antenna is 2dBi.

5.2 AC Power Line Conducted Emissions

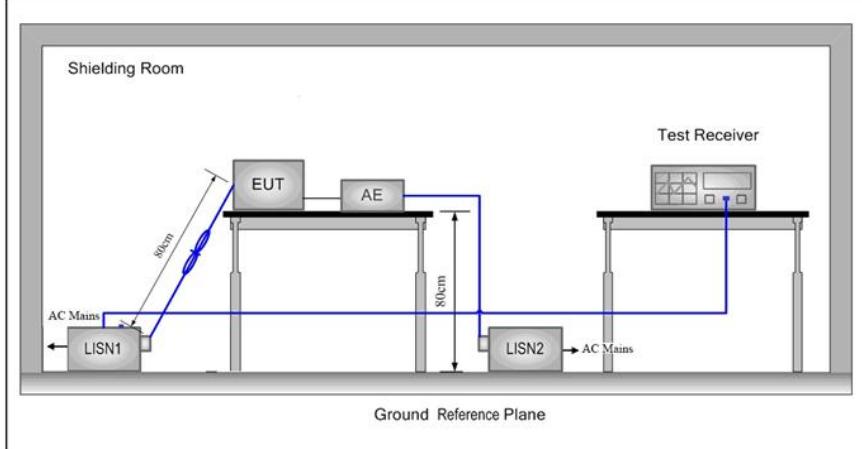
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		
Test Mode:	All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.		

Test Results:	Pass
---------------	------

Measurement Data

Adapter A-350FKD-24P-B0:


Live line:

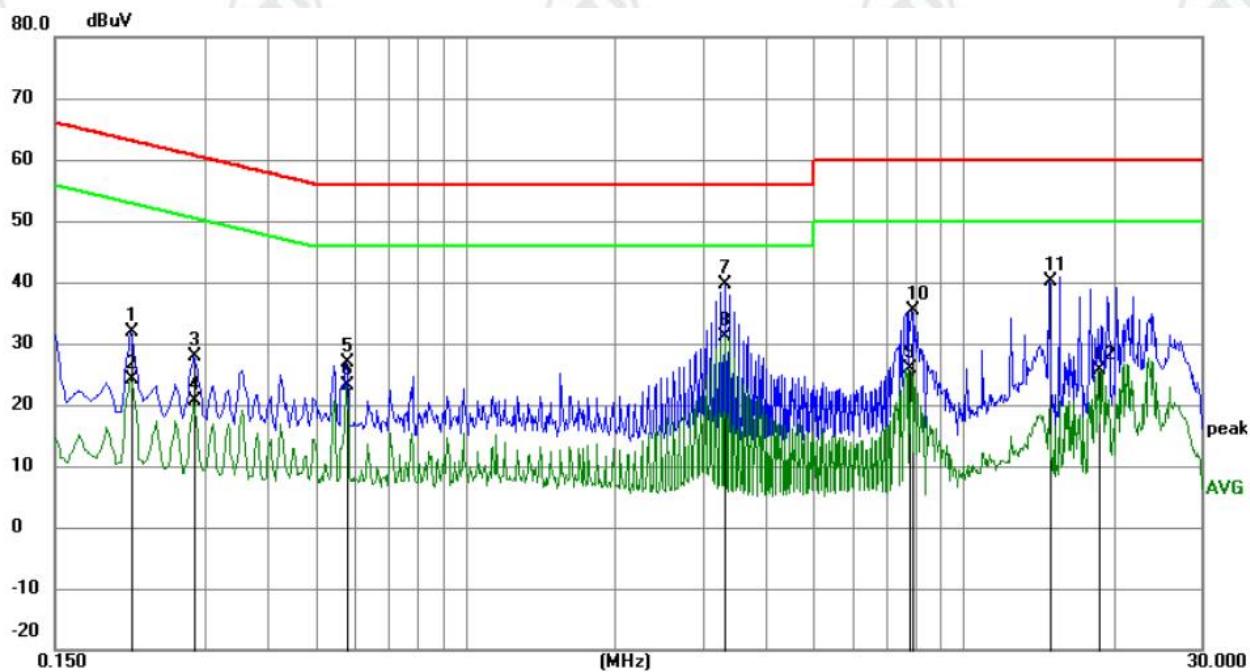

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.2130	21.62	10.20	31.82	63.09	-31.27	QP	
2		0.2130	13.94	10.20	24.14	53.09	-28.95	AVG	
3		0.2850	17.83	10.14	27.97	60.67	-32.70	QP	
4		0.2850	10.54	10.14	20.68	50.67	-29.99	AVG	
5		0.5775	16.88	10.10	26.98	56.00	-29.02	QP	
6		0.5775	13.06	10.10	23.16	46.00	-22.84	AVG	
7		3.3270	29.43	10.12	39.55	56.00	-16.45	QP	
8	*	3.3270	21.11	10.12	31.23	46.00	-14.77	AVG	
9		7.7865	15.78	10.01	25.79	50.00	-24.21	AVG	
10		7.8585	25.27	10.01	35.28	60.00	-24.72	QP	
11		14.8425	30.28	9.86	40.14	60.00	-19.86	QP	
12		18.6360	15.77	9.82	25.59	50.00	-24.41	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

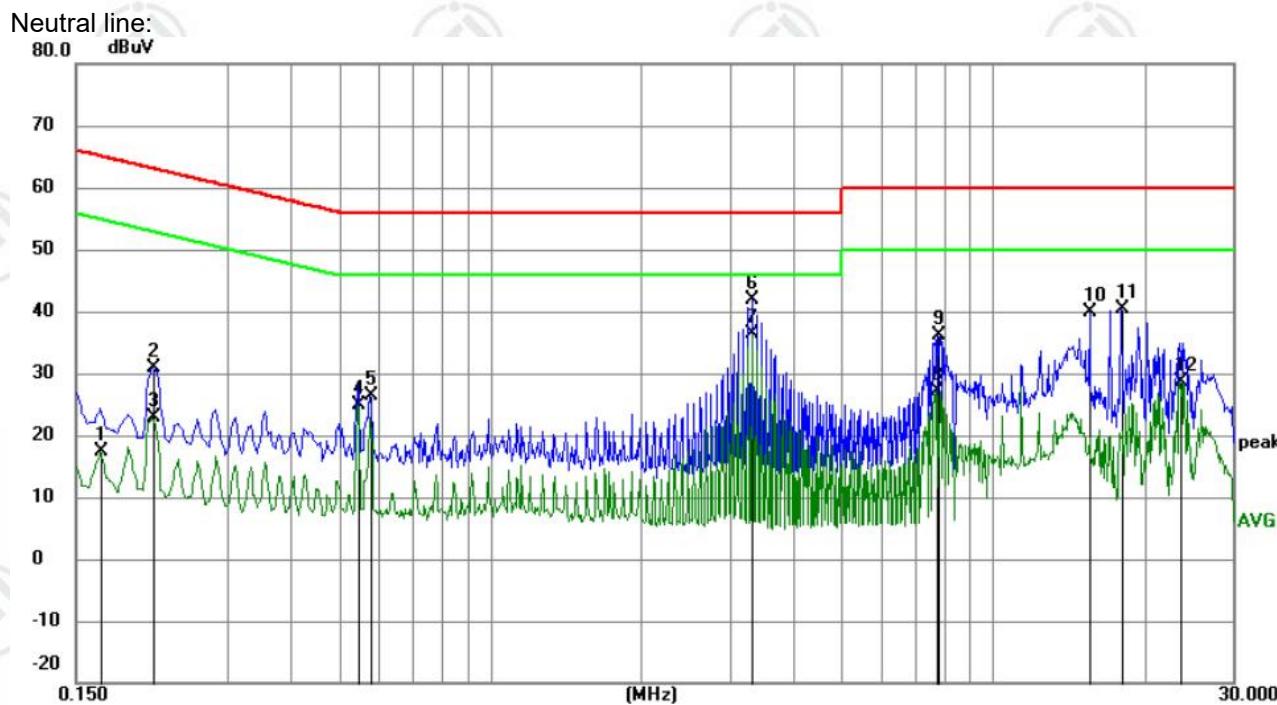


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1680	7.06	10.26	17.32	55.06	-37.74	AVG	
2		0.2130	20.65	10.20	30.85	63.09	-32.24	QP	
3		0.2130	12.65	10.20	22.85	53.09	-30.24	AVG	
4		0.5460	14.91	10.09	25.00	46.00	-21.00	AVG	
5		0.5775	16.17	10.10	26.27	56.00	-29.73	QP	
6		3.3270	31.74	10.12	41.86	56.00	-14.14	QP	
7	*	3.3270	26.24	10.12	36.36	46.00	-9.64	AVG	
8		7.7190	17.12	10.01	27.13	50.00	-22.87	AVG	
9		7.7865	26.06	10.01	36.07	60.00	-23.93	QP	
10		15.6255	30.08	9.85	39.93	60.00	-20.07	QP	
11		17.9700	30.55	9.82	40.37	60.00	-19.63	QP	
12		23.6355	18.87	9.81	28.68	50.00	-21.32	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Adapter: MS-TA460J240-350B0


Live line:

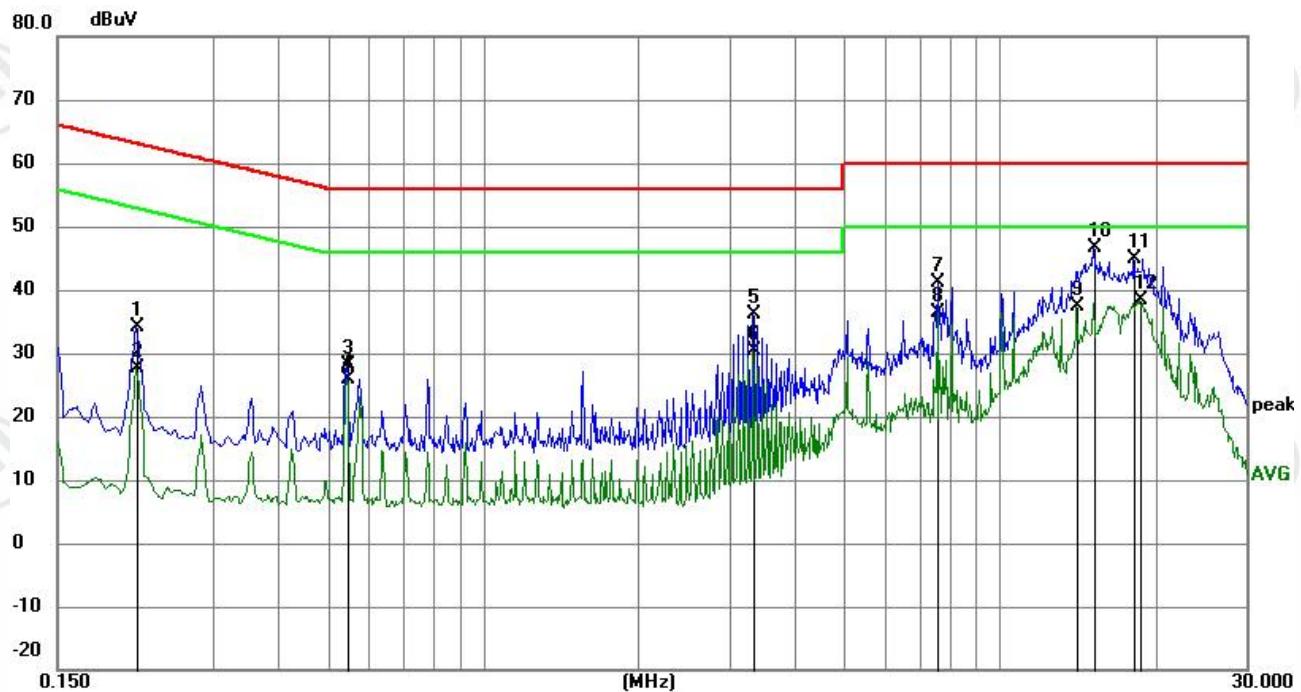

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	23.86	10.20	34.06	63.09	-29.03	QP	
2		0.2130	17.52	10.20	27.72	53.09	-25.37	AVG	
3		0.5460	18.05	10.09	28.14	56.00	-27.86	QP	
4		0.5460	15.75	10.09	25.84	46.00	-20.16	AVG	
5		3.3360	25.95	10.12	36.07	56.00	-19.93	QP	
6		3.3360	20.17	10.12	30.29	46.00	-15.71	AVG	
7		7.5930	31.20	10.01	41.21	60.00	-18.79	QP	
8		7.5930	26.35	10.01	36.36	50.00	-13.64	AVG	
9		14.1045	27.62	9.88	37.50	50.00	-12.50	AVG	
10		15.1890	36.80	9.86	46.66	60.00	-13.34	QP	
11		18.2130	35.18	9.82	45.00	60.00	-15.00	QP	
12	*	18.6765	28.47	9.82	38.29	50.00	-11.71	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

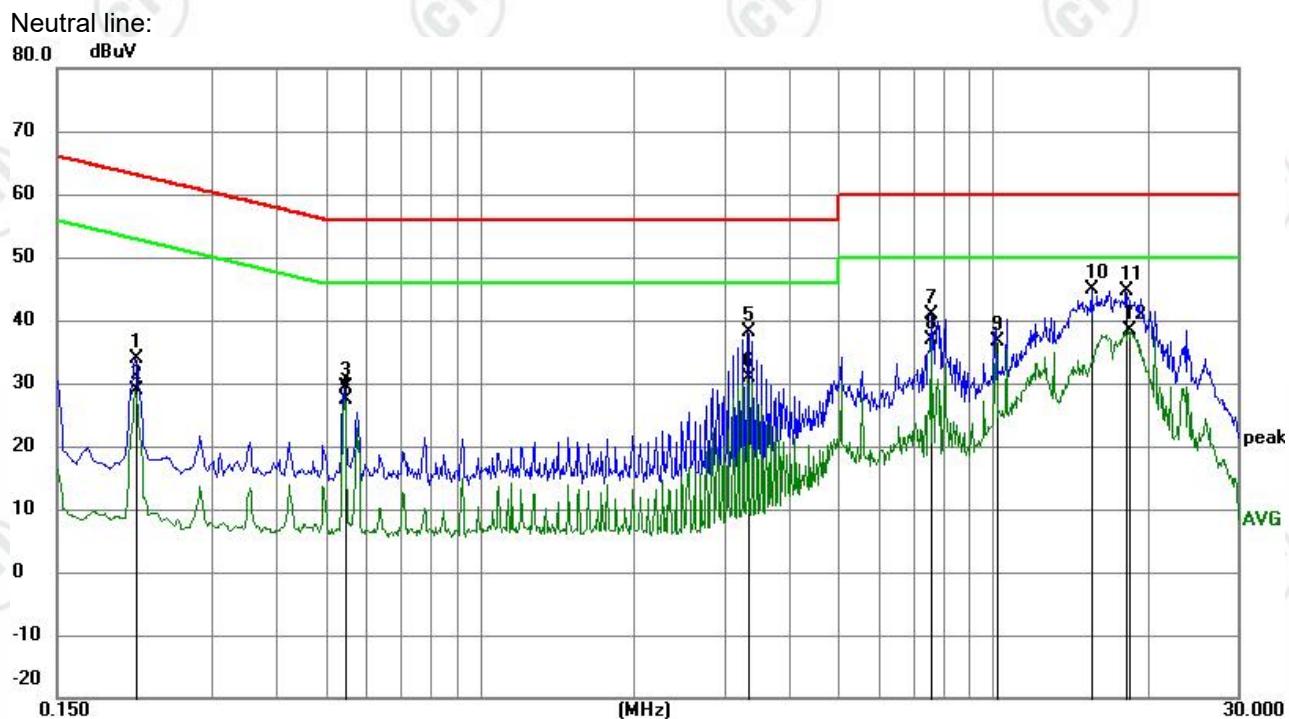


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.2130	23.79	10.20	33.99	63.09	-29.10	QP	
2		0.2130	18.69	10.20	28.89	53.09	-24.20	AVG	
3		0.5460	19.41	10.09	29.50	56.00	-26.50	QP	
4		0.5460	17.30	10.09	27.39	46.00	-18.61	AVG	
5		3.3360	27.89	10.12	38.01	56.00	-17.99	QP	
6		3.3360	20.66	10.12	30.78	46.00	-15.22	AVG	
7		7.5930	30.81	10.01	40.82	60.00	-19.18	QP	
8		7.5930	26.88	10.01	36.89	50.00	-13.11	AVG	
9		10.1264	26.78	9.95	36.73	50.00	-13.27	AVG	
10		15.6255	35.00	9.85	44.85	60.00	-15.15	QP	
11		18.2265	34.80	9.82	44.62	60.00	-15.38	QP	
12	*	18.3435	28.61	9.82	38.43	50.00	-11.57	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Adapter PMR-24V320WIAT:


Live line:

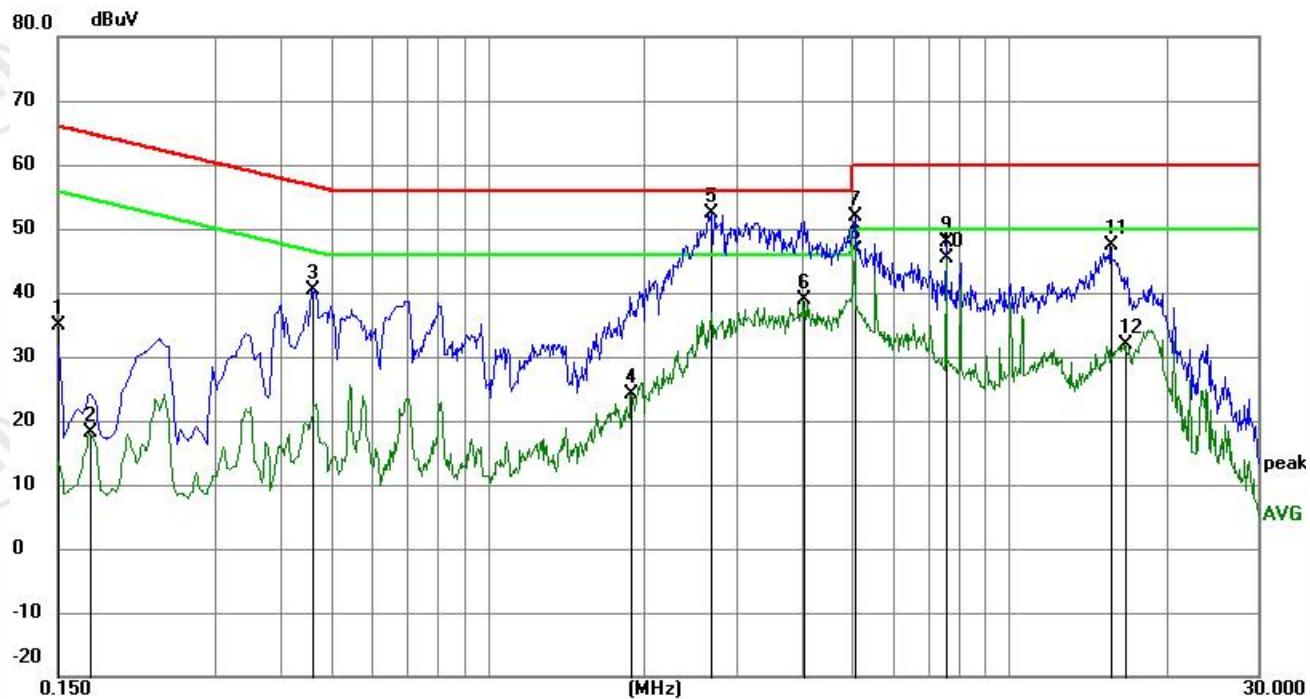

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1500	24.70	10.28	34.98	66.00	-31.02	QP	
2		0.1725	7.91	10.25	18.16	54.84	-36.68	AVG	
3		0.4605	30.18	10.08	40.26	56.68	-16.42	QP	
4		1.8780	13.97	10.17	24.14	46.00	-21.86	AVG	
5		2.6835	42.27	10.14	52.41	56.00	-3.59	QP	
6		4.0470	28.78	10.09	38.87	46.00	-7.13	AVG	
7		5.0595	41.78	10.06	51.84	60.00	-8.16	QP	
8	*	5.0595	36.64	10.06	46.70	50.00	-3.30	AVG	
9		7.5885	37.97	10.01	47.98	60.00	-12.02	QP	
10		7.5885	35.44	10.01	45.45	50.00	-4.55	AVG	
11		15.6750	37.49	9.85	47.34	60.00	-12.66	QP	
12		16.7235	21.97	9.84	31.81	50.00	-18.19	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

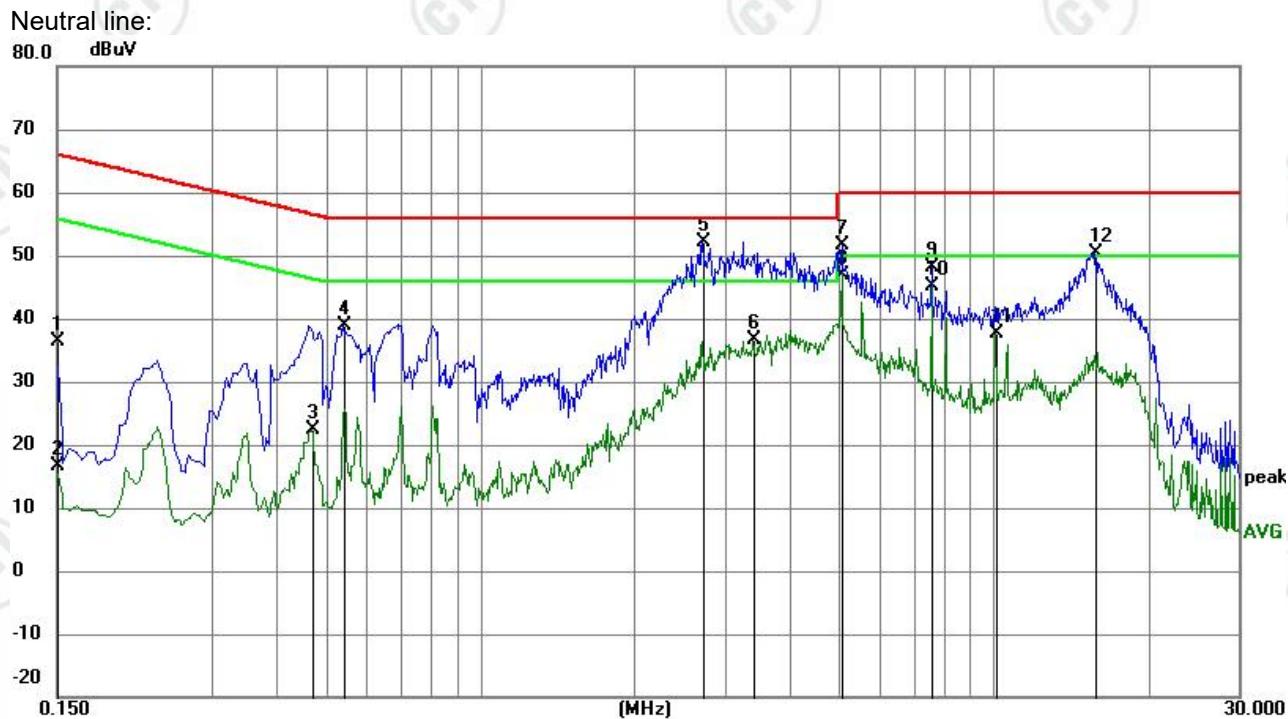


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1		0.1500	26.09	10.28	36.37	66.00	-29.63	QP
2		0.1500	6.29	10.28	16.57	56.00	-39.43	AVG
3		0.4695	12.24	10.08	22.32	46.52	-24.20	AVG
4		0.5415	28.69	10.09	38.78	56.00	-17.22	QP
5		2.7150	42.11	10.14	52.25	56.00	-3.75	QP
6		3.4170	26.41	10.12	36.53	46.00	-9.47	AVG
7		5.0595	41.53	10.06	51.59	60.00	-8.41	QP
8	*	5.0595	36.84	10.06	46.90	50.00	-3.10	AVG
9		7.5840	38.18	10.01	48.19	60.00	-11.81	QP
10		7.5840	35.01	10.01	45.02	50.00	-4.98	AVG
11		10.1130	27.59	9.95	37.54	50.00	-12.46	AVG
12		15.7380	40.48	9.85	50.33	60.00	-9.67	QP


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

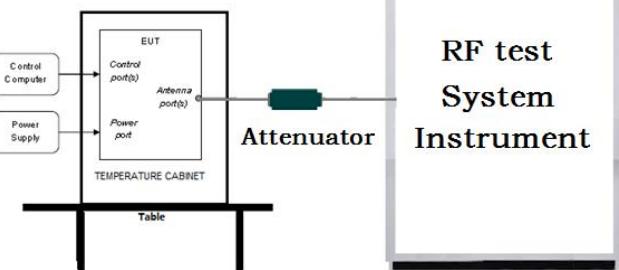Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	
Test Procedure:	<p>1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.</p> <p>2. Method AVGPM-G Average power measurement Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p>
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A


5.4 DTS Bandwidth

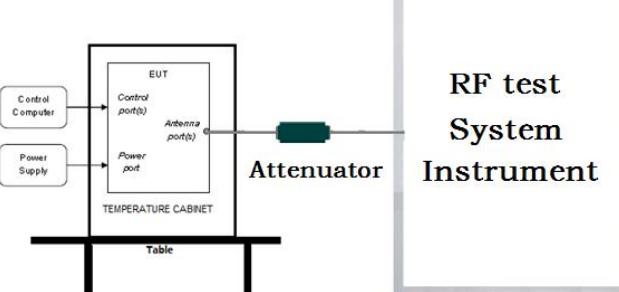Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set RBW = 100 kHz. Set the VBW $\geq [3 \times \text{RBW}]$. Detector = peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	≥ 500 kHz
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density

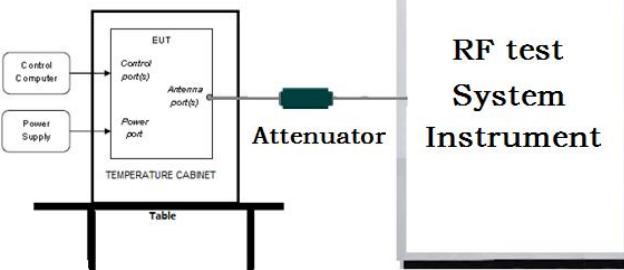Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set analyzer center frequency to DTS channel center frequency. Set the span to 1.5 times the DTS bandwidth. Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. Set the VBW $> [3 \times \text{RBW}]$. Detector = peak. Sweep time = auto couple. Trace mode = max hold. Allow trace to fully stabilize. Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
Limit:	$\leq 8.00 \text{ dBm}/3\text{kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.6 Band Edge Measurements and Conducted Spurious Emission

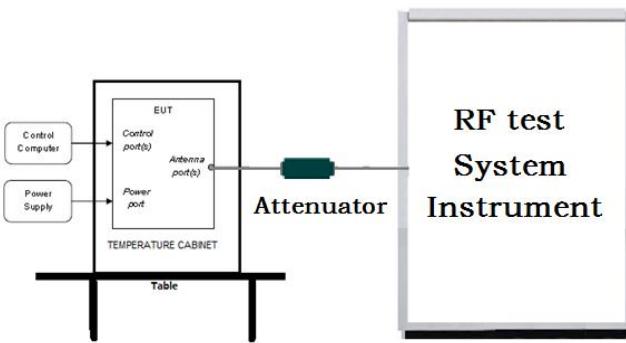Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set RBW = 100KHz. Set VBW = 300KHz. Sweep time = auto couple. Detector = peak. Trace mode = max hold. Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

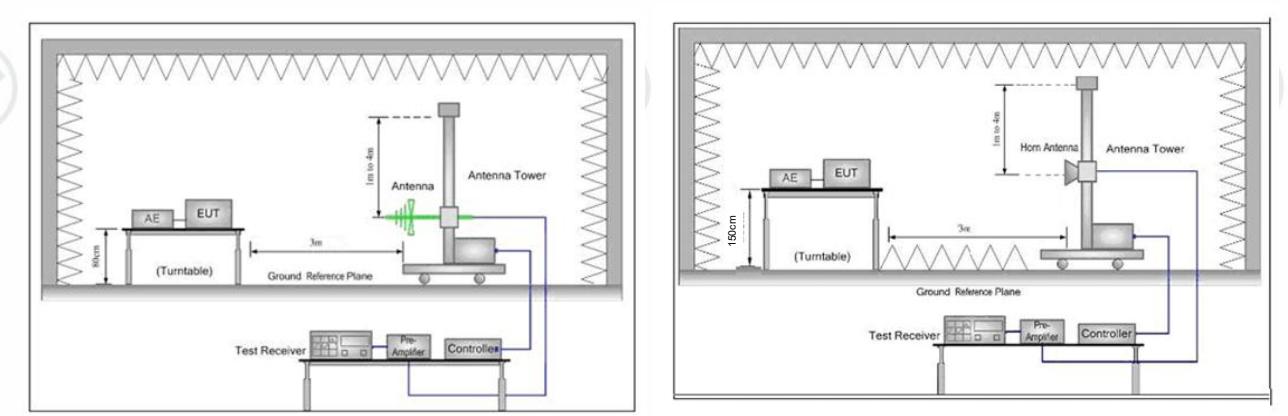
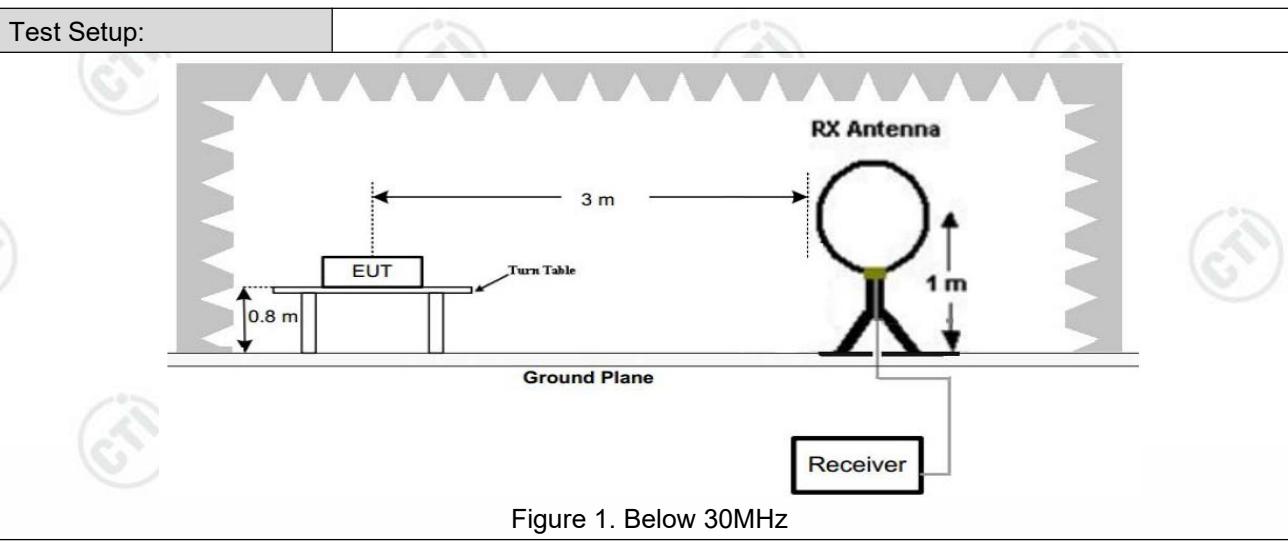


Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz

Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both</p>
-----------------	--

	<p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Refer to clause 5.3
Test Results:	Pass


Radiated Spurious Emission below 1GHz:

During the test, the Radiated Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

Adapter A-350FKD-24P-B0:


Horizontal:

Test Graph

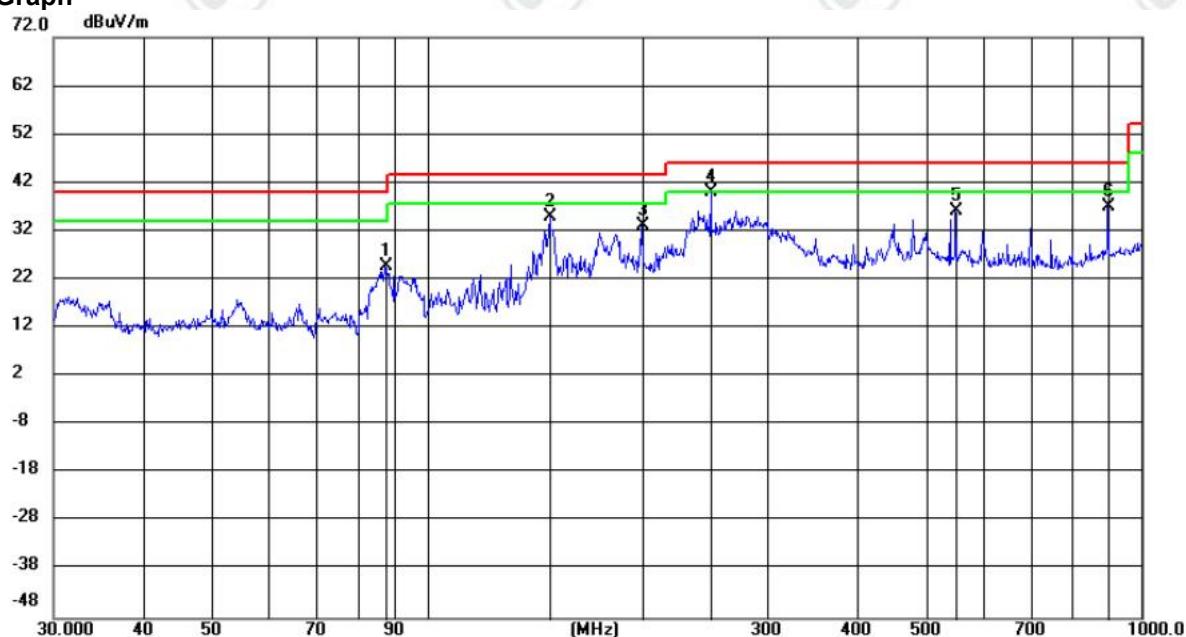

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		87.5403	13.77	11.00	24.77	40.00	-15.23	QP	100	142
2		148.7536	24.50	10.35	34.85	43.50	-8.65	QP	100	4
3		200.0205	20.35	12.78	33.13	43.50	-10.37	QP	100	184
4	*	249.9941	25.32	14.68	40.00	46.00	-6.00	QP	100	289
5		550.0793	14.21	22.08	36.29	46.00	-9.71	QP	100	195
6		899.9896	9.61	27.31	36.92	46.00	-9.08	QP	100	25

Vertical:

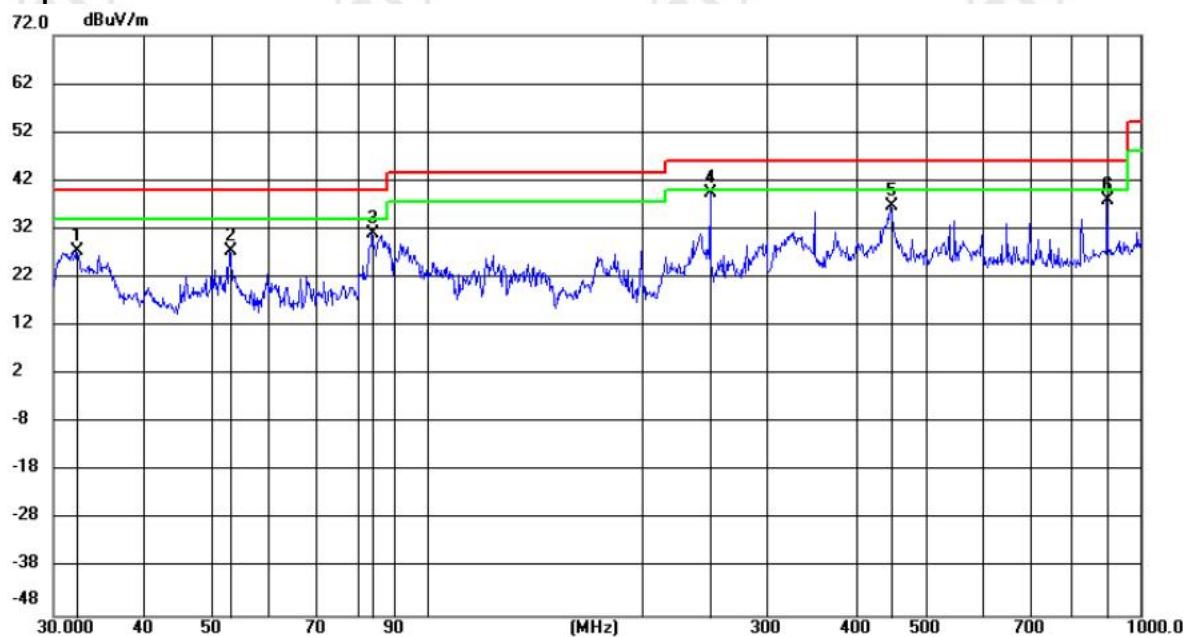
Test Graph


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		32.3832	14.89	12.49	27.38	40.00	-12.62	QP	100	252
2		53.0941	13.18	14.19	27.37	40.00	-12.63	QP	100	284
3		83.8891	20.70	10.30	31.00	40.00	-9.00	QP	100	167
4	*	249.9942	24.73	14.68	39.41	46.00	-6.59	QP	100	103
5		446.8056	16.58	20.16	36.74	46.00	-9.26	QP	100	145
6		899.9896	10.74	27.31	38.05	46.00	-7.95	QP	100	135

Adapter MS-TA460J240-350B0:


Horizontal:

Test Graph

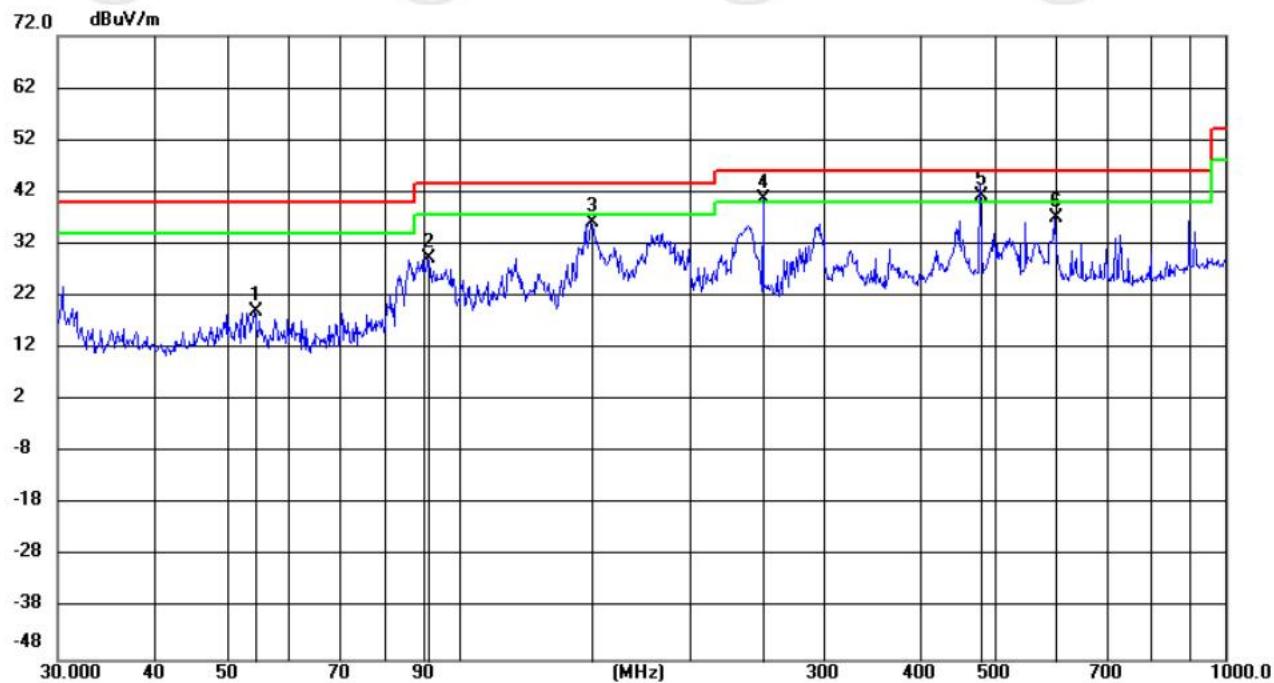

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		54.2990	4.93	14.03	18.96	40.00	-21.04	QP	199	352
2		91.4146	17.53	11.72	29.25	43.50	-14.25	QP	199	150
3		149.1715	25.66	10.35	36.01	43.50	-7.49	QP	199	161
4	!	249.9941	25.94	14.68	40.62	46.00	-5.38	QP	100	313
5	*	480.0223	20.63	20.57	41.20	46.00	-4.80	QP	199	129
6		600.0571	13.64	23.35	36.99	46.00	-9.01	QP	100	123


Vertical:

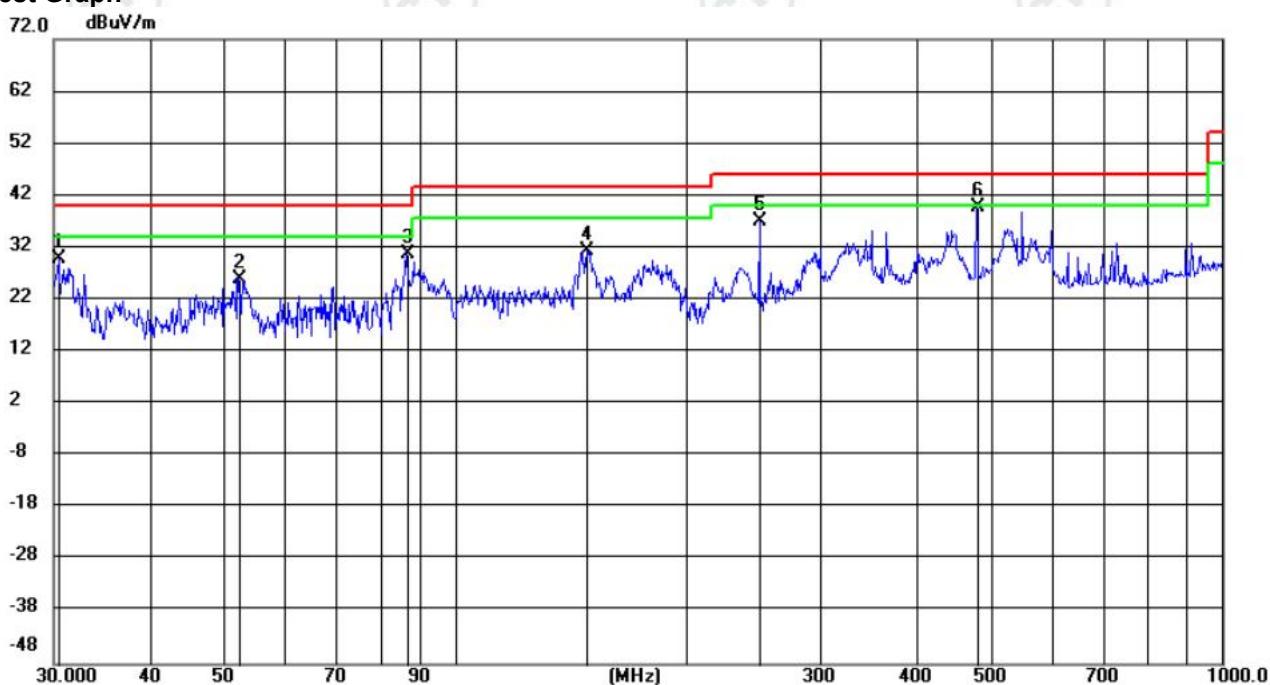Test Graph


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height cm	Table Degree degree	Comment
		dBuV	dB/m	dBuV/m	dBuV/m	dB			
1	30.5039	17.55	12.38	29.93	40.00	-10.07	QP	100	256
2	52.2079	11.70	14.30	26.00	40.00	-14.00	QP	100	235
3	86.6243	19.84	10.83	30.67	40.00	-9.33	QP	100	150
4	148.6233	21.13	10.36	31.49	43.50	-12.01	QP	200	28
5	249.9942	22.46	14.68	37.14	46.00	-8.86	QP	100	85
6 *	480.0224	19.16	20.57	39.73	46.00	-6.27	QP	100	160

Adapter PMR-24V320W1AT:

Horizontal:

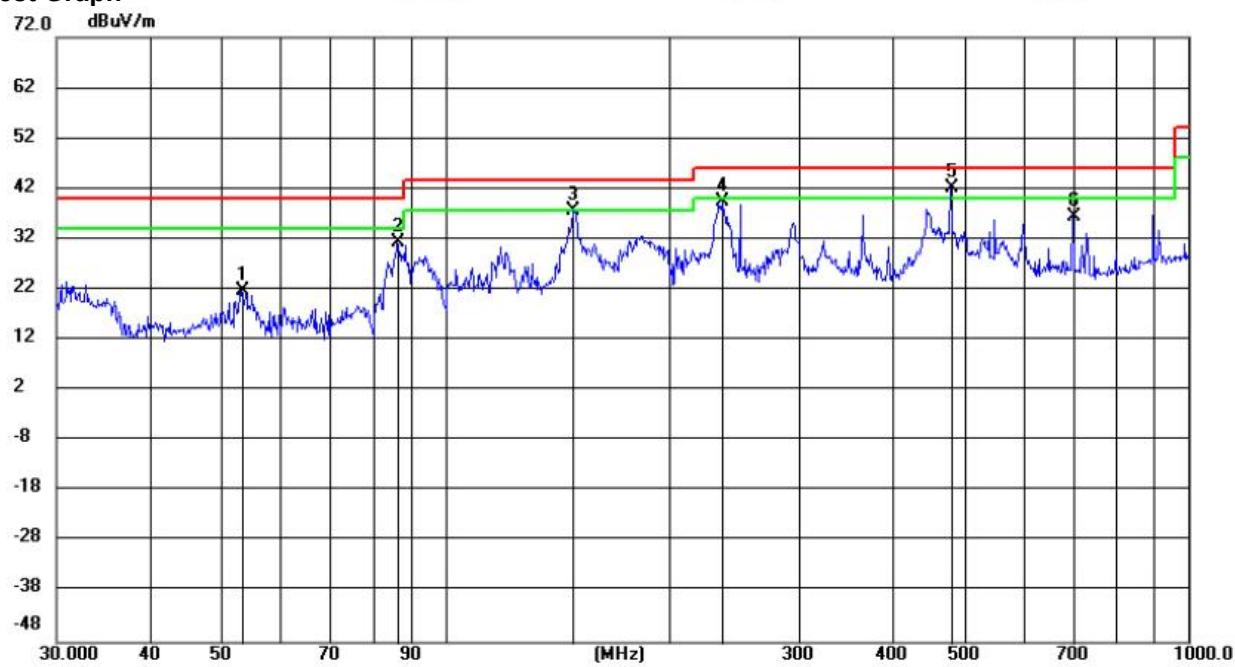
Test Graph


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB/m	dBuV/m	dB	Detector	cm	degree	Comment
1		53.1406	7.57	14.18	21.75	40.00	-18.25	QP	199	348	
2		86.3210	20.65	10.76	31.41	40.00	-8.59	QP	199	135	
3	!	148.7274	27.27	10.36	37.63	43.50	-5.87	QP	199	178	
4		235.8163	25.39	14.14	39.53	46.00	-6.47	QP	100	33	
5	*	480.0223	21.69	20.57	42.26	46.00	-3.74	QP	199	135	
6		700.0406	12.18	24.23	36.41	46.00	-9.59	QP	199	220	

Vertical:

Test Graph

72.0 dBuV/m

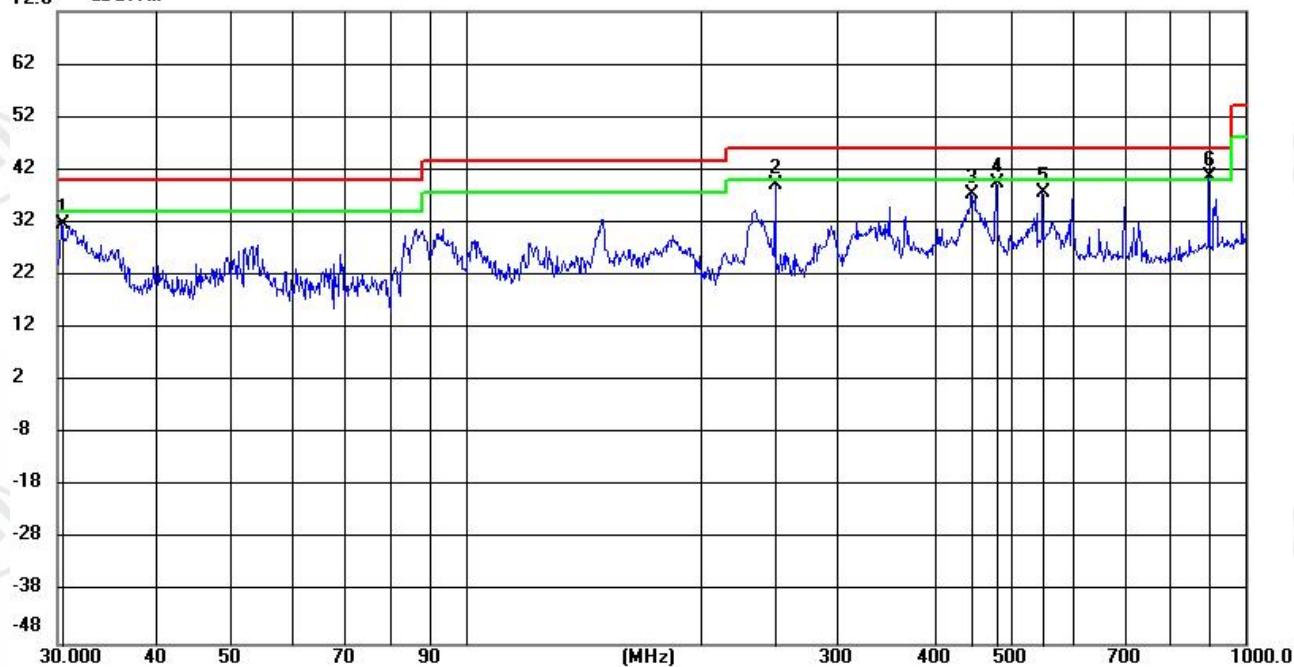

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table		
			Level	Factor	ment				Degree	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		30.4238	19.37	12.38	31.75	40.00	-8.25	QP	100	177	
2		249.9942	24.56	14.68	39.24	46.00	-6.76	QP	100	103	
3		446.1793	17.16	20.15	37.31	46.00	-8.69	QP	100	166	
4		480.0224	18.96	20.57	39.53	46.00	-6.47	QP	200	108	
5		549.9829	15.52	22.08	37.60	46.00	-8.40	QP	200	182	
6	*	900.1474	13.21	27.31	40.52	46.00	-5.48	QP	100	135	

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 b mode was the worst case; for 40MHz Occupied Bandwidth, 802.11 n(HT40) mode was the worst case; only the worst case was recorded in the report.

Adapter PMR-24V320W1AT:

Mode:		802.11 b Transmitting			Channel:		2412MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1176.2784	11.46	38.24	49.70	74.00	24.30	PASS	H	PK
2	1632.8422	13.89	36.85	50.74	74.00	23.26	PASS	H	PK
3	3586.9891	-13.39	55.42	42.03	74.00	31.97	PASS	H	PK
4	5459.764	-6.45	49.49	43.04	74.00	30.96	PASS	H	PK
5	8744.433	-0.24	46.75	46.51	74.00	27.49	PASS	H	PK
6	11956.9471	3.10	46.86	49.96	74.00	24.04	PASS	H	PK
7	1151.4768	11.50	38.52	50.02	74.00	23.98	PASS	V	PK
8	1742.7162	14.12	37.28	51.40	74.00	22.60	PASS	V	PK
9	3194.363	-14.48	58.96	44.48	74.00	29.02	PASS	V	PK
10	4751.8668	-8.64	55.16	46.52	74.00	26.48	PASS	V	PK
11	5280.352	-7.23	58.99	51.76	74.00	22.24	PASS	V	PK
12	10792.7195	1.95	46.67	48.62	74.00	25.38	PASS	V	PK

Mode:		802.11 b Transmitting			Channel:		2437MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1127.6085	11.40	37.57	48.97	74.00	25.03	PASS	H	PK
2	1644.5763	14.04	36.47	50.51	74.00	23.49	PASS	H	PK
3	3249.6166	-14.11	58.38	44.27	74.00	29.73	PASS	H	PK
4	5280.352	-7.23	50.04	42.81	74.00	31.19	PASS	H	PK
5	7724.515	-1.57	46.67	45.10	74.00	28.90	PASS	H	PK
6	11296.5031	2.44	45.49	47.93	74.00	26.07	PASS	H	PK
7	1198.6799	11.66	37.18	48.84	74.00	25.16	PASS	V	PK
8	1728.4486	14.18	36.81	50.99	74.00	23.01	PASS	V	PK
9	3192.4128	-14.49	60.69	46.20	74.00	27.80	PASS	V	PK
10	4751.8668	-8.64	55.79	47.15	74.00	26.85	PASS	V	PK
11	5279.702	-7.23	57.61	50.38	74.00	23.62	PASS	V	PK
12	7963.7309	-1.39	51.27	49.88	74.00	24.12	PASS	V	PK

Mode:		802.11 b Transmitting			Channel:		2462MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1136.2758	11.43	37.22	48.65	74.00	25.35	PASS	H	PK
2	1639.776	14.05	36.28	50.33	74.00	23.67	PASS	H	PK
3	3282.7689	-14.10	58.22	44.12	74.00	29.88	PASS	H	PK
4	5279.702	-7.23	50.68	43.45	74.00	30.55	PASS	H	PK
5	6565.4877	-3.93	49.58	45.65	74.00	28.35	PASS	H	PK
6	11284.8023	2.43	45.54	47.97	74.00	26.03	PASS	H	PK
7	1146.1431	11.48	37.59	49.07	74.00	24.93	PASS	V	PK
8	1629.642	13.83	36.53	50.36	74.00	23.64	PASS	V	PK
9	3187.2125	-14.50	60.30	45.80	74.00	28.20	PASS	V	PK
10	4751.8668	-8.64	55.58	46.94	74.00	27.06	PASS	V	PK
11	5280.352	-7.23	57.78	50.55	74.00	23.45	PASS	V	PK
12	7986.4824	-1.37	50.24	48.87	74.00	25.13	PASS	V	PK

Mode:		802.11 n(HT40) Transmitting			Channel:		2422MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1168.4112	11.46	38.31	49.77	74.00	24.23	PASS	H	PK
2	1395.093	12.81	37.19	50.00	74.00	24.00	PASS	H	PK
3	3229.4653	-14.25	63.24	48.99	74.00	25.01	PASS	H	PK
4	5280.352	-7.23	50.72	43.49	74.00	30.51	PASS	H	PK
5	6458.8806	-4.30	49.69	45.39	74.00	28.61	PASS	H	PK
6	11228.8986	2.32	45.31	47.63	74.00	26.37	PASS	H	PK
7	1079.6053	11.26	37.91	49.17	74.00	24.83	PASS	V	PK
8	1414.561	12.89	36.62	49.51	74.00	24.49	PASS	V	PK
9	3187.2125	-14.50	60.26	45.76	74.00	28.24	PASS	V	PK
10	4751.8668	-8.64	57.12	48.48	74.00	25.52	PASS	V	PK
11	5280.352	-7.23	57.94	50.71	74.00	23.29	PASS	V	PK
12	7981.2821	-1.38	49.09	47.71	74.00	26.29	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1175.0783	11.46	36.95	48.41	74.00	25.59	PASS	H	PK
2	1782.1855	14.27	36.78	51.05	74.00	22.95	PASS	H	PK
3	3249.6166	-14.11	62.20	48.09	74.00	25.91	PASS	H	PK
4	5280.352	-7.23	52.04	44.81	74.00	29.19	PASS	H	PK
5	6498.5332	-4.50	49.46	44.96	74.00	29.04	PASS	H	PK
6	11826.2884	2.46	45.35	47.81	74.00	26.19	PASS	H	PK
7	1089.7393	11.31	37.56	48.87	74.00	25.13	PASS	V	PK
8	1739.3826	14.13	37.64	51.77	74.00	22.23	PASS	V	PK
9	3195.663	-14.47	60.18	45.71	74.00	28.29	PASS	V	PK
10	4751.8668	-8.64	54.67	46.03	74.00	27.97	PASS	V	PK
11	5279.702	-7.23	57.96	50.73	74.00	23.27	PASS	V	PK
12	7985.1823	-1.37	49.02	47.65	74.00	26.35	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1082.0055	11.28	38.05	49.33	74.00	24.67	PASS	H	PK
2	1771.3848	14.38	35.99	50.37	74.00	23.63	PASS	H	PK
3	3269.1179	-14.10	64.38	50.28	74.00	23.72	PASS	H	PK
4	5280.352	-7.23	50.30	43.07	74.00	30.93	PASS	H	PK
5	6538.8359	-4.06	48.76	44.70	74.00	29.30	PASS	H	PK
6	9321.6714	0.91	46.02	46.93	74.00	27.07	PASS	H	PK
7	1075.8717	11.20	37.39	48.59	74.00	25.41	PASS	V	PK
8	1665.6444	13.90	36.85	50.75	74.00	23.25	PASS	V	PK
9	3193.7129	-14.48	60.39	45.91	74.00	28.09	PASS	V	PK
10	4751.8668	-8.64	56.39	47.75	74.00	26.25	PASS	V	PK
11	5279.702	-7.23	58.16	50.93	74.00	23.07	PASS	V	PK
12	6538.8359	-4.06	49.31	45.25	74.00	28.75	PASS	V	PK

Adapter MS-TA460J240-350B0:

Mode:		802.11 b Transmitting			Channel:		2412MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1124.8083	11.36	37.66	49.02	74.00	24.98	PASS	H	PK
2	1369.8913	12.72	37.45	50.17	74.00	23.83	PASS	H	PK
3	3361.4241	-14.00	54.64	40.64	74.00	33.36	PASS	H	PK
4	5280.352	-7.23	50.65	43.42	74.00	30.58	PASS	H	PK
5	6431.5788	-4.30	49.57	45.27	74.00	28.73	PASS	H	PK
6	7970.2313	-1.38	48.81	47.43	74.00	26.57	PASS	H	PK
7	1118.0079	11.30	37.70	49.00	74.00	25.00	PASS	V	PK
8	1576.8385	13.52	37.24	50.76	74.00	23.24	PASS	V	PK
9	3198.2632	-14.46	60.67	46.21	74.00	27.79	PASS	V	PK
10	4653.7102	-9.17	55.35	46.18	74.00	27.82	PASS	V	PK
11	5279.702	-7.23	53.06	45.83	74.00	28.17	PASS	V	PK
12	7777.8185	-1.80	46.93	45.13	74.00	28.87	PASS	V	PK

Mode:		802.11 b Transmitting			Channel:		2437MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1206.5471	11.64	37.30	48.94	74.00	25.06	PASS	H	PK
2	1535.369	13.48	37.16	50.64	74.00	23.36	PASS	H	PK
3	3249.6166	-14.11	58.42	44.31	74.00	29.69	PASS	H	PK
4	4721.9648	-8.76	49.81	41.05	74.00	32.95	PASS	H	PK
5	6498.5332	-4.50	49.29	44.79	74.00	29.21	PASS	H	PK
6	7311.7374	-2.87	50.20	47.33	74.00	26.67	PASS	H	PK
7	1154.5436	11.50	37.45	48.95	74.00	25.05	PASS	V	PK
8	1642.4428	14.05	36.67	50.72	74.00	23.28	PASS	V	PK
9	3188.5126	-14.49	60.61	46.12	74.00	27.88	PASS	V	PK
10	4751.8668	-8.64	53.05	44.41	74.00	29.59	PASS	V	PK
11	5279.702	-7.23	53.37	46.14	74.00	27.86	PASS	V	PK
12	7775.8684	-1.77	47.03	45.26	74.00	28.74	PASS	V	PK

Mode:		802.11 b Transmitting			Channel:		2462MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1170.4114	11.46	37.54	49.00	74.00	25.00	PASS	H	PK
2	1858.3239	14.49	36.19	50.68	74.00	23.32	PASS	H	PK
3	3282.7689	-14.10	55.46	41.36	74.00	32.64	PASS	H	PK
4	4699.8633	-8.85	49.40	40.55	74.00	33.45	PASS	H	PK
5	6565.4877	-3.93	48.43	44.50	74.00	29.50	PASS	H	PK
6	7777.8185	-1.80	47.46	45.66	74.00	28.34	PASS	H	PK
7	1197.6132	11.64	37.31	48.95	74.00	25.05	PASS	V	PK
8	1582.4388	13.58	36.43	50.01	74.00	23.99	PASS	V	PK
9	3187.2125	-14.50	60.36	45.86	74.00	28.14	PASS	V	PK
10	5280.352	-7.23	54.32	47.09	74.00	26.91	PASS	V	PK
11	6378.2752	-4.36	52.30	47.94	74.00	26.06	PASS	V	PK
12	7491.1494	-2.32	48.27	45.95	74.00	28.05	PASS	V	PK

Mode:		802.11 n(HT40) Transmitting			Channel:		2422MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1168.0112	11.46	36.76	48.22	74.00	25.78	PASS	H	PK
2	1618.1745	13.71	36.77	50.48	74.00	23.52	PASS	H	PK
3	3229.4653	-14.25	60.58	46.33	74.00	27.67	PASS	H	PK
4	4890.9761	-8.32	49.45	41.13	74.00	32.87	PASS	H	PK
5	6458.8806	-4.30	49.58	45.28	74.00	28.72	PASS	H	PK
6	9578.4386	1.20	45.00	46.20	74.00	27.80	PASS	H	PK
7	1192.1461	11.56	36.70	48.26	74.00	25.74	PASS	V	PK
8	1681.3788	14.02	36.80	50.82	74.00	23.18	PASS	V	PK
9	3188.5126	-14.49	60.01	45.52	74.00	28.48	PASS	V	PK
10	4751.8668	-8.64	53.28	44.64	74.00	29.36	PASS	V	PK
11	5280.352	-7.23	53.79	46.56	74.00	27.44	PASS	V	PK
12	8519.518	-0.55	46.70	46.15	74.00	27.85	PASS	V	PK

Mode:		802.11 n(HT40) Transmitting				Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1136.5424	11.43	36.68	48.11	74.00	25.89	PASS	H	PK
2	1914.861	14.78	36.01	50.79	74.00	23.21	PASS	H	PK
3	3248.9666	-14.12	58.95	44.83	74.00	29.17	PASS	H	PK
4	4902.0268	-8.28	50.97	42.69	74.00	31.31	PASS	H	PK
5	7307.1871	-2.87	50.66	47.79	74.00	26.21	PASS	H	PK
6	10341.5894	1.84	44.42	46.26	74.00	27.74	PASS	H	PK
7	1218.1479	11.55	37.19	48.74	74.00	25.26	PASS	V	PK
8	1837.2558	14.33	36.39	50.72	74.00	23.28	PASS	V	PK
9	3187.2125	-14.50	59.10	44.60	74.00	29.40	PASS	V	PK
10	4751.8668	-8.64	53.51	44.87	74.00	29.13	PASS	V	PK
11	5280.352	-7.23	53.84	46.61	74.00	27.39	PASS	V	PK
12	7990.3827	-1.37	50.41	49.04	74.00	24.96	PASS	V	PK

Mode:		802.11 n(HT40) Transmitting				Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1231.0821	11.51	37.10	48.61	74.00	25.39	PASS	H	PK
2	1734.9823	14.16	36.69	50.85	74.00	23.15	PASS	H	PK
3	3269.1179	-14.10	59.76	45.66	74.00	28.34	PASS	H	PK
4	5279.702	-7.23	50.08	42.85	74.00	31.15	PASS	H	PK
5	6538.1859	-4.07	49.78	45.71	74.00	28.29	PASS	H	PK
6	8734.6823	-0.31	46.26	45.95	74.00	28.05	PASS	H	PK
7	1157.0771	11.48	37.59	49.07	74.00	24.93	PASS	V	PK
8	1665.6444	13.90	37.30	51.20	74.00	22.80	PASS	V	PK
9	3194.363	-14.48	59.93	45.45	74.00	28.55	PASS	V	PK
10	4751.8668	-8.64	52.86	44.22	74.00	29.78	PASS	V	PK
11	5280.352	-7.23	54.89	47.66	74.00	26.34	PASS	V	PK
12	6375.025	-4.36	50.01	45.65	74.00	28.35	PASS	V	PK

Adapter A-350FKD-24P-B0:

Mode:		802.11 b Transmitting			Channel:		2412MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1303.4869	12.12	37.29	49.41	74.00	24.59	PASS	H	PK
2	1749.7833	14.06	39.74	53.80	74.00	20.20	PASS	H	PK
3	3215.8144	-14.35	58.76	44.41	74.00	29.59	PASS	H	PK
4	5280.352	-7.23	49.67	42.44	74.00	31.56	PASS	H	PK
5	7236.3324	-3.09	49.13	46.04	74.00	27.96	PASS	H	PK
6	10270.7347	1.94	43.97	45.91	74.00	28.09	PASS	H	PK
7	1187.2125	11.51	37.43	48.94	74.00	25.06	PASS	V	PK
8	1752.4502	14.10	36.83	50.93	74.00	23.07	PASS	V	PK
9	3199.5633	-14.46	60.51	46.05	74.00	27.95	PASS	V	PK
10	5280.352	-7.23	53.34	46.11	74.00	27.89	PASS	V	PK
11	7989.0826	-1.37	47.32	45.95	74.00	28.05	PASS	V	PK
12	11290.0027	2.43	44.20	46.63	74.00	27.37	PASS	V	PK

Mode:		802.11 b Transmitting			Channel:		2437MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1264.4176	11.91	37.41	49.32	74.00	24.68	PASS	H	PK
2	1758.7172	14.21	37.70	51.91	74.00	22.09	PASS	H	PK
3	3248.9666	-14.12	58.10	43.98	74.00	30.02	PASS	H	PK
4	5094.4396	-7.63	49.03	41.40	74.00	32.60	PASS	H	PK
5	7311.7374	-2.87	49.74	46.87	74.00	27.13	PASS	H	PK
6	10381.2421	1.87	42.51	44.38	74.00	29.62	PASS	H	PK
7	1273.6182	11.85	36.78	48.63	74.00	25.37	PASS	V	PK
8	1728.3152	14.18	37.20	51.38	74.00	22.62	PASS	V	PK
9	3186.5624	-14.50	59.33	44.83	74.00	29.17	PASS	V	PK
10	5280.352	-7.23	53.12	45.89	74.00	28.11	PASS	V	PK
11	7963.7309	-1.39	51.41	50.02	74.00	23.98	PASS	V	PK
12	11229.5486	2.32	44.19	46.51	74.00	27.49	PASS	V	PK

Mode:		802.11 b Transmitting			Channel:		2462MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1245.7497	11.61	36.70	48.31	74.00	25.69	PASS	H	PK
2	1635.3757	13.95	36.46	50.41	74.00	23.59	PASS	H	PK
3	3282.7689	-14.10	59.35	45.25	74.00	28.75	PASS	H	PK
4	4827.2718	-8.53	48.96	40.43	74.00	33.57	PASS	H	PK
5	7386.4924	-3.16	50.21	47.05	74.00	26.95	PASS	H	PK
6	10270.7347	1.94	44.03	45.97	74.00	28.03	PASS	H	PK
7	1222.5482	11.53	37.64	49.17	74.00	24.83	PASS	V	PK
8	1932.3288	14.67	36.61	51.28	74.00	22.72	PASS	V	PK
9	3168.3612	-14.55	58.16	43.61	74.00	30.39	PASS	V	PK
10	5280.352	-7.23	53.71	46.48	74.00	27.52	PASS	V	PK
11	8000.1333	-1.36	50.73	49.37	74.00	24.63	PASS	V	PK
12	11169.0946	2.09	43.68	45.77	74.00	28.23	PASS	V	PK

Mode:		802.11 n(HT40) Transmitting			Channel:		2422MHz		
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1203.4802	11.66	36.86	48.52	74.00	25.48	PASS	H	PK
2	1647.6432	14.03	36.53	50.56	74.00	23.44	PASS	H	PK
3	3229.4653	-14.25	59.47	45.22	74.00	28.78	PASS	H	PK
4	4954.0303	-8.03	48.56	40.53	74.00	33.47	PASS	H	PK
5	7261.0341	-2.95	51.39	48.44	74.00	25.56	PASS	H	PK
6	10702.3635	2.48	42.91	45.39	74.00	28.61	PASS	H	PK
7	1355.6237	12.55	36.78	49.33	74.00	24.67	PASS	V	PK
8	1963.2642	14.61	36.35	50.96	74.00	23.04	PASS	V	PK
9	3200.2133	-14.46	57.54	43.08	74.00	30.92	PASS	V	PK
10	5279.702	-7.23	53.12	45.89	74.00	28.11	PASS	V	PK
11	7989.7326	-1.37	46.05	44.68	74.00	29.32	PASS	V	PK
12	11209.3973	2.25	44.70	46.95	74.00	27.05	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1335.7557	12.38	36.23	48.61	74.00	25.39	PASS	H	PK
2	1904.9937	14.71	36.84	51.55	74.00	22.45	PASS	H	PK
3	3249.6166	-14.11	58.20	44.09	74.00	29.91	PASS	H	PK
4	5132.7922	-7.43	49.13	41.70	74.00	32.30	PASS	H	PK
5	7294.8363	-2.89	51.05	48.16	74.00	25.84	PASS	H	PK
6	11138.5426	2.05	46.08	48.13	74.00	25.87	PASS	H	PK
7	1194.1463	11.59	37.28	48.87	74.00	25.13	PASS	V	PK
8	1961.9308	14.61	36.97	51.58	74.00	22.42	PASS	V	PK
9	3192.4128	-14.49	58.47	43.98	74.00	30.02	PASS	V	PK
10	5280.352	-7.23	54.38	47.15	74.00	26.85	PASS	V	PK
11	7761.5674	-1.58	47.11	45.53	74.00	28.47	PASS	V	PK
12	11793.7863	2.37	44.98	47.35	74.00	26.65	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1270.6847	11.90	36.69	48.59	74.00	25.41	PASS	H	PK
2	1963.3976	14.62	36.64	51.26	74.00	22.74	PASS	H	PK
3	3269.1179	-14.10	59.85	45.75	74.00	28.25	PASS	H	PK
4	4987.8325	-8.12	49.89	41.77	74.00	32.23	PASS	H	PK
5	7353.9903	-2.89	51.58	48.69	74.00	25.31	PASS	H	PK
6	11729.432	2.52	45.44	47.96	74.00	26.04	PASS	H	PK
7	1284.419	11.86	36.91	48.77	74.00	25.23	PASS	V	PK
8	1838.7226	14.32	37.01	51.33	74.00	22.67	PASS	V	PK
9	3187.2125	-14.50	58.03	43.53	74.00	30.47	PASS	V	PK
10	4751.8668	-8.64	55.43	46.79	74.00	27.21	PASS	V	PK
11	7963.7309	-1.39	47.94	46.55	74.00	27.45	PASS	V	PK
12	11241.2494	2.36	44.85	47.21	74.00	26.79	PASS	V	PK

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

Test plot as follows:

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		

Test Graph

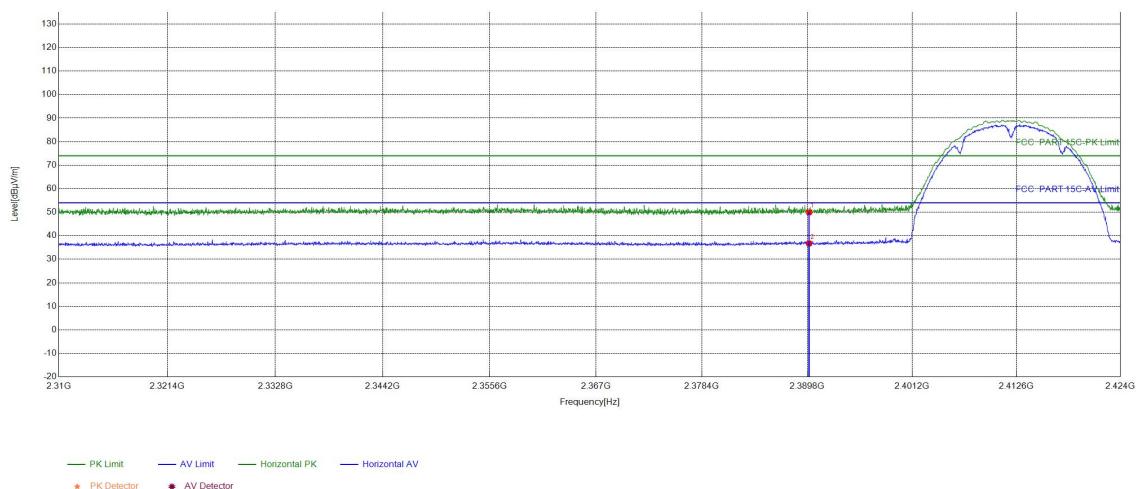


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.98	49.94	74.00	24.06	PASS	Horizontal	PK
2	2390	15.96	20.76	36.72	54.00	17.28	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		


Test Graph

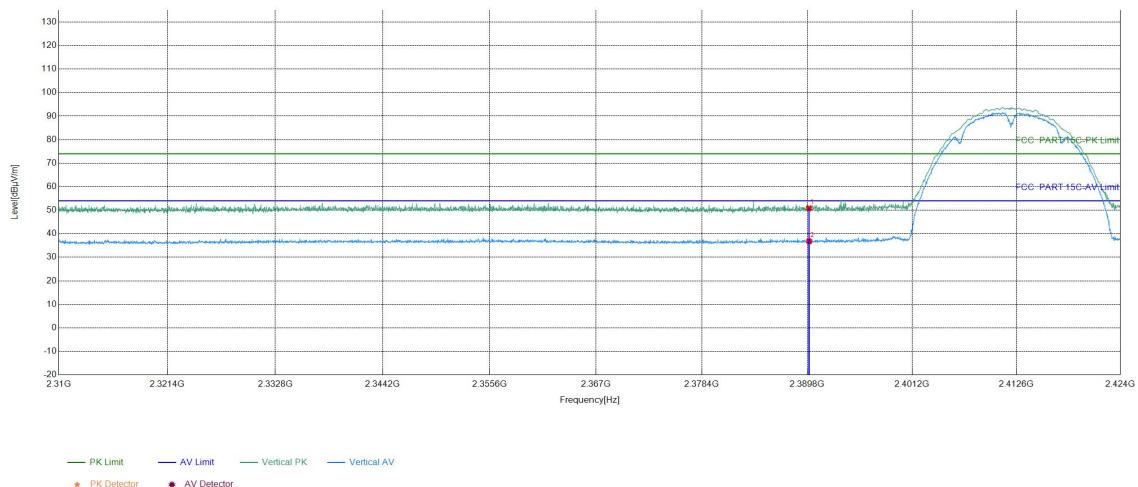

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.86	50.82	74.00	23.18	PASS	Vertical	PK
2	2390	15.96	20.83	36.79	54.00	17.21	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		

Test Graph

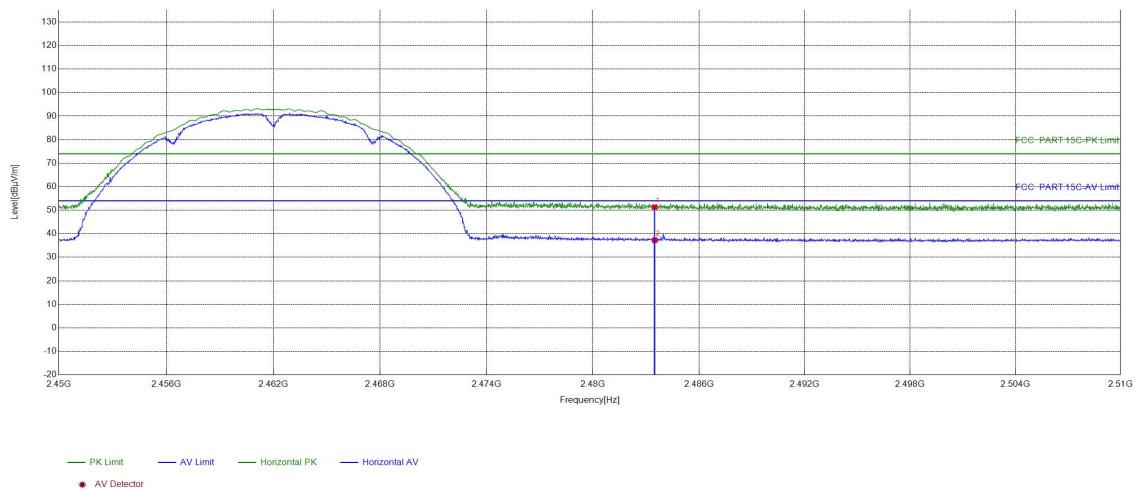


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.03	51.32	74.00	22.68	PASS	Horizontal	PK
2	2483.5	16.29	20.99	37.28	54.00	16.72	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		

Test Graph

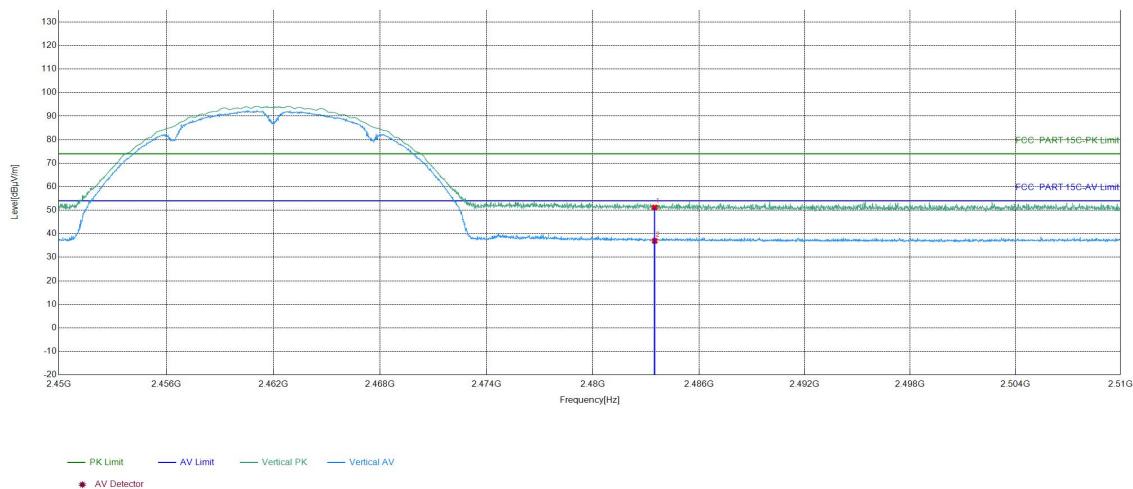


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.86	51.15	74.00	22.85	PASS	Vertical	PK
2	2483.5	16.29	20.68	36.97	54.00	17.03	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		


Test Graph

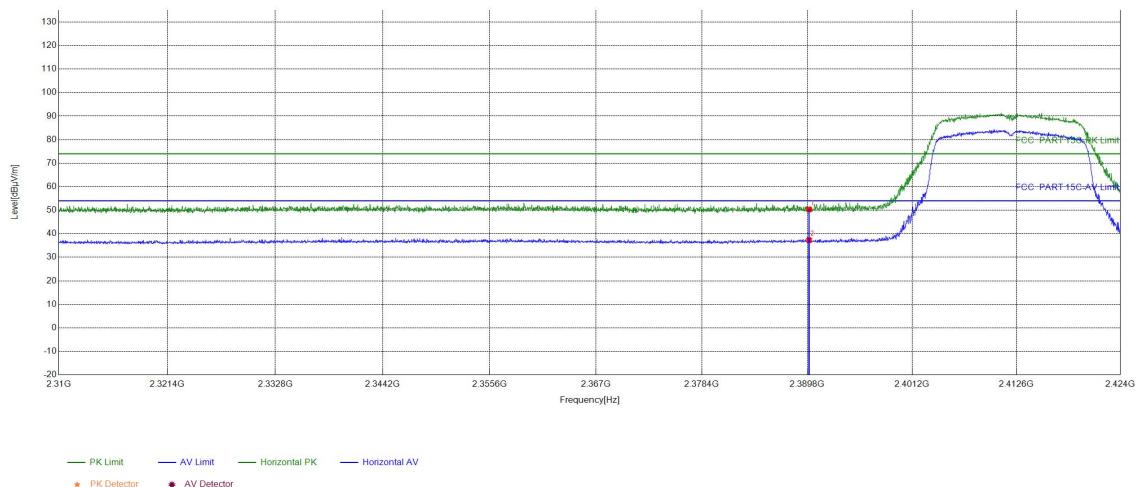

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.39	50.35	74.00	23.65	PASS	Horizontal	PK
2	2390	15.96	21.33	37.29	54.00	16.71	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		

Test Graph

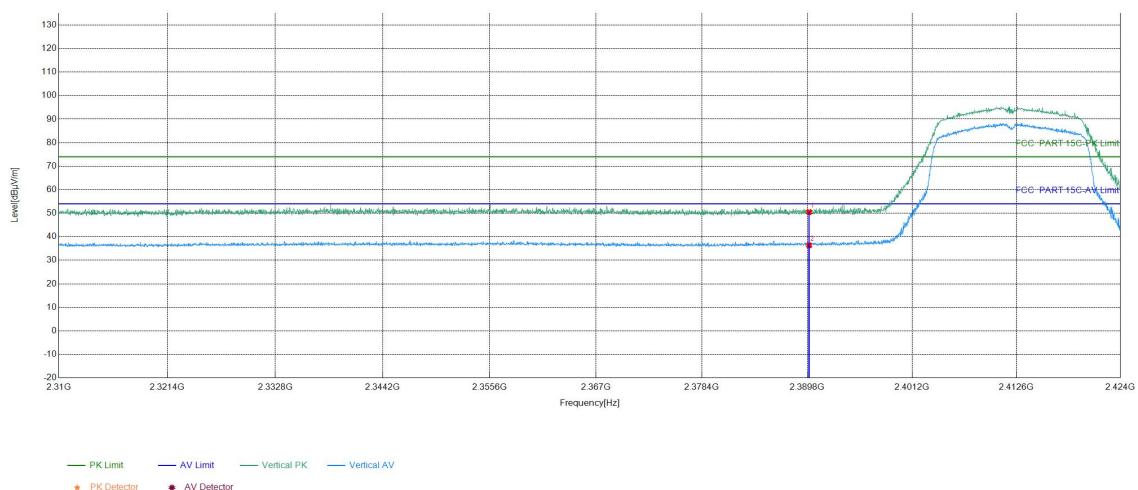


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.53	50.49	74.00	23.51	PASS	Vertical	PK
2	2390	15.96	20.40	36.36	54.00	17.64	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		


Test Graph

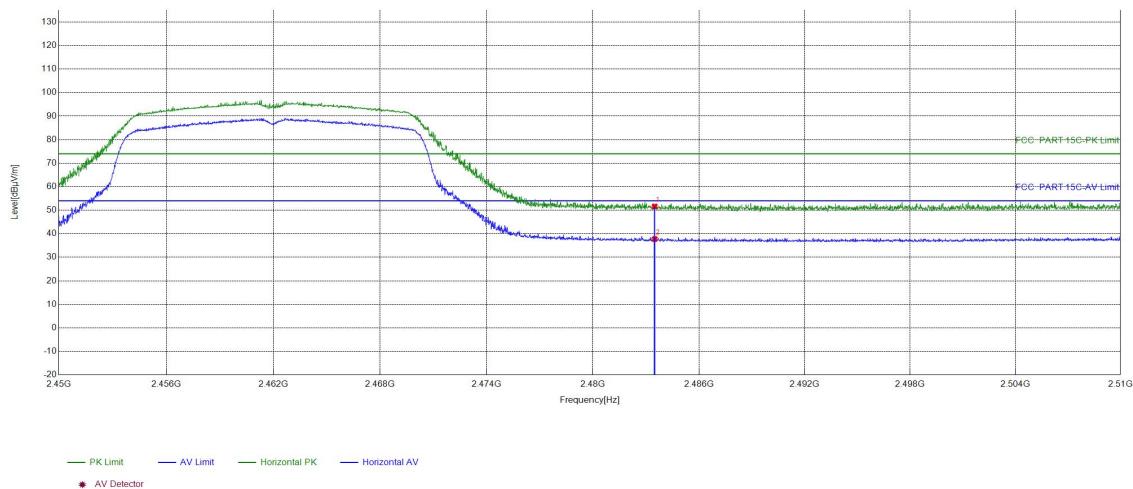

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.34	51.63	74.00	22.37	PASS	Horizontal	PK
2	2483.5	16.29	21.47	37.76	54.00	16.24	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		


Test Graph

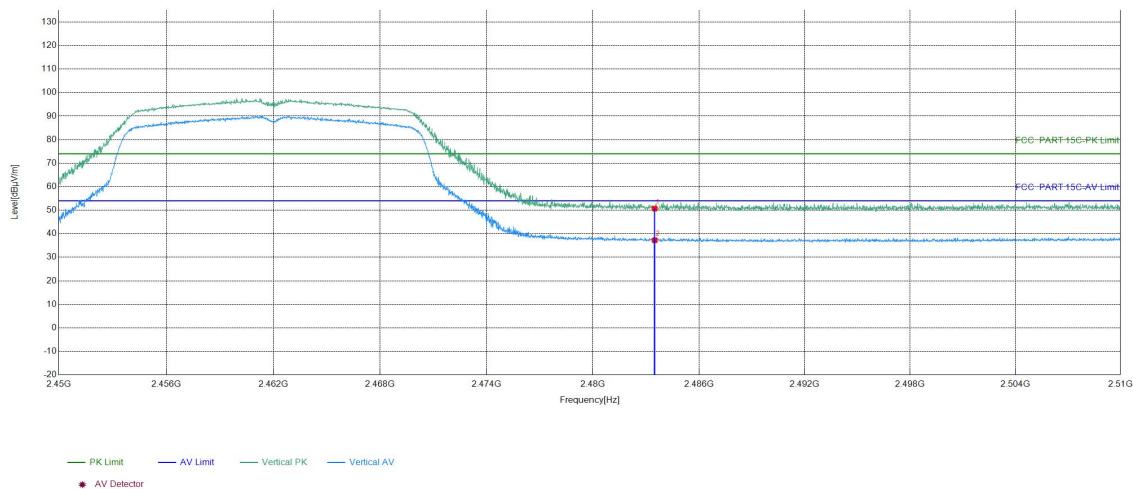

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.41	50.70	74.00	23.30	PASS	Vertical	PK
2	2483.5	16.29	20.97	37.26	54.00	16.74	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		


Test Graph

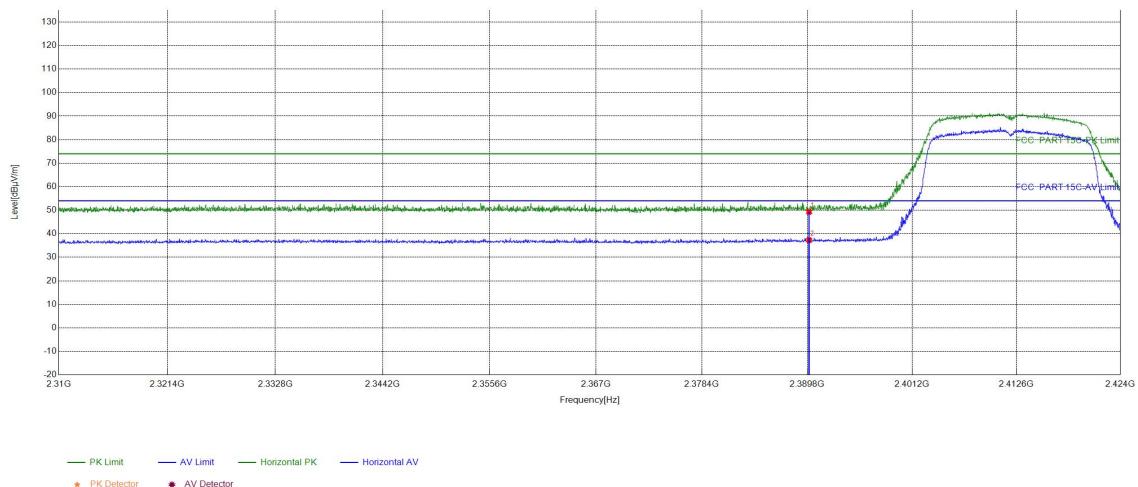

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.35	49.31	74.00	24.69	PASS	Horizontal	PK
2	2390	15.96	21.32	37.28	54.00	16.72	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/06/09
Remark	Adapter: PMR-24V320W1AT		

Test Graph

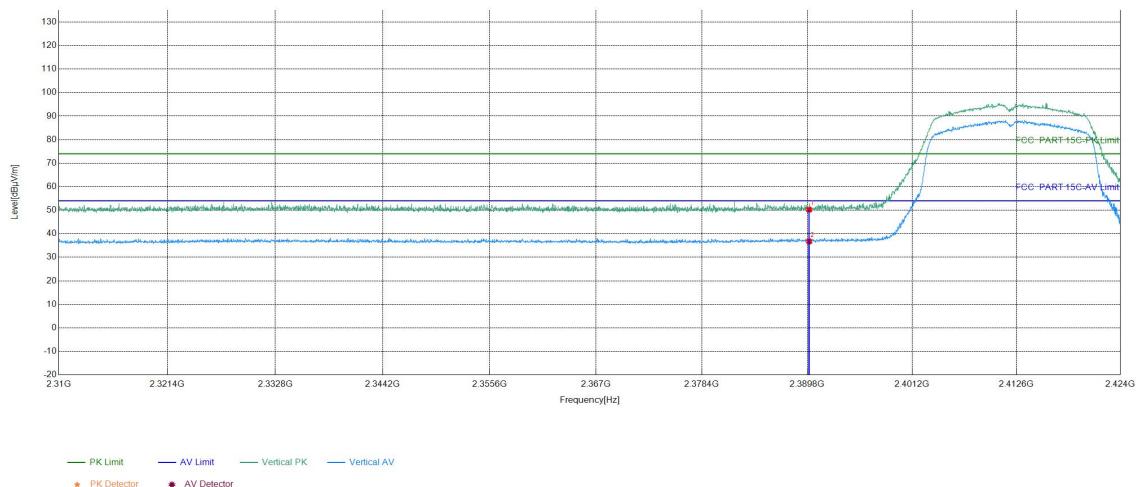

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.28	50.24	74.00	23.76	PASS	Vertical	PK
2	2390	15.96	20.79	36.75	54.00	17.25	PASS	Vertical	AV