


Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5795MHz
Tset_Engineer	chenjun	Test_Date	2025/08/06
Remark	Adapter: PMR-24V320W1AT		


Test Graph

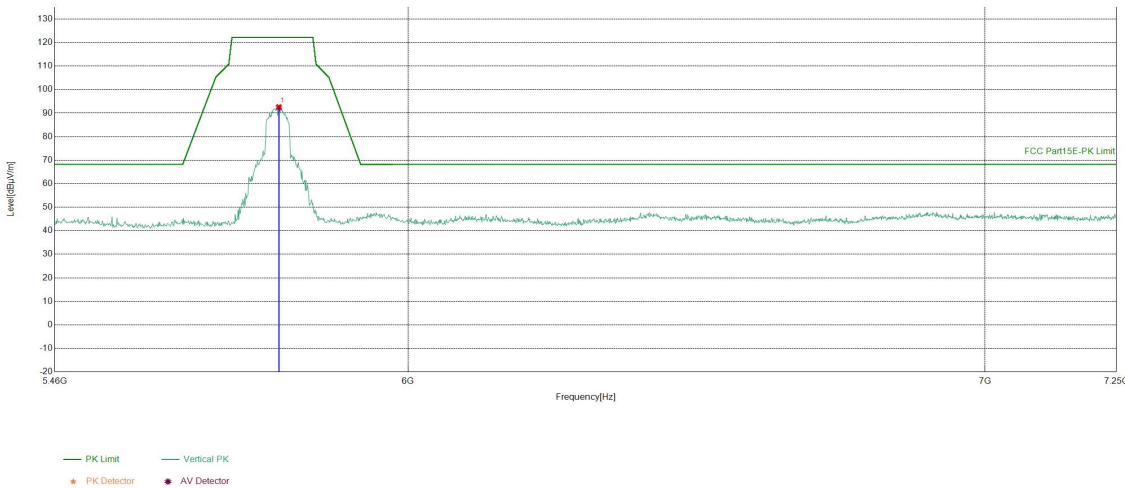

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5796.6883	-5.45	97.98	92.53	122.20	29.67	PASS	Vertical	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

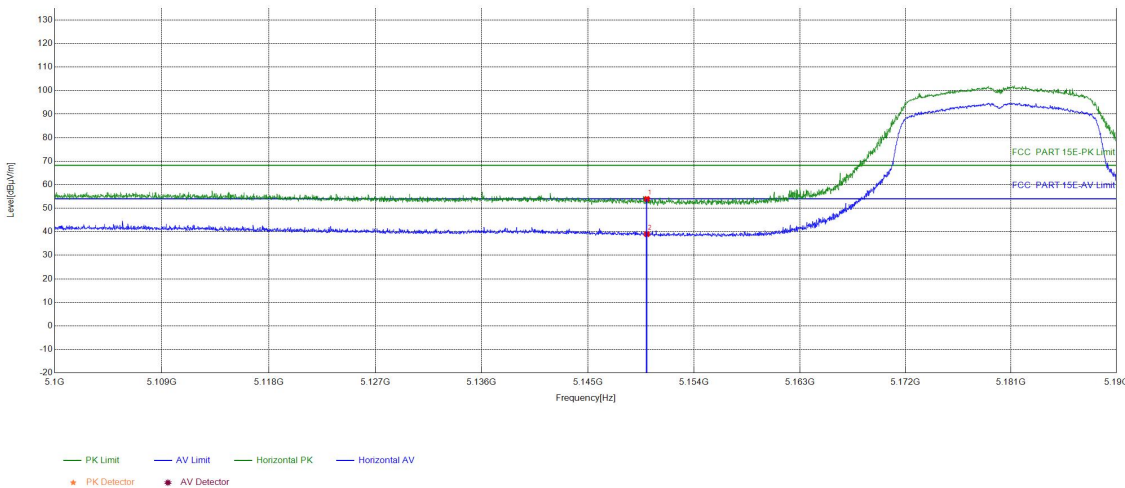

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	29.94	53.92	68.20	14.28	PASS	Horizontal	PK
2	5150	23.98	15.02	39.00	54.00	15.00	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

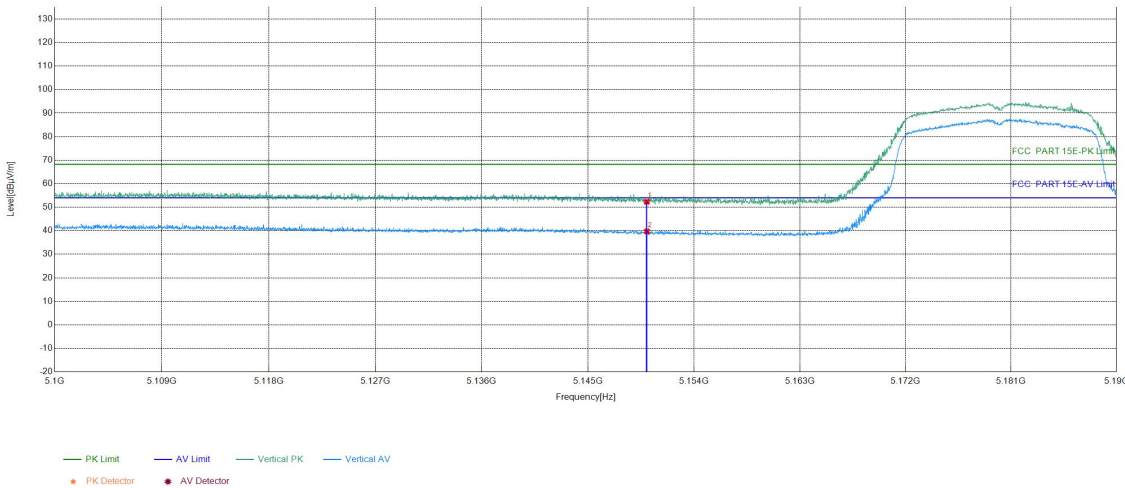

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	28.33	52.31	68.20	15.89	PASS	Vertical	PK
2	5150	23.98	15.75	39.73	54.00	14.27	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

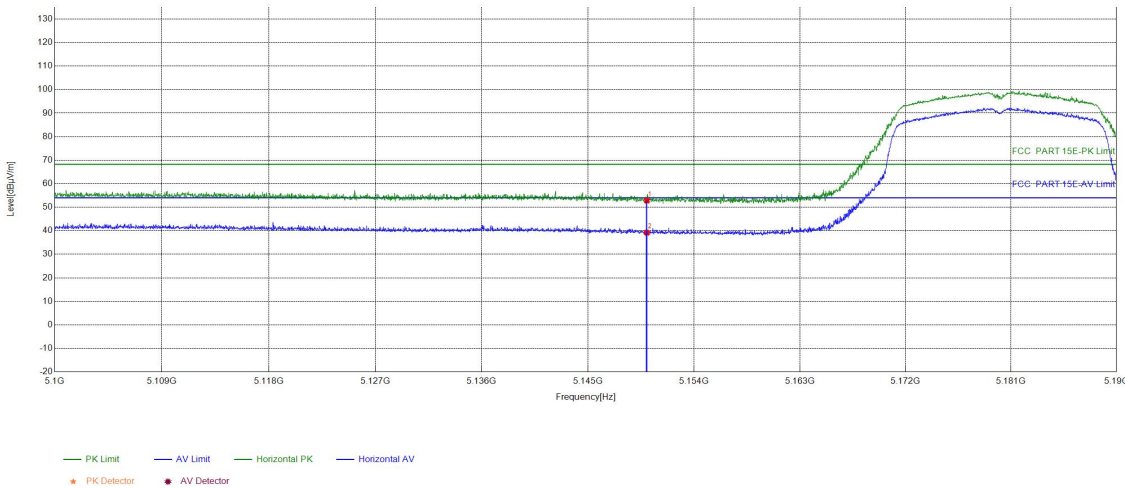

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	28.84	52.82	68.20	15.38	PASS	Horizontal	PK
2	5150	23.98	15.20	39.18	54.00	14.82	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

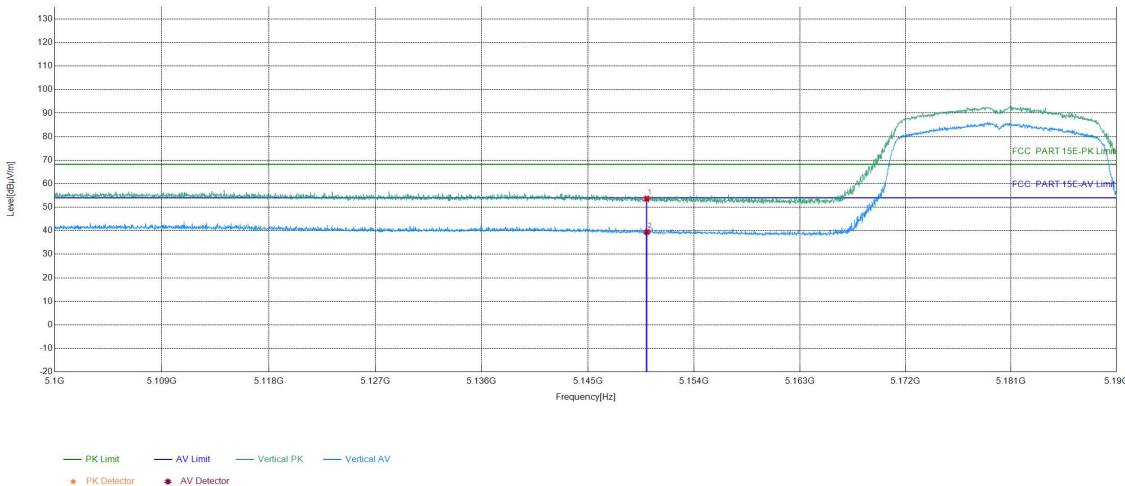

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	29.69	53.67	68.20	14.53	PASS	Vertical	PK
2	5150	23.98	15.44	39.42	54.00	14.58	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

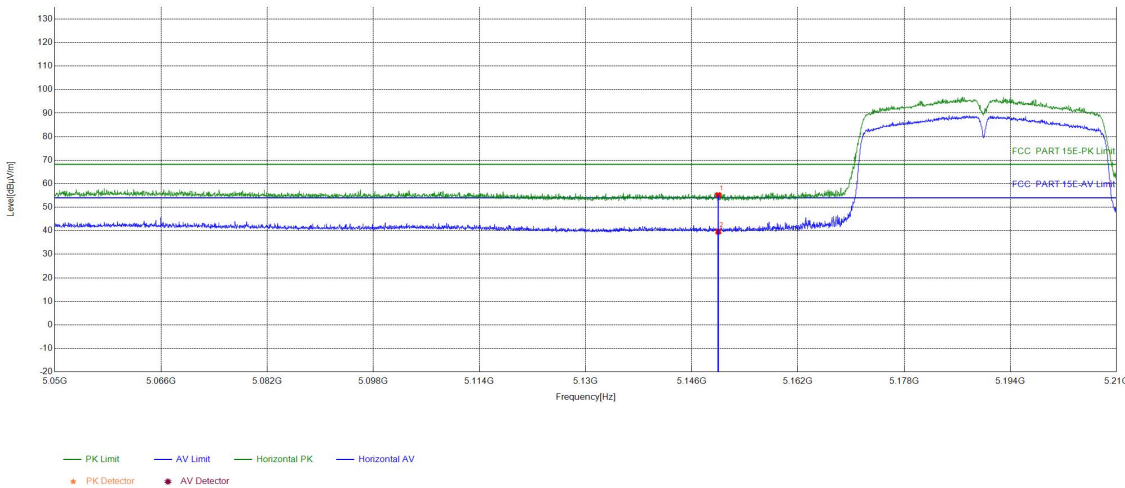

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	31.10	55.18	68.20	13.02	PASS	Horizontal	PK
2	5150	24.08	15.54	39.62	54.00	14.38	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

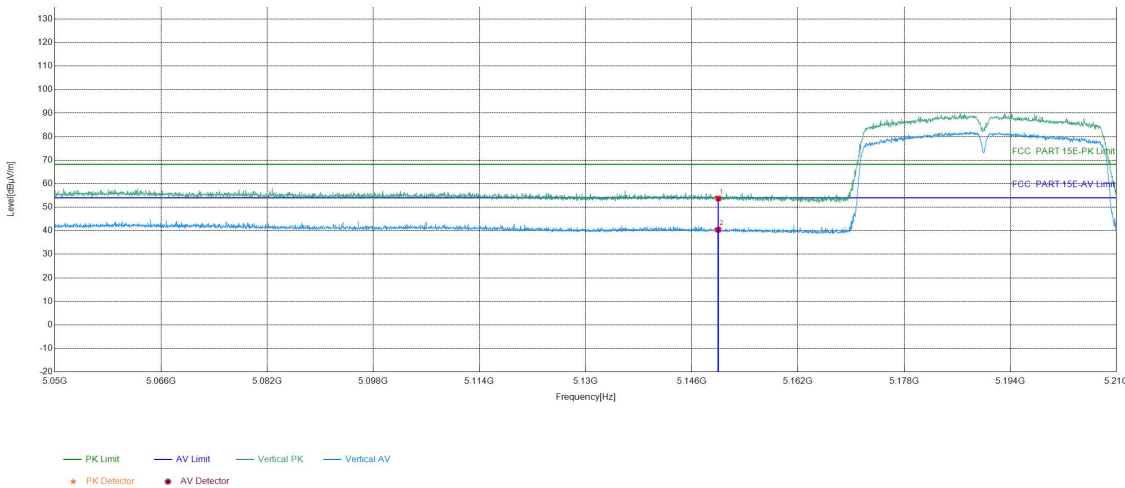

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	29.64	53.72	68.20	14.48	PASS	Vertical	PK
2	5150	24.08	16.35	40.43	54.00	13.57	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5320MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

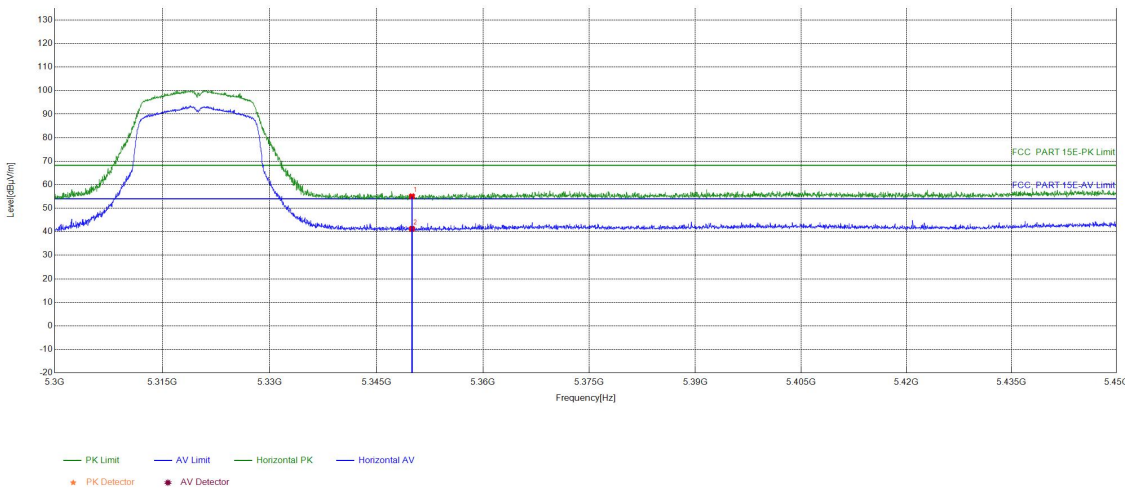

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	30.70	55.07	68.20	13.13	PASS	Horizontal	PK
2	5350	24.37	16.89	41.26	54.00	12.74	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5320MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

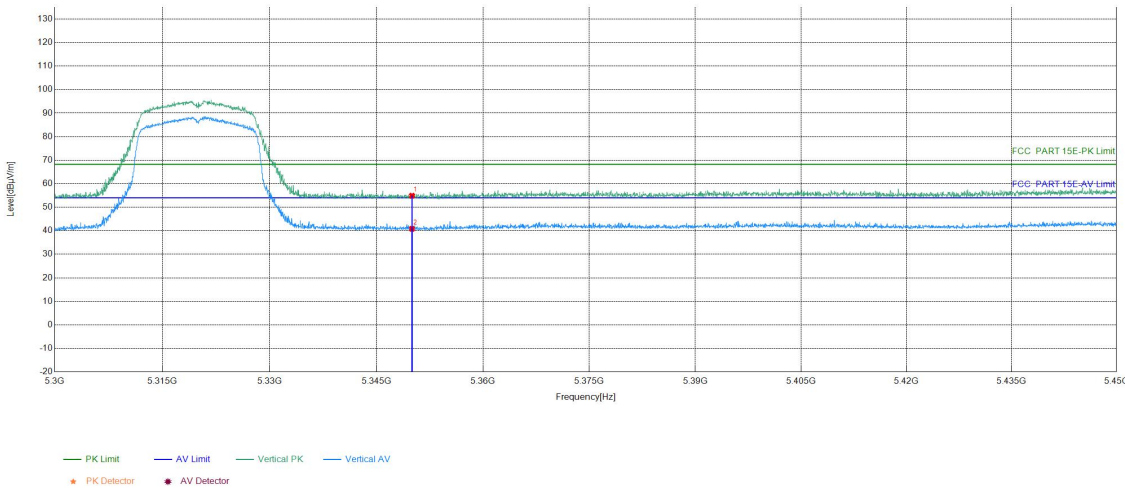

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	30.53	54.90	68.20	13.30	PASS	Vertical	PK
2	5350	24.37	16.46	40.83	54.00	13.17	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

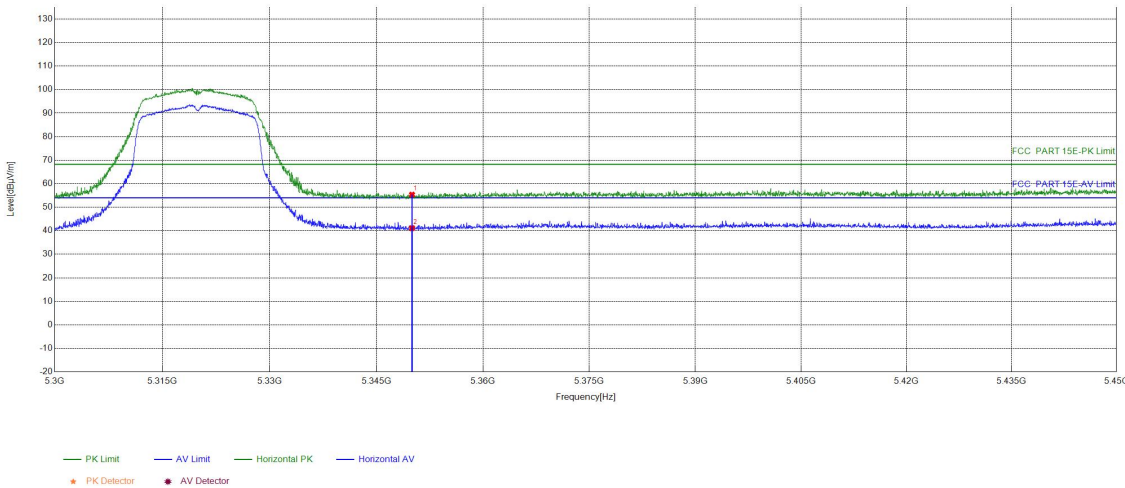

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	30.99	55.36	68.20	12.84	PASS	Horizontal	PK
2	5350	24.37	16.72	41.09	54.00	12.91	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

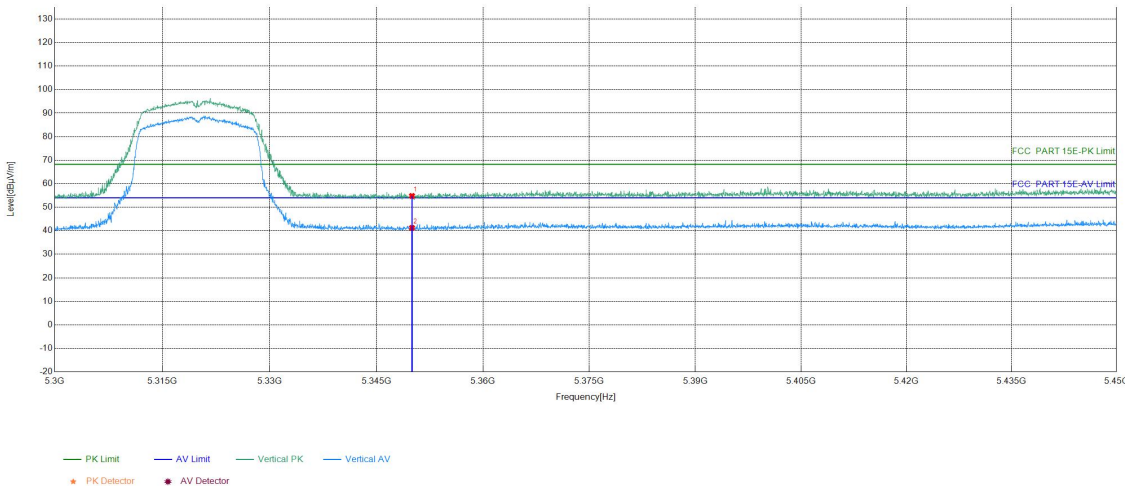

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	30.42	54.79	68.20	13.41	PASS	Vertical	PK
2	5350	24.37	16.86	41.23	54.00	12.77	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

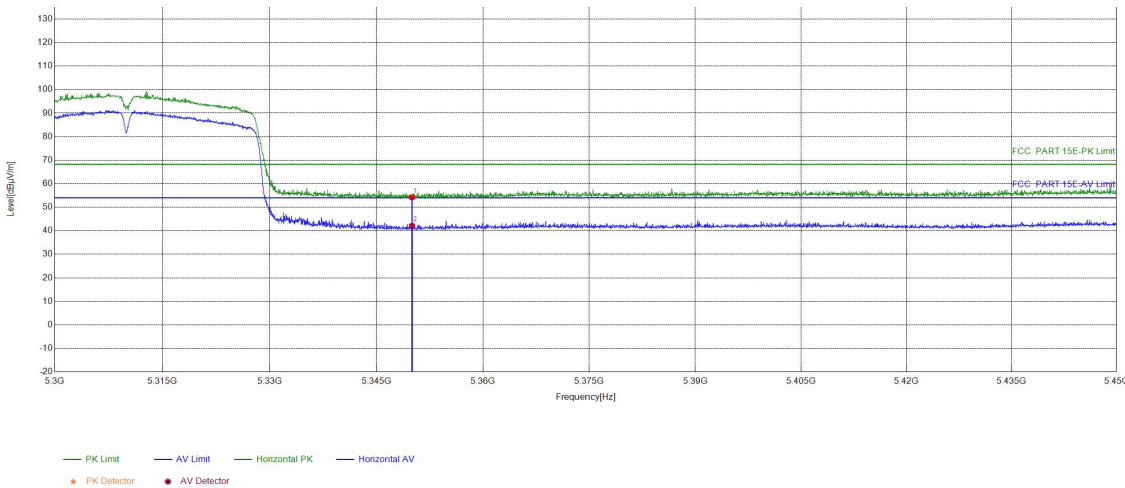

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	29.85	54.22	68.20	13.98	PASS	Horizontal	PK
2	5350	24.37	17.65	42.02	54.00	11.98	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

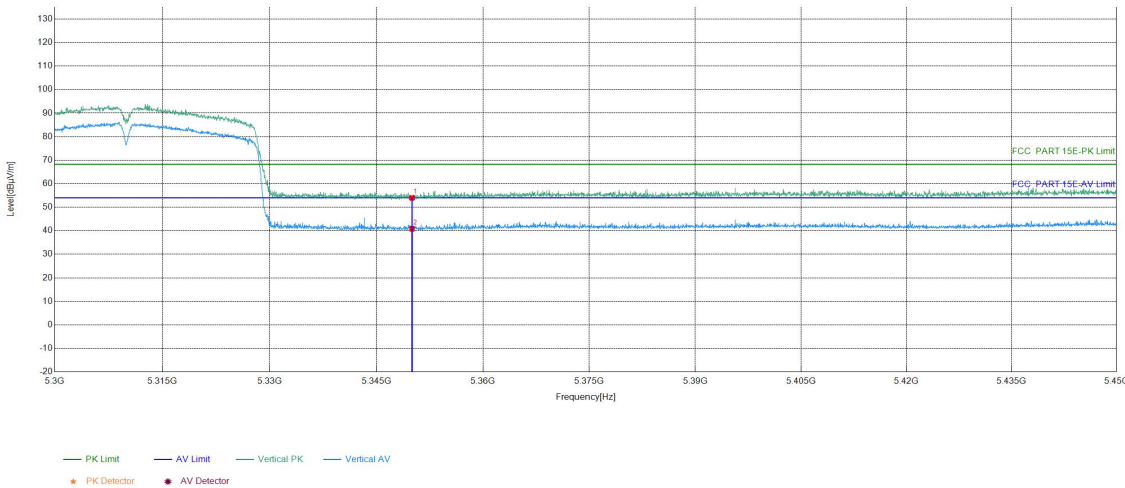

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	29.61	53.98	68.20	14.22	PASS	Vertical	PK
2	5350	24.37	16.46	40.83	54.00	13.17	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5500MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

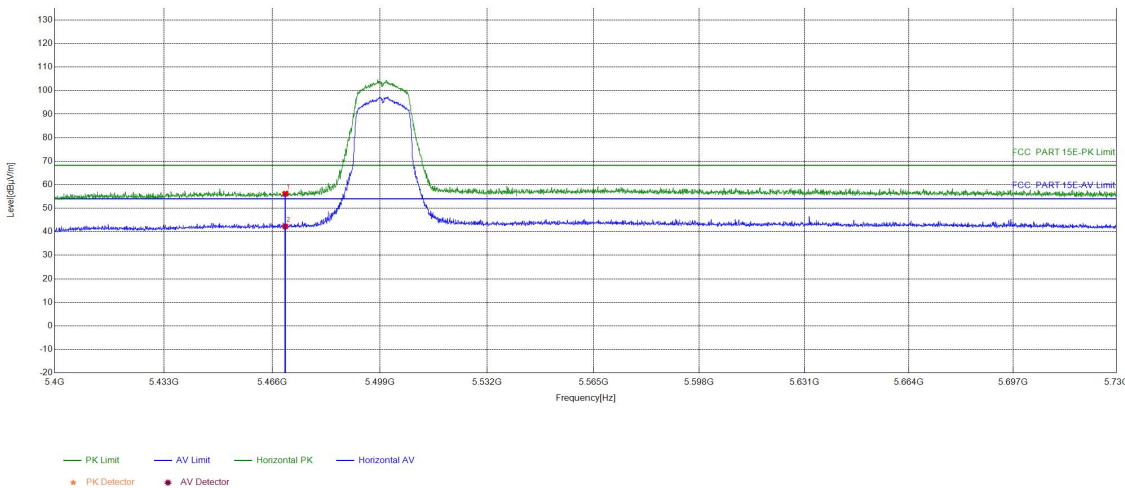

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5470	24.87	31.31	56.18	68.20	12.02	PASS	Horizontal	PK
2	5470	24.87	17.40	42.27	54.00	11.73	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5500MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

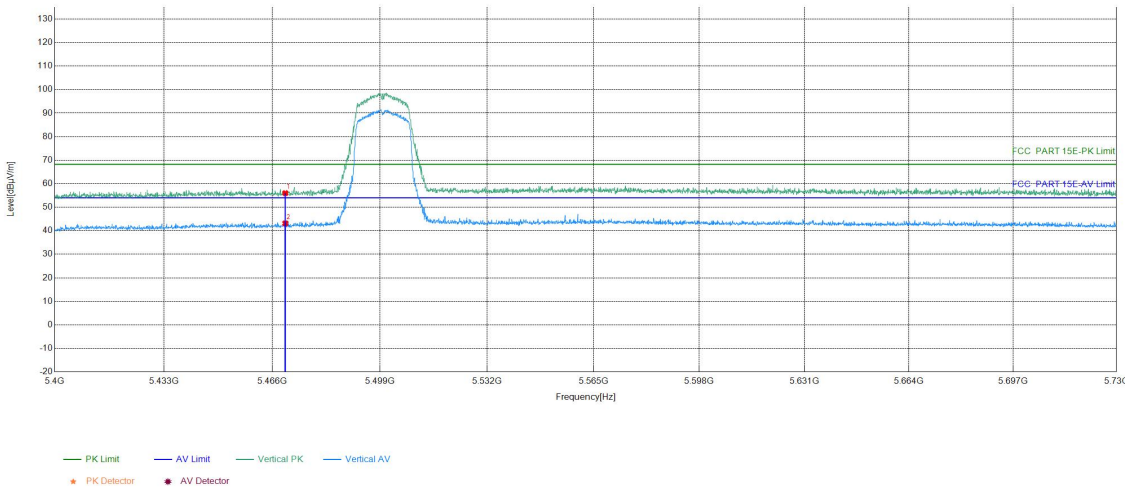

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5470	24.87	31.11	55.98	68.20	12.22	PASS	Vertical	PK
2	5470	24.87	18.26	43.13	54.00	10.87	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5500MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

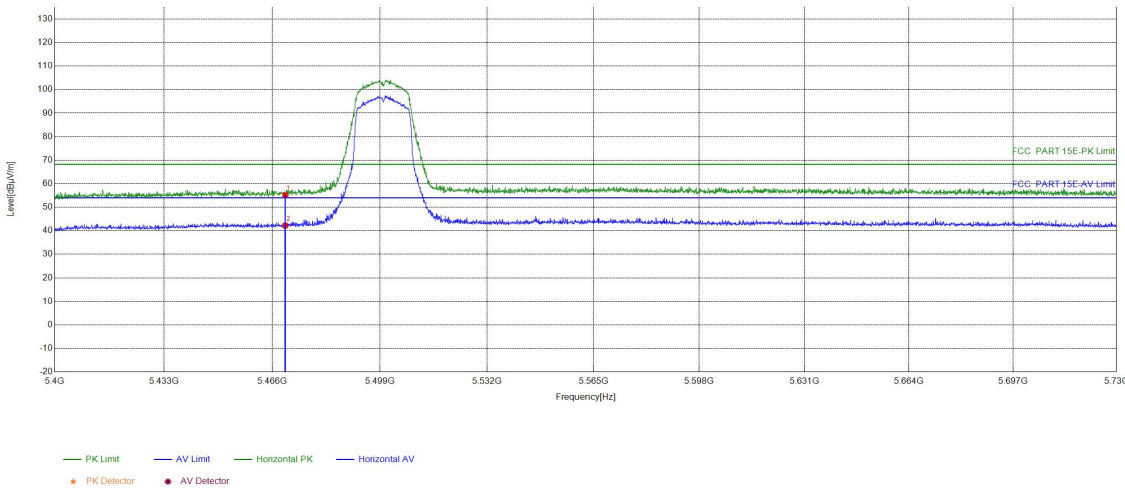

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5470	24.87	30.39	55.26	68.20	12.94	PASS	Horizontal	PK
2	5470	24.87	17.37	42.24	54.00	11.76	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5500MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

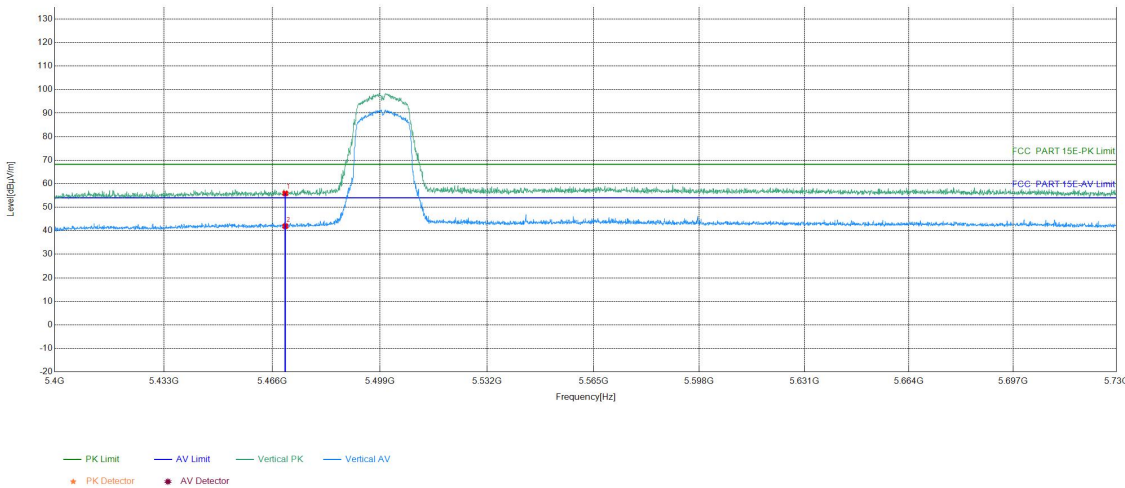

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5470	24.87	31.01	55.88	68.20	12.32	PASS	Vertical	PK
2	5470	24.87	17.07	41.94	54.00	12.06	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

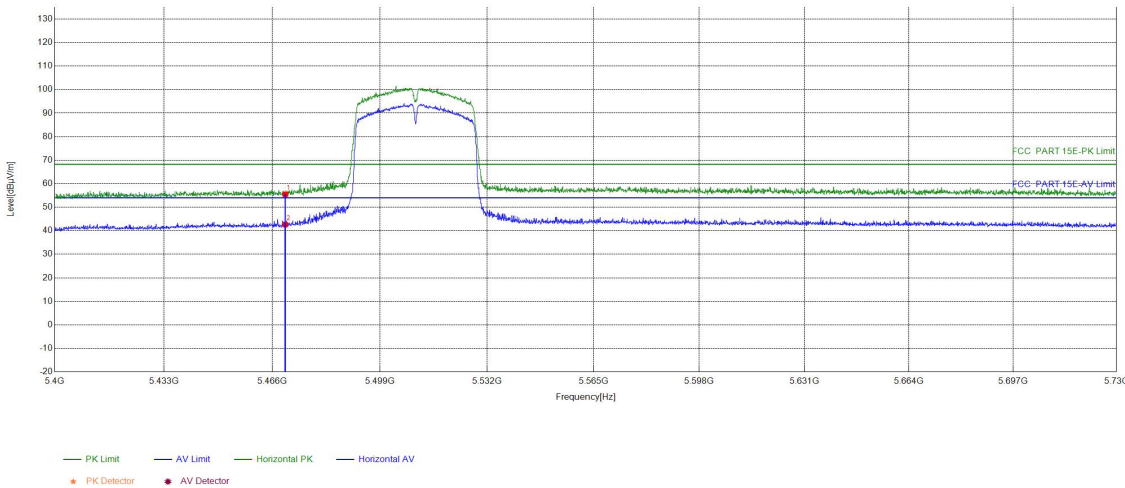

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5470	24.87	30.62	55.49	68.20	12.71	PASS	Horizontal	PK
2	5470	24.87	17.75	42.62	54.00	11.38	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

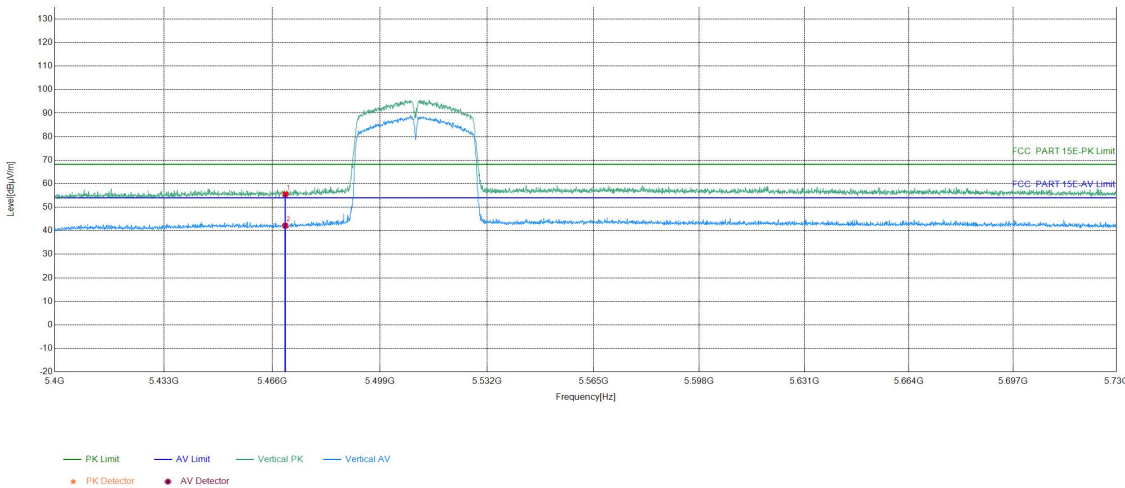

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5470	24.87	30.65	55.52	68.20	12.68	PASS	Vertical	PK
2	5470	24.87	17.29	42.16	54.00	11.84	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5745MHz
Tset_Engineer	chenjun	Test_Date	2025/08/08
Remark	Adapter: MS-TA460J240-350B0		

Test Graph

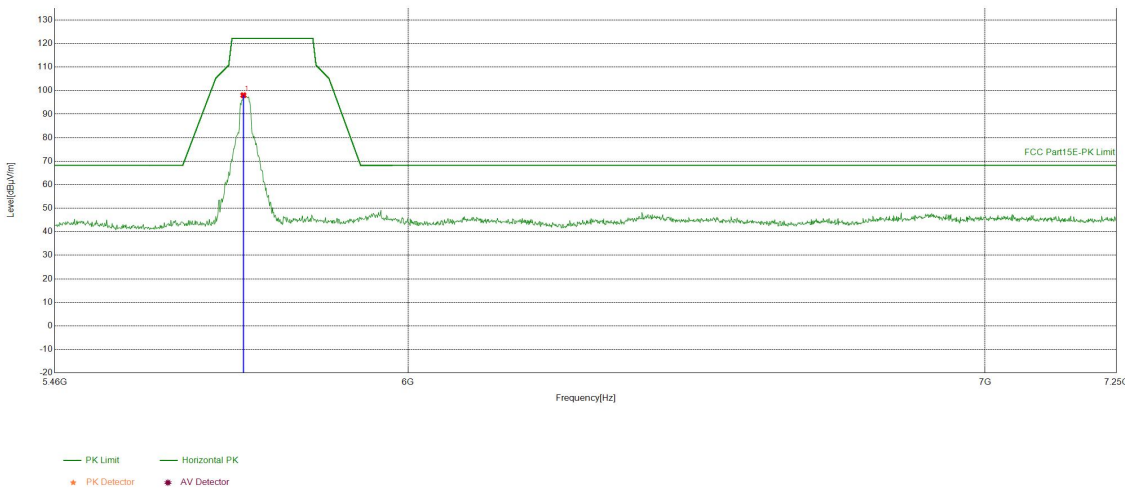

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5742.06	-5.55	103.59	98.04	122.20	24.16	PASS	Horizontal	PK