


# Antena describe


## SPECIFICATIONS

Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	> -4
VSWR	< 3.2
Impedance ( $\Omega$ )	50 $\Omega$
Antenna Type	PCB
Polarization	Linear
Manufacture	Shen Zhen Blueturn Technology Co., Ltd.
Address	4068 Qiaoxiang Road, Gaofa Community, Nanshan District, Shenzhen


Testing environment: Zhongke Guoji darkroom testing system

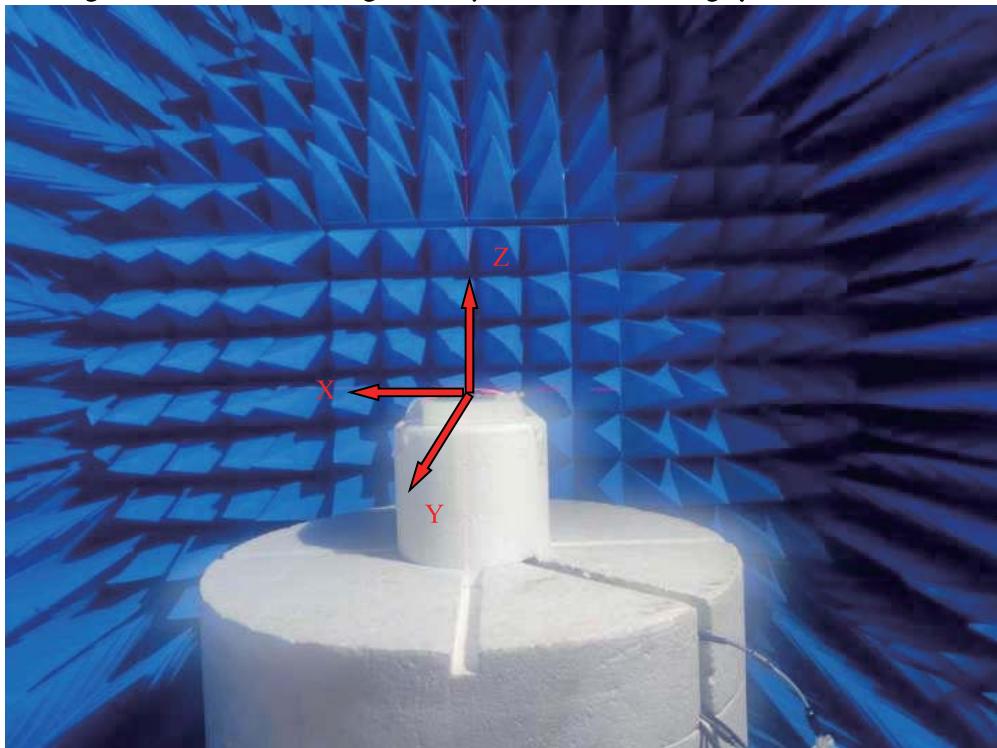

## Antenna physical and physical dimensions

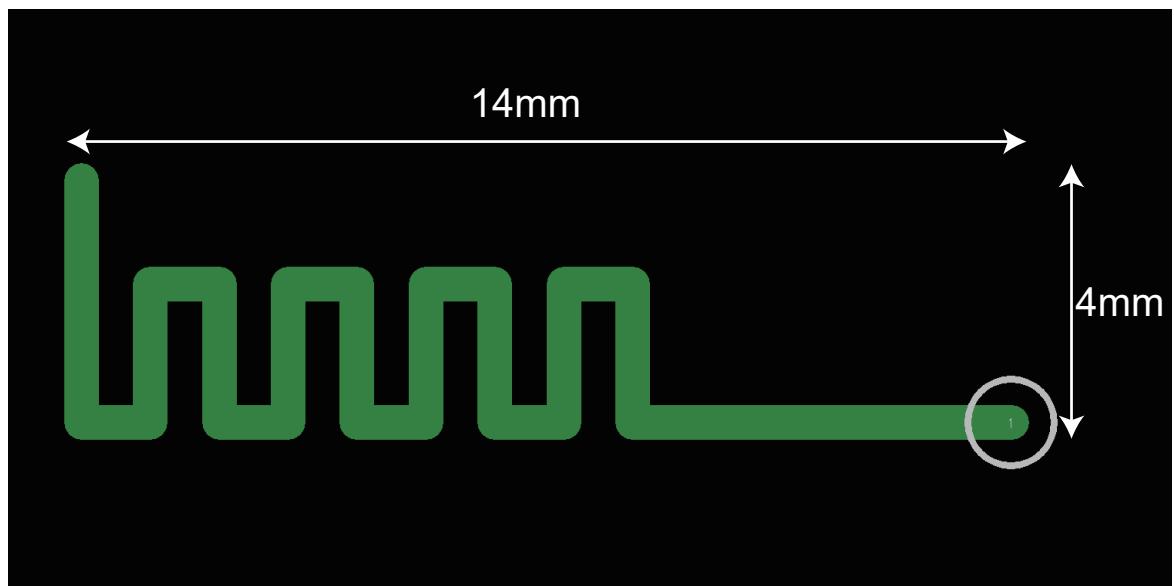


Passive S parameters of antenna:

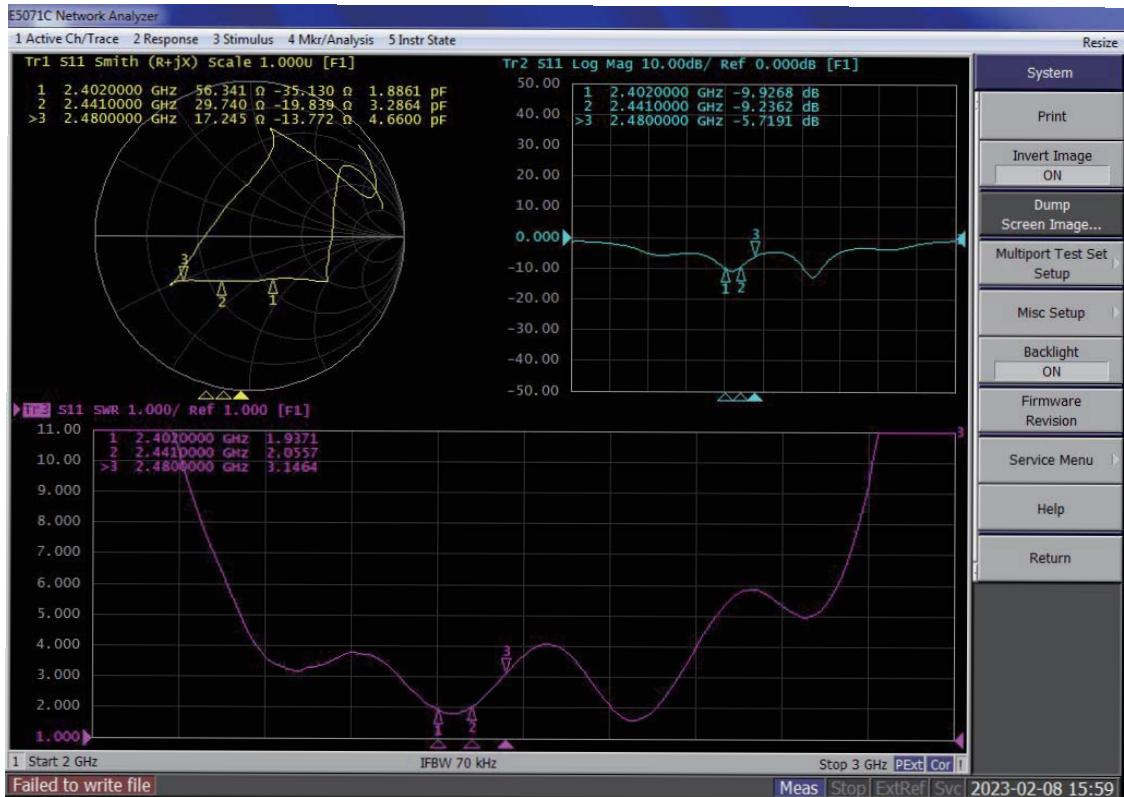


Antenna efficiency and gain

Frequency (MHz)	Gain (dBi)	Efficiency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


## 2440MHz 2D-Theta Pattern

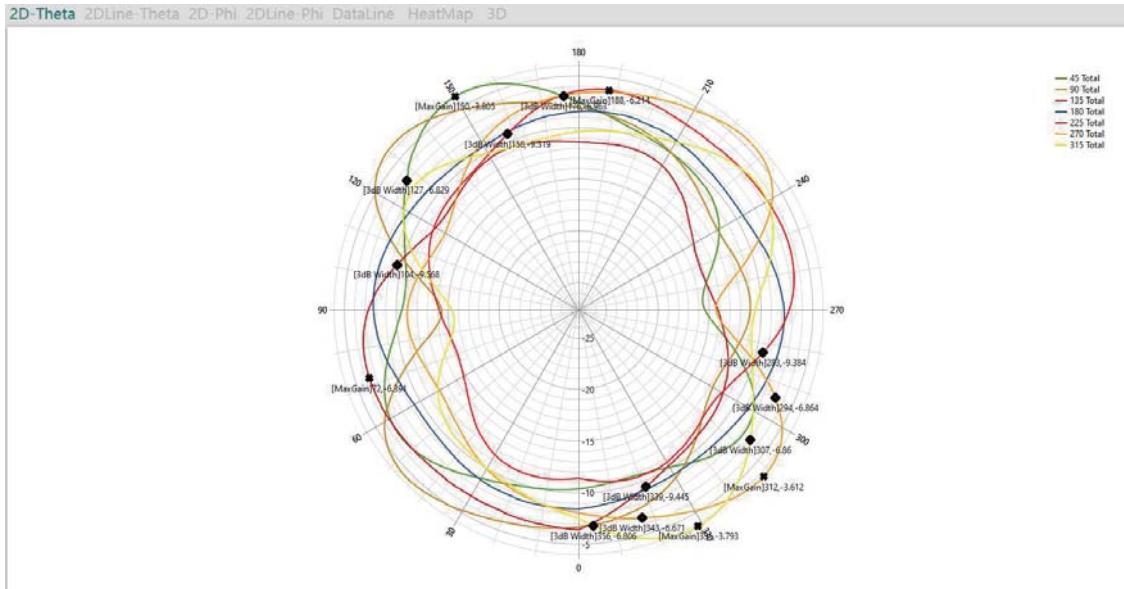


## 2440MHz 2D-Phi Pattern

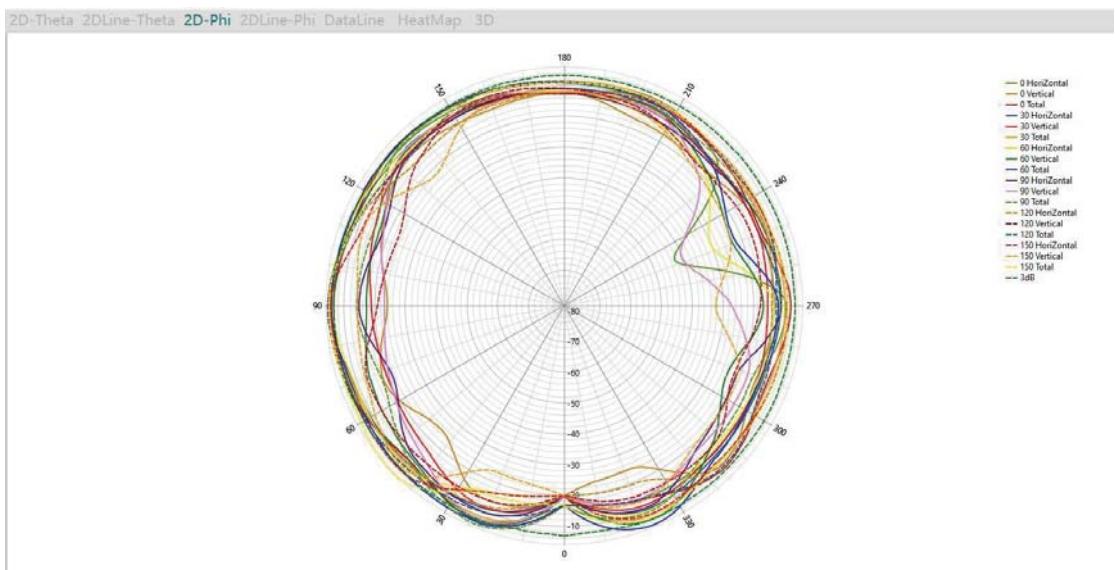

2440MHz 3D-Horizontal Pattern

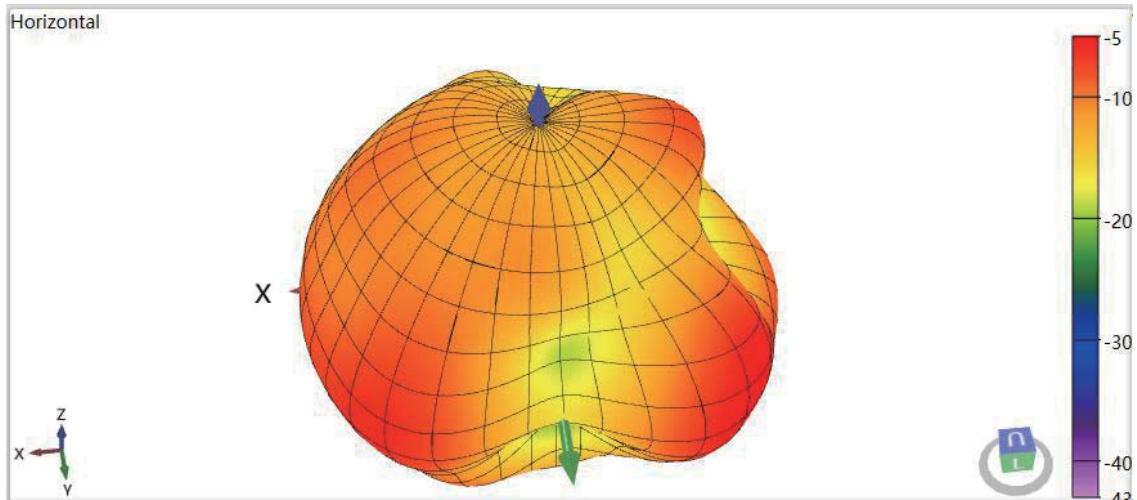

2440MHz 3D-Vertical Pattern

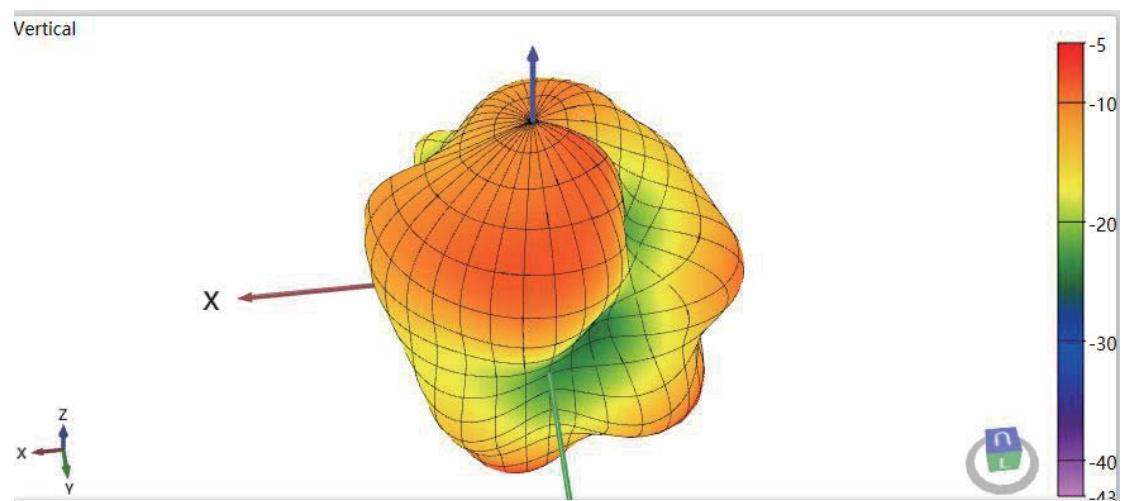

## 2440MHz 3D-Total Pattern

