



## FCC TEST REPORT

**FCC ID: 2A7D8-IAQST303**

On Behalf of

Shenzhen AOOLIF Technology Co., Ltd

Wireless charger

Model No.: IAQST303, MAQST303, D4, WC-009, WC-010, WC-027

Prepared for : Shenzhen AOOLIF Technology Co., Ltd  
Address : 2nd Fl, Bldg C, Yucai Industrial Area Phase 1, No.40, Qiaotang Rd,  
: Qiaotou, Fuyong, Bao'an, Shenzhen City, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
: 518103, Shenzhen, Guangdong, China

Report Number	: A2205098-C01-R02
Date of Receipt	: May 30, 2022
Date of Test	: May 30, 2022–June 10, 2022
Date of Report	: June 10, 2022
Version Number	: V0

## TABLE OF CONTENTS

Description	Page
1. <b>Test Result Summary</b> .....	5
2. <b>EUT Description</b> .....	6
2.1. Description of Device (EUT).....	6
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details.....	8
2.4. Block Diagram of Connection between EUT and Simulators.....	8
2.5. Description of Test Modes.....	8
2.6. Test Conditions .....	8
2.7. Test Facility .....	9
2.8. Measurement Uncertainty .....	9
3. <b>Test Results and Measurement Data</b> .....	10
3.1. RF Exposure Test .....	10
3.1.1. Test Specification .....	10
3.1.2. Test Instruments.....	11
3.1.3. Test data.....	11
4. <b>Photos of test setup</b> .....	12
5. <b>Photographs of EUT</b> .....	14

## TEST REPORT DECLARATION

Applicant : Shenzhen AOOLIF Technology Co., Ltd  
Address : 2nd Fl, Bldg C, Yucai Industrial Area Phase 1, No.40, Qiaotang Rd, Qiaotou, Fuyong, Bao'an, Shenzhen City, China

Manufacturer : Shenzhen AOOLIF Technology Co., Ltd  
Address : 2nd Fl, Bldg C, Yucai Industrial Area Phase 1, No.40, Qiaotang Rd, Qiaotou, Fuyong, Bao'an, Shenzhen City, China

EUT Description : Wireless charger

(A) Model No. : IAQST303, MAQST303, D4, WC-009, WC-010, WC-027

(B) Trademark : **iLive brand/Memorex brand**

Measurement Standard Used:

**FCC CFR Title 47 Part 15 Subpart C**

**FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen  
Project Engineer



Approved by (name + signature).....:

Simple Guan  
Project Manager



Date of issue.....

June 13, 2022

## Revision History

Revision	Issue Date	Revisions	Revised By
V0	June 13, 2022	Initial released Issue	Yannis Wen

## 1. Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1) & KDB680106	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

## 2. EUT Description

### 2.1. Description of Device (EUT)

EUT Name	:	Wireless charger
Model No.	:	IAQST303, MAQST303, D4, WC-009, WC-010, WC-027
DIFF.	:	N/A
Trademark	:	<b>iLive brand/Memorex brand</b>
Power supply	:	Type-C Input : 5V/3A, 9V/2A, 12V/1.5A Type-C output and USB output: 5V/2A(MAX) Output of the phone:5W/7.5W/10W/15W Output of the earphone:5W
Operation frequency	:	115~205KHz
Modulation	:	MSK
Antenna Type	:	Coil Antenna, Maximum Gain is 0dBi (This value is supplied by applicant).
Software version	:	V1.0
Hardware version	:	V1.0
Intend use environment	:	Residential, commercial and light industrial environment

The EUT does comply with section 5 b) of KDB 680106 D01 RF Exposure Wireless charging App V03r01.

<b>Conditions requirement</b>	<b>Answers</b>
Power transfer frequency is less than 1 MHz.	After measuring the product the transfer frequency is 0.115-0.205MHz
Output power from each primary coil is less than or equal to 15 watts.	After measuring the product the each primary coil power is 15 watts
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	The transfer system include two primaries.
Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions only.
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	After measuring the product the Max H-field Strength is 0.677A/m Far less than 50% of the MPE limit.


## 2.2. Accessories of Device (EUT)

Accessories1 : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Wireless load	--	--	--	--
2	Travel Charger	SHENZHEN YIBOYUAN ELECTRONICS CO., LTD.	QC01	--	--

## 2.4. Block Diagram of Connection between EUT and Simulators

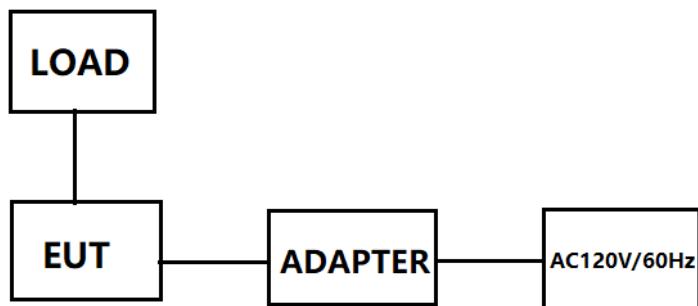

## 2.5. Description of Test Modes

Channel	Frequency (KHz)
1	122
2	145

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
Registration Number: 293961

July 15, 2019 Certificated by IC  
Registration Number: CN0085

## 2.8. Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2 °C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

### 3. Test Results and Measurement Data

#### 3.1. RF Exposure Test

##### 3.1.1. Test Specification
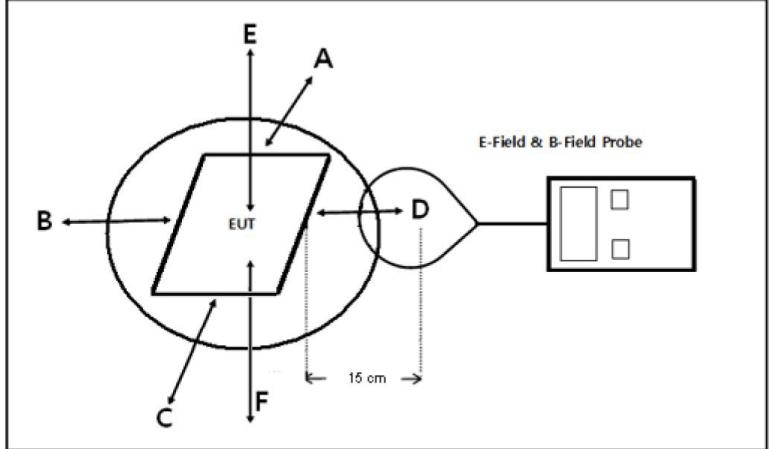
<b>Test Requirement:</b>	FCC Rules and Regulations KDB680106
<b>Test Method:</b>	§1.1307(b)(1) & KDB680106
<b>Limits:</b>	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03r01: RF Exposure Wireless Charging.
<b>Test Setup:</b>	
<b>Test Mode:</b>	Wireless charging load has been charge at no load, middle load and full load. All test modes were pre-tested, but we only recorded the worse case in this report.
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF exposure test was performed in shielded chamber</li> <li>2. The measurement probe was placed at test distance(15cm) which is between the edge of the charger and the geometric centre of probe.</li> <li>3. The measurement probe used to search of highest strength.</li> <li>4. The highest emission level was recorded and compared with limit as soon as measurement of each points (A,B,C,D,E,F) were completed.</li> <li>5. The EUT were measured according to the dictates of KDB 680106 DR03-44118.</li> </ol>
<b>Test Result:</b>	PASS

### 3.1.2. Test Instruments

Item	Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
1	Exposure Level Tester	narda	ELT-400	/	N-0231	2021.08.31	2022.08.30
2	Magnetic field probe 100cm2	narda	ELT probe 100cm2	/	M0675	2021.08.31	2022.08.30
3	Isotropic Electric Field Probe	narda	EP-601	/	511WX60706	2021.08.31	2022.08.30

### 3.1.3. Test data

For Full load mode:

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	1.453	1.368	1.292	1.345	1.352	307	614

H-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.677	0.635	0.597	0.623	0.627	0.815	1.63

For Null load mode:

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)


Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	1.395	1.239	1.311	1.320	1.235	307	614

H-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)


Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.648	0.571	0.606	0.610	0.568	0.815	1.63

#### 4. Photos of test setup

For Full load mode

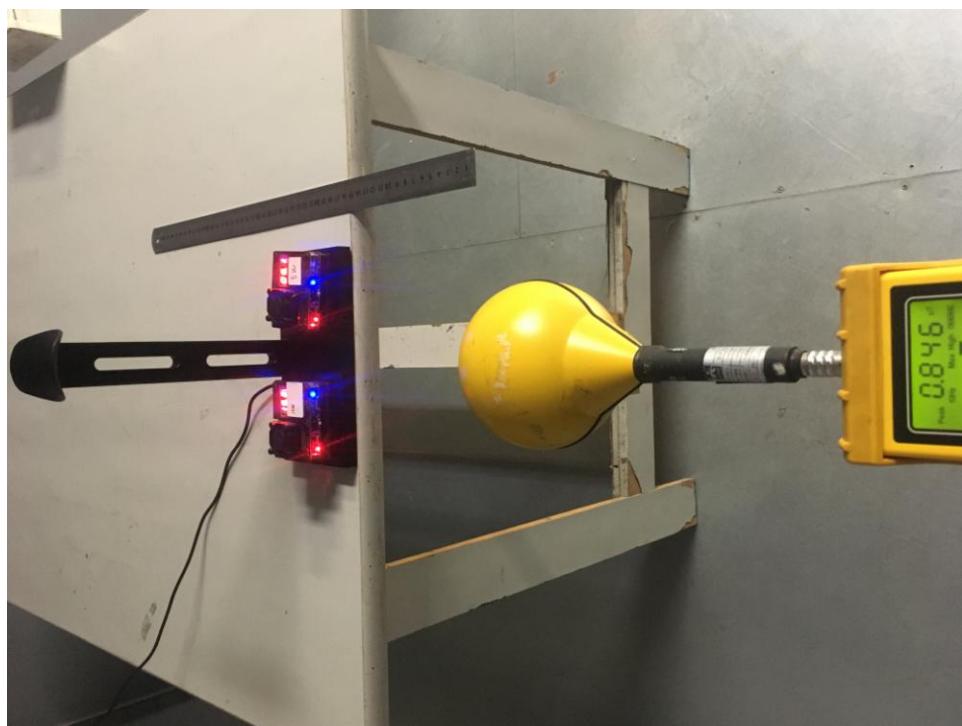


For No load mode

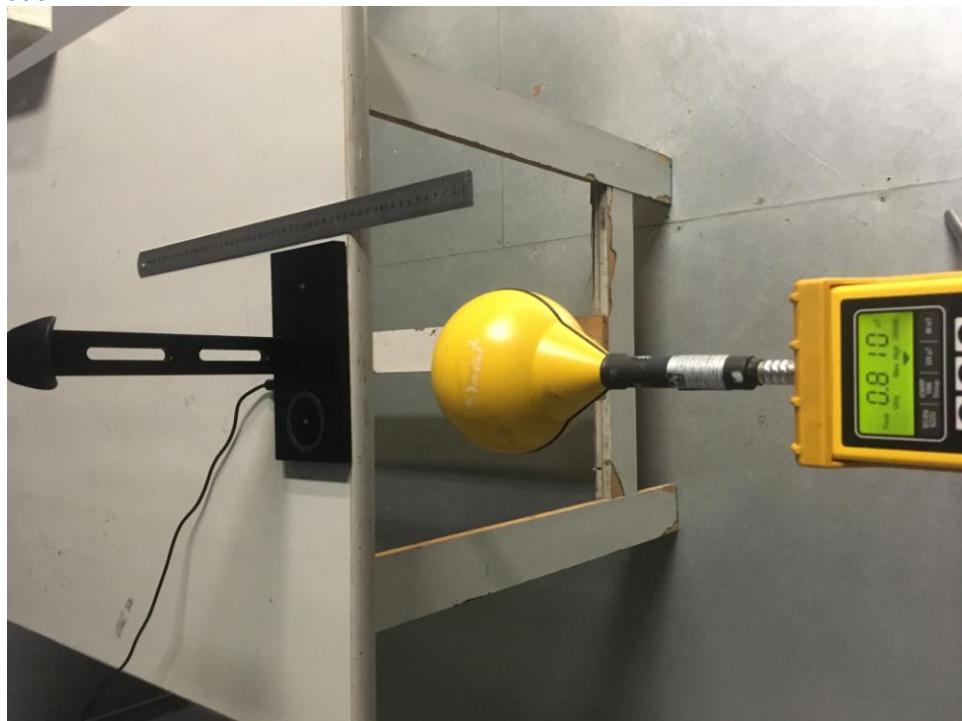

For Full load mode



For No load mode

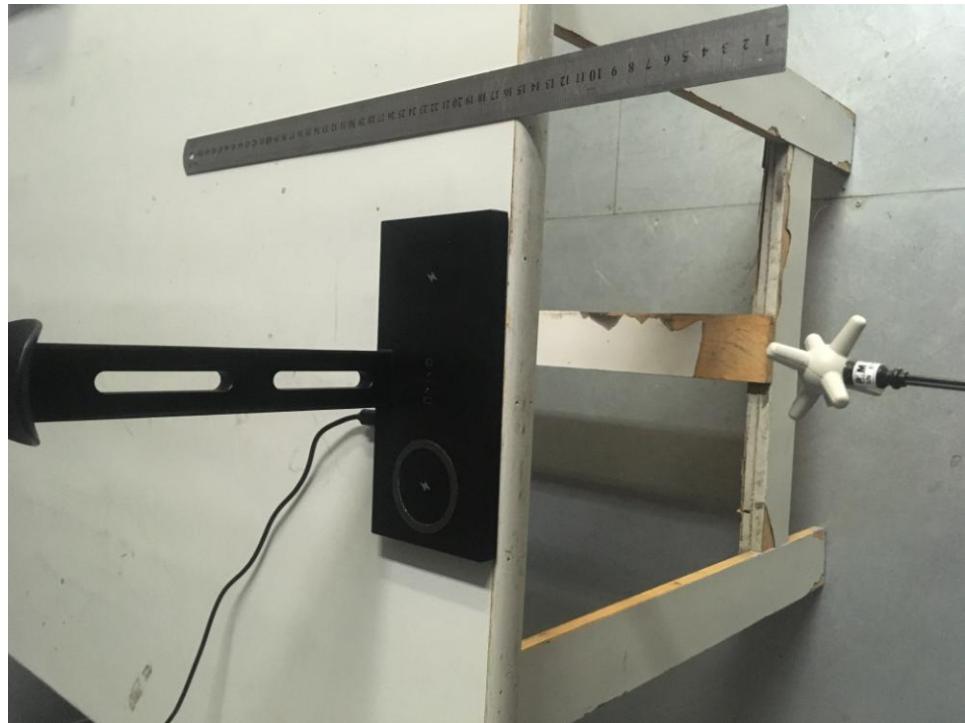

## 5. Photographs of EUT

Refer to test report A2205098-C01-R01.

-----End of Report-----