

产品规格书

PRODUCT SPECIFICATION

Customer:

Customer's part number:

Product description: 5260Terminal Antenna

Uni Link's part number: TLB-2400-2.0B

Issue Date: 2008-11-19

Note: 450-860MHZ, ROHS

Customer Use		Customer's authorized signature	Remarks
Full approved			
Conditional approved			
Rejected			

1、产品技术指标（PRODUCT TECHNICAL SPECIFICATION）

电性能指标 Electrical Specifications	
频率范围 Frequency Range (MHz)	450-860
频带宽度 Bandwidth (MHz)	100
输入阻抗 Input Impendence (Ω)	75
电压驻波比 V.S.W.R	≤ 5
增益 Gain (dBi)	5
极化形式 Polarization Type	垂直 Vertical

雷电保护 Lightning Protection	DC Ground
功率容量 Power Capacity (w)	50
机械指标 Mechanical Specifications	
天线长度 Antenna Length (mm)	Ø5.2X 闭合 67.8 展开 245mm Φ 5.2Xclosed67.8mm unfolded245mm
辐射体 Radiator	不锈钢 stainless steel
工作温度 Working Temp(°C)	-40~60
储藏温度 Storage Temperature(°C)	-20~40
外壳颜色 Radome Color	银白 Silver
重量 Weight (g)	4.1

Product Introduction


This antenna is designed and produced for portable remote controls. It has the advantages of beautiful appearance, compact structure, and easy installation.

2、产品图片（PRODUCT PICTURE）




3、产品规格图(PRODUCT SPECIFICATION CHART)


单位: mm 比例: 1:1

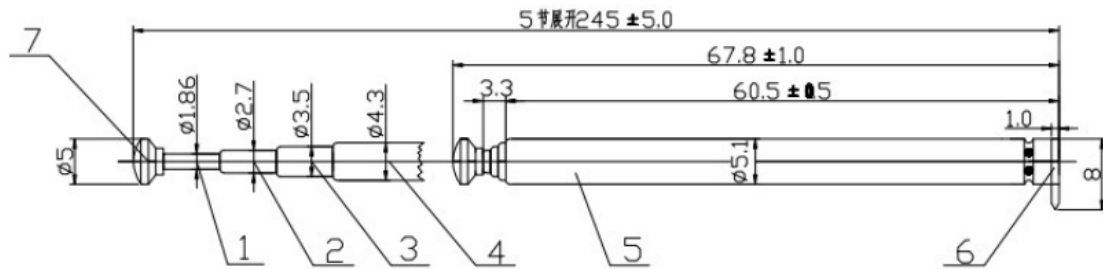

4、驻波图 (STATIONARY WAVE PATTERN)

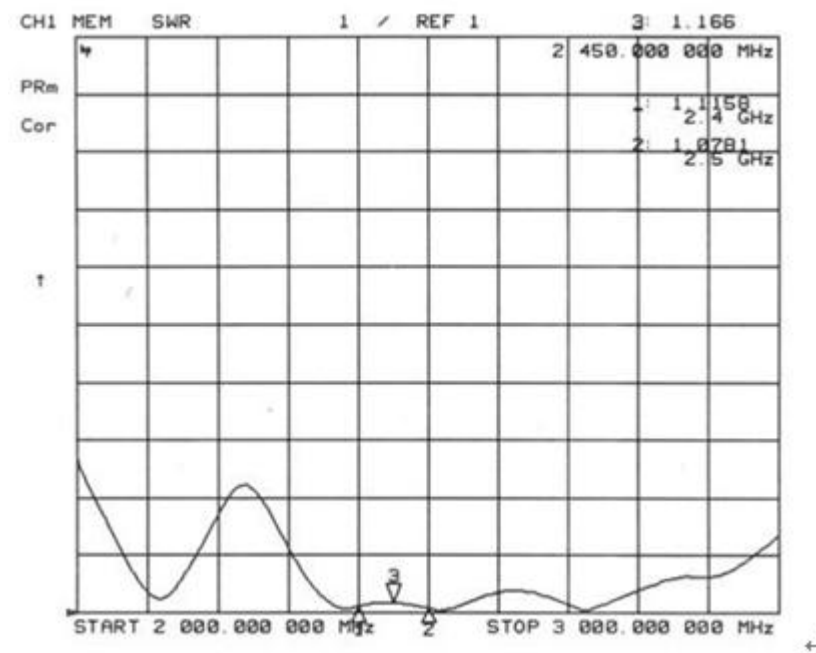

水平面方向图



垂直面方向图

