



# FCC RADIO TEST REPORT

**FCC ID** : 2A7DJ-2346766867652  
**Equipment** : Smart Radio LTE with Walkie-Talkie  
**Brand Name** : weavix  
**Model Name** : walt  
**Applicant** : PK Solutions LLC  
10811 E Harry St. Wichita, KS 67207, USA  
**Manufacturer** : Arima Communications (Jiangsu) Co., Ltd  
No.168, Jiaotong Notrh Road, Economic and  
Technological Development Zone, Wujiang District  
Suzhou City, Jiangsu Province, P.R.China  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Jun. 17, 2022 and testing was performed from Jul. 12, 2022 to Aug. 16, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System .....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement .....	17
3.4 Conducted Band Edges and Spurious Emission Measurement .....	22
3.5 Radiated Band Edges and Spurious Emission Measurement .....	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
<b>4 List of Measuring Equipment .....</b>	<b>35</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>37</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.01 dB under the limit at 2492.580 MHz
3.6	15.207	AC Conducted Emission	Pass	8.79 dB under the limit at 0.542 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Declaration of Conformity:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Uncertainty of Evaluation".

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Avis Chuang****Report Producer: Ruby Zou**



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS.

Product Feature	
<b>HW Version</b>	0910MB-003
<b>SW Version</b>	2.A.0025
<b>Antenna Type</b>	WWAN: PIFA Antenna WLAN: Loop Antenna Bluetooth: Loop Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna
Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi) 0.8

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

### 1.2 Modification of EUT

No modifications made to the EUT during the testing.



### 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sportun Site No.</b> CO05-HY, 03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sportun International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b> TH05-HY (TAF Code: 3786)
<b>Remark</b>	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory

FCC designation No.: TW1190 and TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report..
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	<b>Bluetooth – LE / GFSK</b>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
Radiated Test Cases	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
AC Conducted Emission	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + USB Cable (Charging from AC Adapter) + Earphone

## 2.3 Connection Diagram of Test System

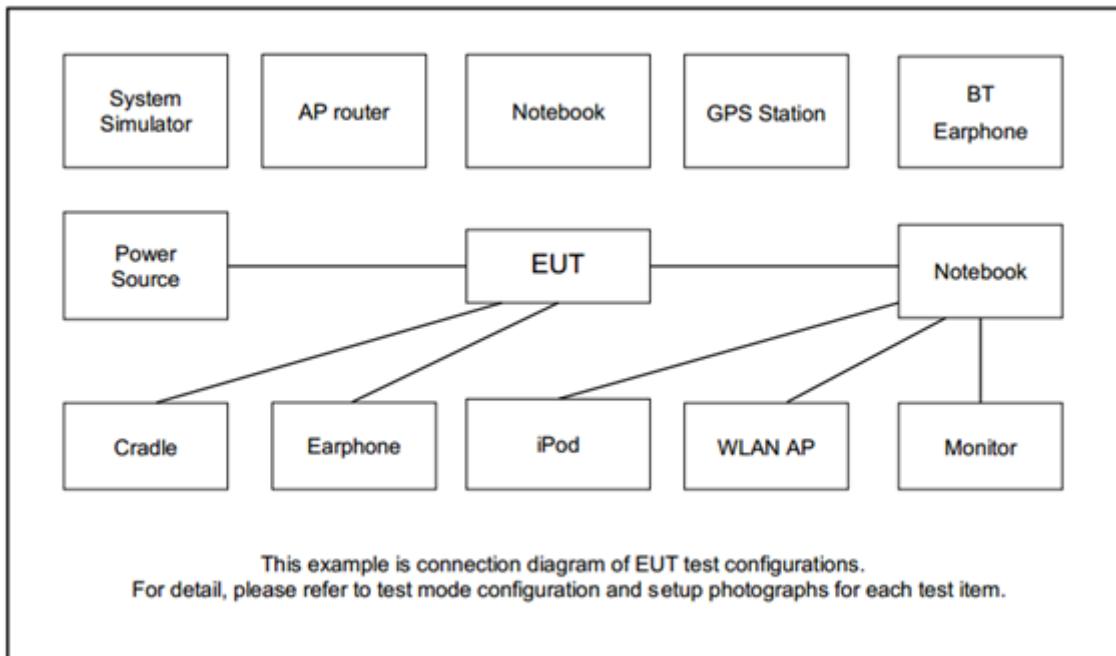

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A



## 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT 4.0.00158.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

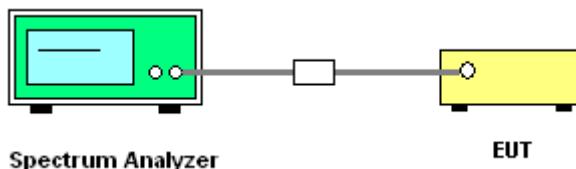




### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

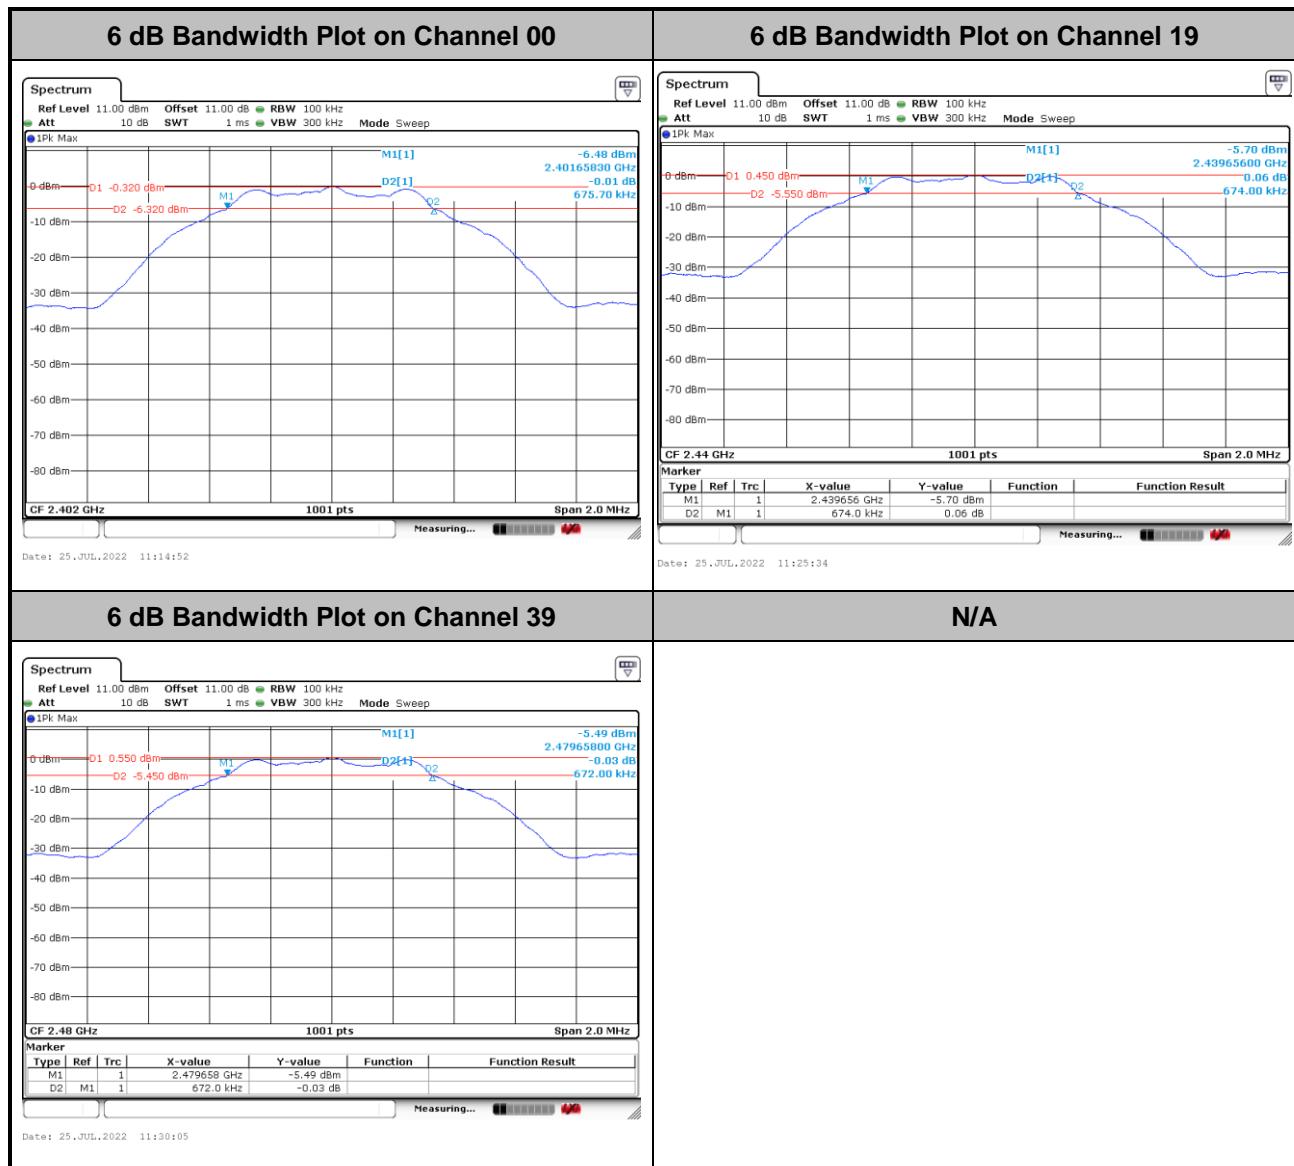




&lt;2Mbps&gt;

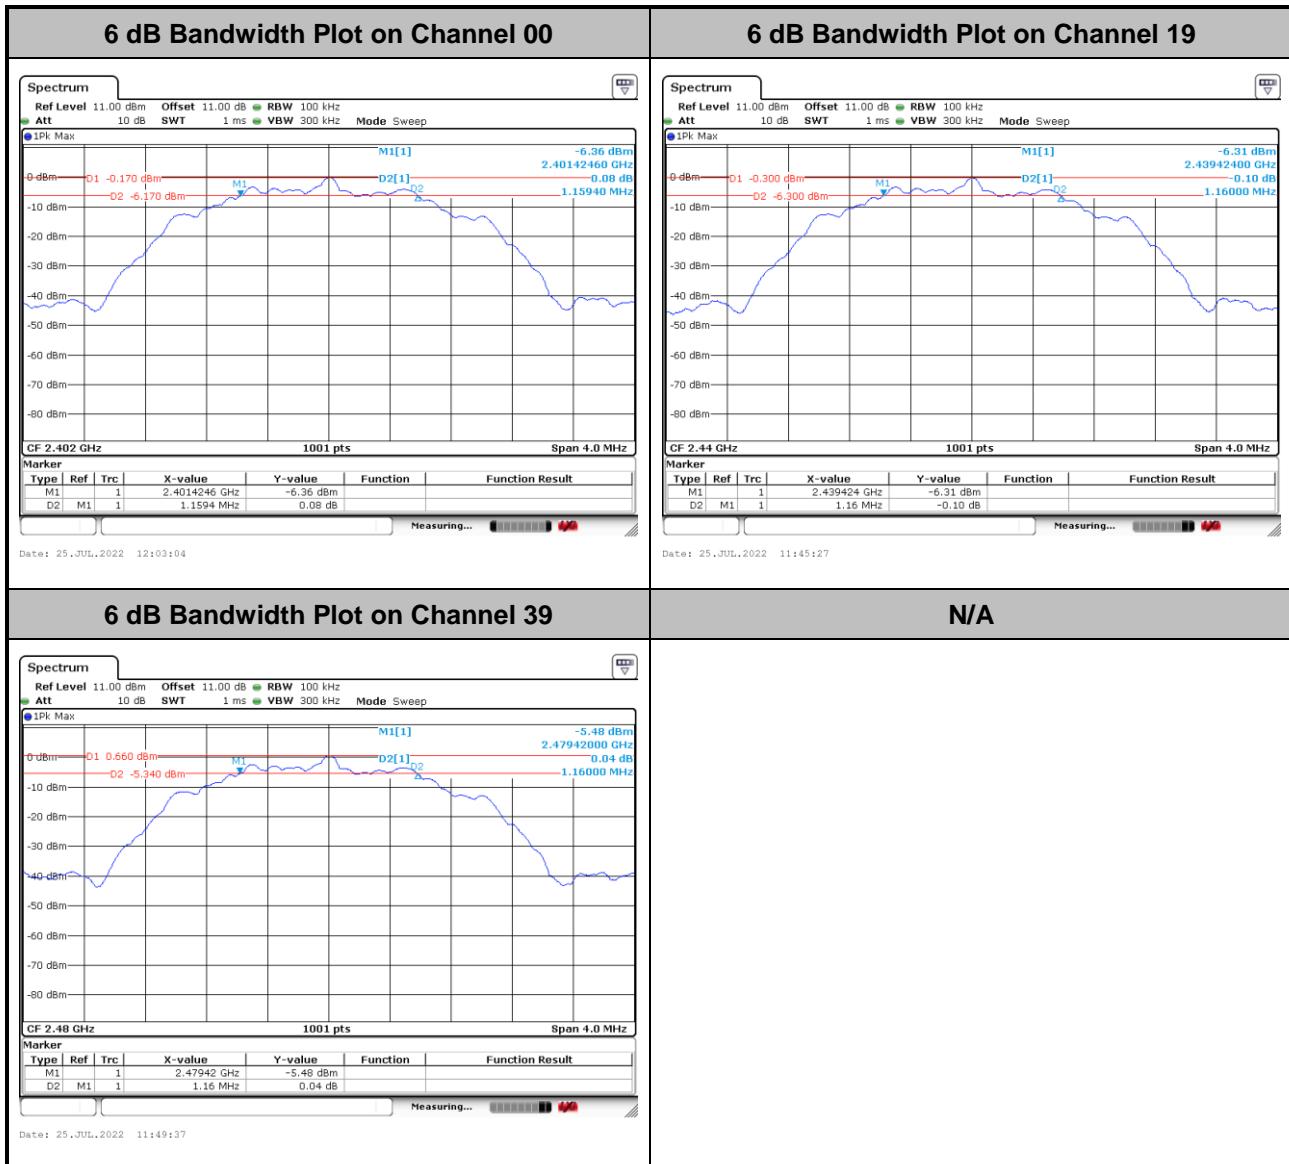

### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


**<1Mbps>**

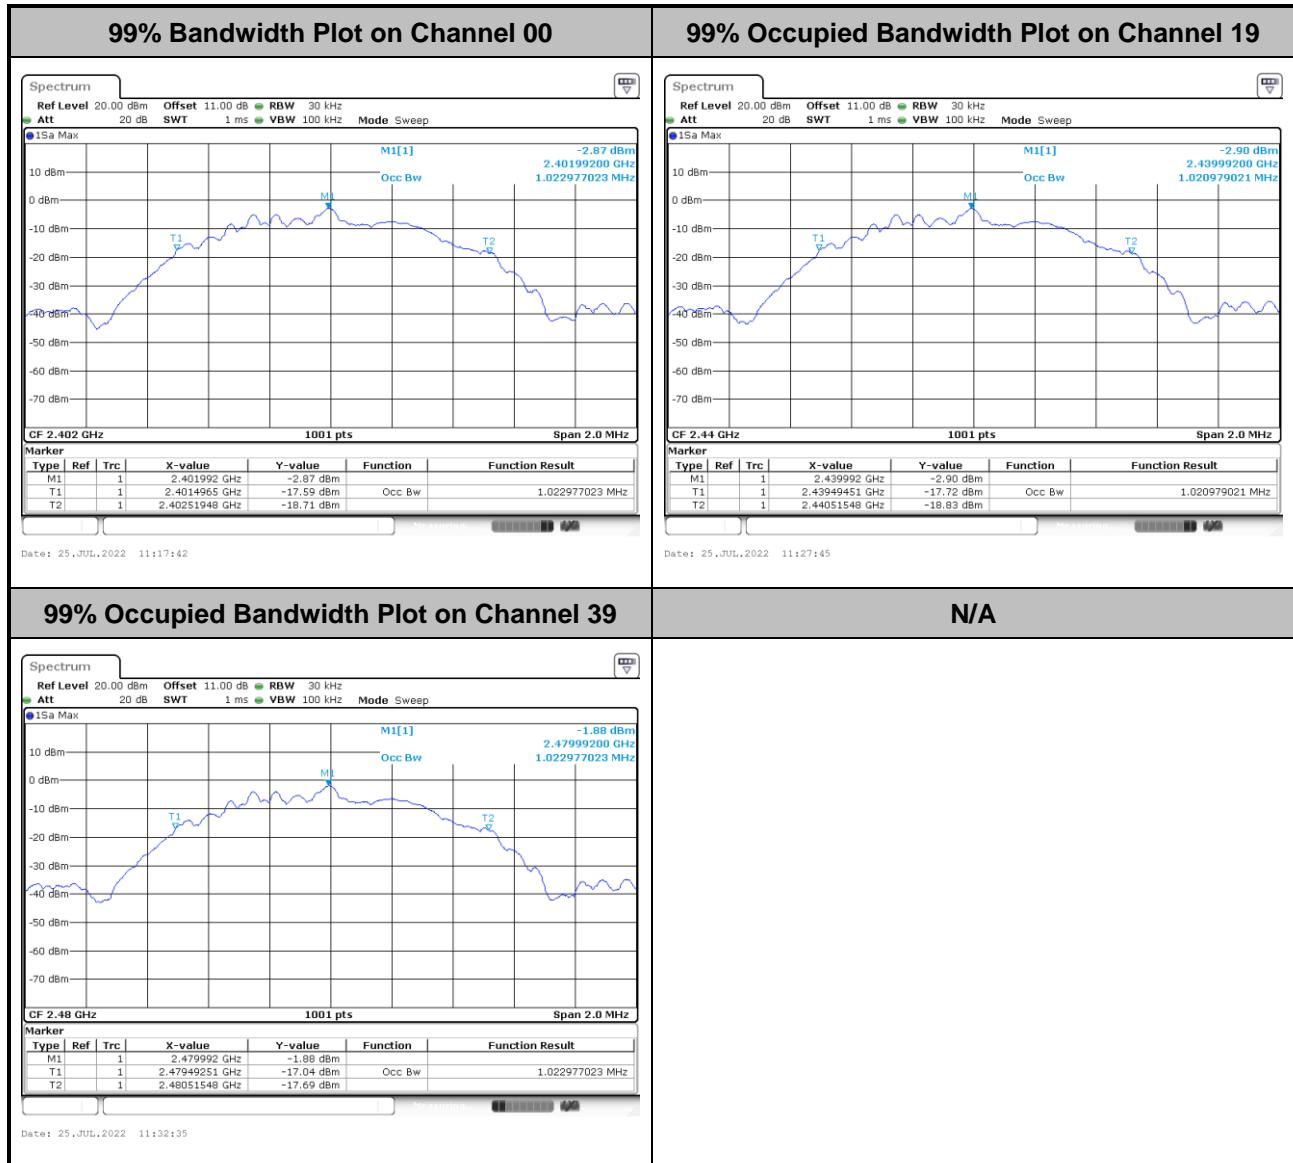

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



&lt;2Mbps&gt;

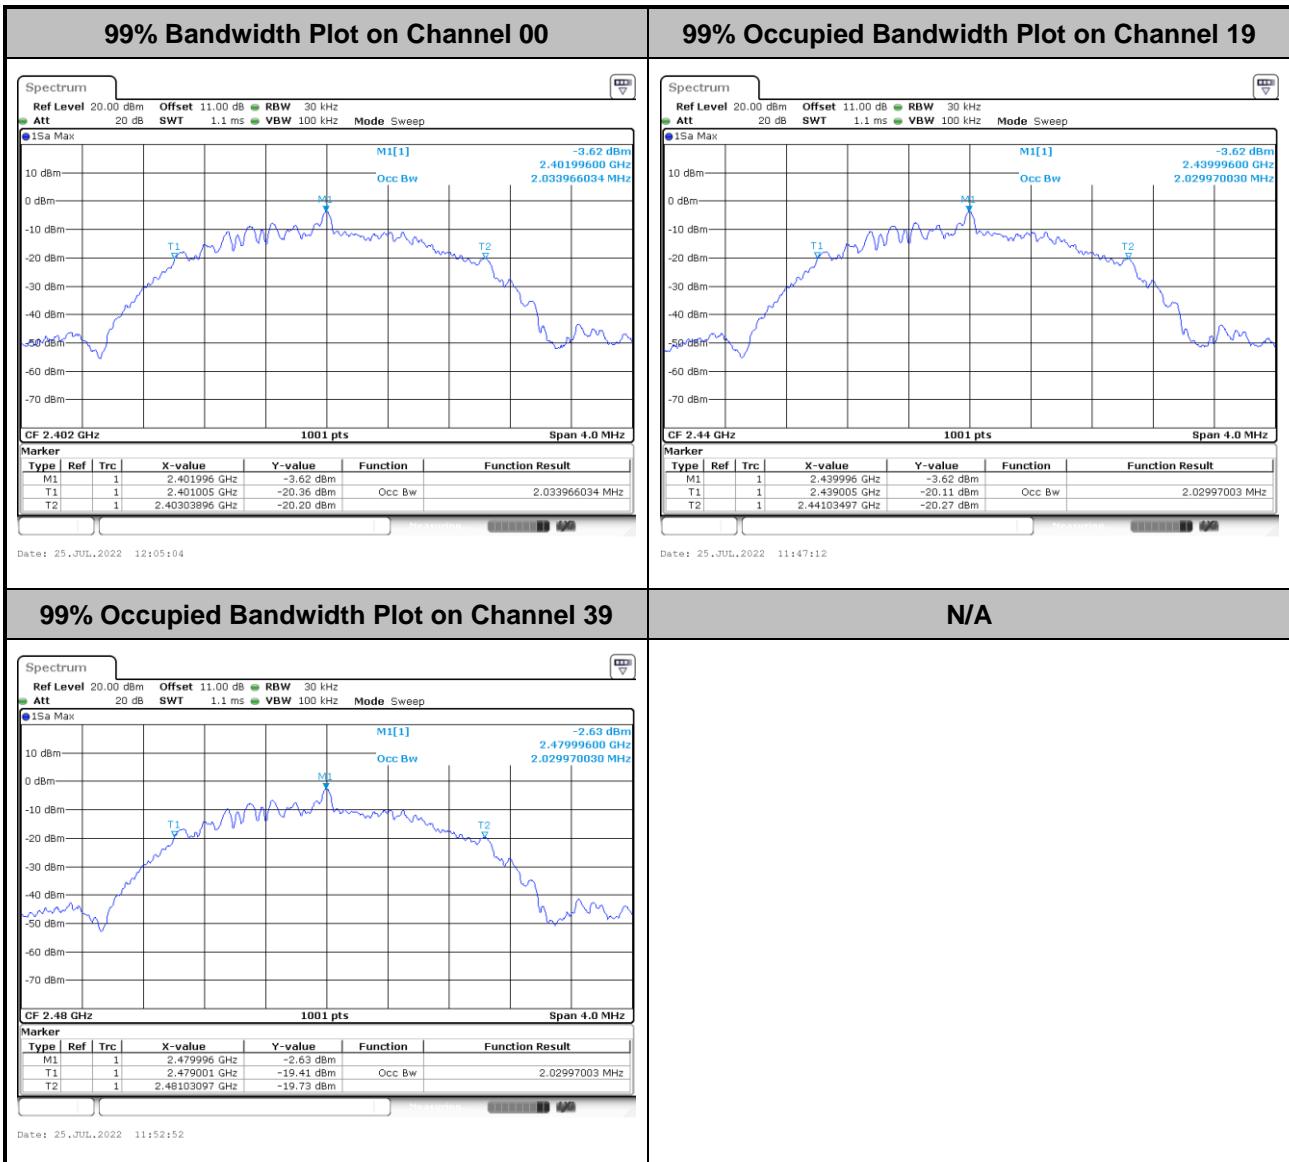

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

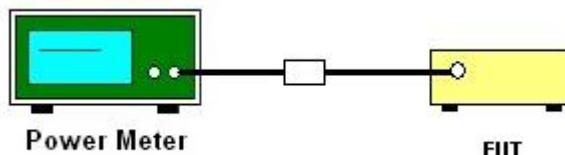

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

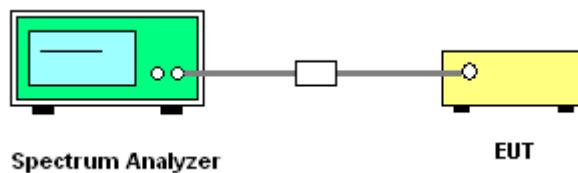


#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

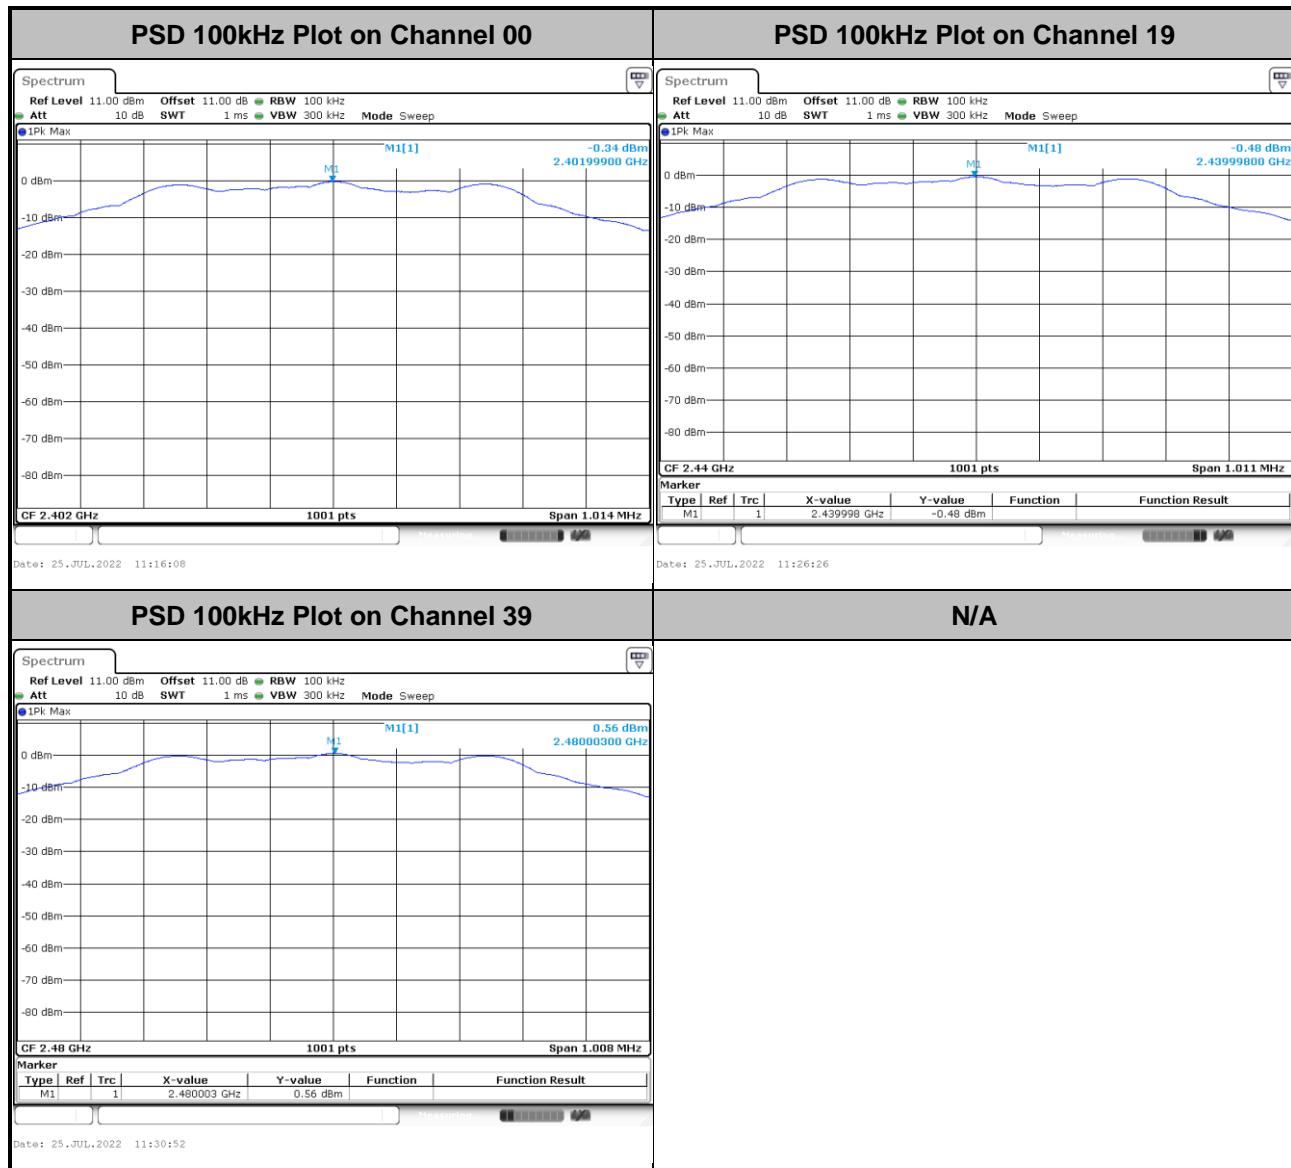




&lt;2Mbps&gt;

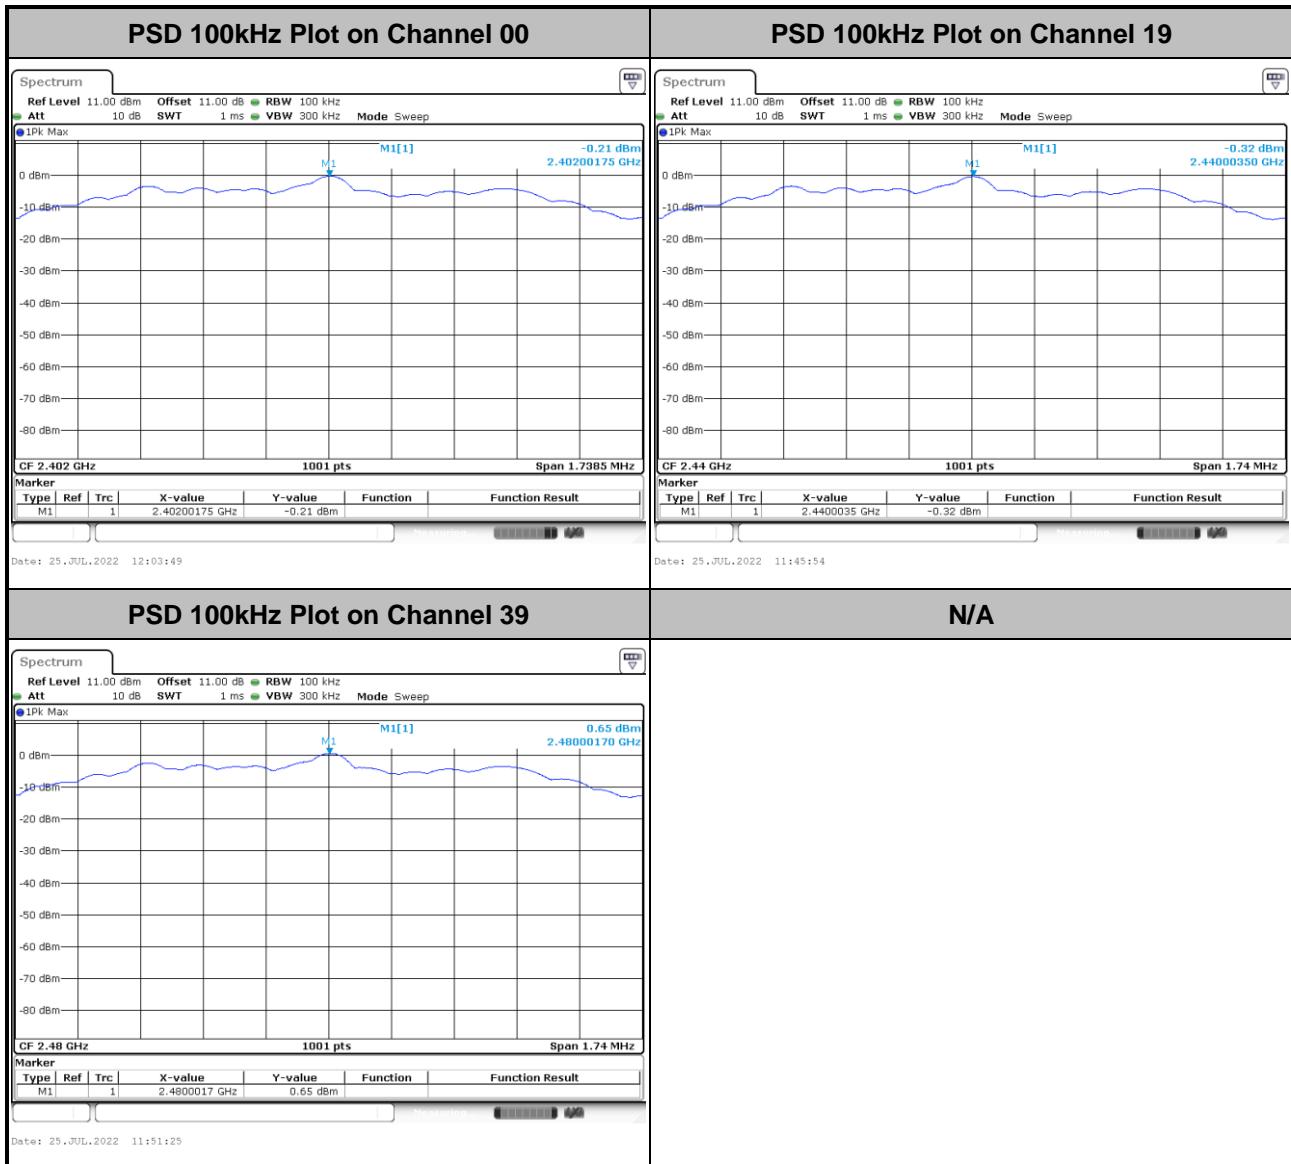




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

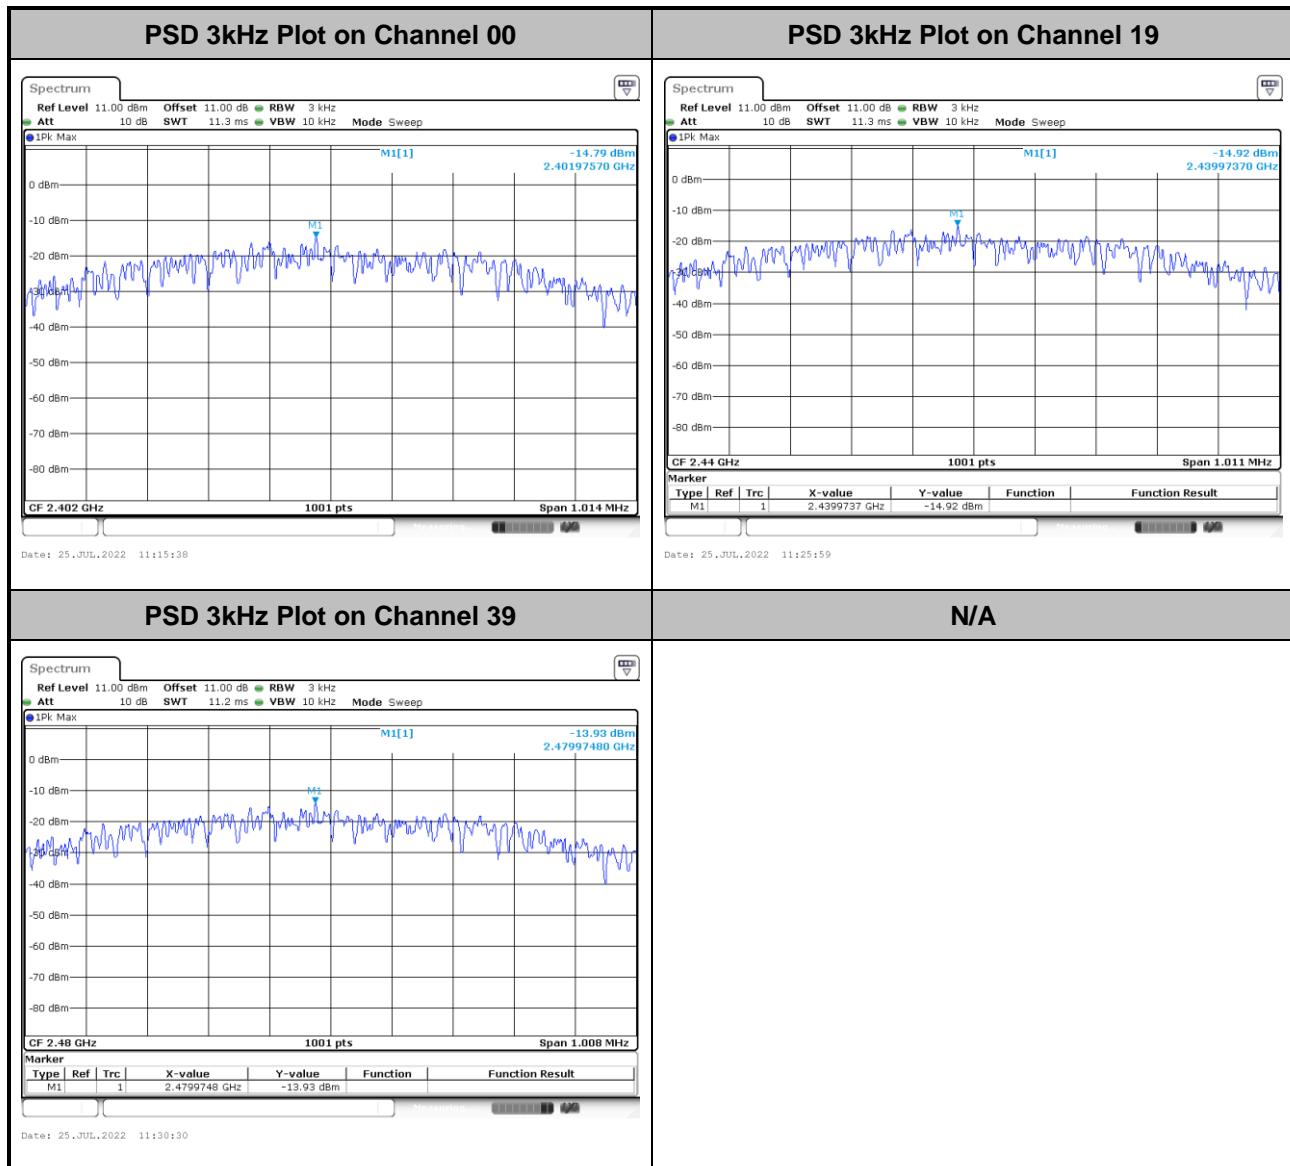



&lt;2Mbps&gt;

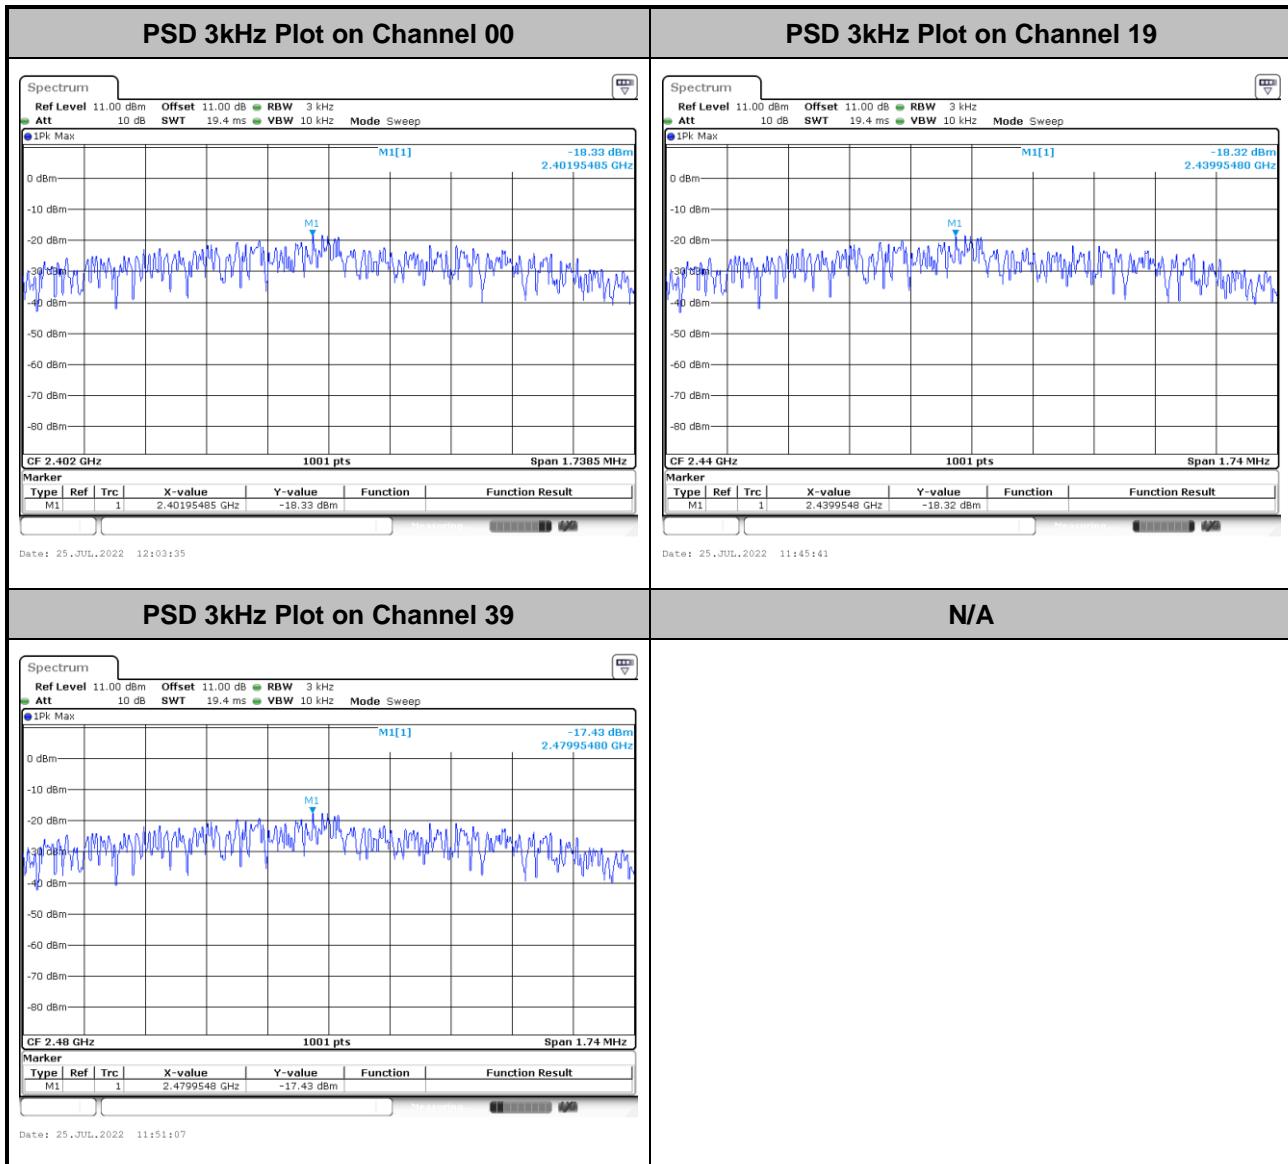

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

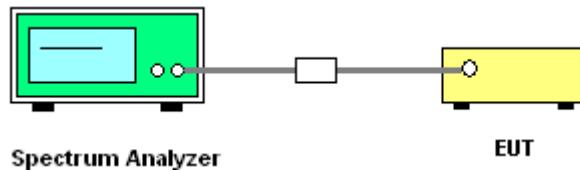




### 3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

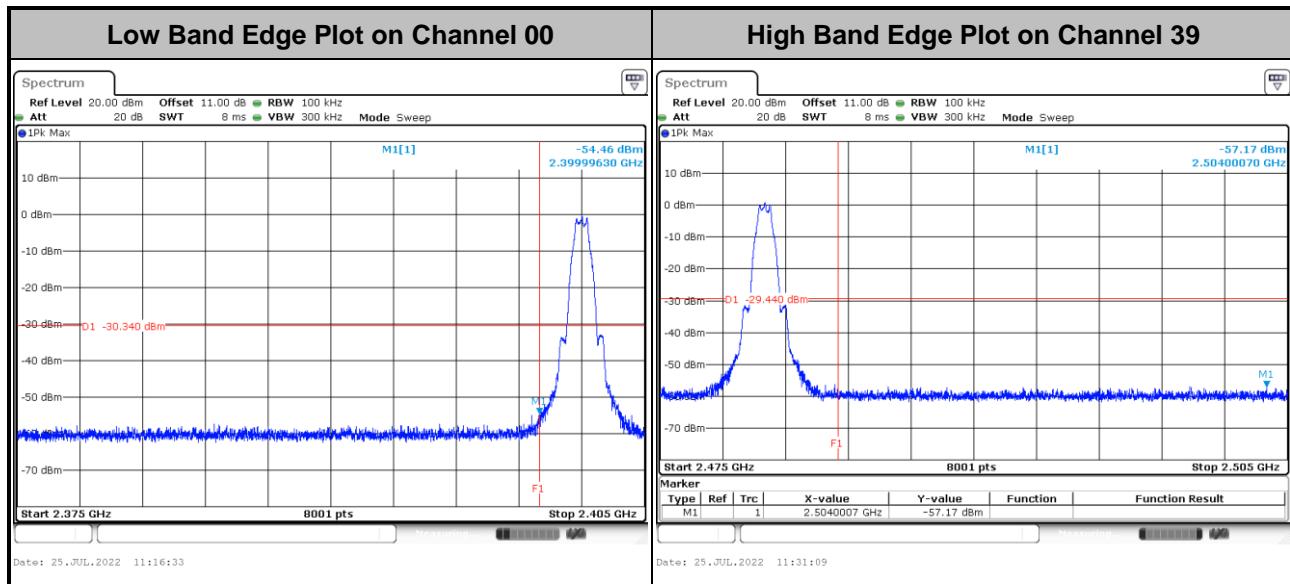


<2Mbps>

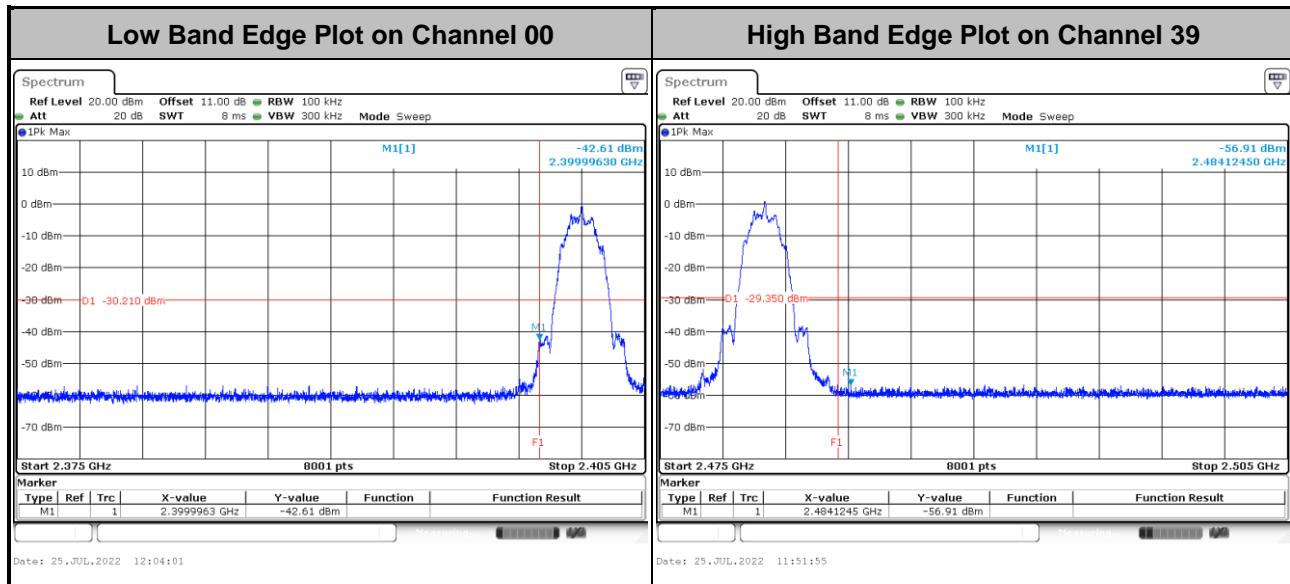




### 3.4.6 Test Result of Conducted Spurious Emission Plots


<1Mbps>

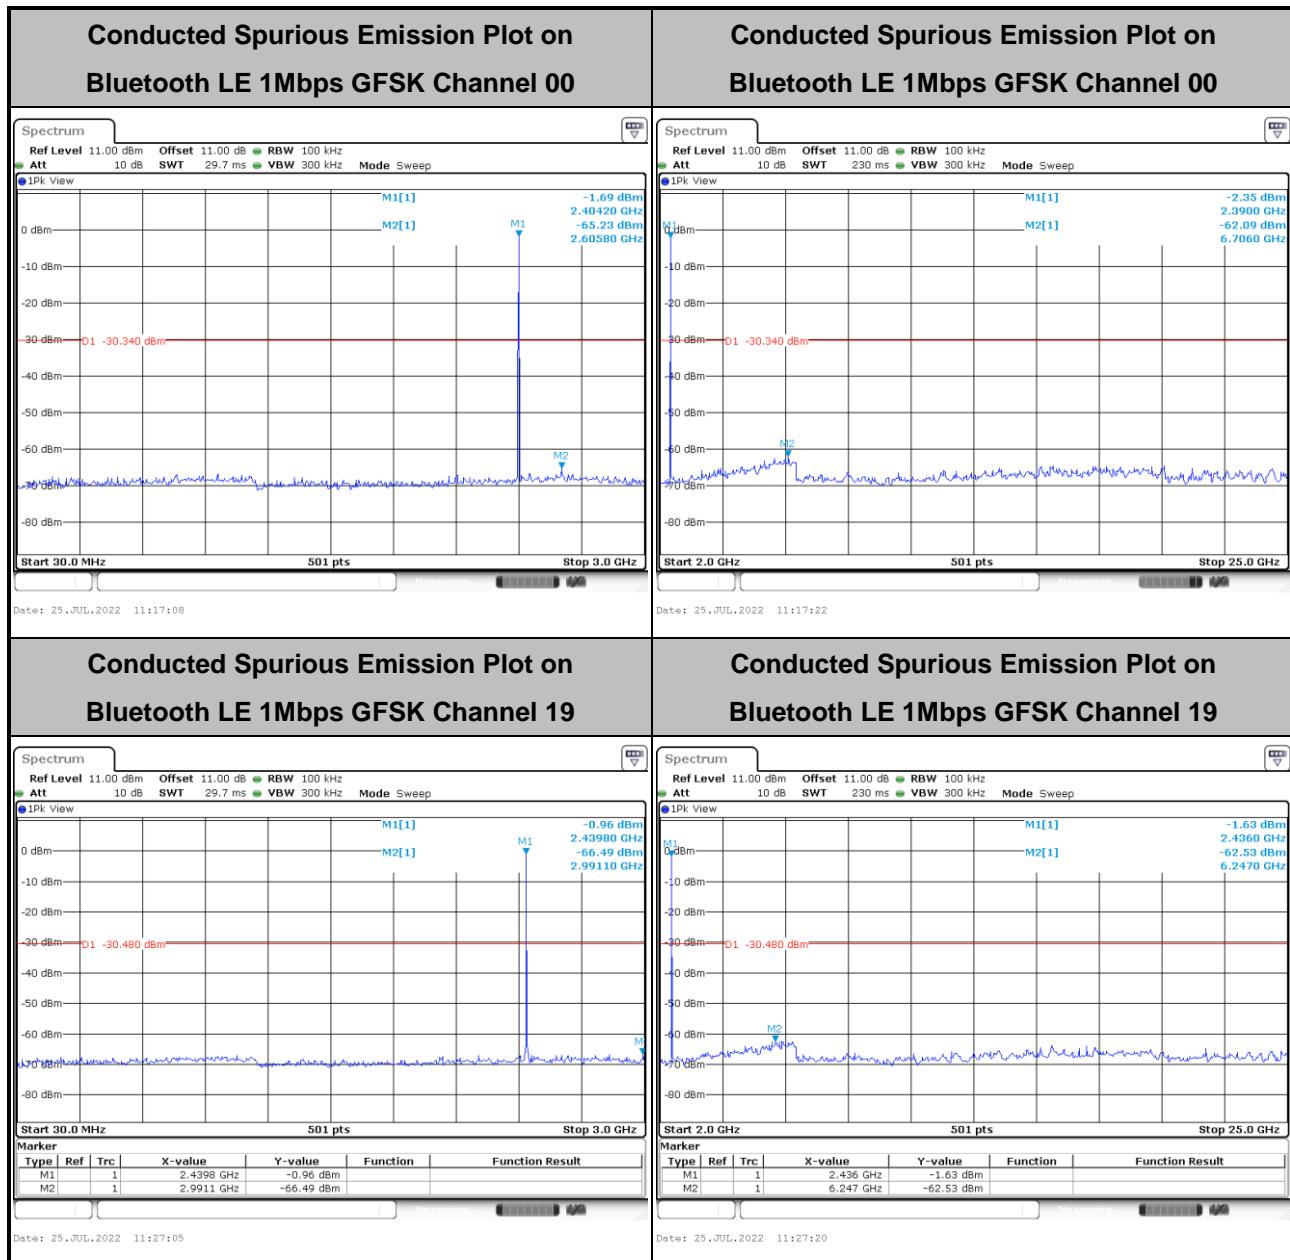


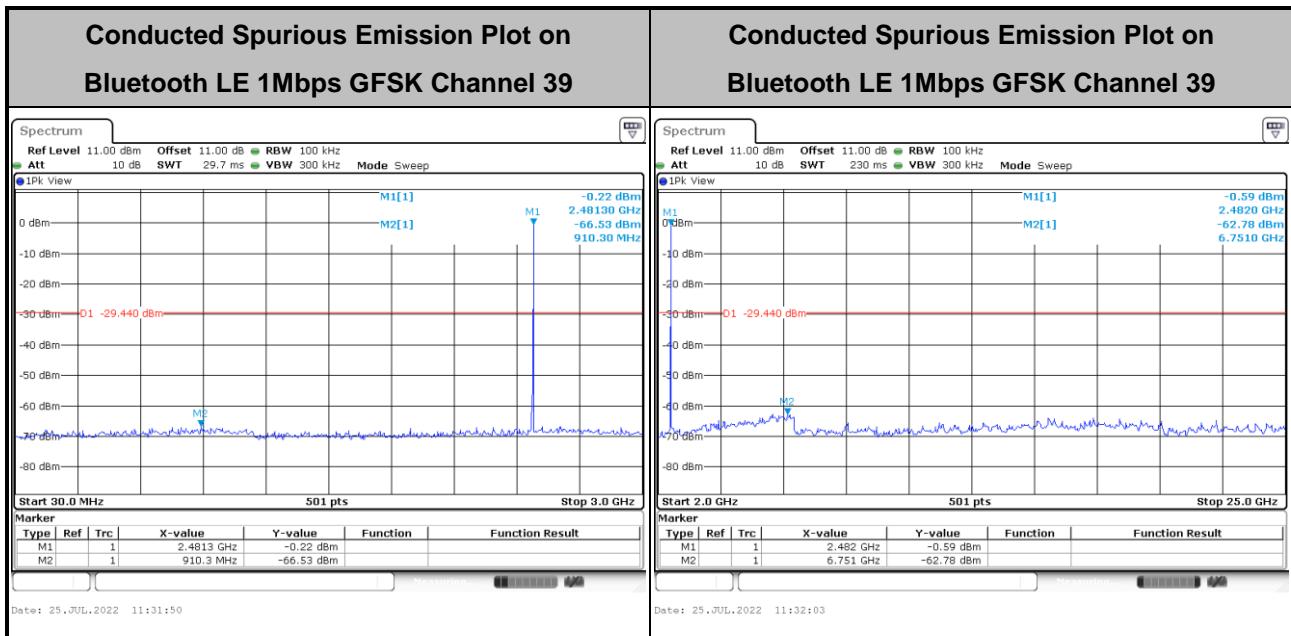



&lt;2Mbps&gt;

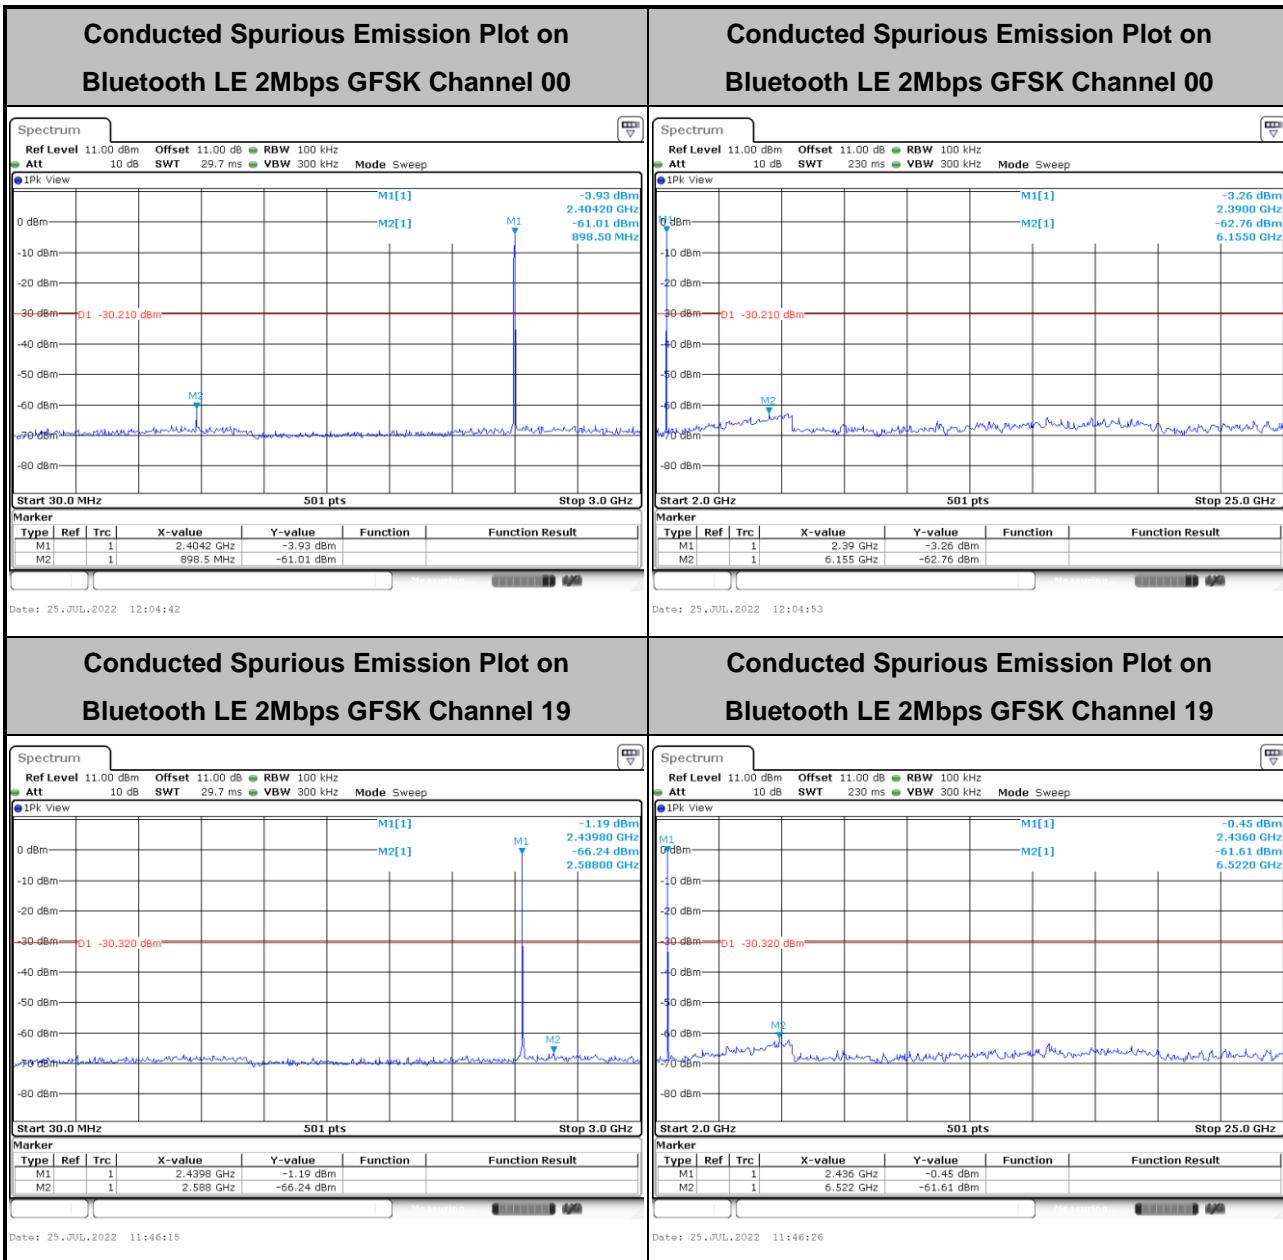

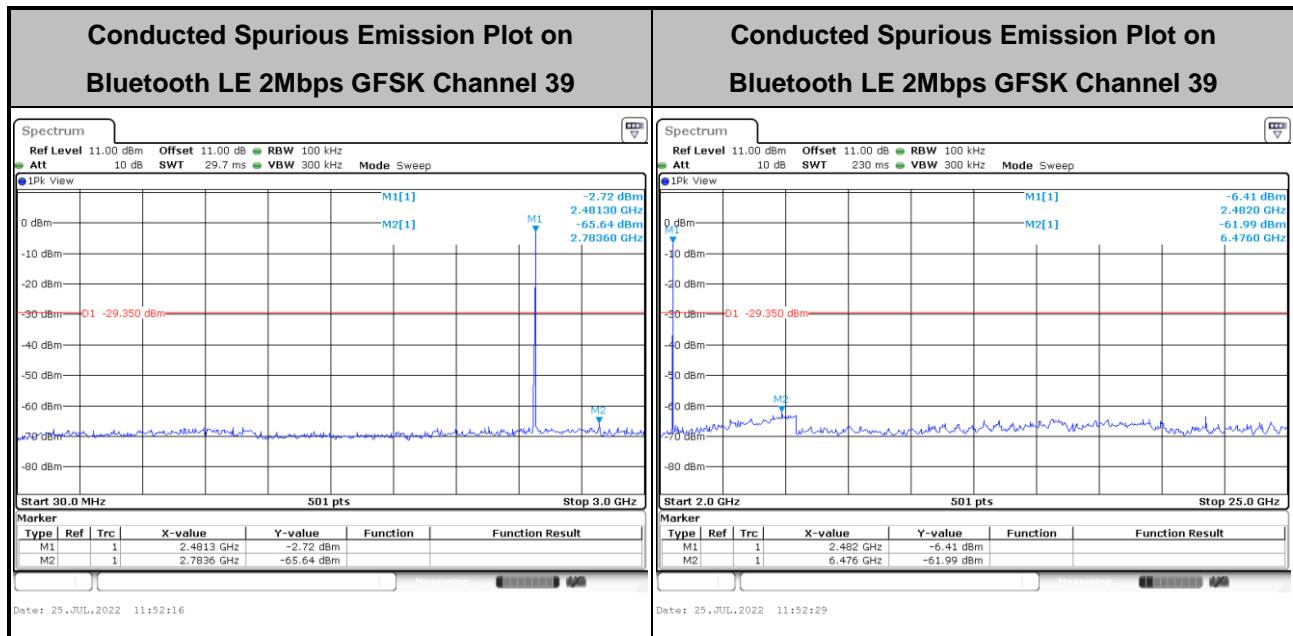



## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions test below 30MHz

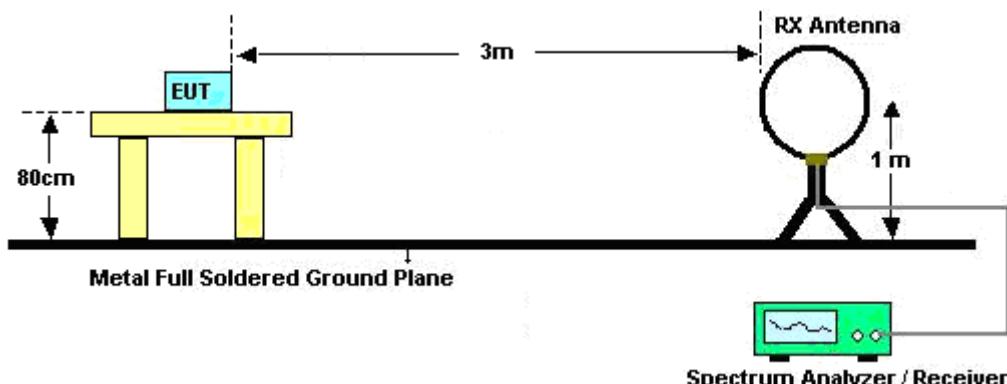


For radiated emissions test from 30MHz to 1GHz

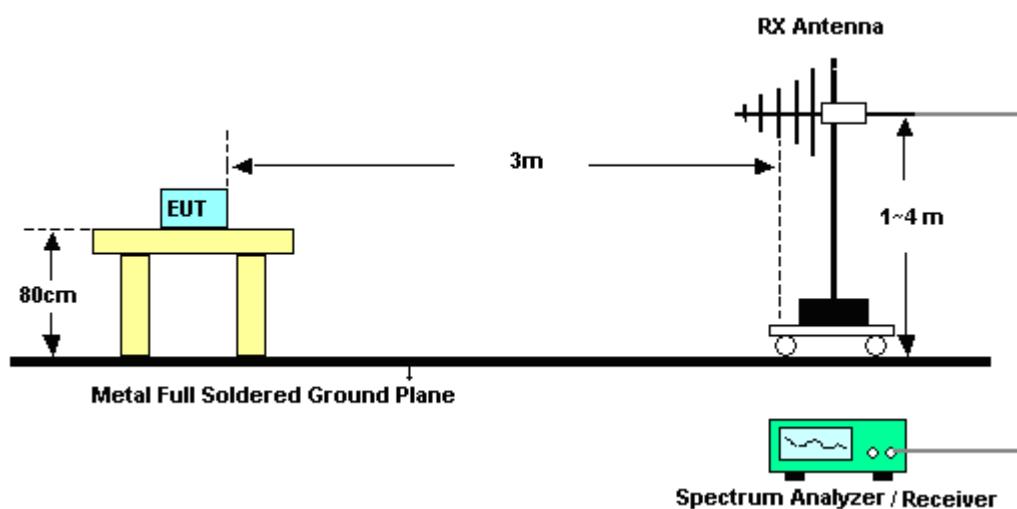

For radiated emissions test from 1GHz to 18GHz

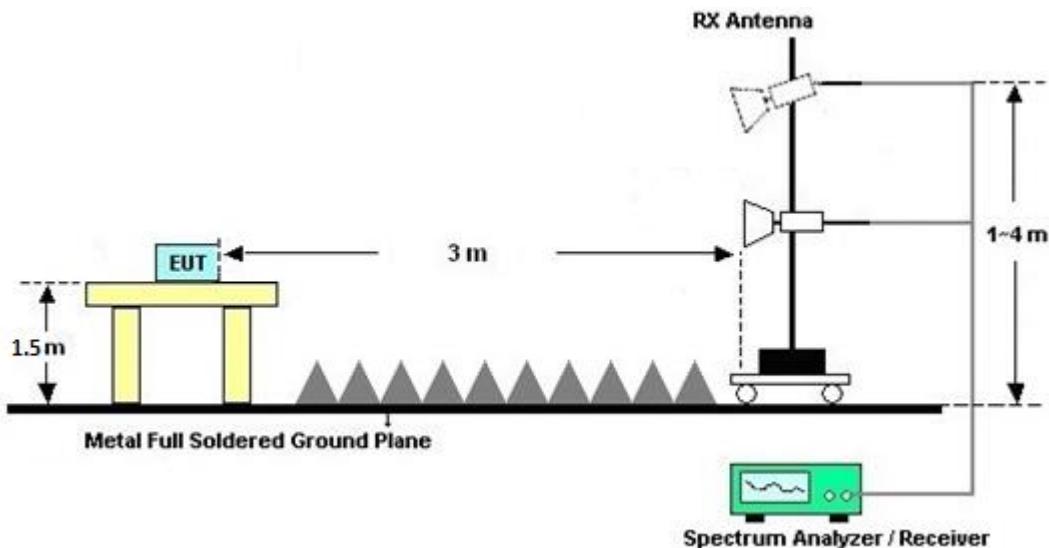

For radiated emissions test above 18GHz

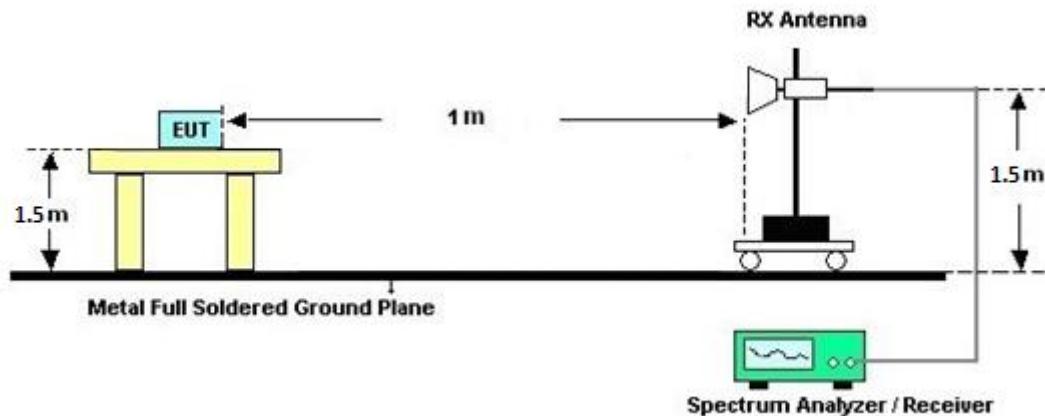

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

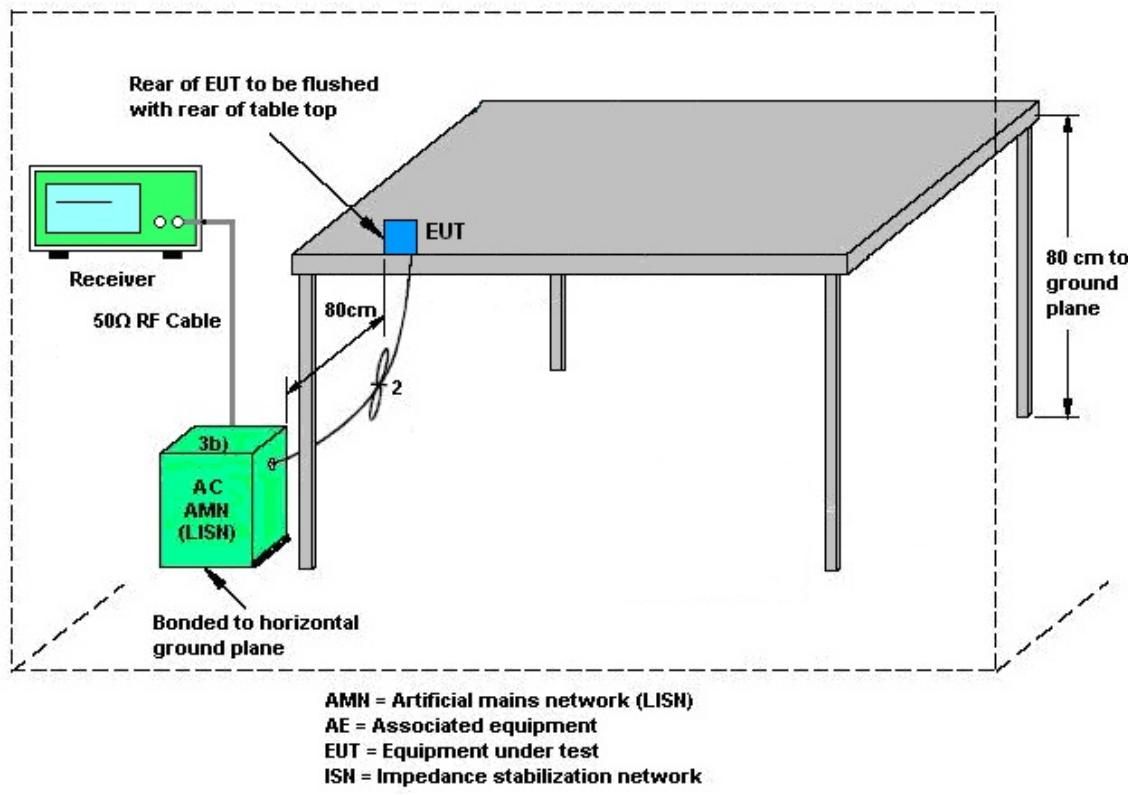

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Apr. 24, 2022	Jul. 19, 2022~ Aug. 16, 2022	Apr. 23, 2023	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 03, 2021	Jul. 19, 2022~ Aug. 16, 2022	Dec. 02, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 21, 2022	Jul. 19, 2022~ Aug. 16, 2022	Apr. 20, 2023	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	Jul. 19, 2022~ Aug. 16, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	Jul. 19, 2022~ Aug. 16, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060715	18-40GHz	Dec. 24, 2021	Jul. 19, 2022~ Jul. 27, 2022	Dec. 23, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 21, 2022	Jul. 28, 2022~ Aug. 16, 2022	Jul. 20, 2023	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	May 27, 2022	Jul. 19, 2022~ Jul. 27, 2022	May 26, 2023	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2022	Jul. 28, 2022~ Aug. 16, 2022	Jul. 21, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682/4	30MHz to 18GHz	Feb. 23, 2022	Jul. 19, 2022~ Aug. 16, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4	9kHz to 18GHz	Feb. 23, 2022	Jul. 19, 2022~ Aug. 16, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4	9kHz to 18GHz	Feb. 23, 2022	Jul. 19, 2022~ Aug. 16, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 17, 2021	Jul. 19, 2022~ Aug. 16, 2022	Sep. 16, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 23, 2022	Jul. 19, 2022~ Aug. 16, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 14, 2022	Jul. 19, 2022~ Aug. 16, 2022	Apr. 13, 2023	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Jul. 19, 2022~ Aug. 16, 2022	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Jul. 19, 2022~ Aug. 16, 2022	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Jul. 19, 2022~ Aug. 16, 2022	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jul. 19, 2022~ Aug. 16, 2022	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Jul. 19, 2022~ Aug. 16, 2022	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPHEL	TR-32	HE17XB2495	N/A	Mar. 07, 2022	Jul. 19, 2022~ Aug. 16, 2022	Mar. 06, 2023	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	Jul. 19, 2022~ Aug. 16, 2022	Nov. 29, 2022	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPTEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Jul. 15, 2022~ Jul. 25, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 16, 2021	Jul. 15, 2022~ Jul. 25, 2022	Dec. 15, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Jul. 15, 2022~ Jul. 25, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Dec. 30, 2022	Jul. 15, 2022~ Jul. 25, 2022	Dec. 29, 2023	Conducted (TH05-HY)
Switch Control Mainframe	E-IISTRUME NT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Jul. 15, 2022~ Jul. 25, 2022	Aug. 11, 2022	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 12, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Jul. 12, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Jul. 12, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Jul. 12, 2022	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jul. 12, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Jul. 12, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Jul. 12, 2022	Dec. 29, 2022	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{c(y)}$ )	3.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{c(y)}$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{c(y)}$ )	5.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{c(y)}$ )	4.0 dB
---	--------

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu				Temperature:	21~25		°C
Test Date:	2022/7/15~2022/07/25				Relative Humidity:	51~54		%

&lt;1Mbps&gt;

### TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.023	0.676	0.50	Pass
BLE	1Mbps	1	19	2440	1.021	0.674	0.50	Pass
BLE	1Mbps	1	39	2480	1.023	0.672	0.50	Pass

### TEST RESULTS DATA Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.10	30.00	0.80	0.70	36.00	Pass
BLE	1Mbps	1	19	2440	0.50	30.00	0.80	1.30	36.00	Pass
BLE	1Mbps	1	39	2480	0.50	30.00	0.80	1.30	36.00	Pass

### TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-0.34	-14.79	0.80	8.00	Pass
BLE	1Mbps	1	19	2440	-0.48	-14.92	0.80	8.00	Pass
BLE	1Mbps	1	39	2480	0.56	-13.93	0.80	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

&lt;2Mbps&gt;

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.034	1.159	0.50	Pass
BLE	2Mbps	1	19	2440	2.030	1.160	0.50	Pass
BLE	2Mbps	1	39	2480	2.030	1.160	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	0.30	30.00	0.80	1.10	36.00	Pass
BLE	2Mbps	1	19	2440	0.30	30.00	0.80	1.10	36.00	Pass
BLE	2Mbps	1	39	2480	0.80	30.00	0.80	1.60	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	-0.21	-18.33	0.80	8.00	Pass
BLE	2Mbps	1	19	2440	-0.32	-18.32	0.80	8.00	Pass
BLE	2Mbps	1	39	2480	0.65	-17.43	0.80	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




## **Appendix B. AC Conducted Emission Test Results**

<b>Test Engineer :</b>	Tom Lee	<b>Temperature :</b>	23~26°C
		<b>Relative Humidity :</b>	45~55%

## EUT Information

Report NO : 261611  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

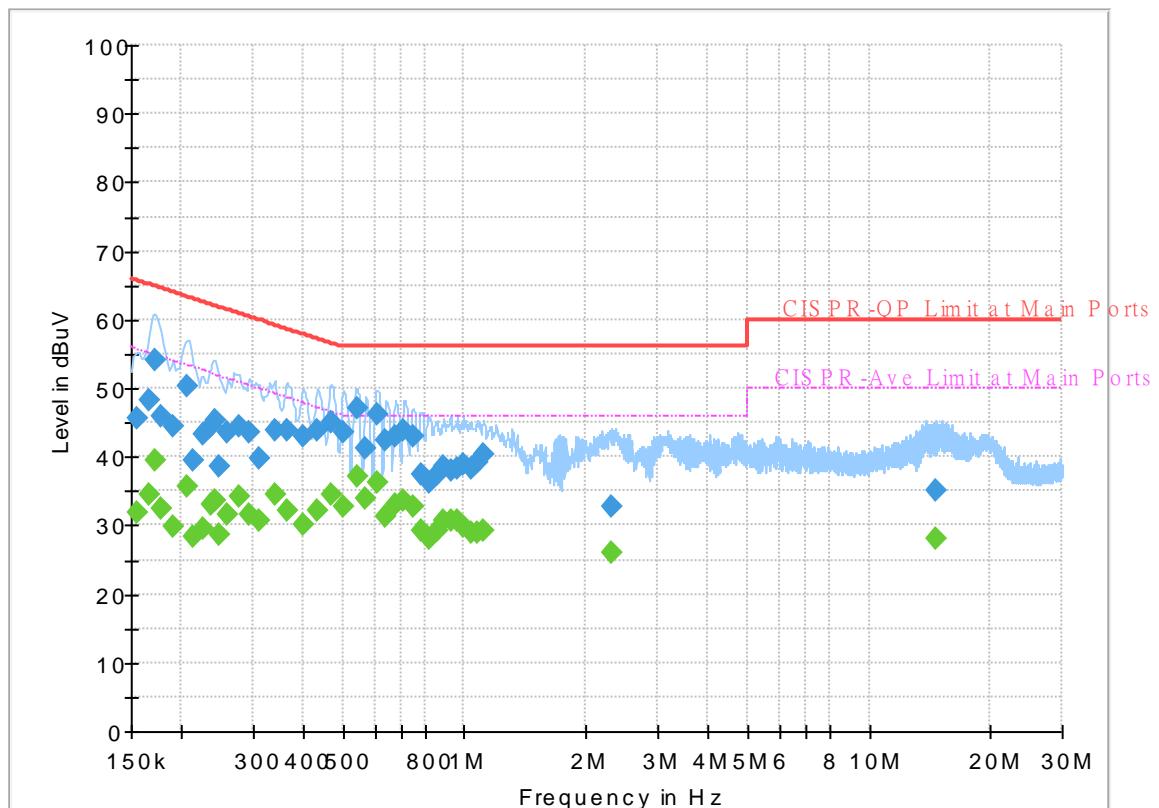

## Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	31.83	55.75	23.92	L1	OFF	19.6
0.154500	45.56	---	65.75	20.19	L1	OFF	19.6
0.165750	---	34.36	55.17	20.81	L1	OFF	19.6
0.165750	48.13	---	65.17	17.04	L1	OFF	19.6
0.172500	---	39.36	54.84	15.48	L1	OFF	19.6
0.172500	54.17	---	64.84	10.67	L1	OFF	19.6
0.177000	---	32.35	54.63	22.28	L1	OFF	19.6
0.177000	46.03	---	64.63	18.60	L1	OFF	19.6
0.190500	---	29.78	54.02	24.24	L1	OFF	19.6
0.190500	44.37	---	64.02	19.65	L1	OFF	19.6
0.206250	---	35.53	53.36	17.83	L1	OFF	19.6
0.206250	50.22	---	63.36	13.14	L1	OFF	19.6
0.213000	---	28.30	53.09	24.79	L1	OFF	19.6
0.213000	39.50	---	63.09	23.59	L1	OFF	19.6
0.226500	---	29.48	52.58	23.10	L1	OFF	19.6
0.226500	43.31	---	62.58	19.27	L1	OFF	19.6
0.235500	---	33.02	52.25	19.23	L1	OFF	19.6
0.235500	44.54	---	62.25	17.71	L1	OFF	19.6
0.242250	---	33.73	52.02	18.29	L1	OFF	19.6
0.242250	45.37	---	62.02	16.65	L1	OFF	19.6
0.246750	---	28.72	51.87	23.15	L1	OFF	19.6

0.246750	38.55	---	61.87	23.32	L1	OFF	19.6
0.260250	---	31.49	51.42	19.93	L1	OFF	19.6
0.260250	43.65	---	61.42	17.77	L1	OFF	19.6
0.276000	---	34.26	50.94	16.68	L1	OFF	19.6
0.276000	44.43	---	60.94	16.51	L1	OFF	19.6
0.294000	---	31.70	50.41	18.71	L1	OFF	19.6
0.294000	43.45	---	60.41	16.96	L1	OFF	19.6
0.312000	---	30.72	49.92	19.20	L1	OFF	19.6
0.312000	39.68	---	59.92	20.24	L1	OFF	19.6
0.339000	---	34.65	49.23	14.58	L1	OFF	19.6
0.339000	43.91	---	59.23	15.32	L1	OFF	19.6
0.363750	---	32.14	48.64	16.50	L1	OFF	19.6
0.363750	43.93	---	58.64	14.71	L1	OFF	19.6
0.399750	---	30.13	47.86	17.73	L1	OFF	19.6
0.399750	43.01	---	57.86	14.85	L1	OFF	19.6
0.433500	---	32.24	47.19	14.95	L1	OFF	19.6
0.433500	43.75	---	57.19	13.44	L1	OFF	19.6
0.467250	---	34.59	46.56	11.97	L1	OFF	19.6
0.467250	45.11	---	56.56	11.45	L1	OFF	19.6
0.503250	---	32.88	46.00	13.12	L1	OFF	19.6
0.503250	43.67	---	56.00	12.33	L1	OFF	19.6
0.541500	---	37.06	46.00	8.94	L1	OFF	19.6
0.541500	47.21	---	56.00	8.79	L1	OFF	19.6
0.570750	---	33.83	46.00	12.17	L1	OFF	19.6
0.570750	41.12	---	56.00	14.88	L1	OFF	19.6
0.609000	---	36.24	46.00	9.76	L1	OFF	19.6
0.609000	46.07	---	56.00	9.93	L1	OFF	19.6
0.640500	---	31.26	46.00	14.74	L1	OFF	19.6
0.640500	42.52	---	56.00	13.48	L1	OFF	19.6
0.674250	---	32.91	46.00	13.09	L1	OFF	19.6
0.674250	42.89	---	56.00	13.11	L1	OFF	19.6
0.710250	---	33.70	46.00	12.30	L1	OFF	19.6
0.710250	43.86	---	56.00	12.14	L1	OFF	19.6
0.744000	---	32.85	46.00	13.15	L1	OFF	19.6
0.744000	42.86	---	56.00	13.14	L1	OFF	19.6
0.786750	---	29.31	46.00	16.69	L1	OFF	19.6
0.786750	37.54	---	56.00	18.46	L1	OFF	19.6
0.822750	---	28.12	46.00	17.88	L1	OFF	19.6
0.822750	36.24	---	56.00	19.76	L1	OFF	19.6
0.856500	---	29.36	46.00	16.64	L1	OFF	19.6
0.856500	37.50	---	56.00	18.50	L1	OFF	19.6
0.890250	---	30.82	46.00	15.18	L1	OFF	19.6
0.890250	38.50	---	56.00	17.50	L1	OFF	19.6
0.924000	---	30.62	46.00	15.38	L1	OFF	19.6
0.924000	38.08	---	56.00	17.92	L1	OFF	19.6
0.957750	---	30.56	46.00	15.44	L1	OFF	19.6
0.957750	38.18	---	56.00	17.82	L1	OFF	19.6
0.993750	---	29.94	46.00	16.06	L1	OFF	19.6
0.993750	38.86	---	56.00	17.14	L1	OFF	19.6
1.043250	---	29.01	46.00	16.99	L1	OFF	19.7
1.043250	38.42	---	56.00	17.58	L1	OFF	19.7
1.077000	---	28.81	46.00	17.19	L1	OFF	19.7
1.077000	39.21	---	56.00	16.79	L1	OFF	19.7
1.117500	---	29.36	46.00	16.64	L1	OFF	19.7
1.117500	40.25	---	56.00	15.75	L1	OFF	19.7
2.312250	---	25.89	46.00	20.11	L1	OFF	19.7
2.312250	32.83	---	56.00	23.17	L1	OFF	19.7
14.655750	---	28.16	50.00	21.84	L1	OFF	20.3
14.655750	35.10	---	60.00	24.90	L1	OFF	20.3

## EUT Information

Report NO : 261611  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

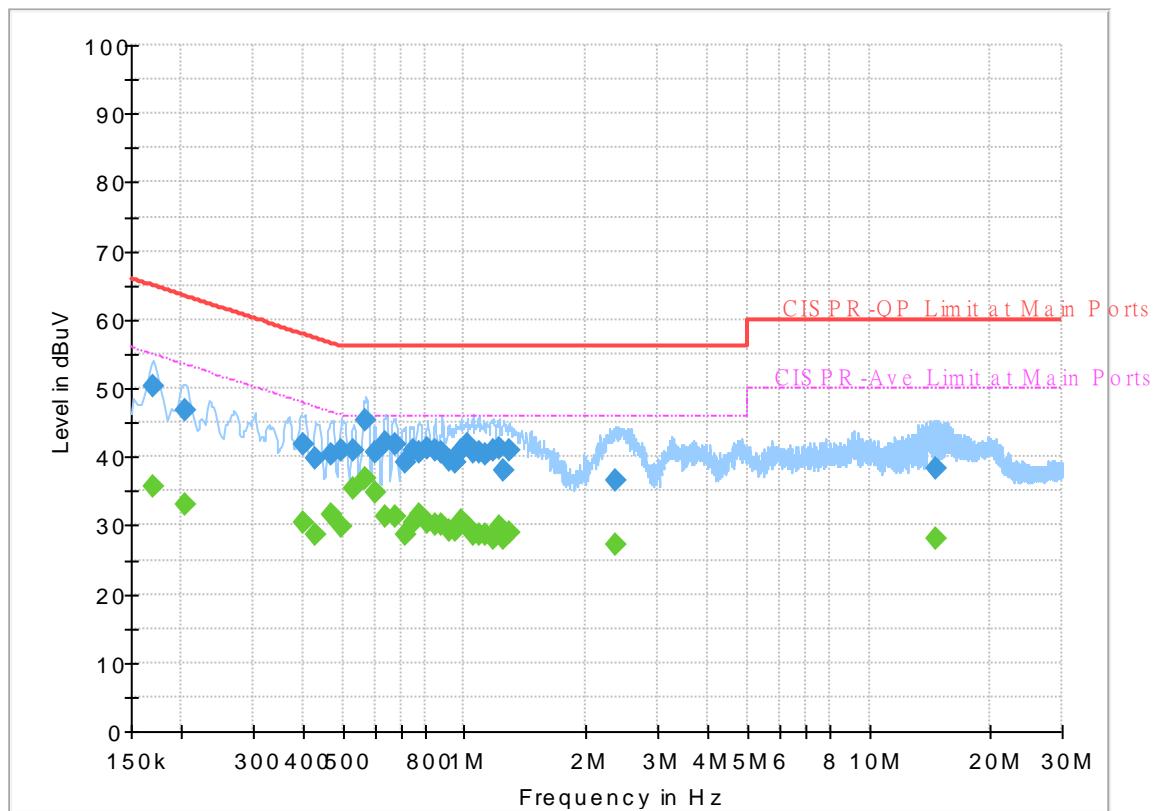

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170250	---	35.75	54.95	19.20	N	OFF	19.6
0.170250	50.35	---	64.95	14.60	N	OFF	19.6
0.204000	---	32.96	53.45	20.49	N	OFF	19.6
0.204000	46.90	---	63.45	16.55	N	OFF	19.6
0.399750	---	30.48	47.86	17.38	N	OFF	19.6
0.399750	41.69	---	57.86	16.17	N	OFF	19.6
0.429000	---	28.51	47.27	18.76	N	OFF	19.6
0.429000	39.91	---	57.27	17.36	N	OFF	19.6
0.467250	---	31.48	46.56	15.08	N	OFF	19.6
0.467250	40.29	---	56.56	16.27	N	OFF	19.6
0.496500	---	29.74	46.06	16.32	N	OFF	19.6
0.496500	40.87	---	56.06	15.19	N	OFF	19.6
0.532500	---	35.43	46.00	10.57	N	OFF	19.6
0.532500	40.95	---	56.00	15.05	N	OFF	19.6
0.570750	---	36.88	46.00	9.12	N	OFF	19.6
0.570750	45.25	---	56.00	10.75	N	OFF	19.6
0.600000	---	34.78	46.00	11.22	N	OFF	19.6
0.600000	40.71	---	56.00	15.29	N	OFF	19.6
0.638250	---	31.27	46.00	14.73	N	OFF	19.6
0.638250	42.06	---	56.00	13.94	N	OFF	19.6
0.674250	---	31.38	46.00	14.62	N	OFF	19.6

0.674250	41.83	---	56.00	14.17	N	OFF	19.6
0.712500	---	28.74	46.00	17.26	N	OFF	19.6
0.712500	39.21	---	56.00	16.79	N	OFF	19.6
0.744000	---	30.38	46.00	15.62	N	OFF	19.6
0.744000	41.02	---	56.00	14.98	N	OFF	19.6
0.771000	---	31.47	46.00	14.53	N	OFF	19.6
0.771000	40.75	---	56.00	15.25	N	OFF	19.6
0.811500	---	30.43	46.00	15.57	N	OFF	19.6
0.811500	41.35	---	56.00	14.65	N	OFF	19.6
0.847500	---	30.11	46.00	15.89	N	OFF	19.6
0.847500	41.06	---	56.00	14.94	N	OFF	19.6
0.881250	---	30.01	46.00	15.99	N	OFF	19.6
0.881250	40.74	---	56.00	15.26	N	OFF	19.6
0.915000	---	29.30	46.00	16.70	N	OFF	19.6
0.915000	39.41	---	56.00	16.59	N	OFF	19.6
0.948750	---	29.29	46.00	16.71	N	OFF	19.6
0.948750	39.21	---	56.00	16.79	N	OFF	19.6
0.978000	---	30.60	46.00	15.40	N	OFF	19.6
0.978000	40.87	---	56.00	15.13	N	OFF	19.6
1.014000	---	29.87	46.00	16.13	N	OFF	19.6
1.014000	41.72	---	56.00	14.28	N	OFF	19.6
1.050000	---	28.76	46.00	17.24	N	OFF	19.6
1.050000	40.69	---	56.00	15.31	N	OFF	19.6
1.083750	---	28.66	46.00	17.34	N	OFF	19.6
1.083750	40.69	---	56.00	15.31	N	OFF	19.6
1.131000	---	28.67	46.00	17.33	N	OFF	19.6
1.131000	40.28	---	56.00	15.72	N	OFF	19.6
1.173750	---	28.22	46.00	17.78	N	OFF	19.6
1.173750	40.82	---	56.00	15.18	N	OFF	19.6
1.214250	---	29.78	46.00	16.22	N	OFF	19.6
1.214250	41.33	---	56.00	14.67	N	OFF	19.6
1.254750	---	27.93	46.00	18.07	N	OFF	19.6
1.254750	37.95	---	56.00	18.05	N	OFF	19.6
1.286250	---	29.09	46.00	16.91	N	OFF	19.7
1.286250	41.00	---	56.00	15.00	N	OFF	19.7
2.370750	---	27.16	46.00	18.84	N	OFF	19.7
2.370750	36.42	---	56.00	19.58	N	OFF	19.7
14.601750	---	28.03	50.00	21.97	N	OFF	20.3
14.601750	38.20	---	60.00	21.80	N	OFF	20.3



## Appendix C. Radiated Spurious Emission

<b>Test Engineer :</b>	Jesse Wang, Stan Hsieh, Ken Wu and Howard Huang	<b>Temperature :</b>	22~28.1°C
		<b>Relative Humidity :</b>	53.3~67.5%



&lt;1Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2330.58	54.48	-19.52	74	40.12	31.48	18.27	35.39	125	248	P	H
		2380.35	45.77	-8.23	54	31.36	31.4	18.42	35.41	125	248	A	H
	*	2402	91.66	-	-	77.18	31.42	18.48	35.42	125	248	P	H
	*	2402	90.94	-	-	76.46	31.42	18.48	35.42	125	248	A	H
													H
													H
		2360.19	55.19	-18.81	74	40.83	31.4	18.36	35.4	100	292	P	V
		2383.5	45.7	-8.3	54	31.28	31.4	18.43	35.41	100	292	A	V
	*	2402	88.31	-	-	73.83	31.42	18.48	35.42	100	292	P	V
	*	2402	87.73	-	-	73.25	31.42	18.48	35.42	100	292	A	V
BLE CH 19 2440MHz													V
		2380.28	54.7	-19.3	74	40.29	31.4	18.42	35.41	100	247	P	H
		2381.26	45.38	-8.62	54	30.96	31.4	18.43	35.41	100	247	A	H
	*	2440	91.69	-	-	76.86	31.72	18.54	35.43	100	247	P	H
	*	2440	90.55	-	-	75.72	31.72	18.54	35.43	100	247	A	H
		2492.51	55.51	-18.49	74	40.22	32.14	18.61	35.46	100	247	P	H
		2487.4	46.39	-7.61	54	31.14	32.1	18.6	35.45	100	247	A	H
		2364.6	54.69	-19.31	74	40.32	31.4	18.38	35.41	100	309	P	V
		2324	45.41	-8.59	54	31.05	31.5	18.25	35.39	100	309	A	V
	*	2440	89.56	-	-	74.73	31.72	18.54	35.43	100	309	P	V
	*	2440	88.23	-	-	73.4	31.72	18.54	35.43	100	309	A	V
		2499.23	54.79	-19.21	74	39.43	32.19	18.63	35.46	100	309	P	V
		2499.65	46.11	-7.89	54	30.74	32.2	18.63	35.46	100	309	A	V



BLE CH 39 2480MHz	*	2480	91.34	-	-	76.15	32.04	18.6	35.45	100	233	P	H
	*	2480	90.59	-	-	75.4	32.04	18.6	35.45	100	233	A	H
		2494.92	55.55	-18.45	74	40.23	32.16	18.62	35.46	100	233	P	H
		2483.56	46.37	-7.63	54	31.15	32.07	18.6	35.45	100	233	A	H
													H
													H
	*	2480	92.48	-	-	77.29	32.04	18.6	35.45	100	287	P	V
	*	2480	91.56	-	-	76.37	32.04	18.6	35.45	100	287	A	V
		2496.92	55.48	-18.52	74	40.14	32.18	18.62	35.46	100	287	P	V
		2492.28	46.42	-7.58	54	31.13	32.14	18.61	35.46	100	287	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.85	-31.15	74	55.14	34.01	12.7	59	-	-	P	H
		14490	50.58	-23.42	74	46.87	39.58	21.65	57.52	-	-	P	H
		14490	39.83	-14.17	54	36.12	39.58	21.65	57.52	-	-	A	H
		16020	52.28	-21.72	74	44.62	41.04	22.62	56	-	-	P	H
		16020	41.18	-12.82	54	33.52	41.04	22.62	56	-	-	A	H
		17700	53.69	-20.31	74	43.83	41.5	23.55	55.19	-	-	P	H
		17700	41.87	-12.13	54	32.01	41.5	23.55	55.19	-	-	A	H
													H
													H
													H
													H
													H
													H
													V



BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	43.92	-30.08	74	55.99	34.04	12.75	58.86	-	-	P	H
		7320	45.15	-28.85	74	51.94	35.68	15.03	57.5	-	-	P	H
		13260	51.63	-22.37	74	49.92	39.08	20.56	57.93	-	-	P	H
		13260	40.39	-13.61	54	38.68	39.08	20.56	57.93	-	-	A	H
		15975	51.54	-22.46	74	44.01	40.97	22.59	56.03	-	-	P	H
		15975	41.12	-12.88	54	33.59	40.97	22.59	56.03	-	-	A	H
		17895	52.93	-21.07	74	42.97	41.41	23.65	55.1	-	-	P	H
		17895	43.01	-10.99	54	33.05	41.41	23.65	55.1	-	-	A	H
													H
													H
													H
													H
													V
		4880	43.44	-30.56	74	55.51	34.04	12.75	58.86	-	-	P	V
		7320	44.97	-29.03	74	51.76	35.68	15.03	57.5	-	-	P	V
		13905	49.91	-24.09	74	47.59	38.8	21.25	57.73	-	-	P	V
		13905	39.67	-14.33	54	37.35	38.8	21.25	57.73	-	-	A	V
		16020	51.94	-22.06	74	44.28	41.04	22.62	56	-	-	P	V
		16020	41.6	-12.4	54	33.94	41.04	22.62	56	-	-	A	V
		17805	53.54	-20.46	74	43.49	41.59	23.6	55.14	-	-	P	V
		17805	42.14	-11.86	54	32.09	41.59	23.6	55.14	-	-	A	V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	42.53	-31.47	74	54.32	34.1	12.82	58.71	-	-	P	H
		7440	44.77	-29.23	74	51.51	35.82	15.03	57.59	-	-	P	H
		12405	48.41	-25.59	74	46.38	39.01	19.64	56.62	-	-	P	H
		12405	37.89	-16.11	54	35.86	39.01	19.64	56.62	-	-	A	H
		15945	51.08	-22.92	74	43.65	40.94	22.57	56.08	-	-	P	H
		15945	40.16	-13.84	54	32.73	40.94	22.57	56.08	-	-	A	H
		17940	52.94	-21.06	74	42.91	41.44	23.67	55.08	-	-	P	H
		17940	41.86	-12.14	54	31.83	41.44	23.67	55.08	-	-	A	H
													H
													H
													H
													H
		4960	43.71	-30.29	74	55.5	34.1	12.82	58.71	-	-	P	V
		7440	44.6	-29.4	74	51.34	35.82	15.03	57.59	-	-	P	V
		12405	48.87	-25.13	74	46.84	39.01	19.64	56.62	-	-	P	V
		12405	38.47	-15.53	54	36.44	39.01	19.64	56.62	-	-	A	V
		15945	50.6	-23.4	74	43.17	40.94	22.57	56.08	-	-	P	V
		15945	41.16	-12.84	54	33.73	40.94	22.57	56.08	-	-	A	V
		17940	52.41	-21.59	74	42.38	41.44	23.67	55.08	-	-	P	V
		17940	42.65	-11.35	54	32.62	41.44	23.67	55.08	-	-	A	V
													V
													V
													V
													V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 4. The emission level close to 18GHz is checked that the average emission level is noise floor only.											



&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2365.755	54.27	-19.73	74	39.9	31.4	18.38	35.41	124	265	P	H
		2375.415	46.98	-7.02	54	32.59	31.4	18.4	35.41	124	265	A	H
	*	2402	89.23	-	-	74.75	31.42	18.48	35.42	124	265	P	H
	*	2402	87.59	-	-	73.11	31.42	18.48	35.42	124	265	A	H
													H
													H
		2353.785	55.44	-18.56	74	41.1	31.4	18.34	35.4	100	302	P	V
		2341.08	47.46	-6.54	54	33.12	31.44	18.3	35.4	100	302	A	V
	*	2402	88.35	-	-	73.87	31.42	18.48	35.42	100	302	P	V
	*	2402	86.94	-	-	72.46	31.42	18.48	35.42	100	302	A	V
BLE CH 19 2440MHz													V
		2387.84	55.42	-18.58	74	40.99	31.4	18.44	35.41	123	264	P	H
		2335.06	46.89	-7.11	54	32.54	31.46	18.28	35.39	123	264	A	H
	*	2440	90.13	-	-	75.3	31.72	18.54	35.43	123	264	P	H
	*	2440	88.72	-	-	73.89	31.72	18.54	35.43	123	264	A	H
		2497.41	54.87	-19.13	74	39.53	32.18	18.62	35.46	123	264	P	H
		2485.58	47.84	-6.16	54	32.6	32.08	18.61	35.45	123	264	A	H
		2376.64	54.37	-19.63	74	39.97	31.4	18.41	35.41	100	319	P	V
		2332.12	47.06	-6.94	54	32.71	31.47	18.27	35.39	100	319	A	V
	*	2440	89.86	-	-	75.03	31.72	18.54	35.43	100	319	P	V
	*	2440	88.63	-	-	73.8	31.72	18.54	35.43	100	319	A	V
		2493.42	54.87	-19.13	74	39.56	32.15	18.62	35.46	100	319	P	V
		2492.58	47.99	-6.01	54	32.7	32.14	18.61	35.46	100	319	A	V



BLE CH 39 2480MHz	*	2480	92.01	-	-	76.82	32.04	18.6	35.45	100	198	P	H
	*	2480	89.18	-	-	73.99	32.04	18.6	35.45	100	198	A	H
		2498.44	55.96	-18.04	74	40.6	32.19	18.63	35.46	100	198	P	H
		2497.72	47.85	-6.15	54	32.51	32.18	18.62	35.46	100	198	A	H
													H
													H
	*	2480	92.87	-	-	77.68	32.04	18.6	35.45	100	307	P	V
	*	2480	91.04	-	-	75.85	32.04	18.6	35.45	100	307	A	V
		2499.2	54.85	-19.15	74	39.49	32.19	18.63	35.46	100	307	P	V
		2495.88	47.73	-6.27	54	32.4	32.17	18.62	35.46	100	307	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.78	-31.22	74	55.07	34.01	12.7	59	-	-	P	H
		13260	50.39	-23.61	74	48.68	39.08	20.56	57.93	-	-	P	H
		13260	39.82	-14.18	54	38.11	39.08	20.56	57.93	-	-	A	H
		16020	52.27	-21.73	74	44.61	41.04	22.62	56	-	-	P	H
		16020	41.41	-12.59	54	33.75	41.04	22.62	56	-	-	A	H
		17895	52.33	-21.67	74	42.37	41.41	23.65	55.1	-	-	P	H
		17895	43.11	-10.89	54	33.15	41.41	23.65	55.1	-	-	A	H
													H
													H
													H
													H
													H
													V
		4804	42.9	-31.1	74	55.19	34.01	12.7	59	-	-	P	V
		13260	50.12	-23.88	74	48.41	39.08	20.56	57.93	-	-	P	V
		13260	39.86	-14.14	54	38.15	39.08	20.56	57.93	-	-	A	V
		16005	51.22	-22.78	74	43.6	41.01	22.6	55.99	-	-	P	V
		16005	41.55	-12.45	54	33.93	41.01	22.6	55.99	-	-	A	V
		17865	52.76	-21.24	74	42.76	41.47	23.64	55.11	-	-	P	V
		17865	42.9	-11.1	54	32.9	41.47	23.64	55.11	-	-	A	V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	45.02	-28.98	74	57.09	34.04	12.75	58.86	-	-	P	H
		7320	44.48	-29.52	74	51.27	35.68	15.03	57.5	-	-	P	H
		13290	49.97	-24.03	74	48.13	39.17	20.6	57.93	-	-	P	H
		13290	39.62	-14.38	54	37.78	39.17	20.6	57.93	-	-	A	H
		16005	51.5	-22.5	74	43.88	41.01	22.6	55.99	-	-	P	H
		16005	41.57	-12.43	54	33.95	41.01	22.6	55.99	-	-	A	H
		17865	53.03	-20.97	74	43.03	41.47	23.64	55.11	-	-	P	H
		17865	42.74	-11.26	54	32.74	41.47	23.64	55.11	-	-	A	H
													H
													H
													H
													H
		4880	44.86	-29.14	74	56.93	34.04	12.75	58.86	-	-	P	V
		7320	44.45	-29.55	74	51.24	35.68	15.03	57.5	-	-	P	V
		13395	48.1	-25.9	74	46.33	39.01	20.71	57.95	-	-	P	V
		13395	38.59	-15.41	54	36.82	39.01	20.71	57.95	-	-	A	V
		15960	51.34	-22.66	74	43.86	40.96	22.58	56.06	-	-	P	V
		15960	41.21	-12.79	54	33.73	40.96	22.58	56.06	-	-	A	V
		17940	53.28	-20.72	74	43.25	41.44	23.67	55.08	-	-	P	V
		17940	42.78	-11.22	54	32.75	41.44	23.67	55.08	-	-	A	V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	43.53	-30.47	74	55.32	34.1	12.82	58.71	-	-	P	H
		7440	44.96	-29.04	74	51.7	35.82	15.03	57.59	-	-	P	H
		14490	50.49	-23.51	74	46.78	39.58	21.65	57.52	-	-	P	H
		14490	40.12	-13.88	54	36.41	39.58	21.65	57.52	-	-	A	H
		16125	51.56	-22.44	74	43.76	41.2	22.67	56.07	-	-	P	H
		16125	41.69	-12.31	54	33.89	41.2	22.67	56.07	-	-	A	H
		17895	53.34	-20.66	74	43.38	41.41	23.65	55.1	-	-	P	H
		17895	43.07	-10.93	54	33.11	41.41	23.65	55.1	-	-	A	H
													H
													H
													H
													H
		4960	44.78	-29.22	74	56.57	34.1	12.82	58.71	-	-	P	V
		7440	44.73	-29.27	74	51.47	35.82	15.03	57.59	-	-	P	V
		13260	50.3	-23.7	74	48.59	39.08	20.56	57.93	-	-	P	V
		13260	39.99	-14.01	54	38.28	39.08	20.56	57.93	-	-	A	V
		16110	52.62	-21.38	74	44.81	41.2	22.67	56.06	-	-	P	V
		16110	41.51	-12.49	54	33.7	41.2	22.67	56.06	-	-	A	V
		17865	53.18	-20.82	74	43.18	41.47	23.64	55.11	-	-	P	V
		17865	42.83	-11.17	54	32.83	41.47	23.64	55.11	-	-	A	V
													V
													V
													V
													V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 4. The emission level close to 18GHz is checked that the average emission level is noise floor only.											



## Emission above 18GHz

## 2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		23551	37.95	-36.05	74	49.07	38.74	8.6	58.46	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
Remark	1.	No other spurious found.											
	2.	All results are PASS against limit line.											
	3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



## Emission below 1GHz

## 2.4GHz BLE (LF)

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>



**A calculation example for radiated spurious emission is shown as below:**

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dB $\mu$ V/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

#### For Peak Limit @ 2390MHz:

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) – 35.86 (dB)

= 55.45 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 55.45(dB $\mu$ V/m) – 74(dB $\mu$ V/m)

= -18.55(dB)

#### For Average Limit @ 2390MHz:

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) – 35.86 (dB)

= 43.54 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 43.54(dB $\mu$ V/m) – 54(dB $\mu$ V/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

<b>Test Engineer :</b>	Jesse Wang, Stan Hsieh, Ken Wu and Howard Huang	<b>Temperature :</b>	22~28.1°C
		<b>Relative Humidity :</b>	53.3~67.5%

### Note symbol


-L	<b>Low channel location</b>
-R	<b>High channel location</b>





&lt;1Mbps&gt;

2.4GHz 2400~2483.5MHz



BLE (Band Edge @ 3m)

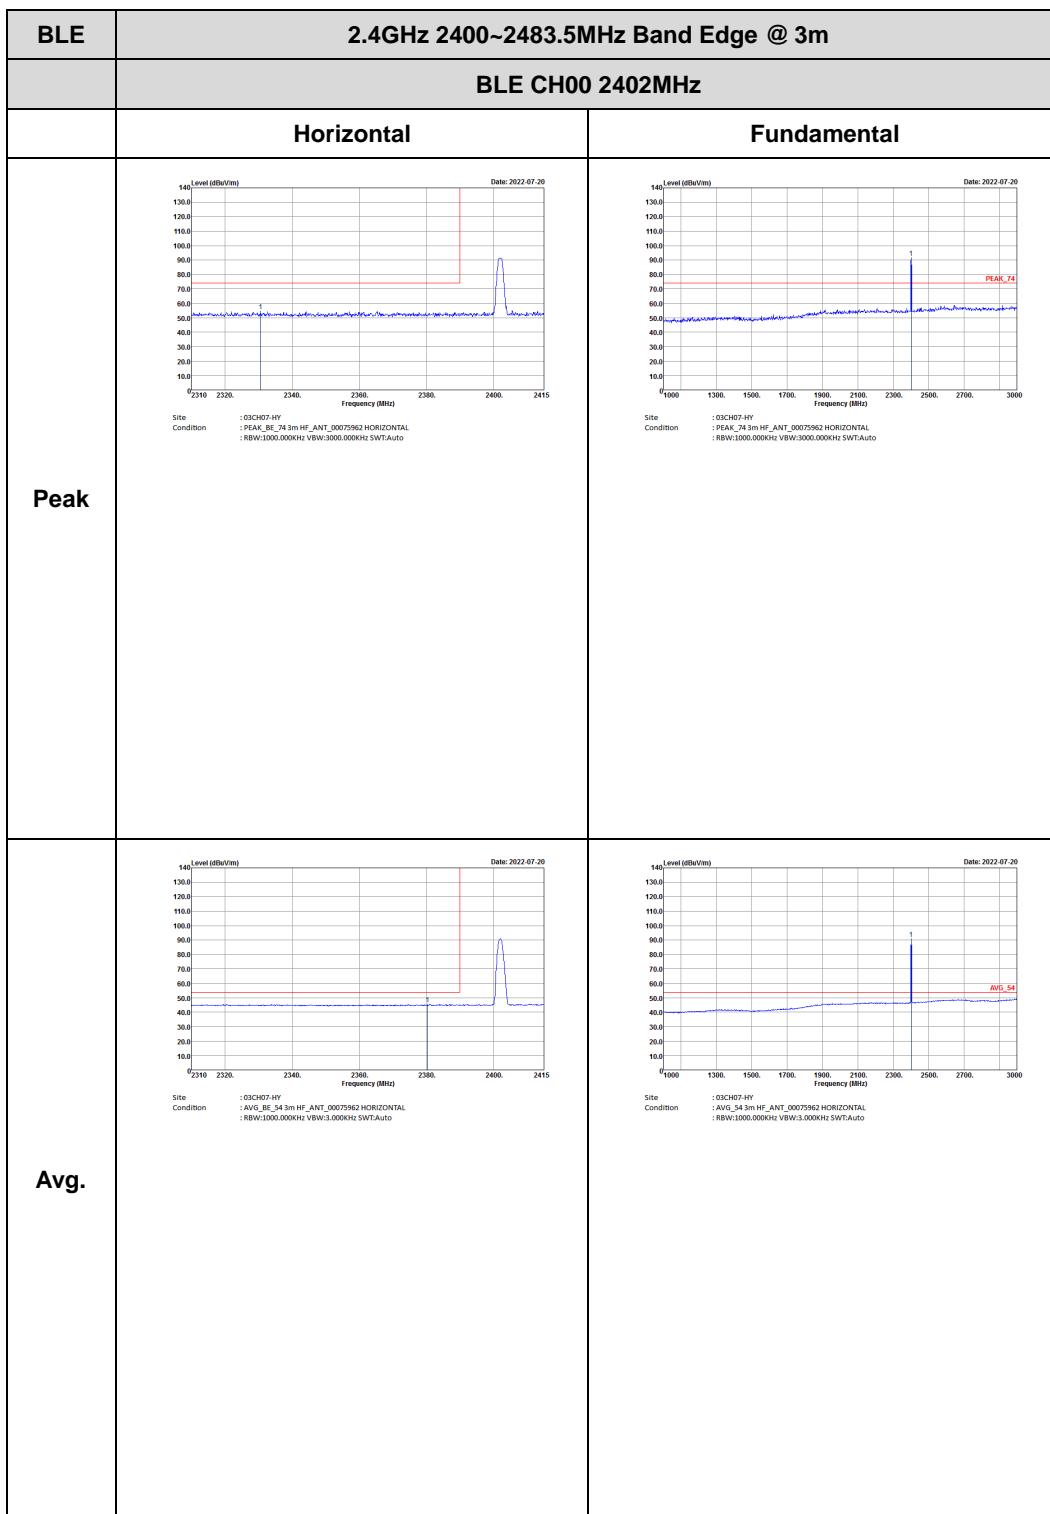


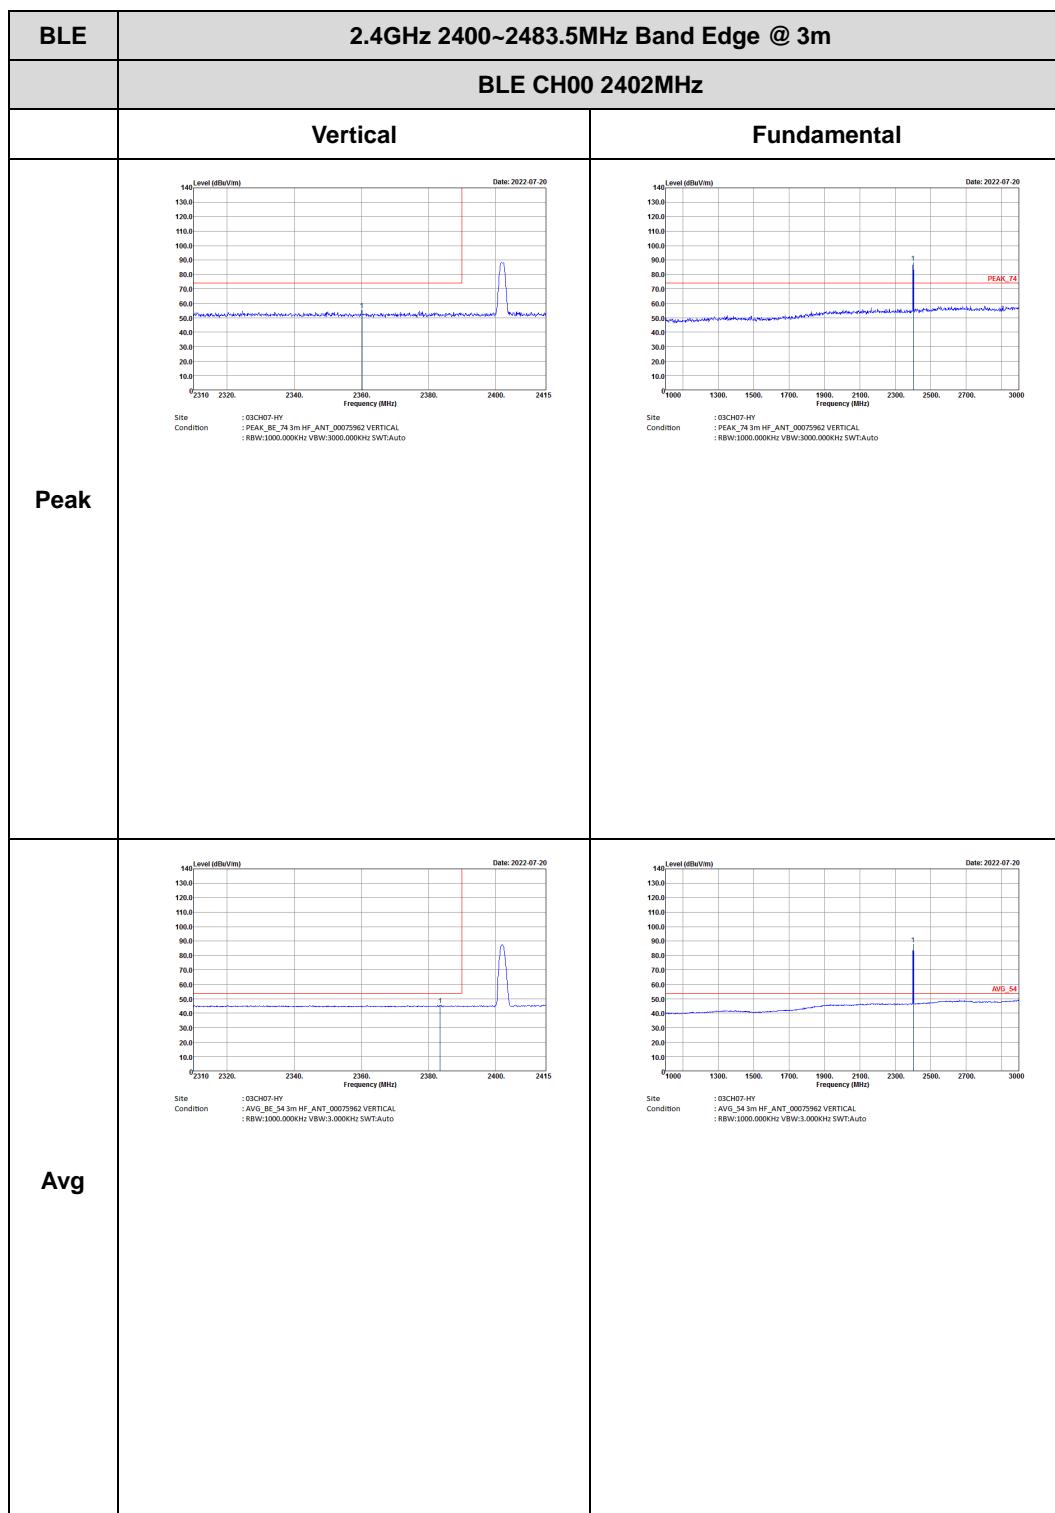


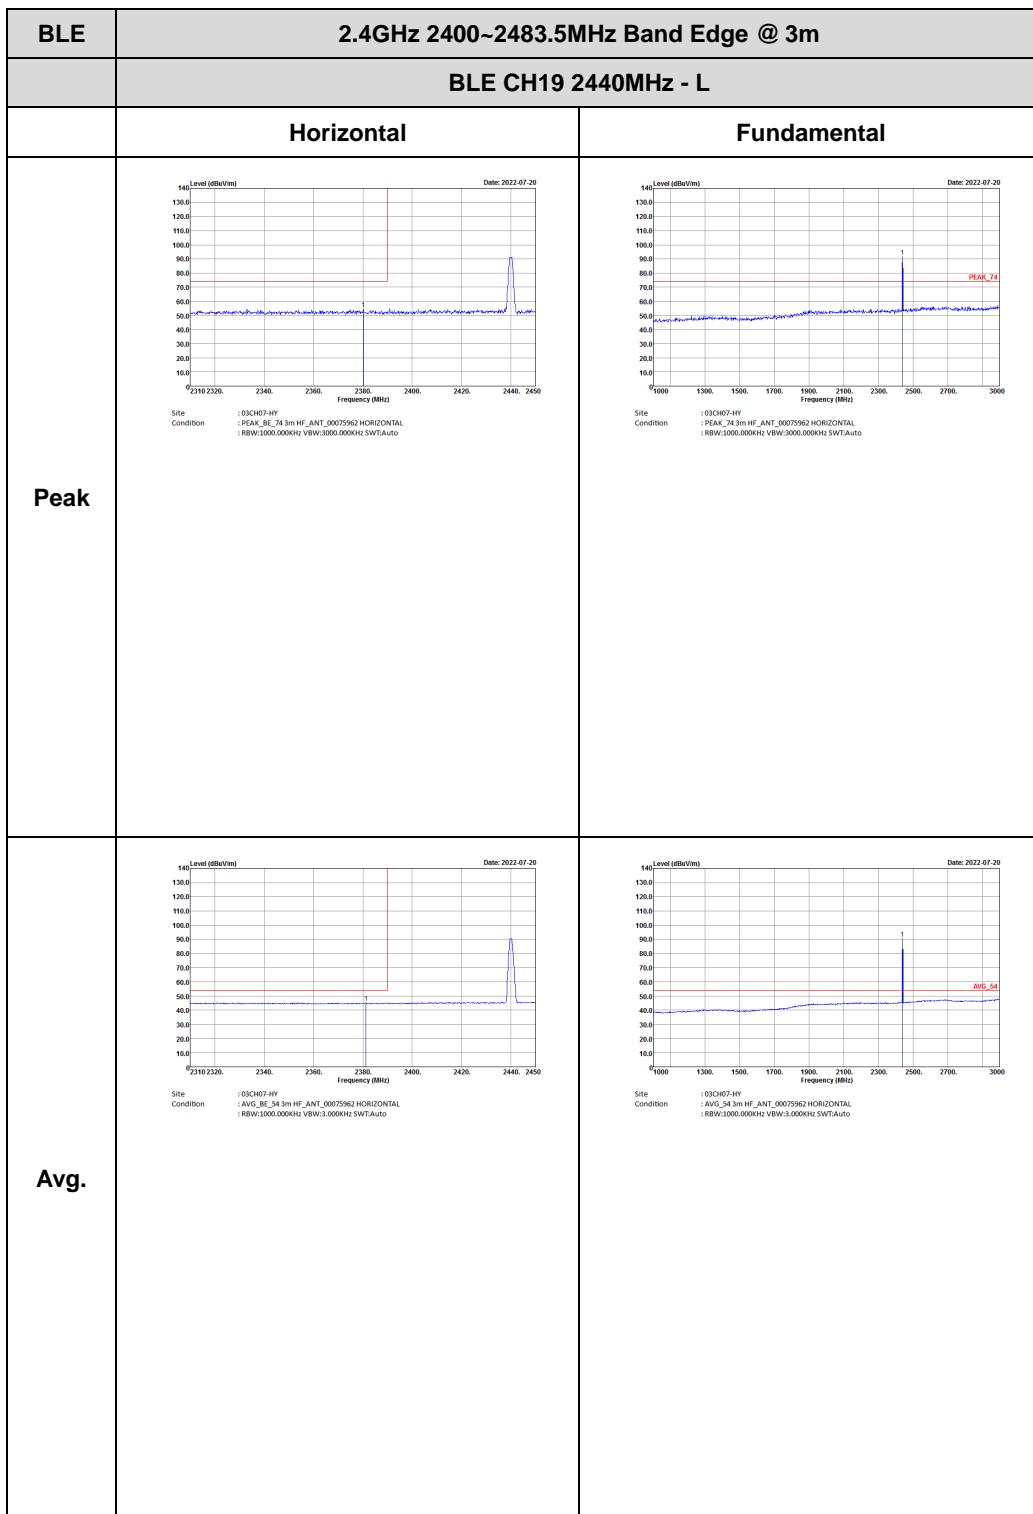


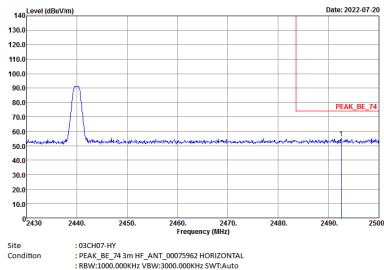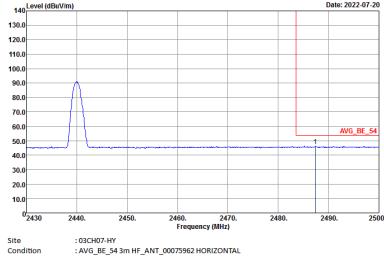



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-20</p> <p>PEAK_BE_74</p> <p>Site: 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000KHz VBW:3000.000KHz SW:Auto</p>	Left blank
Avg.	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-20</p> <p>Avg_BE_54</p> <p>Site: 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000KHz VBW:3.000KHz SW:Auto</p>	Left blank

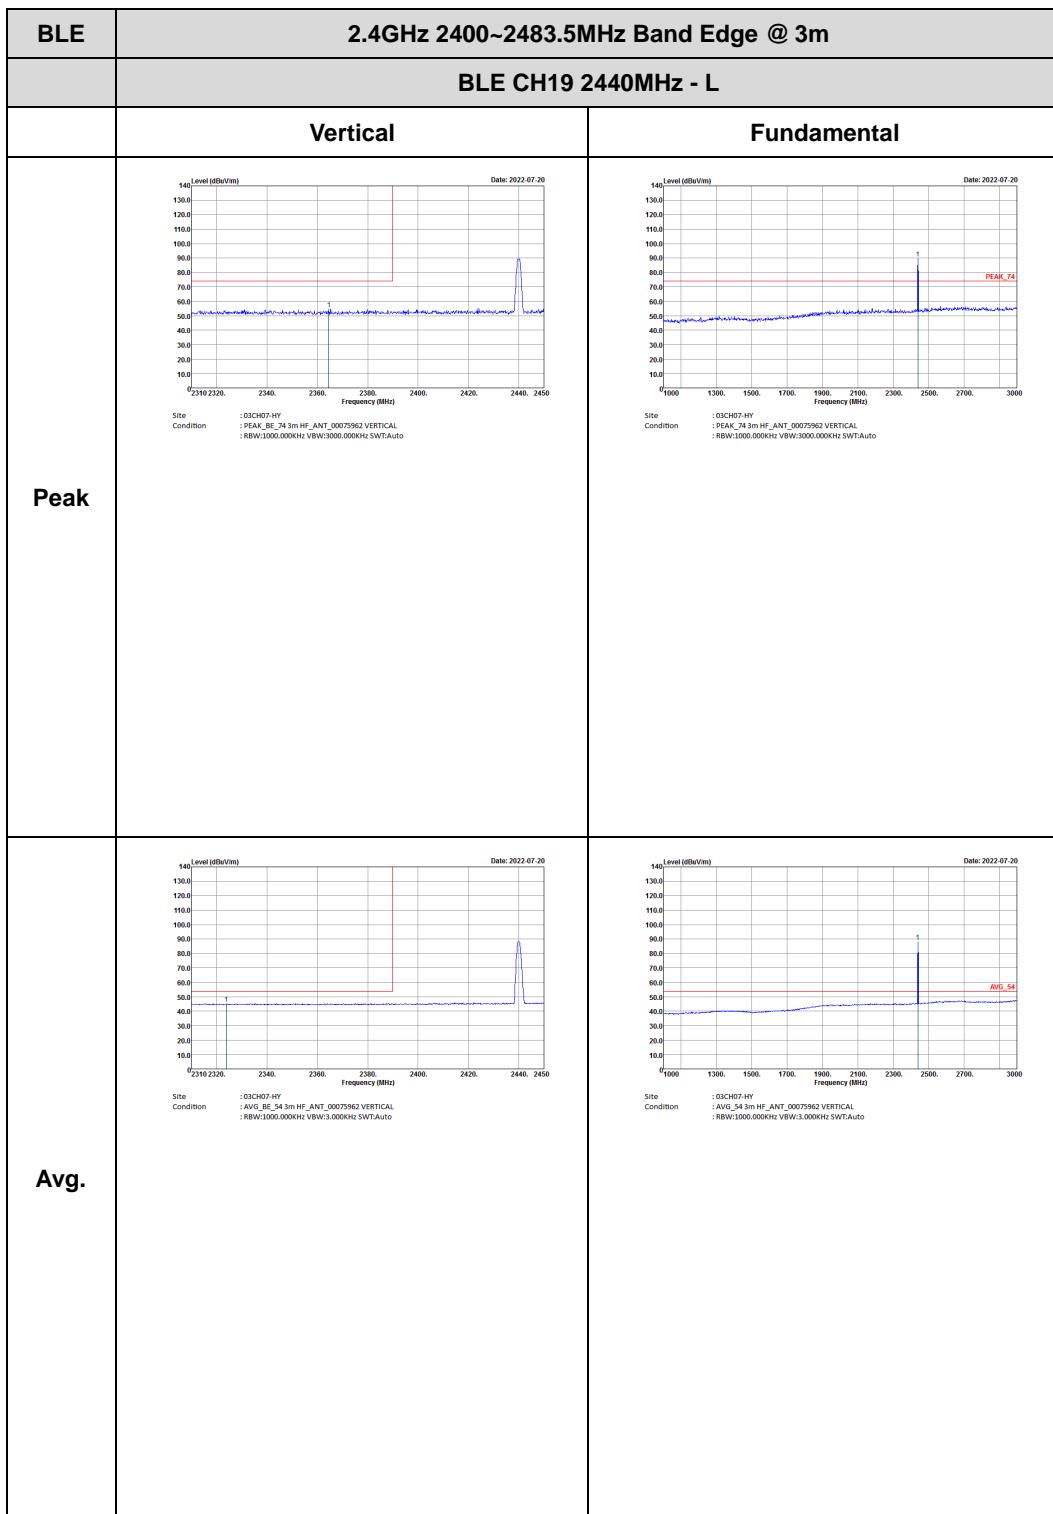

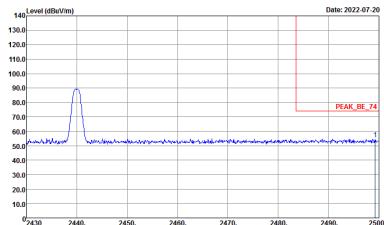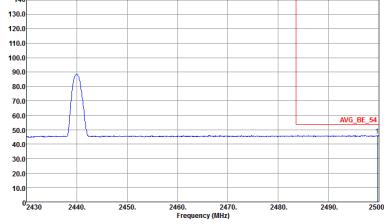

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-20</p> <p>PEAK_BE_74</p> <p>Site: 03CH07-HY Condition: PEAK_BE_74 3m HF, ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-20</p> <p>Avg_BE_54</p> <p>Site: 03CH07-HY Condition: AVG_BE_54 3m HF, ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

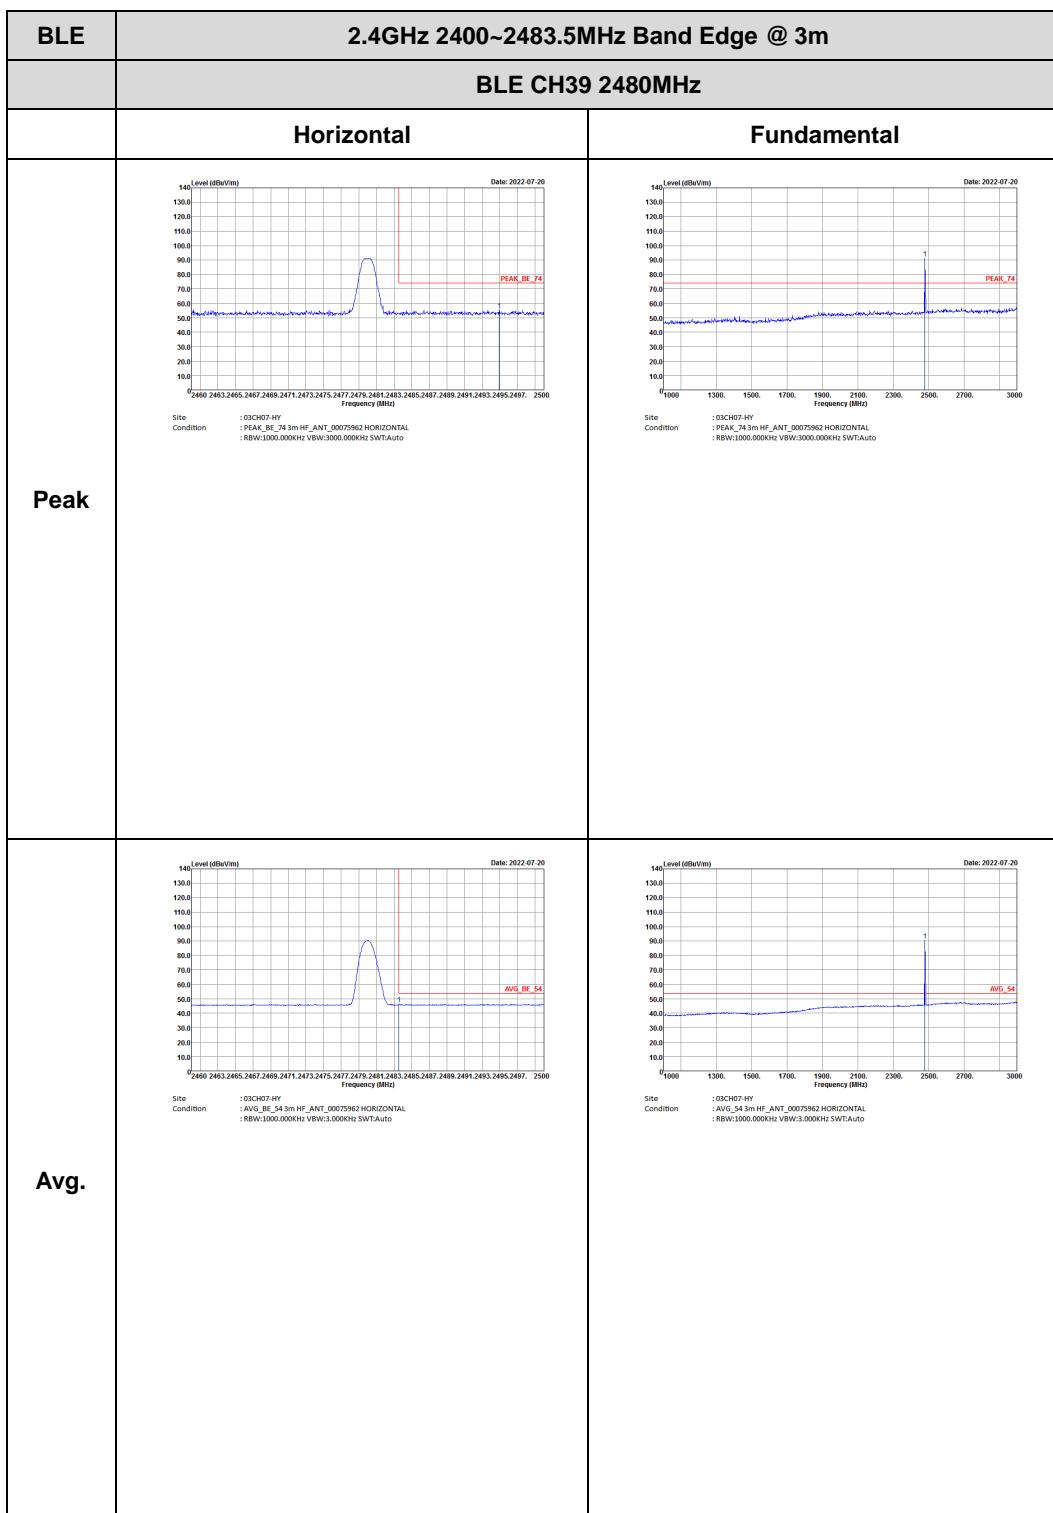


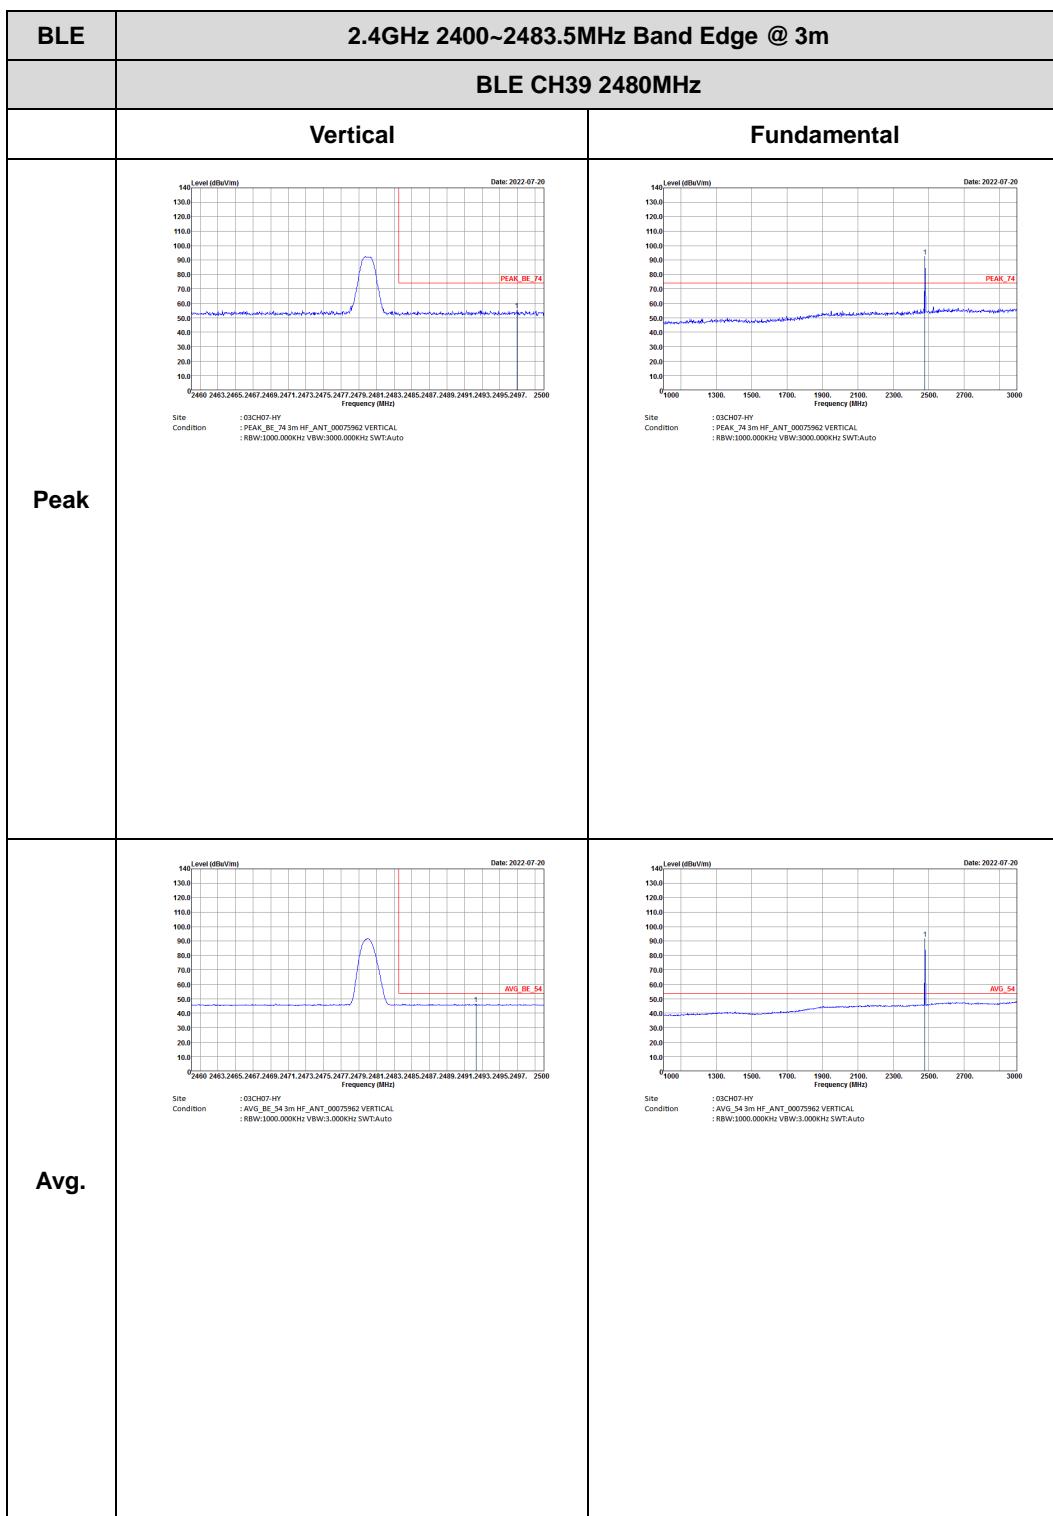





## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

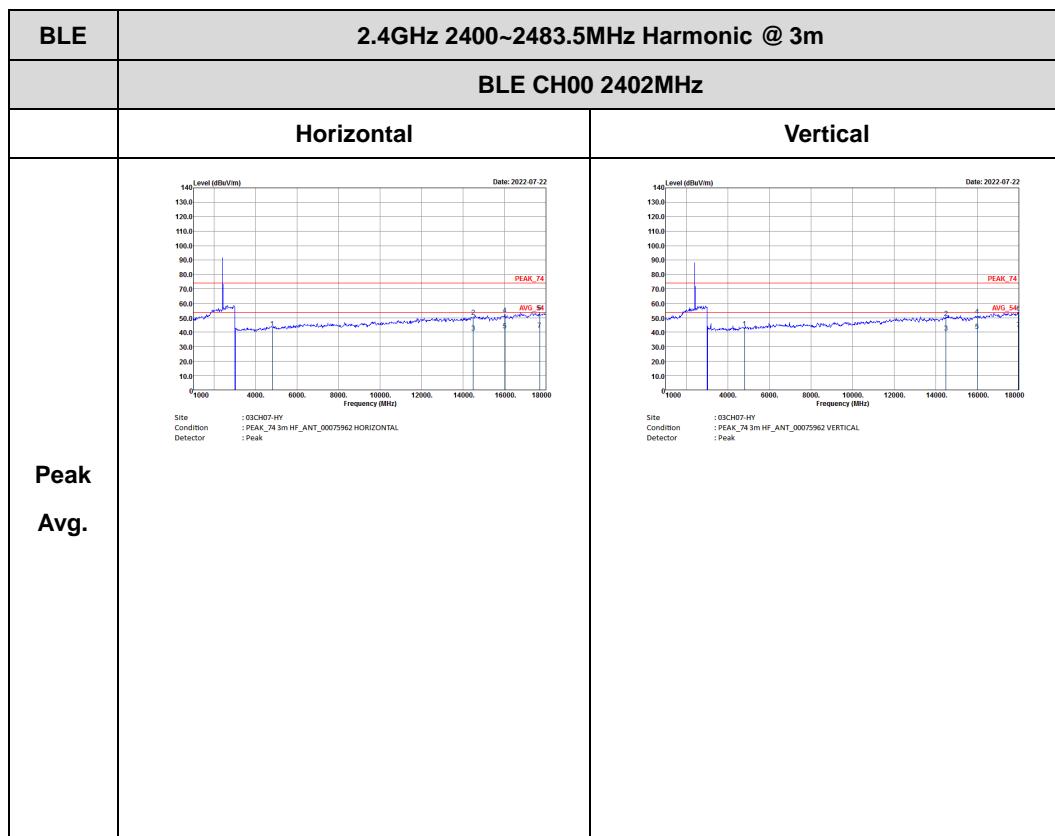

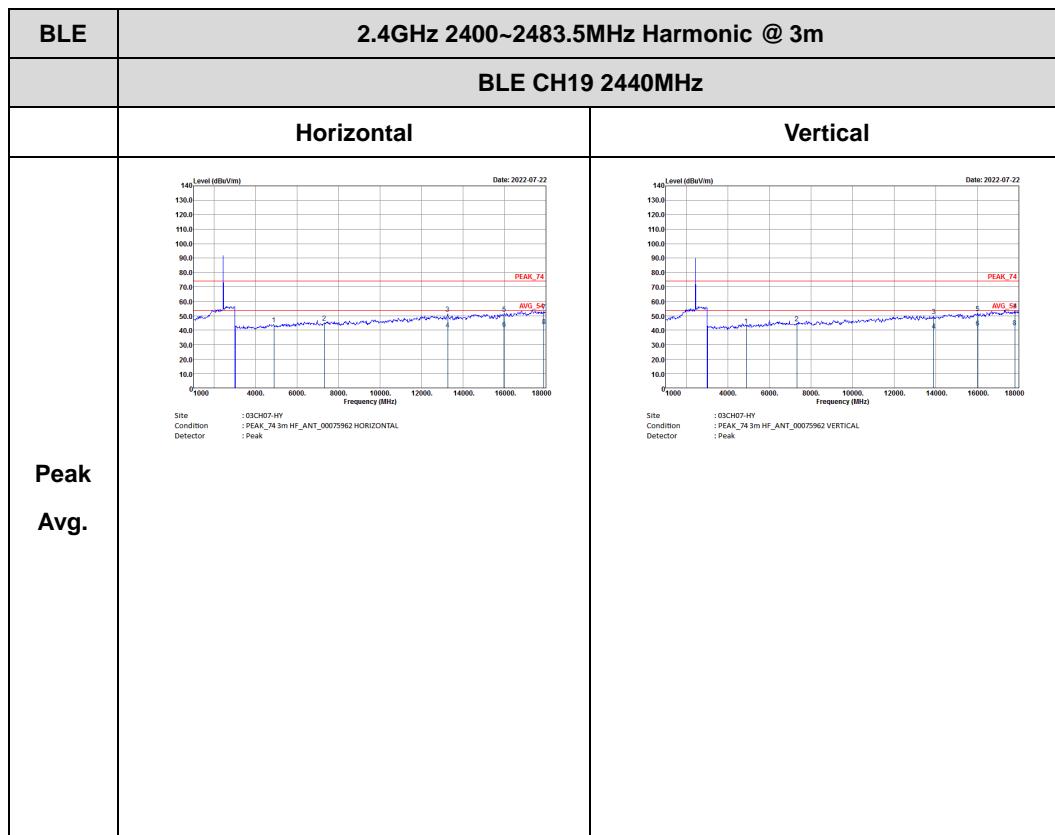

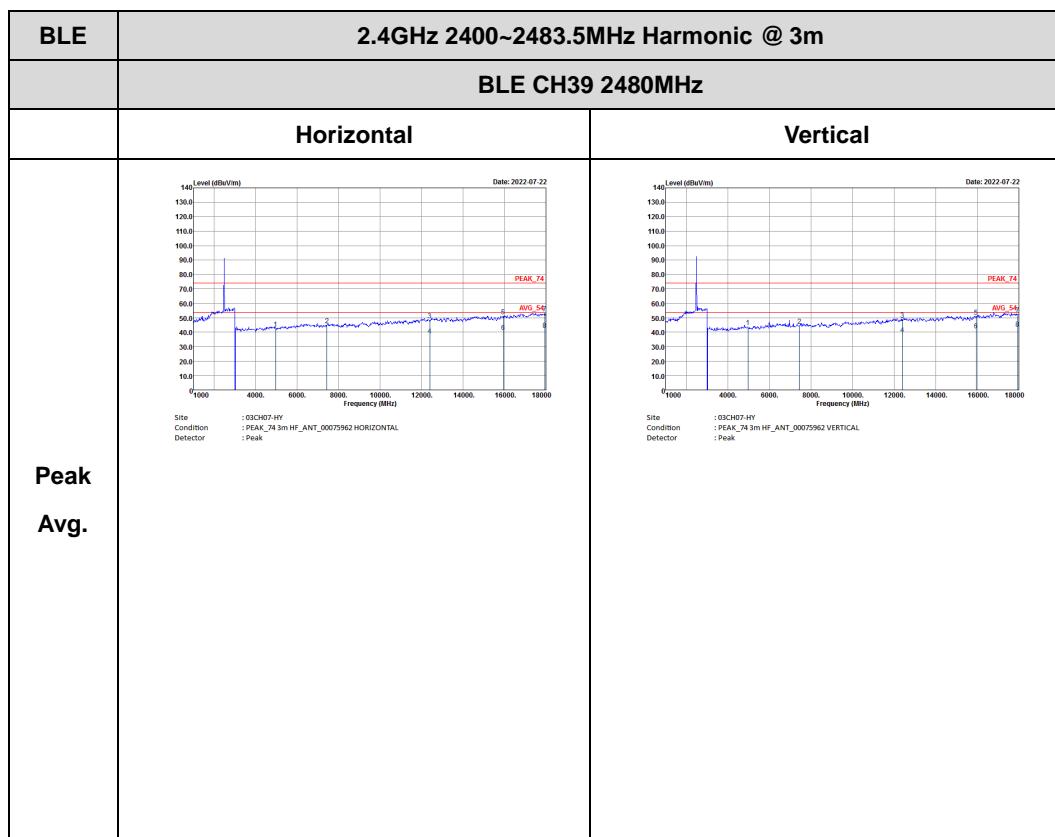






&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz



BLE (Band Edge @ 3m)

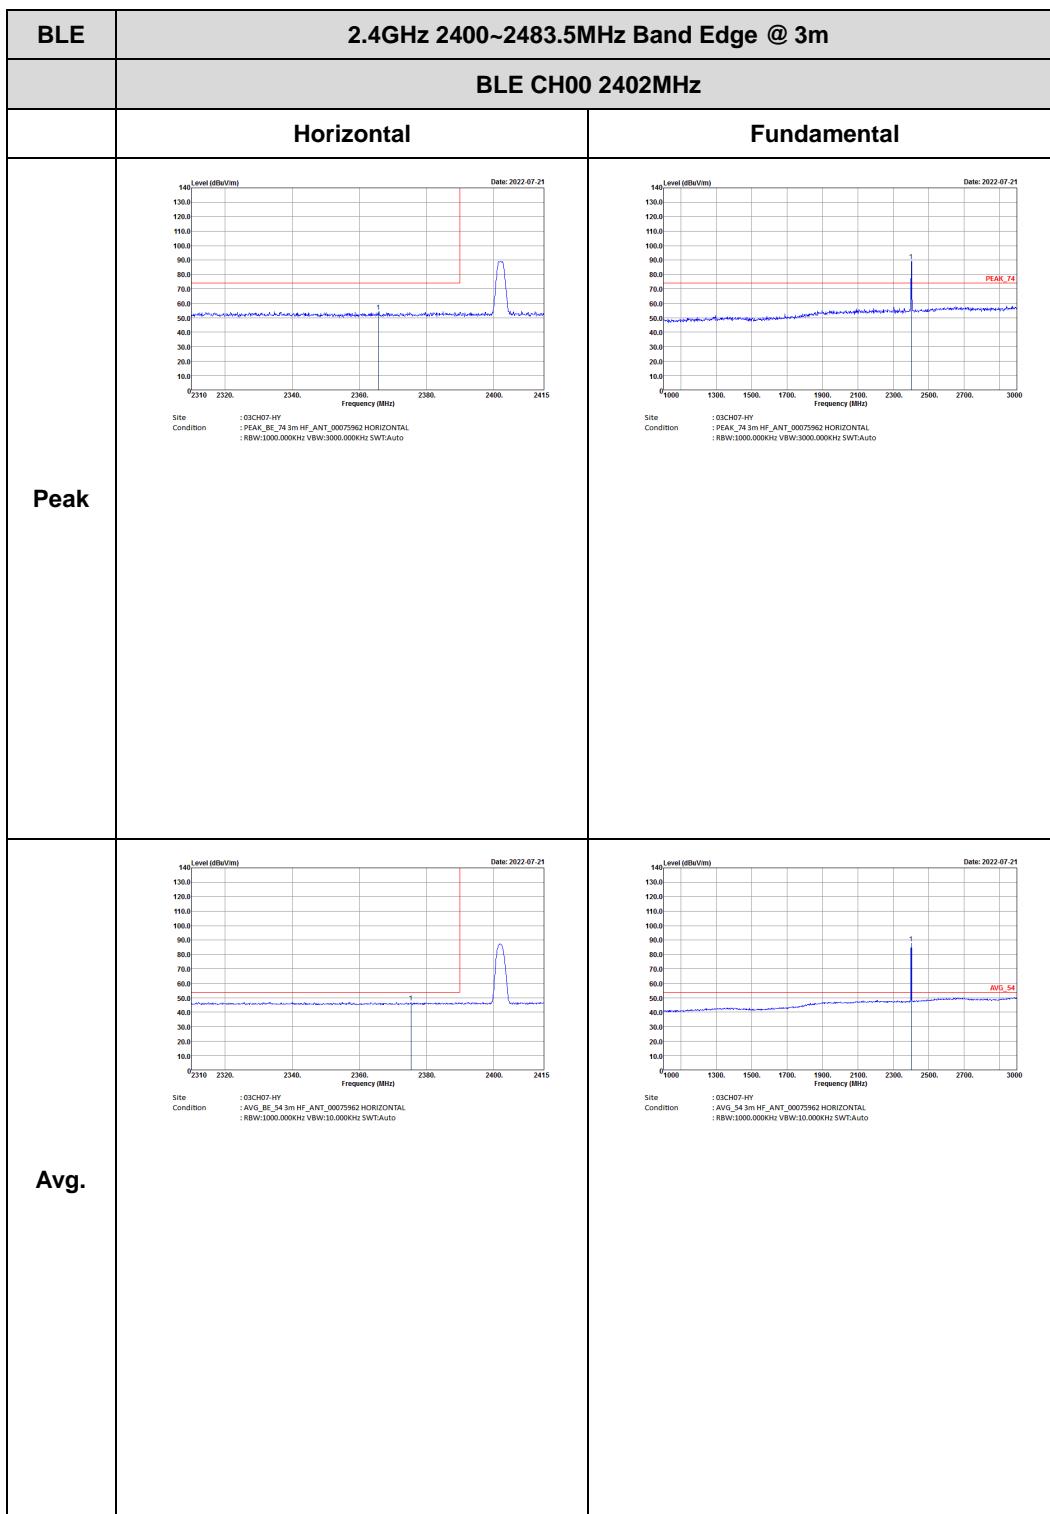


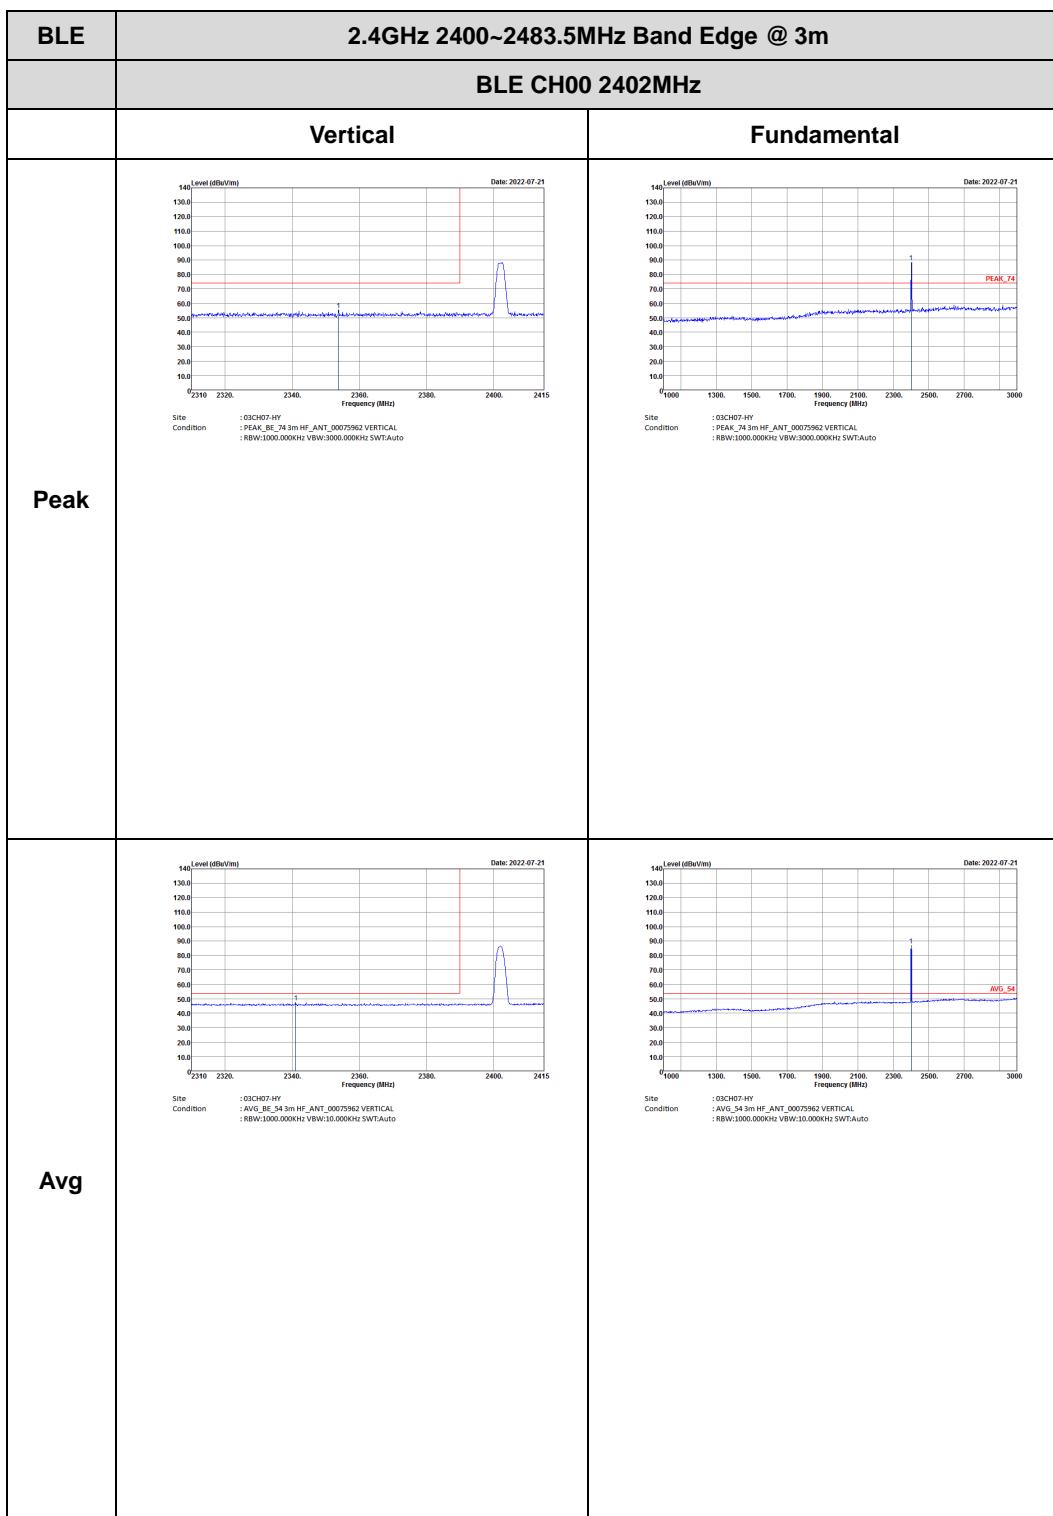


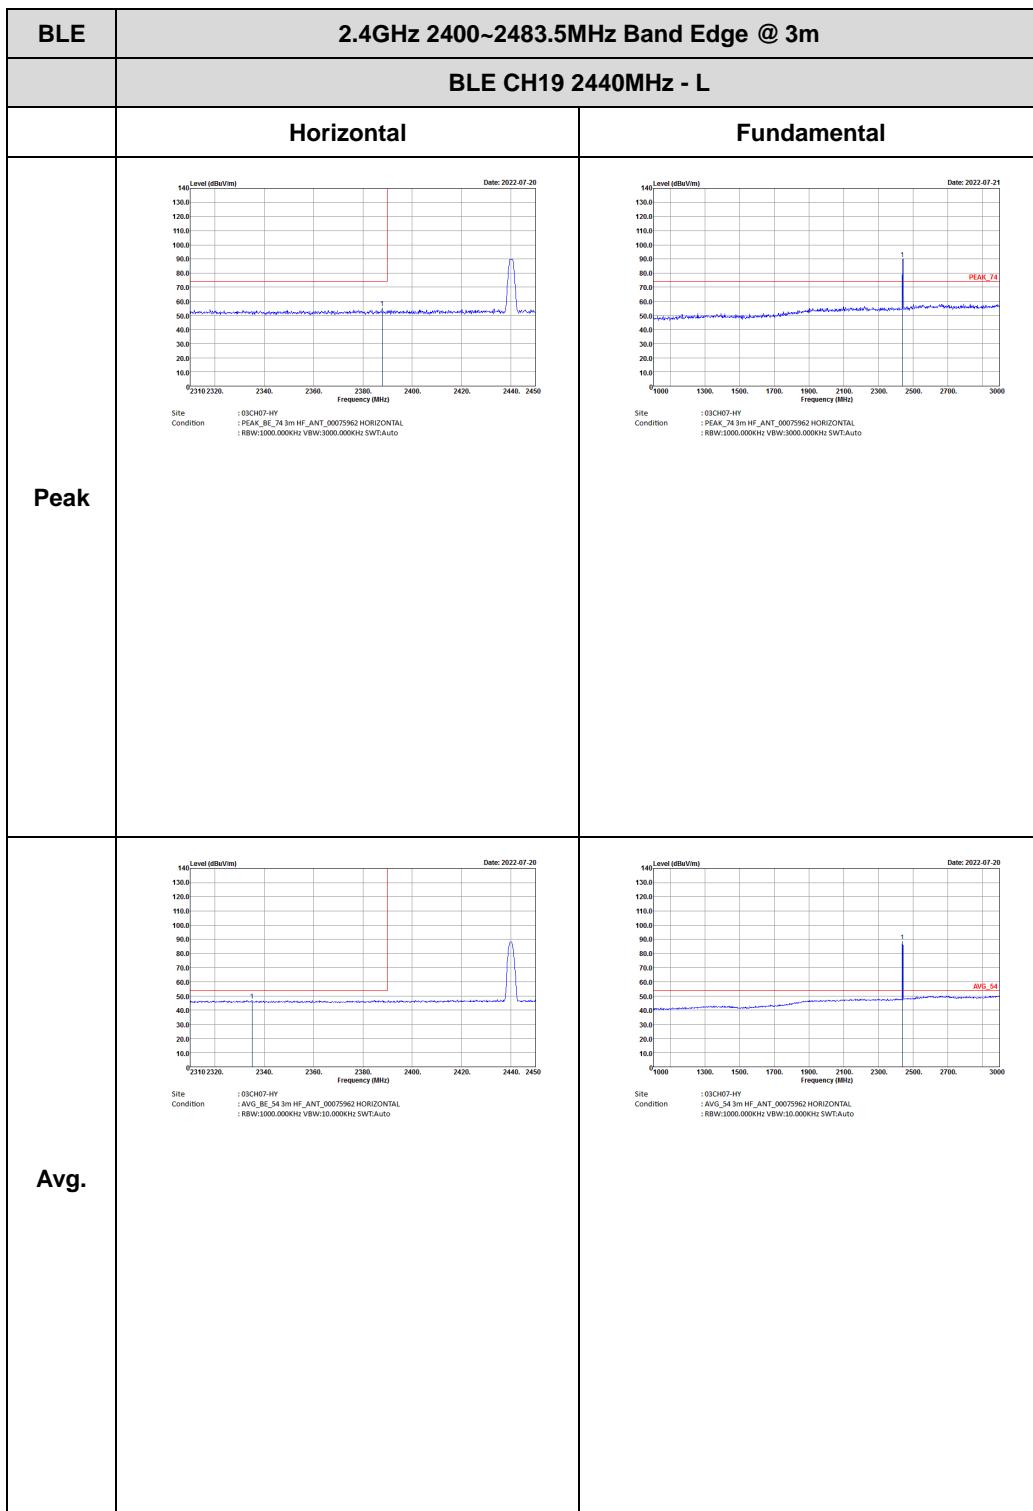


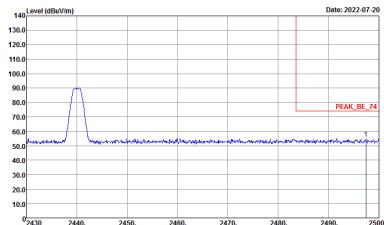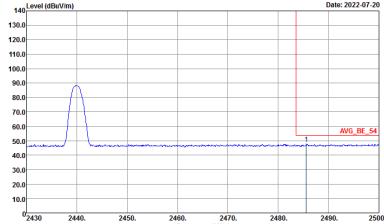



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-20</p> <p>PEAK_BE_74</p> <p>Site: 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-20</p> <p>Avg_BE_54</p> <p>Site: 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

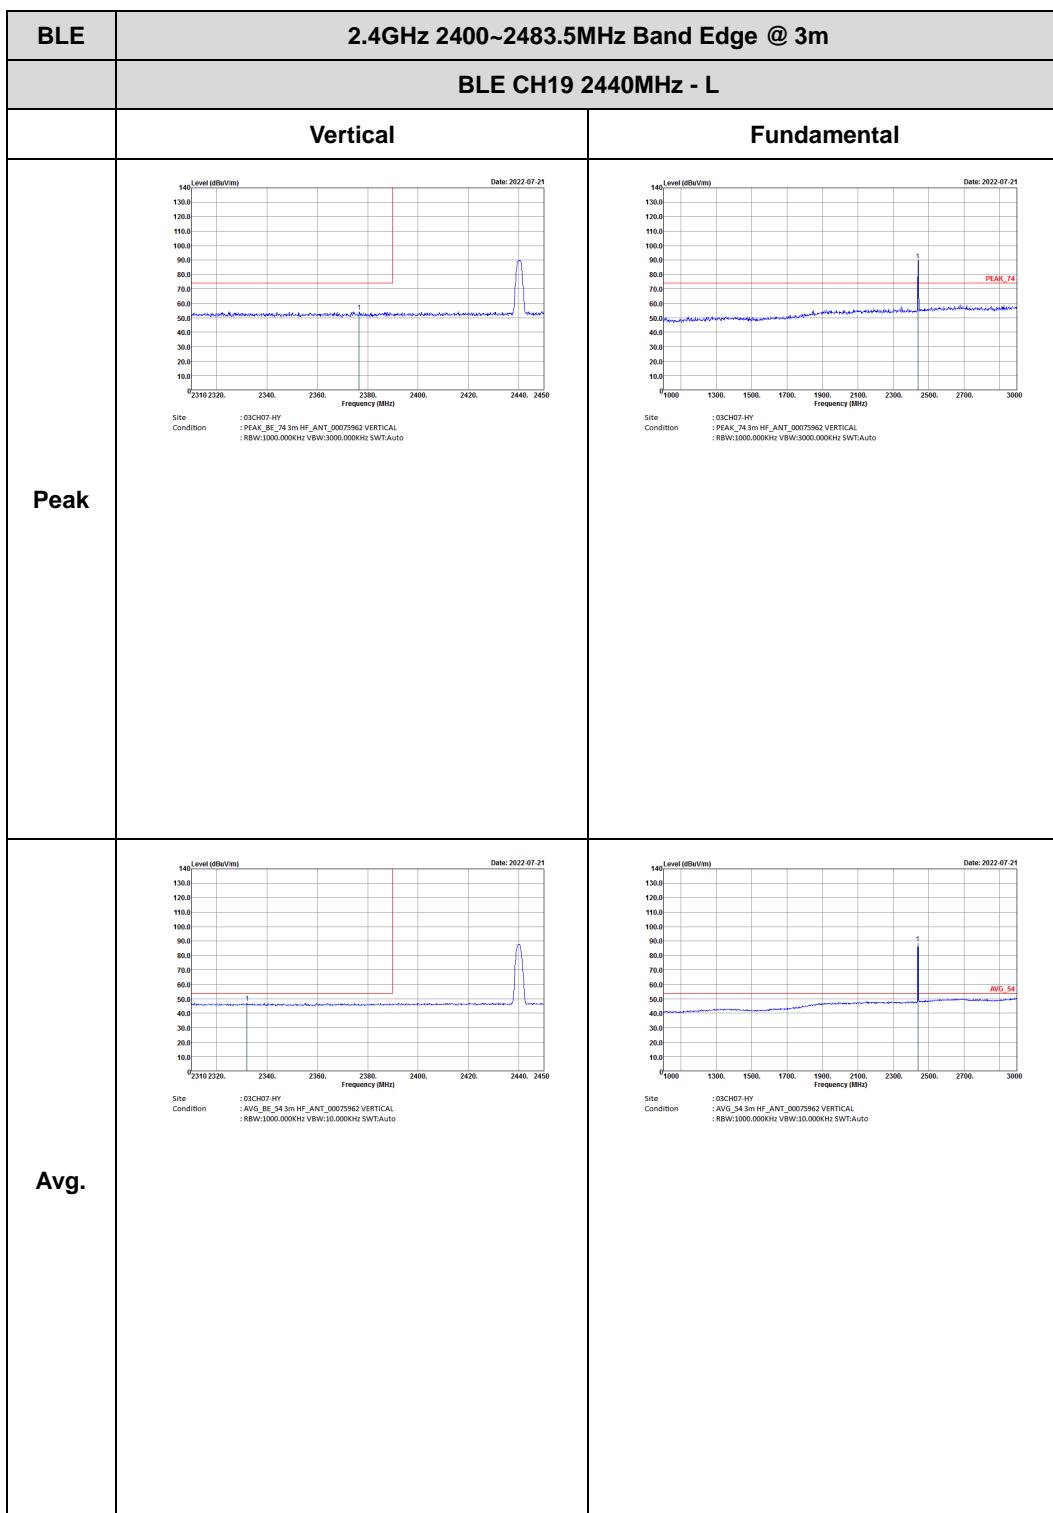

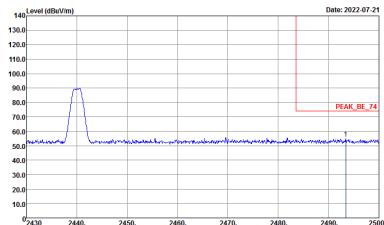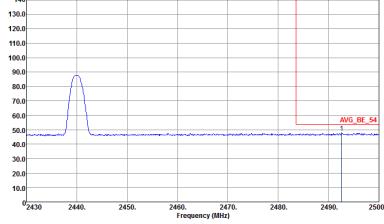

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-21</p> <p>PEAK_BE_74</p> <p>Site: 03CH07-HY Condition: PEAK_BE_74 3m HF, ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Date: 2022-07-21</p> <p>Avg_BE_54</p> <p>Site: 03CH07-HY Condition: AVG_BE_54 3m HF, ANT_00075962 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

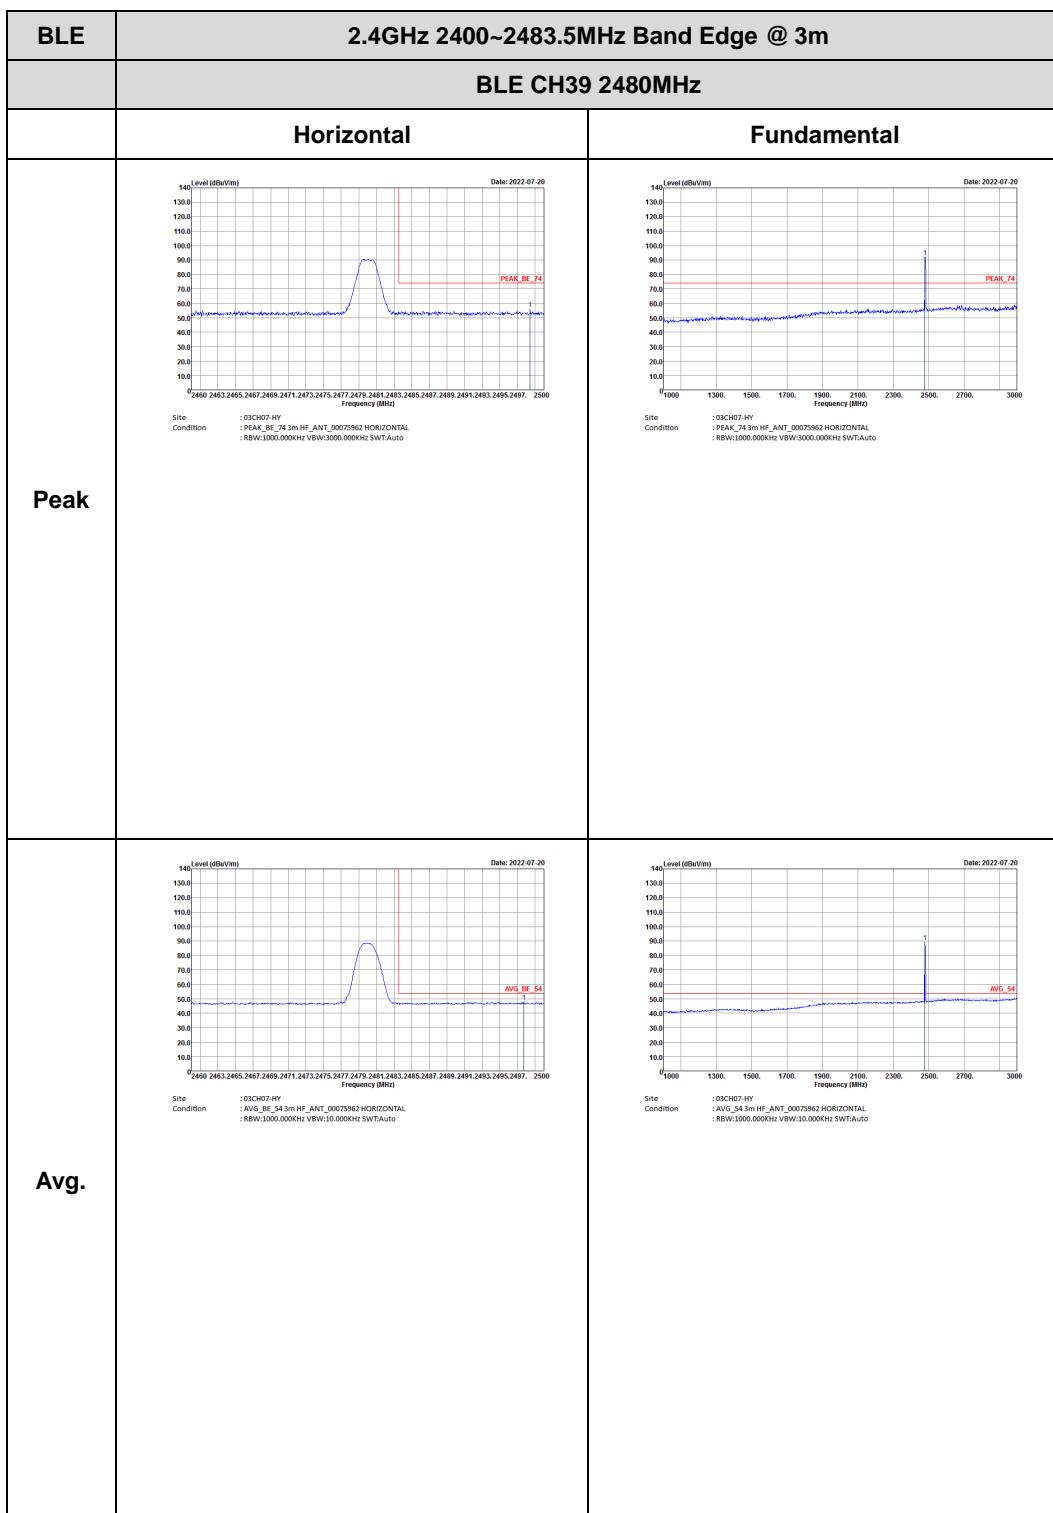


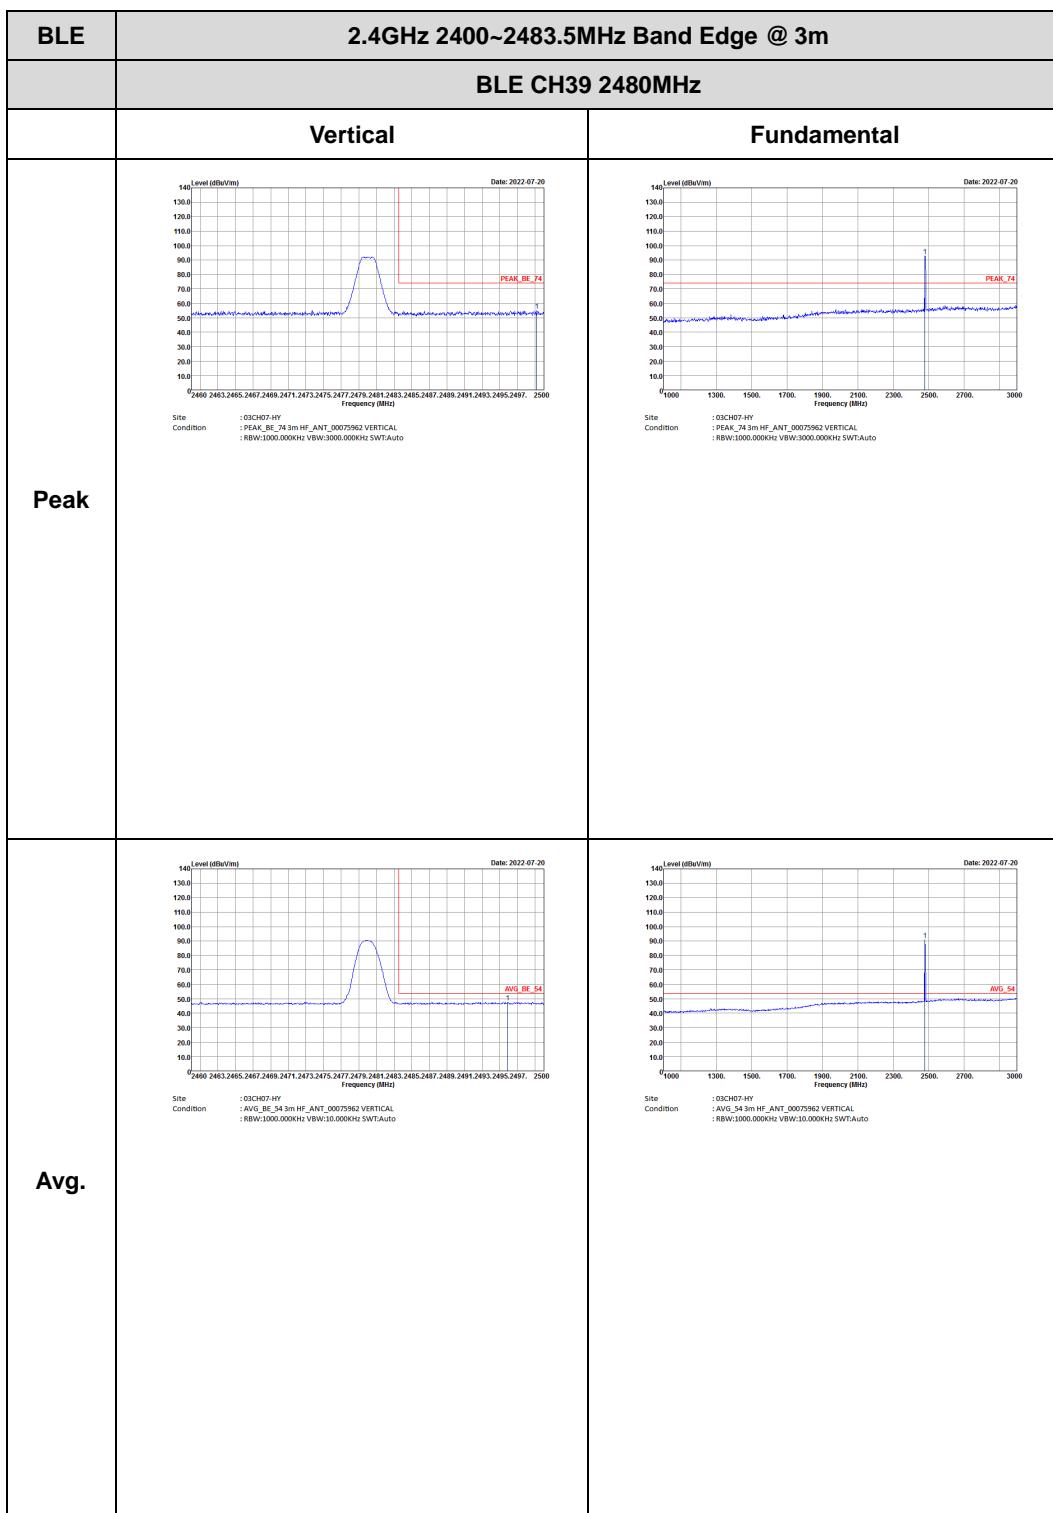





## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

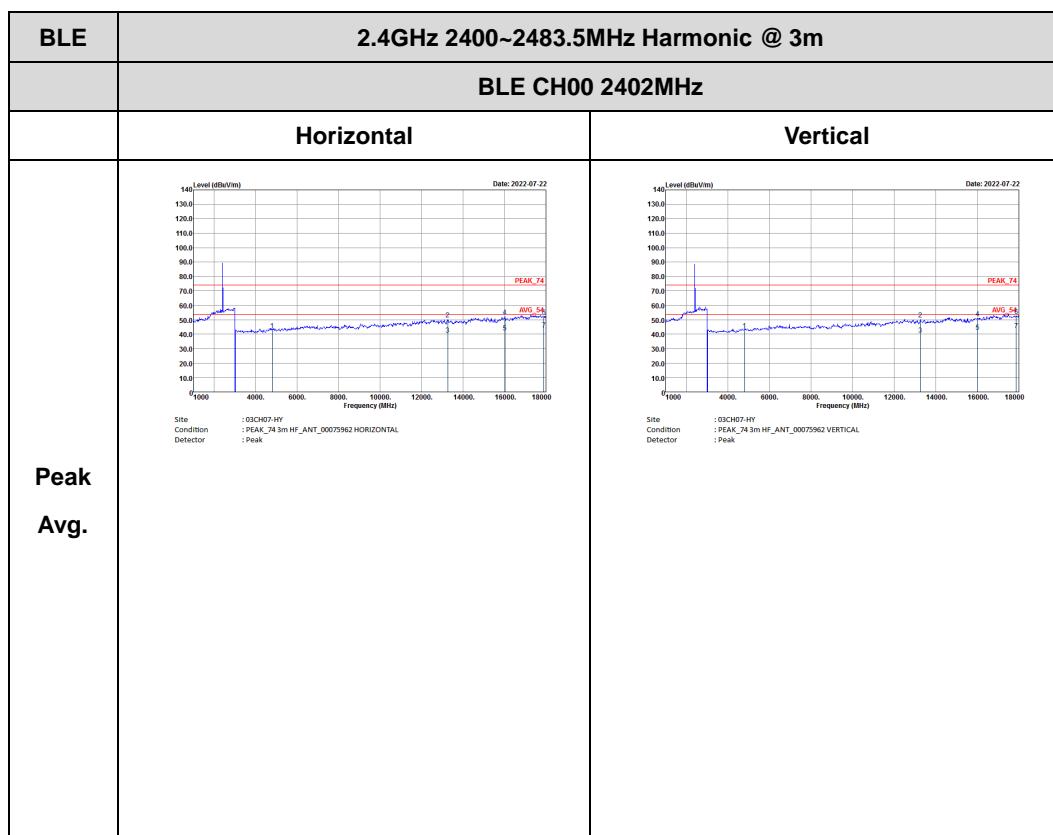

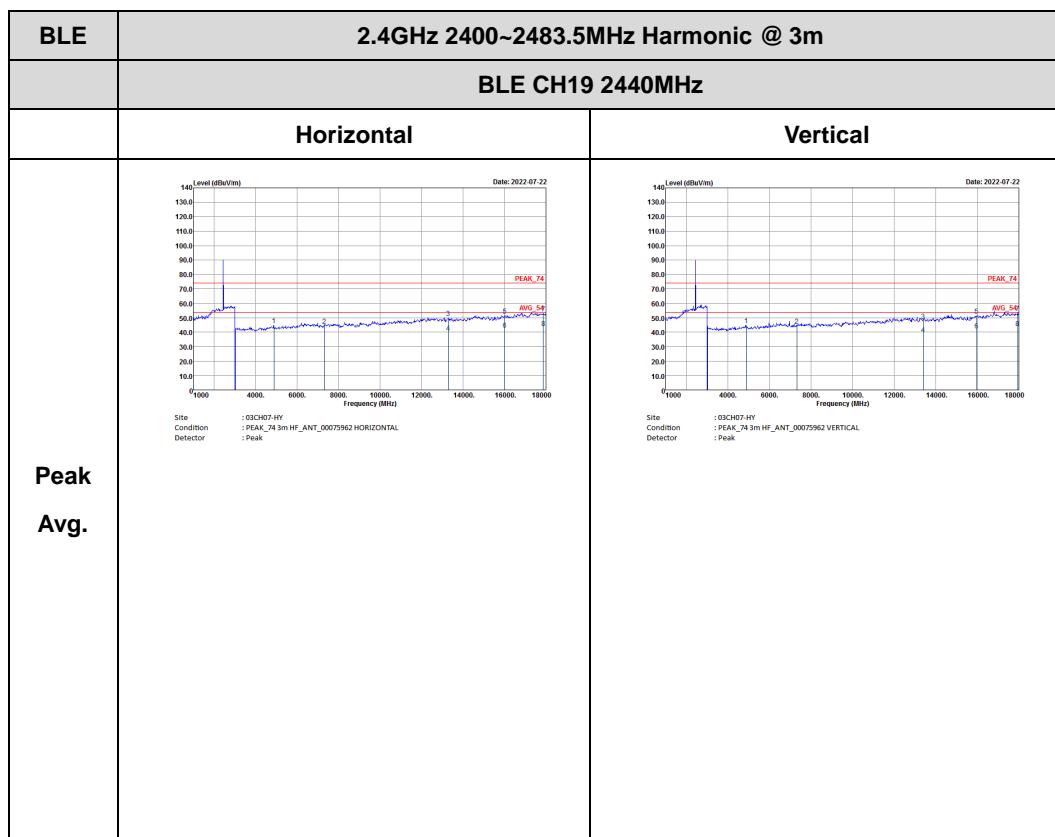


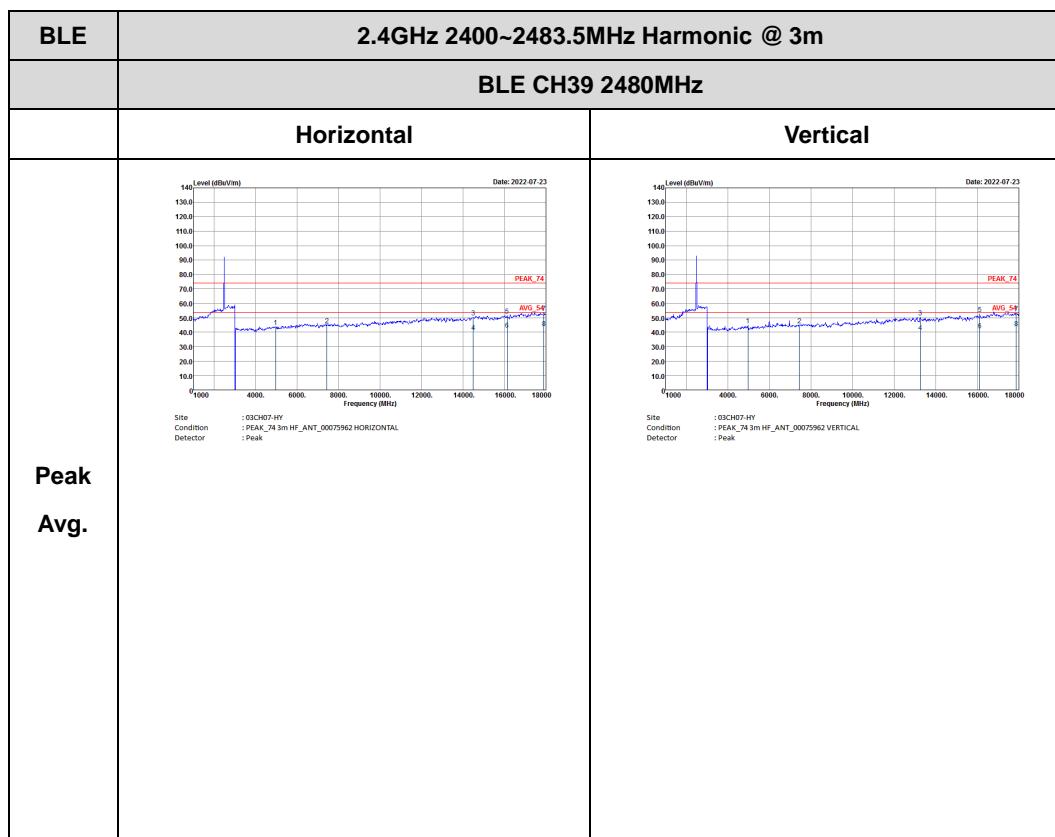



## Emission above 18GHz


## 2.4GHz BLE (SHF @ 1m)

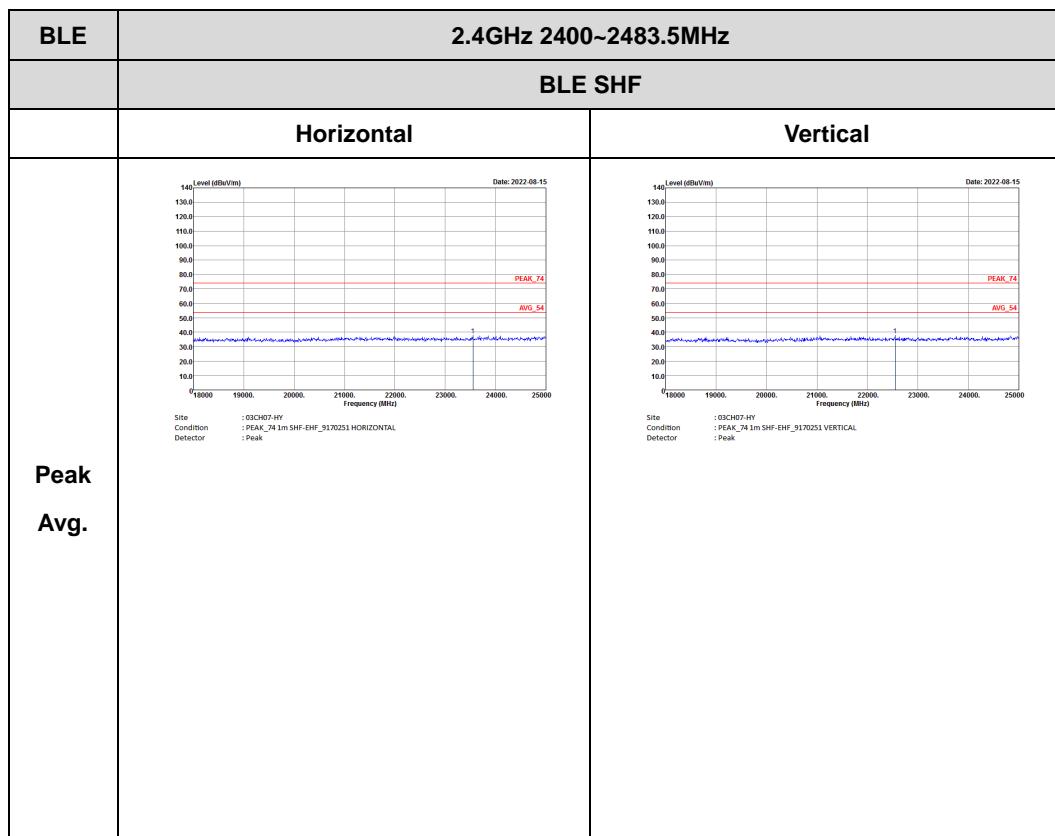



## Emission below 1GHz

## 2.4GHz BLE (LF)

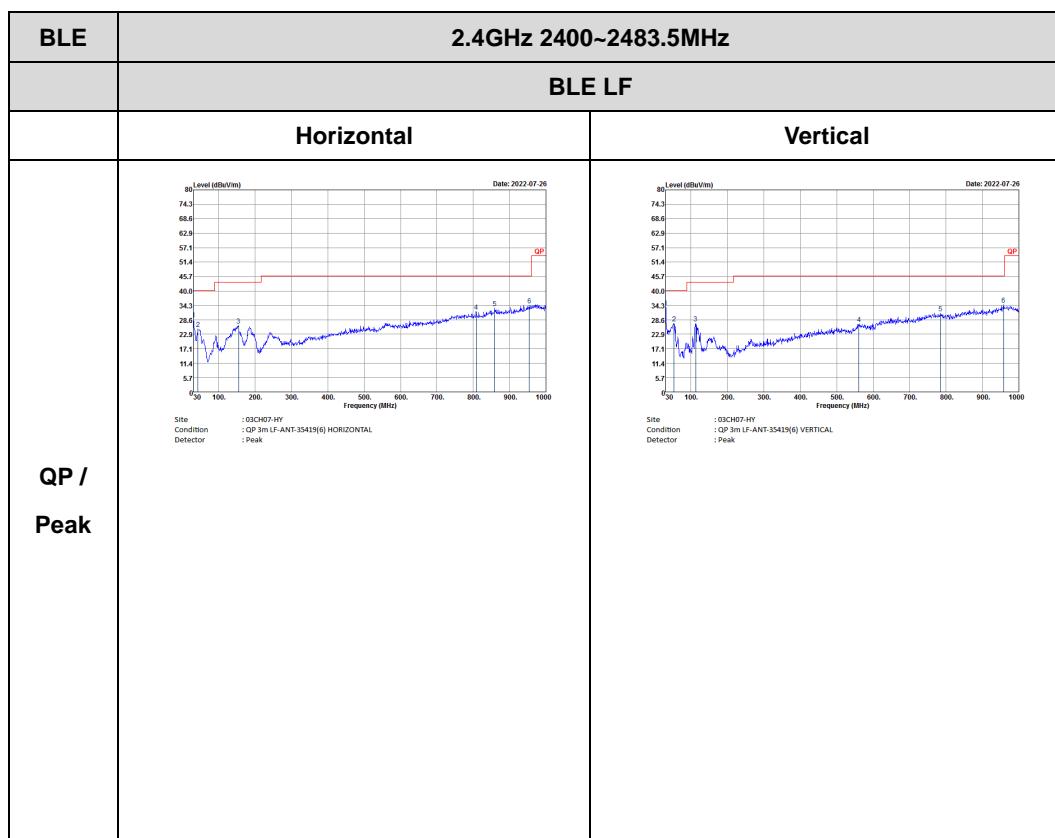



## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	62.62	392	2.55	3kHz
Bluetooth - LE for 2Mbps	33.01	207	4.83	10kHz

