

TEST REPORT

Reference No...... : WTH21X09102605W002
FCC ID : 2A7EI-EAX1805
Applicant : HUIZHOU MTN WEIYE TECHNOLOGY DEVELOPMENT CO.,LTD
Address : NO.2 Huitai Road,Huinan High-tech Industrial Park,Huiiao Avenue,Huizhou
City,Guangdong Province,China
Manufacturer : HUIZHOU MTN WEIYE TECHNOLOGY DEVELOPMENT CO.,LTD.
Address : NO.2 Huitai Road,Huinan High-tech Industrial Park,Huiiao Avenue,Huizhou
City,Guangdong Province,China
Product Name : WiFi 6 Range Extender
Model No...... : EAX1805
Standards : FCC Part 15.247
Date of Receipt sample : 2021-09-26
Date of Test..... : 2021-09-26 to 2022-05-25
Date of Issue : 2022-05-25
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE.....	12
3.2 EVALUATION INFORMATION	12
4. POWER SPECTRAL DENSITY	13
4.1 STANDARD APPLICABLE.....	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE.....	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
5. DTS BANDWIDTH.....	14
5.1 STANDARD APPLICABLE.....	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE.....	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. RF OUTPUT POWER	15
6.1 STANDARD APPLICABLE.....	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE.....	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
7.1 STANDARD APPLICABLE.....	16
7.2 TEST PROCEDURE.....	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
7.4 SUMMARY OF TEST RESULTS/PLOTS	18
8. OUT OF BAND EMISSIONS.....	27
8.1 STANDARD APPLICABLE.....	27
8.2 TEST PROCEDURE.....	27
8.3 SUMMARY OF TEST RESULTS/PLOTS	28
9. CONDUCTED EMISSIONS	41
9.1 TEST PROCEDURE.....	41
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	41
9.3 TEST RECEIVER SETUP	41
9.4 SUMMARY OF TEST RESULTS/PLOTS	41
APPENDIX SUMMARY	44
APPENDIX A.....	45
APPENDIX B.....	58
APPENDIX C.....	71
APPENDIX D.....	84
APPENDIX PHOTOGRAPHS.....	109

Report version

Version No.	Date of issue	Description
Rev.00	2022-05-25	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	WiFi 6 Range Extender
Trade Name:	MTN
Model No.:	EAX1805
Adding Model(s):	/
Rated Voltage:	AC120V/60Hz
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n, 802.11ax
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2412-2462MHz for 802.11ax(HE20) 2422-2452MHz for 802.11n(HT40) 2422-2452MHz for 802.11ax(HE40)
RF Output Power:	Antenna 1: 18.36dBm (Conducted) Antenna 2: 18.65dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 11 for 802.11ax(HE20); 7 for 802.11n(HT40); 7 for 802.11ax(HE40);
Channel Separation:	5MHz
Type of Antenna:	External Antenna
Antenna Gain:	3dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz
TM5	802.11ax-HE20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM6	802.11ax-HE40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test	Rohde &	ESVB	825471/005	2021-03-27	2022-03-26

	Receiver	Schwarz				
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2021-03-27	2022-03-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27

	Broadband Antenna					
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

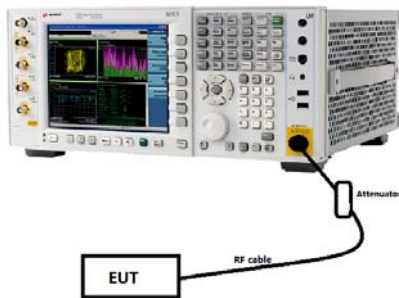
This product has two External antennas, fulfill the requirement of this section. And the signals at the antennas are completely uncorrelated. The product transmits signals through Spatial Multiplexing MIMO (SM-MIMO) mode.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram



4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots

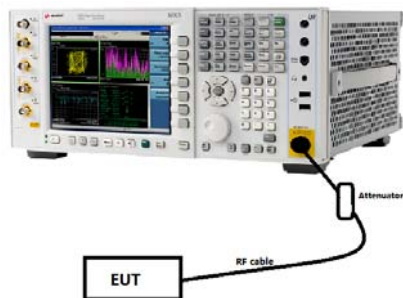
Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram



5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots

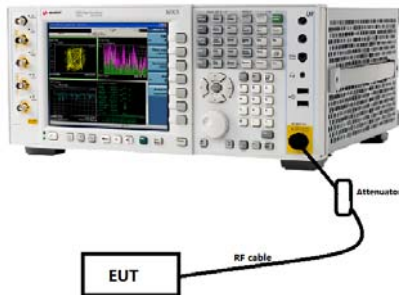
Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram



6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

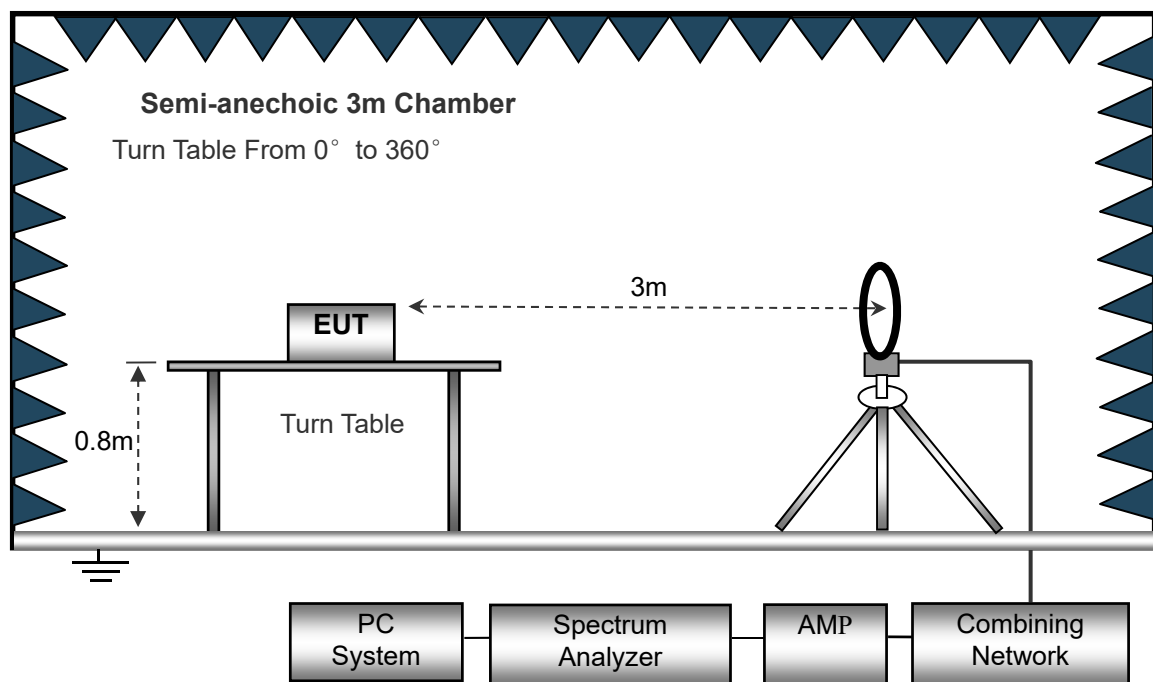
7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



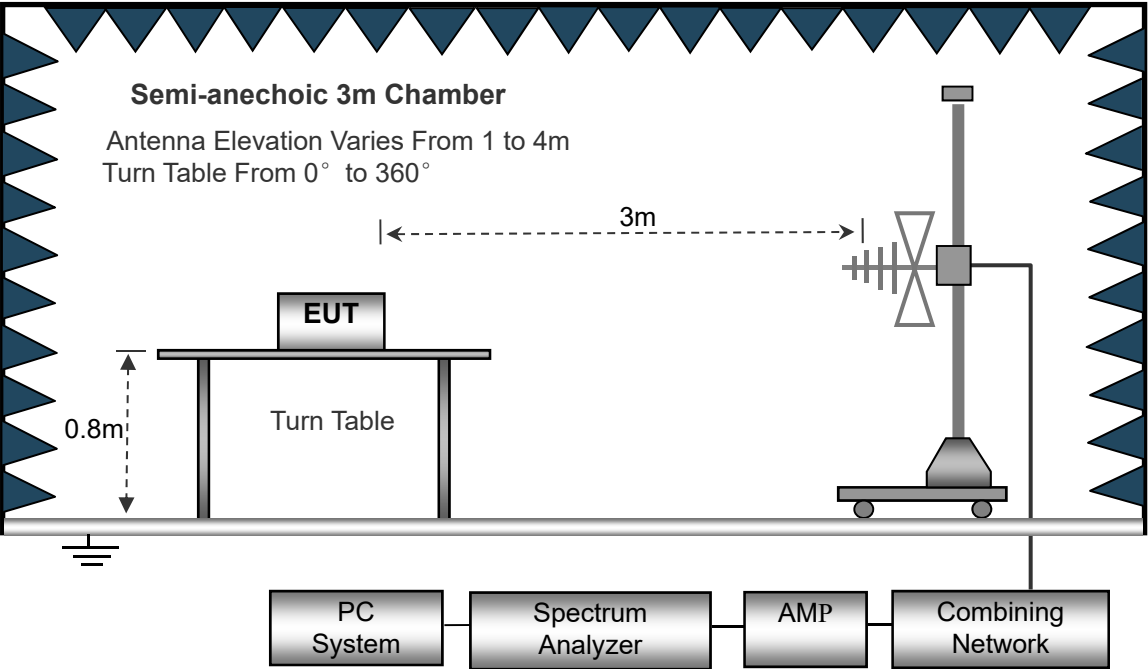The test setup for emission measurement from 30MHz to 1GHz.



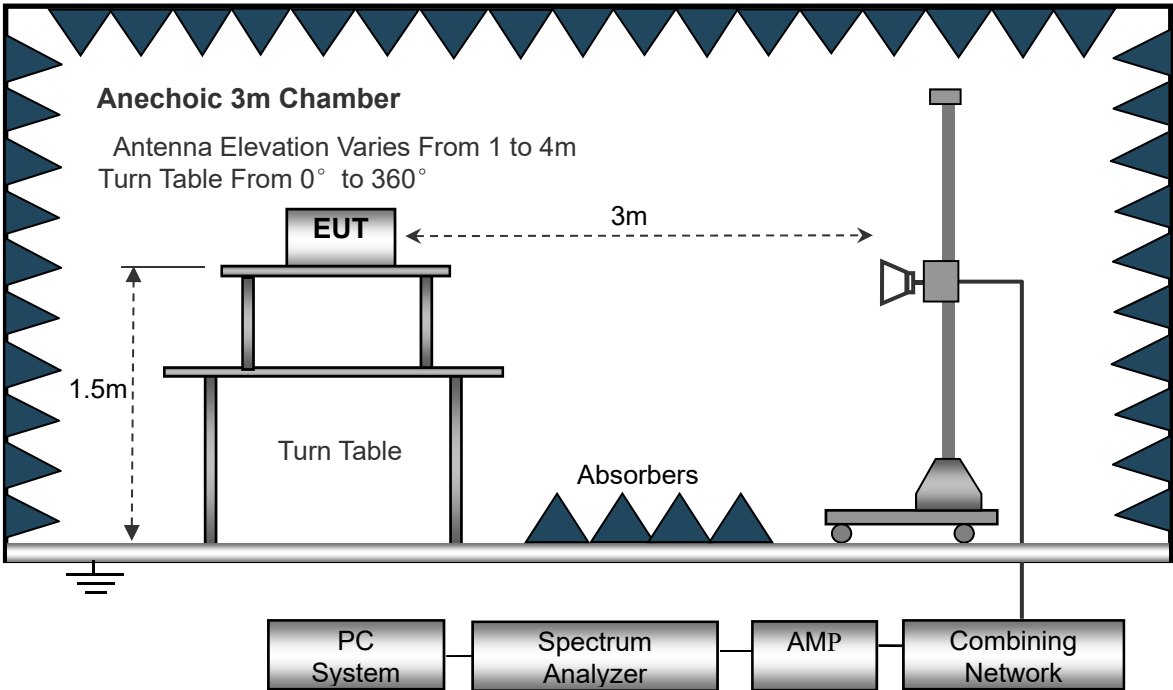The test setup for emission measurement above 1GHz.



Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


- Spurious Emissions Below 1GHz
- Worst case Antenna 1

802.11b_11Mbps (worst case)			
Test Channel	Low	Polarity:	Horizontal

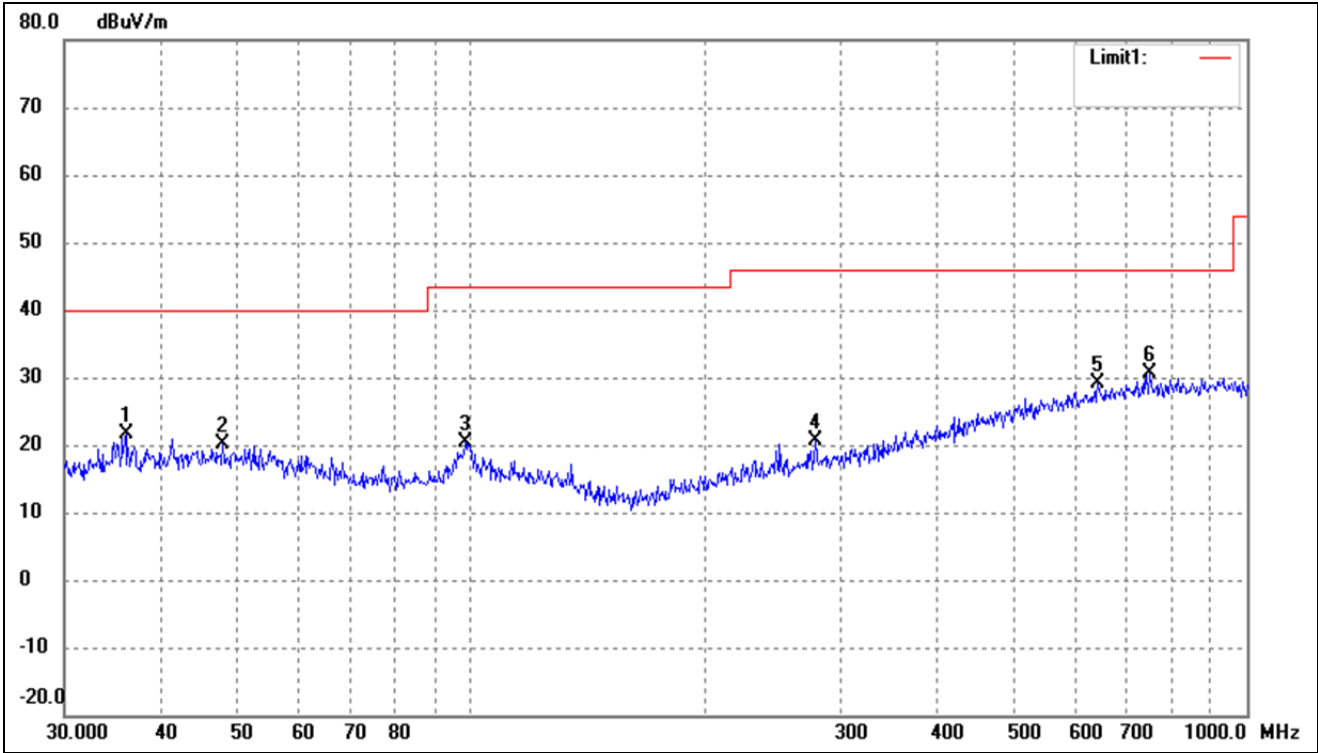


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.0007	29.49	-7.98	21.51	40.00	-18.49	-	-	peak
2	47.9940	27.04	-6.97	20.07	40.00	-19.93	-	-	peak
3	98.4866	29.30	-9.01	20.29	43.50	-23.21	-	-	peak
4	278.0669	28.20	-7.55	20.65	46.00	-25.35	-	-	peak
5	642.8613	28.19	0.84	29.03	46.00	-16.97	-	-	peak
6	750.1083	28.81	1.76	30.57	46.00	-15.43	-	-	peak

802.11b_11Mbps (worst case)			
Test Channel	Low	Polarity:	Vertical

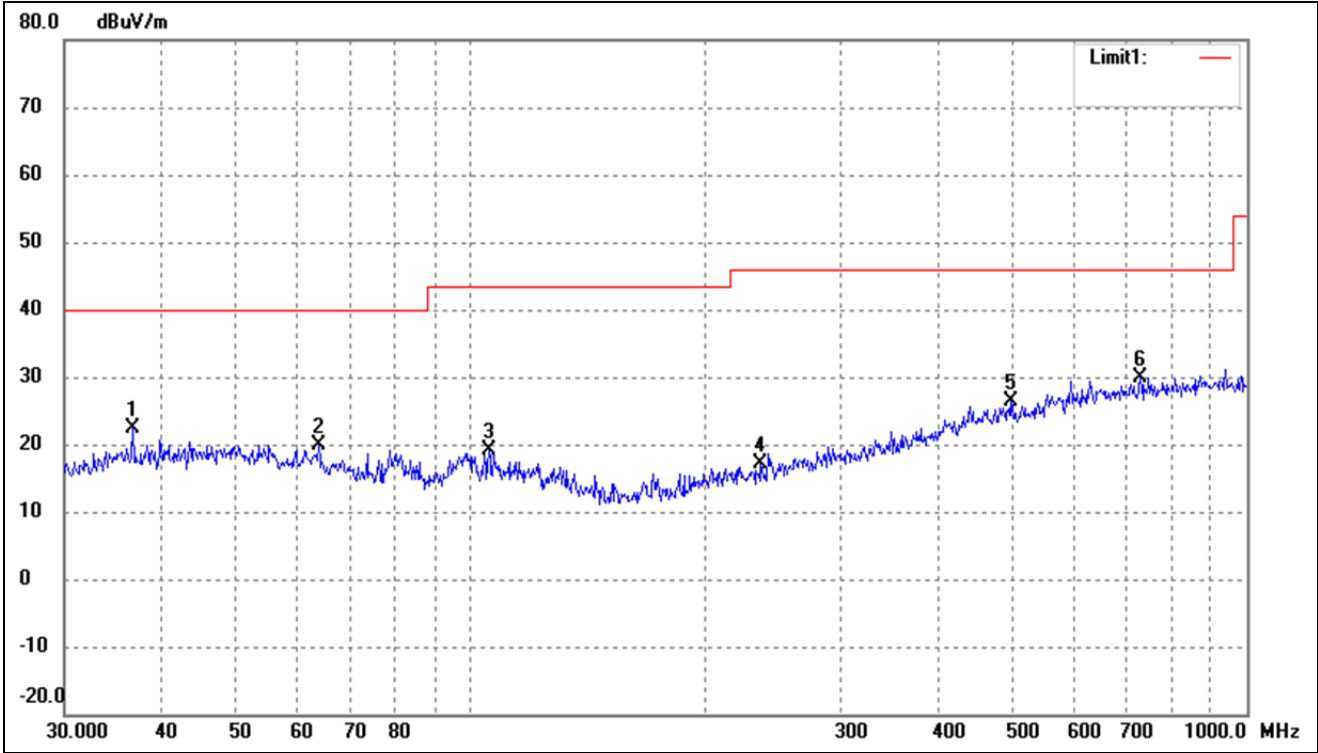


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7662	30.22	-7.79	22.43	40.00	-17.57	-	-	peak
2	63.7588	29.07	-9.08	19.99	40.00	-20.01	-	-	peak
3	105.6415	27.89	-8.80	19.09	43.50	-24.41	-	-	peak
4	236.6447	25.74	-8.68	17.06	46.00	-28.94	-	-	peak
5	495.9344	27.67	-1.40	26.27	46.00	-19.73	-	-	peak
6	729.3583	28.25	1.63	29.88	46.00	-16.12	-	-	peak

802.11b_11Mbps (worst case)			
Test Channel	Middle	Polarity:	Horizontal

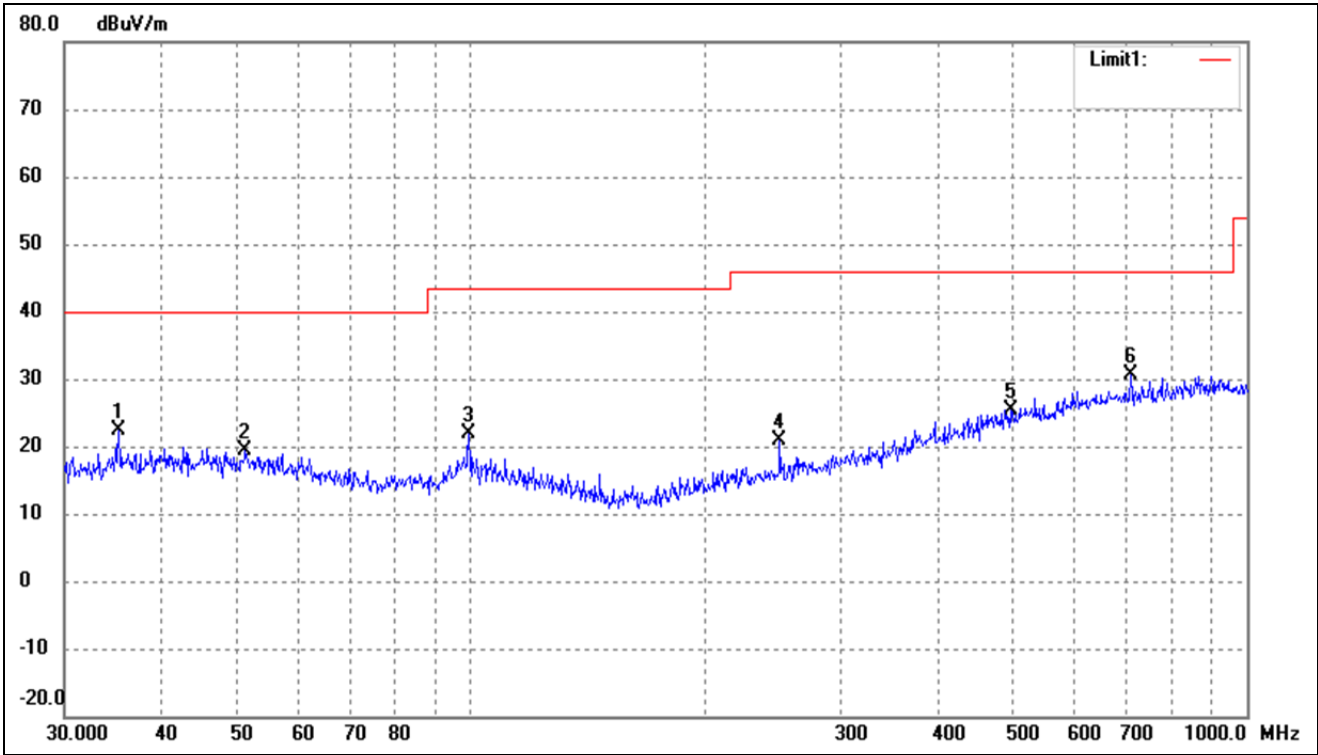


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.2512	30.63	-8.16	22.47	40.00	-17.53	-	-	peak
2	51.3005	26.56	-7.15	19.41	40.00	-20.59	-	-	peak
3	99.5281	30.65	-8.81	21.84	43.50	-21.66	-	-	peak
4	250.3012	29.28	-8.31	20.97	46.00	-25.03	-	-	peak
5	495.9344	26.69	-1.40	25.29	46.00	-20.71	-	-	peak
6	709.1823	29.06	1.48	30.54	46.00	-15.46	-	-	peak

802.11b_11Mbps (worst case)			
Test Channel	Middle	Polarity:	Vertical

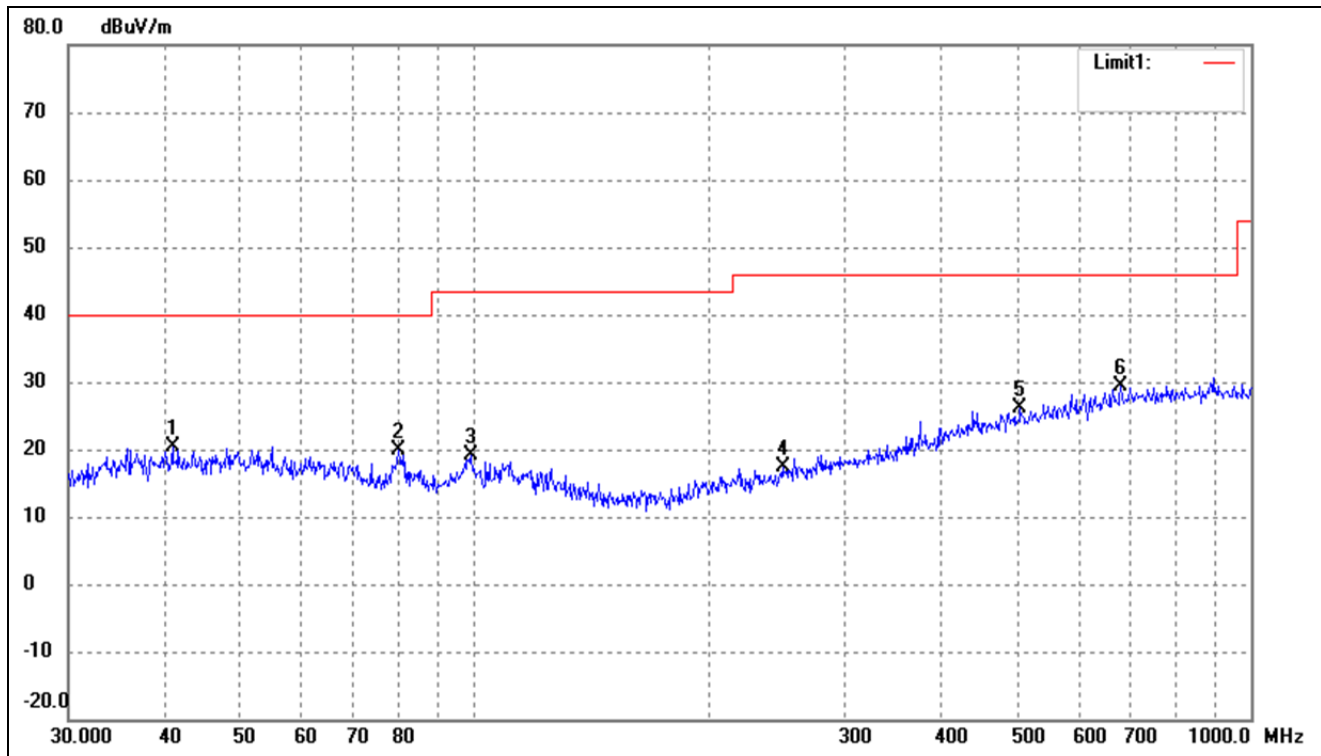


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.8446	27.34	-7.00	20.34	40.00	-19.66	-	-	peak
2	79.8003	30.69	-10.71	19.98	40.00	-20.02	-	-	peak
3	98.8326	28.08	-8.94	19.14	43.50	-24.36	-	-	peak
4	249.4250	25.78	-8.32	17.46	46.00	-28.54	-	-	peak
5	504.7062	27.23	-1.22	26.01	46.00	-19.99	-	-	peak
6	679.9600	28.07	1.23	29.30	46.00	-16.70	-	-	peak

802.11b_11Mbps (worst case)			
Test Channel	High	Polarity:	Horizontal

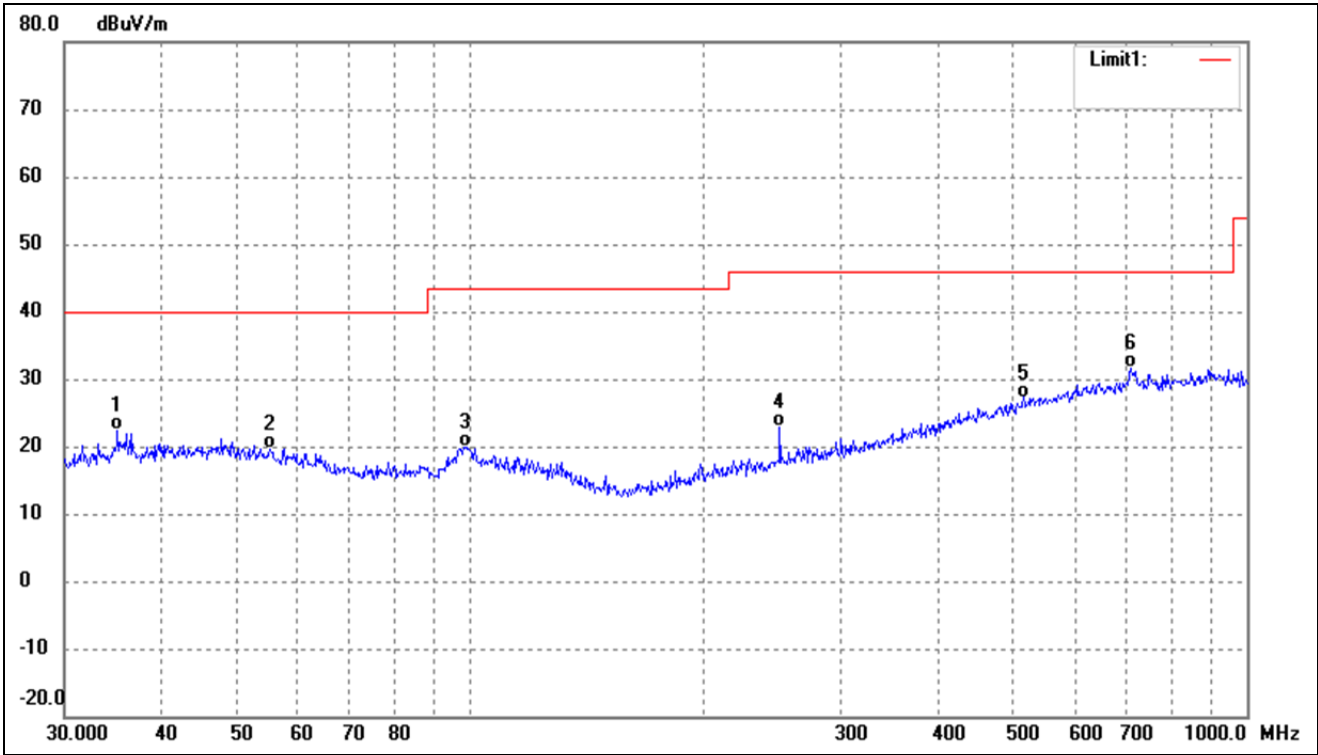

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.1278	30.46	-8.19	22.27	40.00	-17.73	-	-	QP
2	55.2207	27.47	-7.73	19.74	40.00	-20.26	-	-	QP
3	98.4866	28.91	-9.01	19.90	43.50	-23.60	-	-	QP
4	250.3012	31.29	-8.31	22.98	46.00	-23.02	-	-	QP
5	515.4374	28.29	-1.04	27.25	46.00	-18.75	-	-	QP
6	709.1823	30.13	1.48	31.61	46.00	-14.39	-	-	QP

802.11b_11Mbps (worst case)			
Test Channel	High	Polarity:	Vertical

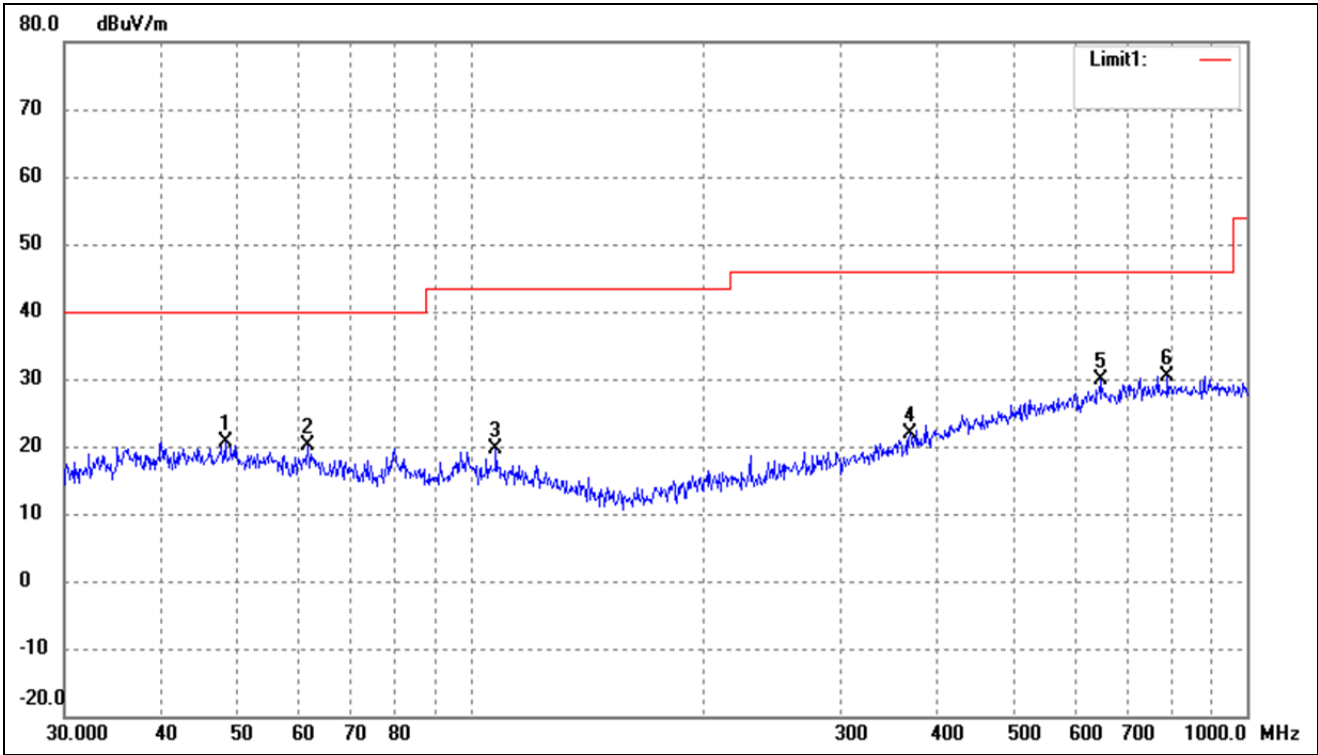

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.3318	27.68	-6.96	20.72	40.00	-19.28	-	-	peak
2	61.7781	28.95	-8.74	20.21	40.00	-19.79	-	-	peak
3	107.8877	28.35	-8.84	19.51	43.50	-23.99	-	-	peak
4	368.1116	26.70	-4.85	21.85	46.00	-24.15	-	-	peak
5	647.3856	28.90	0.89	29.79	46.00	-16.21	-	-	peak
6	790.6188	28.41	2.03	30.44	46.00	-15.56	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps(worst case)
- Antenna 1

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	59.15	-4.50	54.65	74	-19.35	H	PK
4824.000	49.88	-4.50	45.38	54	-8.62	H	AV
7236.000	52.55	1.14	53.69	74	-20.31	H	PK
7236.000	46.15	1.14	47.29	54	-6.71	H	AV
4824.000	60.68	-4.50	56.18	74	-17.82	V	PK
4824.000	50.26	-4.50	45.76	54	-8.24	V	AV
7236.000	50.23	1.14	51.37	74	-22.63	V	PK
7236.000	43.74	1.14	44.88	54	-9.12	V	AV
Middle Channel-2437MHz							
4874.000	62.00	-4.47	57.53	74	-16.47	H	PK
4874.000	49.26	-4.47	44.79	54	-9.21	H	AV
7311.000	54.45	1.47	55.92	74	-18.08	H	PK
7311.000	44.56	1.47	46.03	54	-7.97	H	AV
4874.000	59.97	-4.47	55.50	74	-18.50	V	PK
4874.000	49.19	-4.47	44.72	54	-9.28	V	AV
7311.000	50.26	1.47	51.73	74	-22.27	V	PK
7311.000	42.43	1.47	43.90	54	-10.10	V	AV
High Channel-2462MHz							
4924.000	58.70	-4.44	54.26	74	-19.74	H	PK
4924.000	50.89	-4.44	46.45	54	-7.55	H	AV
7386.000	52.27	1.79	54.06	74	-19.94	H	PK
7386.000	43.63	1.79	45.42	54	-8.58	H	AV
4924.000	60.14	-4.44	55.70	74	-18.30	V	PK
4924.000	49.98	-4.44	45.54	54	-8.46	V	AV
7386.000	50.81	1.79	52.60	74	-21.40	V	PK
7386.000	41.71	1.79	43.50	54	-10.50	V	AV

➤ Antenna 2

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	59.06	-4.50	54.56	74	-19.44	H	PK
4824.000	50.04	-4.50	45.54	54	-8.46	H	AV
7236.000	51.79	1.14	52.93	74	-21.07	H	PK
7236.000	46.80	1.14	47.94	54	-6.06	H	AV
4824.000	60.72	-4.50	56.22	74	-17.78	V	PK
4824.000	51.53	-4.50	47.03	54	-6.97	V	AV
7236.000	49.80	1.14	50.94	74	-23.06	V	PK
7236.000	43.11	1.14	44.25	54	-9.75	V	AV
Middle Channel-2437MHz							
4874.000	61.82	-4.47	57.35	74	-16.65	H	PK
4874.000	49.15	-4.47	44.68	54	-9.32	H	AV
7311.000	54.25	1.47	55.72	74	-18.28	H	PK
7311.000	45.30	1.47	46.77	54	-7.23	H	AV
4874.000	60.58	-4.47	56.11	74	-17.89	V	PK
4874.000	48.46	-4.47	43.99	54	-10.01	V	AV
7311.000	50.02	1.47	51.49	74	-22.51	V	PK
7311.000	41.70	1.47	43.17	54	-10.83	V	AV
High Channel-2462MHz							
4924.000	57.52	-4.44	53.08	74	-20.92	H	PK
4924.000	49.93	-4.44	45.49	54	-8.51	H	AV
7386.000	52.37	1.79	54.16	74	-19.84	H	PK
7386.000	43.37	1.79	45.16	54	-8.84	H	AV
4924.000	61.83	-4.44	57.39	74	-16.61	V	PK
4924.000	50.57	-4.44	46.13	54	-7.87	V	AV
7386.000	50.82	1.79	52.61	74	-21.39	V	PK
7386.000	41.91	1.79	43.70	54	-10.30	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


- Radiated test
- Antenna 1(worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

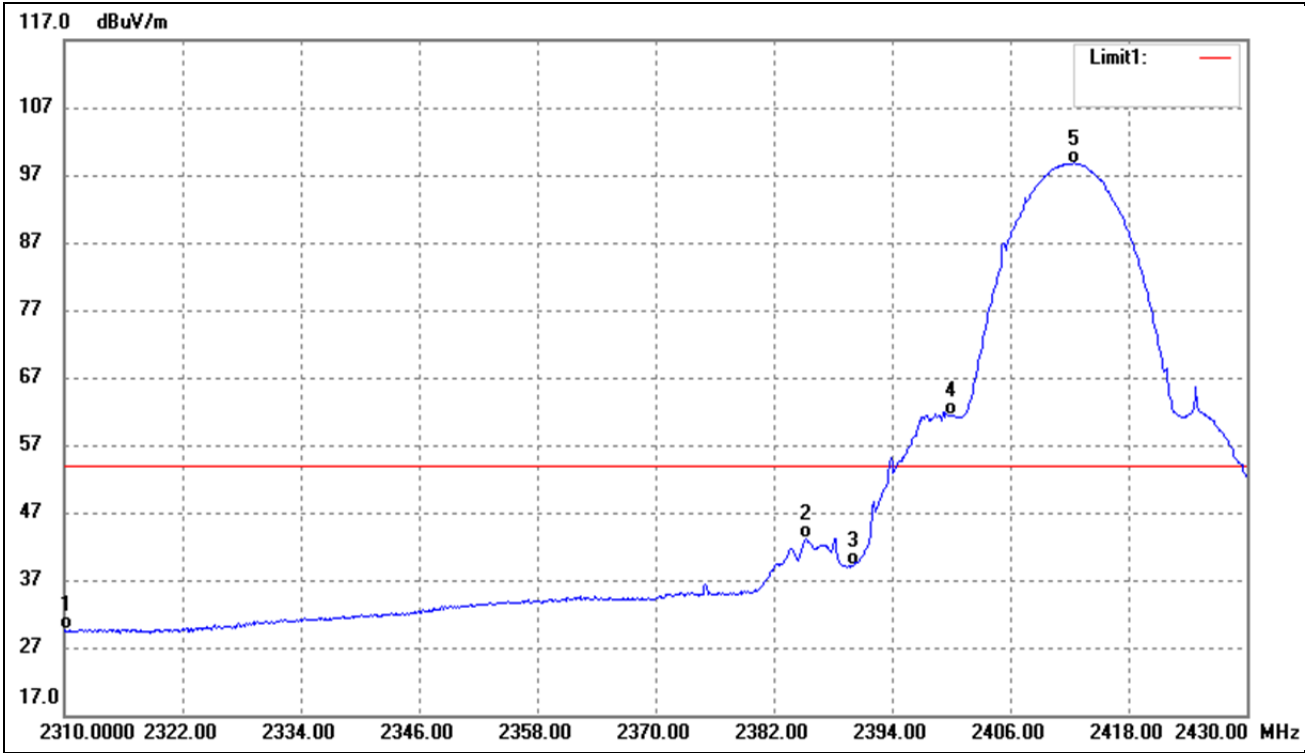


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.39	-10.82	29.57	54.00	-24.43	Average Detector
	2310.000	54.50	-10.82	43.68	74.00	-30.32	Peak Detector
2	2385.240	53.73	-10.71	43.02	54.00	-10.98	Average Detector
3	2390.000	49.90	-10.70	39.20	54.00	-14.80	Average Detector
	2390.000	61.64	-10.70	50.94	74.00	-23.06	Peak Detector
4	2400.000	71.99	-10.69	61.30	Delta=37.45dBc		Average Detector
5	2412.480	109.43	-10.68	98.75			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

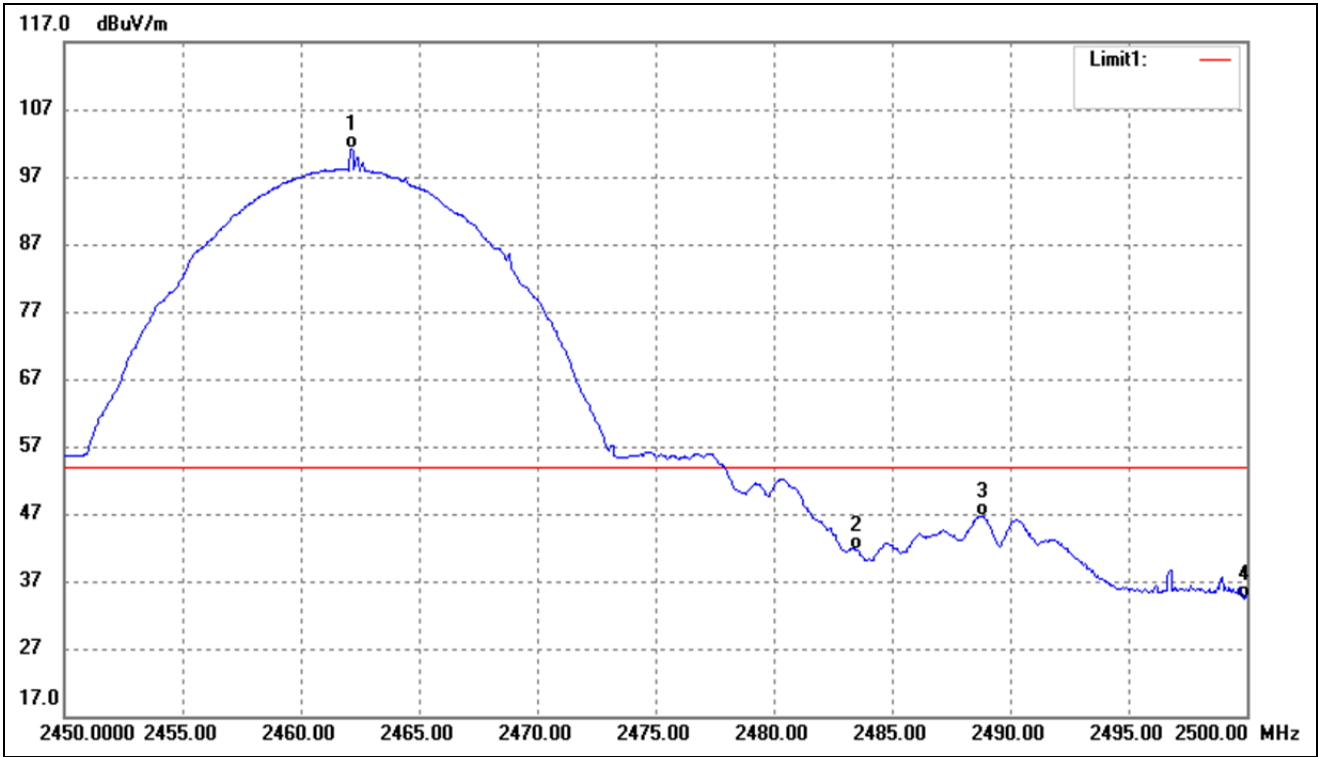


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.150	111.70	-10.61	101.09	/	/	Average Detector
	2461.800	118.36	-10.61	107.75	/	/	Peak Detector
2	2483.500	52.28	-10.58	41.70	54.00	-12.30	Average Detector
	2483.500	70.57	-10.58	59.99	74.00	-14.01	Peak Detector
3	2488.800	57.20	-10.56	46.64	54.00	-7.36	Average Detector
4	2500.000	44.86	-10.55	34.31	54.00	-19.69	Average Detector
	2500.000	66.82	-10.55	56.27	74.00	-17.73	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

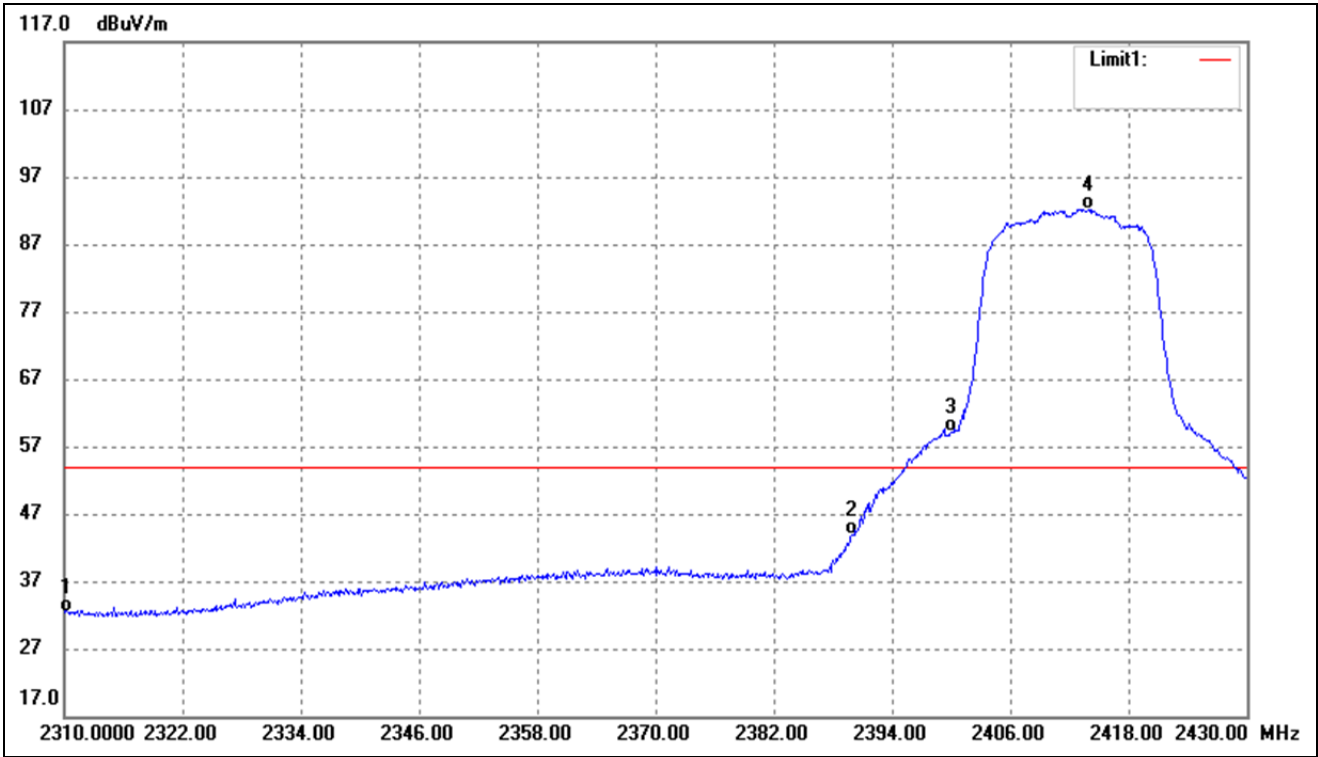


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.26	-10.82	32.44	54.00	-21.56	Average Detector
	2310.000	53.11	-10.82	42.29	74.00	-31.71	Peak Detector
2	2390.000	54.46	-10.70	43.76	54.00	-10.24	Average Detector
	2390.000	73.74	-10.70	63.04	74.00	-10.96	Peak Detector
3	2400.000	69.78	-10.69	59.09	Delta=33.16dBc		Average Detector
4	2413.920	102.91	-10.66	92.25			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

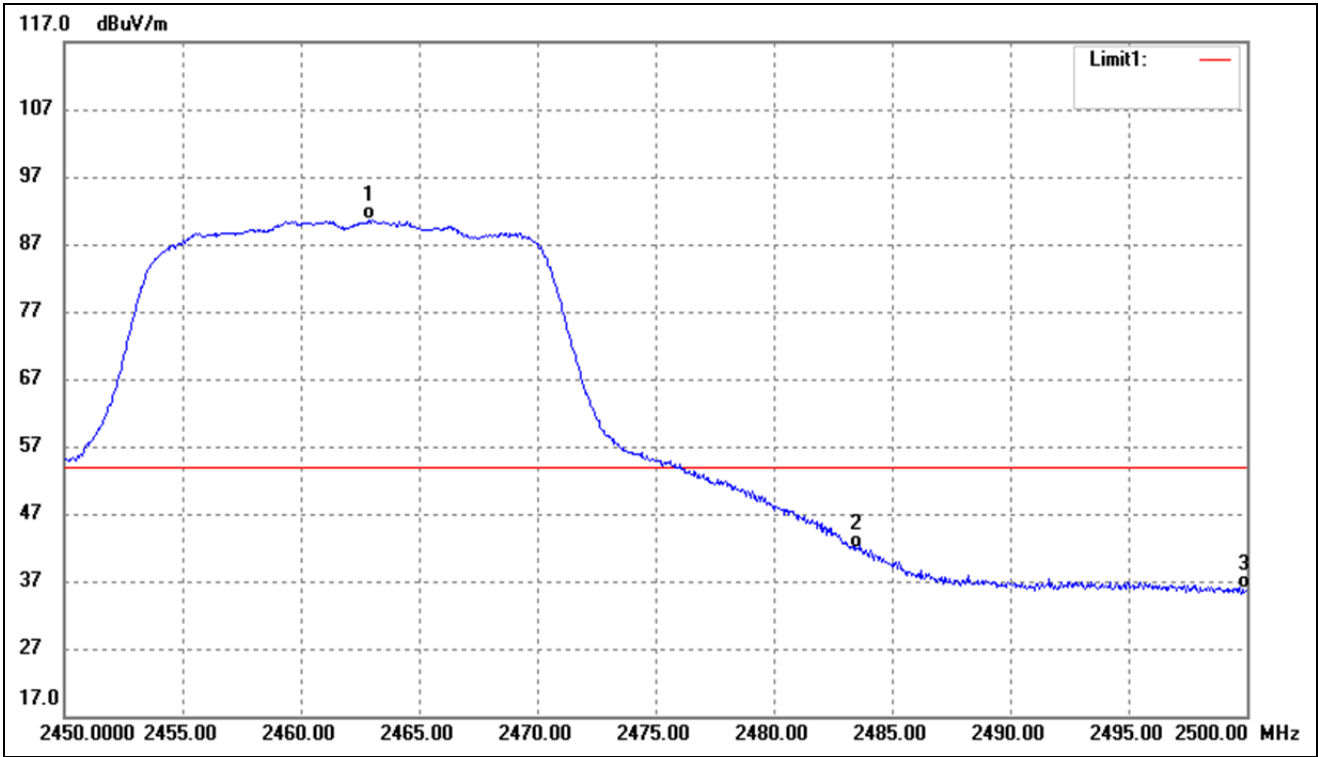


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.900	101.27	-10.60	90.67	/	/	Average Detector
	2459.700	110.21	-10.61	99.60	/	/	Peak Detector
2	2483.500	52.34	-10.58	41.76	54.00	-12.24	Average Detector
	2483.500	66.95	-10.58	56.37	74.00	-17.63	Peak Detector
3	2500.000	46.45	-10.55	35.90	54.00	-18.10	Average Detector
	2500.000	55.75	-10.55	45.20	74.00	-28.80	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

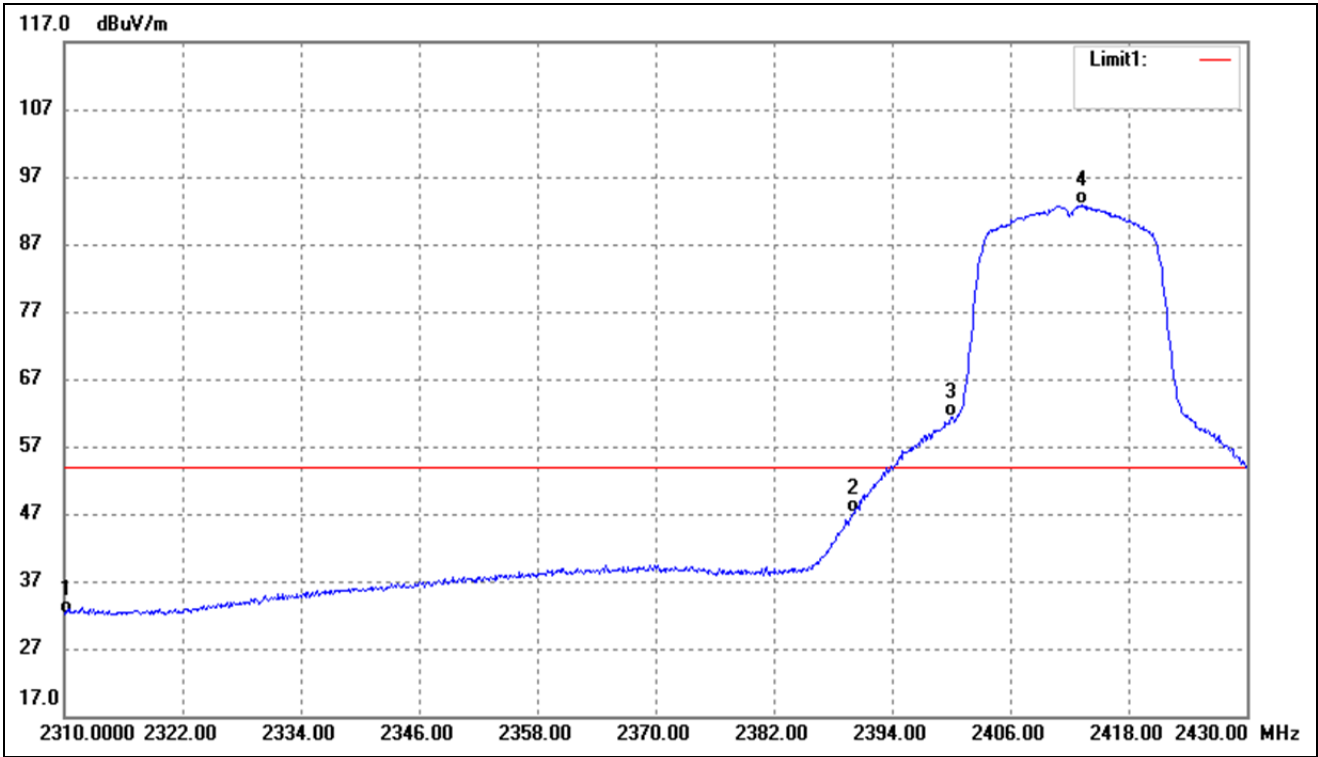


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.02	-10.82	32.20	54.00	-21.80	Average Detector
	2310.000	53.03	-10.82	42.21	74.00	-31.79	Peak Detector
2	2390.000	57.93	-10.70	47.23	54.00	-6.77	Average Detector
	2390.000	73.51	-10.70	62.81	74.00	-11.19	Peak Detector
3	2400.000	72.03	-10.69	61.34	Delta=31.45dBc		Average Detector
4	2413.320	103.45	-10.66	92.79			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

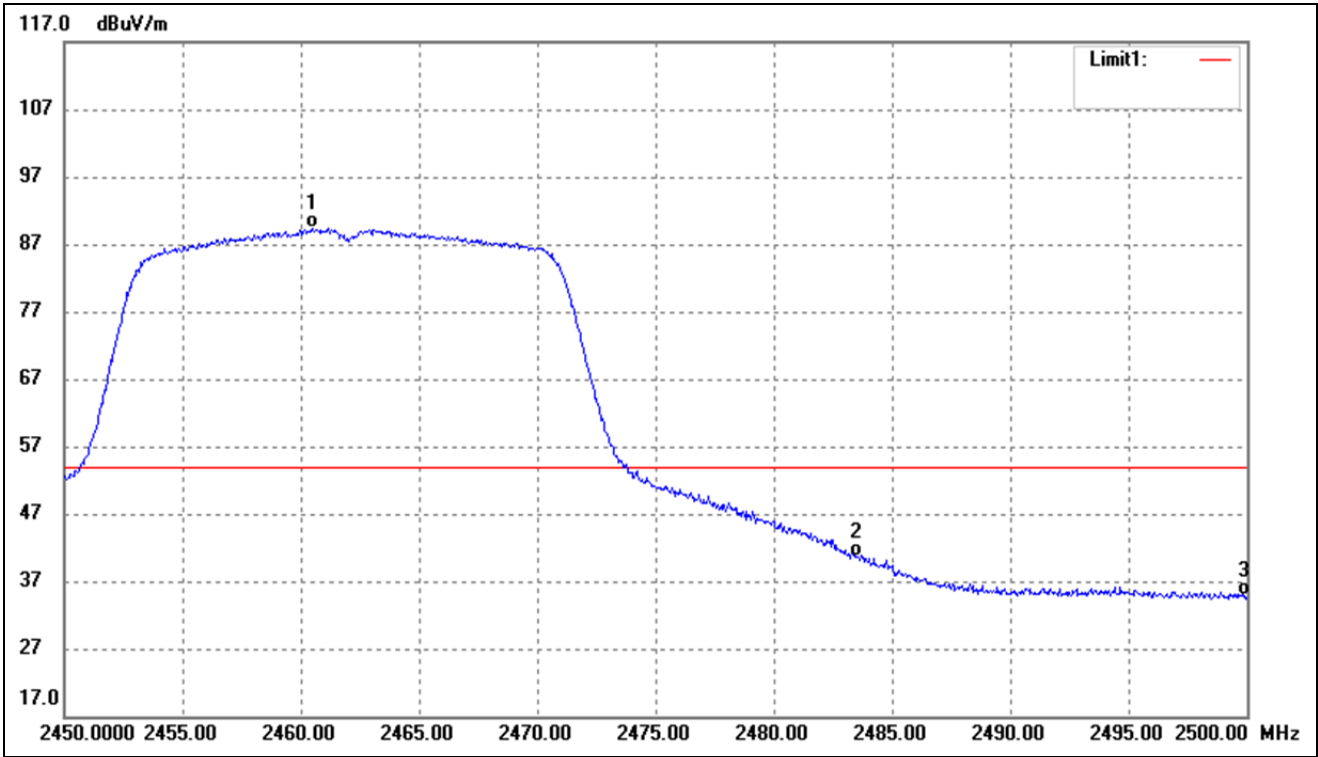


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.500	99.98	-10.61	89.37	/	/	Average Detector
	2462.800	109.36	-10.60	98.76	/	/	Peak Detector
2	2483.500	51.30	-10.58	40.72	54.00	-13.28	Average Detector
	2483.500	64.54	-10.58	53.96	74.00	-20.04	Peak Detector
3	2500.000	45.48	-10.55	34.93	54.00	-19.07	Average Detector
	2500.000	54.86	-10.55	44.31	74.00	-29.69	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

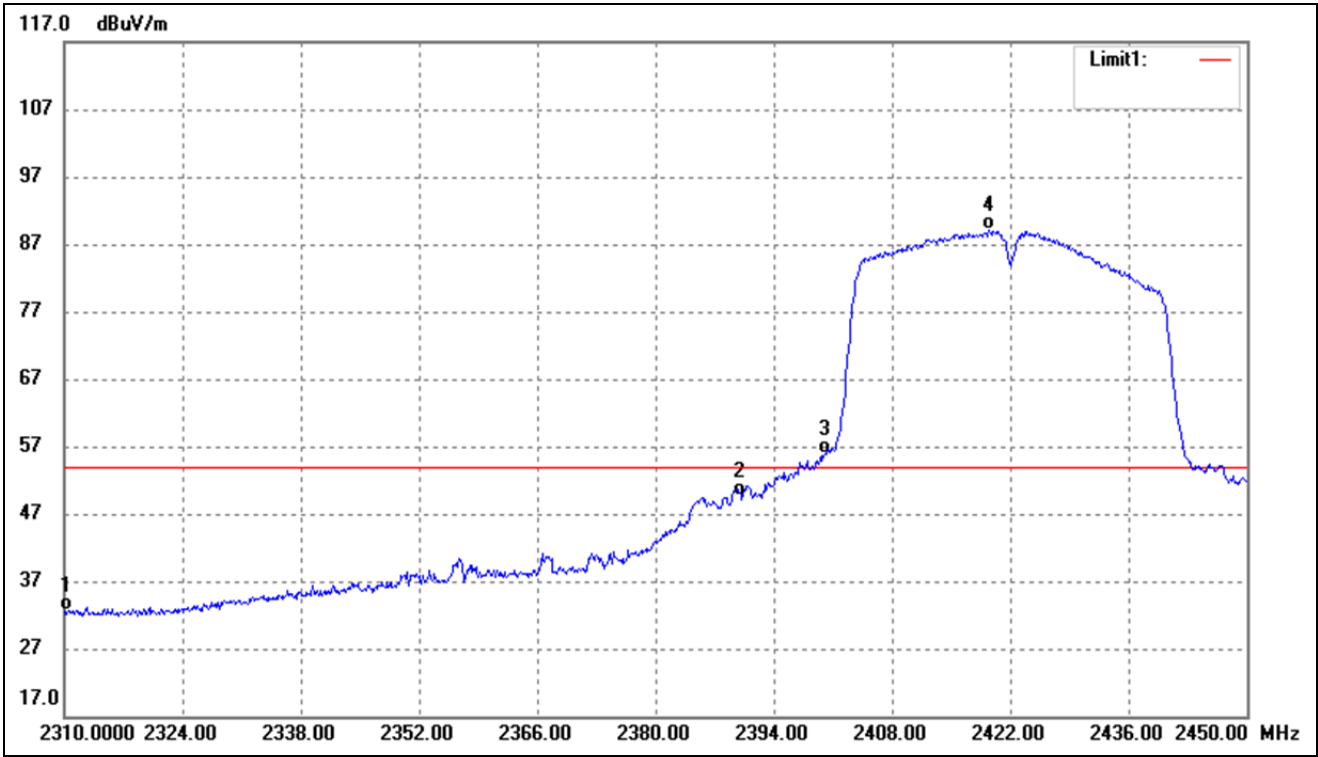


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.51	-10.82	32.69	54.00	-21.31	Average Detector
	2310.000	53.28	-10.82	42.46	74.00	-31.54	Peak Detector
2	2390.000	60.45	-10.70	49.75	54.00	-4.25	Average Detector
	2390.000	80.69	-10.70	69.99	74.00	-4.01	Peak Detector
3	2400.000	66.47	-10.69	55.78	Delta=33.35dBc		Average Detector
4	2419.480	99.79	-10.66	89.13			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

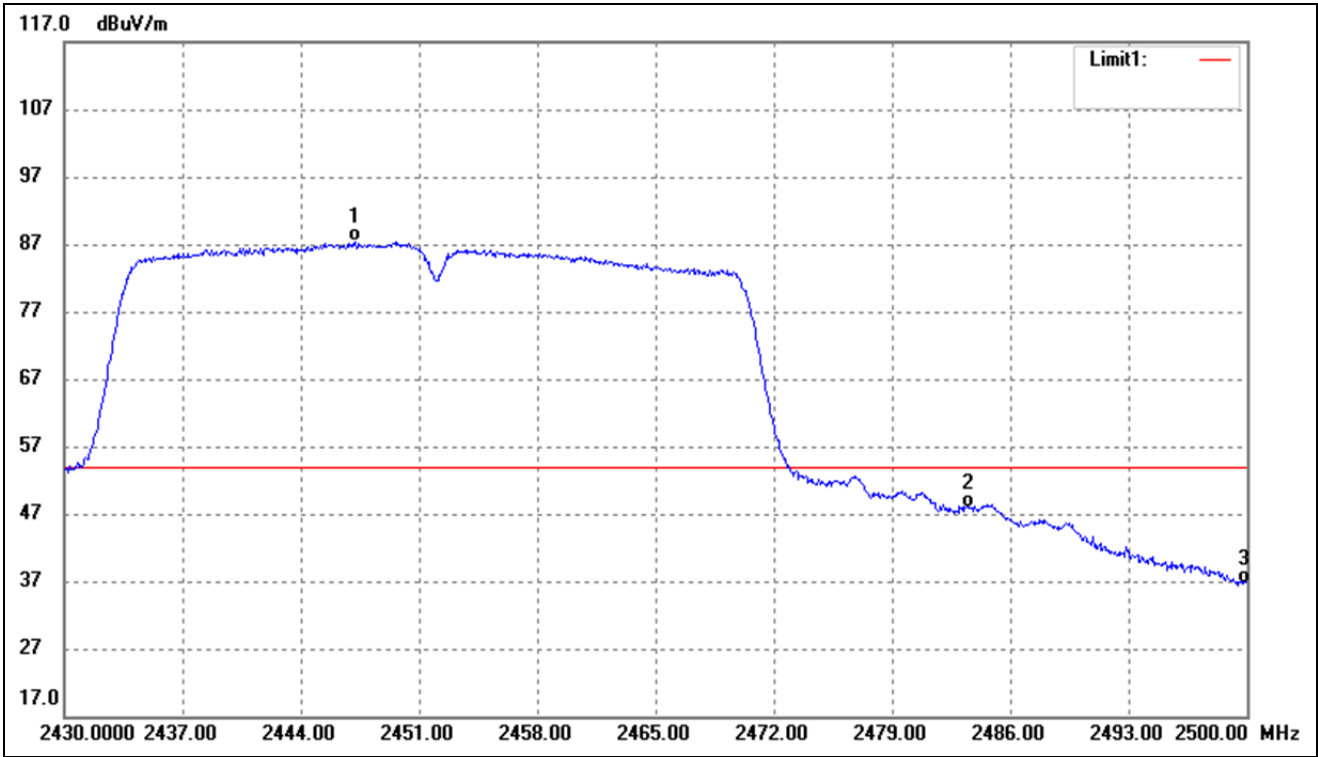


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2447.220	97.91	-10.62	87.29	/	/	Average Detector
	2450.860	106.65	-10.62	96.03	/	/	Peak Detector
2	2483.500	58.48	-10.58	47.90	54.00	-6.10	Average Detector
	2483.500	68.87	-10.58	58.29	74.00	-15.71	Peak Detector
3	2500.000	47.27	-10.55	36.72	54.00	-17.28	Average Detector
	2500.000	56.69	-10.55	46.14	74.00	-27.86	Peak Detector

802.11ax-HE20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

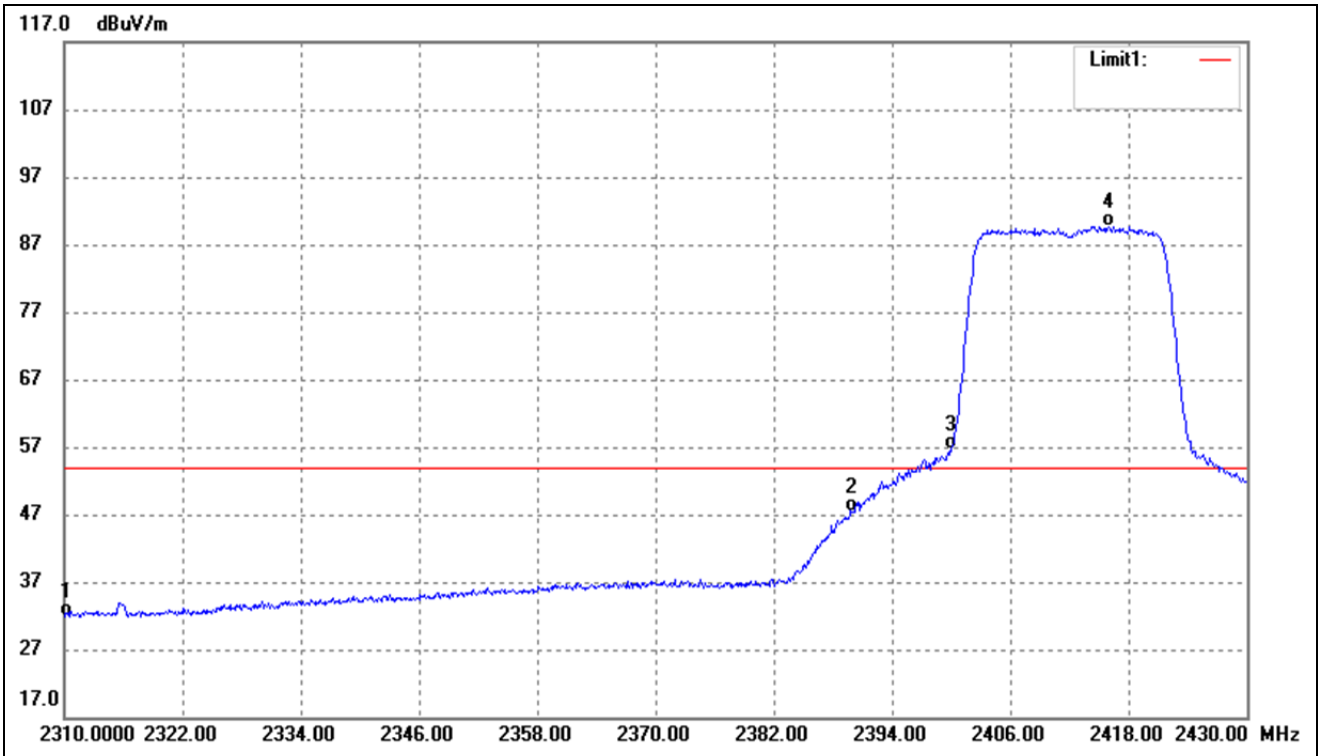


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.80	-10.82	31.98	54.00	-22.02	Average Detector
	2310.000	54.61	-10.82	43.79	74.00	-30.21	Peak Detector
2	2390.000	58.02	-10.70	47.32	54.00	-6.68	Average Detector
	2390.000	77.38	-10.70	66.68	74.00	-7.32	Peak Detector
3	2400.000	67.30	-10.69	56.61	Delta=33.02dBc		Average Detector
4	2415.960	100.29	-10.66	89.63			Average Detector

802.11ax-HE20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

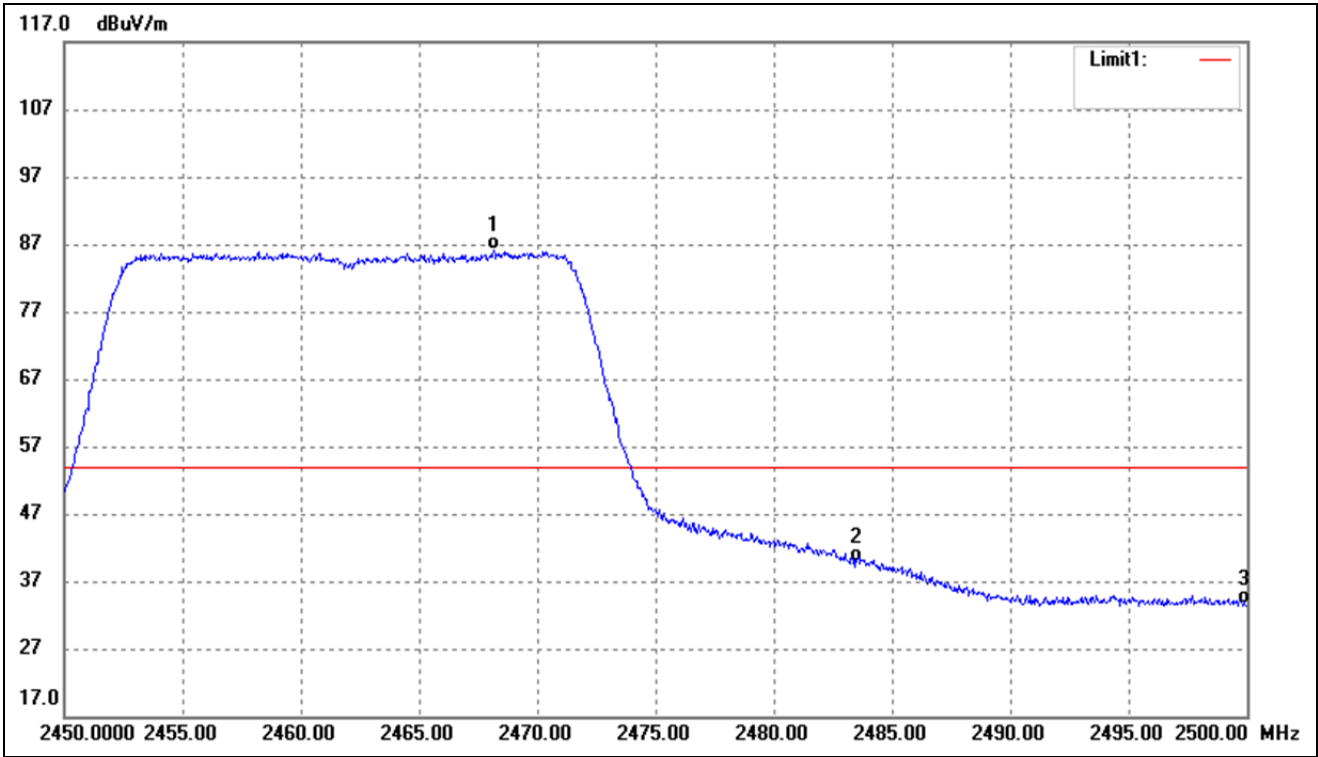


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.150	96.67	-10.59	86.08	/	/	Average Detector
	2457.800	107.38	-10.61	96.77	/	/	Peak Detector
2	2483.500	50.49	-10.58	39.91	54.00	-14.09	Average Detector
	2483.500	64.84	-10.58	54.26	74.00	-19.74	Peak Detector
3	2500.000	44.16	-10.55	33.61	54.00	-20.39	Average Detector
	2500.000	55.07	-10.55	44.52	74.00	-29.48	Peak Detector

802.11ax-HE40_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

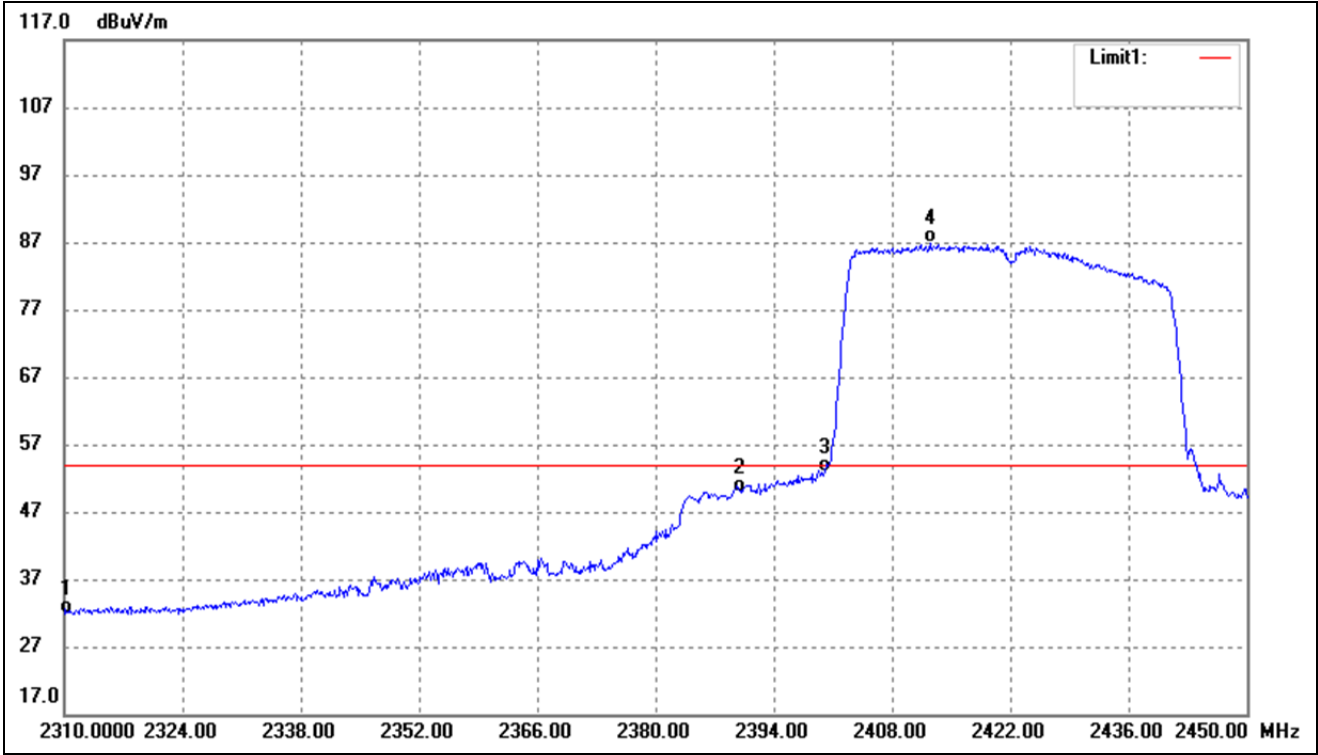

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.79	-10.82	31.97	54.00	-22.03	Average Detector
	2310.000	53.18	-10.82	42.36	74.00	-31.64	Peak Detector
2	2390.000	60.69	-10.70	49.99	54.00	-4.01	Average Detector
	2390.000	73.87	-10.70	63.17	74.00	-10.83	Peak Detector
3	2400.000	63.51	-10.69	52.82	Delta=34.09dBc		Average Detector
4	2412.480	97.59	-10.68	86.91			Average Detector

802.11ax-HE40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

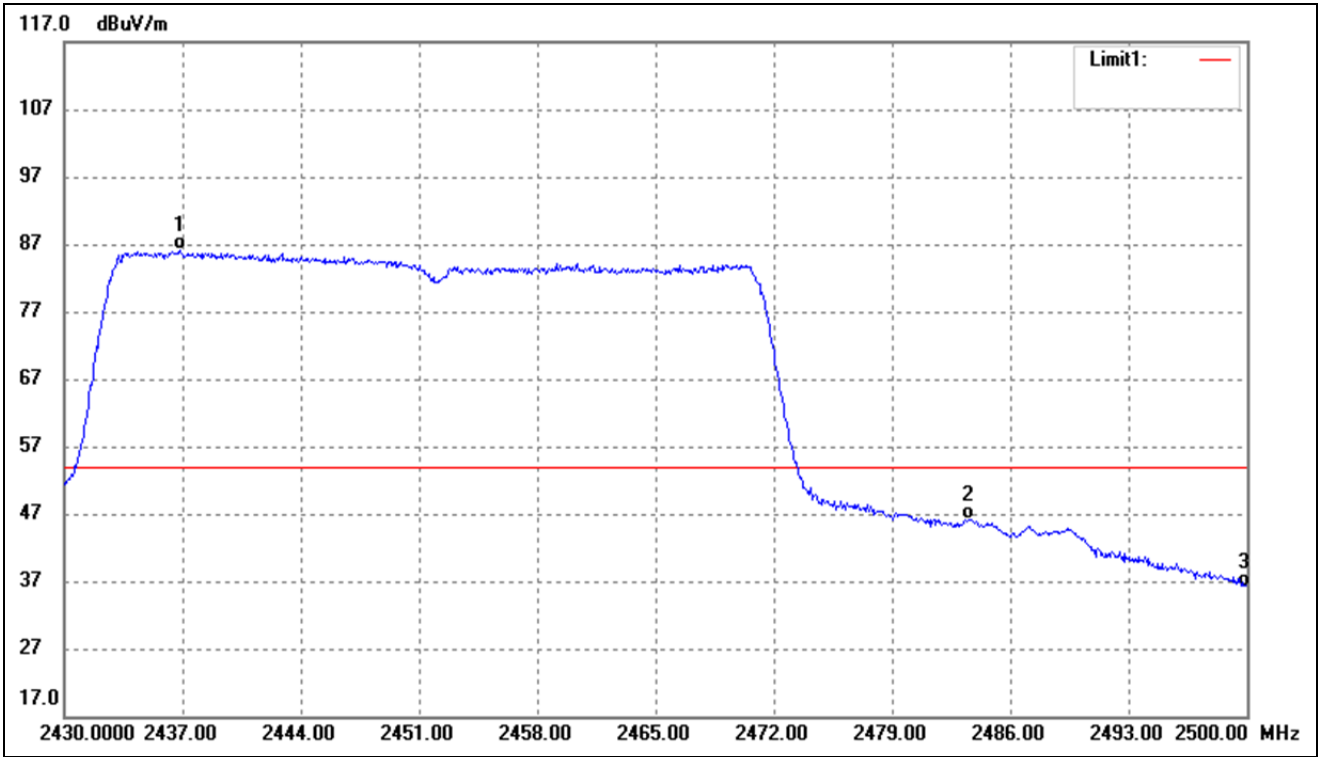

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2436.860	96.66	-10.64	86.02	/	/	Average Detector
	2437.700	107.15	-10.63	96.52	/	/	Peak Detector
2	2483.500	56.73	-10.58	46.15	54.00	-7.85	Average Detector
	2483.500	71.08	-10.58	60.50	74.00	-13.50	Peak Detector
3	2500.000	46.75	-10.55	36.20	54.00	-17.80	Average Detector
	2500.000	59.44	-10.55	48.89	74.00	-25.11	Peak Detector

➤ Conducted test

Please refer to Appendix D

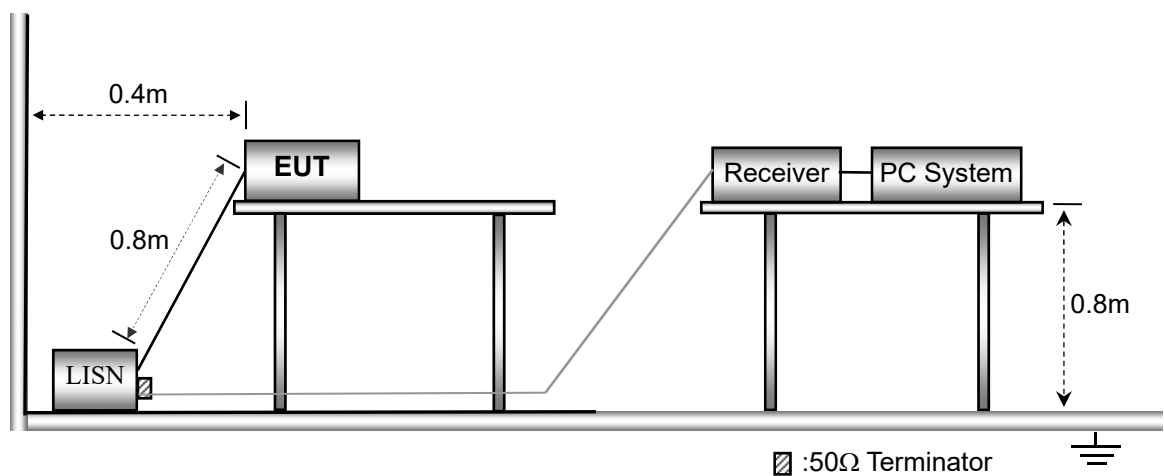
9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram




9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

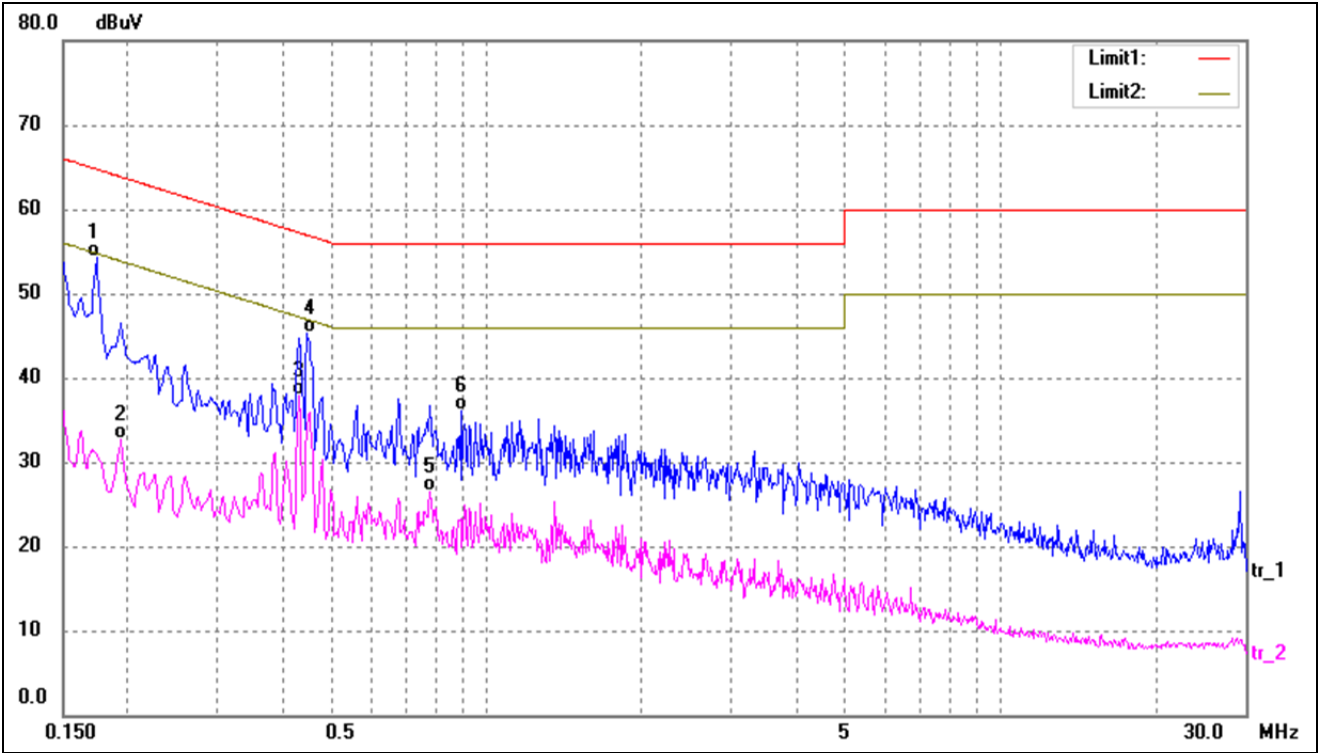

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	43.99	10.37	54.36	64.77	-10.41	QP
2	0.1940	22.36	10.37	32.73	53.86	-21.13	AVG
3*	0.4300	27.62	10.28	37.90	47.25	-9.35	AVG
4	0.4460	34.98	10.28	45.26	56.95	-11.69	QP
5	0.7780	16.05	10.43	26.48	46.00	-19.52	AVG
6	0.8940	25.57	10.50	36.07	56.00	-19.93	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

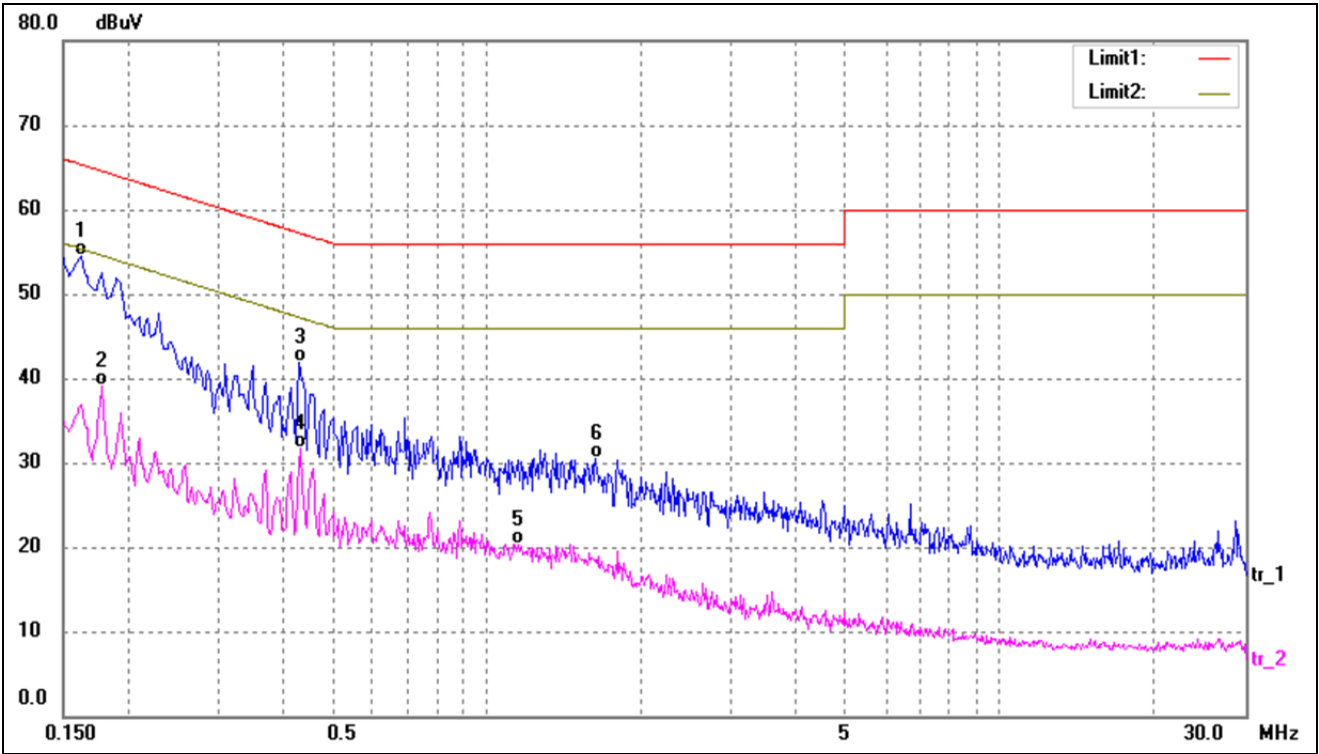

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1620	44.15	10.37	54.52	65.36	-10.84	QP
2	0.1780	28.66	10.37	39.03	54.58	-15.55	AVG
3	0.4300	31.54	10.28	41.82	57.25	-15.43	QP
4	0.4340	21.47	10.28	31.75	47.18	-15.43	AVG
5	1.1540	9.83	10.50	20.33	46.00	-25.67	AVG
6	1.6300	20.29	10.29	30.58	56.00	-25.42	QP

APPENDIX SUMMARY


Project No.	WTH21X09102605W	Test Engineer	Gala
Start date	2022/5/19	Finish date	2022/5/23
Temperature	23℃	Humidity	45%
RF specifications	WIFI-2.4G		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant


APPENDIX A

Power Spectral Density					
Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b_1Mbps	2412	-17.12	-16.04	/	8
	2437	-16.23	-16.44	/	8
	2462	-16.60	-15.91	/	8
802.11g_6Mbps	2412	-21.16	-22.66	/	8
	2437	-20.53	-22.69	/	8
	2462	-20.58	-22.82	/	8
802.11n-HT20_MCS0	2412	-22.28	-21.71	-18.98	8
	2437	-20.94	-23.37	-18.98	8
	2462	-21.53	-23.58	-19.42	8
802.11n-HT40_MCS0	2422	-28.34	-26.48	-24.30	8
	2437	-27.42	-26.95	-24.17	8
	2452	-27.74	-27.25	-24.48	8
802.11ax-AX20_MCS0	2412	-23.71	-23.99	-20.84	8
	2437	-23.17	-23.06	-20.10	8
	2462	-23.63	-23.47	-20.54	8
802.11ax-AX40_MCS0	2422	-29.33	-28.19	-25.71	8
	2437	-28.81	-28.81	-25.80	8
	2452	-28.71	-28.71	-25.70	8

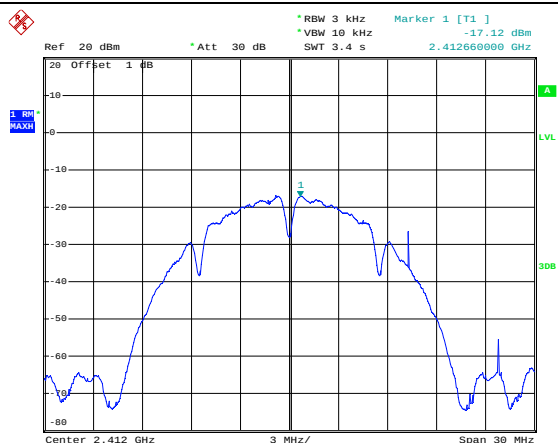
Antenna 1






Date: 11.OCT.2021 12:34:22



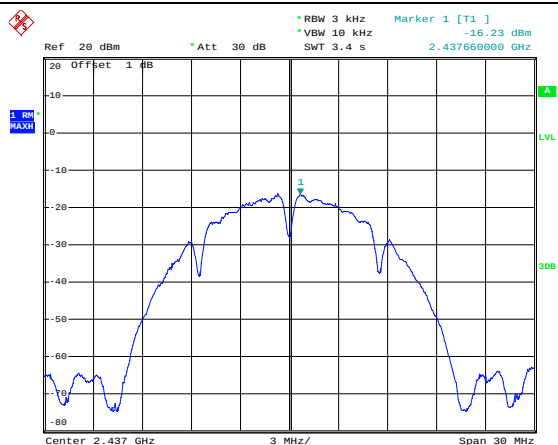





Date: 11.OCT.2021 12:35:22

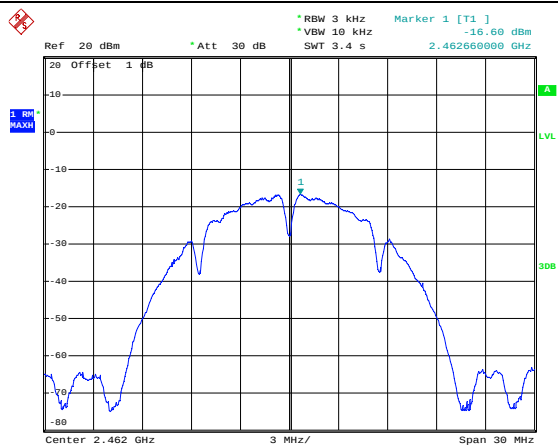




Date: 11.OCT.2021 12:36:01

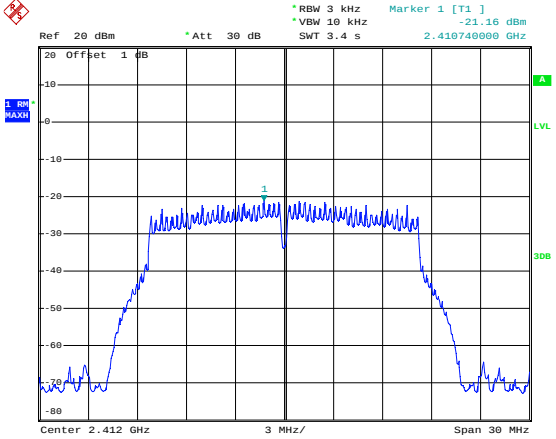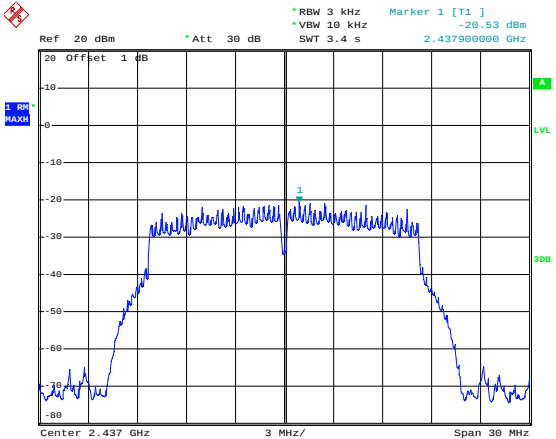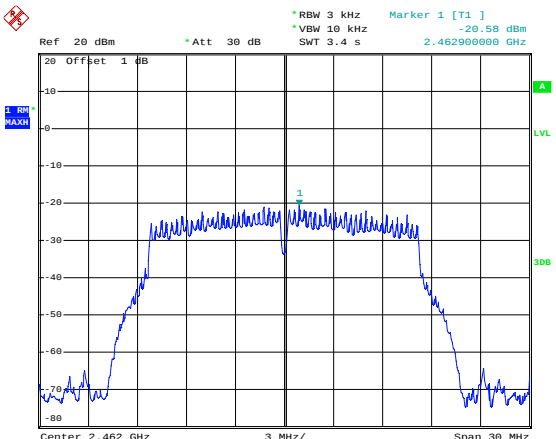802.11g-Low	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -21.16 dBm SWT 3.4 s 2.410740000 GHz Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 11.OCT.2021 12:38:15
802.11g-Middle	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -20.53 dBm SWT 3.4 s 2.437900000 GHz Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 11.OCT.2021 12:38:45
802.11g-High	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -20.58 dBm SWT 3.4 s 2.462900000 GHz Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 11.OCT.2021 12:39:37

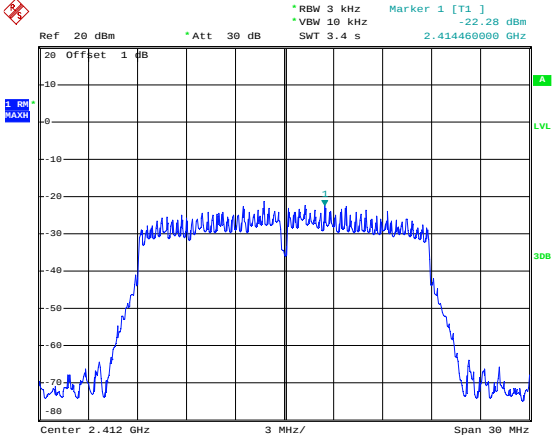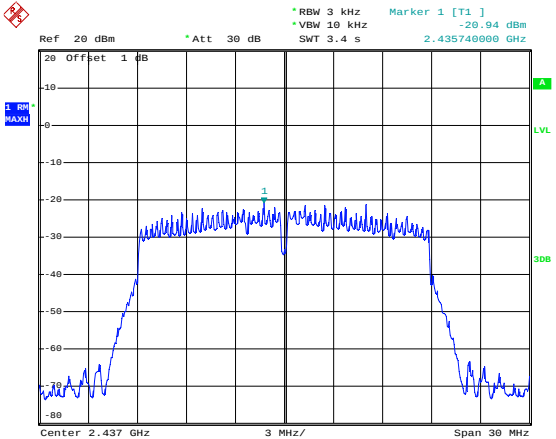
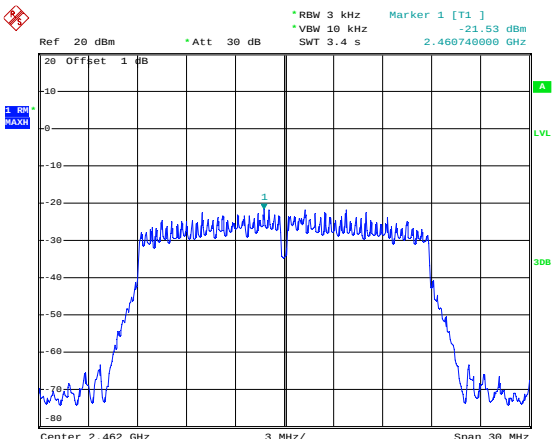
802.11n-HT20-Low	 Date: 11.OCT.2021 12:40:17
802.11n-HT20-Middle	 Date: 11.OCT.2021 12:41:31
802.11n-HT20-High	 Date: 11.OCT.2021 12:42:10

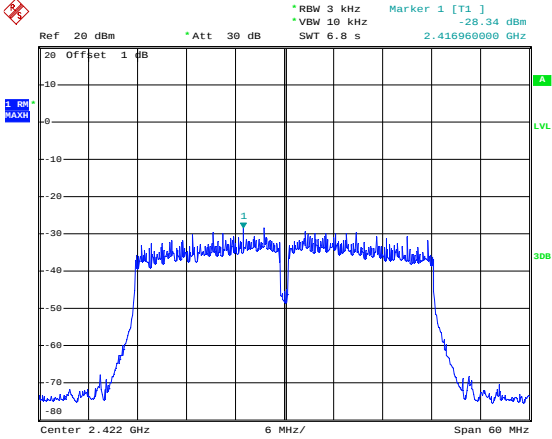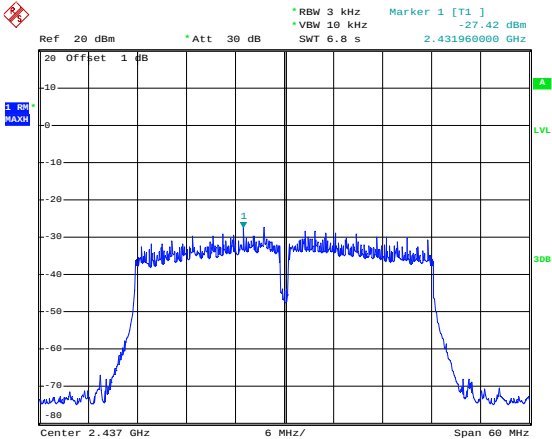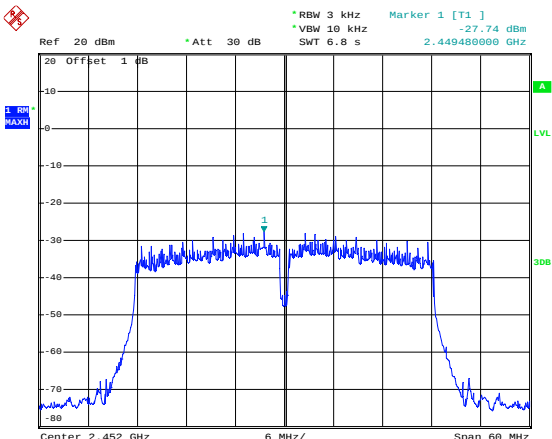802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -28.34 dBm SWT 6.8 s 2.416960000 GHz Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 12:42:52
802.11n-HT40-Middle	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -27.42 dBm SWT 6.8 s 2.431960000 GHz Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 12:43:35
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -27.74 dBm SWT 6.8 s 2.449480000 GHz Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 12:44:12



802.11ax-AX20-Low	Date: 11.OCT.2021 12:44:50
802.11ax-AX20-Middle	Date: 11.OCT.2021 12:45:27
802.11ax-AX20-High	Date: 11.OCT.2021 12:45:59

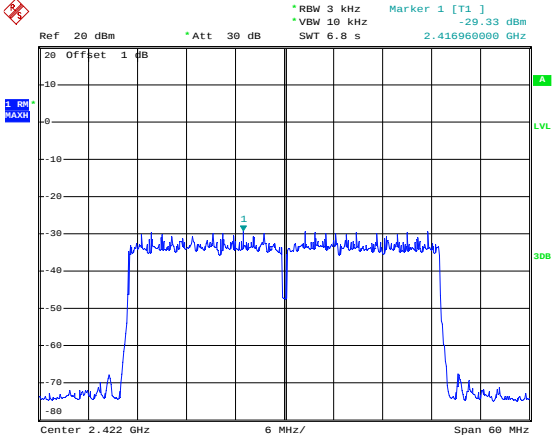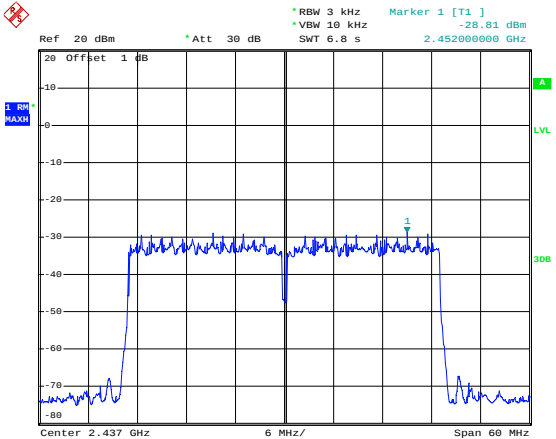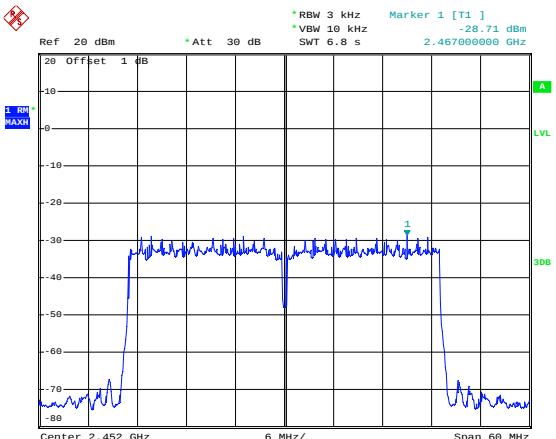802.11ax-AX40-Low	 Date: 11.OCT.2021 12:46:42
802.11ax-AX40-Middle	 Date: 11.OCT.2021 12:47:19
802.11ax-AX40-High	 Date: 11.OCT.2021 12:47:56

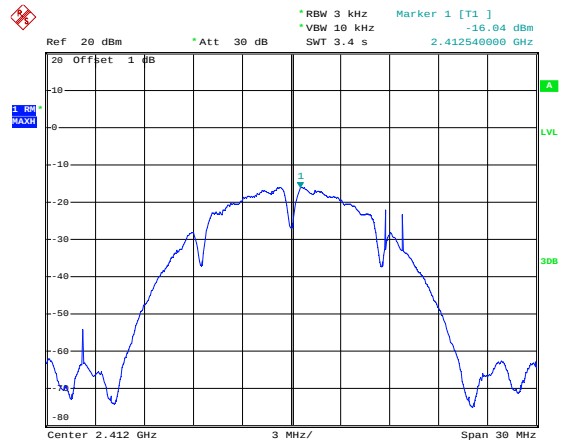

Antenna 2






Date: 11.OCT.2021 18:22:55


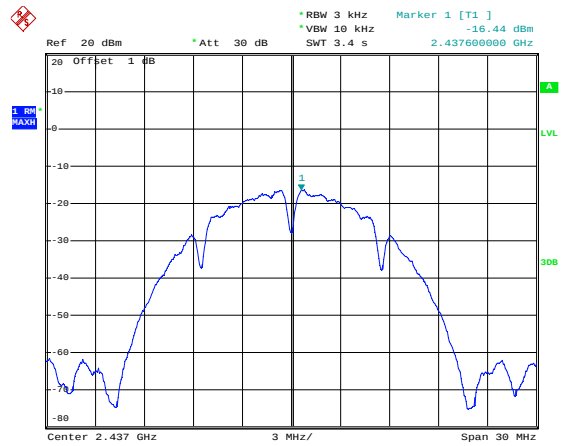






Date: 11.OCT.2021 18:23:55


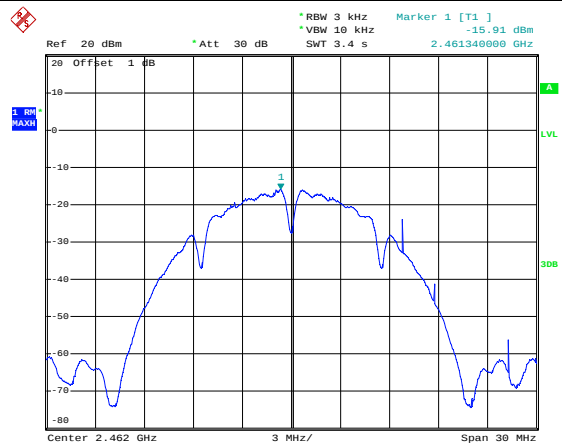






Date: 11.OCT.2021 18:24:45

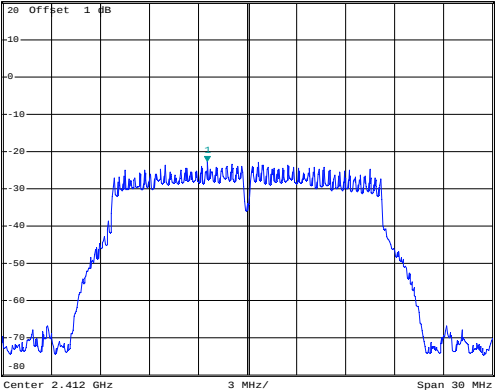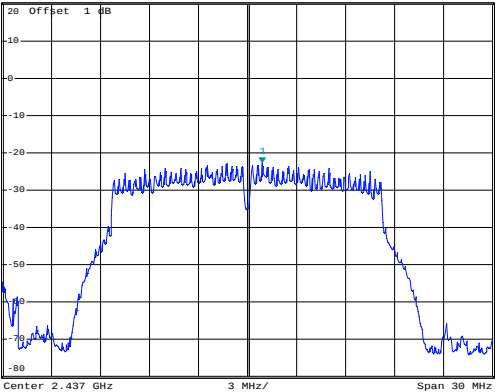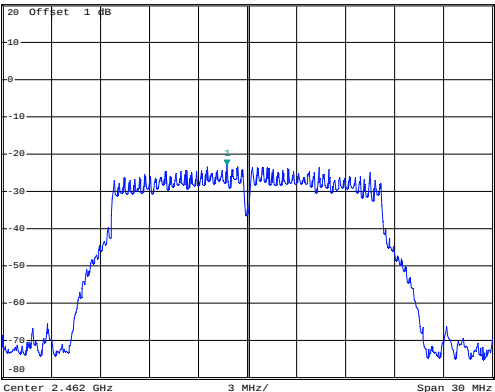802.11g-Low	 Date: 11.OCT.2021 18:25:22
802.11g-Middle	 Date: 11.OCT.2021 18:25:54
802.11g-High	 Date: 11.OCT.2021 18:26:31

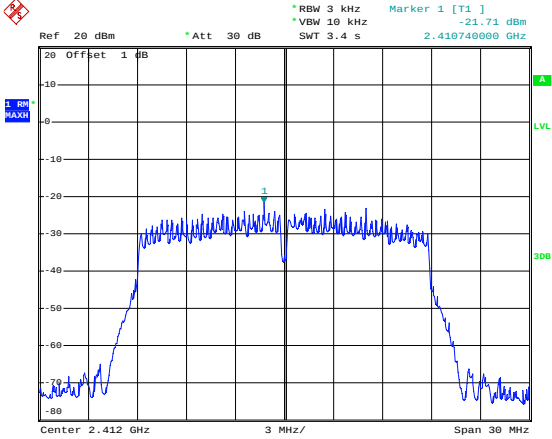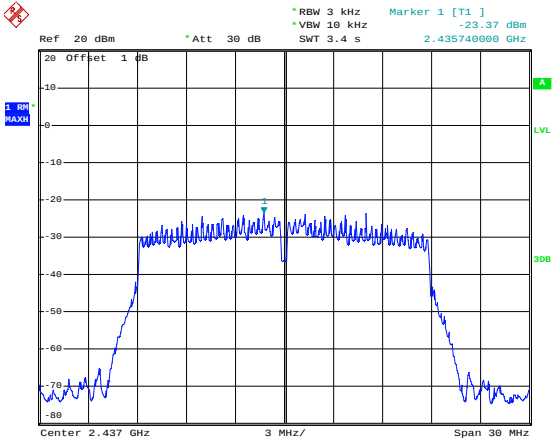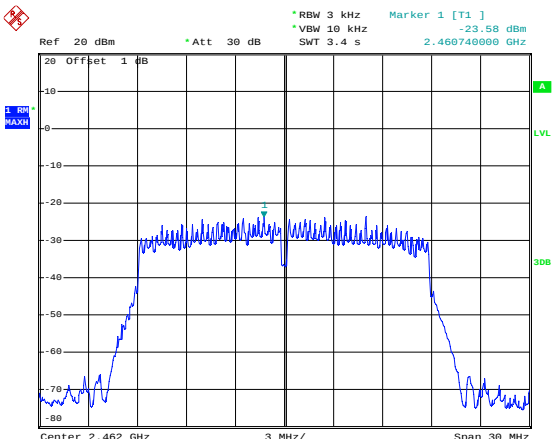802.11n-HT20-Low	 Date: 11.OCT.2021 18:27:04
802.11n-HT20-Middle	 Date: 11.OCT.2021 18:27:35
802.11n-HT20-High	 Date: 11.OCT.2021 18:28:03

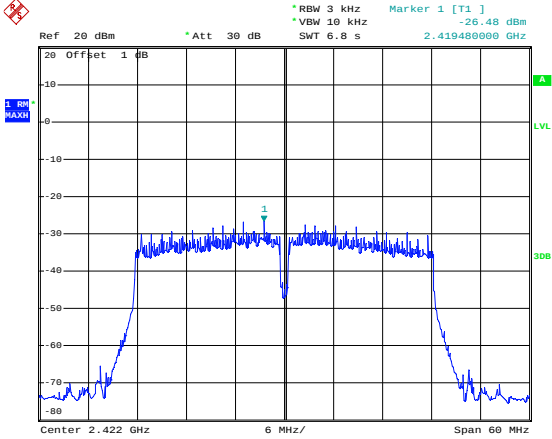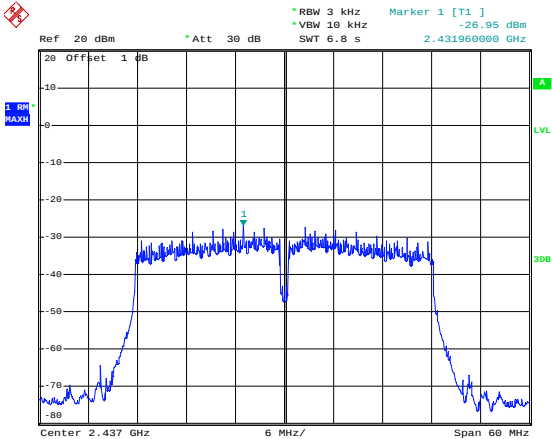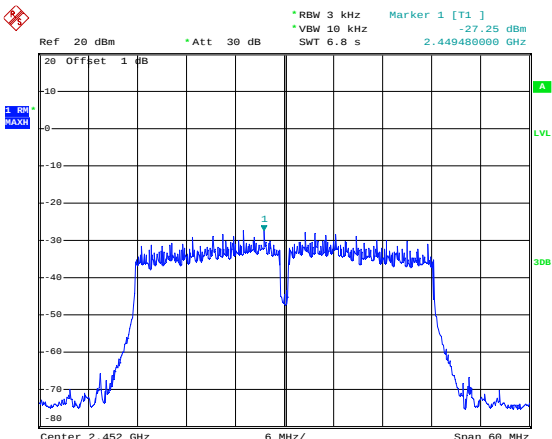802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -26.48 dBm *VBW 10 kHz SWT 6.8 s 2.419450000 GHz Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 18:29:18
802.11n-HT40-Middle	 Ref 20 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -26.95 dBm *VBW 10 kHz SWT 6.8 s 2.431960000 GHz Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 18:29:53
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -27.25 dBm *VBW 10 kHz SWT 6.8 s 2.449480000 GHz Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 18:30:28

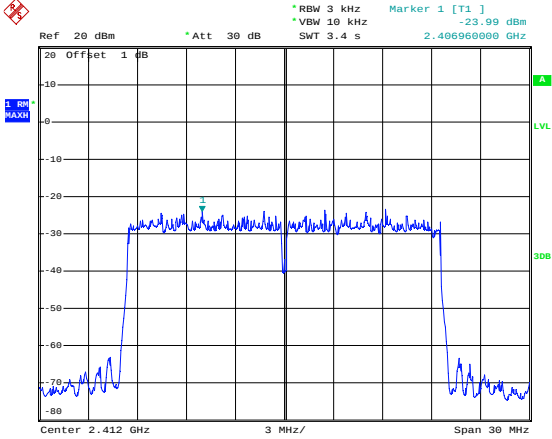
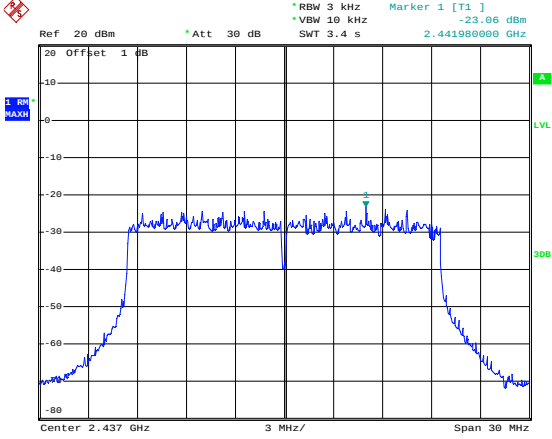
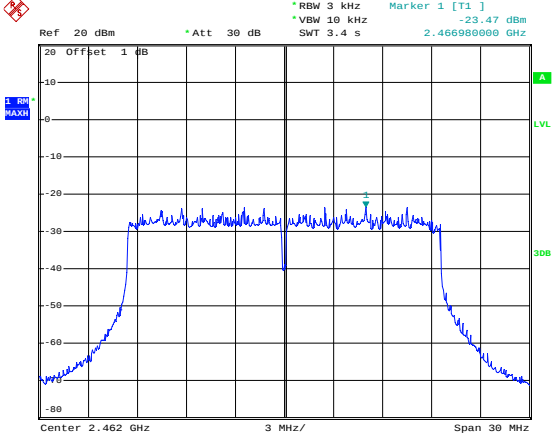
802.11ax-AX20-Low	 Date: 11.OCT.2021 18:31:02
802.11ax-AX20-Middle	 Date: 11.OCT.2021 18:31:26
802.11ax-AX20-High	 Date: 11.OCT.2021 18:32:03

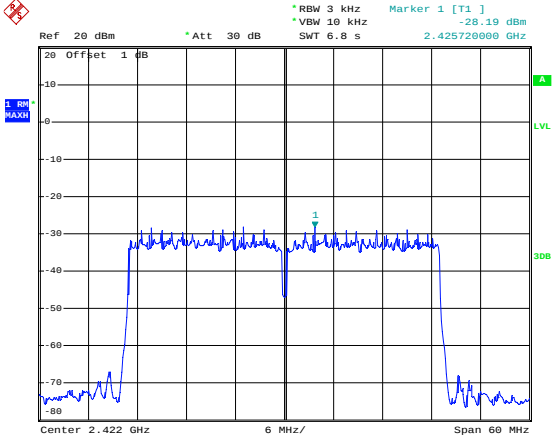
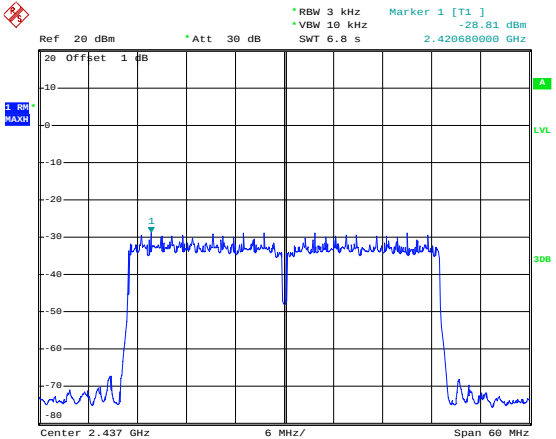
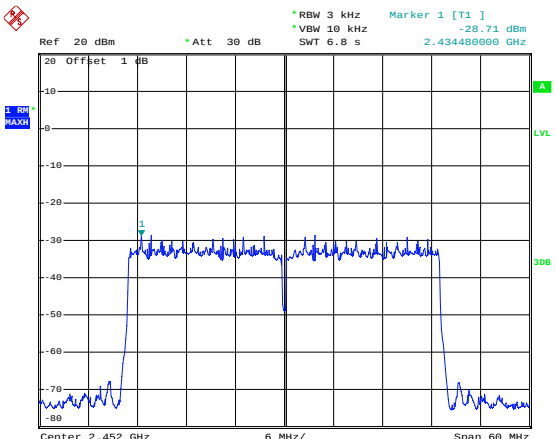
802.11ax-AX40-Low	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -28.19 dBm 2.425720000 GHz SWT 6.8 s Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 18:32:33
802.11ax-AX40-Middle	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -28.81 dBm 2.420680000 GHz SWT 6.8 s Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 18:33:06
802.11ax-AX40-High	 Ref 20 dBm *Att 30 dB *RBW 3 kHz *VBW 10 kHz Marker 1 [T1] -28.71 dBm 2.434480000 GHz SWT 6.8 s Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 11.OCT.2021 18:33:41




APPENDIX B

DTS Bandwidth				
Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b_1Mbps	2412	8.10	9.06	≥500
	2437	9.06	8.58	≥500
	2462	9.12	9.12	≥500
802.11g_6Mbps	2412	16.38	16.44	≥500
	2437	16.38	16.38	≥500
	2462	16.38	16.44	≥500
802.11n-HT20_MCS0	2412	17.22	17.64	≥500
	2437	17.64	17.34	≥500
	2462	17.58	17.34	≥500
802.11n-HT40_MCS0	2422	35.76	36.12	≥500
	2437	35.76	35.88	≥500
	2452	35.64	35.88	≥500
802.11ax-AX20_MCS0	2412	19.20	19.20	≥500
	2437	19.26	19.26	≥500
	2462	19.14	19.14	≥500
802.11ax-AX40_MCS0	2422	38.40	38.40	≥500
	2437	38.40	38.40	≥500
	2452	38.40	38.40	≥500

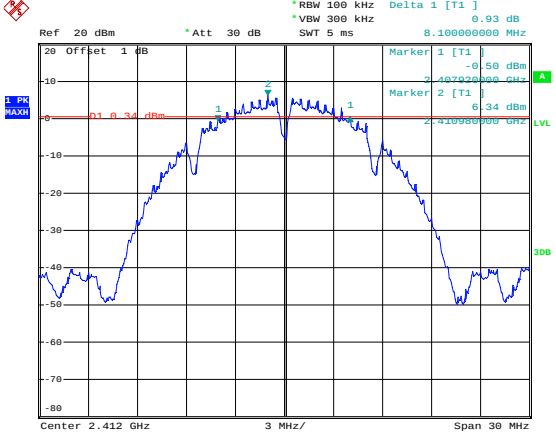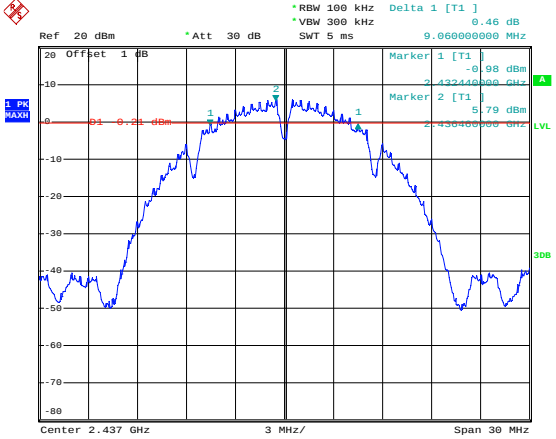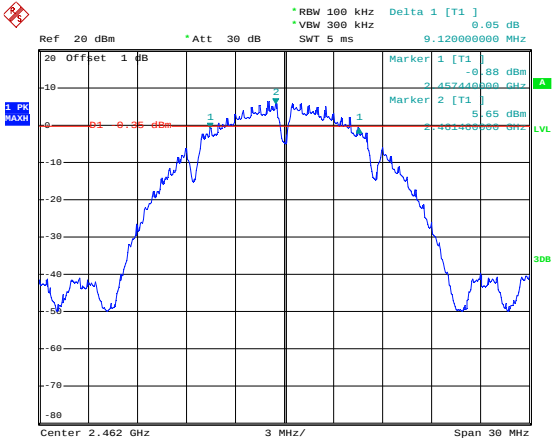
Antenna 1

802.11b-Low	 Date: 11.OCT.2021 12:52:23
802.11b-Middle	 Date: 11.OCT.2021 12:53:58
802.11b-High	 Date: 11.OCT.2021 12:55:07

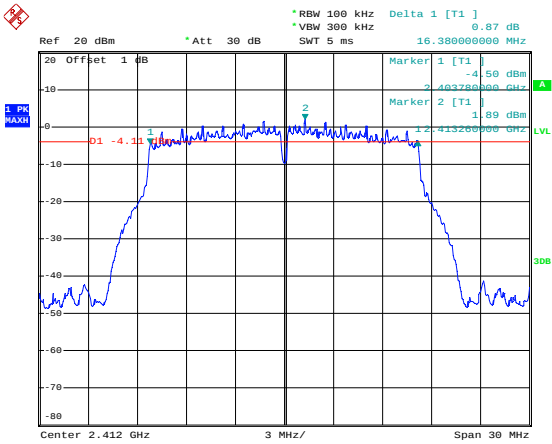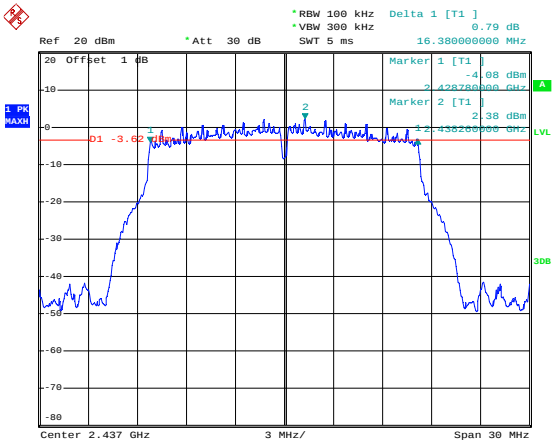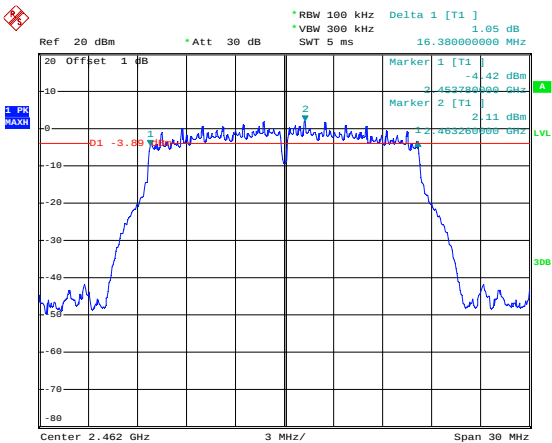
802.11g-Low	 Date: 11.OCT.2021 12:57:13
802.11g-Middle	 Date: 11.OCT.2021 12:58:19
802.11g-High	 Date: 11.OCT.2021 13:00:09

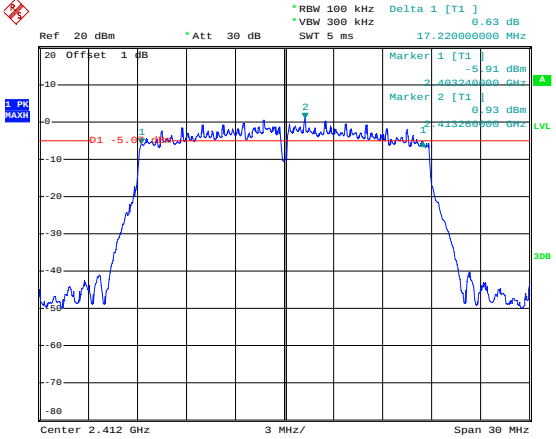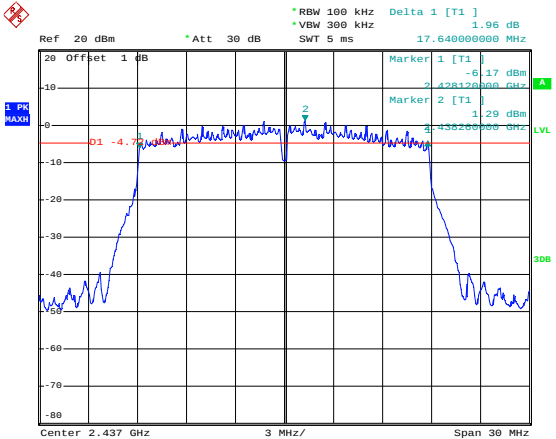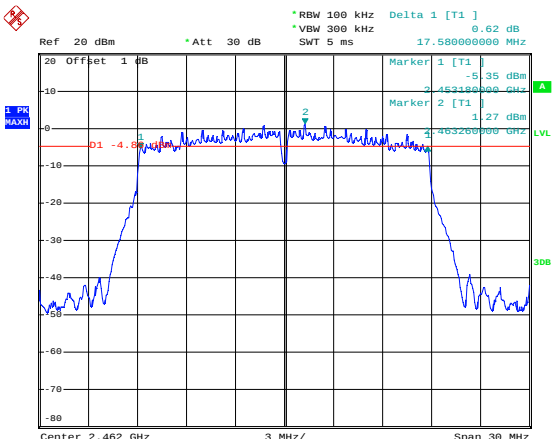802.11n-HT20-Low	 Date: 11.OCT.2021 13:01:21
802.11n-HT20-Middle	 Date: 11.OCT.2021 13:03:07
802.11n-HT20-High	 Date: 11.OCT.2021 13:04:49

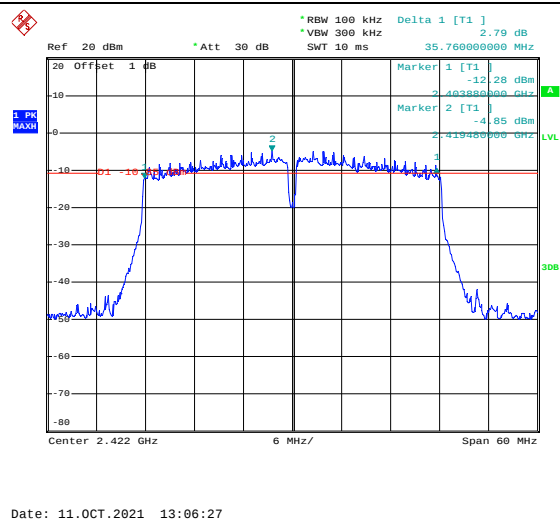
802.11n-HT40-Low








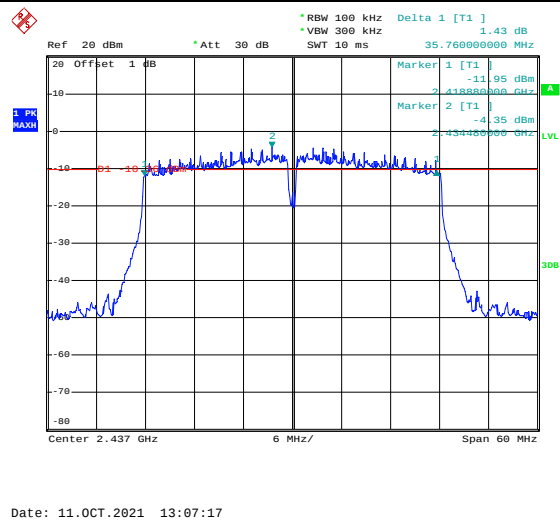
802.11n-HT40-Middle



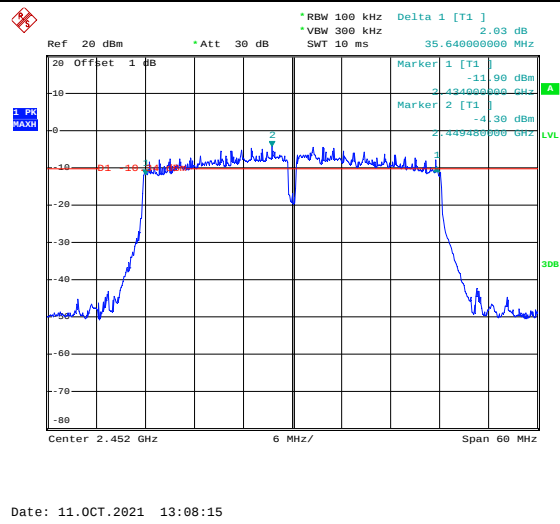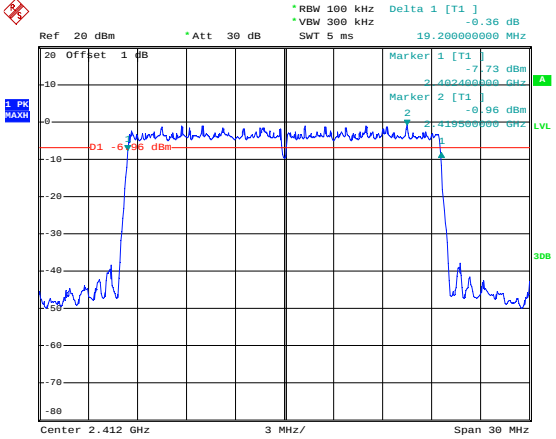
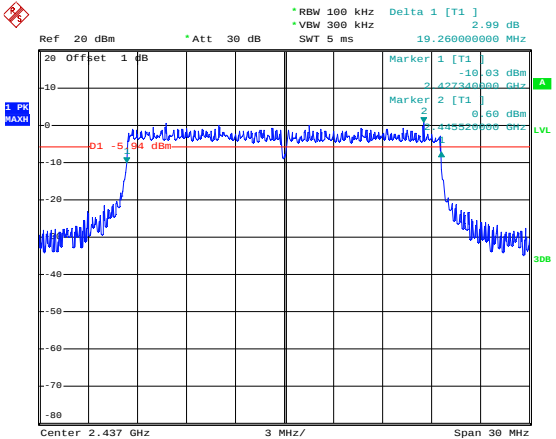
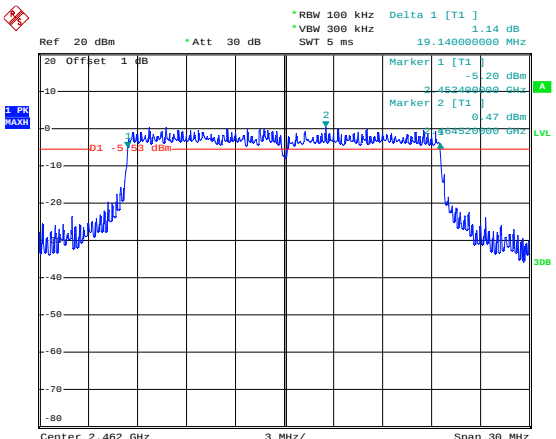
802.11n-HT40-High









802.11ax-AX20-Low	 Date: 12.OCT.2021 11:03:21
802.11ax-AX20-Middle	 Date: 12.OCT.2021 11:11:12
802.11ax-AX20-High	 Date: 12.OCT.2021 11:12:55

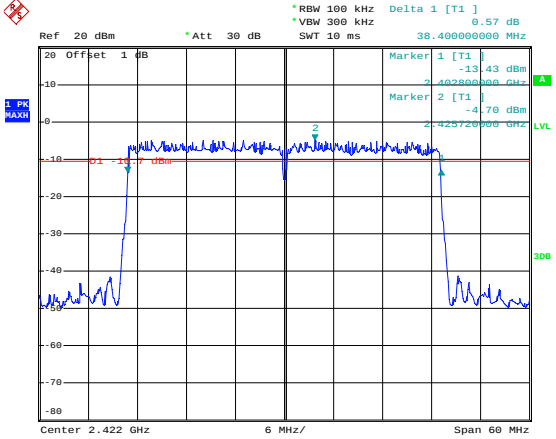
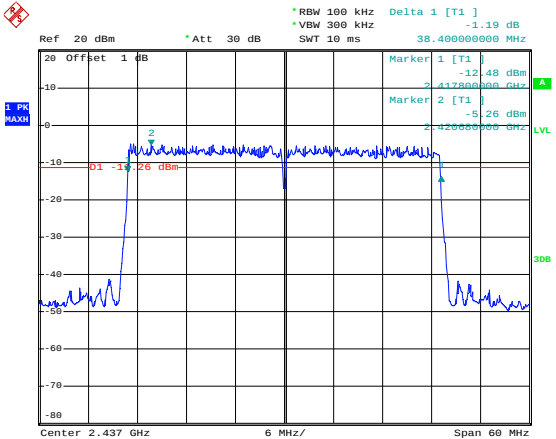
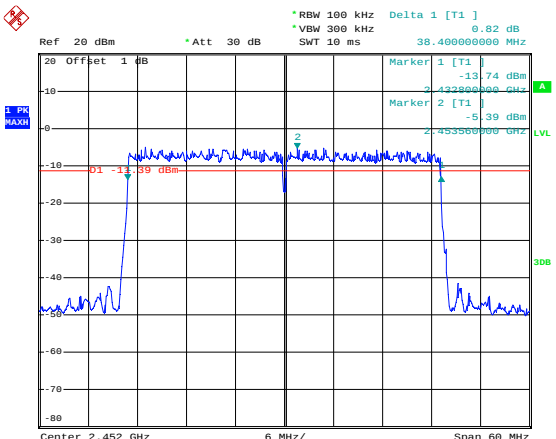
802.11ax-AX40-Low	 Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 0.57 dB *VBW 300 kHz SWT 10 ms 38.400000000 MHz Marker 1 [T1] -13.77 dBm Marker 2 [T1] -4.70 dBm Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:14:28
802.11ax-AX40-Middle	 Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] -1.19 dB *VBW 300 kHz SWT 10 ms 38.400000000 MHz Marker 1 [T1] -12.48 dBm Marker 2 [T1] -5.26 dBm Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:16:31
802.11ax-AX40-High	 Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 0.82 dB *VBW 300 kHz SWT 10 ms 38.400000000 MHz Marker 1 [T1] -13.74 dBm Marker 2 [T1] -5.39 dBm Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:18:14

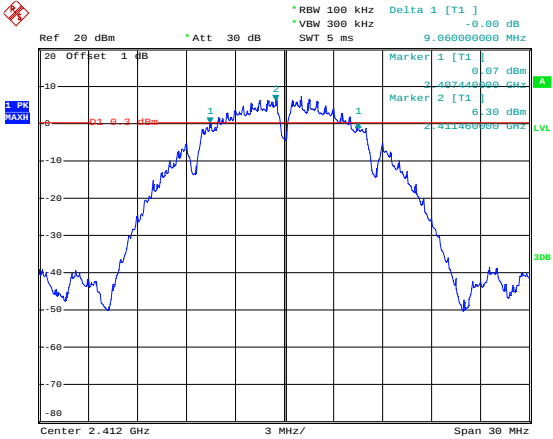
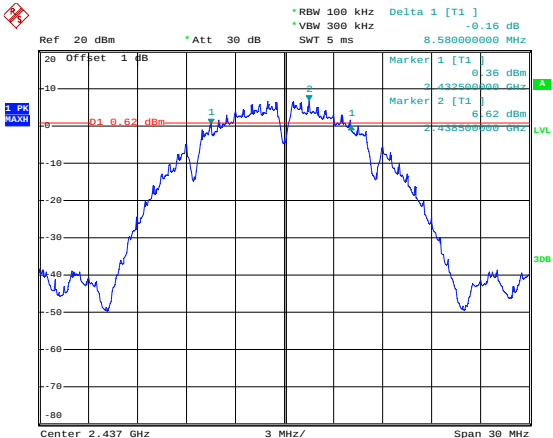
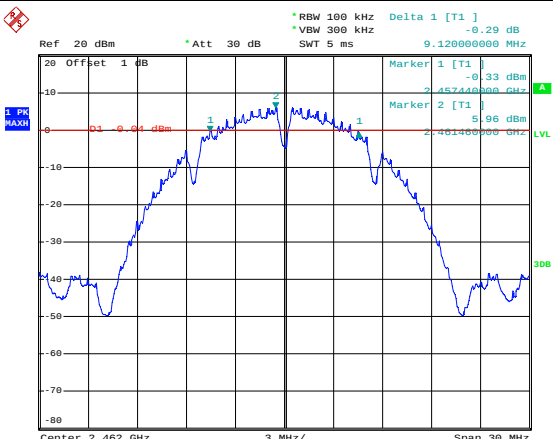
Antenna 2

802.11b-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] VBW 300 kHz -0.00 dB SWT 5 ms 9.060000000 MHz Marker 1 [T1] 0.07 dBm Marker 2 [T1] 6.30 dBm 2.412000000 GHz Center 2.412 GHz 3 MHz/ Span 30 MHz Date: 11.OCT.2021 18:54:13
802.11b-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] VBW 300 kHz -0.16 dB SWT 5 ms 8.580000000 MHz Marker 1 [T1] 0.36 dBm Marker 2 [T1] 6.62 dBm 2.437000000 GHz Center 2.437 GHz 3 MHz/ Span 30 MHz Date: 11.OCT.2021 18:57:33
802.11b-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] VBW 300 kHz -0.29 dB SWT 5 ms 9.120000000 MHz Marker 1 [T1] -0.33 dBm Marker 2 [T1] 5.96 dBm 2.462000000 GHz Center 2.462 GHz 3 MHz/ Span 30 MHz Date: 11.OCT.2021 18:59:04

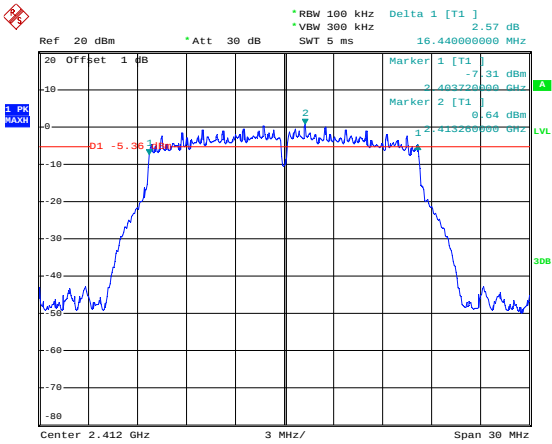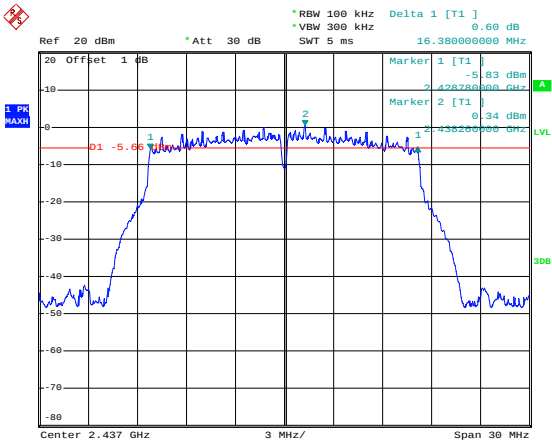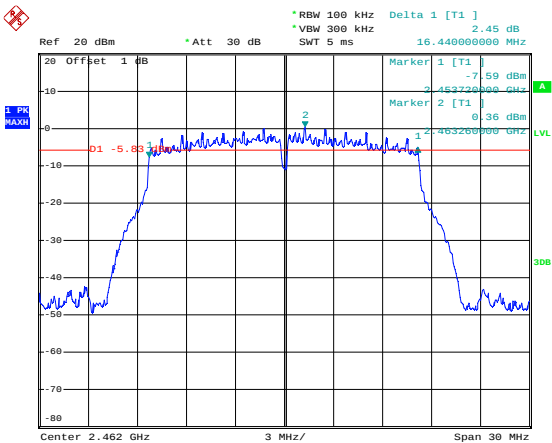802.11g-Low	 Date: 11.OCT.2021 19:00:06
802.11g-Middle	 Date: 11.OCT.2021 19:02:40
802.11g-High	 Date: 11.OCT.2021 19:03:54



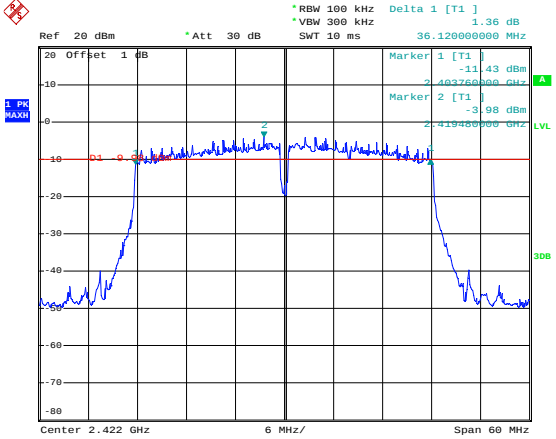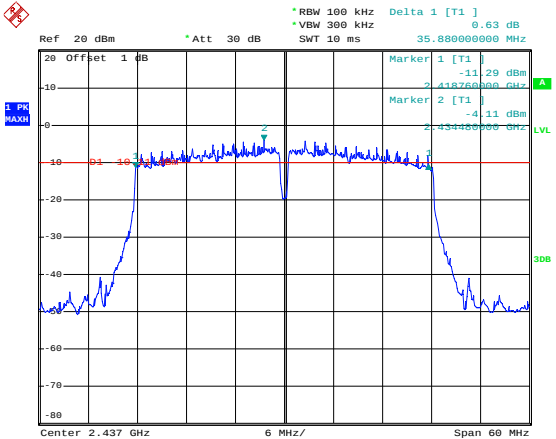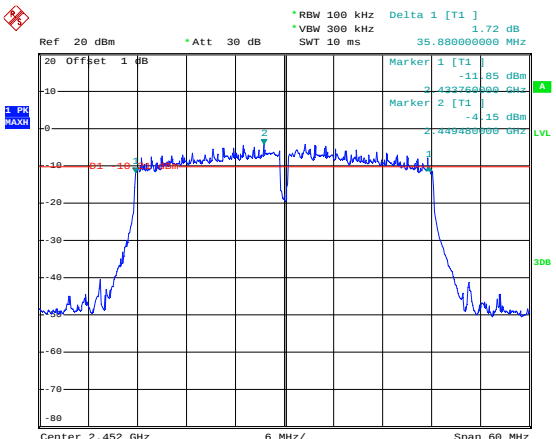802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 1.36 dB *RBW 100 kHz *VBW 300 kHz SWT 10 ms 36.120000000 MHz Marker 1 [T1] -11.43 dBm Marker 2 [T1] -3.98 dBm 2.422000000 GHz Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 10:58:43
802.11n-HT40-Middle	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.63 dB *RBW 100 kHz *VBW 300 kHz SWT 10 ms 35.880000000 MHz Marker 1 [T1] -11.29 dBm Marker 2 [T1] -4.11 dBm 2.437000000 GHz Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:00:10
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 1.72 dB *RBW 100 kHz *VBW 300 kHz SWT 10 ms 35.880000000 MHz Marker 1 [T1] -11.85 dBm Marker 2 [T1] -4.15 dBm 2.452000000 GHz Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:01:42

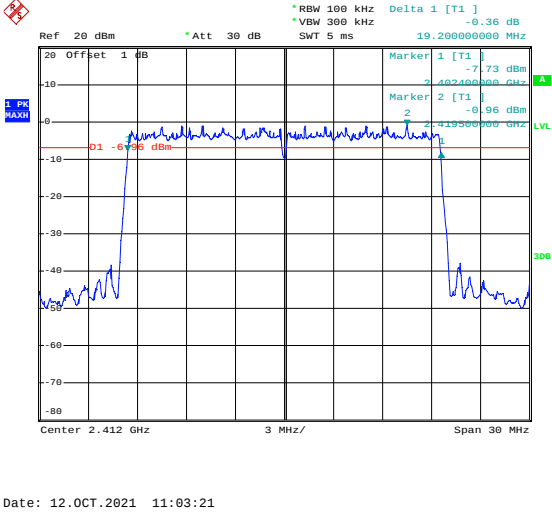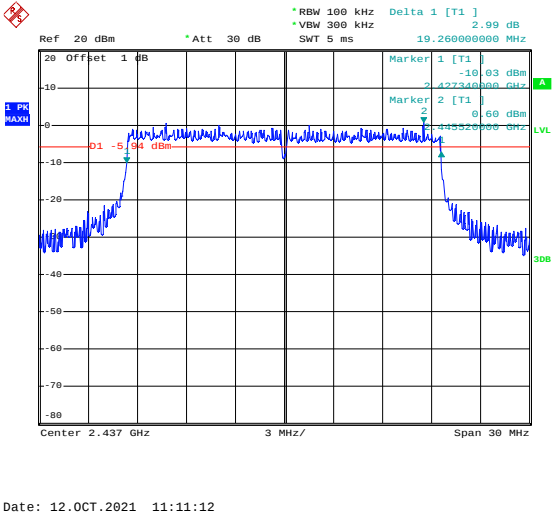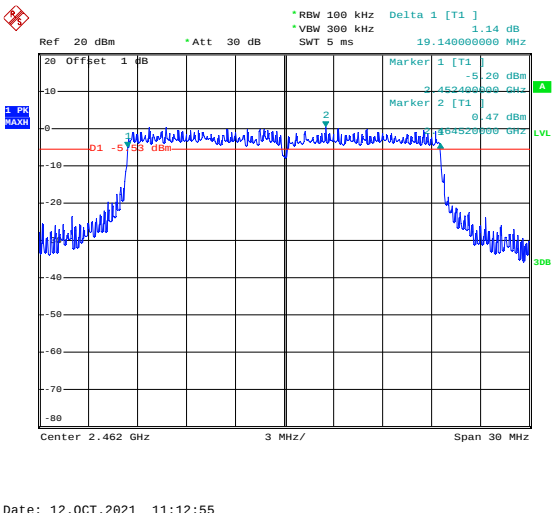802.11ax-AX20-Low	 Date: 12.OCT.2021 11:03:21
802.11ax-AX20-Middle	 Date: 12.OCT.2021 11:11:12
802.11ax-AX20-High	 Date: 12.OCT.2021 11:12:55

802.11ax-AX40-Low	Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.57 dB *RBW 100 kHz *VBW 300 kHz SWT 10 ms 38.400000000 MHz Marker 1 [T1] -13.43 dBm Marker 2 [T1] -4.70 dBm Center 2.422 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:14:28
802.11ax-AX40-Middle	Ref 20 dBm *Att 30 dB Delta 1 [T1] -1.19 dB *RBW 100 kHz *VBW 300 kHz SWT 10 ms 38.400000000 MHz Marker 1 [T1] -12.48 dBm Marker 2 [T1] -5.26 dBm Center 2.437 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:16:31
802.11ax-AX40-High	Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.82 dB *RBW 100 kHz *VBW 300 kHz SWT 10 ms 38.400000000 MHz Marker 1 [T1] -13.74 dBm Marker 2 [T1] -5.39 dBm Center 2.452 GHz 6 MHz/ Span 60 MHz Date: 12.OCT.2021 11:18:14




APPENDIX C




RF Output Power					
Test Mode	Frequency MHz	Antenna 1 dBm	Antenna 2 dBm	Total Power dBm	Limit dBm
802.11b_1Mbps	2412	18.00	18.65	/	30.00
	2437	18.36	18.15	/	30.00
	2462	18.28	18.07	/	30.00
802.11g_6Mbps	2412	16.64	16.00	/	30.00
	2437	16.72	15.28	/	30.00
	2462	16.86	15.37	/	30.00
802.11n-HT20_MCS0	2412	15.61	15.20	18.42	30.00
	2437	16.05	14.57	18.38	30.00
	2462	15.50	14.35	17.97	30.00
802.11n-HT40_MCS0	2422	13.07	13.90	16.52	30.00
	2437	13.22	13.62	16.43	30.00
	2452	13.19	13.23	16.22	30.00
802.11ax-HE20_MCS0	2412	15.99	15.96	18.99	30.00
	2437	15.93	15.36	18.66	30.00
	2462	15.97	15.95	18.97	30.00
802.11ax-HE40_MCS0	2422	13.94	14.40	17.19	30.00
	2437	14.26	14.20	17.24	30.00
	2452	14.21	14.06	17.15	30.00




Antenna 1




802.11b-Low	Date: 11.OCT.2021 12:05:49
802.11b-Middle	Date: 11.OCT.2021 12:11:14
802.11b-High	Date: 11.OCT.2021 12:11:53

802.11g-Low	Date: 11.OCT.2021 12:12:48
802.11g-Middle	Date: 11.OCT.2021 12:13:57
802.11g-High	Date: 11.OCT.2021 12:14:25

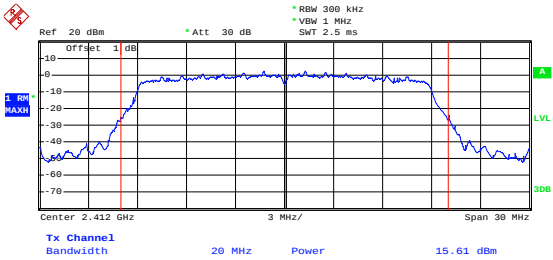
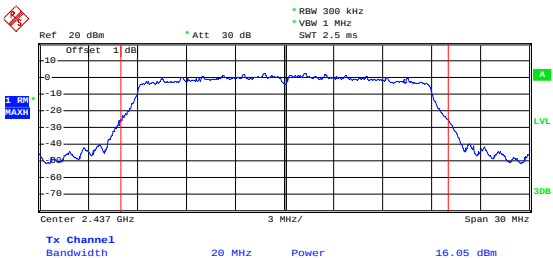
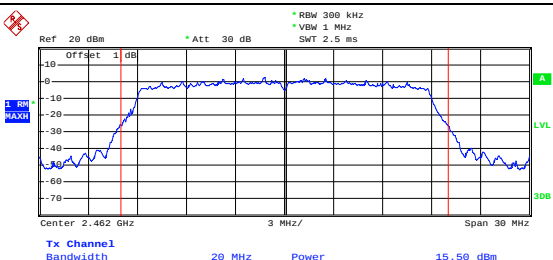
802.11n-HT20-Low	 Date: 11.OCT.2021 12:16:06
802.11n-HT20-Middle	 Date: 11.OCT.2021 12:16:38
802.11n-HT20-High	 Date: 11.OCT.2021 12:17:12

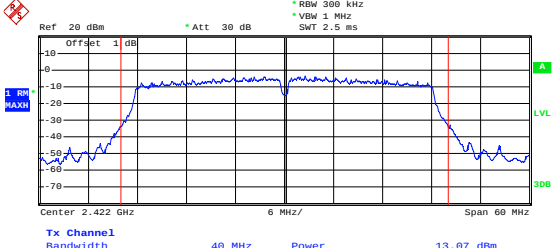
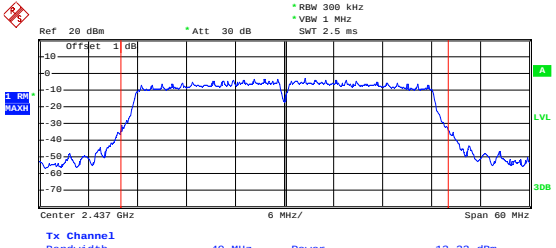
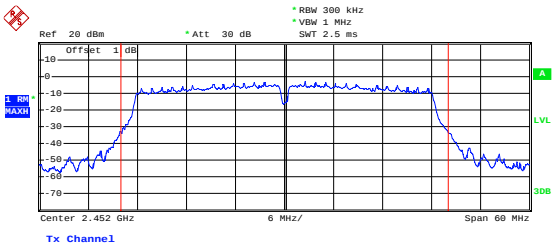
802.11n-HT40-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.422 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 13.97 dBm Date: 11.OCT.2021 12:19:47
802.11n-HT40-Middle	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.437 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 13.22 dBm Date: 11.OCT.2021 12:20:13
802.11n-HT40-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.452 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 13.19 dBm Date: 11.OCT.2021 12:20:40

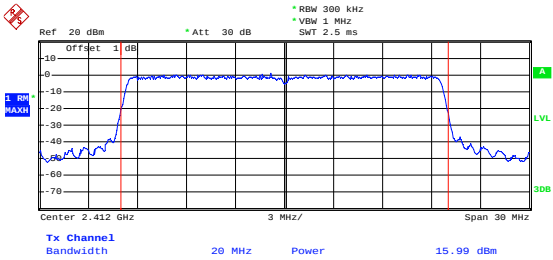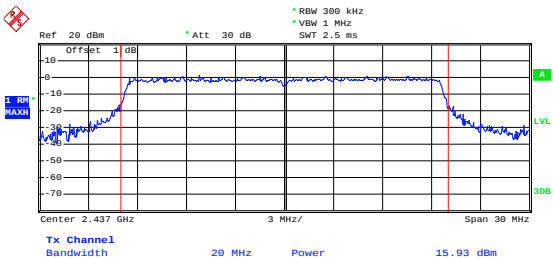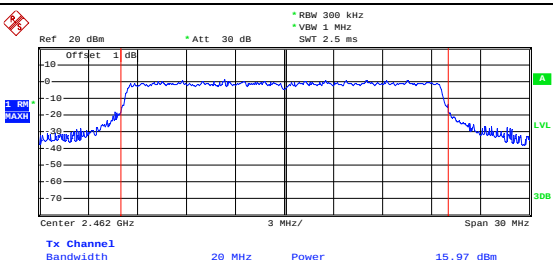802.11ax-HE20-Low	 Date: 11.OCT.2021 12:25:53
802.11ax-HE20-Middle	 Date: 11.OCT.2021 12:26:25
802.11ax-HE20-High	 Date: 11.OCT.2021 12:26:47

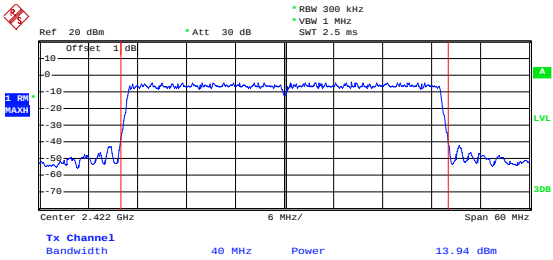
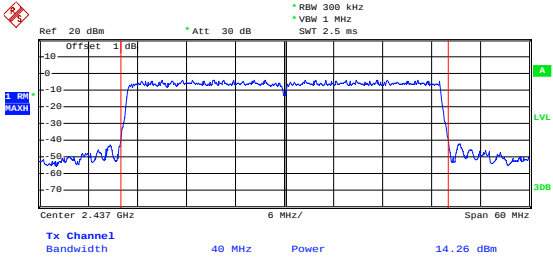
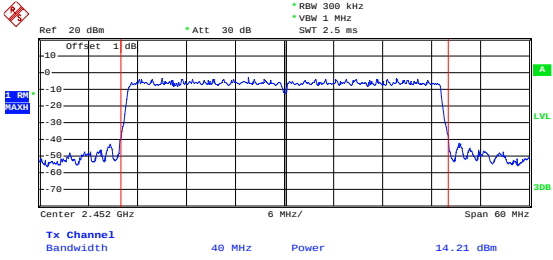
802.11ax-HE40-Low	 Ref 20 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.422 GHz 6 MHz/ Span 60 MHz Tx Channel1 Bandwidth 40 MHz Power 13.94 dBm 1.00 MAX A LVL 30B Date: 11.OCT.2021 12:29:55
802.11ax-HE40-Middle	 Ref 20 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.437 GHz 6 MHz/ Span 60 MHz Tx Channel1 Bandwidth 40 MHz Power 14.26 dBm 1.00 MAX A LVL 30B Date: 11.OCT.2021 12:30:26
802.11ax-HE40-High	 Ref 20 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.452 GHz 6 MHz/ Span 60 MHz Tx Channel1 Bandwidth 40 MHz Power 14.21 dBm 1.00 MAX A LVL 30B Date: 11.OCT.2021 12:31:03

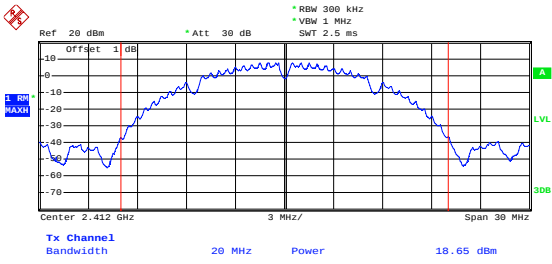
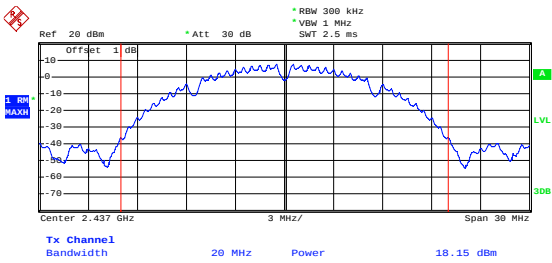
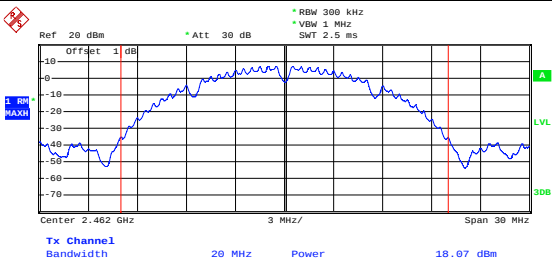
Antenna 2




802.11b-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Center 2.412 GHz Span 30 MHz 3 MHz/ Tx Channel1 Bandwidth 20 MHz Power 18.65 dBm Date: 11.OCT.2021 17:46:03
802.11b-Middle	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Center 2.437 GHz Span 30 MHz 3 MHz/ Tx Channel1 Bandwidth 20 MHz Power 18.15 dBm Date: 11.OCT.2021 17:46:42
802.11b-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Center 2.462 GHz Span 30 MHz 3 MHz/ Tx Channel1 Bandwidth 20 MHz Power 18.07 dBm Date: 11.OCT.2021 17:47:07

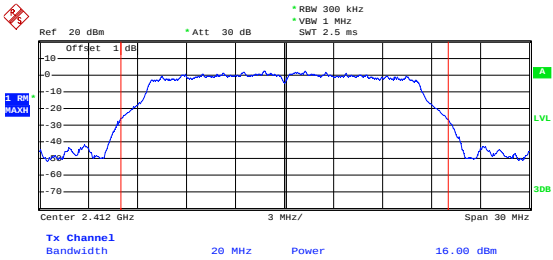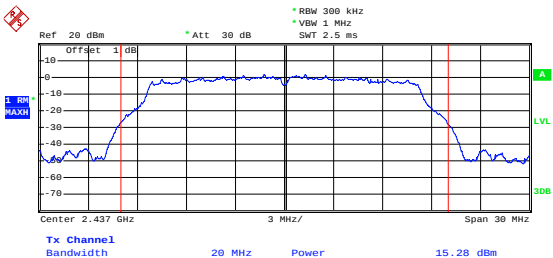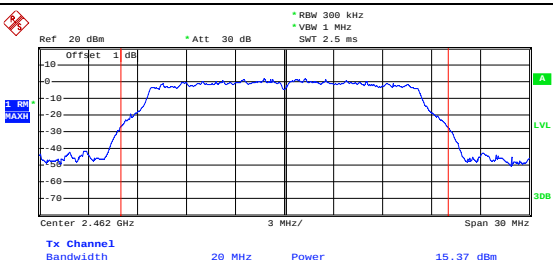802.11g-Low	 Ref 20 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.412 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 16.00 dBm Date: 11.OCT.2021 17:48:05
802.11g-Middle	 Ref 20 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.437 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.28 dBm Date: 11.OCT.2021 17:48:38
802.11g-High	 Ref 20 dBm * Att 30 dB * RBW 300 kHz * VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.462 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.37 dBm Date: 11.OCT.2021 17:49:10

802.11n-HT20-Low	Date: 11.OCT.2021 17:58:48
802.11n-HT20-Middle	Date: 11.OCT.2021 17:59:51
802.11n-HT20-High	Date: 11.OCT.2021 18:00:21

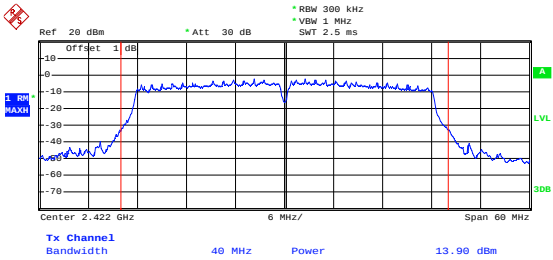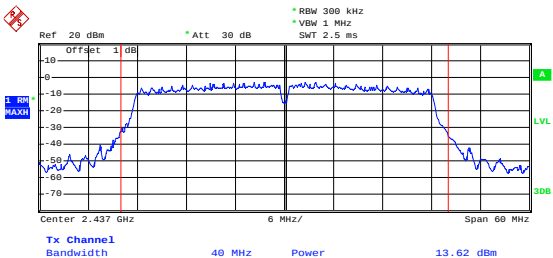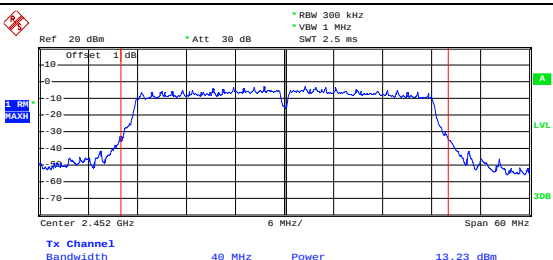802.11n-HT40-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.422 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 13.90 dBm Date: 11.OCT.2021 18:01:41
802.11n-HT40-Middle	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.437 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 13.62 dBm Date: 11.OCT.2021 18:02:06
802.11n-HT40-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.452 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 13.23 dBm Date: 11.OCT.2021 18:02:29

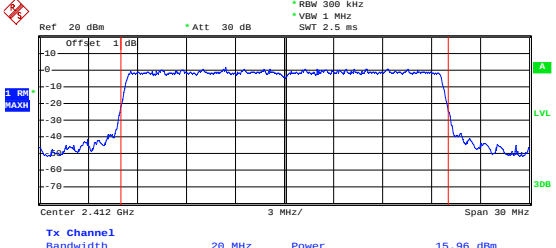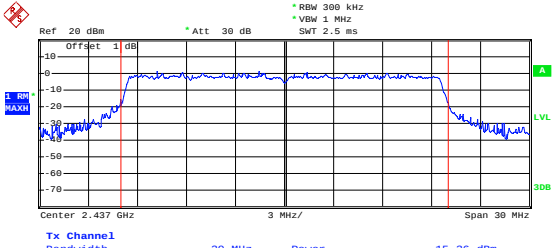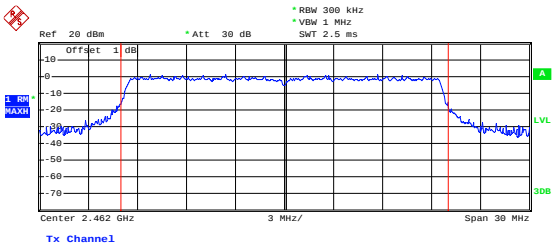802.11ax-HE20-Low	 Ref 20 dBm * Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.412 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.96 dBm 1.96 MAX A LVL 30dB Date: 11.OCT.2021 18:03:17
802.11ax-HE20-Middle	 Ref 20 dBm * Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.437 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.36 dBm 1.66 MAX A LVL 30dB Date: 11.OCT.2021 18:03:50
802.11ax-HE20-High	 Ref 20 dBm * Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Offset 1 dB Center 2.462 GHz 3 MHz/ Span 30 MHz Tx Channel1 Bandwidth 20 MHz Power 15.95 dBm 1.96 MAX A LVL 30dB Date: 11.OCT.2021 18:04:17

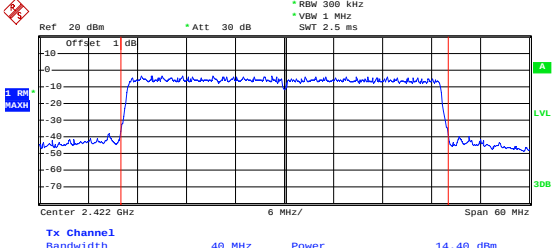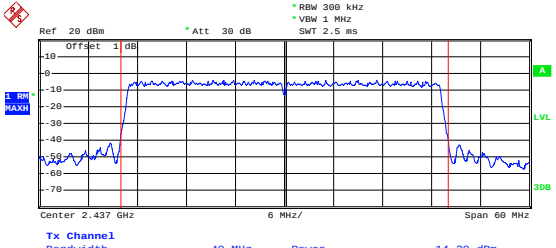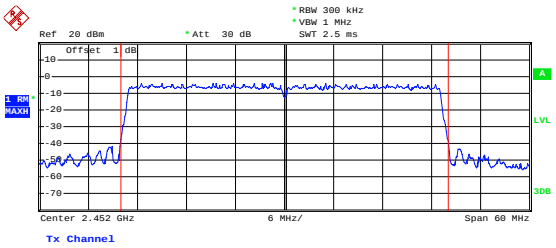
802.11ax-HE40-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.422 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 14.40 dBm Date: 11.OCT.2021 18:05:02
802.11ax-HE40-Middle	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.437 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 14.20 dBm Date: 11.OCT.2021 18:05:33
802.11ax-HE40-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 300 kHz VBW 1 MHz SMT 2.5 ms Center 2.452 GHz 6 MHz/ Span 60 MHz Tx Channel Bandwidth 40 MHz Power 14.06 dBm Date: 11.OCT.2021 18:05:55

APPENDIX D


Conducted Out of Band Emissions

Antenna 1

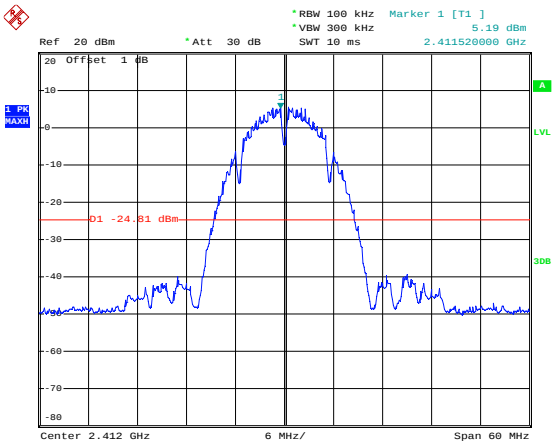802.11b-Low





Date: 11.OCT.2021 17:08:17

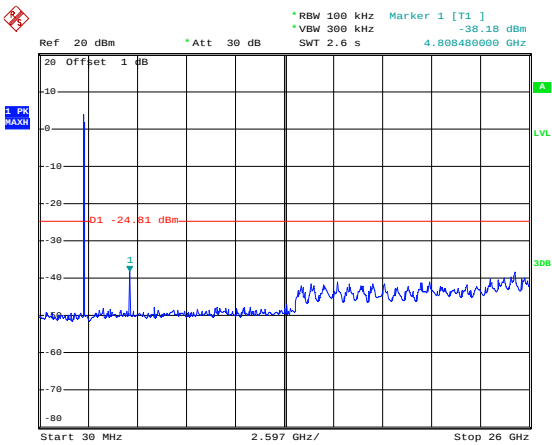





Date: 11.OCT.2021 17:08:50

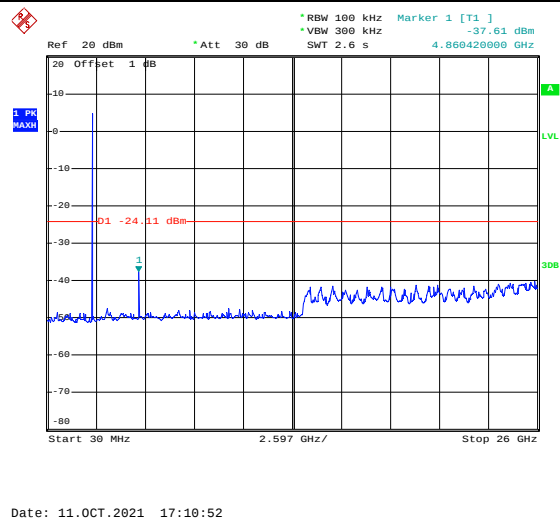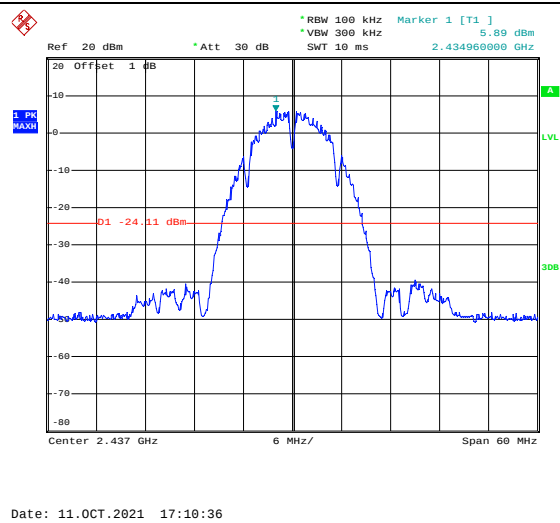802.11b-Middle





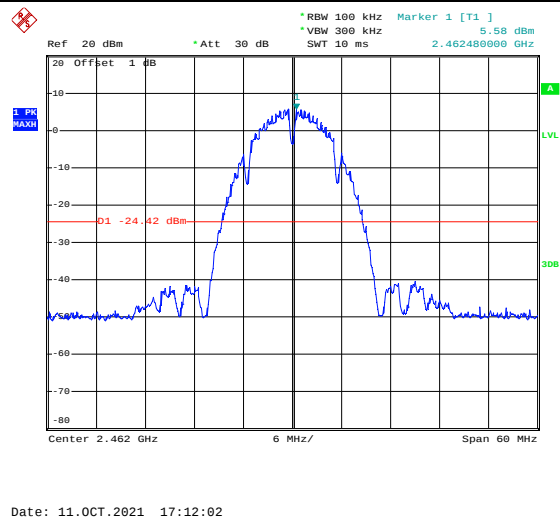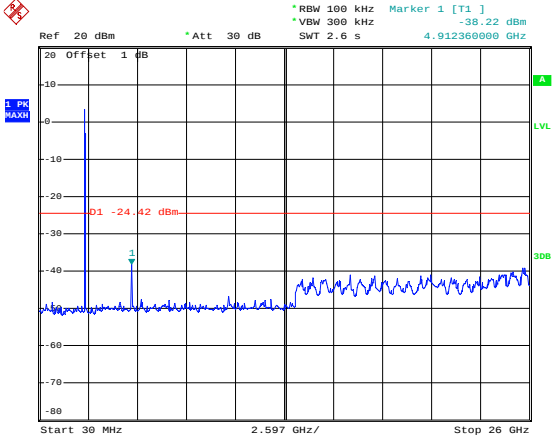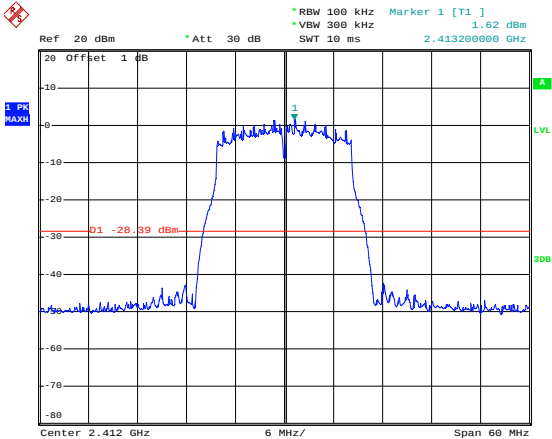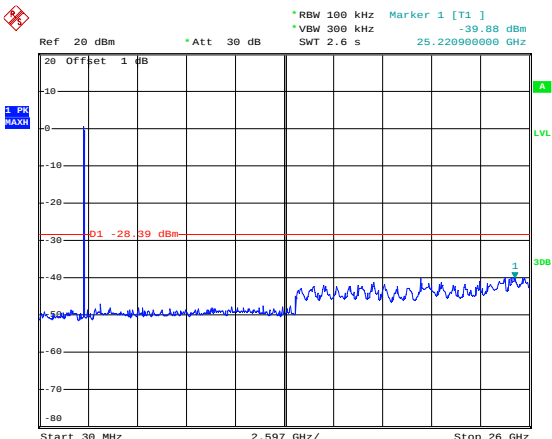802.11b-High







	 Date: 11.OCT.2021 17:12:15
802.11g-Low	 Date: 11.OCT.2021 17:13:24
	 Date: 11.OCT.2021 17:13:47

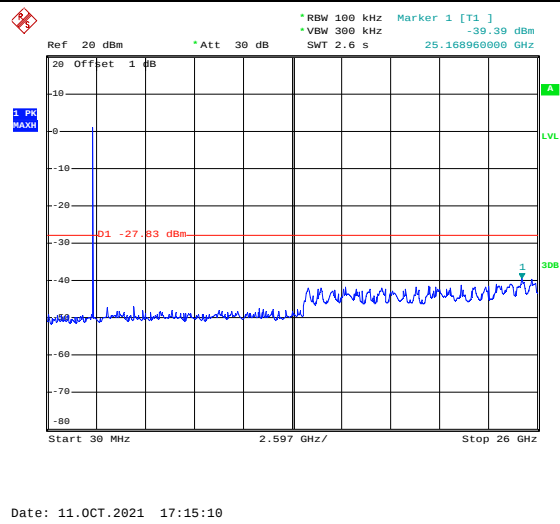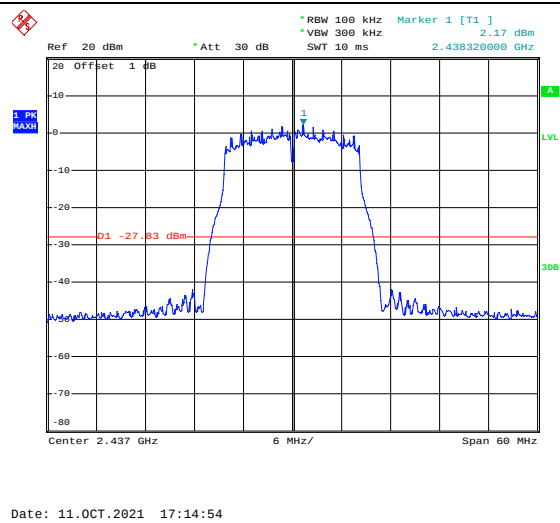802.11g-Middle





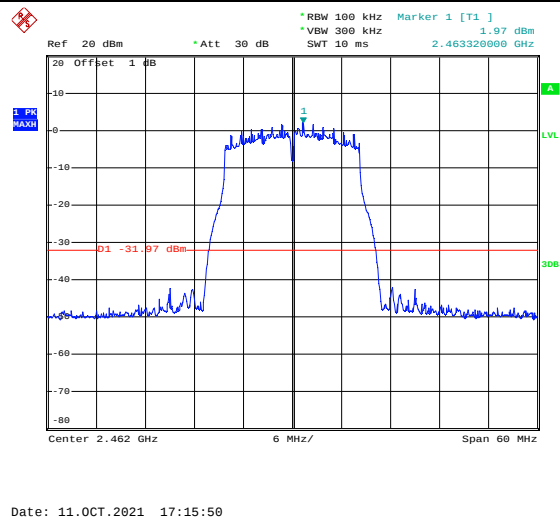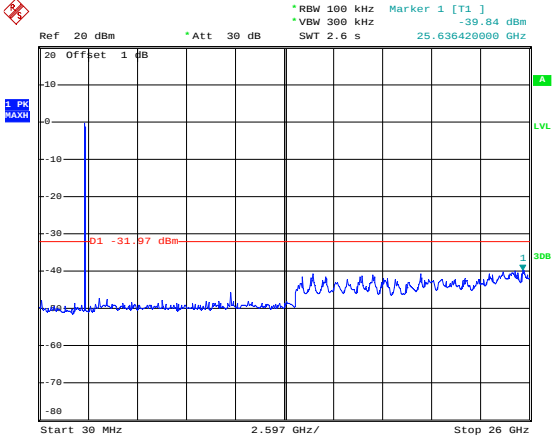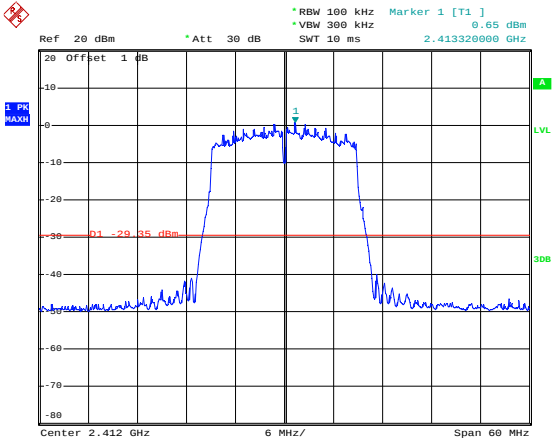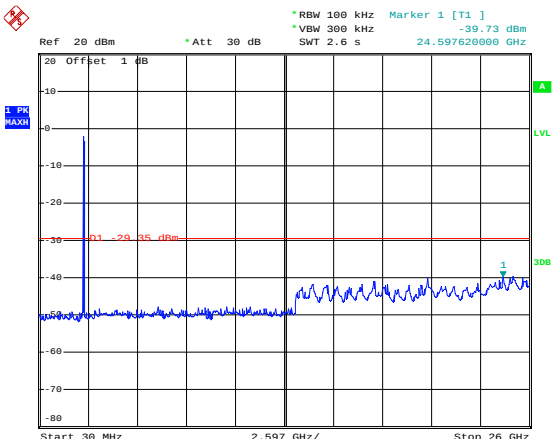802.11g-High







	 Date: 11.OCT.2021 17:16:11
802.11n-HT20-Low	 Date: 11.OCT.2021 17:18:03
	 Date: 11.OCT.2021 17:18:20

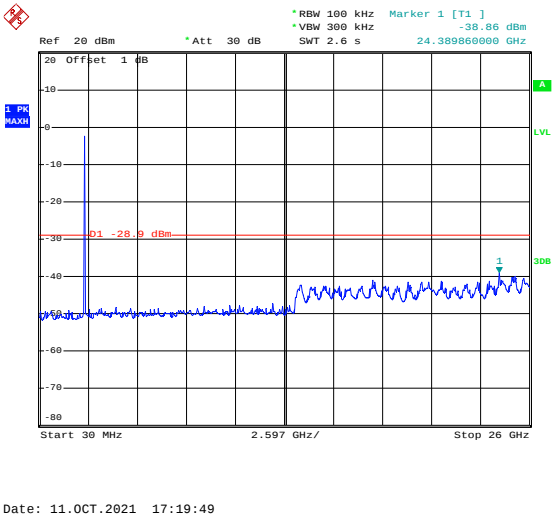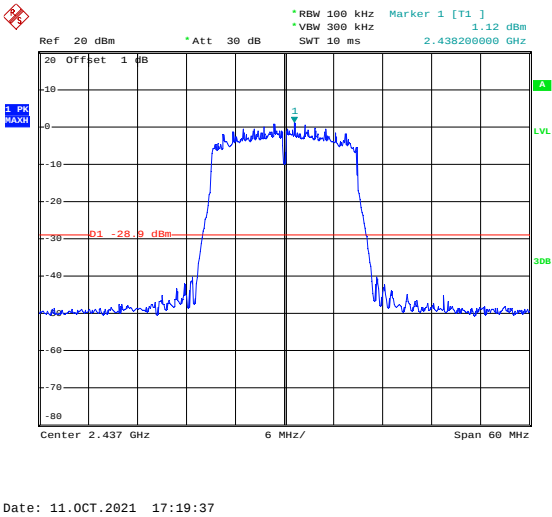802.11n-HT20-Middle





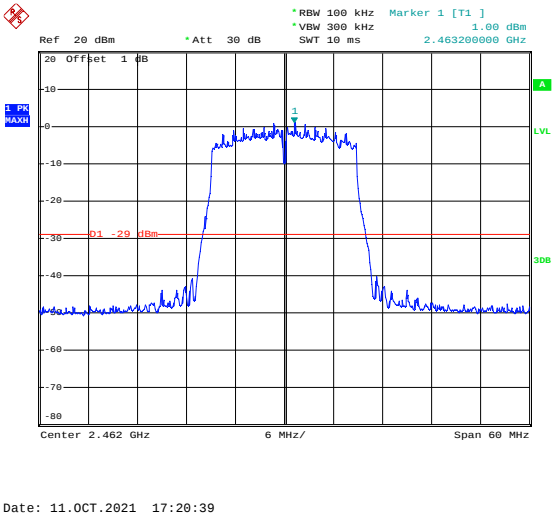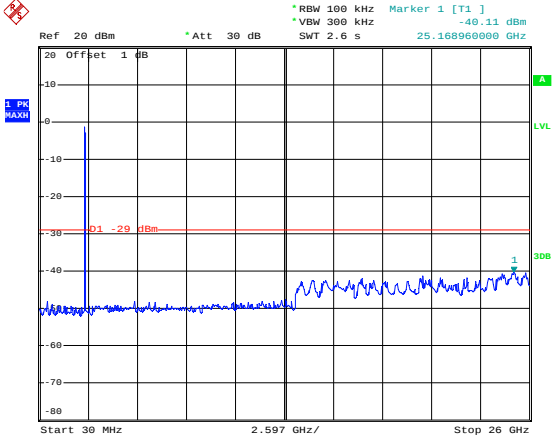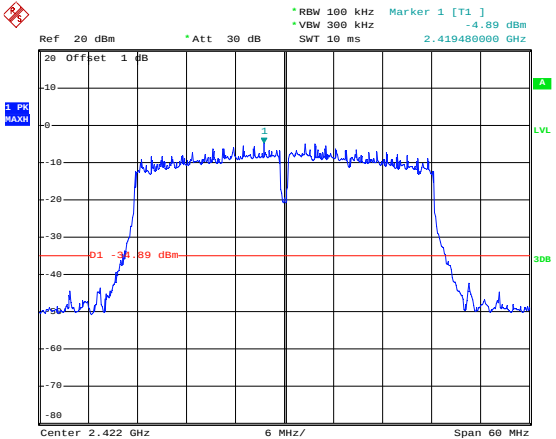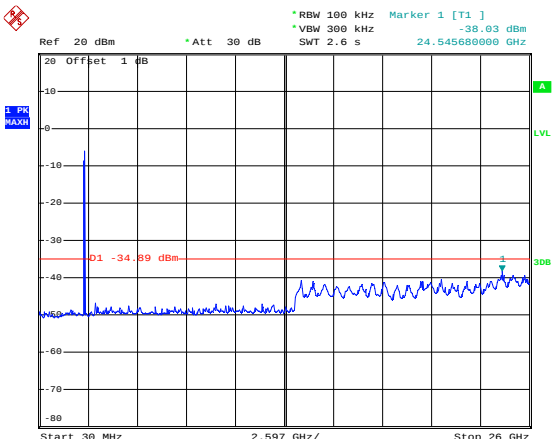802.11n-HT20-High







	 Date: 11.OCT.2021 17:20:56
802.11n-HT40-Low	 Date: 11.OCT.2021 17:22:56
	 Date: 11.OCT.2021 17:23:40

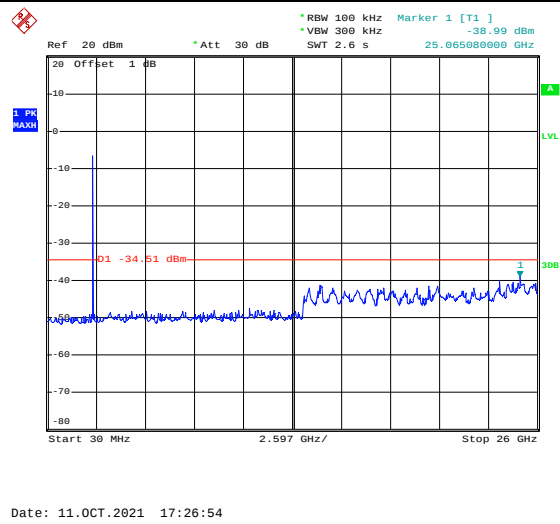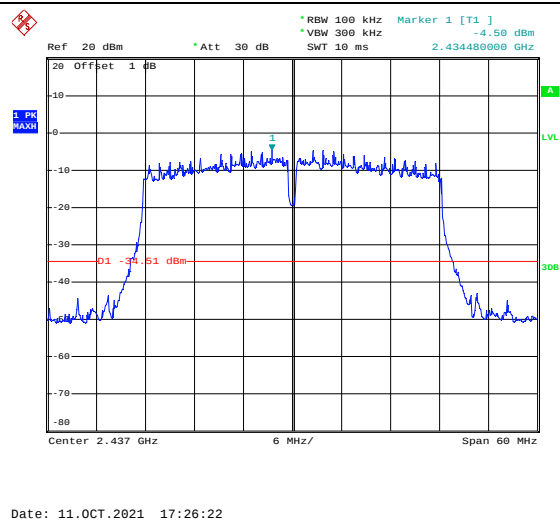802.11n-HT40-Middle





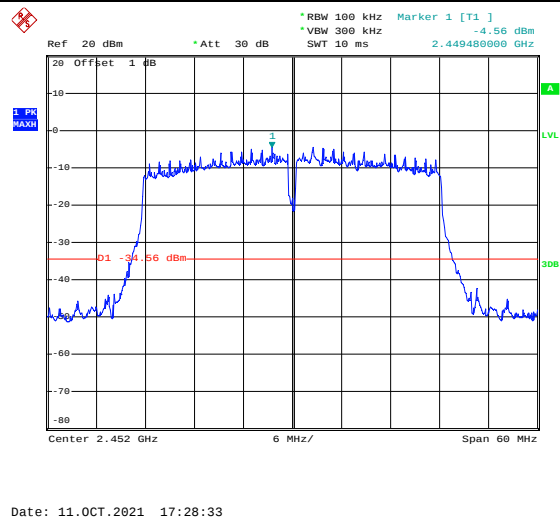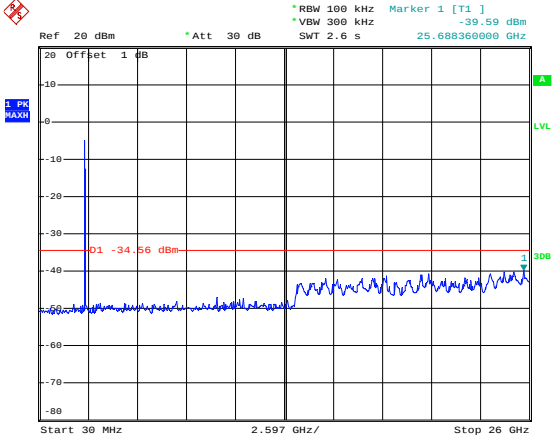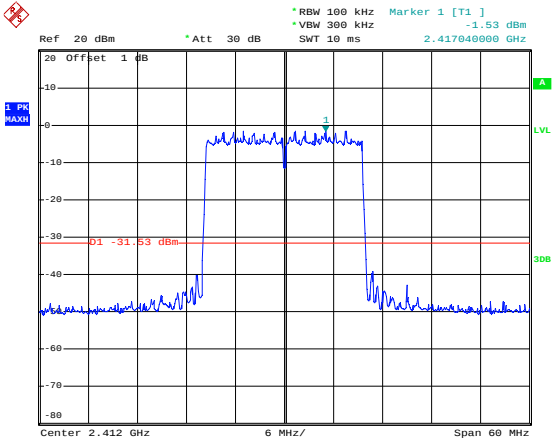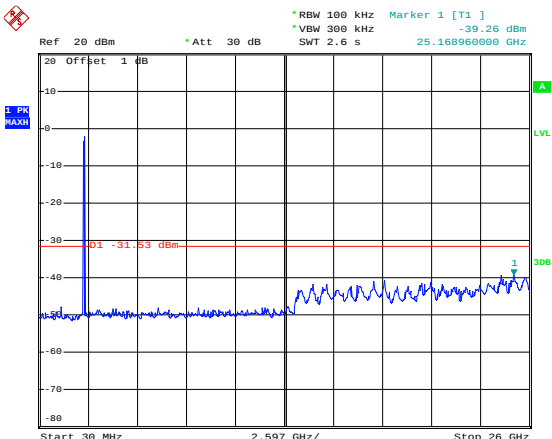802.11n-HT40-High







	 Date: 11.OCT.2021 17:28:47
802.11ax-HE20-Low	 Date: 11.OCT.2021 17:29:56
	 Date: 11.OCT.2021 17:30:08

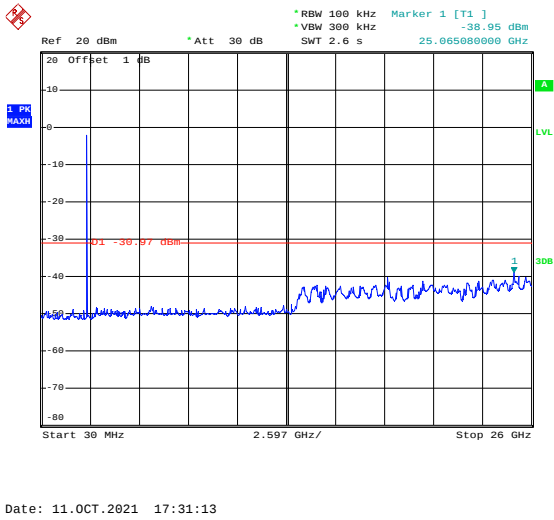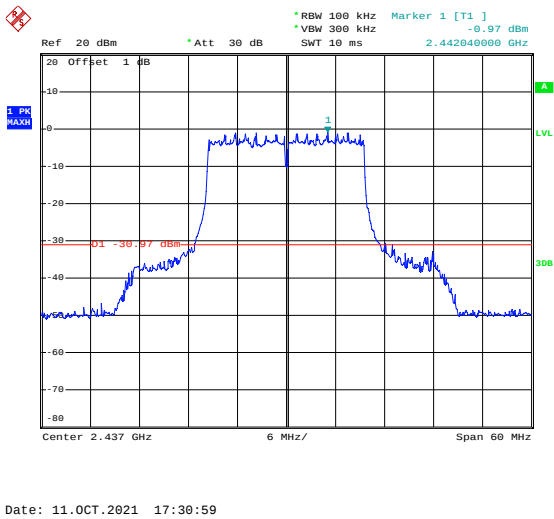802.11ax-HE20-Middle





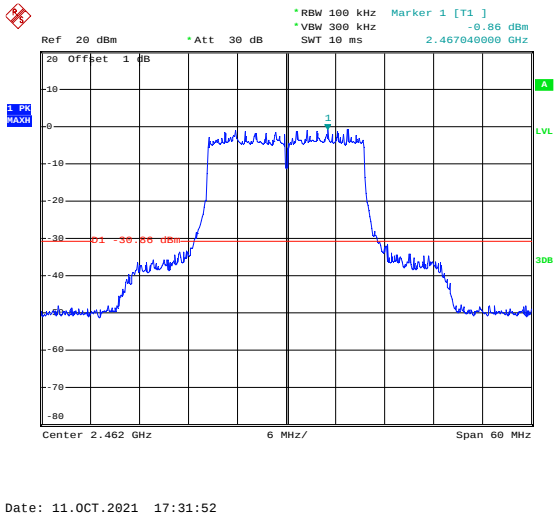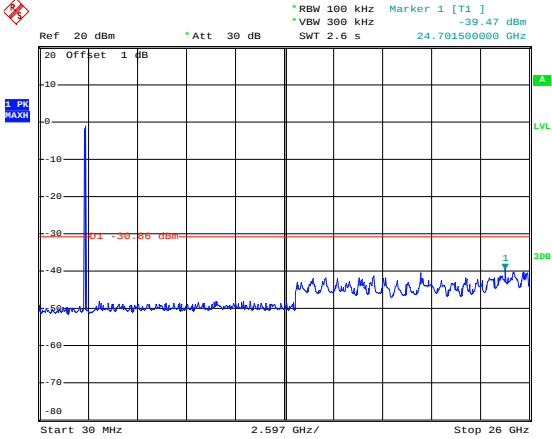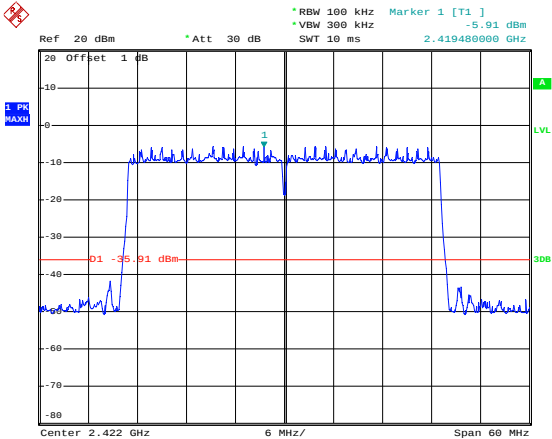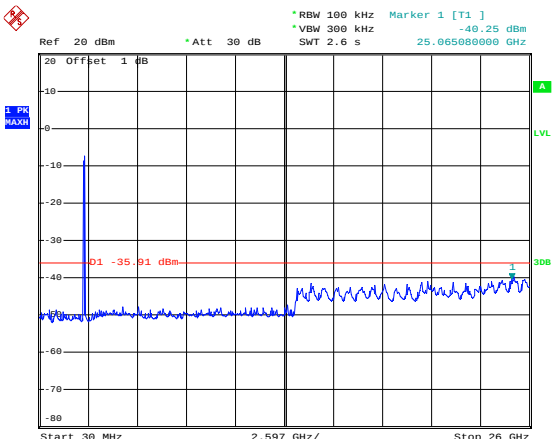802.11ax-HE20-High





	 Date: 11.OCT.2021 17:32:03
802.11ax-HE40-Low	 Date: 11.OCT.2021 17:32:40
	 Date: 11.OCT.2021 17:32:52

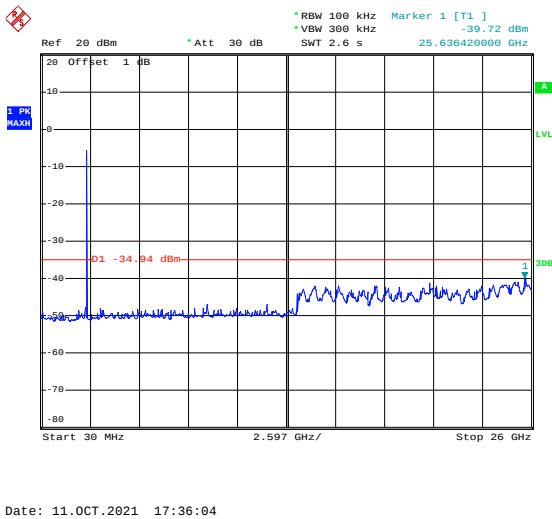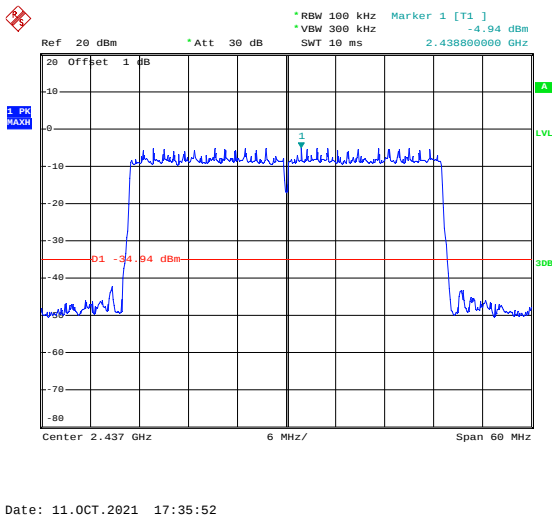802.11ax-HE40-Middle



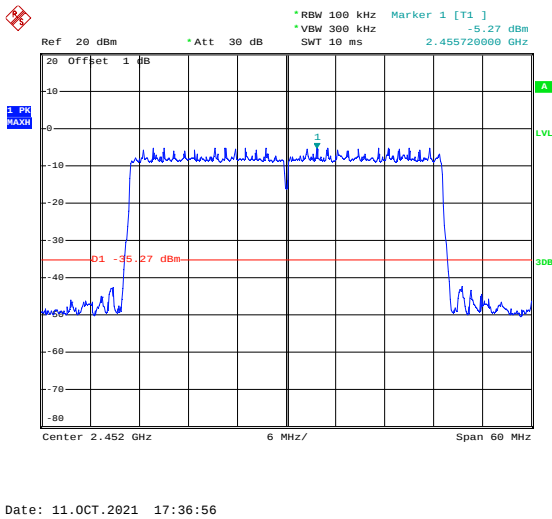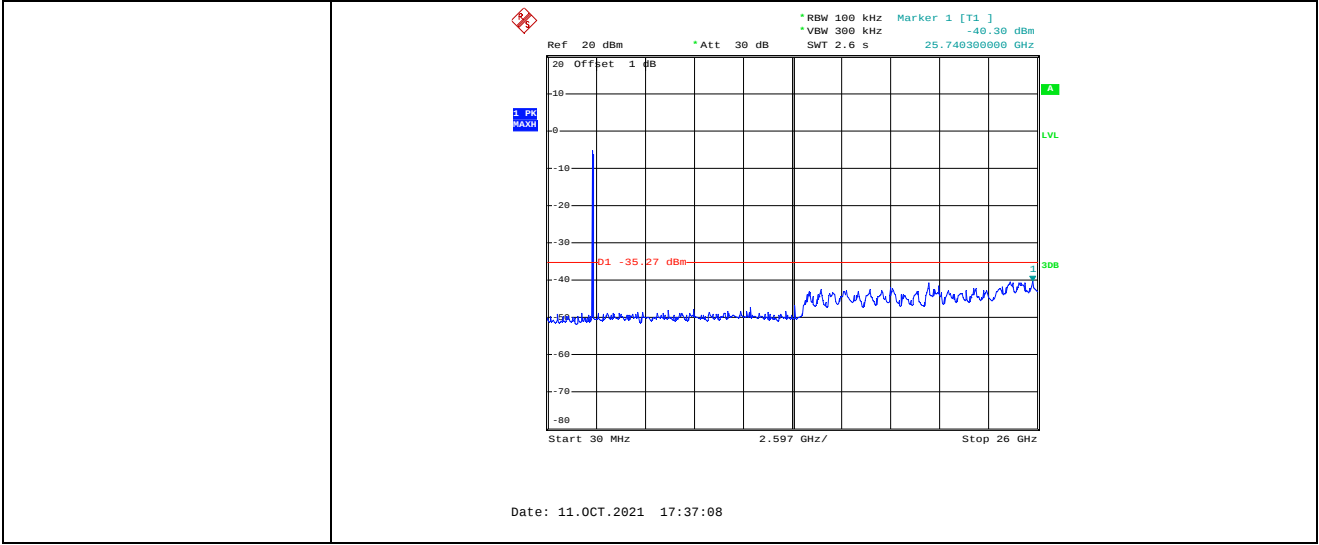
802.11ax-HE40-High






Antenna 2

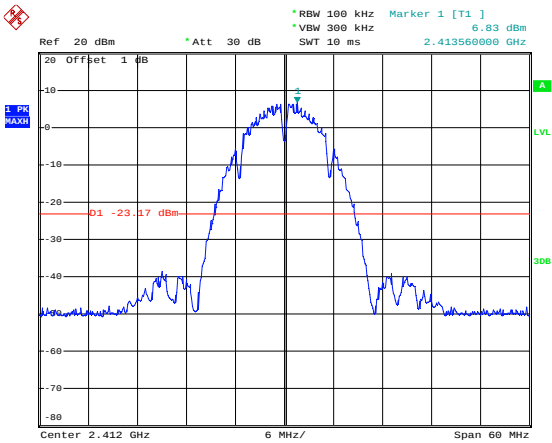802.11b-Low




Date: 12.OCT.2021 11:22:42



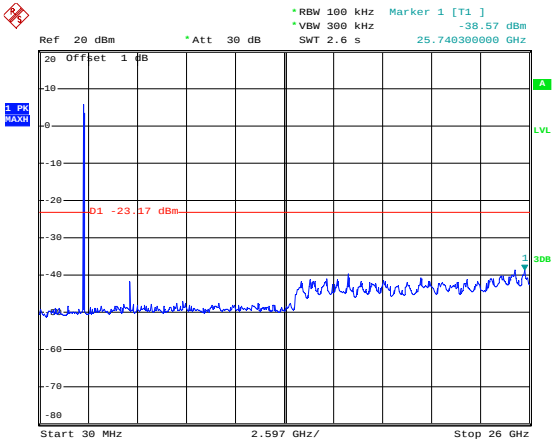


Date: 12.OCT.2021 11:23:17


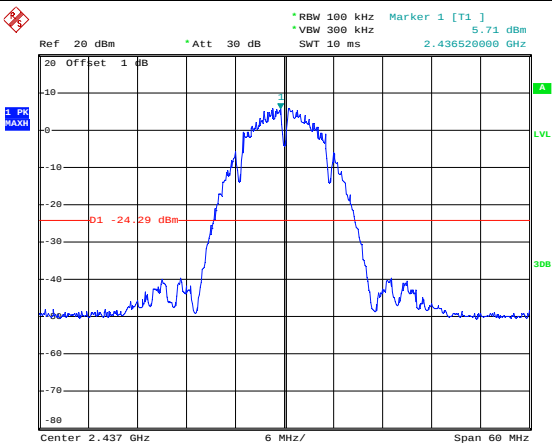
802.11b-Middle




Date: 12.OCT.2021 11:24:32

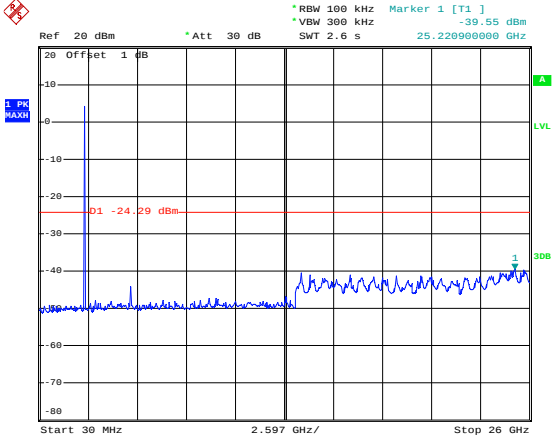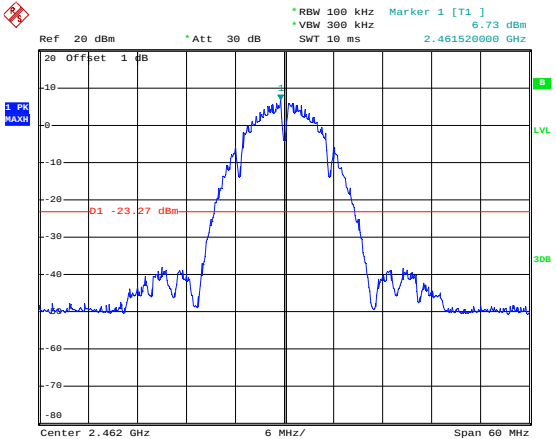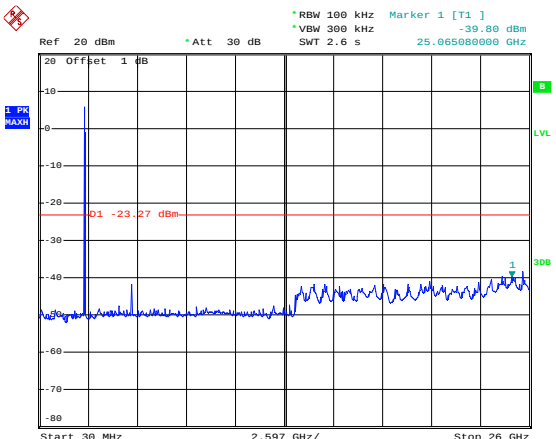
	 Date: 12.OCT.2021 11:24:55
802.11b-High	 Date: 12.OCT.2021 11:32:35
	 Date: 12.OCT.2021 11:32:55

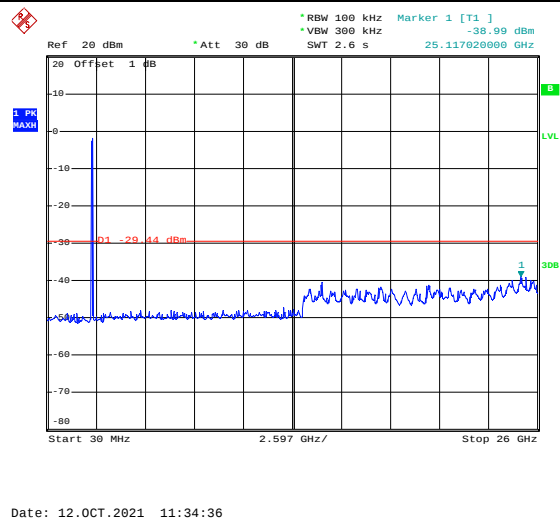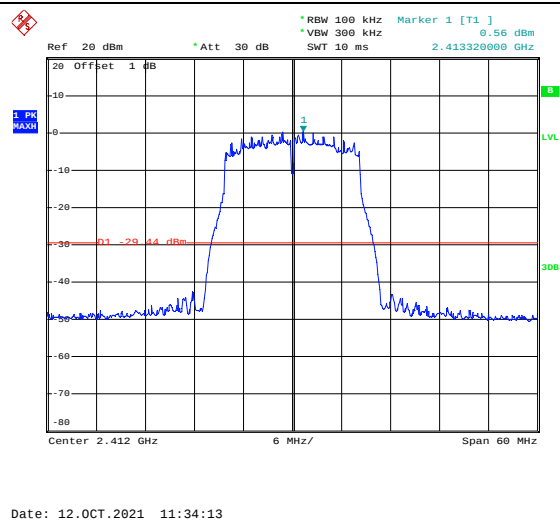802.11g-Low




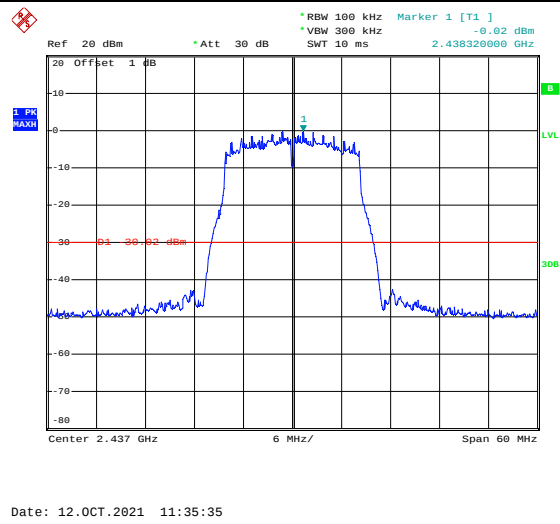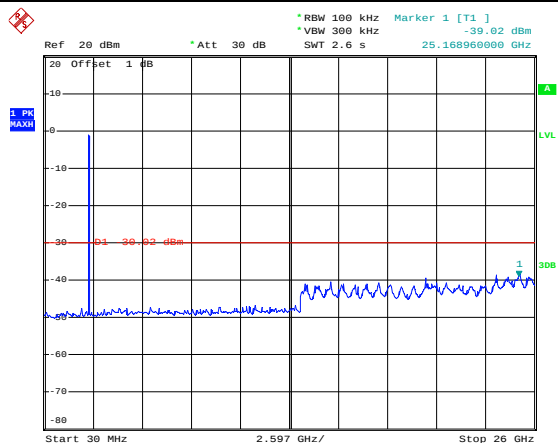802.11g-Middle






Date: 13.OCT.2021 10:12:09

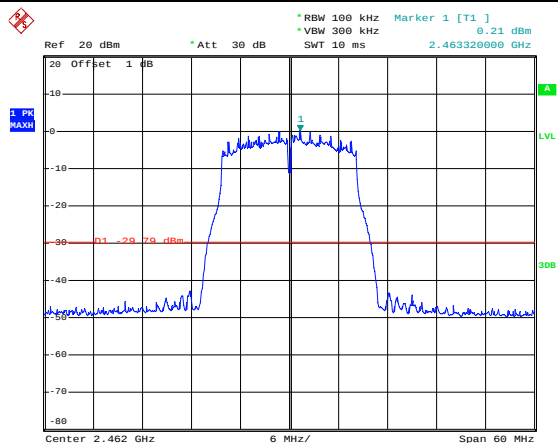



Date: 13.OCT.2021 10:15:16

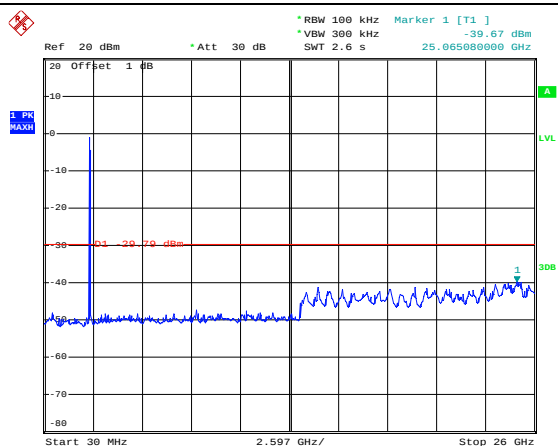802.11g-High




Date: 13.OCT.2021 10:15:28

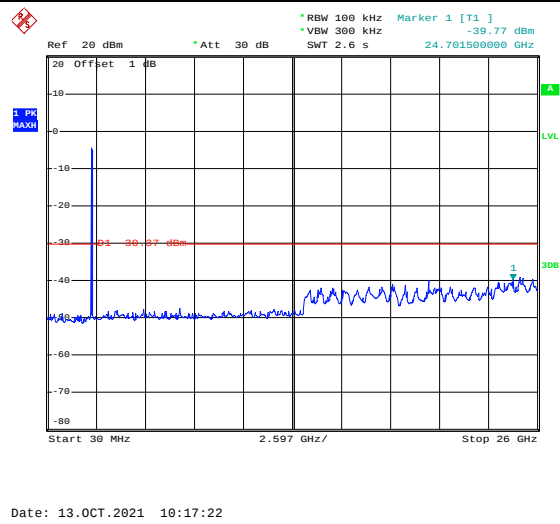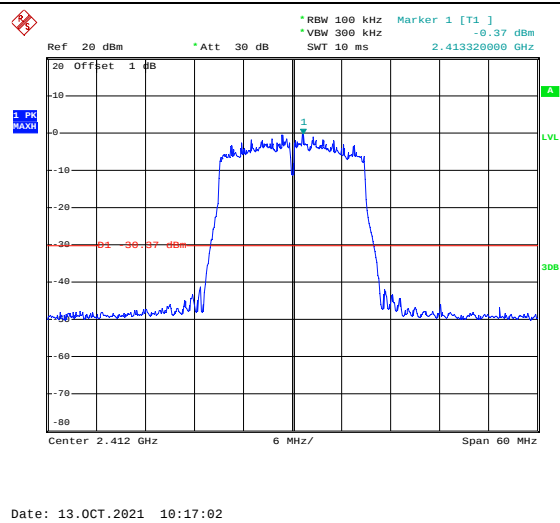802.11n-HT20-Low



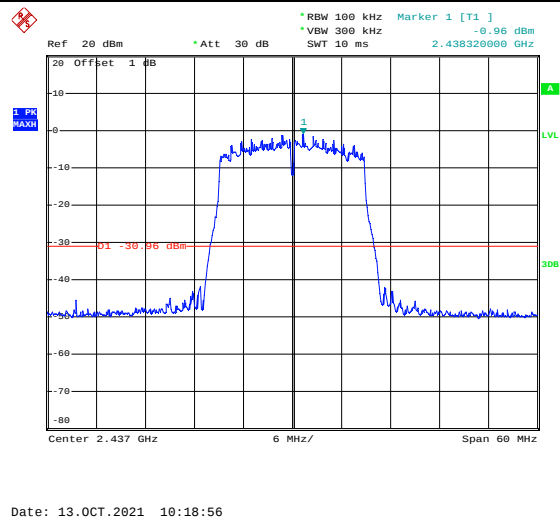802.11n-HT20-Middle





Date: 13.OCT.2021 10:19:16


Date: 13.OCT.2021 10:20:38




Date: 13.OCT.2021 10:21:33

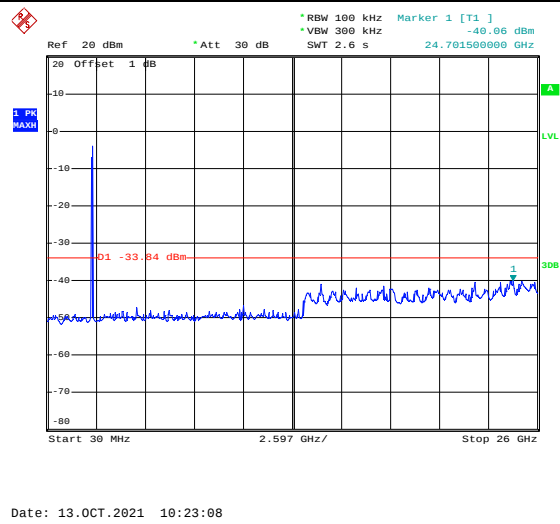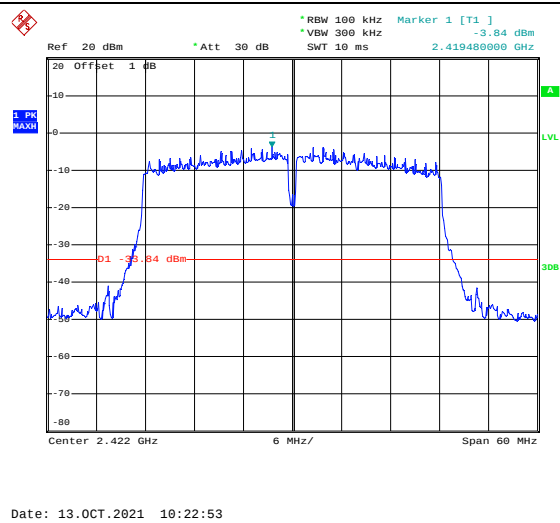802.11n-HT40-Low




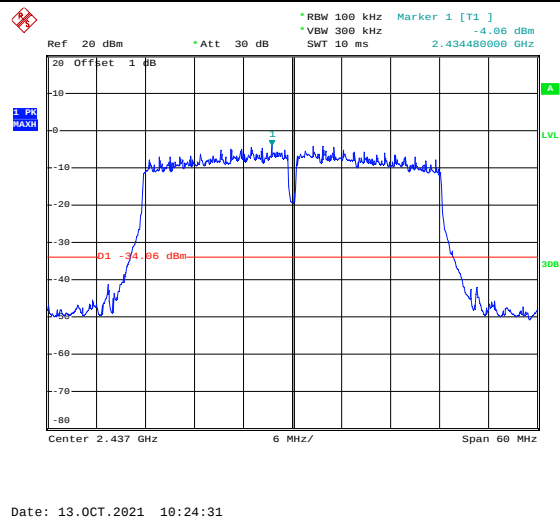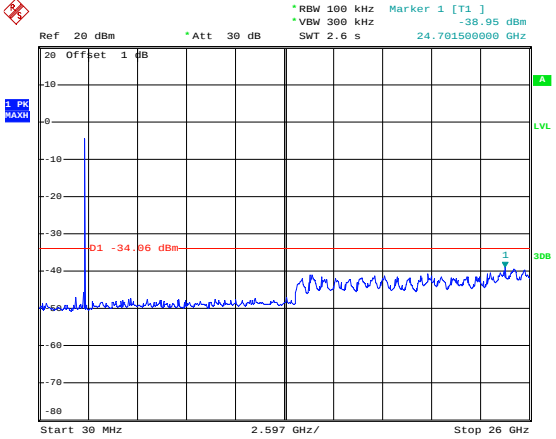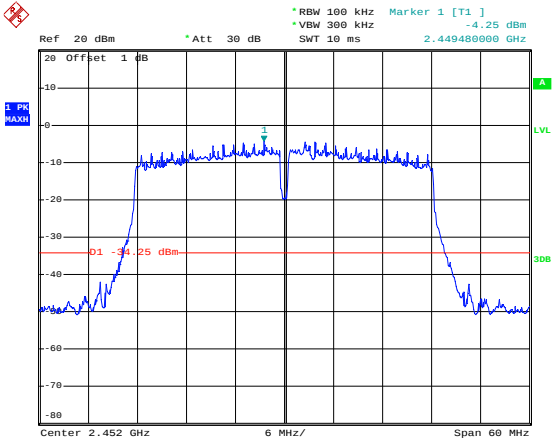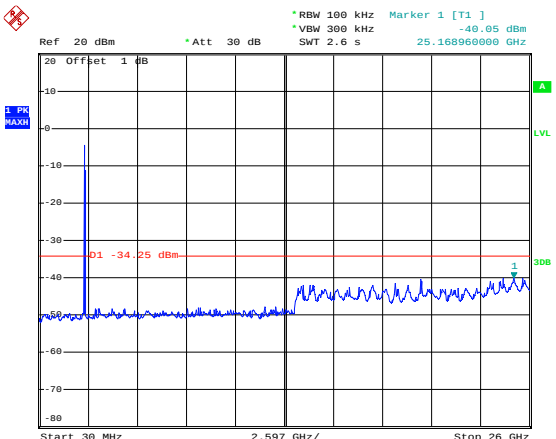802.11n-HT40-Middle







	 Date: 13.OCT.2021 10:25:22
802.11n-HT40-High	 Date: 13.OCT.2021 10:26:08
	 Date: 13.OCT.2021 10:26:19

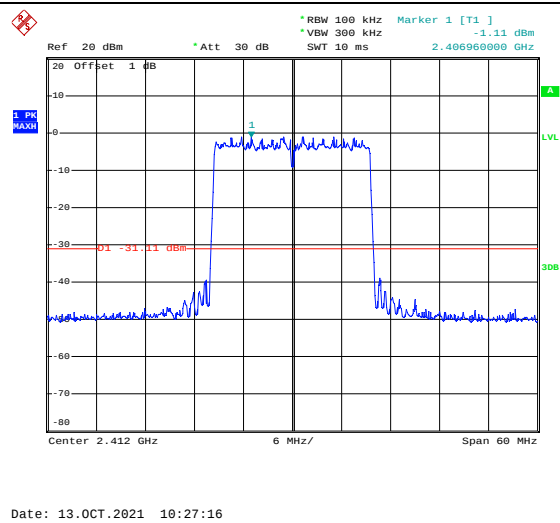802.11ax-HE20-Low




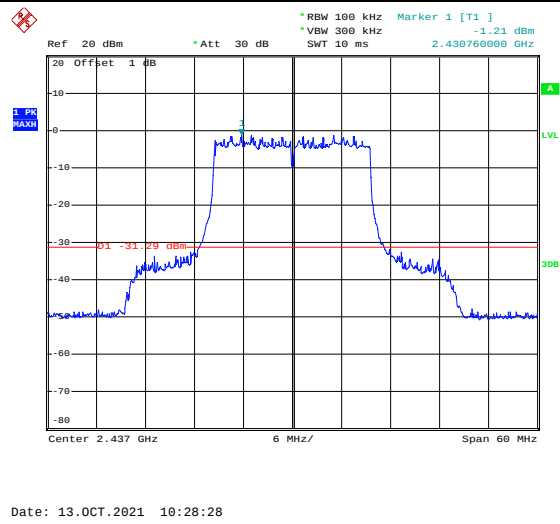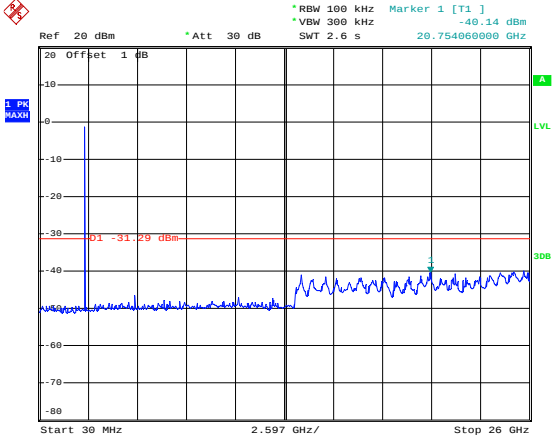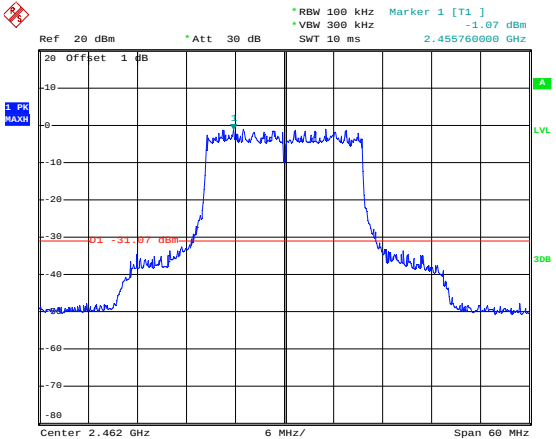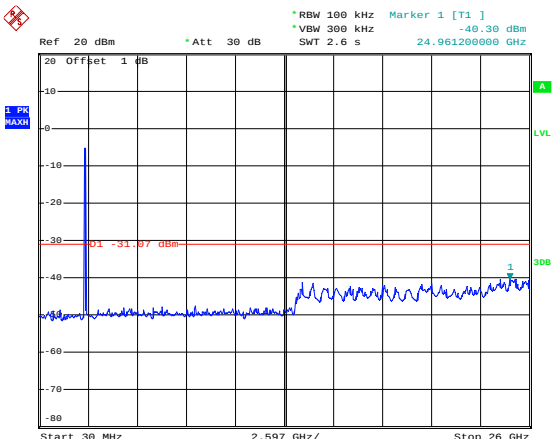802.11ax-HE20-Middle







	 Date: 13.OCT.2021 10:29:41
802.11ax-HE20-High	 Date: 13.OCT.2021 10:30:22
	 Date: 13.OCT.2021 10:30:39

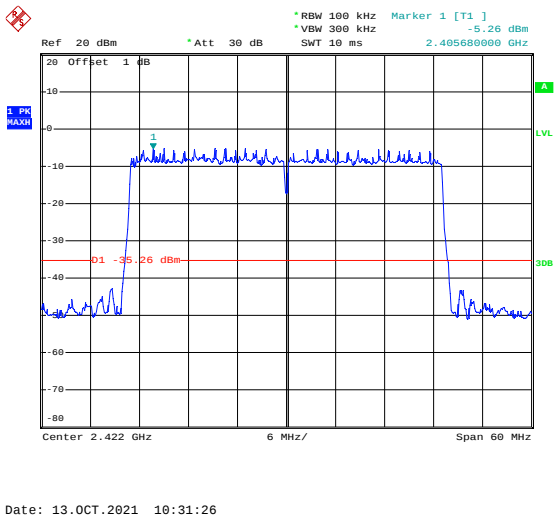802.11ax-HE40-Low



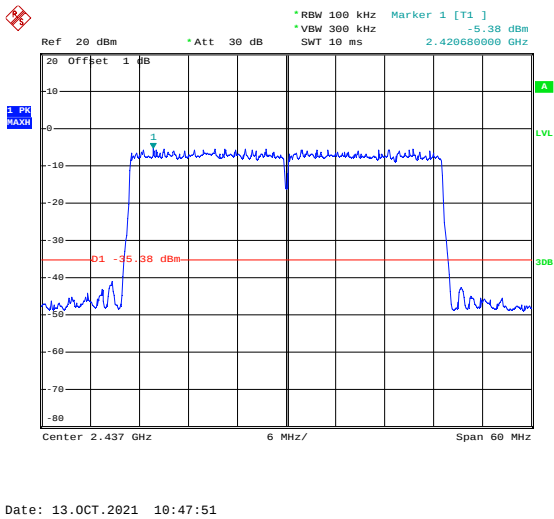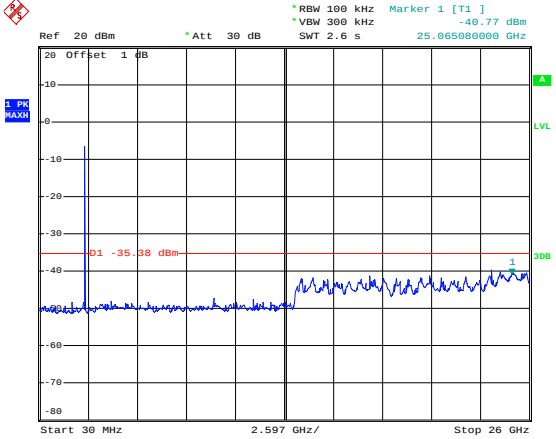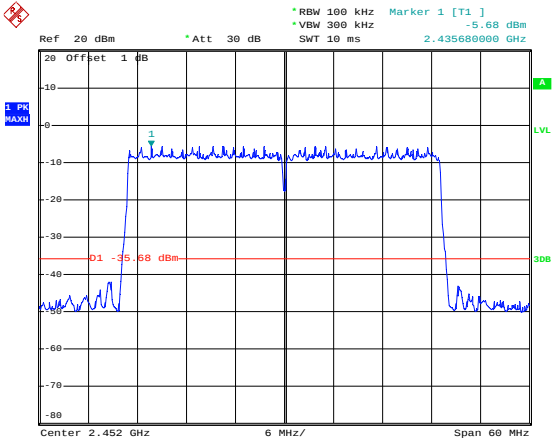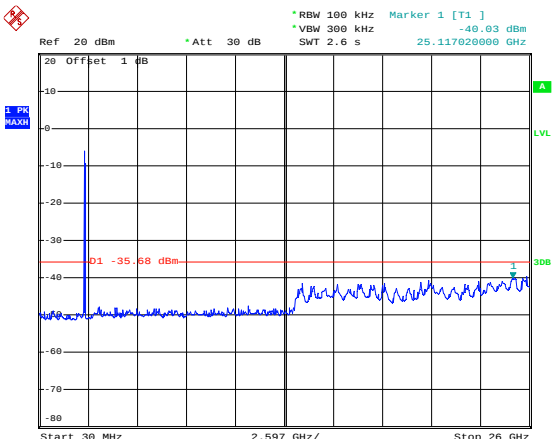802.11ax-HE40-Middle



	 Date: 13.OCT.2021 10:48:10
802.11ax-HE40-High	 Date: 13.OCT.2021 10:49:32
	 Date: 13.OCT.2021 10:49:49

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****