


9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

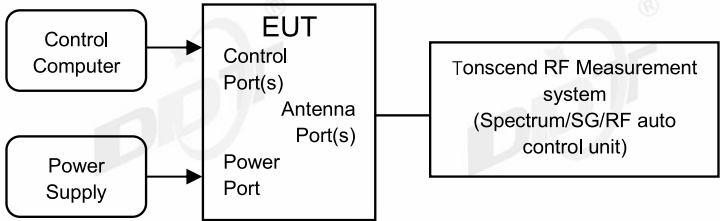

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT’s antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥Span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	25.8℃,55.9%RH	Test Date:	2024.06.12-2024.08.18
Test Power Supply:	AC120V/60Hz	Sample Number:	S24051516-001


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass

9.5. Test graphs

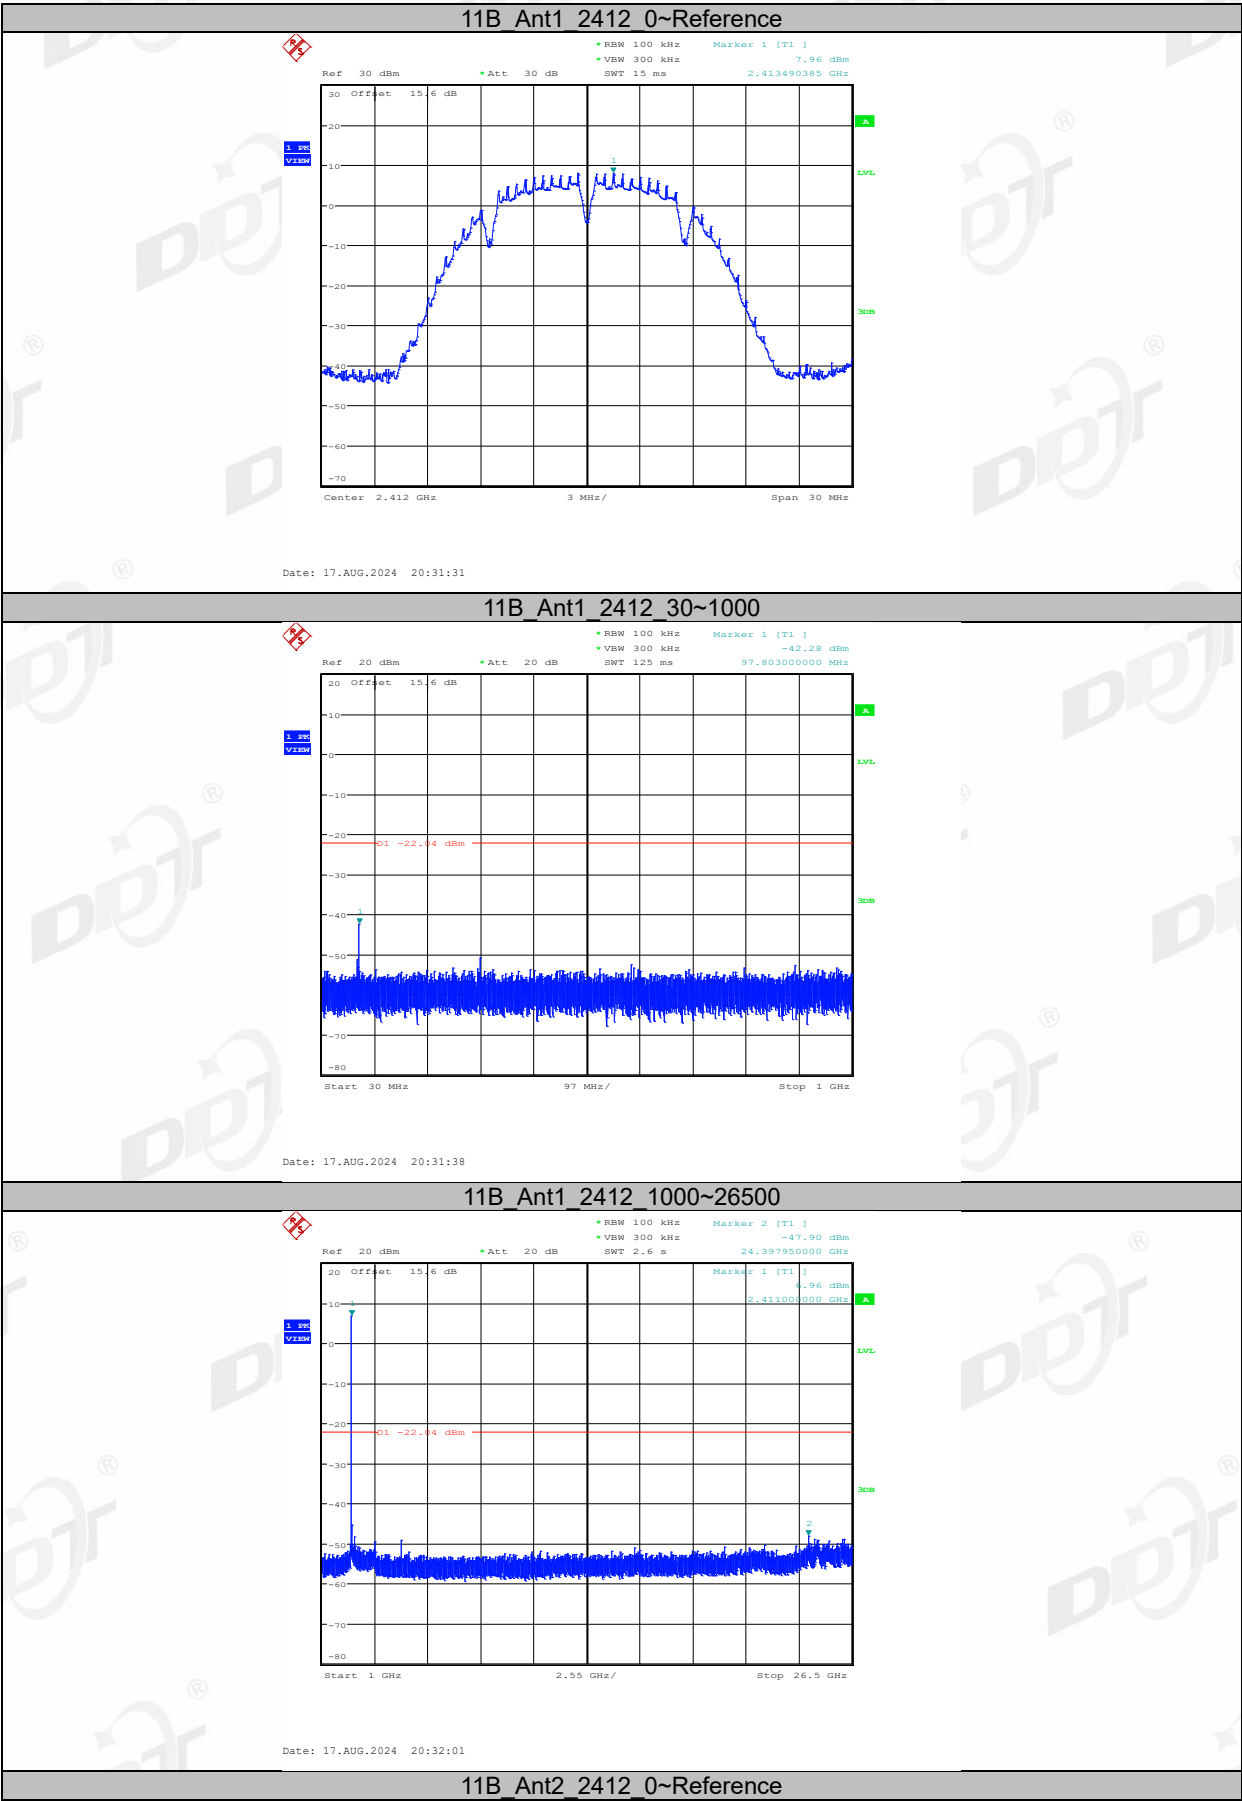


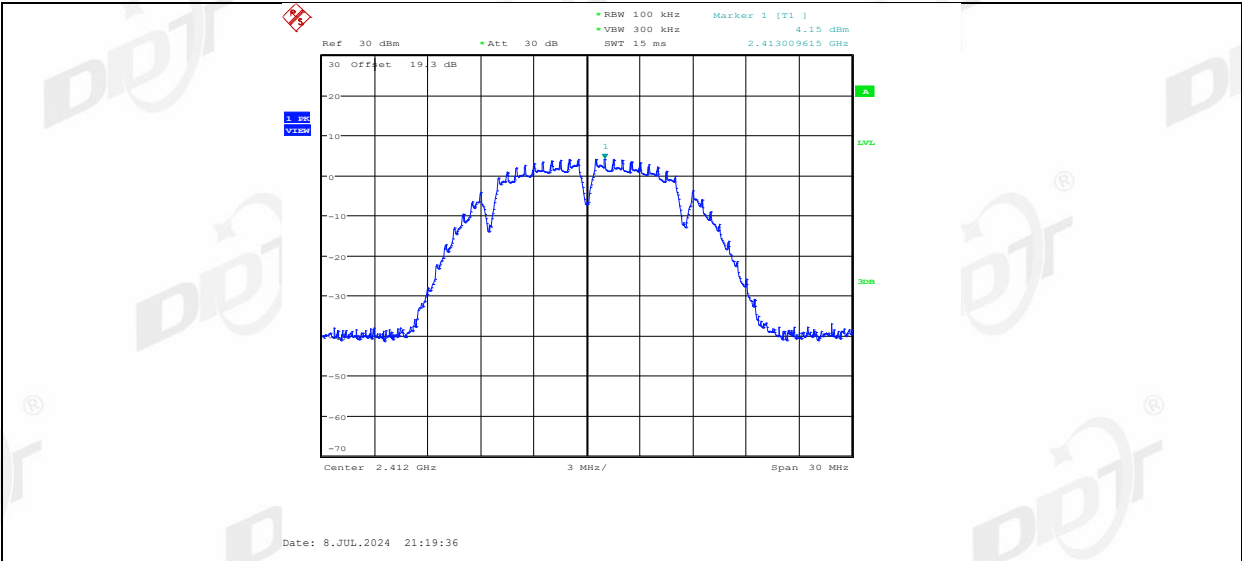


11B_Ant2_2412_30~1000

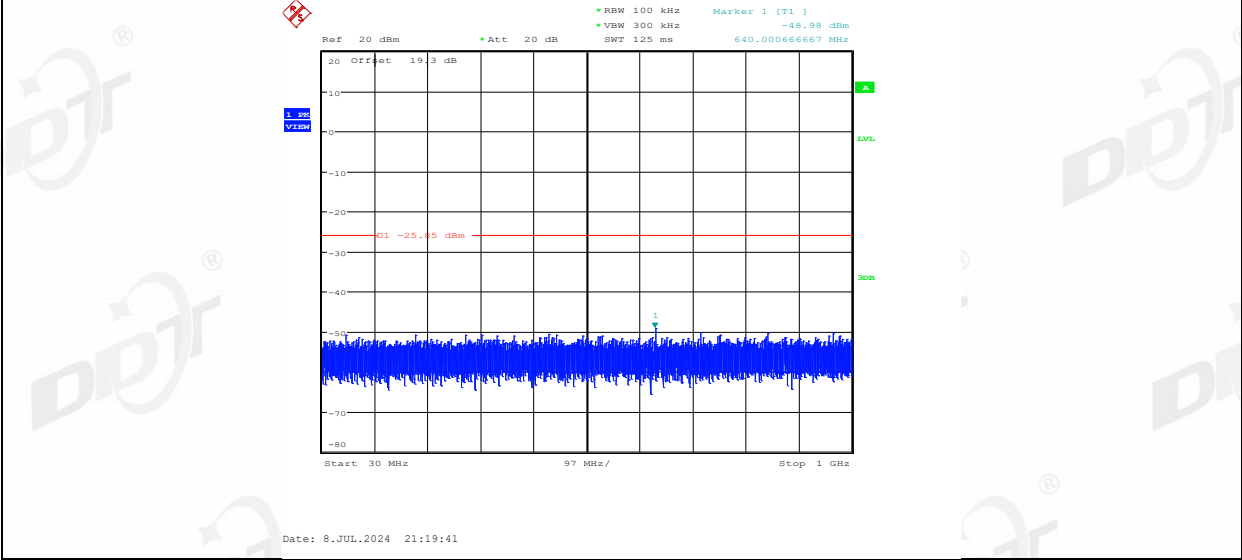


11B_Ant2_2412_1000~26500

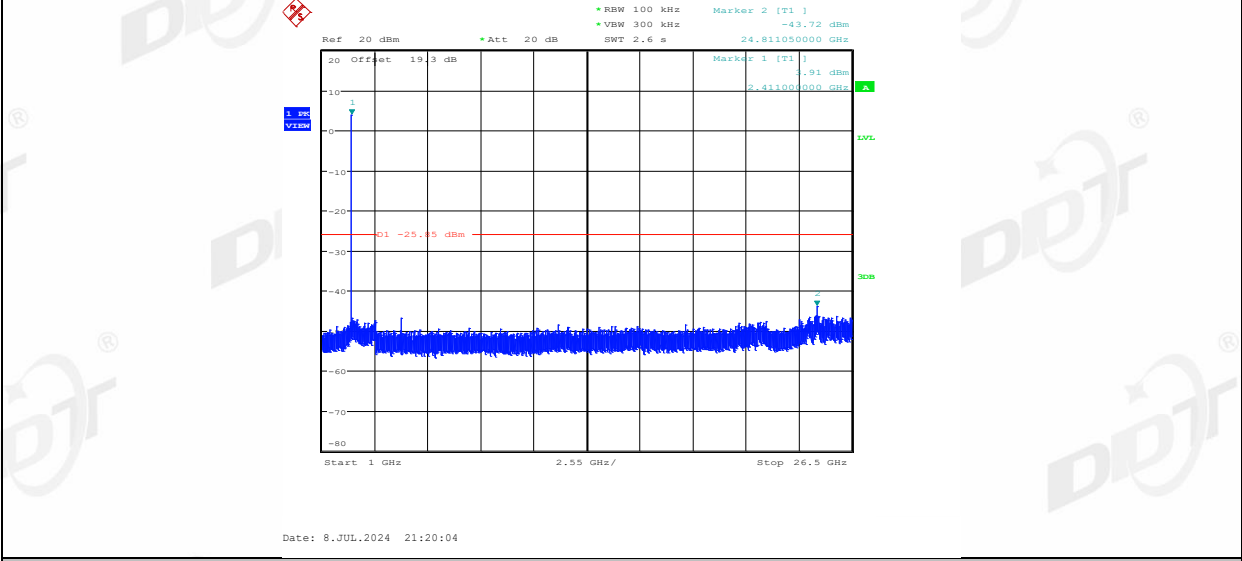


11B_Ant1_2437_0~Reference

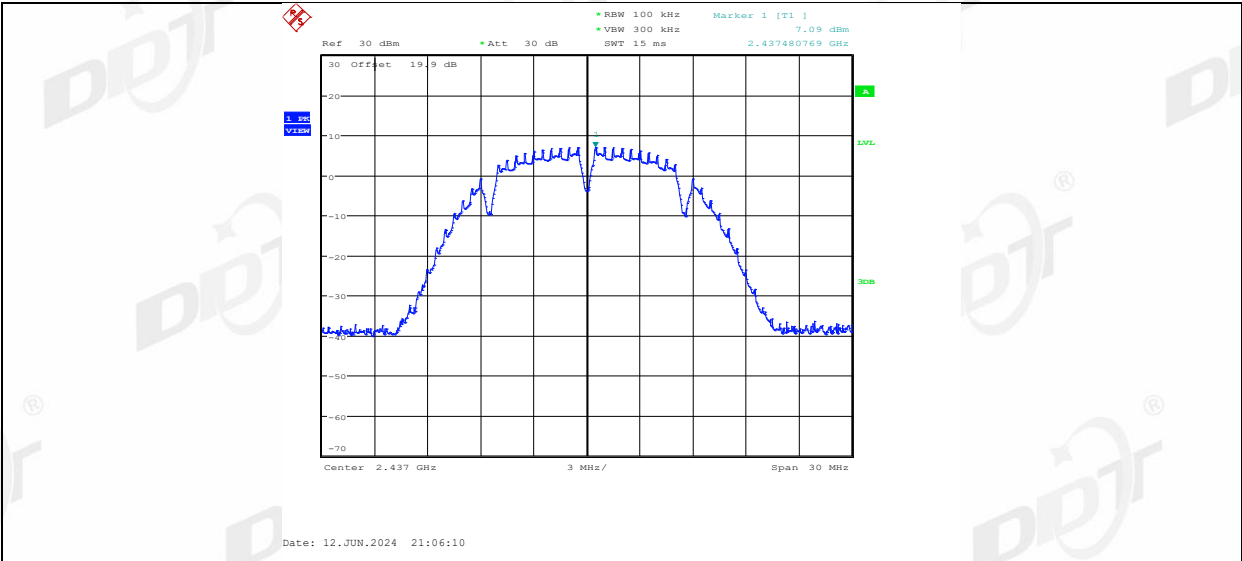




11B_Ant1 2437 30~1000

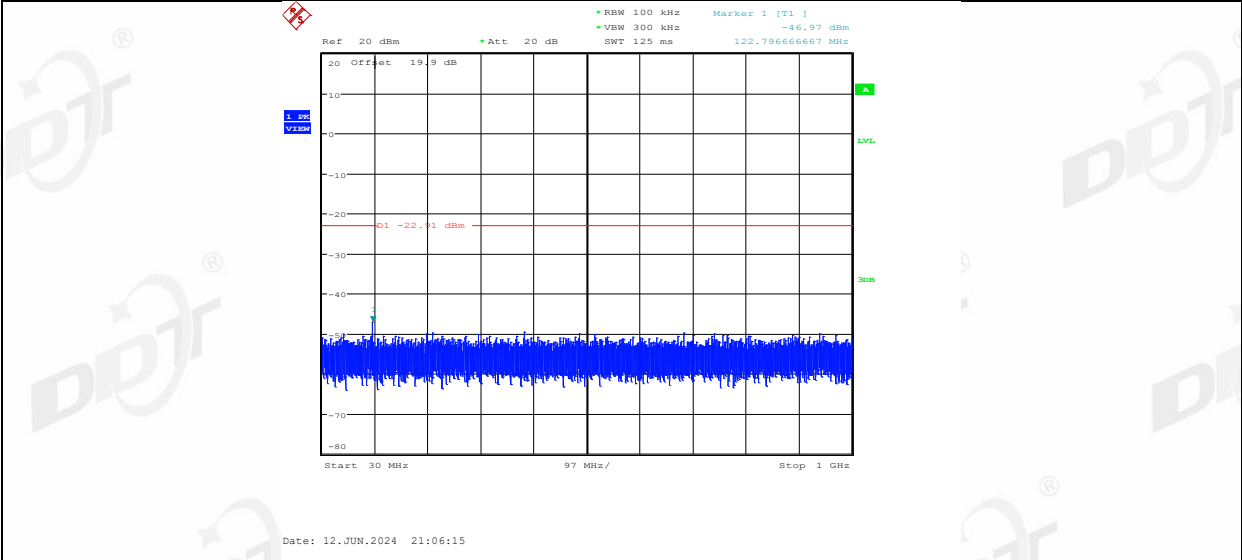


11B_Ant1 2437 1000~26500

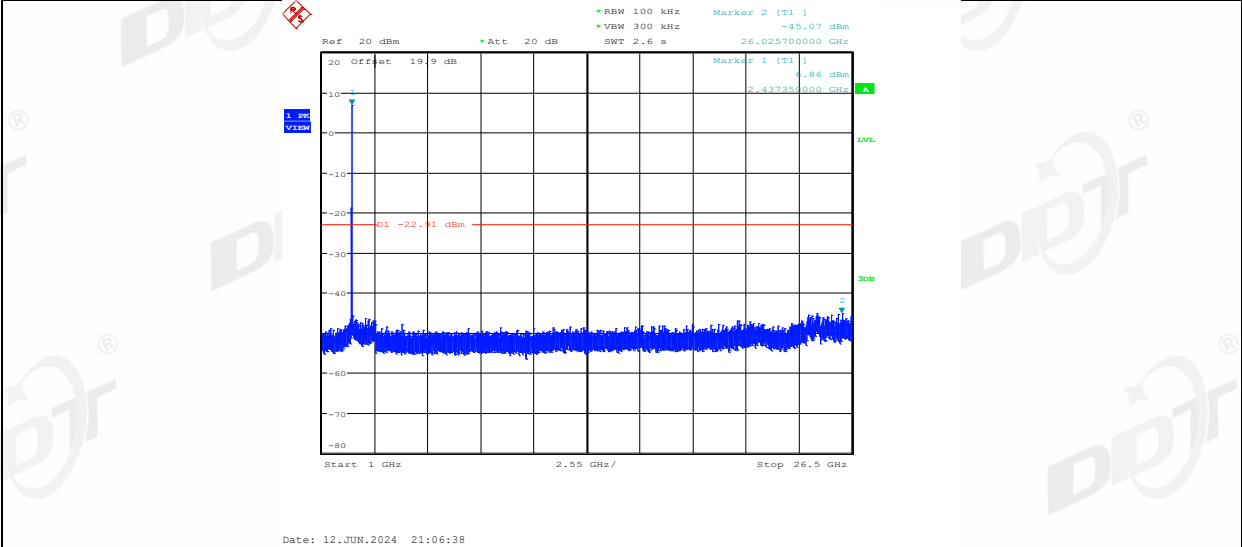


11B_Ant2 2437 0~Reference

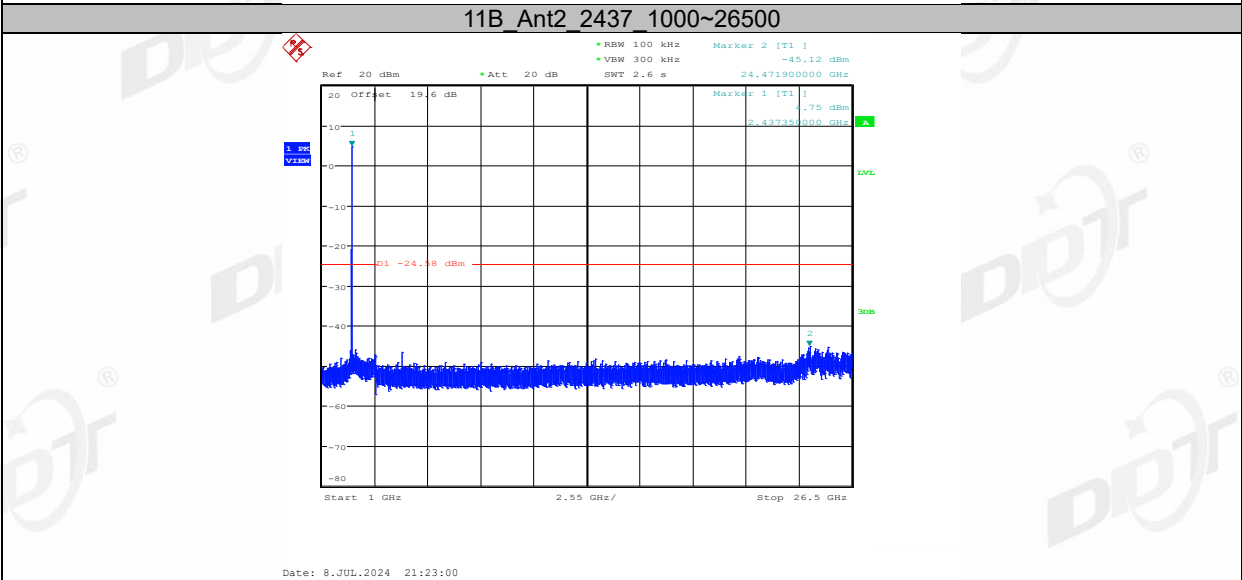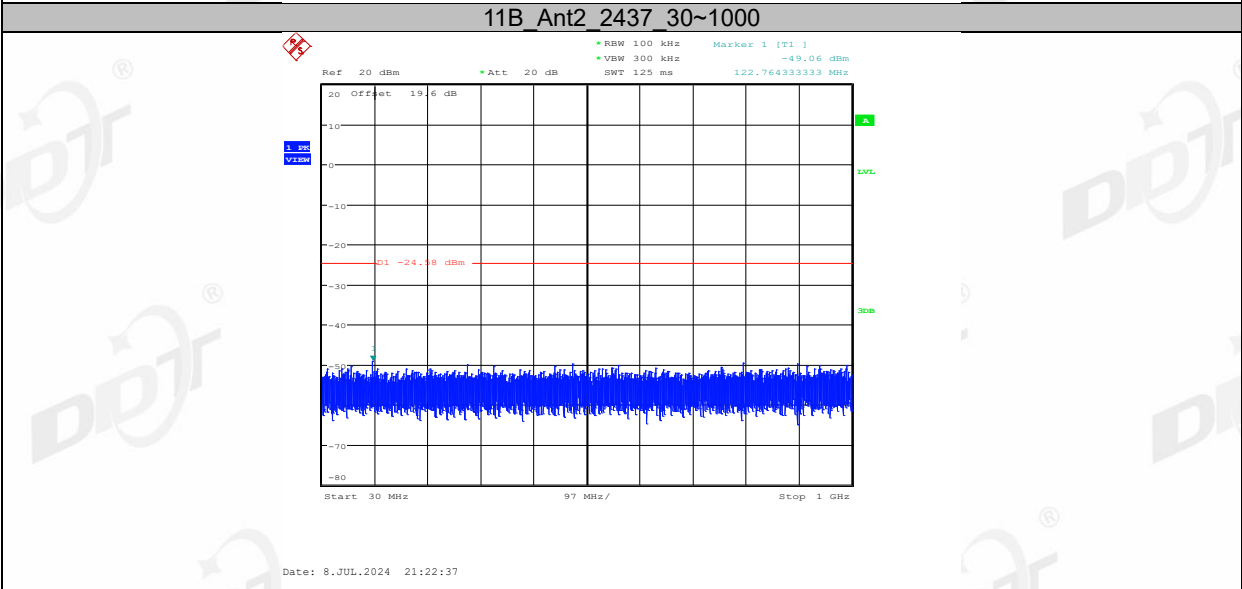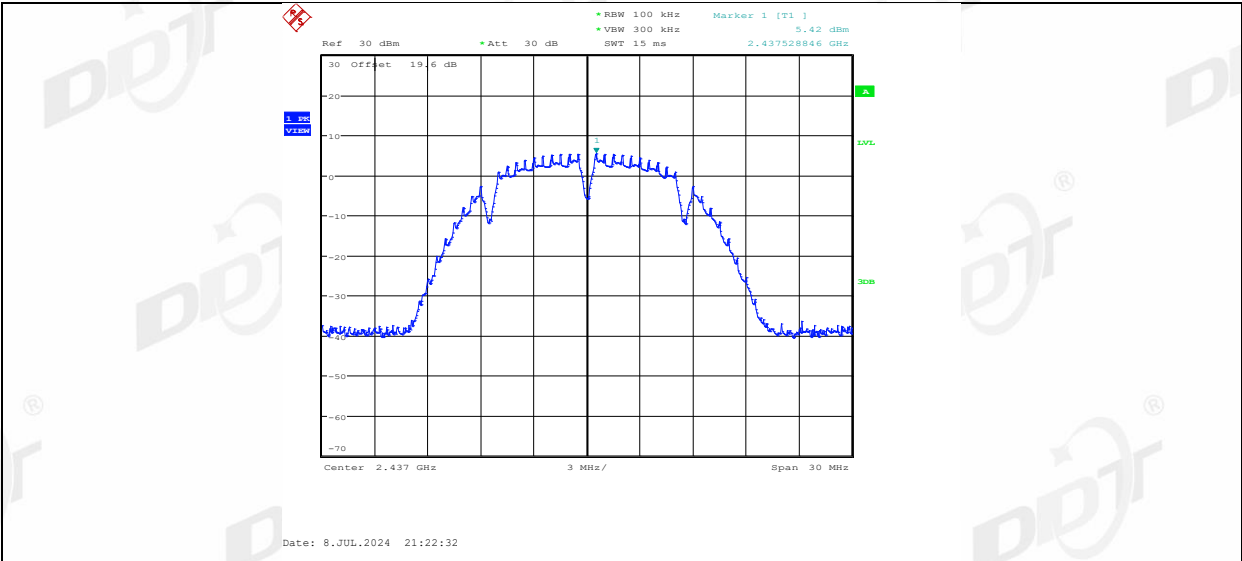


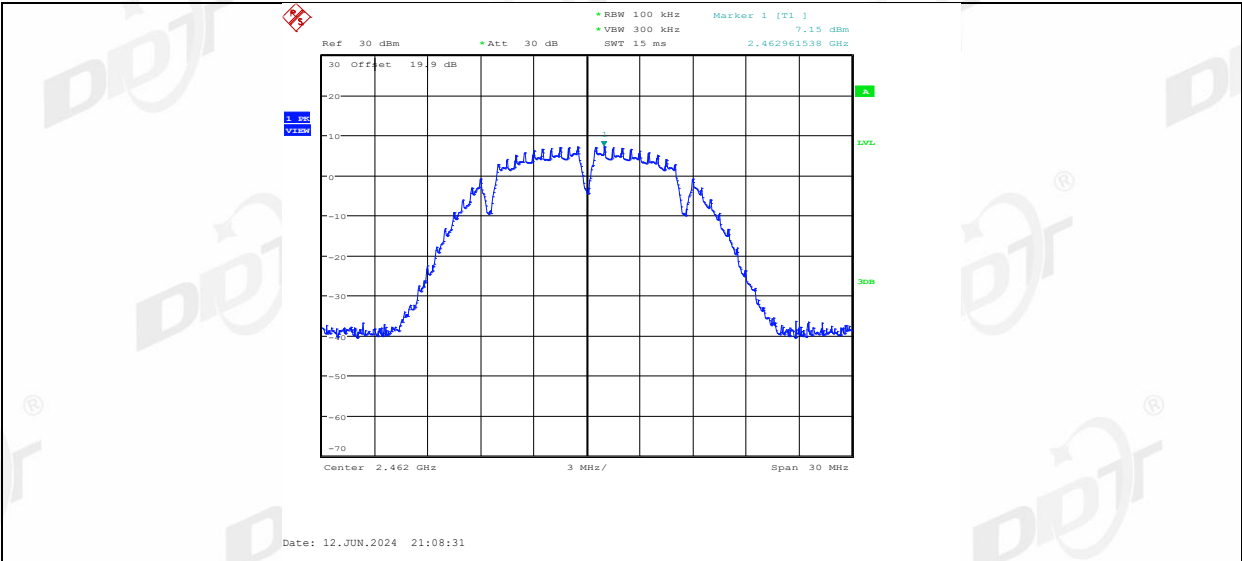


11B_Ant1_2462_30~1000

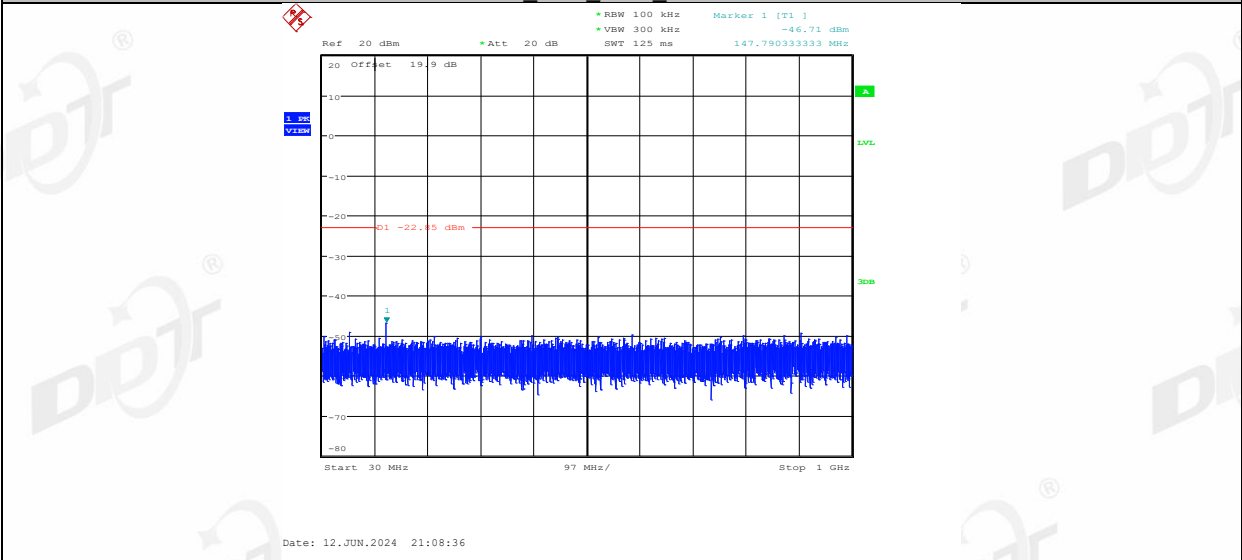


11B_Ant1_2462_1000~26500

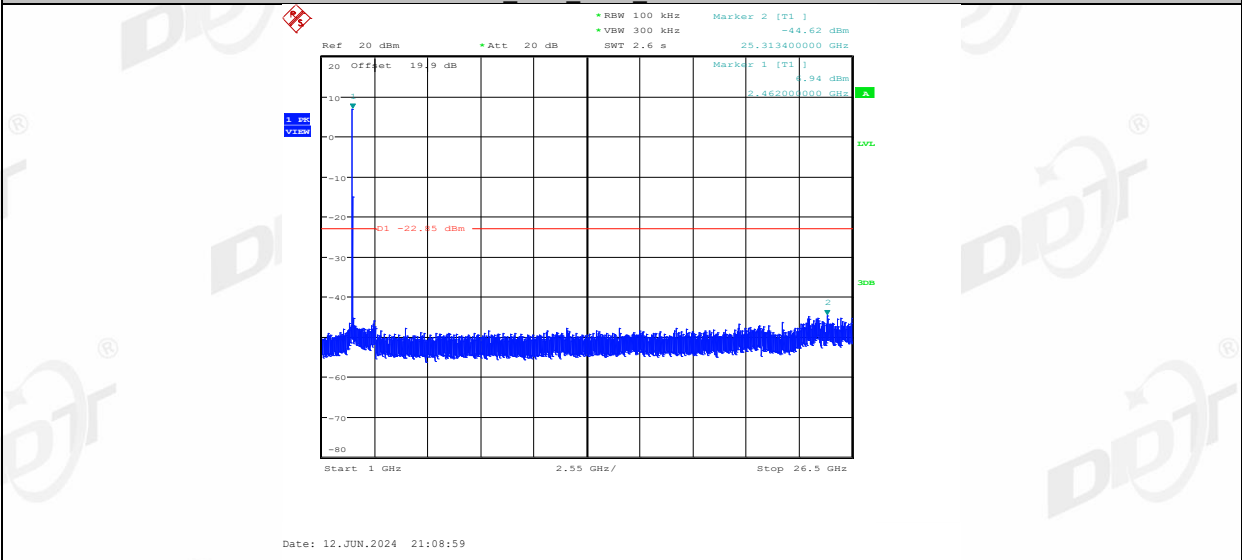


11B_Ant2_2462_0~Reference

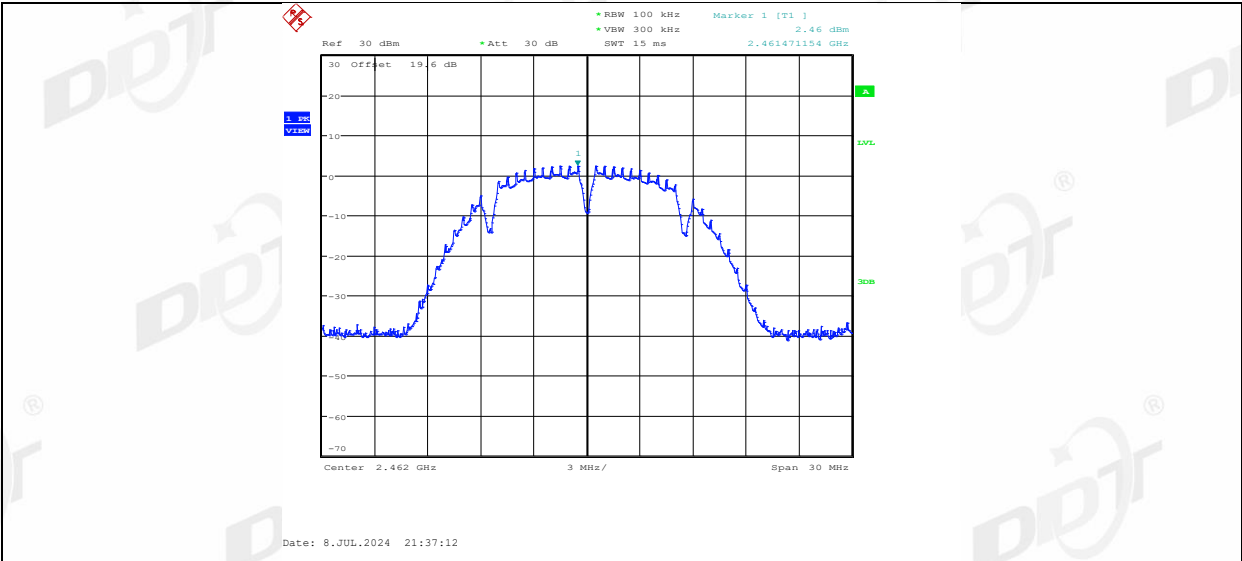


11B_Ant2_2462_30~1000

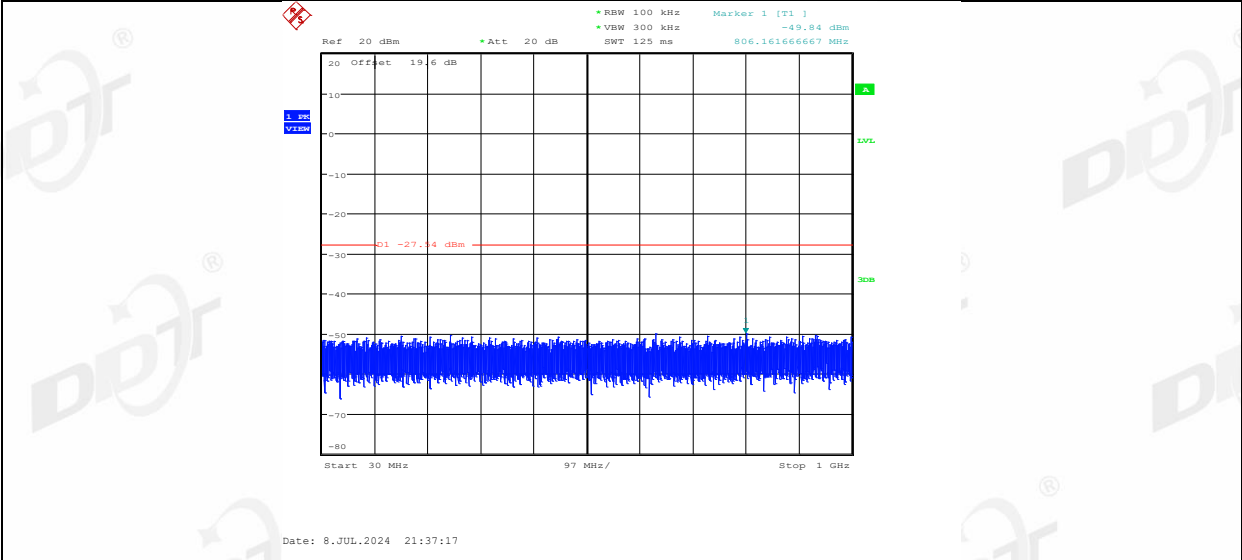


11B_Ant2_2462_1000~26500

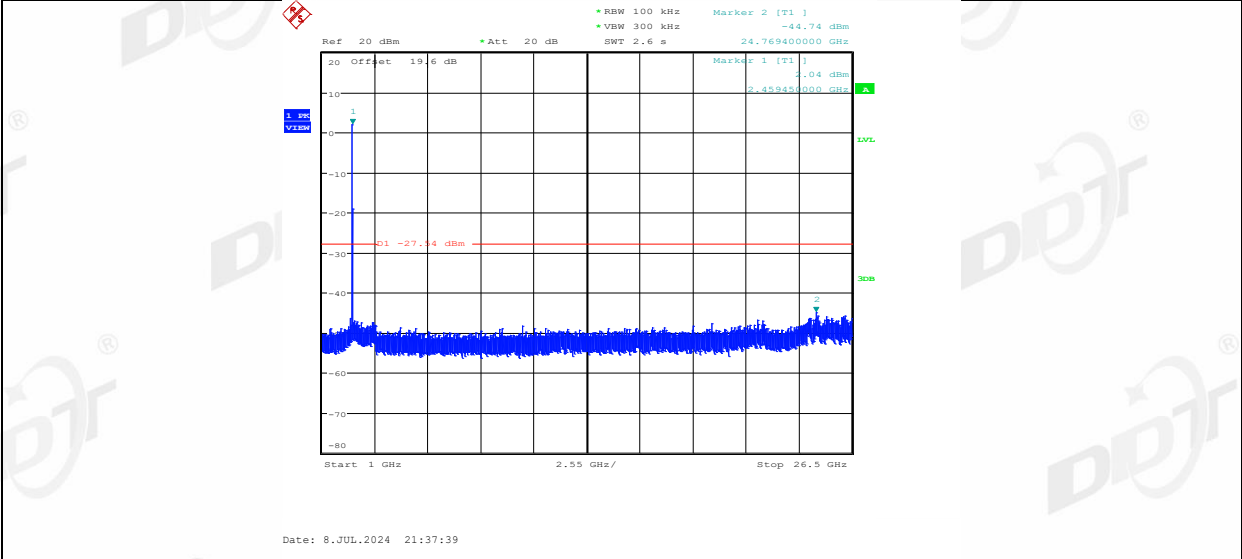


11G_Ant1_2412_0~Reference

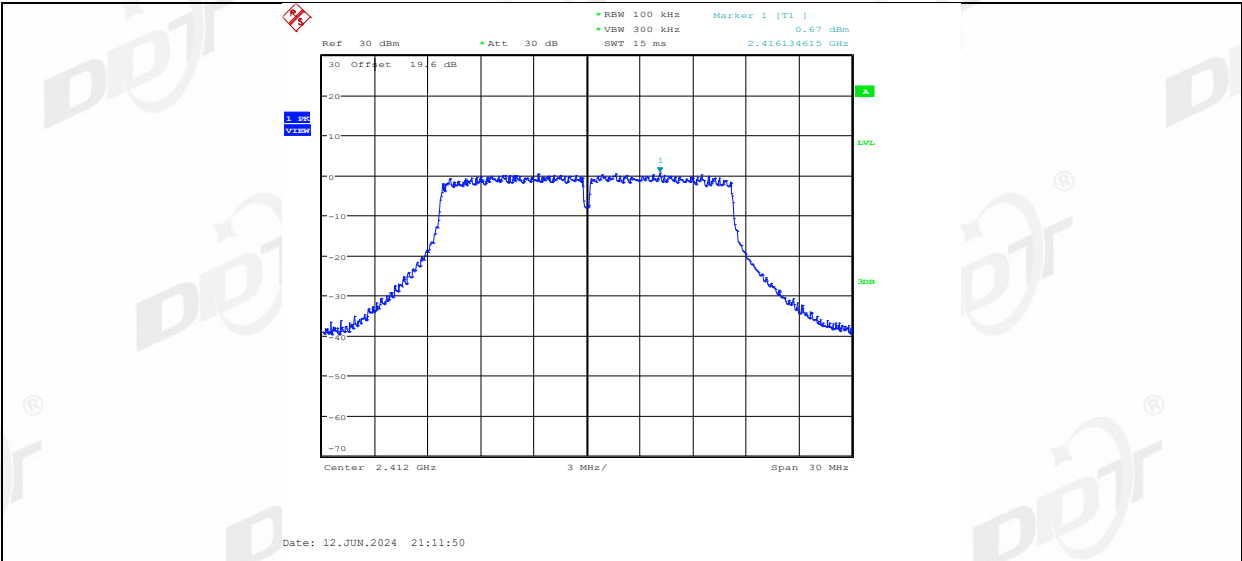


11G_Ant1_2412_30~1000

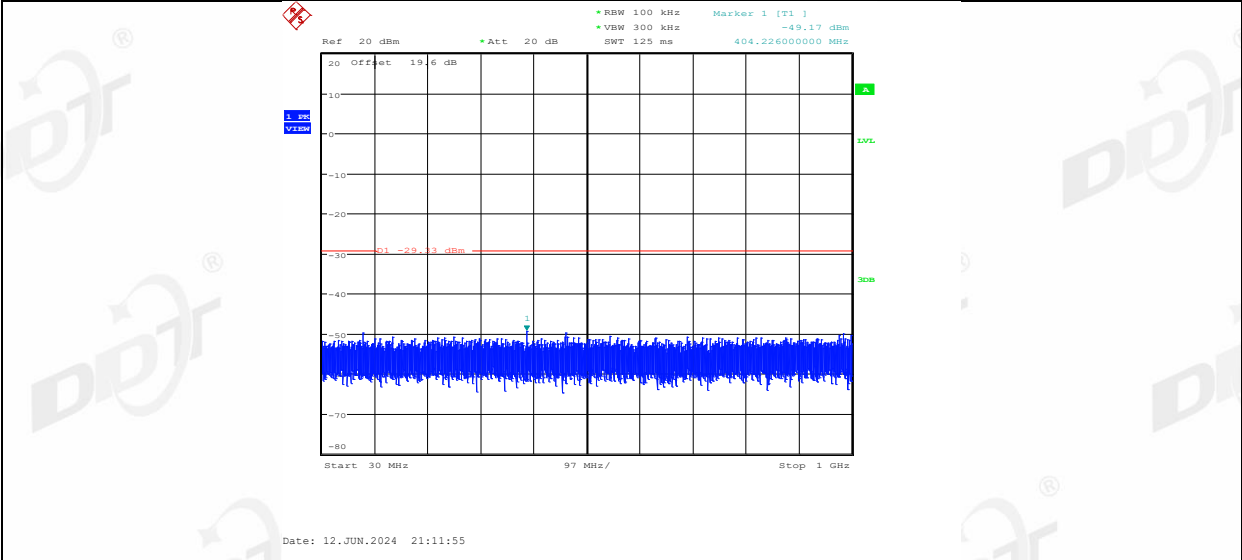


11G_Ant1_2412_1000~26500

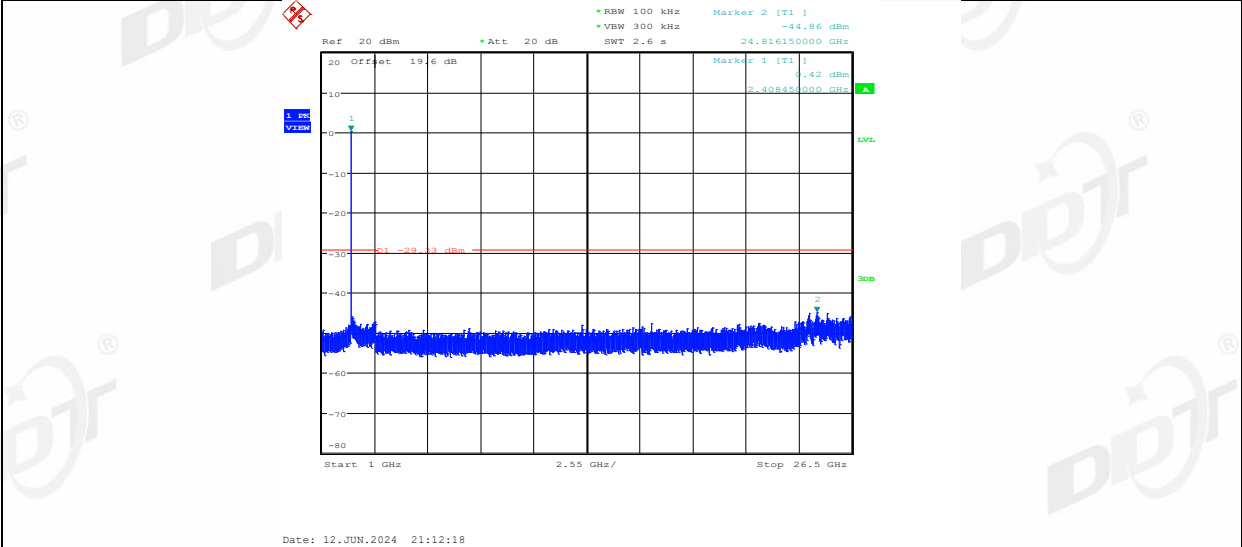


11G_Ant2_2412_0~Reference

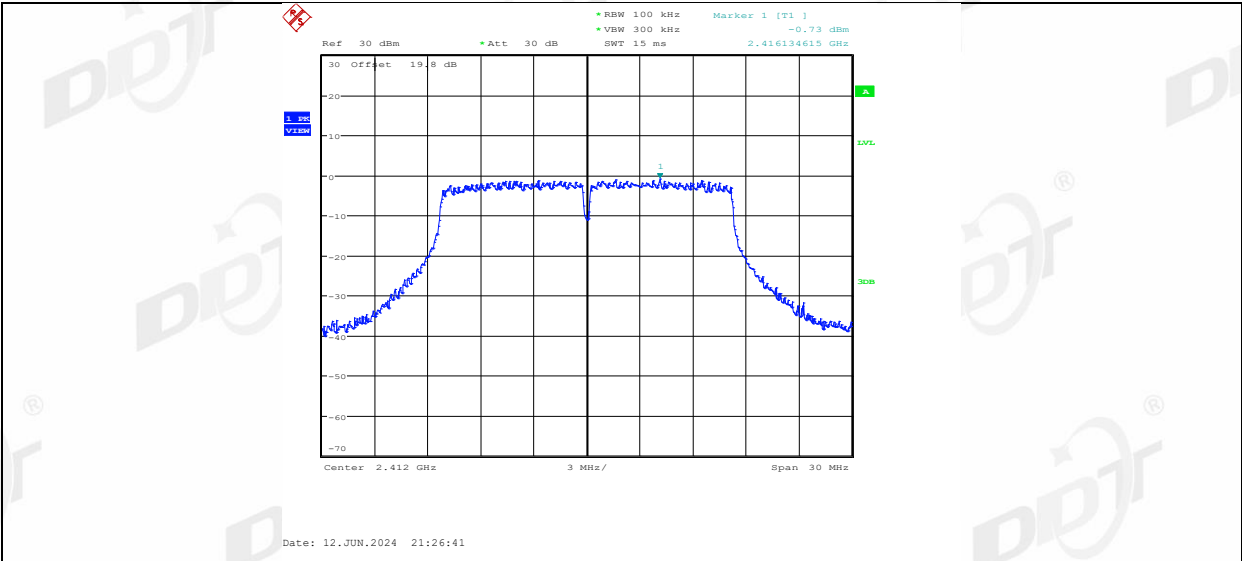


11G_Ant2_2412_30~1000

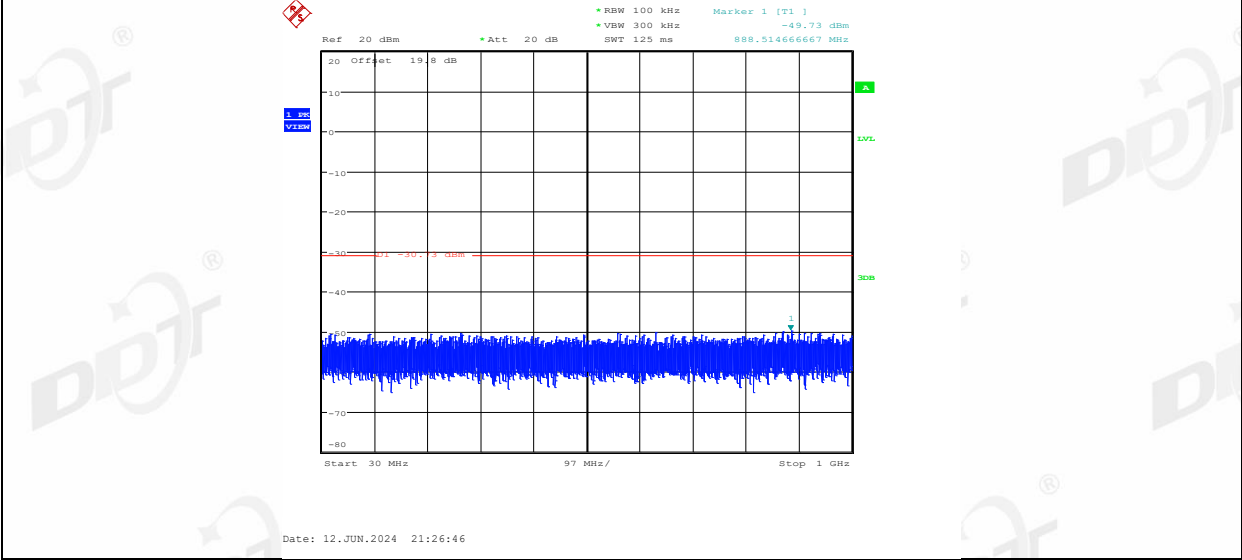


11G_Ant2_2412_1000~26500

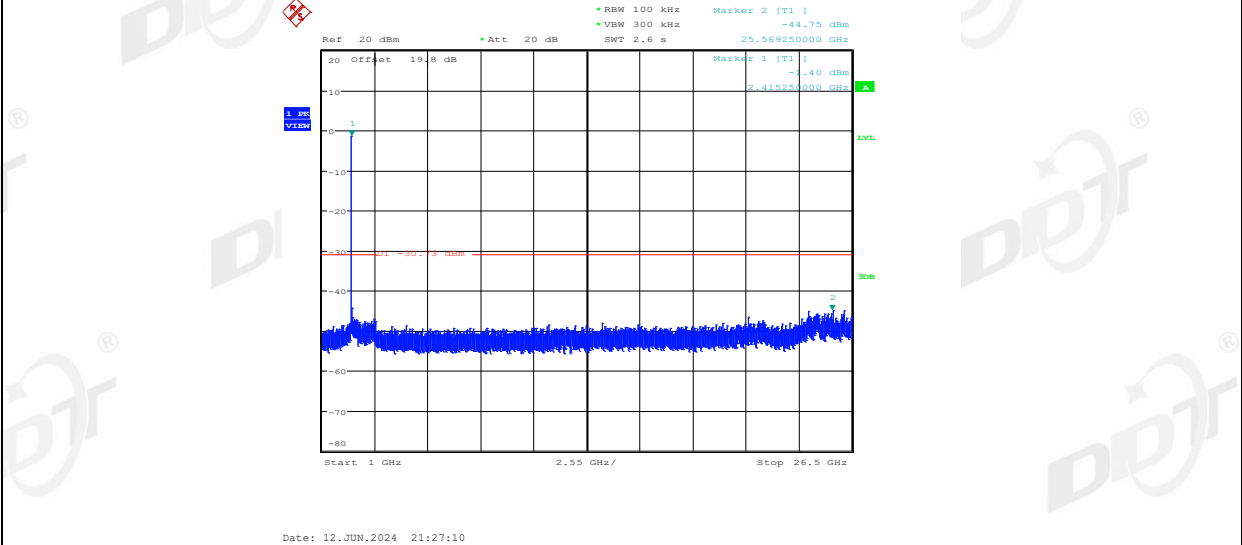


11G_Ant1_2437_0~Reference

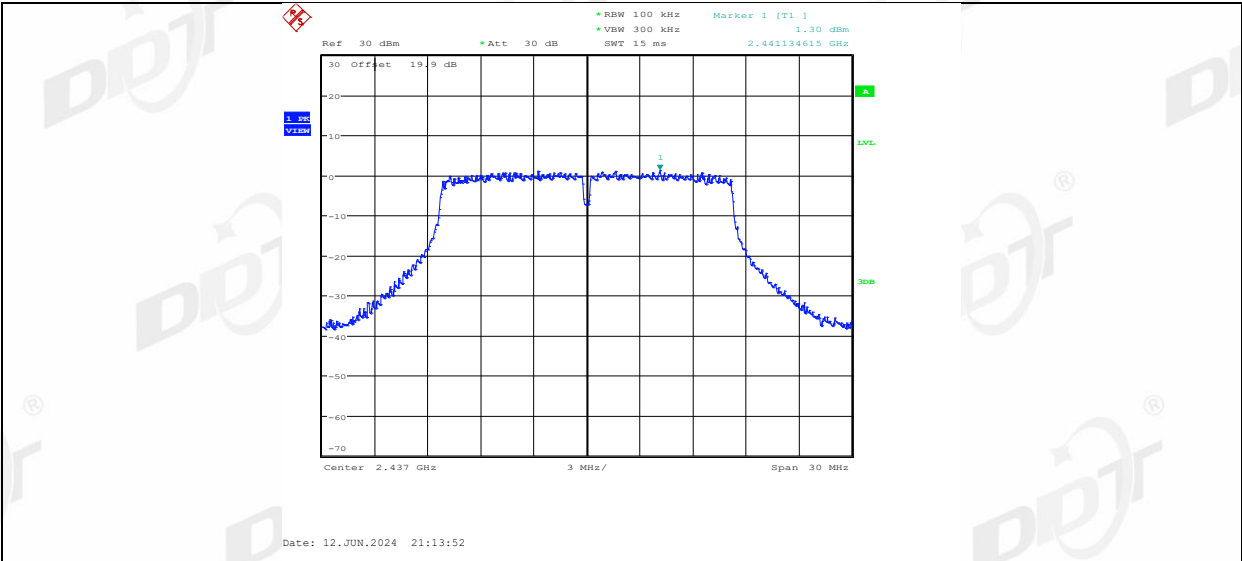


11G_Ant1_2437_30~1000

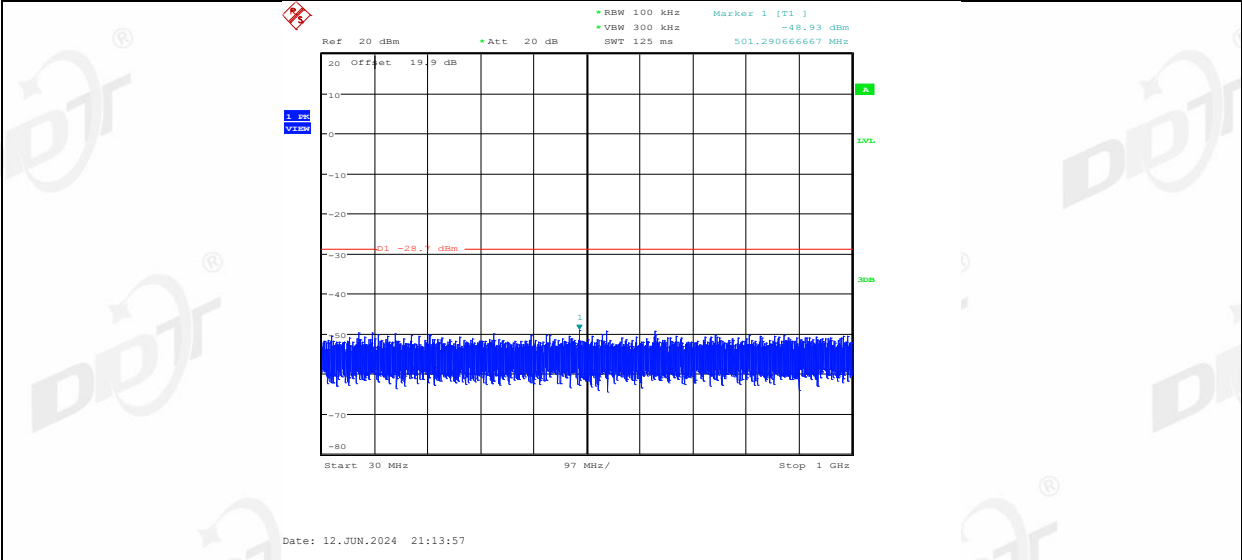


11G_Ant1_2437_1000~26500

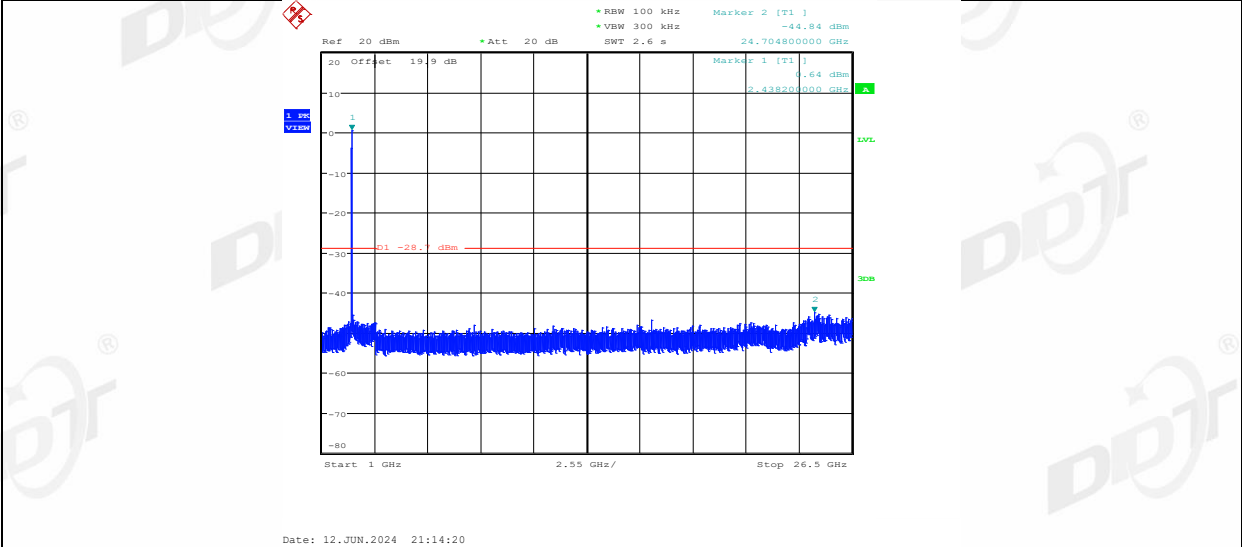


11G_Ant2_2437_0~Reference

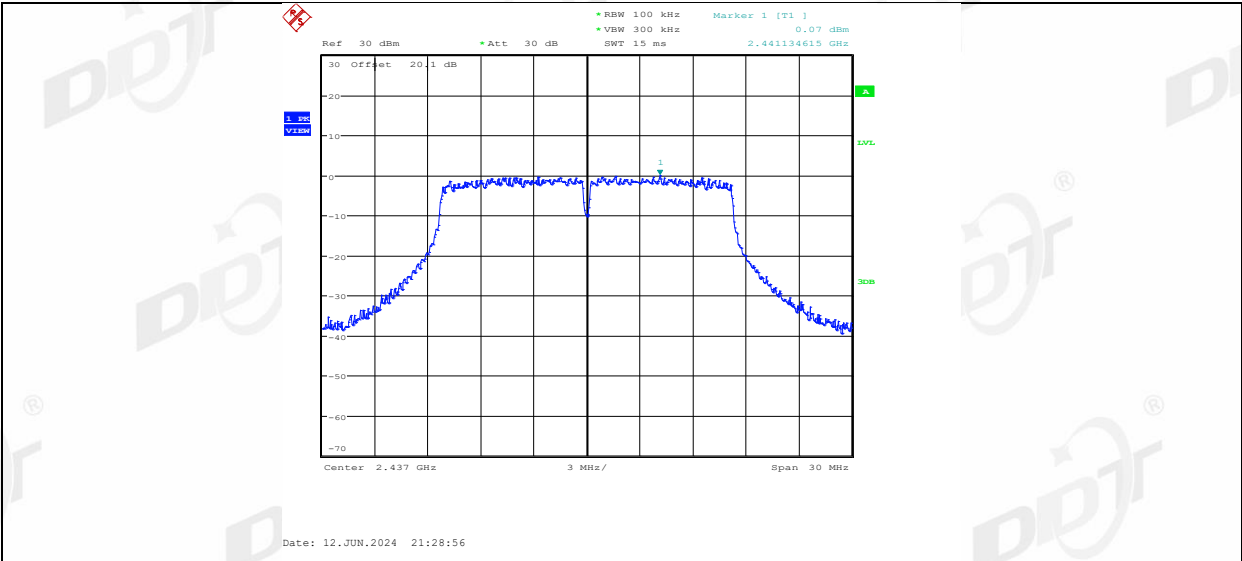


11G_Ant2_2437_30~1000

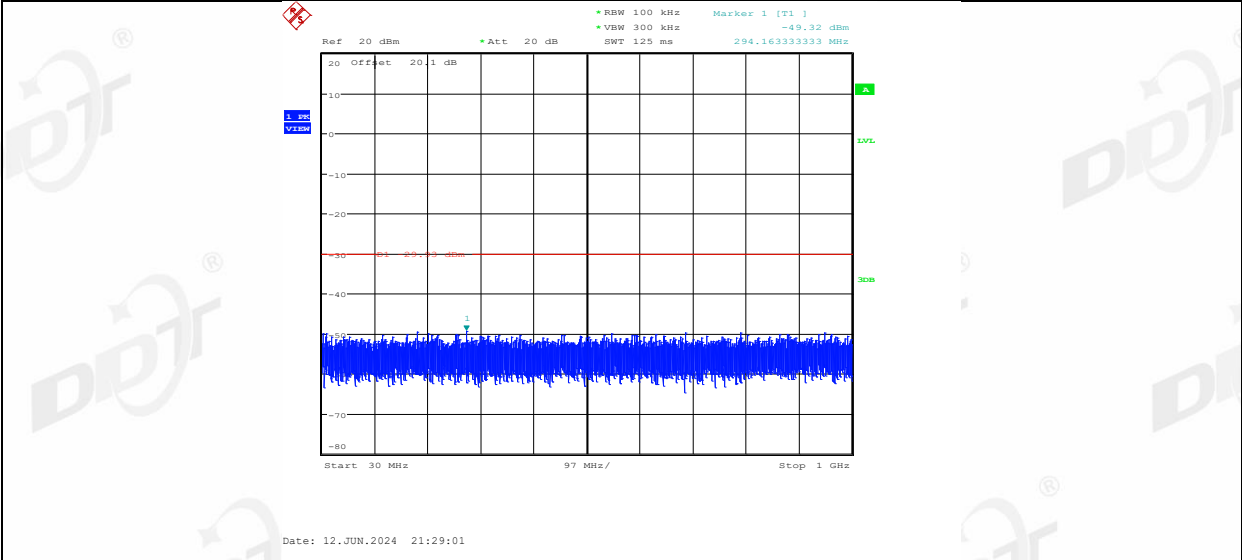


11G_Ant2_2437_1000~26500

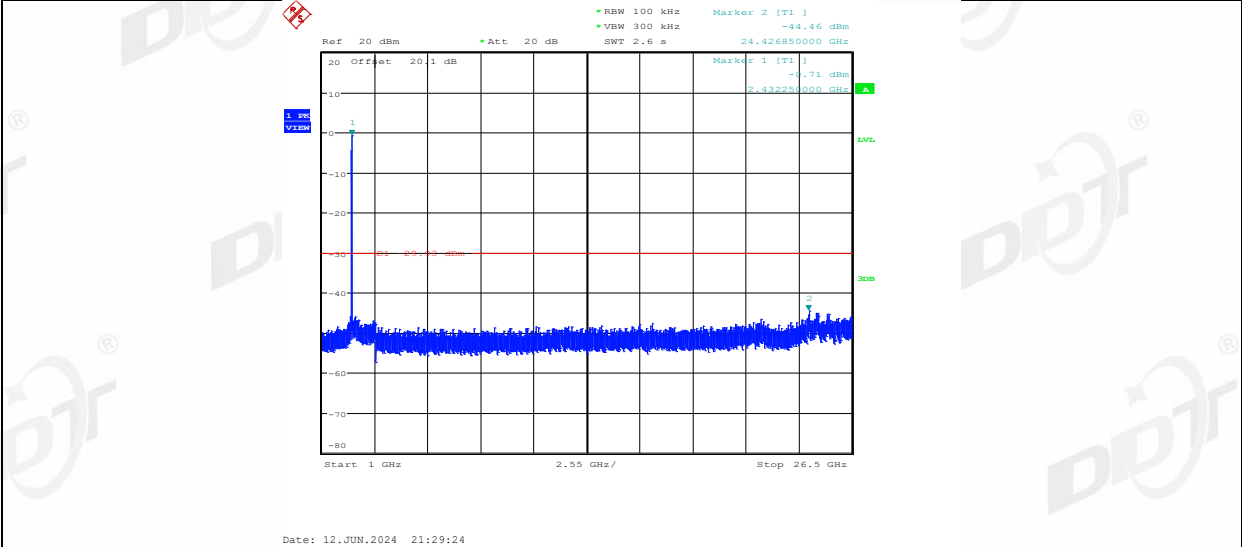


11G_Ant1_2462_0~Reference

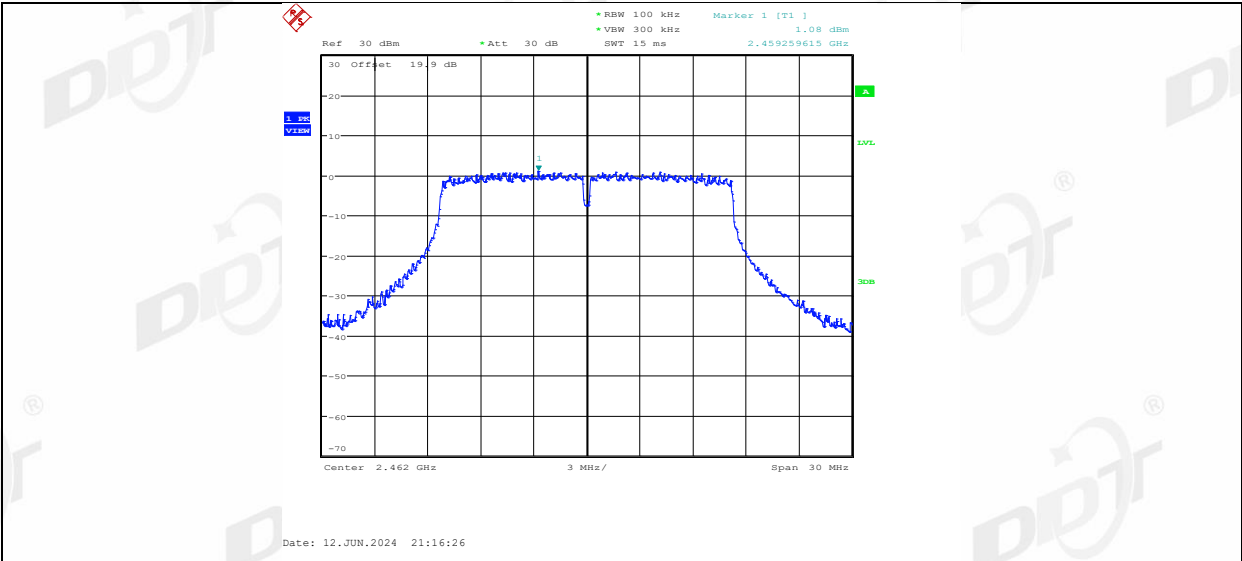


11G_Ant1_2462_30~1000

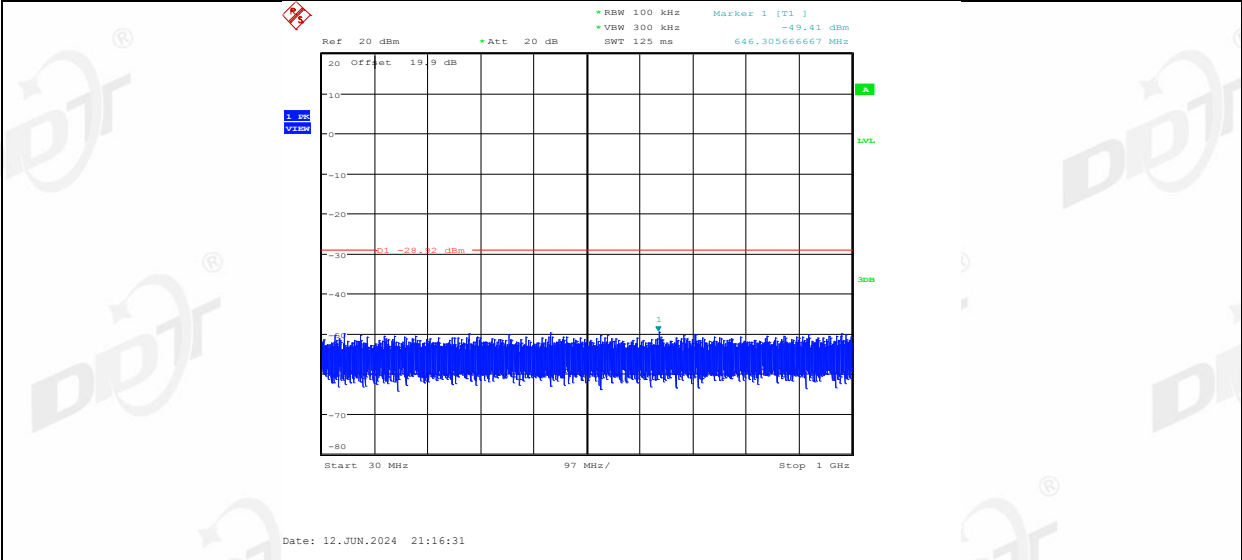


11G_Ant1_2462_1000~26500

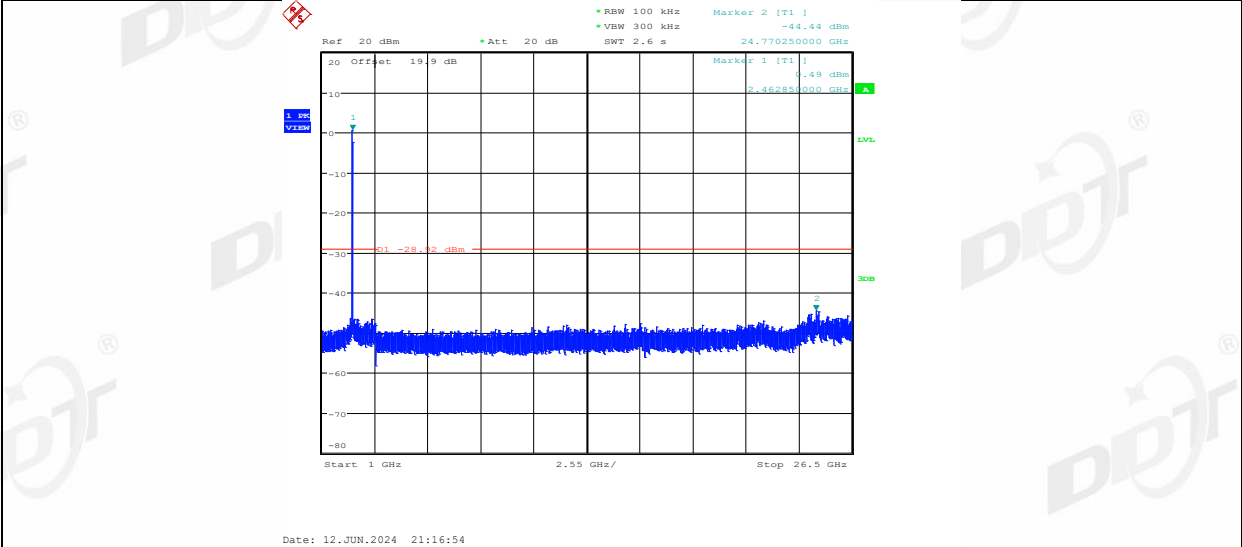


11G_Ant2_2462_0~Reference

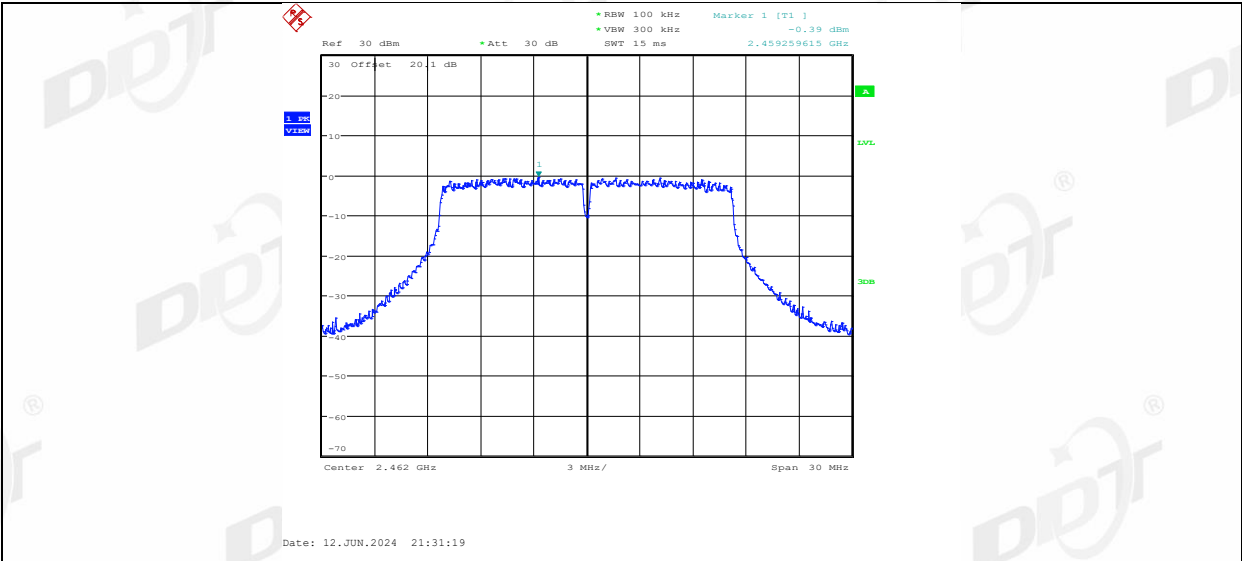


11G_Ant2_2462_30~1000

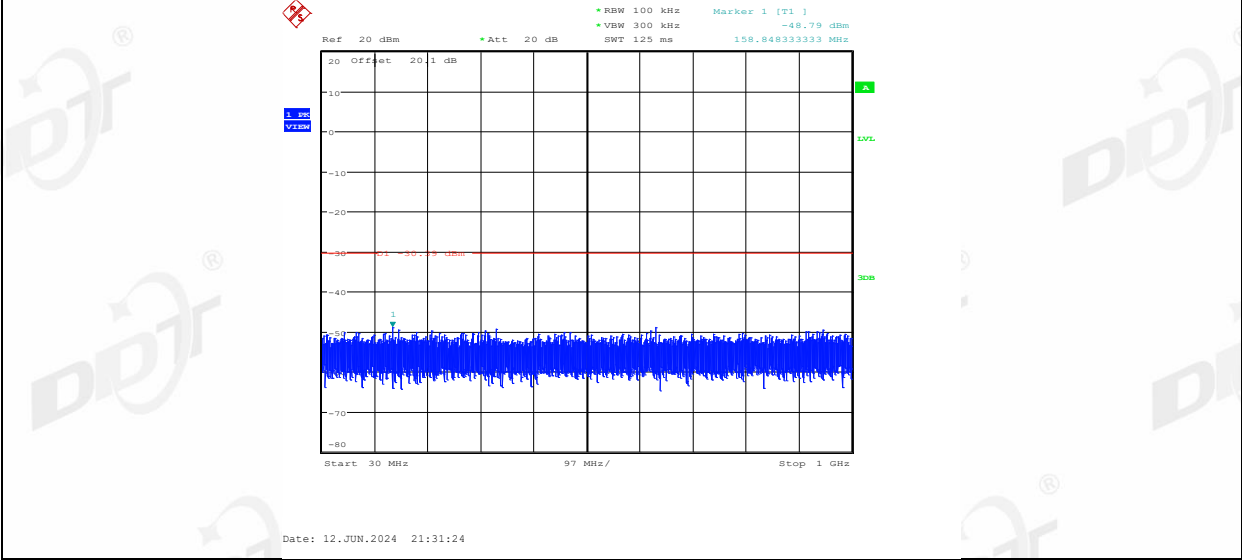


11G_Ant2_2462_1000~26500

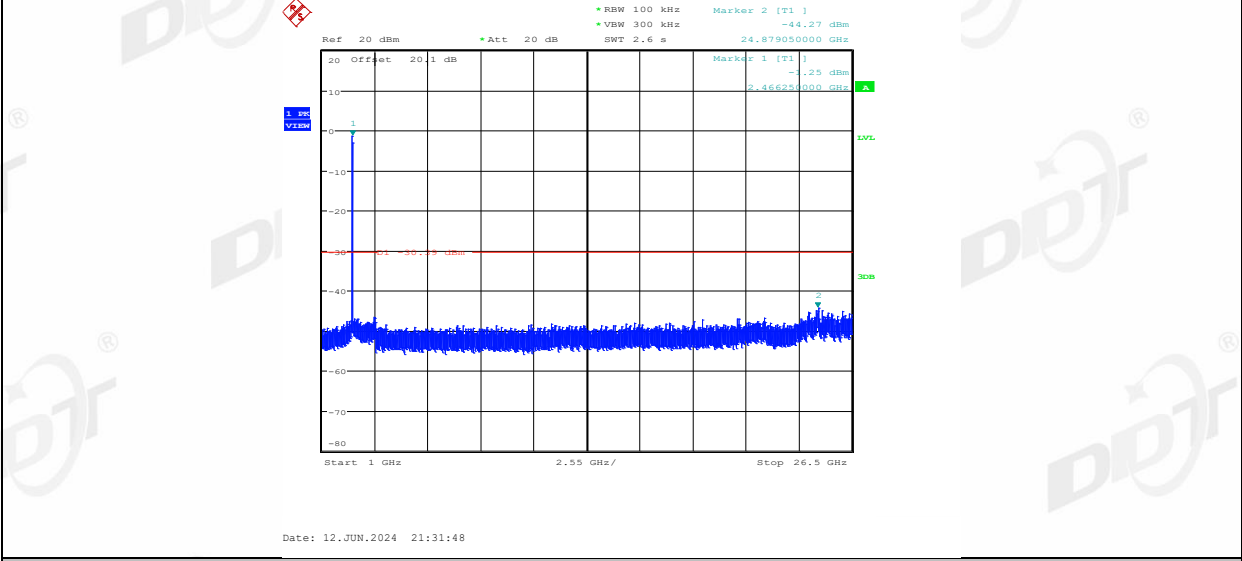


11N20MIMO_Ant1_2412_0~Reference

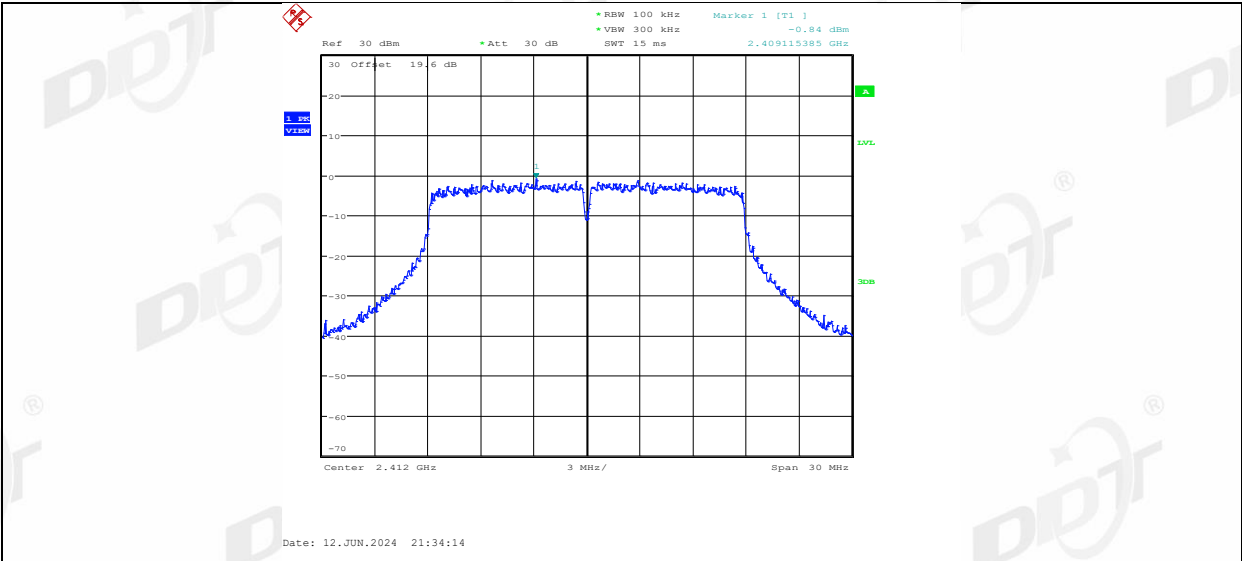


11N20MIMO_Ant1_2412_30~1000

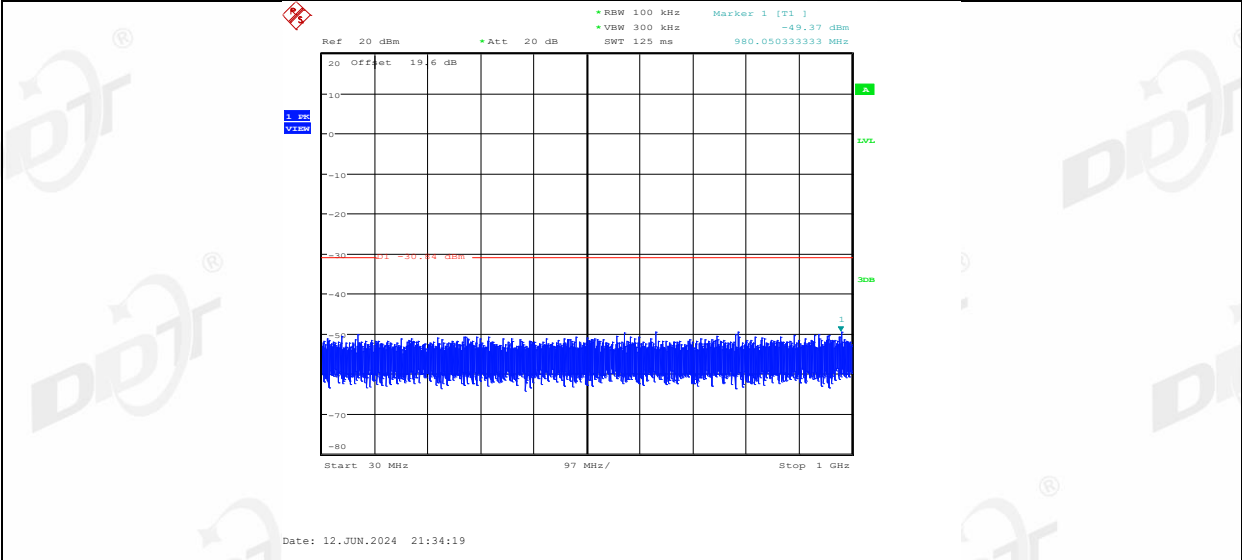


11N20MIMO_Ant1_2412_1000~26500

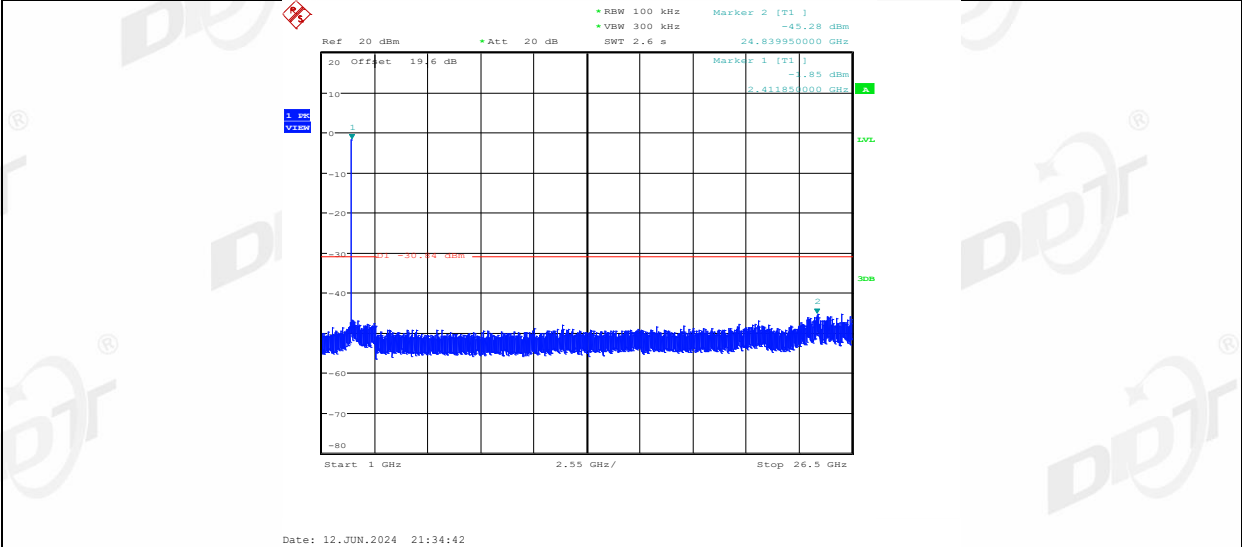


11N20MIMO_Ant2_2412_0~Reference

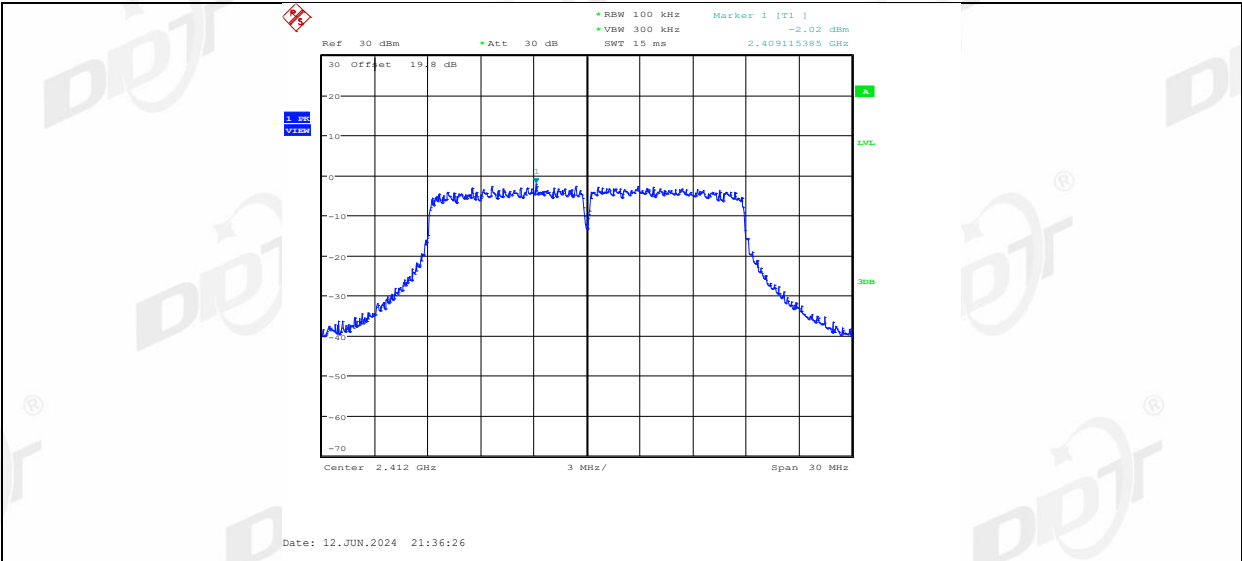


11N20MIMO_Ant2_2412_30~1000

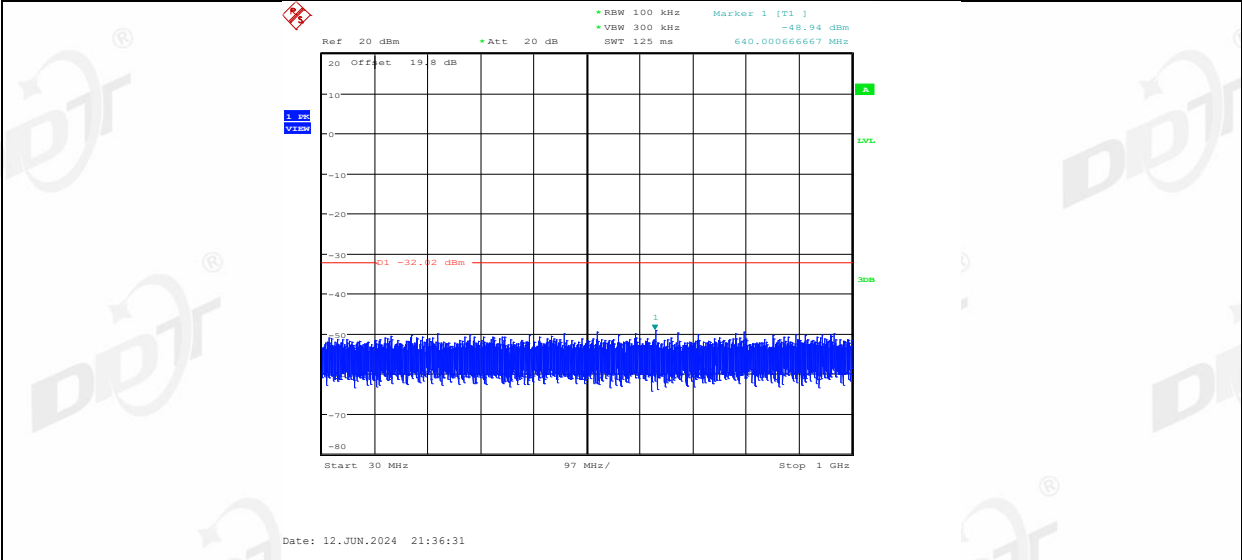


11N20MIMO_Ant2_2412_1000~26500

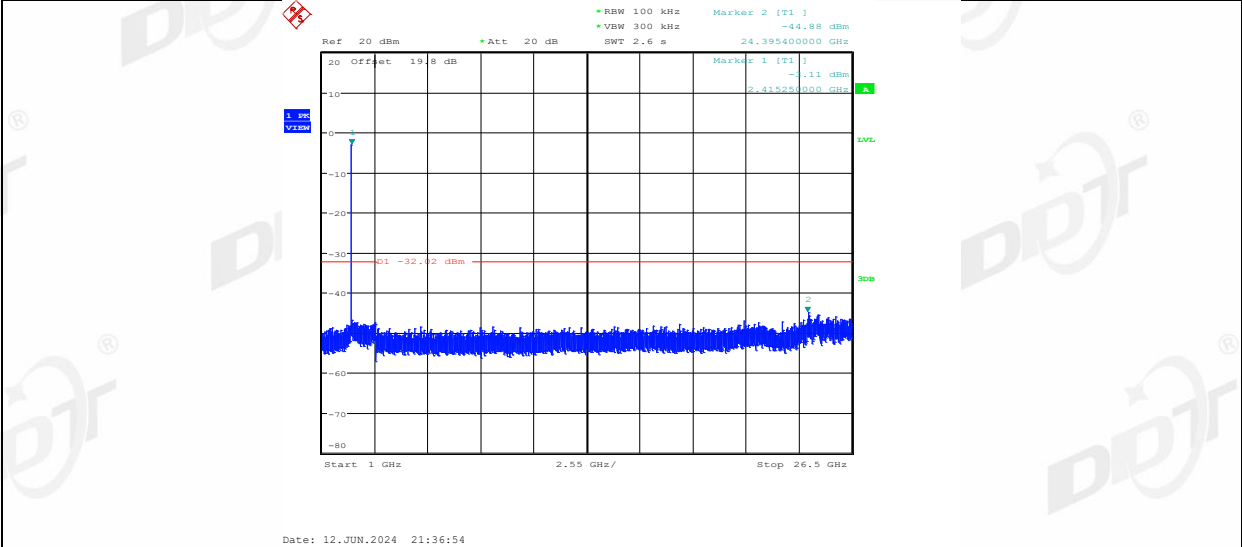


11N20MIMO_Ant1_2437_0~Reference

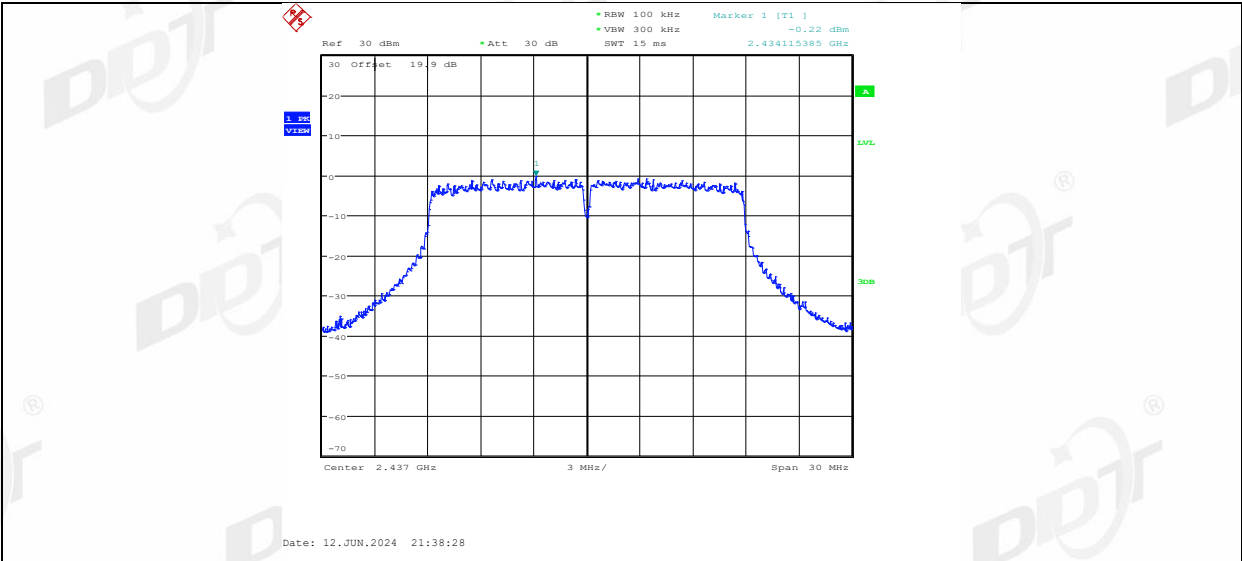




11N20MIMO_Ant1_2437_30~1000

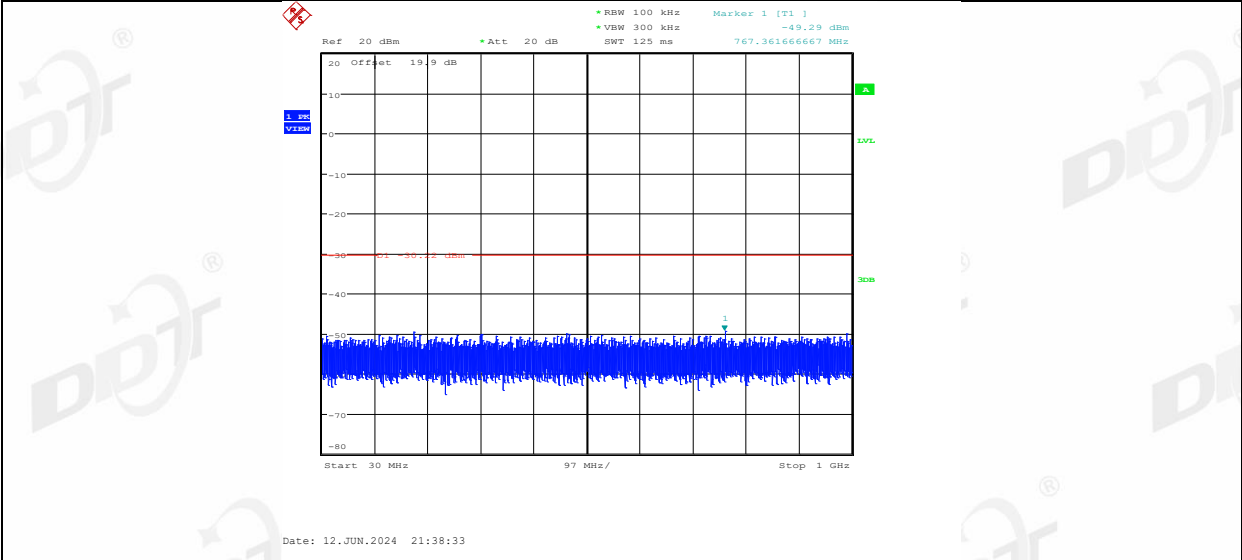


11N20MIMO_Ant1_2437_1000~26500

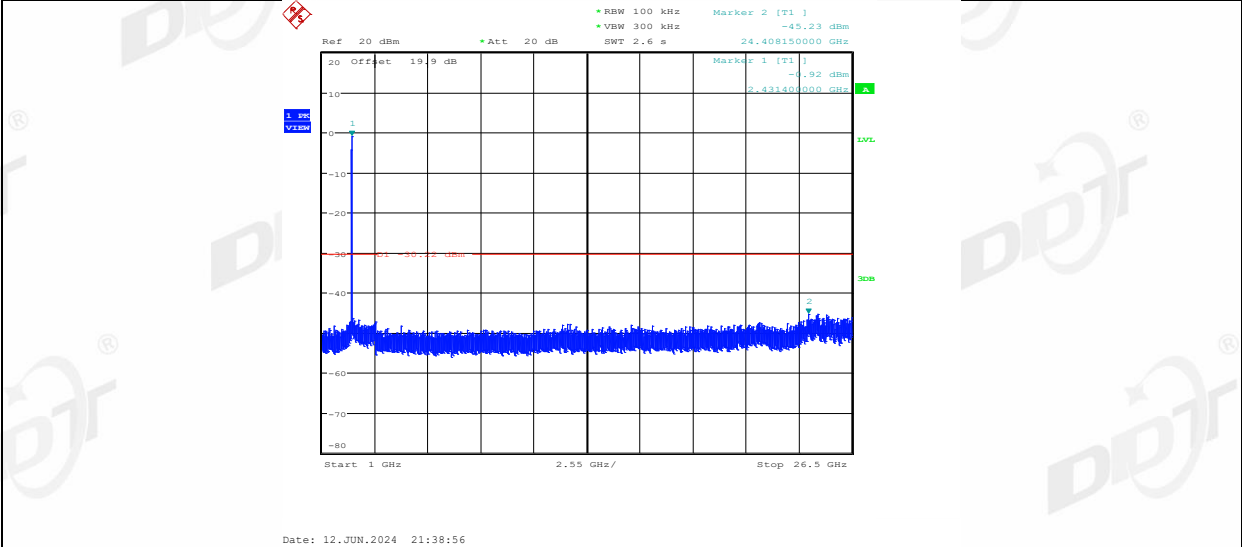


11N20MIMO_Ant2_2437_0~Reference

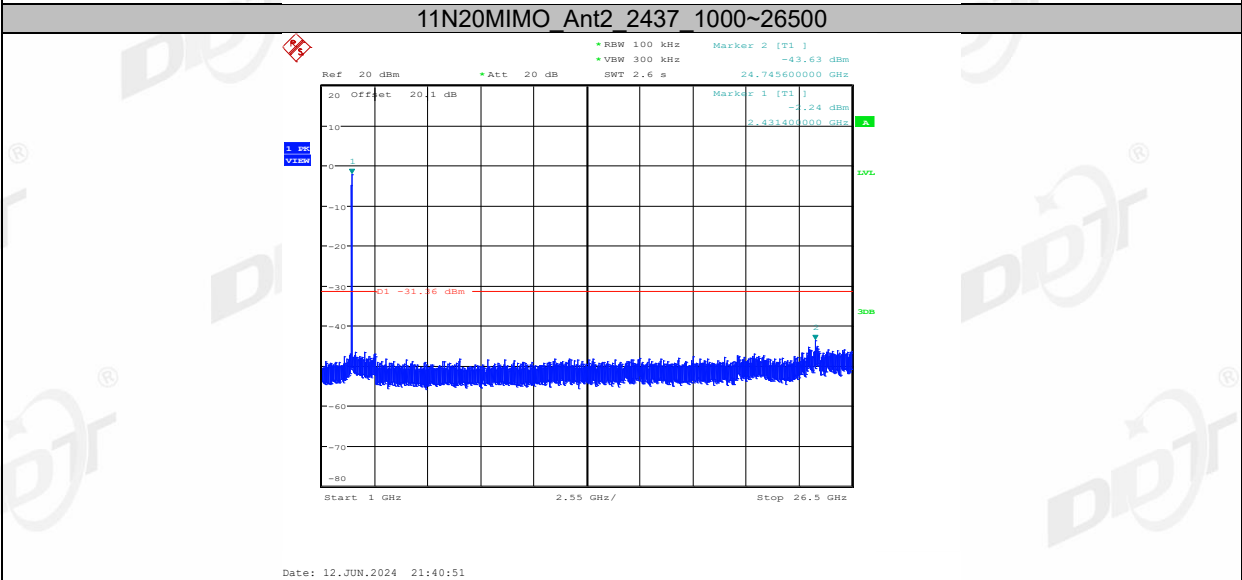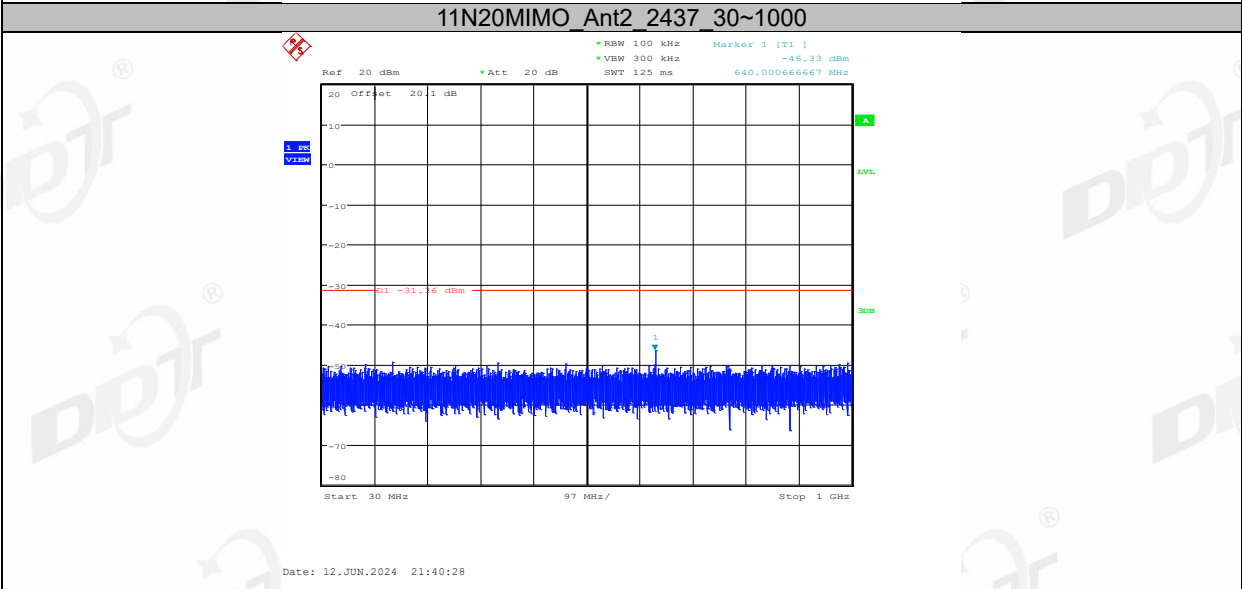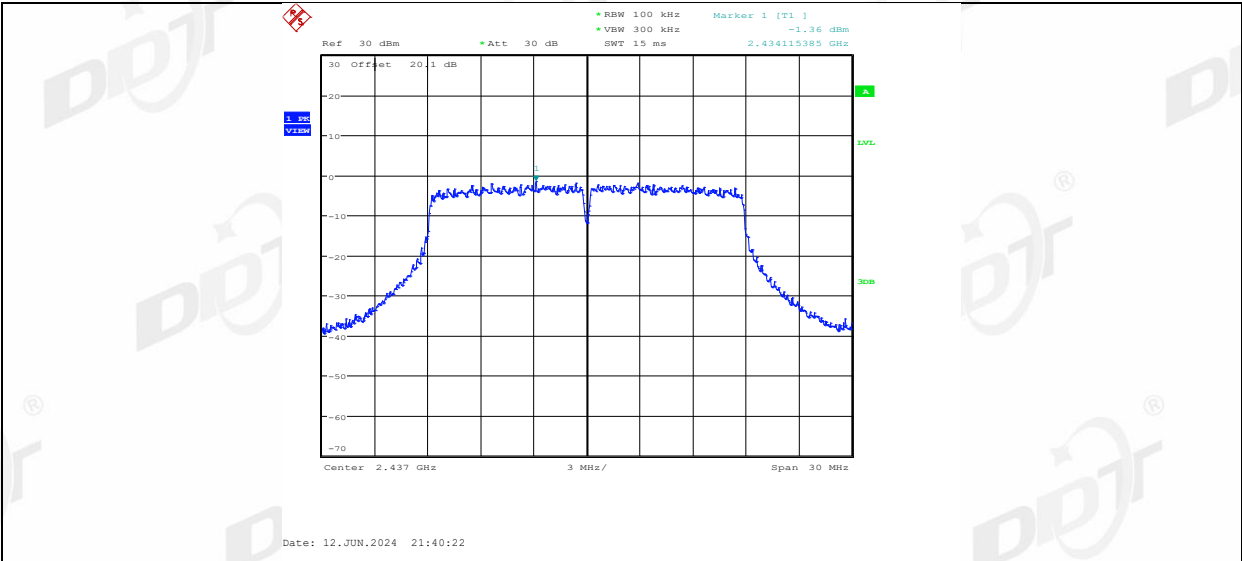


11N20MIMO_Ant1_2462_0~Reference

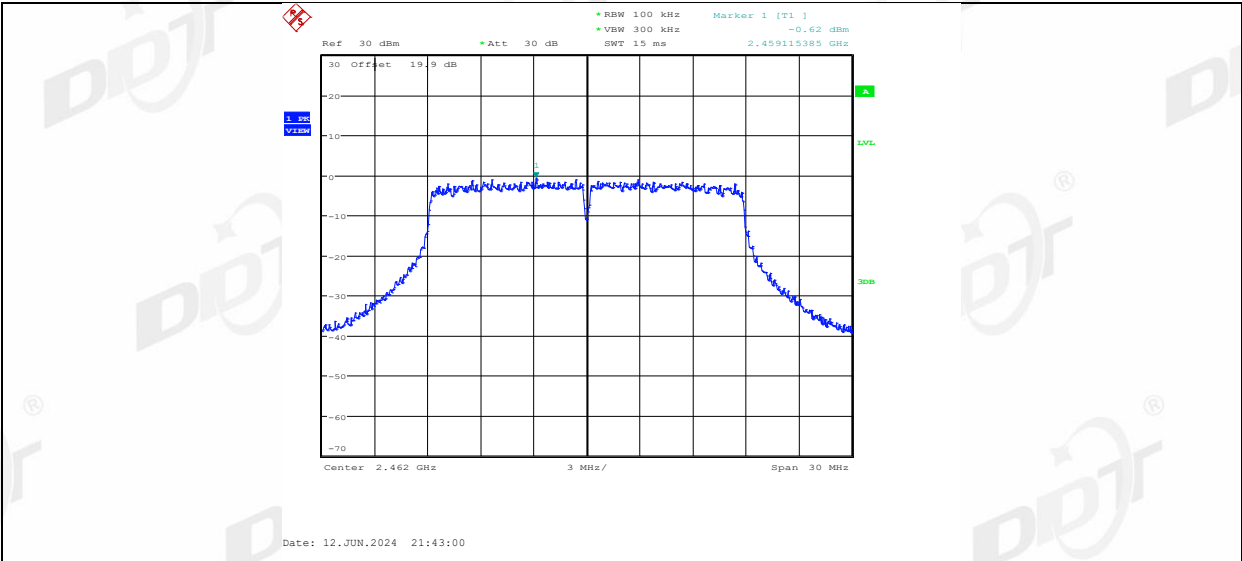


11N20MIMO_Ant1_2462_30~1000

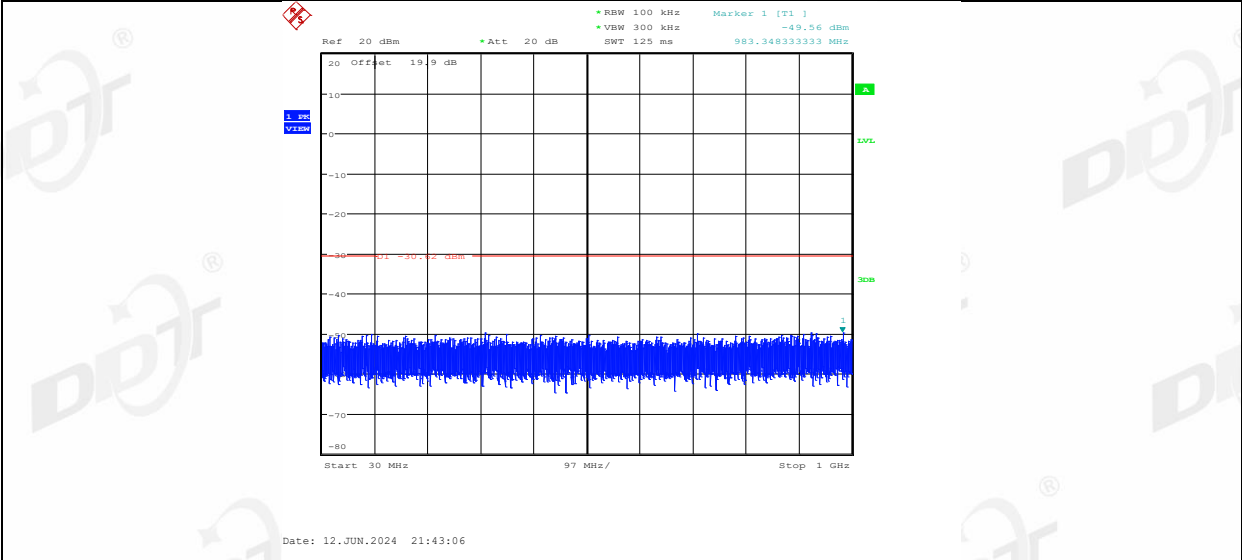


11N20MIMO_Ant1_2462_1000~26500

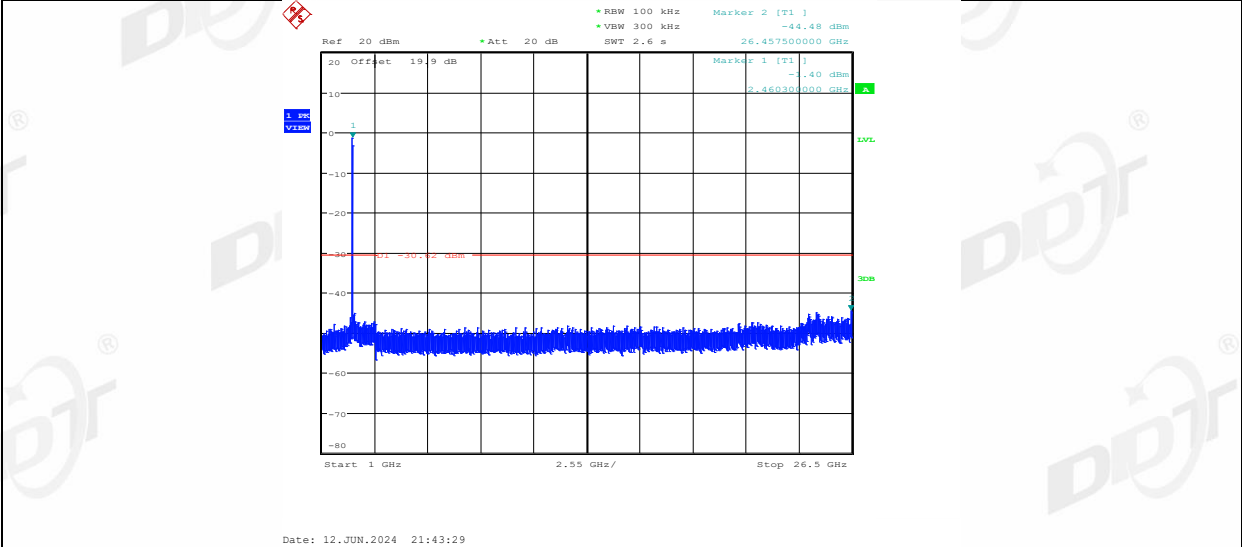


11N20MIMO_Ant2_2462_0~Reference

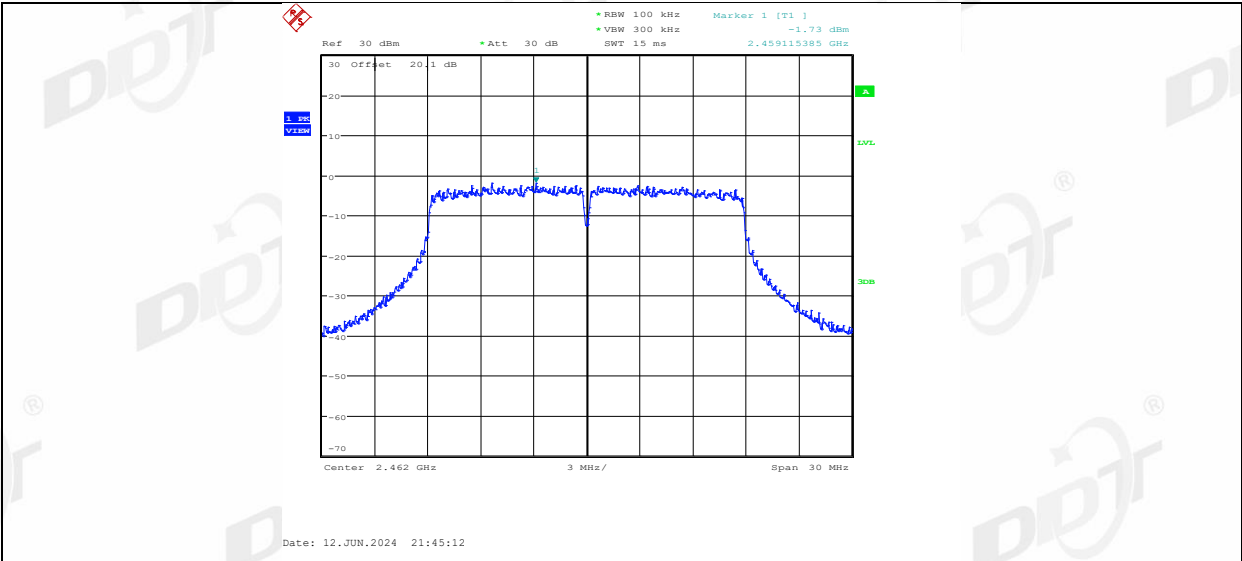


11N20MIMO_Ant2_2462_30~1000

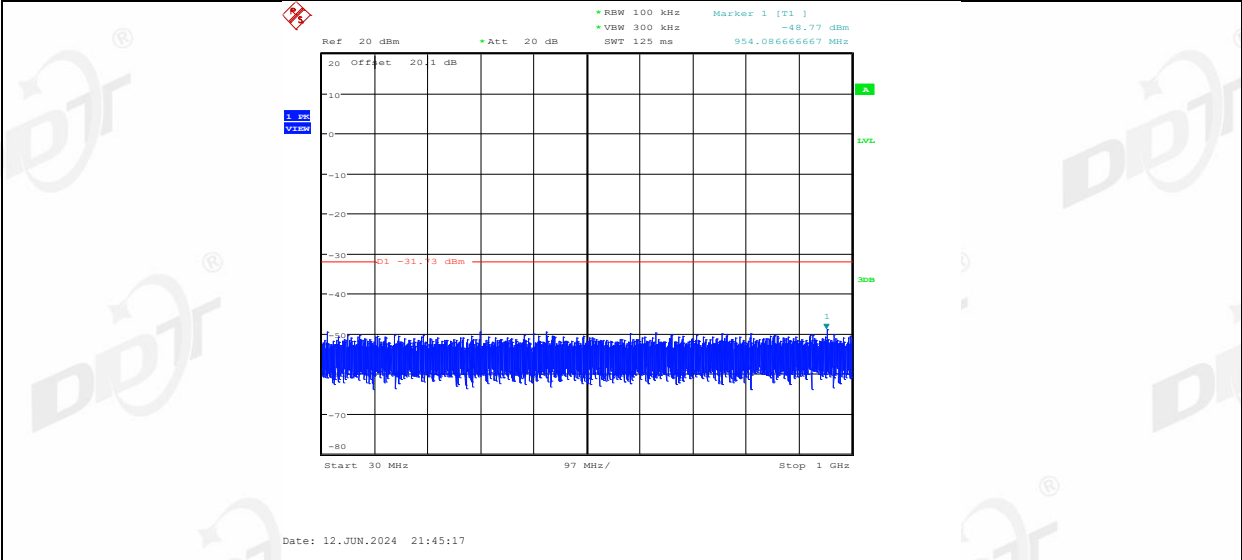


11N20MIMO_Ant2_2462_1000~26500

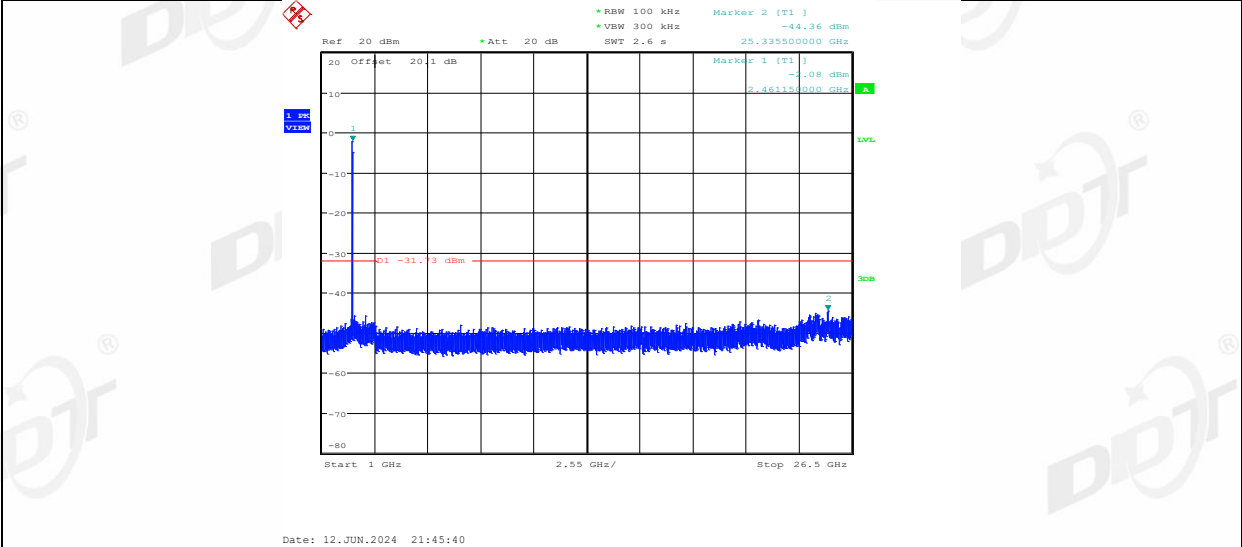


11N40MIMO_Ant1_2422_0~Reference

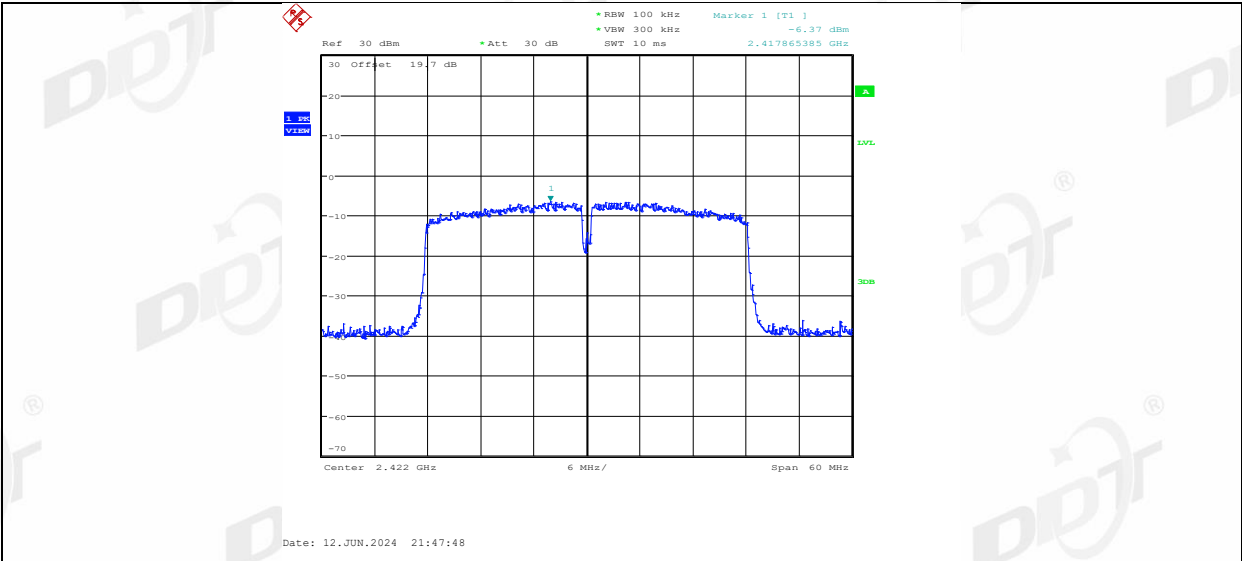


11N40MIMO_Ant1_2422_30~1000

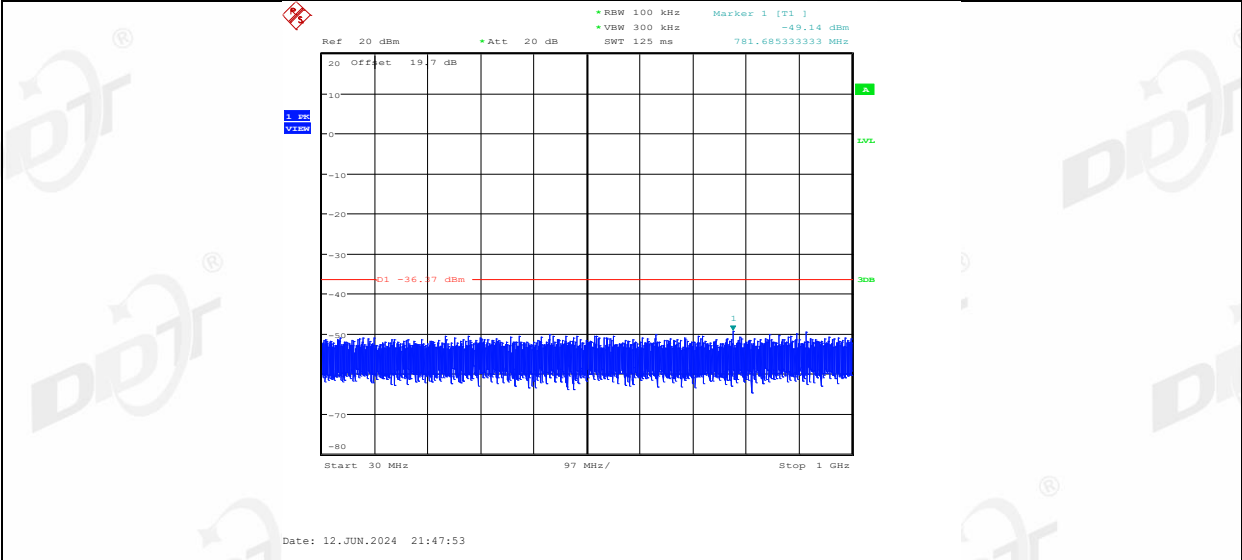


11N40MIMO_Ant1_2422_1000~26500

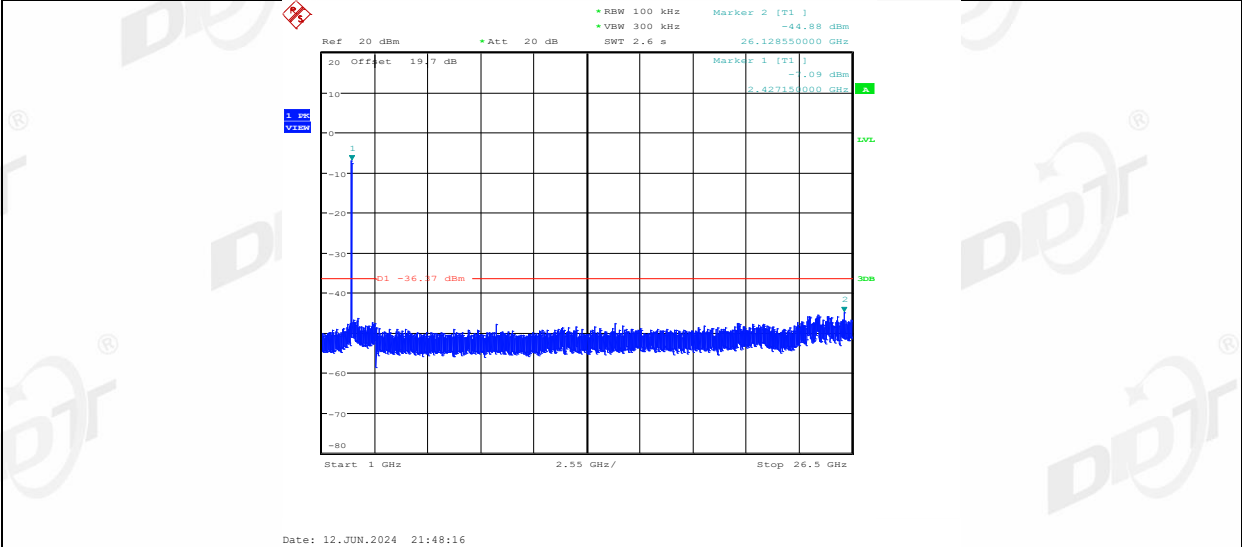


11N40MIMO_Ant2_2422_0~Reference

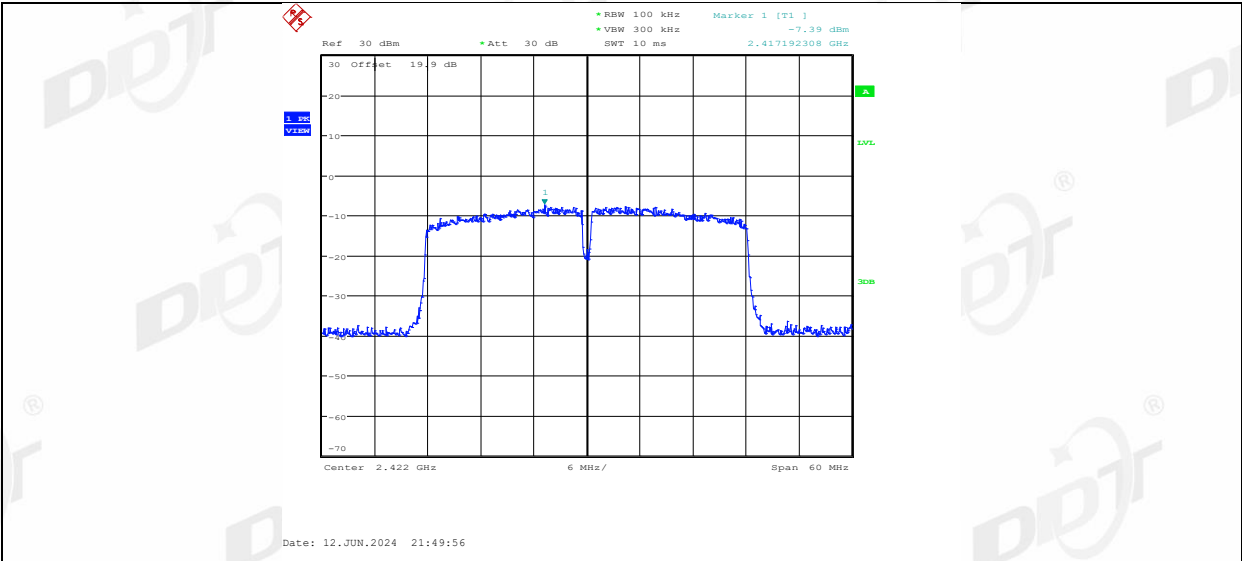


11N40MIMO_Ant2_2422_30~1000

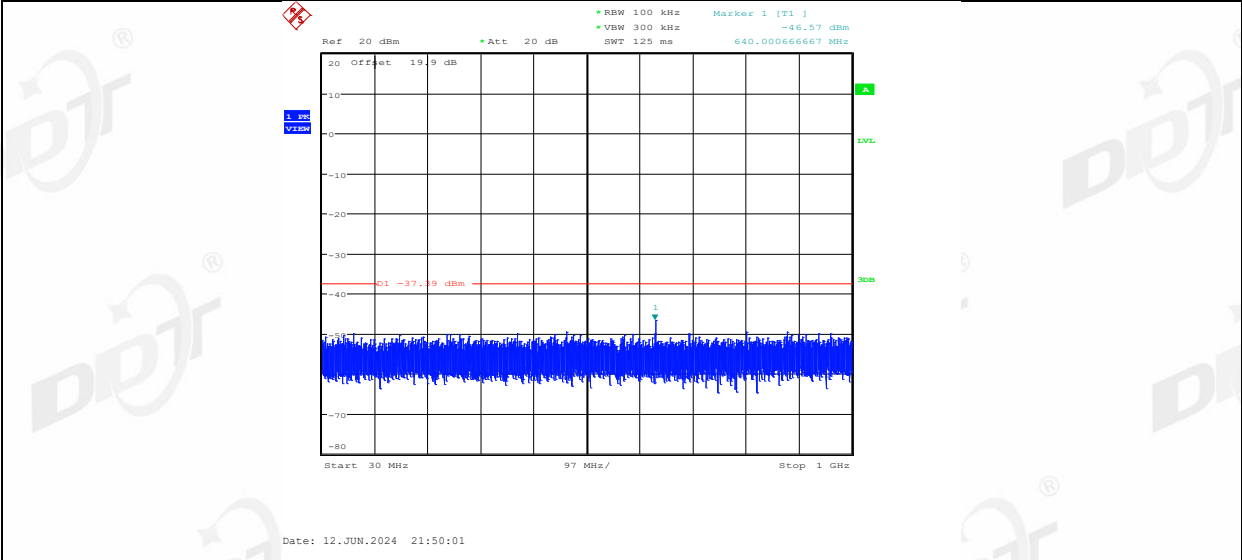


11N40MIMO_Ant2_2422_1000~26500

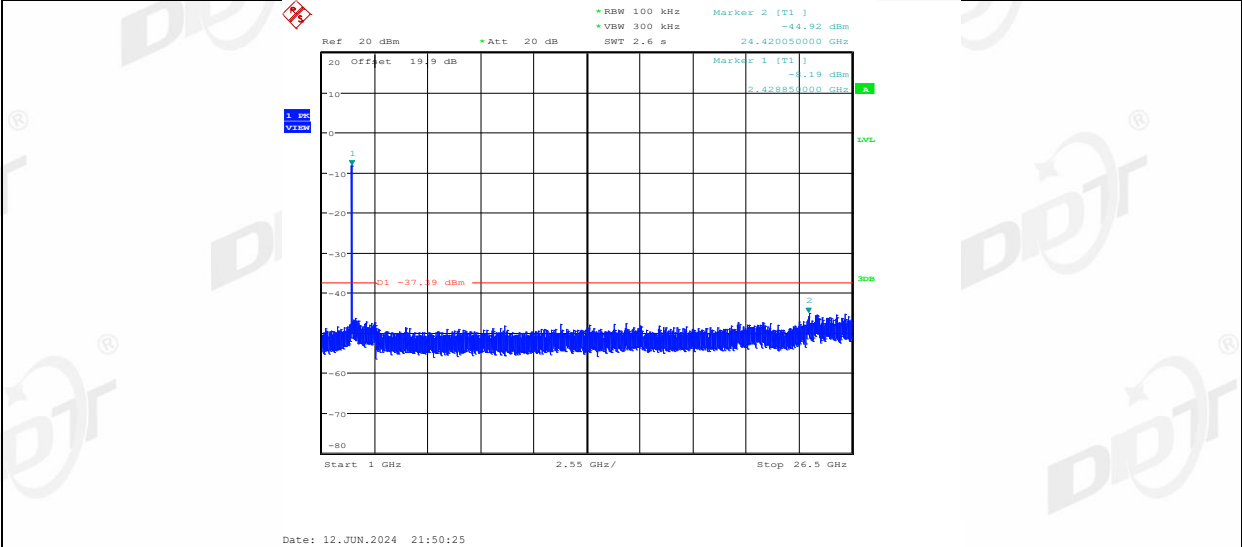


11N40MIMO_Ant1_2437_0~Reference

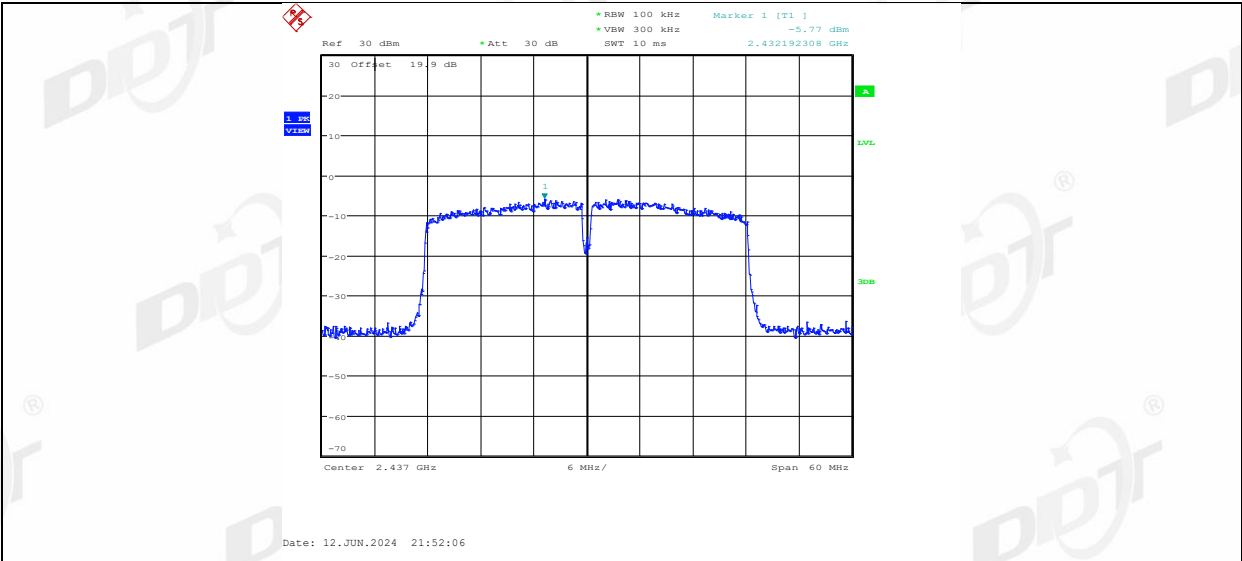


11N40MIMO_Ant1_2437_30~1000

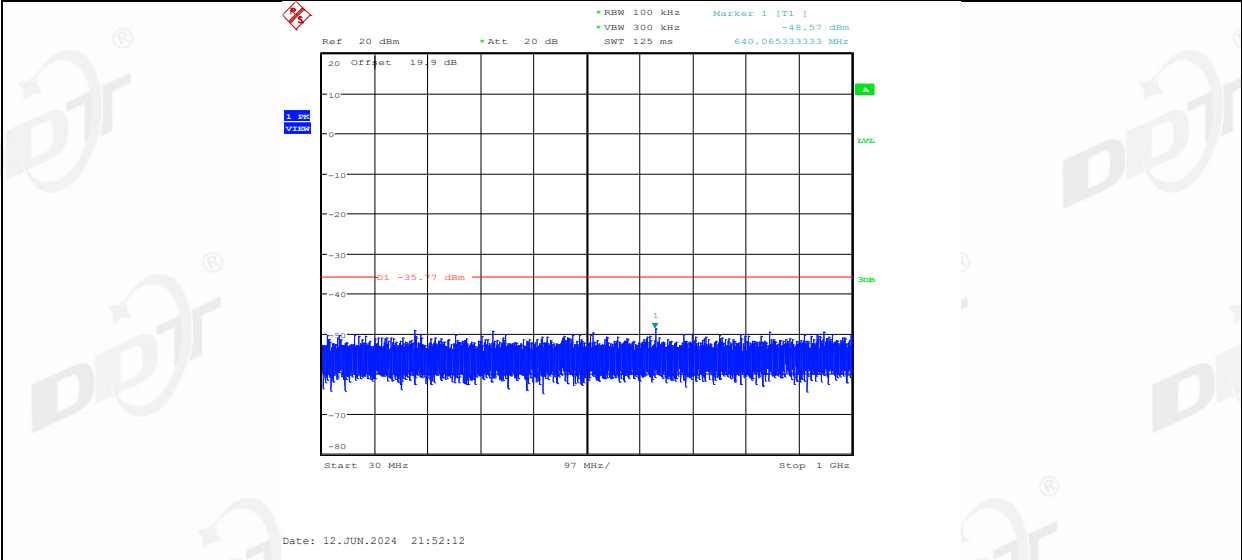


11N40MIMO_Ant1_2437_1000~26500

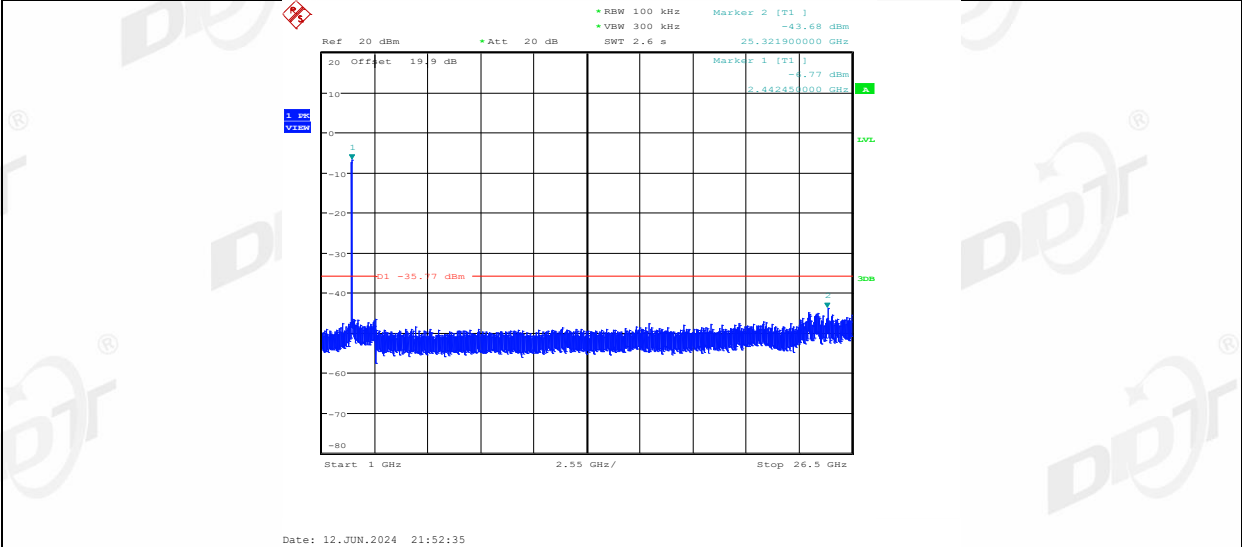


11N40MIMO_Ant2_2437_0~Reference

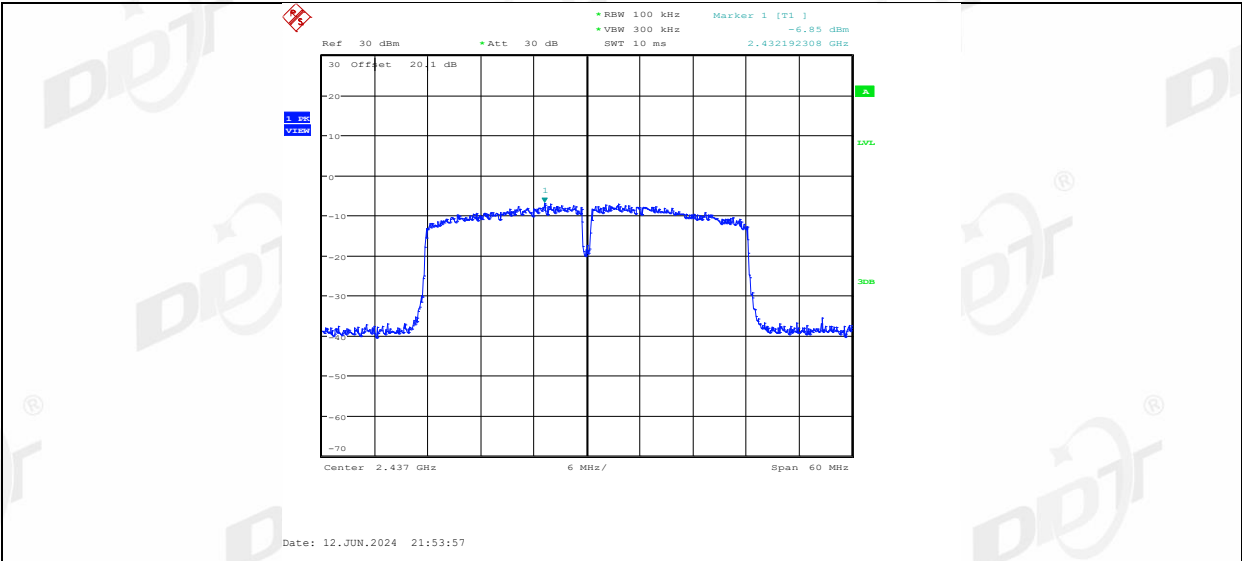


11N40MIMO_Ant2_2437_30~1000

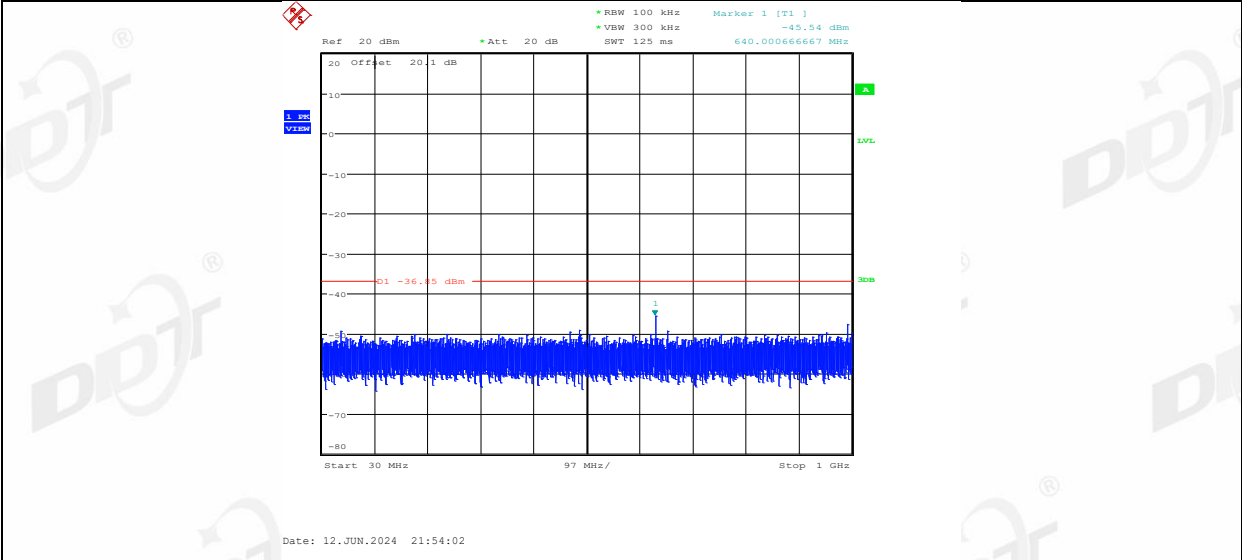


11N40MIMO_Ant2_2437_1000~26500

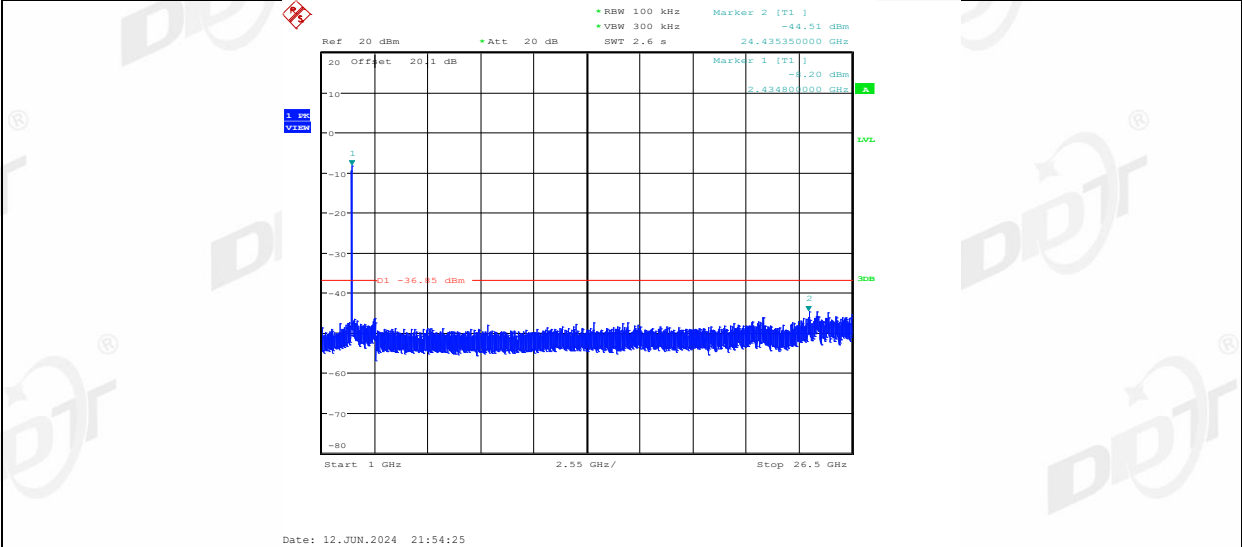


11N40MIMO_Ant1_2452_0~Reference

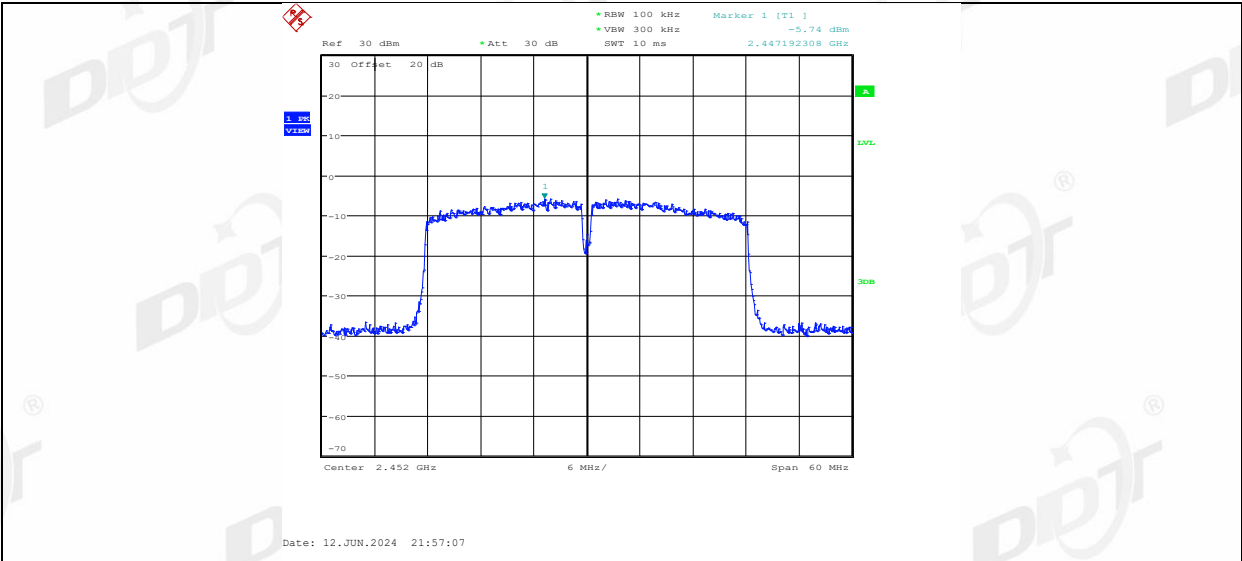




11N40MIMO_Ant1_2452_30~1000

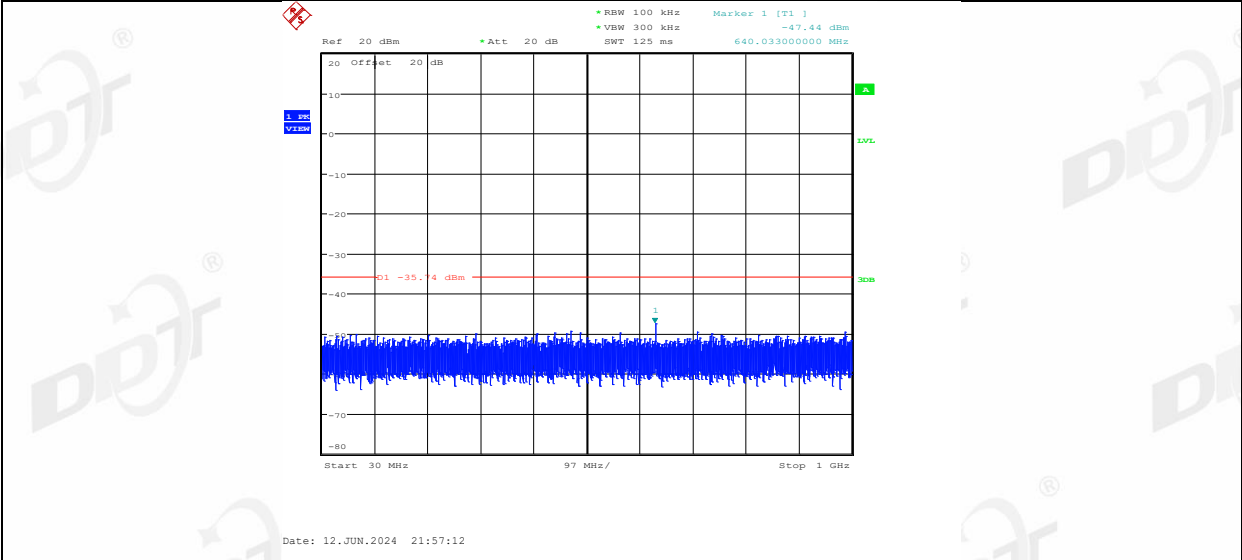

11N40MIMO_Ant1_2452_1000~26500

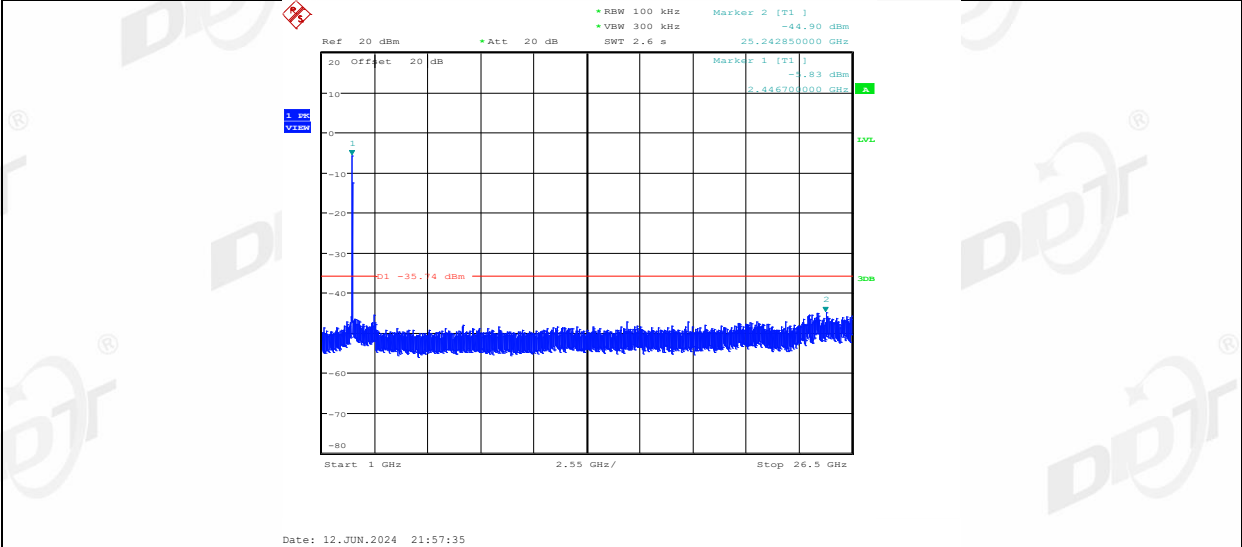


11N40MIMO_Ant2_2452_0~Reference

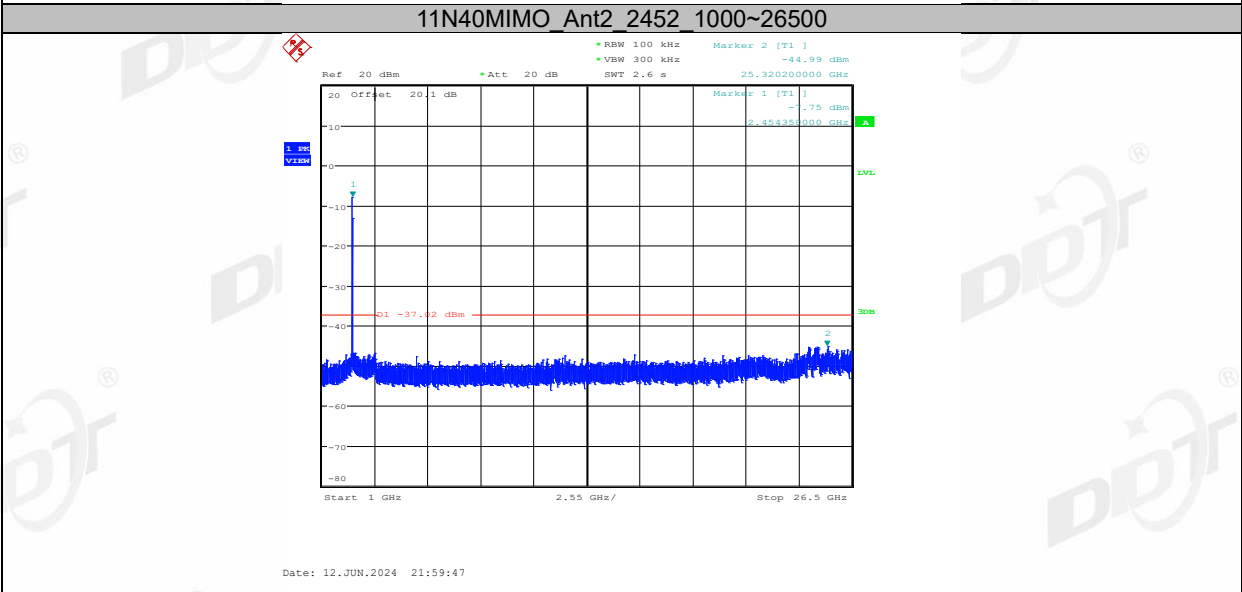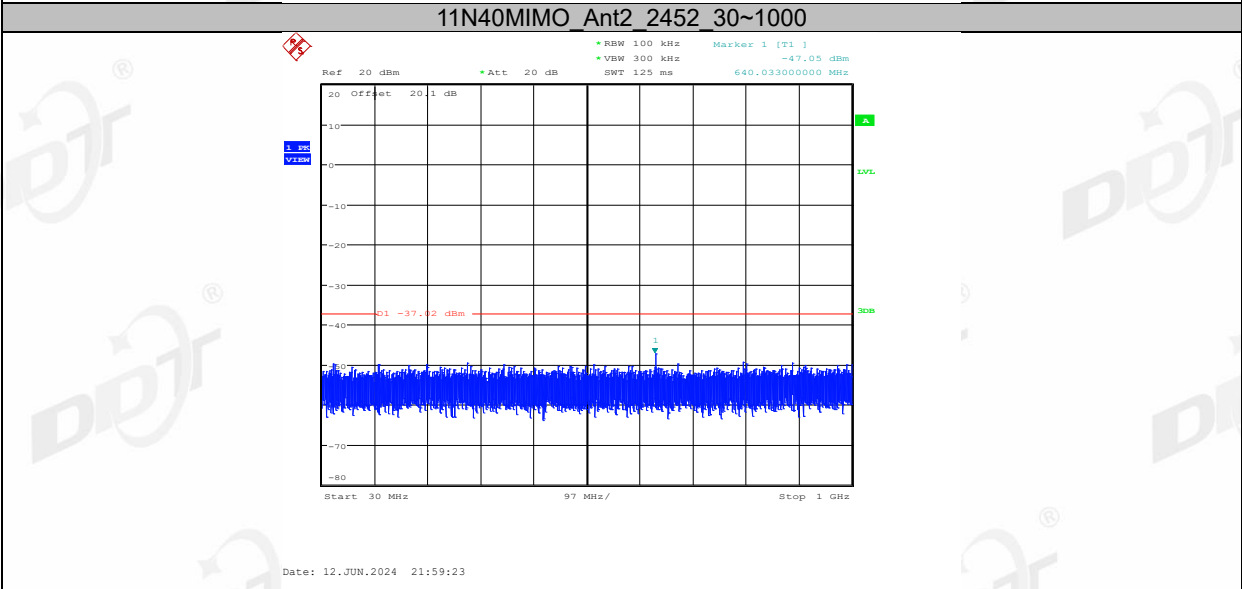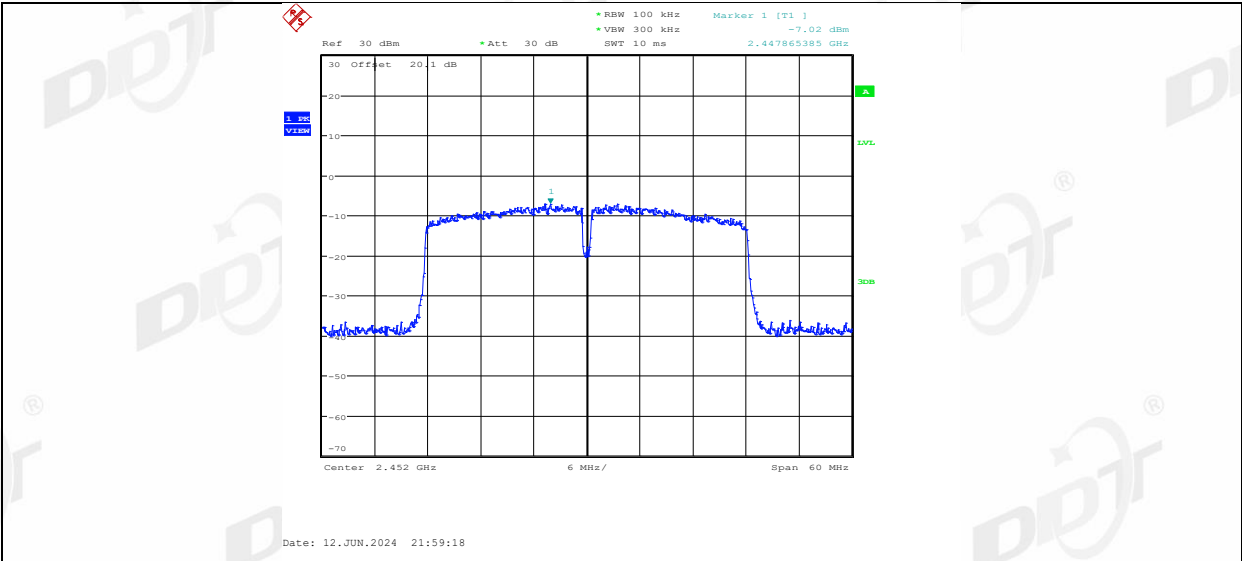

10. Duty Cycle

10.1. Block diagram of test setup

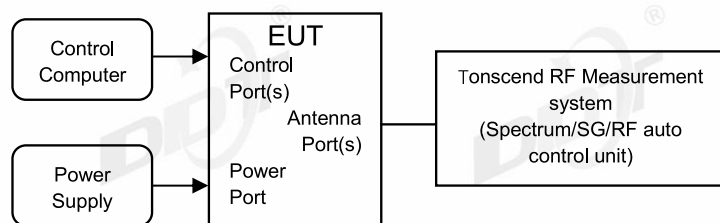

10.2. Limit

Just for Report.

10.3. Test procedure


- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


10.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	25.8℃,55.9%RH	Test Date:	2024.06.12-2024.08.18
Test Power Supply:	AC120V/60Hz	Sample Number:	S24051516-001


Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	20.00	20.00	100.00
	Ant2	2412	20.00	20.00	100.00
	Ant1	2437	20.00	20.00	100.00
	Ant2	2437	20.00	20.00	100.00
	Ant1	2462	20.00	20.00	100.00
	Ant2	2462	20.00	20.00	100.00
11G	Ant1	2412	20.00	20.00	100.00
	Ant2	2412	20.00	20.00	100.00
	Ant1	2437	20.00	20.00	100.00
	Ant2	2437	20.00	20.00	100.00
	Ant1	2462	20.00	20.00	100.00
	Ant2	2462	20.00	20.00	100.00
11N20MIMO	Ant1	2412	20.00	20.00	100.00
	Ant2	2412	20.00	20.00	100.00
	Ant1	2437	20.00	20.00	100.00
	Ant2	2437	20.00	20.00	100.00
	Ant1	2462	20.00	20.00	100.00
	Ant2	2462	20.00	20.00	100.00
11N40MIMO	Ant1	2422	20.00	20.00	100.00
	Ant2	2422	20.00	20.00	100.00
	Ant1	2437	20.00	20.00	100.00
	Ant2	2437	20.00	20.00	100.00
	Ant1	2452	20.00	20.00	100.00
	Ant2	2452	20.00	20.00	100.00

10.5. Test graphs

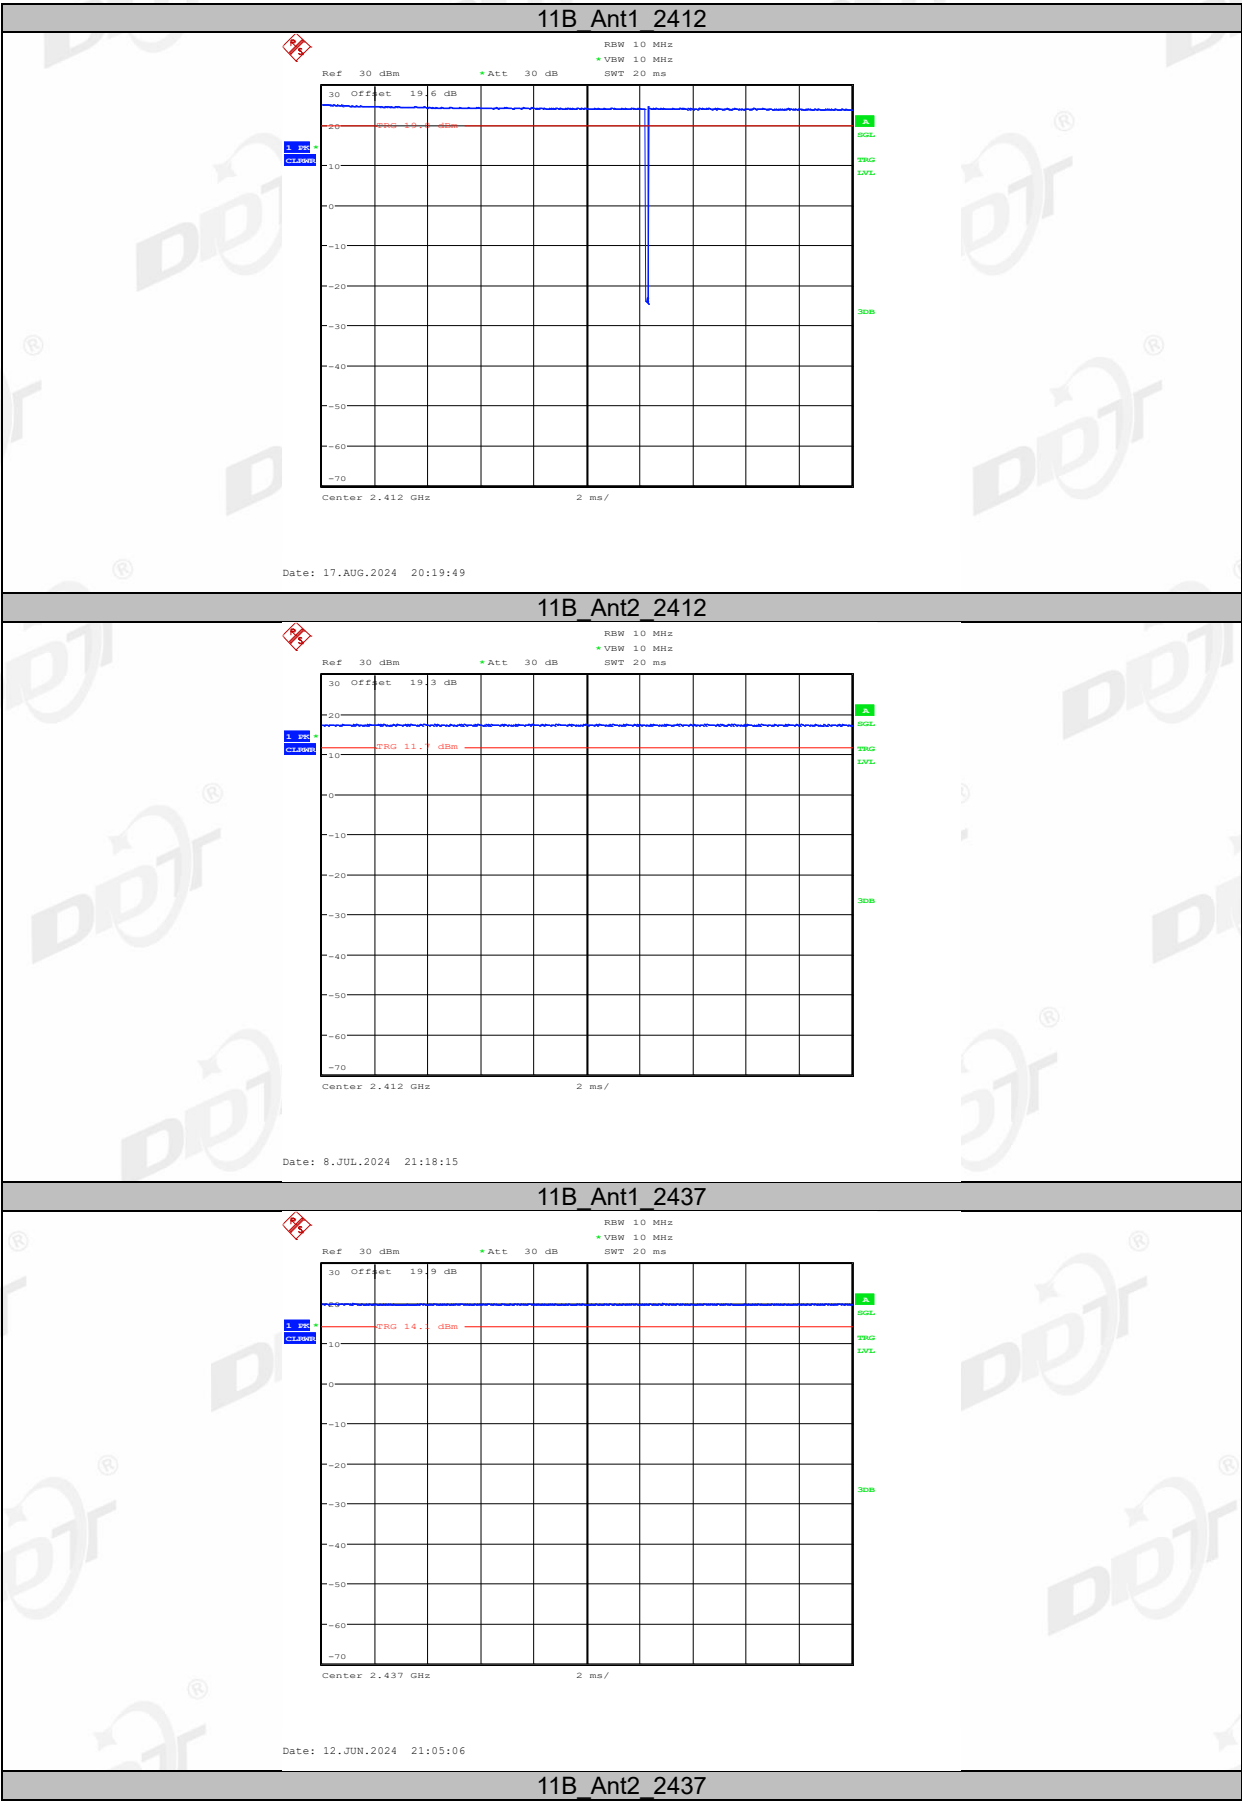


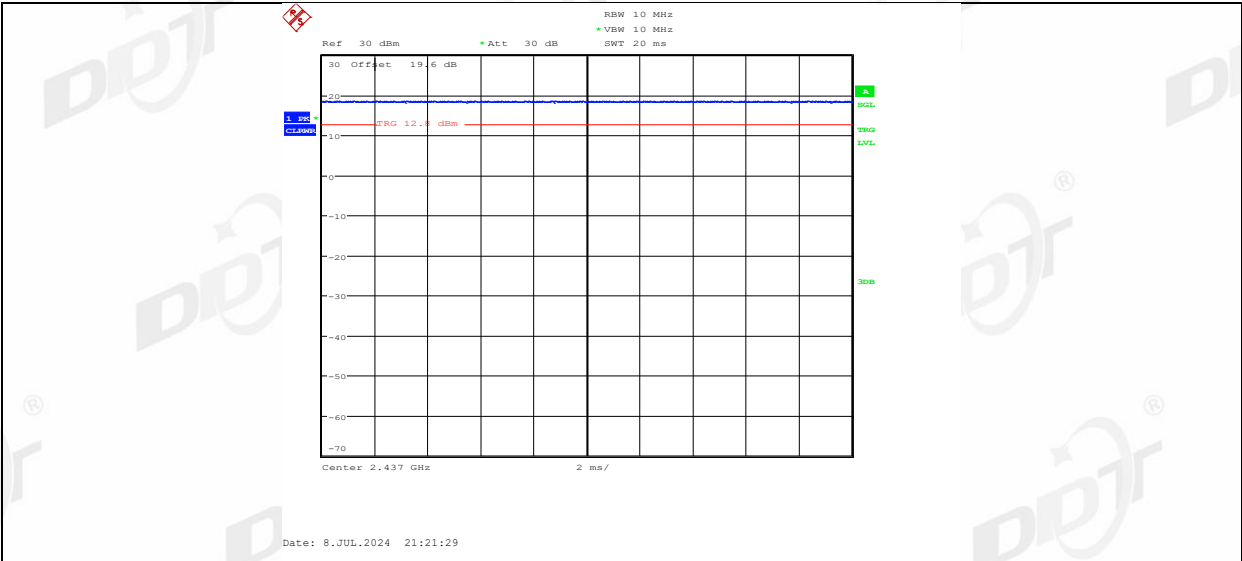


11B_Ant1_2462

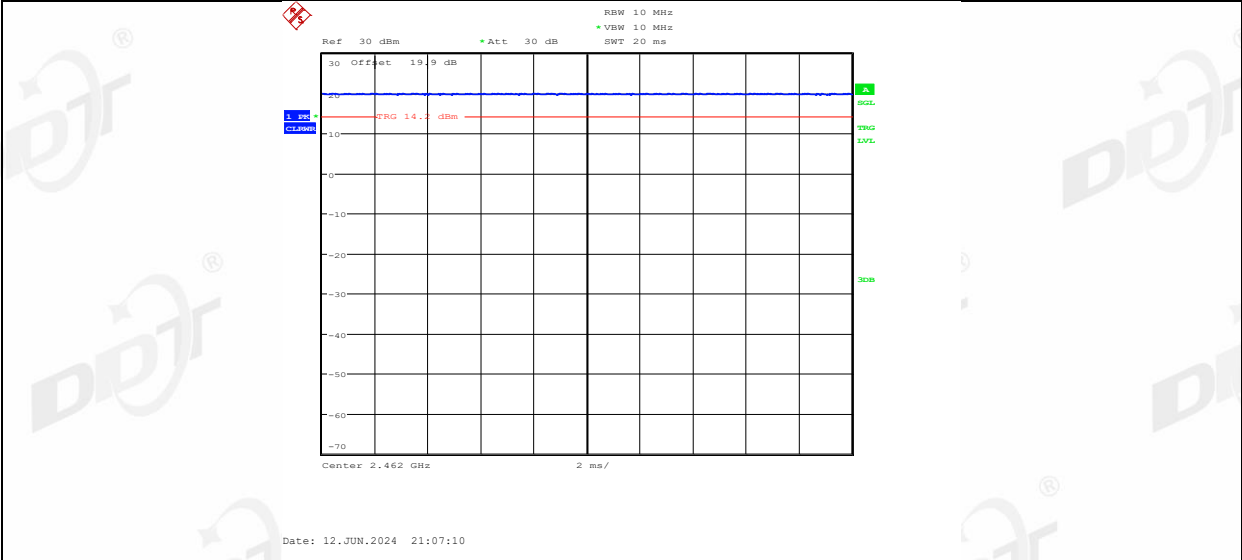


11B_Ant2_2462

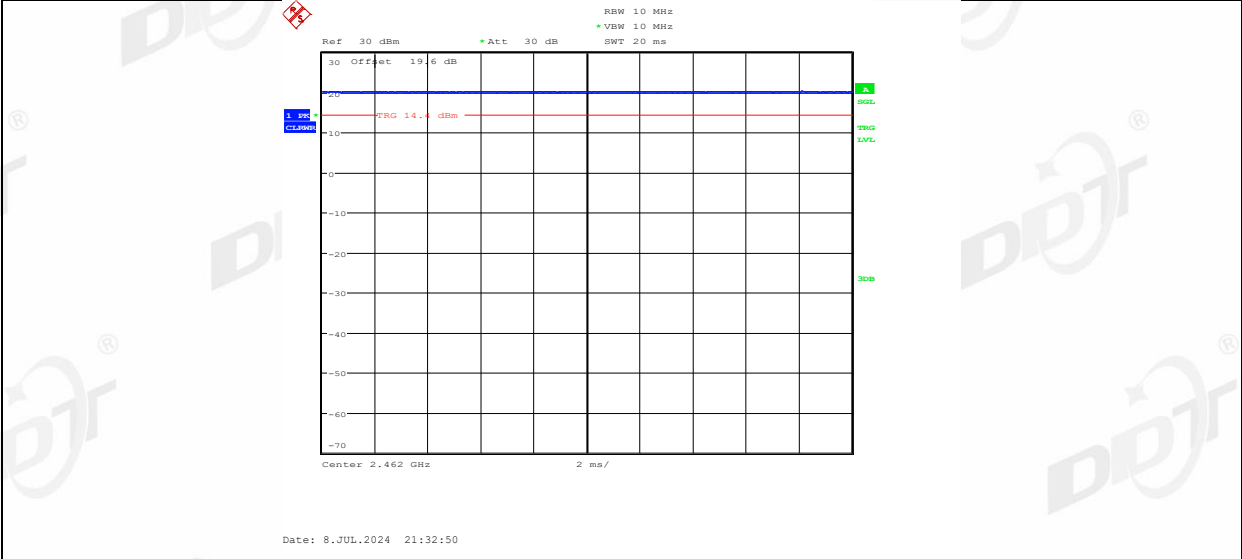


11G_Ant1_2412

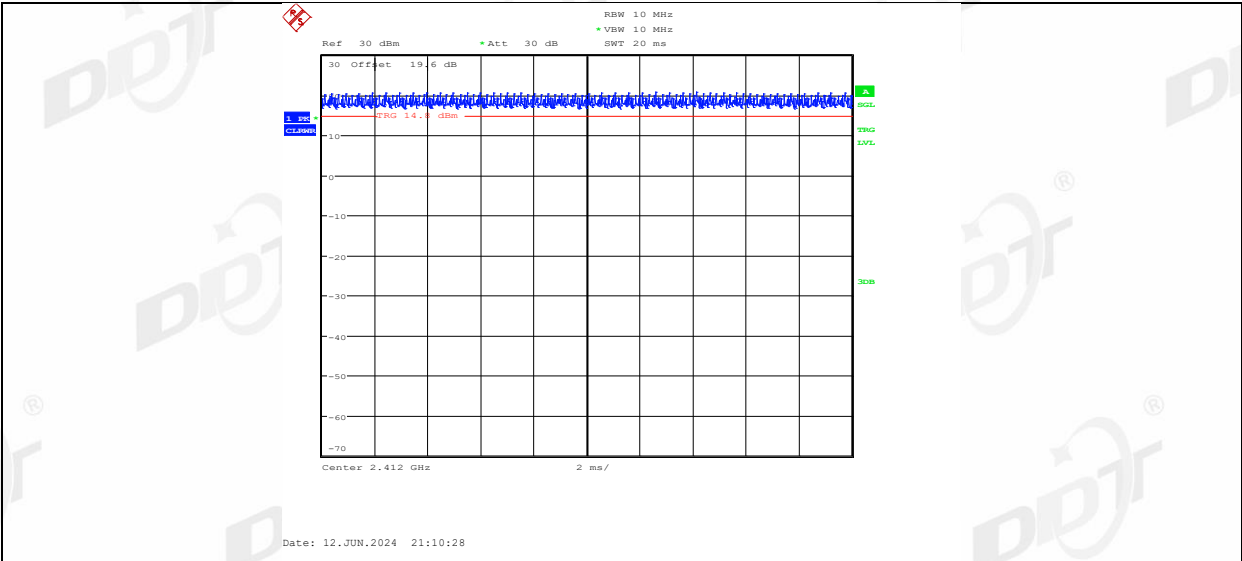




11G_Ant2_2412

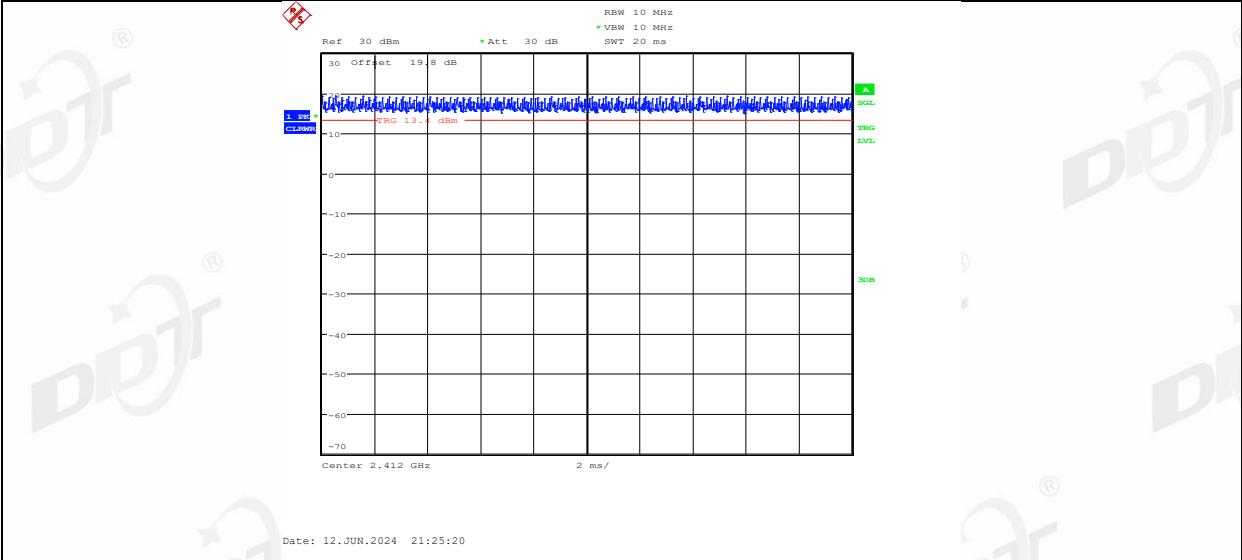


11G_Ant1_2437

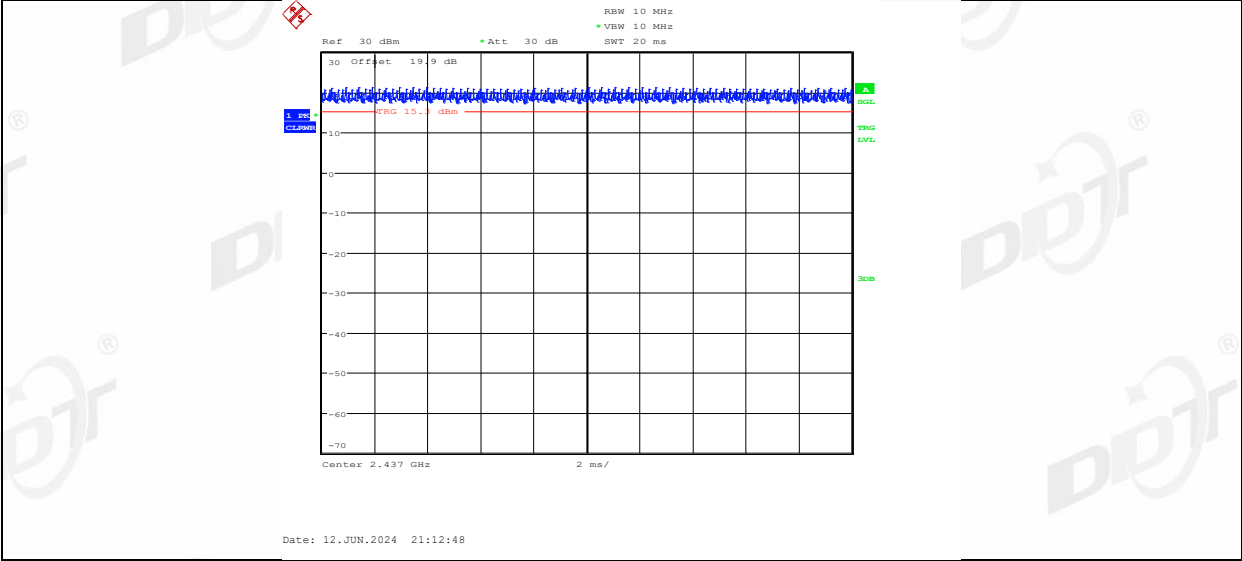


11G_Ant2_2437




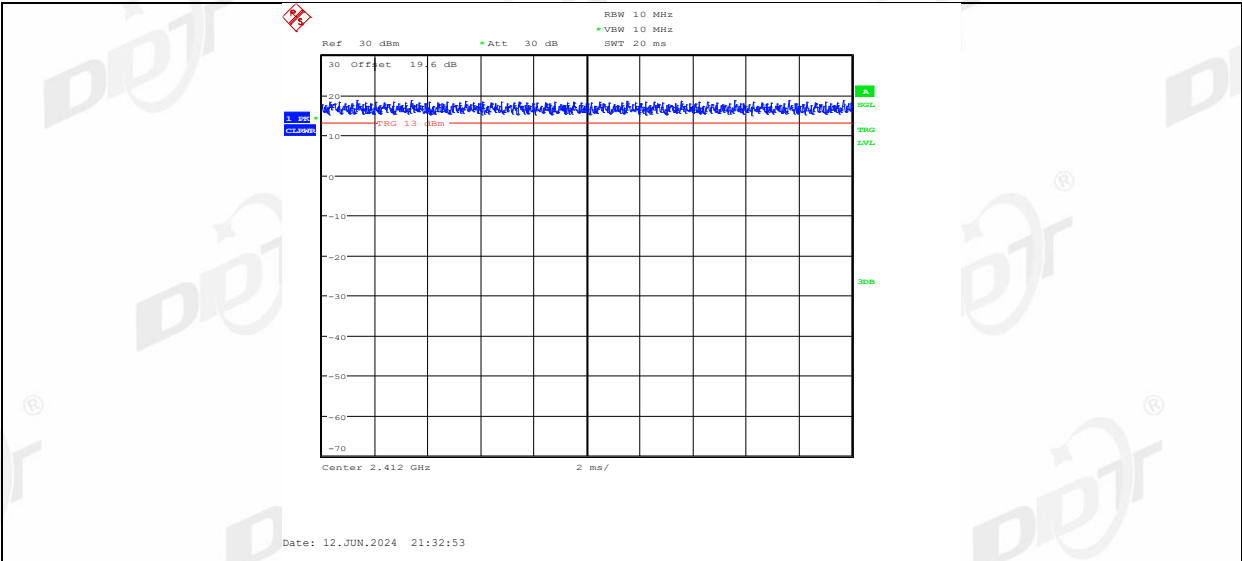


11N20MIMO_Ant2_2412

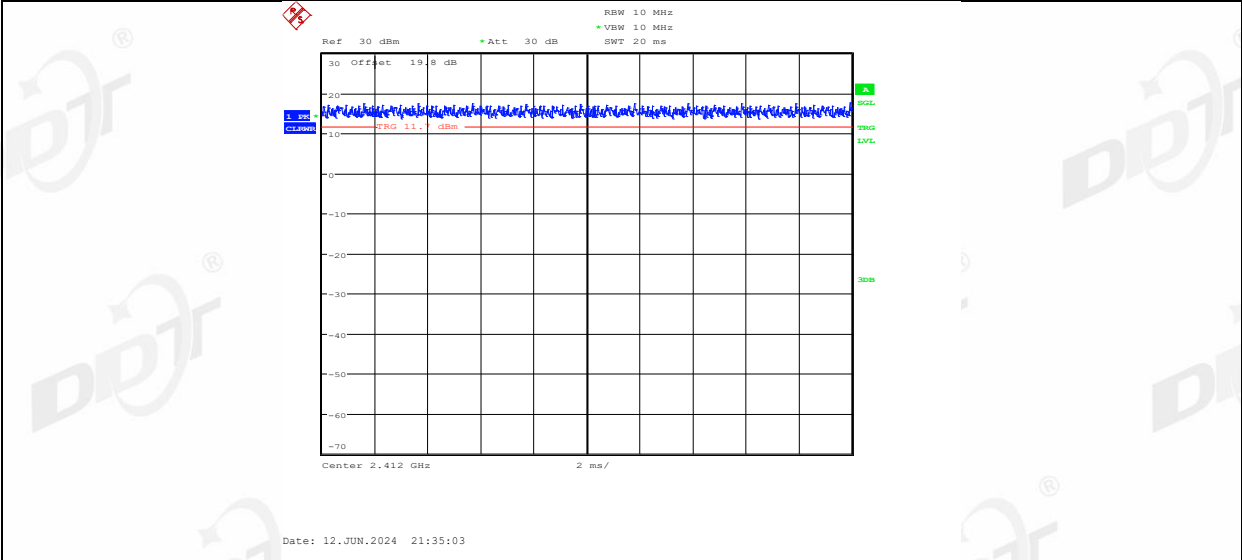


11N20MIMO_Ant1_2437

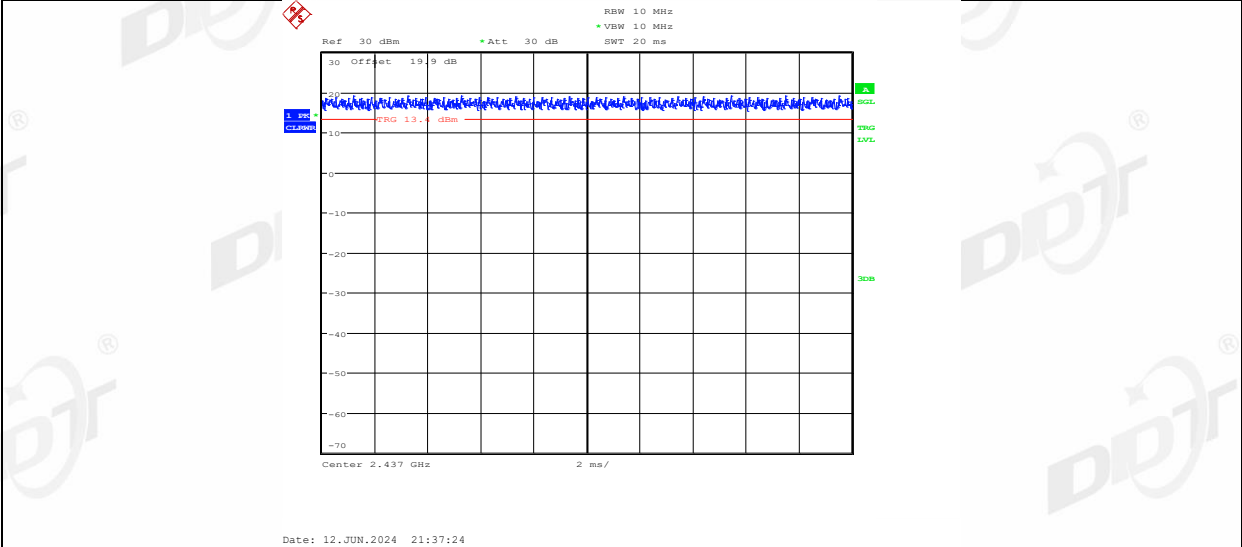


11N20MIMO_Ant2_2437

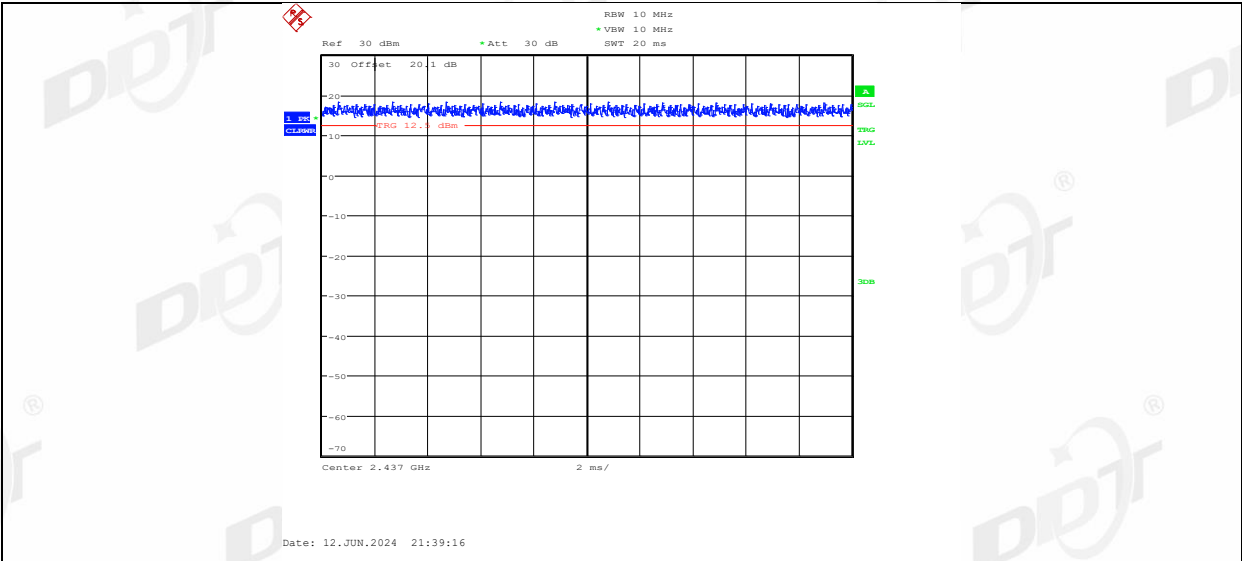


11N20MIMO_Ant1_2462

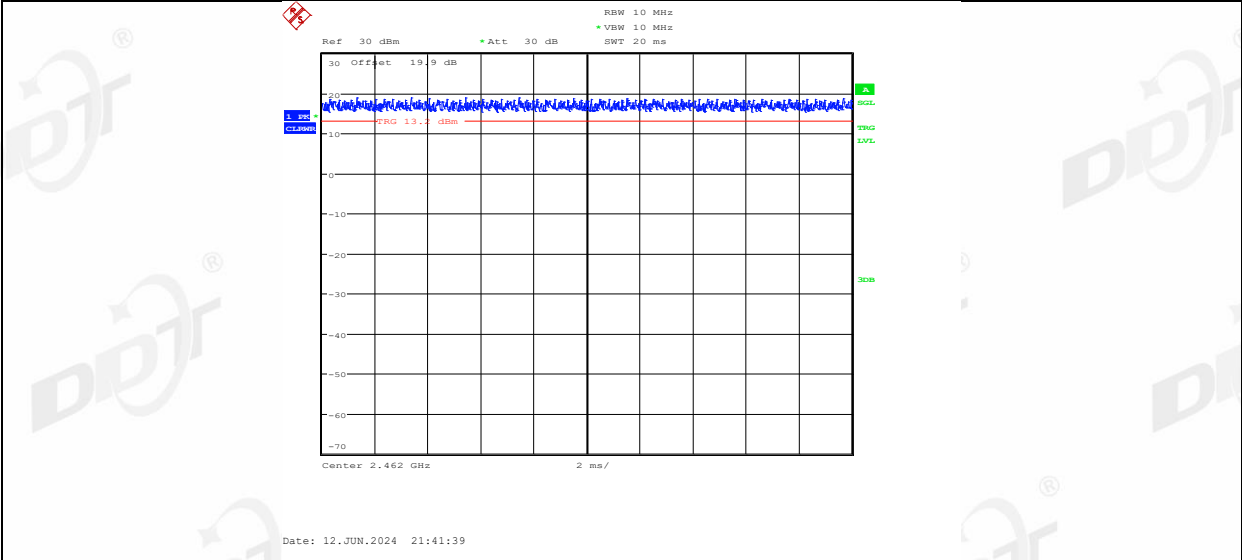


11N20MIMO_Ant2_2462

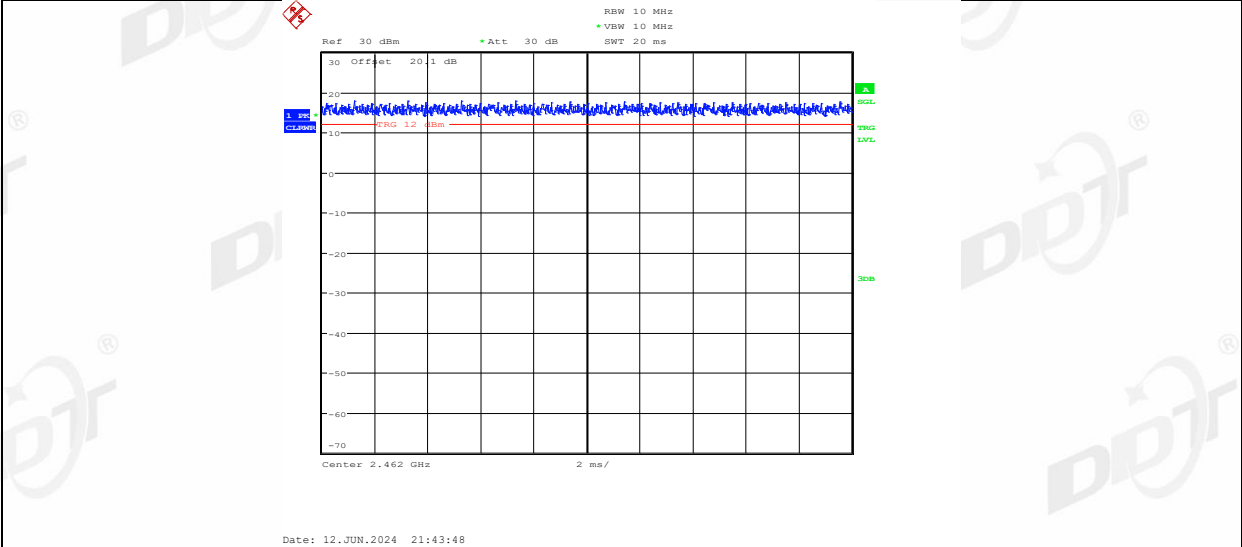


11N40MIMO_Ant1_2422

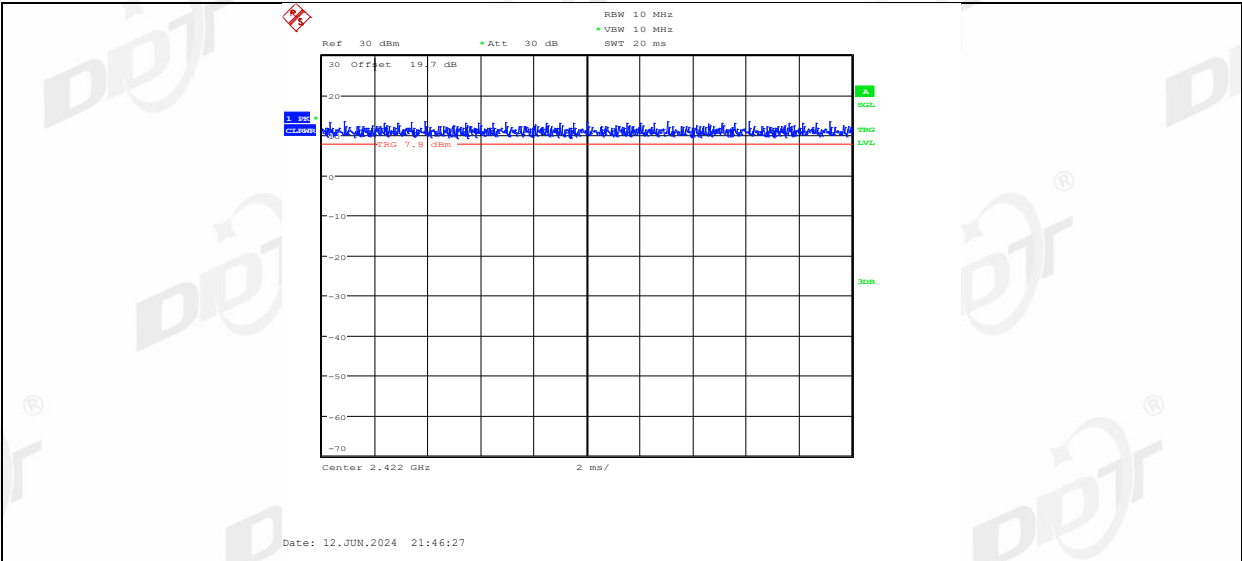


11N40MIMO_Ant2_2422

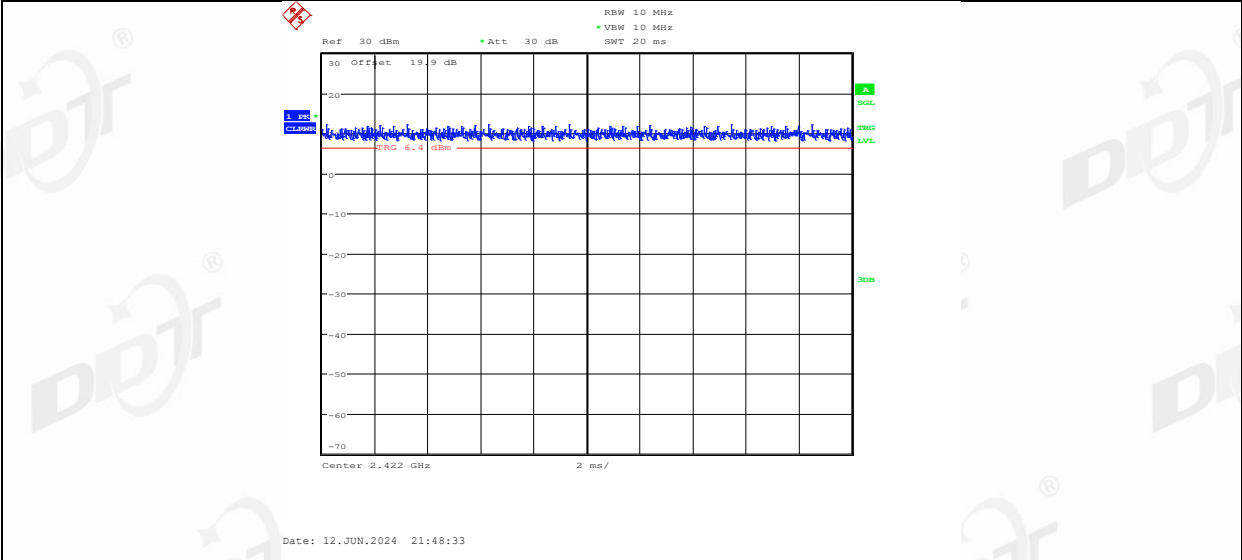


11N40MIMO_Ant1_2437

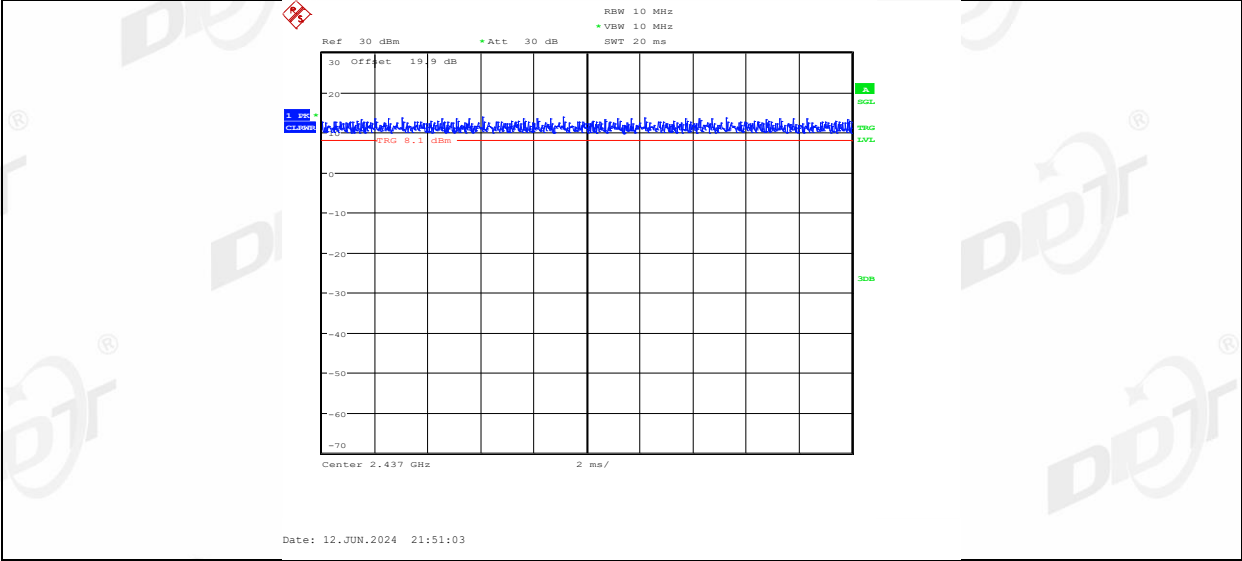


11N40MIMO_Ant2_2437

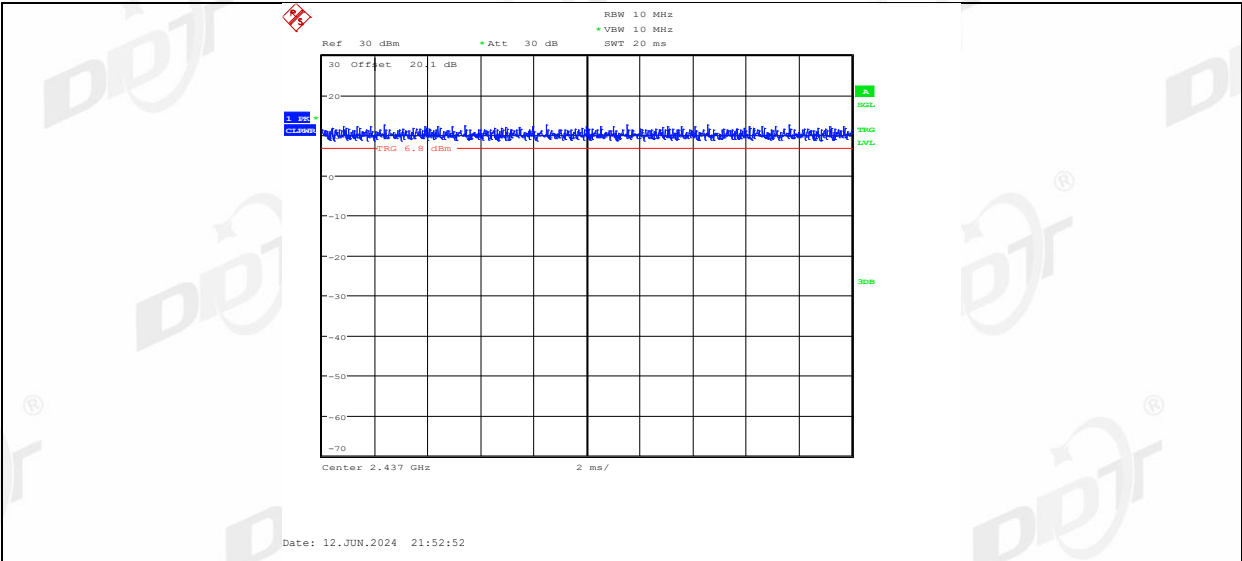

11N40MIMO_Ant1_2452

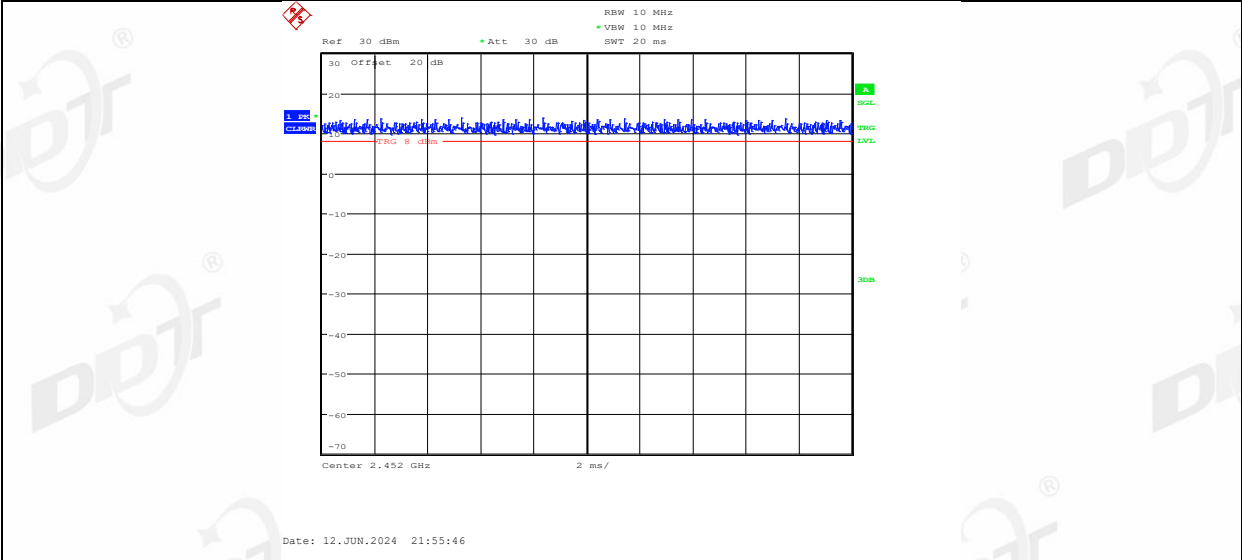

11N40MIMO_Ant2_2452

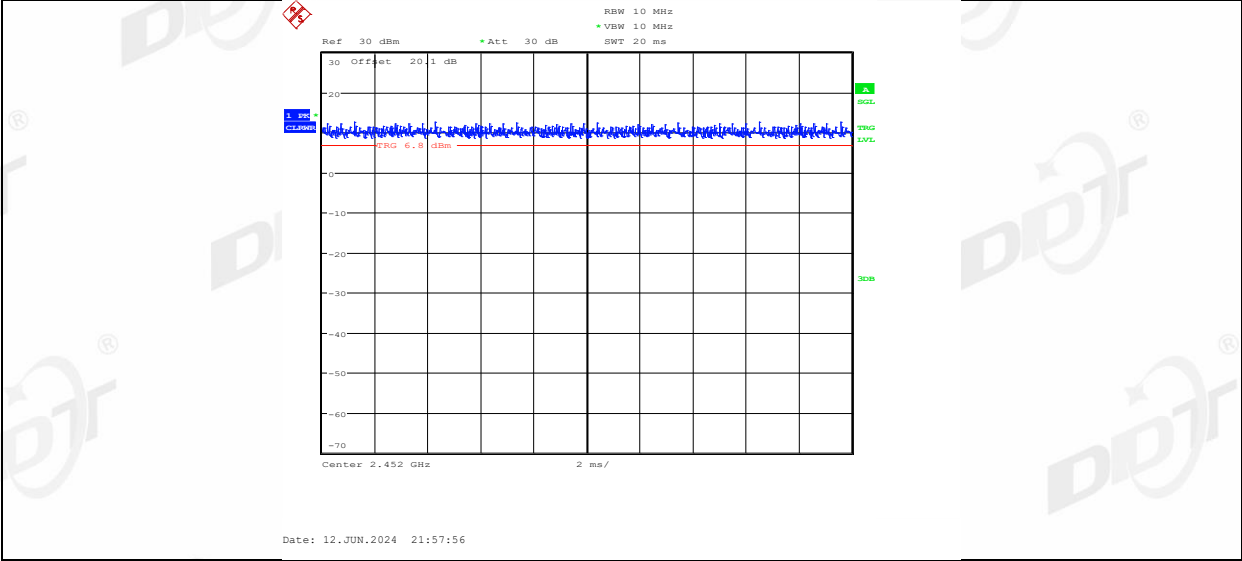

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12.Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31

12.2. Block diagram of test setup

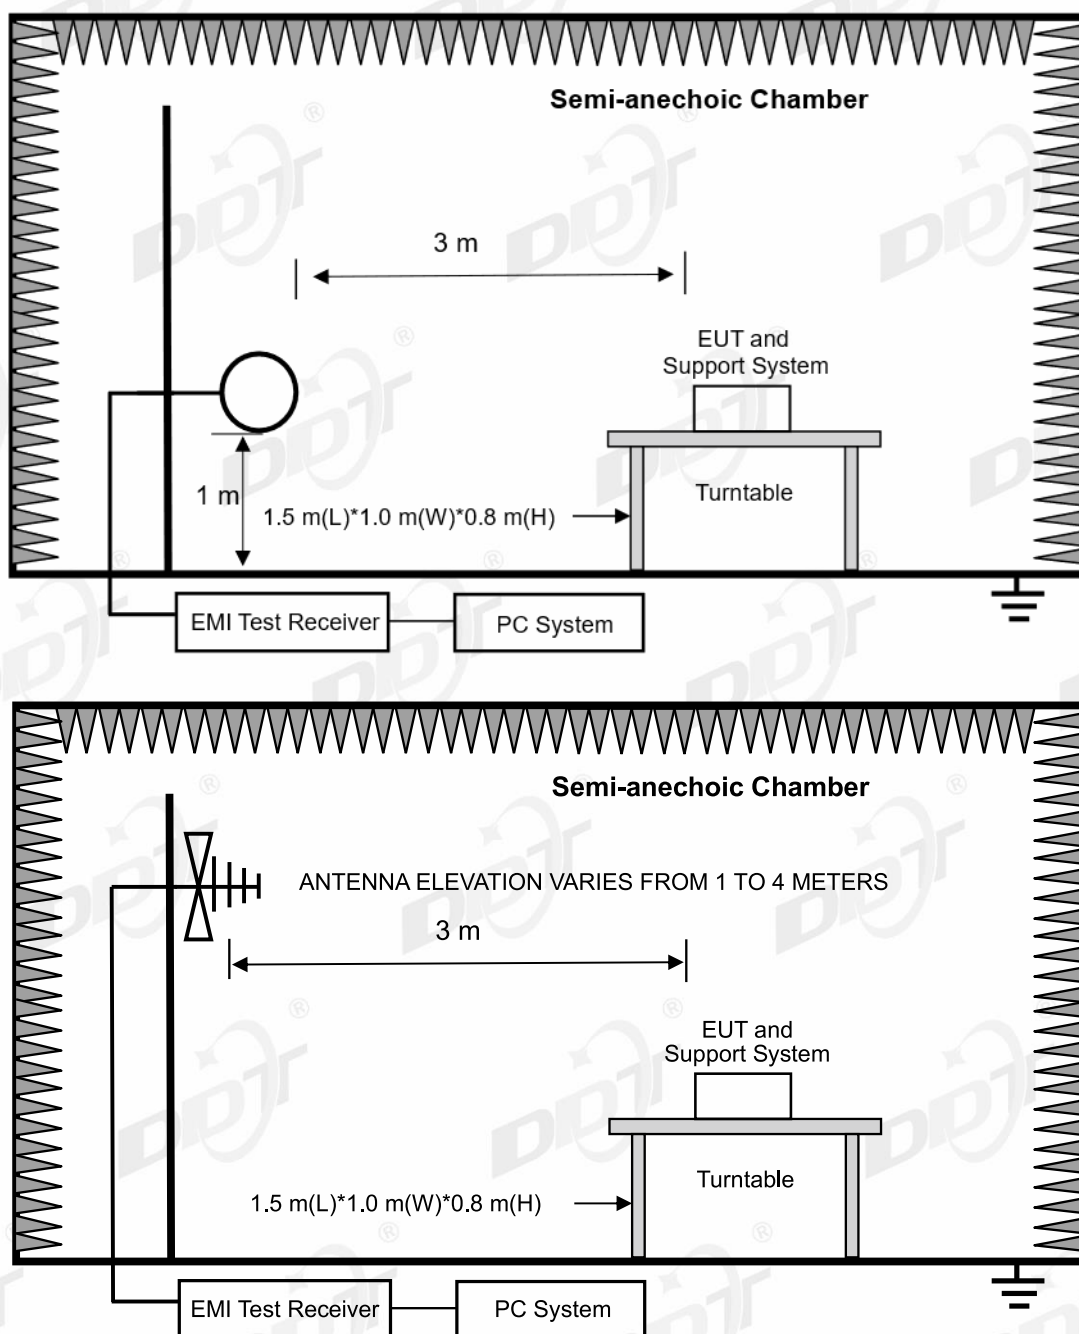

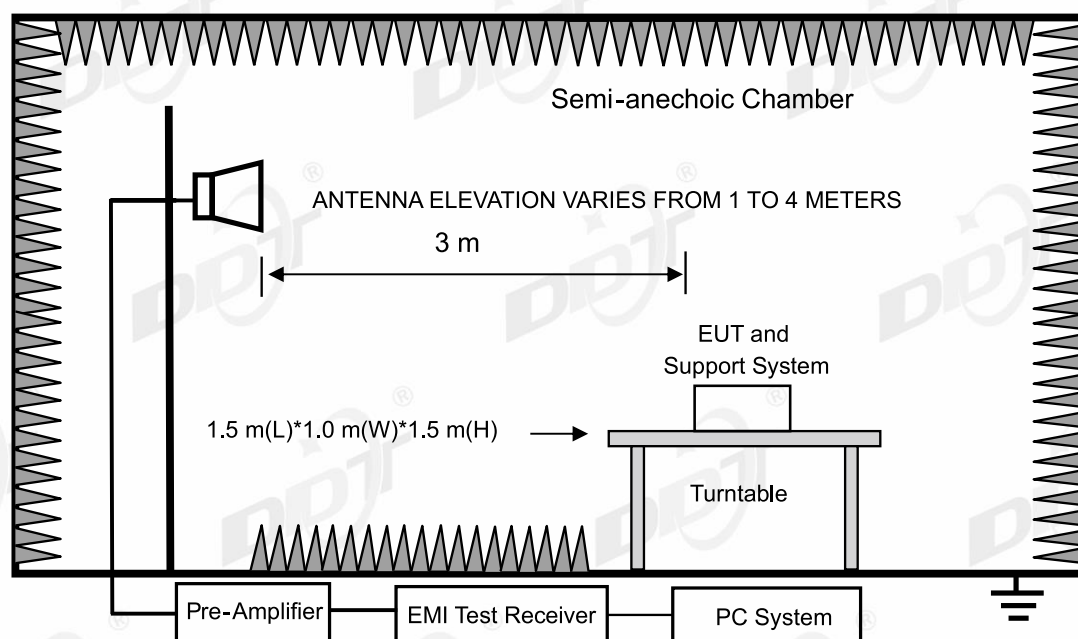

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	²
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		mV/m	dB(mV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(mV)/m (Peak) 54.0 dB(mV)/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is record and report)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with the worst mode.

(12) The worst simultaneous case and was recorded.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-28

Tested By:

Genliu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

2.4G WIFI mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24051516-2E\FCC BELOW 1G\20240628-024726_H

Memo:

Sample Number:S24051516-001 Power Setting:15

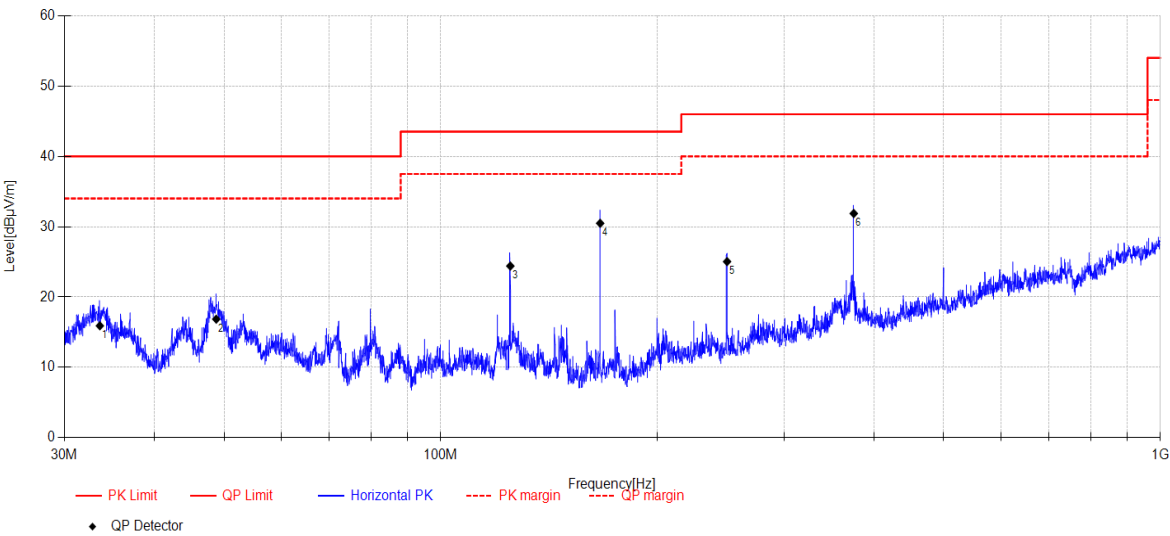

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.609	31.79	11.30	3.78	-30.95	15.92	40.00	24.08	QP	Horizontal
2	48.770	31.15	12.56	3.87	-30.72	16.86	40.00	23.14	QP	Horizontal
3	124.971	41.98	8.91	4.35	-30.83	24.41	43.50	19.09	QP	Horizontal
4	166.594	47.85	8.76	4.58	-30.70	30.49	43.50	13.01	QP	Horizontal
5	250.020	38.8	11.70	4.99	-30.45	25.04	46.00	20.96	QP	Horizontal
6	374.959	41.11	15.40	5.52	-30.15	31.88	46.00	14.12	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-28

Tested By:

Genliu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

2.4G WIFI mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24051516-2E\FCC BELOW 1G\20240628-024819_V

Memo:

Sample Number:S24051516-001 Power Setting:15

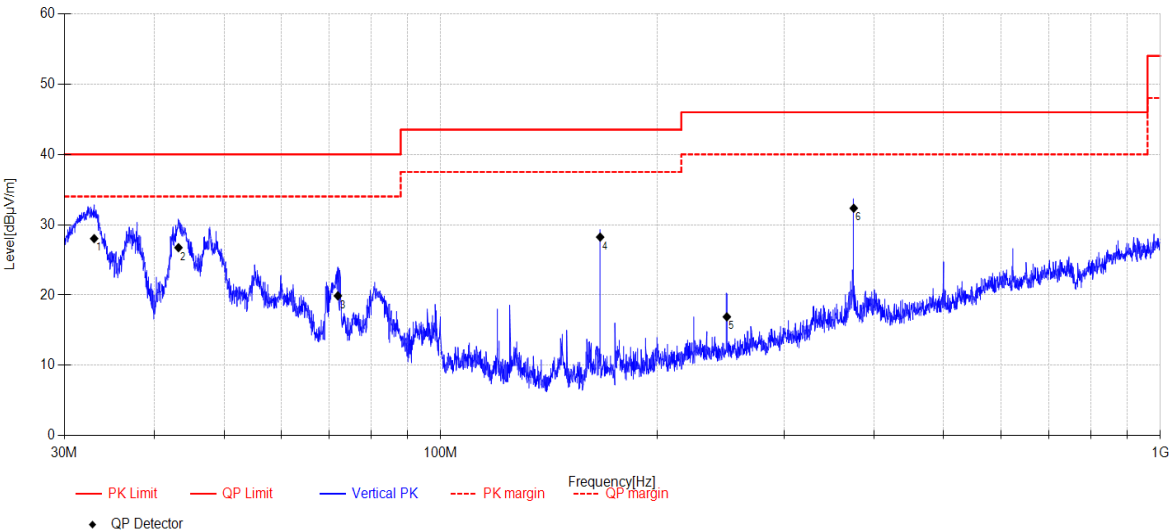

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.002	44.3	10.90	3.78	-30.95	28.03	40.00	11.97	QP	Vertical
2	43.229	40.85	12.85	3.84	-30.80	26.74	40.00	13.26	QP	Vertical
3	71.971	36.81	9.60	4.03	-30.55	19.89	40.00	20.11	QP	Vertical
4	166.594	45.6	8.76	4.58	-30.70	28.24	43.50	15.26	QP	Vertical
5	249.844	30.68	11.69	4.99	-30.45	16.91	46.00	29.09	QP	Vertical
6	374.959	41.57	15.40	5.52	-30.15	32.34	46.00	13.66	QP	Vertical

Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2412MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\17

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

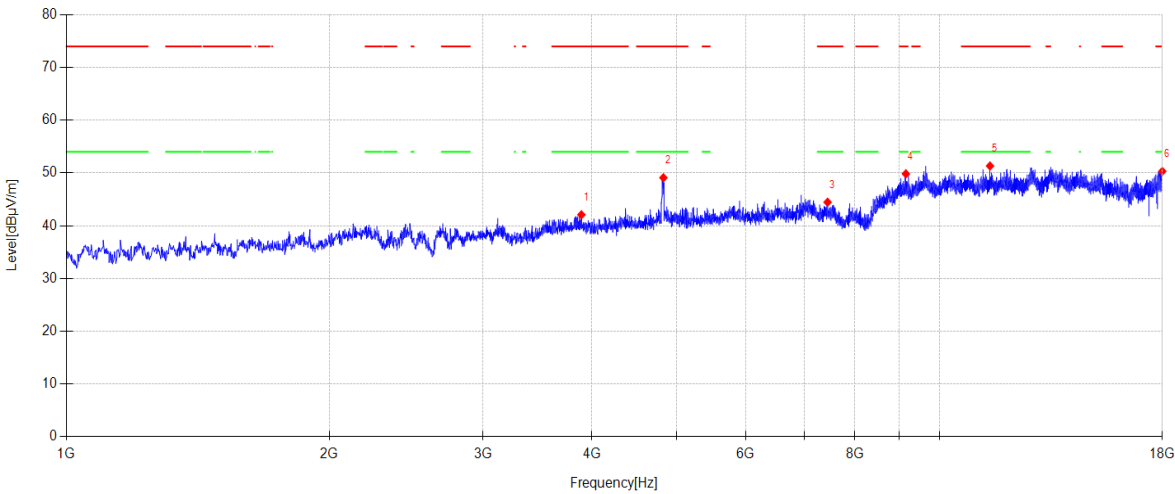

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3890.000	46.25	31.14	5.07	-40.38	42.08	74.00	31.92	PK	Horizontal
2	4828.400	50.45	33.24	5.55	-40.14	49.10	74.00	24.90	PK	Horizontal
3	7444.700	42.98	36.61	6.68	-41.81	44.46	74.00	29.54	PK	Horizontal
4	9153.200	42.76	38.51	7.35	-38.78	49.84	74.00	24.16	PK	Horizontal
5	11426.100	42.95	39.27	8.40	-39.29	51.33	74.00	22.67	PK	Horizontal
6	17996.600	37.14	42.38	13.18	-42.39	50.31	74.00	23.69	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2412MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080718

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

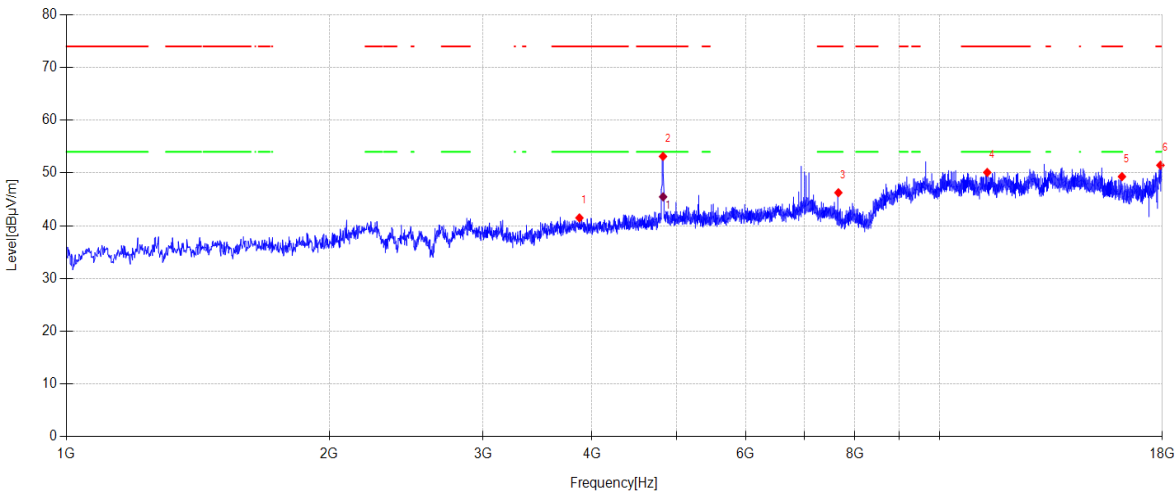

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3869.600	45.77	31.02	5.07	-40.37	41.49	74.00	32.51	PK	Vertical
2	4823.300	54.64	33.11	5.54	-40.15	53.14	74.00	20.86	PK	Vertical
3	7660.600	45.20	36.62	6.79	-42.35	46.26	74.00	27.74	PK	Vertical
4	11342.800	41.76	39.24	8.35	-39.25	50.10	74.00	23.90	PK	Vertical
5	16181.000	40.80	37.82	10.19	-39.51	49.30	74.00	24.70	PK	Vertical
6	17908.200	38.79	41.94	12.93	-42.20	51.46	74.00	22.54	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4824.578	46.97	33.11	5.54	-40.15	45.47	54.0	8.53	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2437MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080719

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

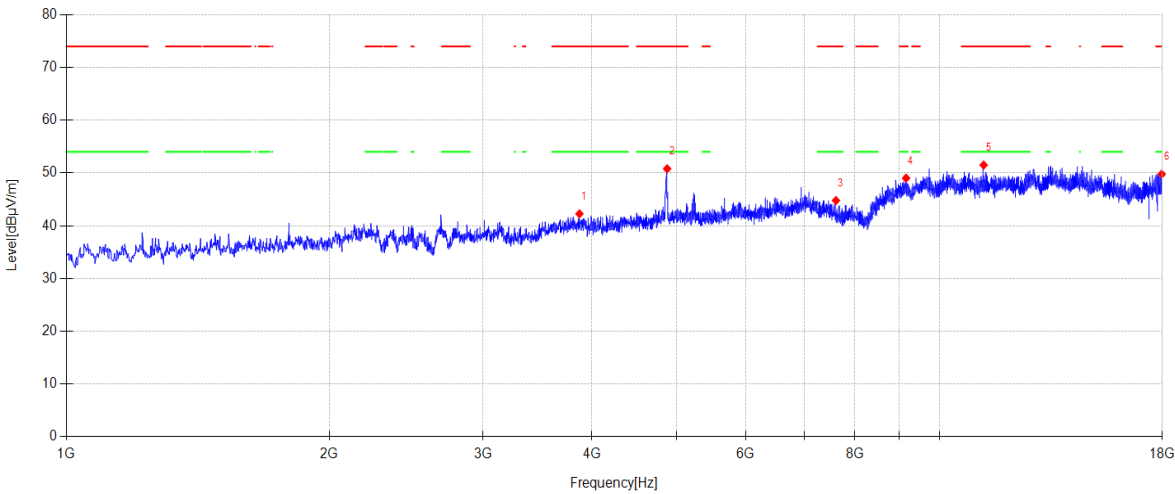

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3869.600	46.54	31.02	5.07	-40.37	42.26	74.00	31.74	PK	Horizontal
2	4876.000	51.96	33.38	5.58	-40.13	50.79	74.00	23.21	PK	Horizontal
3	7611.300	43.73	36.52	6.76	-42.23	44.78	74.00	29.22	PK	Horizontal
4	9158.300	41.93	38.52	7.35	-38.78	49.02	74.00	24.98	PK	Horizontal
5	11237.400	43.22	39.20	8.28	-39.20	51.50	74.00	22.50	PK	Horizontal
6	17972.800	36.77	42.26	13.11	-42.34	49.80	74.00	24.20	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2437MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\20

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

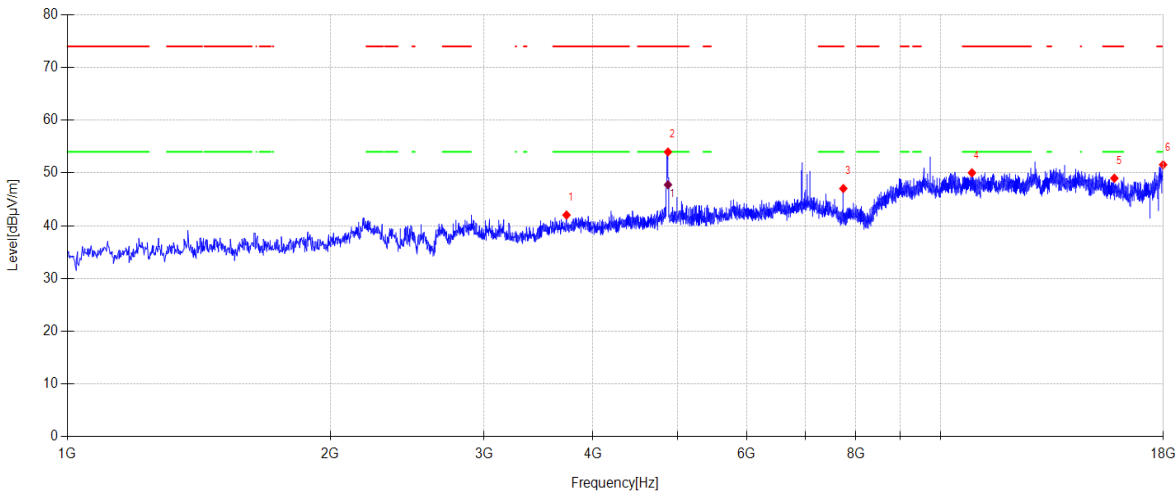

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3730.200	46.76	30.46	5.10	-40.29	42.03	74.00	31.97	PK	Vertical
2	4874.300	55.13	33.41	5.57	-40.13	53.98	74.00	20.02	PK	Vertical
3	7740.500	45.99	36.78	6.83	-42.55	47.05	74.00	26.95	PK	Vertical
4	10865.100	41.68	39.33	8.06	-39.04	50.03	74.00	23.97	PK	Vertical
5	15817.200	39.95	38.27	10.03	-39.25	49.00	74.00	25.00	PK	Vertical
6	17991.500	38.41	42.36	13.17	-42.38	51.56	74.00	22.44	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.625	48.91	33.41	5.57	-40.13	47.76	54.0	6.24	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2462MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\21

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

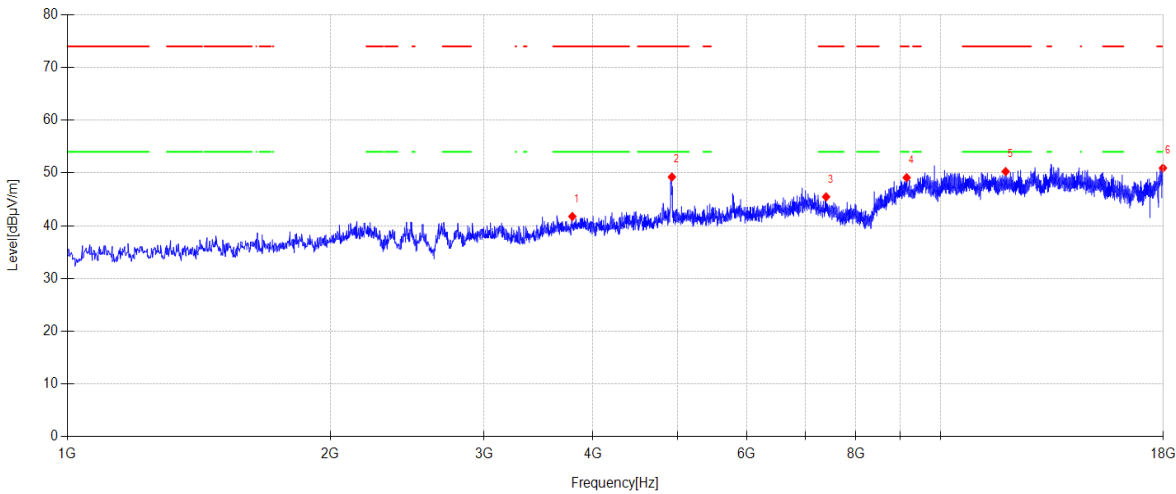

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3788.000	46.33	30.65	5.09	-40.32	41.75	74.00	32.25	PK	Horizontal
2	4925.300	50.69	33.05	5.61	-40.11	49.24	74.00	24.76	PK	Horizontal
3	7397.100	43.81	36.71	6.65	-41.69	45.48	74.00	28.52	PK	Horizontal
4	9148.100	42.04	38.50	7.35	-38.78	49.11	74.00	24.89	PK	Horizontal
5	11876.600	42.19	38.90	8.68	-39.50	50.27	74.00	23.73	PK	Horizontal
6	17981.300	37.84	42.31	13.14	-42.36	50.93	74.00	23.07	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2462MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080722

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

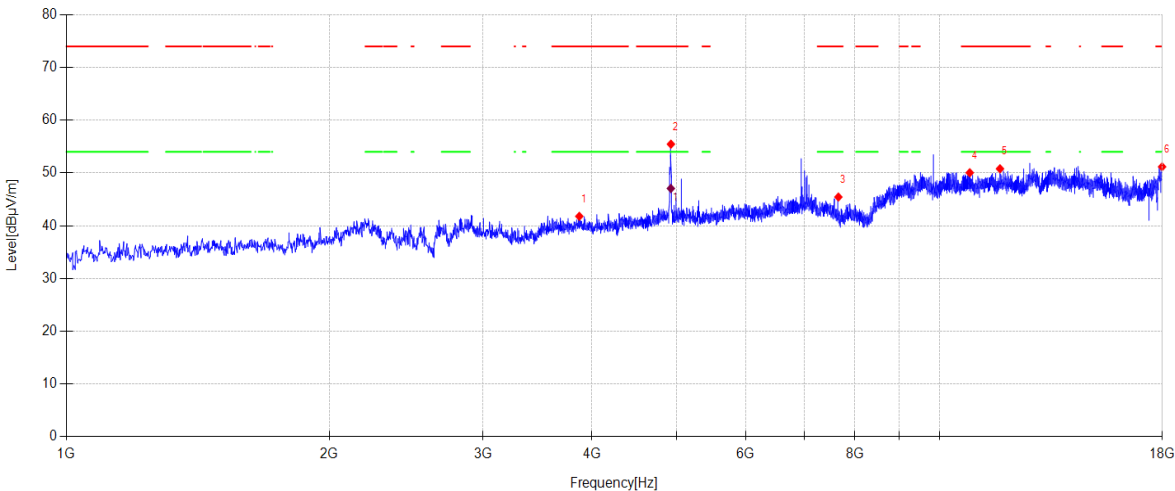

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3867.900	46.07	31.01	5.07	-40.37	41.78	74.00	32.22	PK	Vertical
2	4925.300	56.91	33.05	5.61	-40.11	55.46	74.00	18.54	PK	Vertical
3	7660.600	44.38	36.62	6.79	-42.35	45.44	74.00	28.56	PK	Vertical
4	10831.100	41.65	39.37	8.05	-39.03	50.04	74.00	23.96	PK	Vertical
5	11730.400	42.66	38.97	8.59	-39.43	50.79	74.00	23.21	PK	Vertical
6	17988.100	38.04	42.34	13.16	-42.37	51.17	74.00	22.83	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4924.390	48.51	33.05	5.61	-40.11	47.06	54.0	6.94	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13.Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ- 1.5M	DDT-ZC02762	2025/03/31
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
RF cable	Yuhu Technology	ZT26S-SMAJ- SMAJ-1M	DDT-ZC02037	2025/03/31
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF cable	Yuhu Technology	JCTB810-NJ-NJ- 9M	DDT-ZC02538	2025/03/31
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11

13.2. Block diagram of test setup

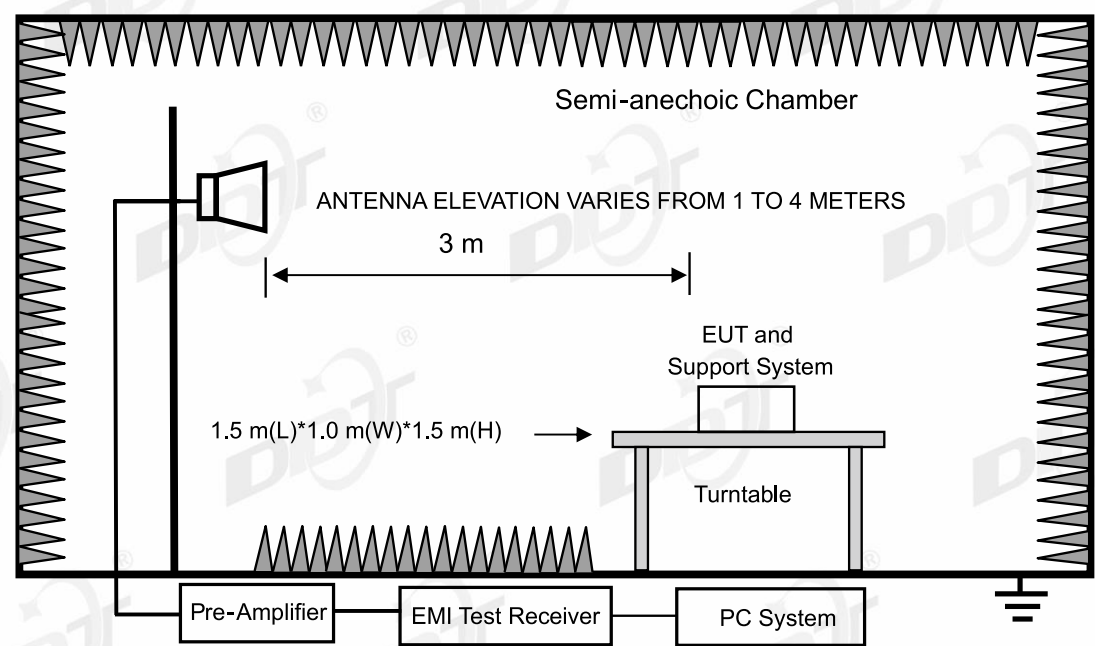

13.3. Limits

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2\FCC ABOVE 1G 0816\17

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

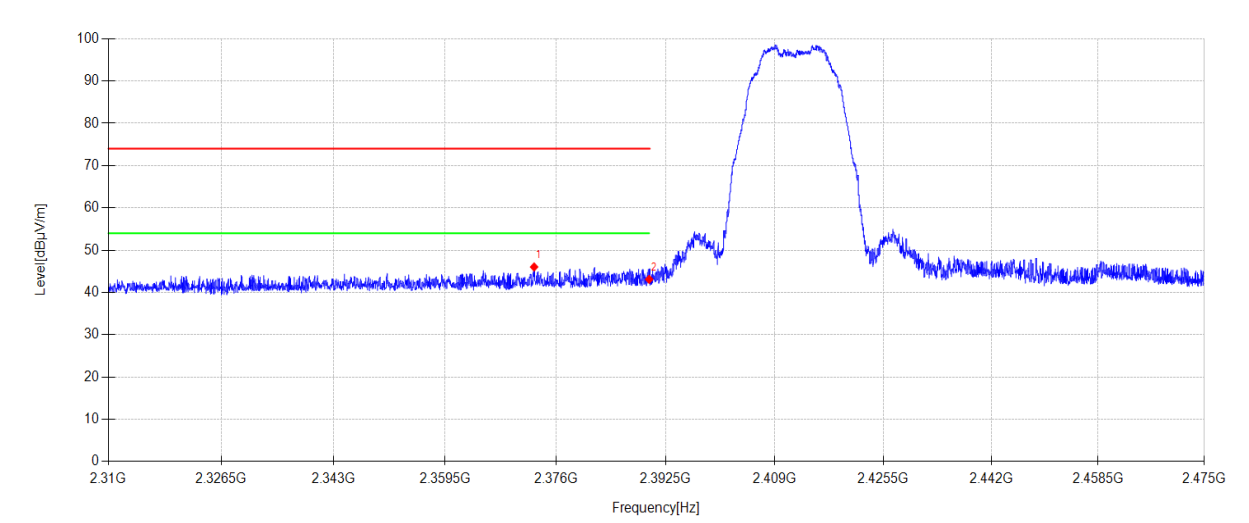

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.750	15.28	27.19	3.56	0.00	46.03	74.00	27.97	PK	Horizontal
2	2390.000	12.28	27.26	3.57	0.00	43.11	74.00	30.89	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\18

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

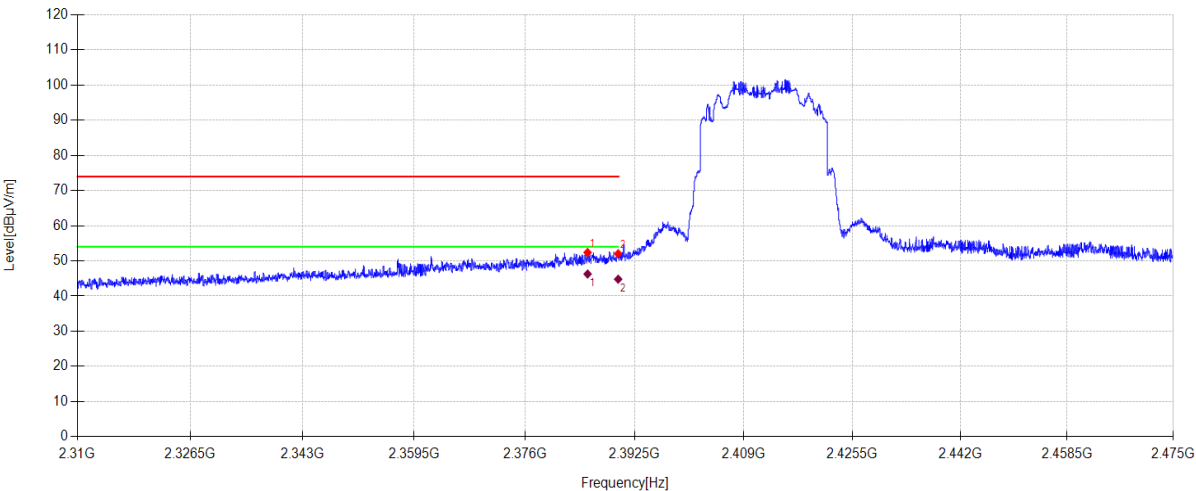

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.405	21.58	27.24	3.57	0.00	52.39	74.00	21.61	PK	Vertical
2	2390.000	21.22	27.26	3.57	0.00	52.05	74.00	21.95	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2385.405	15.46	27.24	3.57	46.27	54.0	7.73	AV	Vertical	
2	2390.000	13.97	27.26	3.57	44.80	54.0	9.20	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\7

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

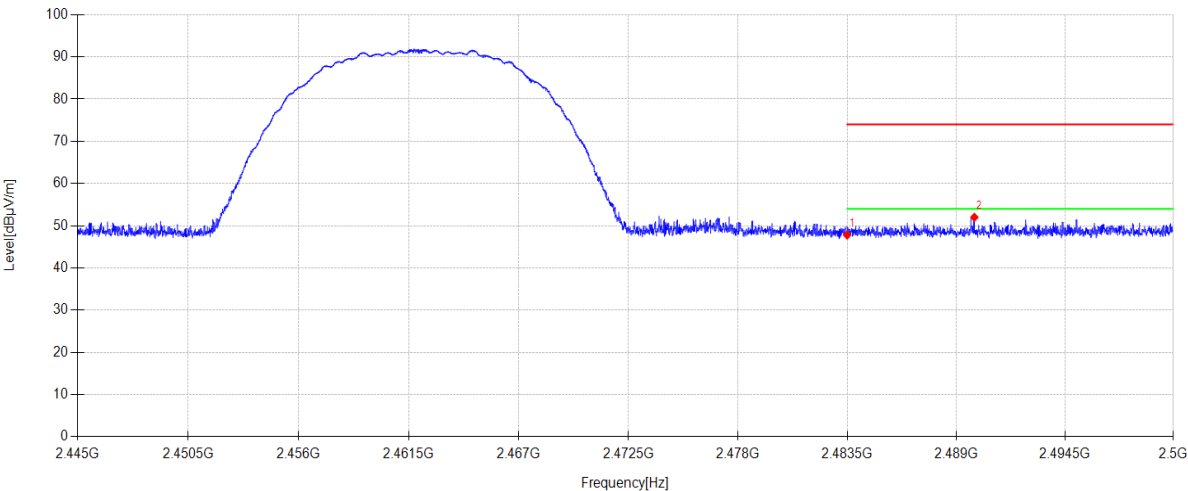

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.64	27.53	3.62	0.00	47.79	74.00	26.21	PK	Horizontal
2	2489.924	20.82	27.56	3.62	0.00	52.00	74.00	22.00	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\8

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

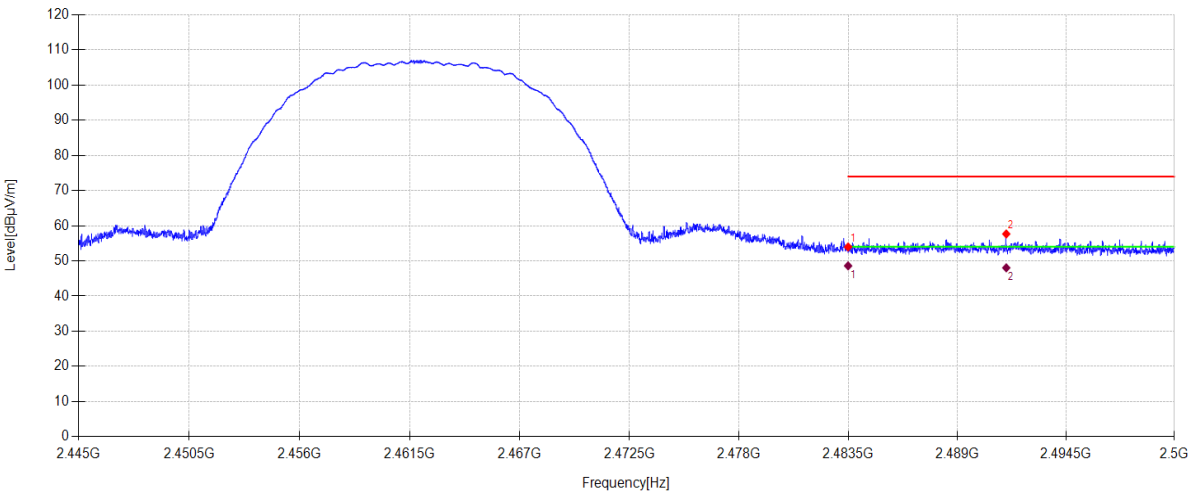

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.82	27.53	3.62	0.00	53.97	74.00	20.03	PK	Vertical
2	2491.486	26.46	27.57	3.63	0.00	57.66	74.00	16.34	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	17.45	27.53	3.62	48.60	54.0	5.40	AV	Vertical	
2	2491.486	16.84	27.57	3.63	48.04	54.0	5.96	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\3

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

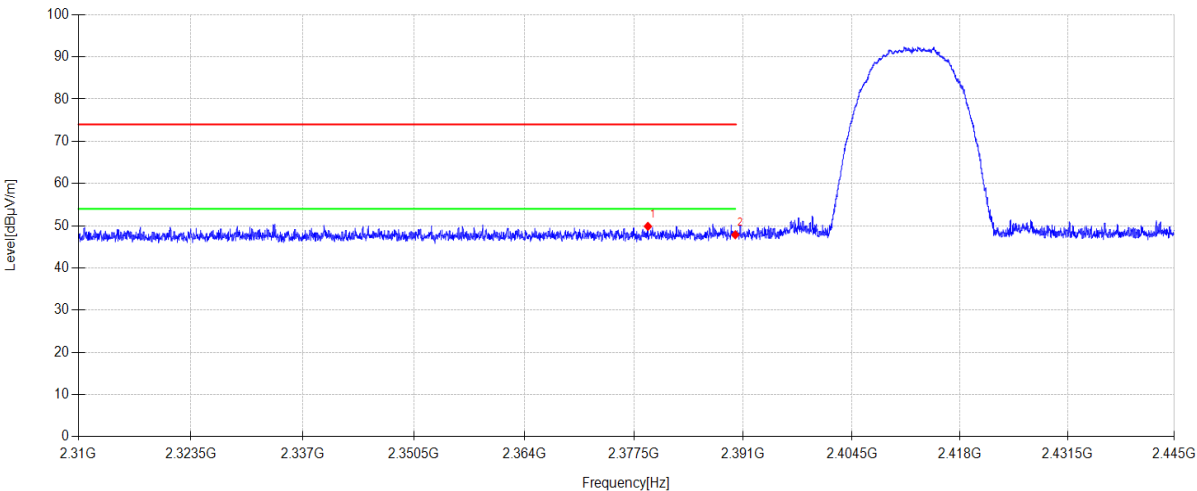

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2379.201	19.07	27.22	3.56	0.00	49.85	74.00	24.15	PK	Horizontal
2	2390.000	17.03	27.26	3.57	0.00	47.86	74.00	26.14	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816M4

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

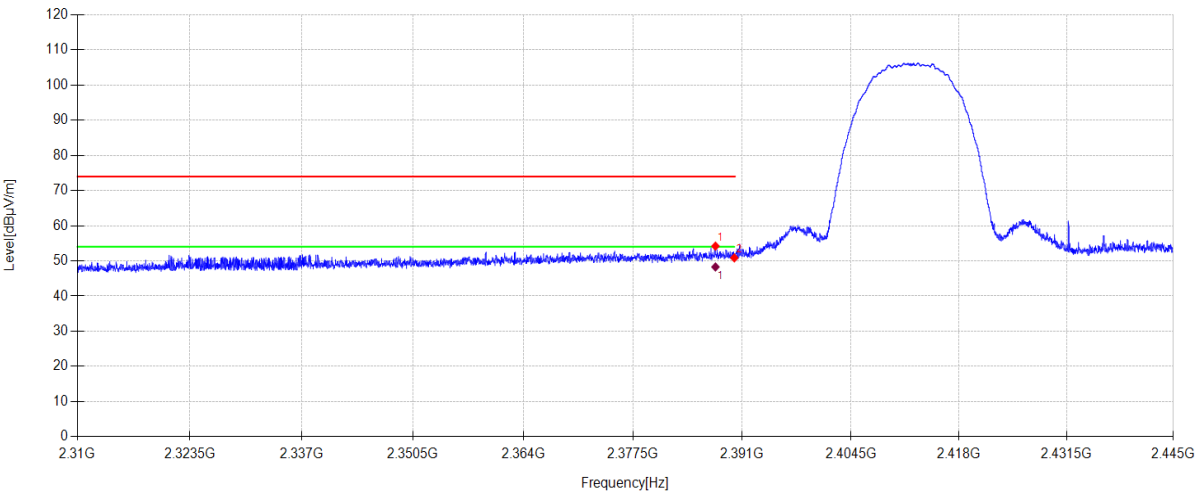

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.666	23.38	27.25	3.57	0.00	54.20	74.00	19.80	PK	Vertical
2	2390.000	20.03	27.26	3.57	0.00	50.86	74.00	23.14	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2387.666	17.46	27.25	3.57	48.28	54.0	5.72	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\5

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

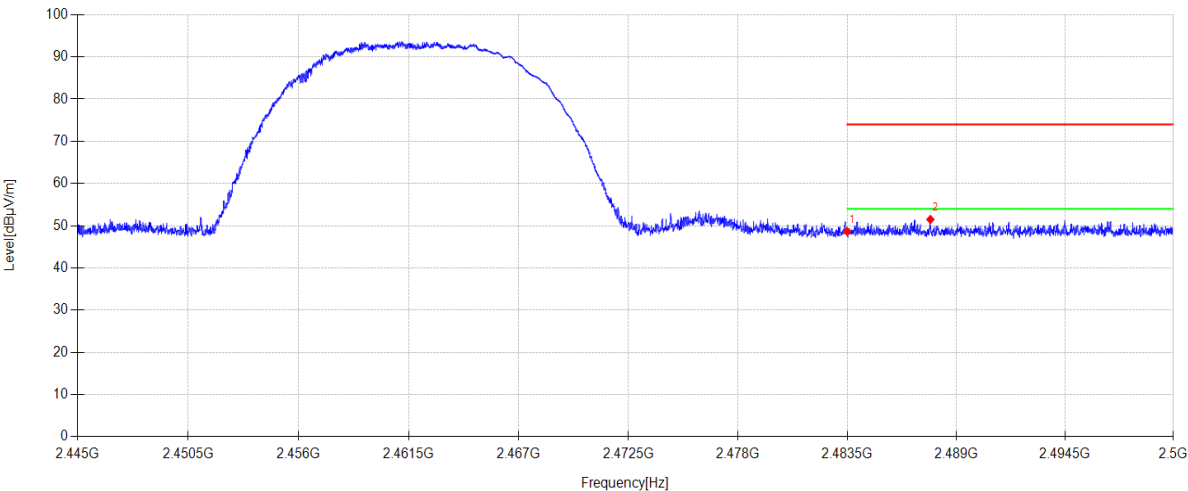

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.50	27.53	3.62	0.00	48.65	74.00	25.35	PK	Horizontal
2	2487.702	20.31	27.55	3.62	0.00	51.48	74.00	22.52	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11B TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\6

Memo:

Sample Number:S24051516-001 Power Setting:85

Test Graph

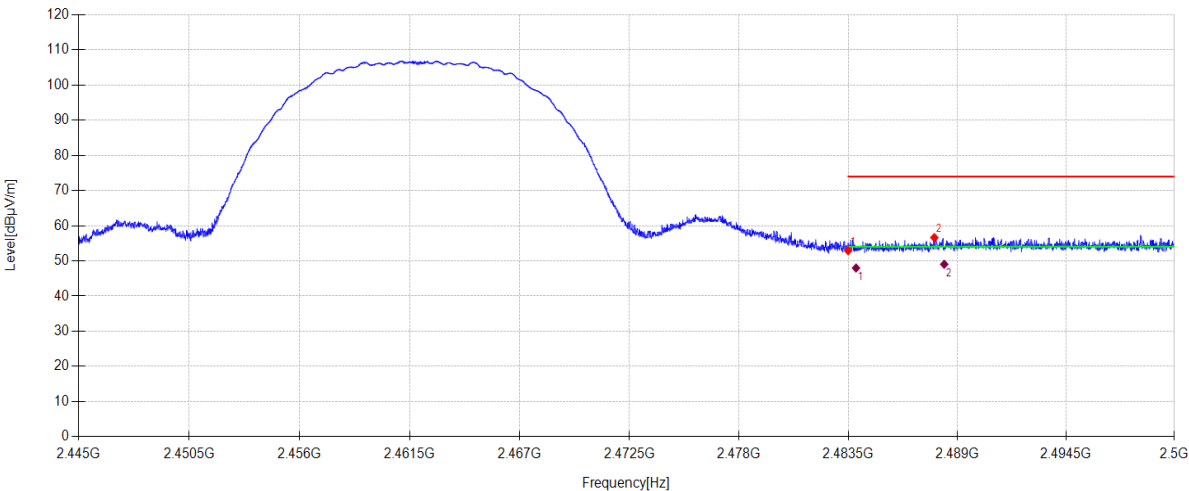

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.76	27.53	3.62	0.00	52.91	74.00	21.09	PK	Vertical
2	2487.851	25.46	27.55	3.62	0.00	56.63	74.00	17.37	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.900	15.55	27.54	4.89	47.98	54.00	6.02	AV	Vertical	
2	2488.351	16.59	27.55	4.90	49.04	54.00	4.96	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\13

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

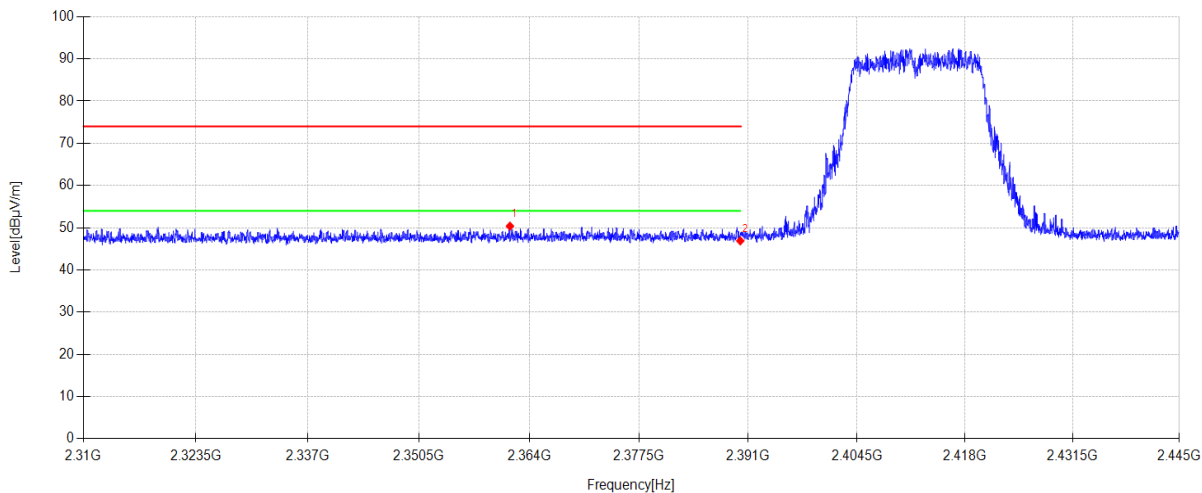

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2361.638	19.68	27.15	3.55	0.00	50.38	74.00	23.62	PK	Horizontal
2	2390.000	16.06	27.26	3.57	0.00	46.89	74.00	27.11	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2412MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\14

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

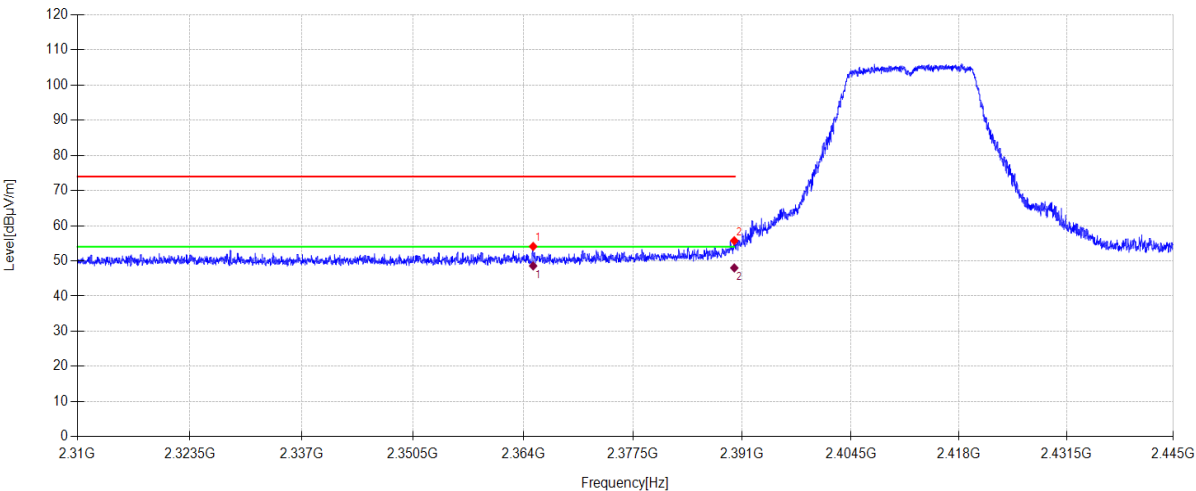

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2365.215	23.40	27.16	3.55	0.00	54.11	74.00	19.89	PK	Vertical
2	2390.000	24.91	27.26	3.57	0.00	55.74	74.00	18.26	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2365.215	17.87	27.16	3.55	48.58	54.0	5.42	AV	Vertical	
2	2390.000	17.18	27.26	3.57	48.01	54.0	5.99	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\11

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

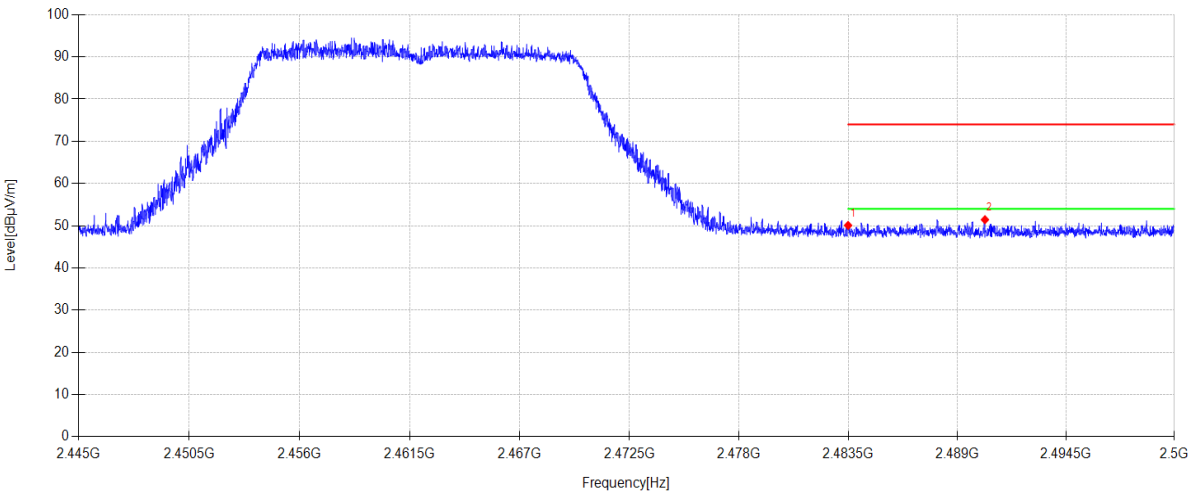

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.93	27.53	3.62	0.00	50.08	74.00	23.92	PK	Horizontal
2	2490.408	20.25	27.56	3.62	0.00	51.43	74.00	22.57	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2462MHz ANT1

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\12

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

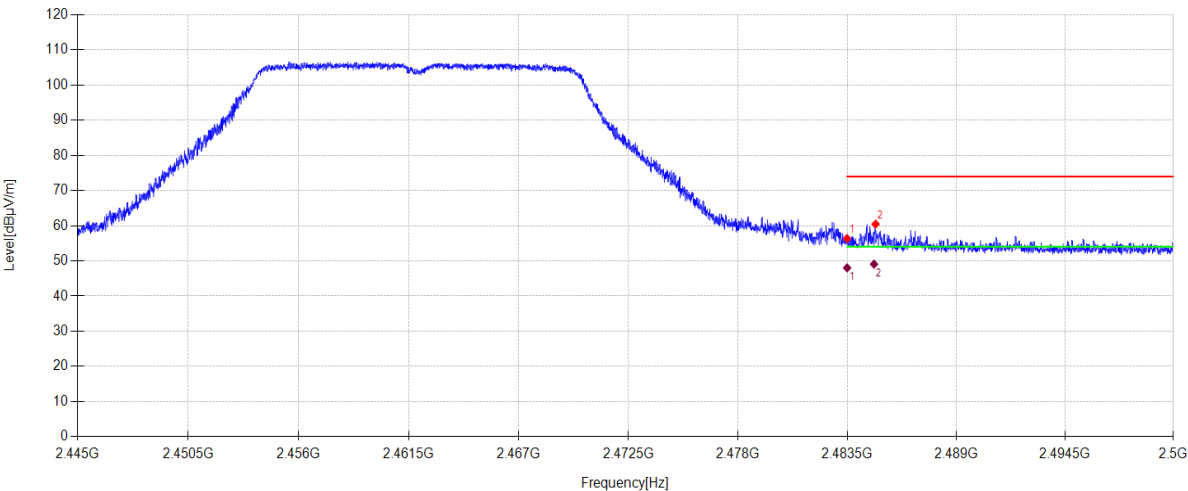

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	25.21	27.53	3.62	0.00	56.36	74.00	17.64	PK	Vertical
2	2484.936	29.30	27.54	3.62	0.00	60.46	74.00	13.54	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	16.88	27.53	3.62	48.03	54.0	5.97	AV	Vertical	
2	2484.859	16.63	27.54	3.62	49.07	54.0	4.93	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\15

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

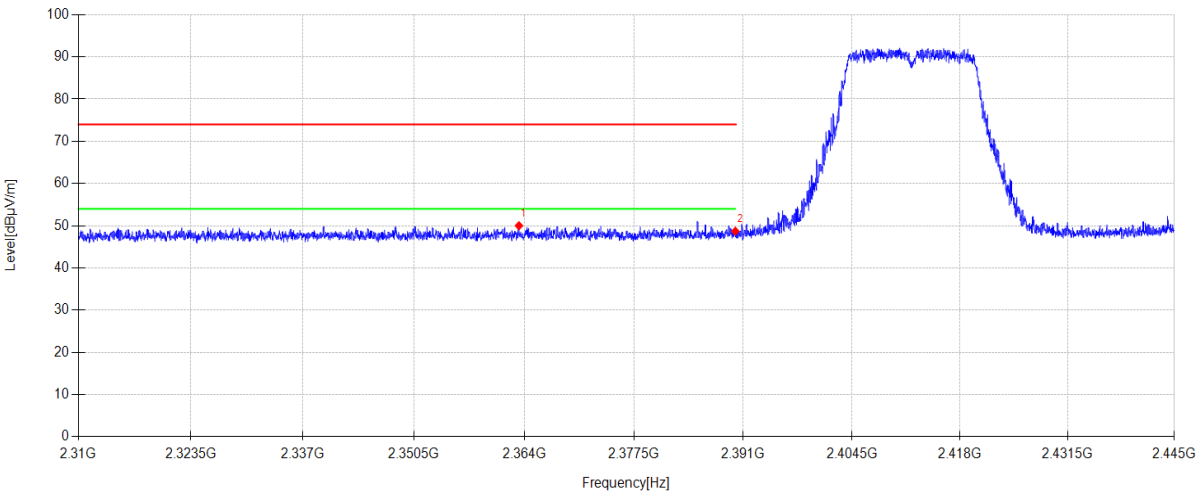

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2363.352	19.31	27.15	3.55	0.00	50.01	74.00	23.99	PK	Horizontal
2	2390.000	17.88	27.26	3.57	0.00	48.71	74.00	25.29	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2412MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\16

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

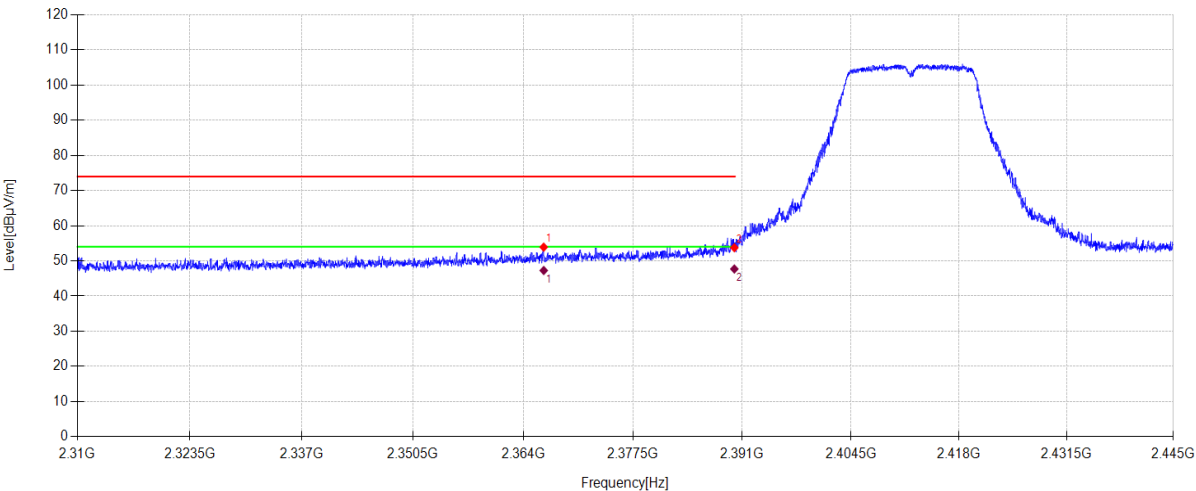

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2366.511	23.18	27.17	3.56	0.00	53.91	74.00	20.09	PK	Vertical
2	2390.000	22.92	27.26	3.57	0.00	53.75	74.00	20.25	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2366.511	16.54	27.17	3.56	47.27	54.0	6.73	AV	Vertical	
2	2390.000	16.87	27.26	3.57	47.70	54.0	6.30	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\9

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

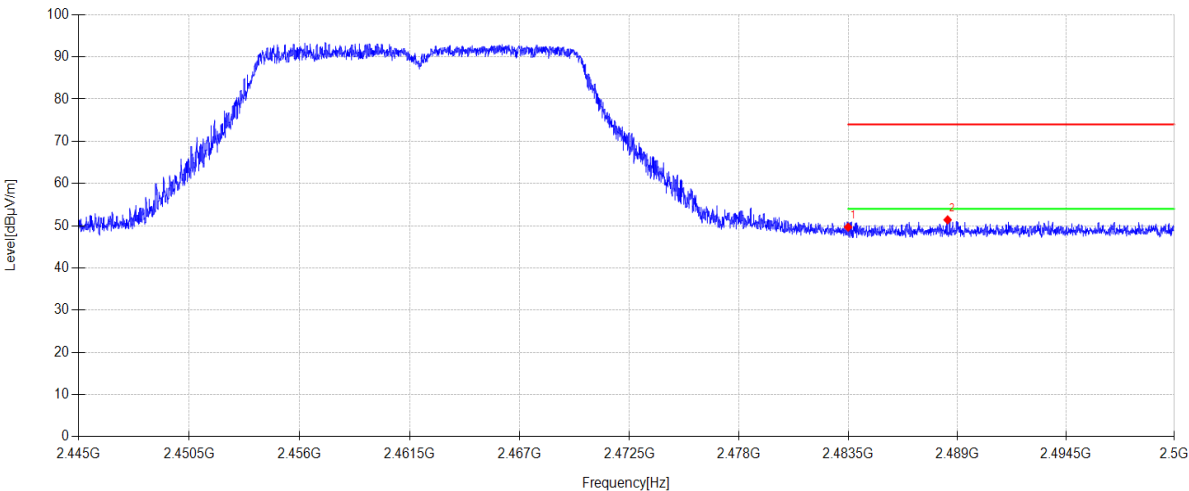

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.51	27.53	3.62	0.00	49.66	74.00	24.59	PK	Horizontal
2	2488.522	20.22	27.55	3.62	0.00	51.39	74.00	22.61	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-05

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11G TX 2462MHz ANT2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0816\10

Memo:

Sample Number:S24051516-001 Power Setting:74

Test Graph

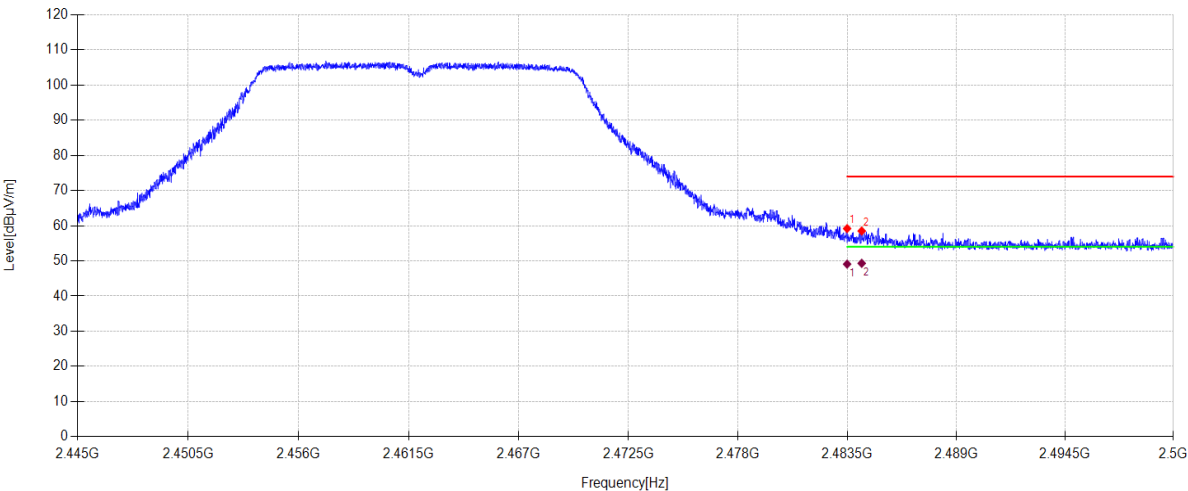

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	28.04	27.53	3.62	0.00	59.19	74.00	14.81	PK	Vertical
2	2484.237	27.34	27.54	3.62	0.00	58.50	74.00	15.50	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	17.94	27.53	3.62	49.09	54.0	4.91	AV	Vertical	
2	2484.237	18.15	27.54	3.62	49.31	54.0	4.69	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2412MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\11

Memo:

Sample Number:S24051516-001 Power Setting:70

Test Graph

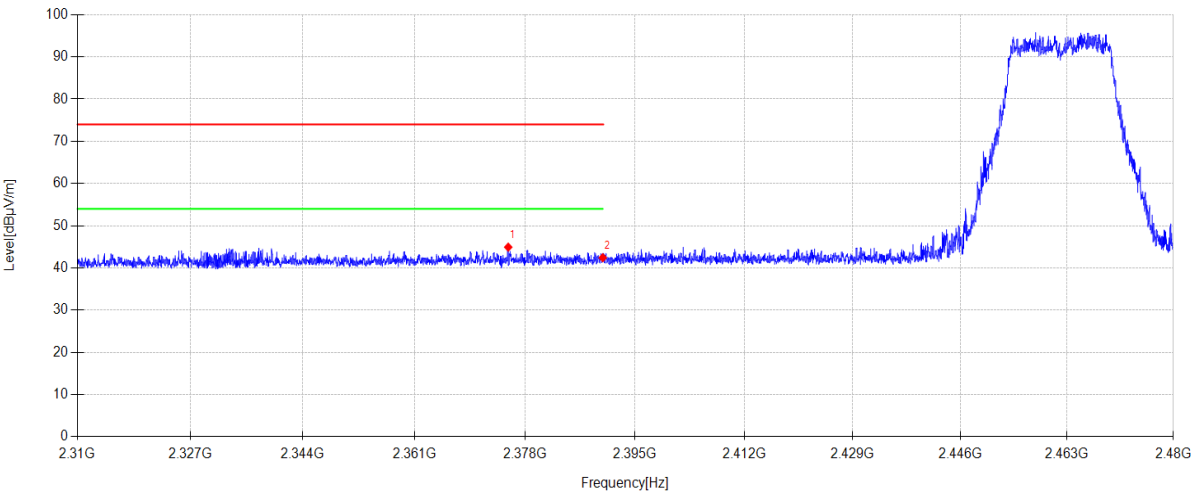

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.399	14.16	27.20	3.56	0.00	44.92	74.00	29.08	PK	Horizontal
2	2390.000	11.60	27.26	3.57	0.00	42.43	74.00	31.57	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2412MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\12

Memo:

Sample Number:S24051516-001 Power Setting:70

Test Graph

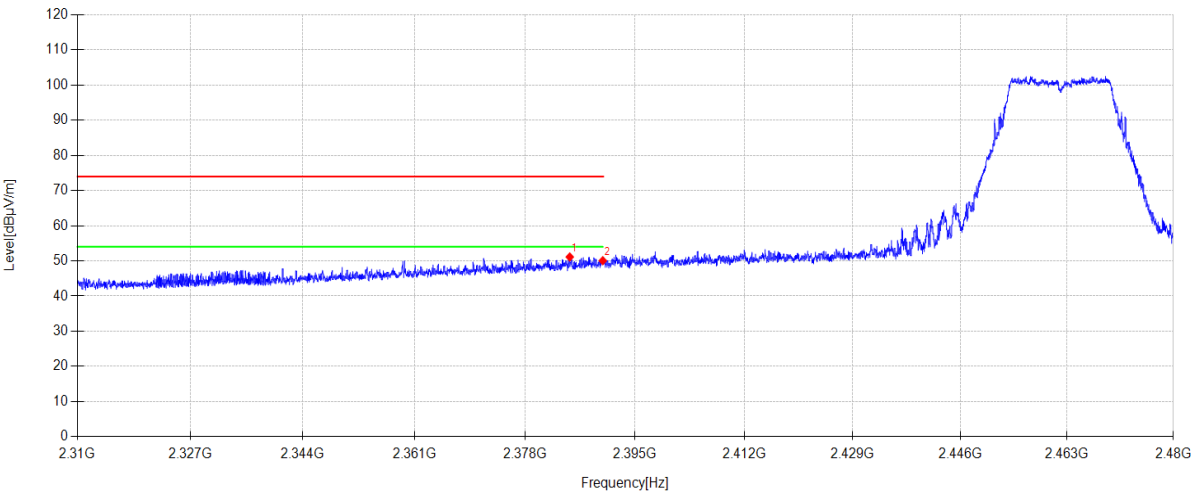

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.885	20.31	27.24	3.57	0.00	51.12	74.00	22.88	PK	Vertical
2	2390.000	19.23	27.26	3.57	0.00	50.06	74.00	23.94	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2462MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080719

Memo:

Sample Number:S24051516-001 Power Setting:70

Test Graph

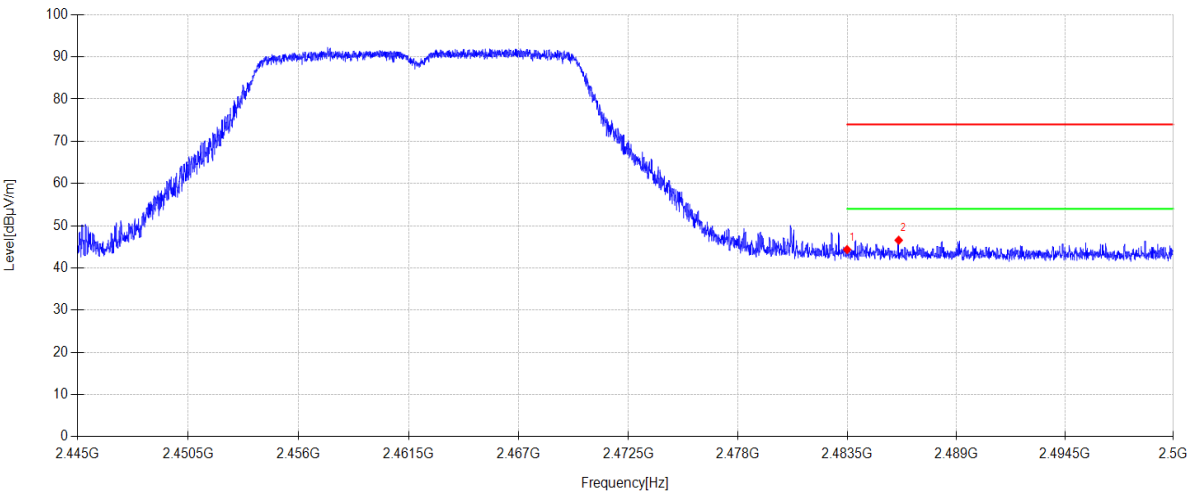

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	13.20	27.53	3.62	0.00	44.35	74.00	29.65	PK	Horizontal
2	2486.102	15.40	27.54	3.62	0.00	46.56	74.00	27.44	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N20 TX 2462MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080710

Memo:

Sample Number:S24051516-001 Power Setting:70

Test Graph

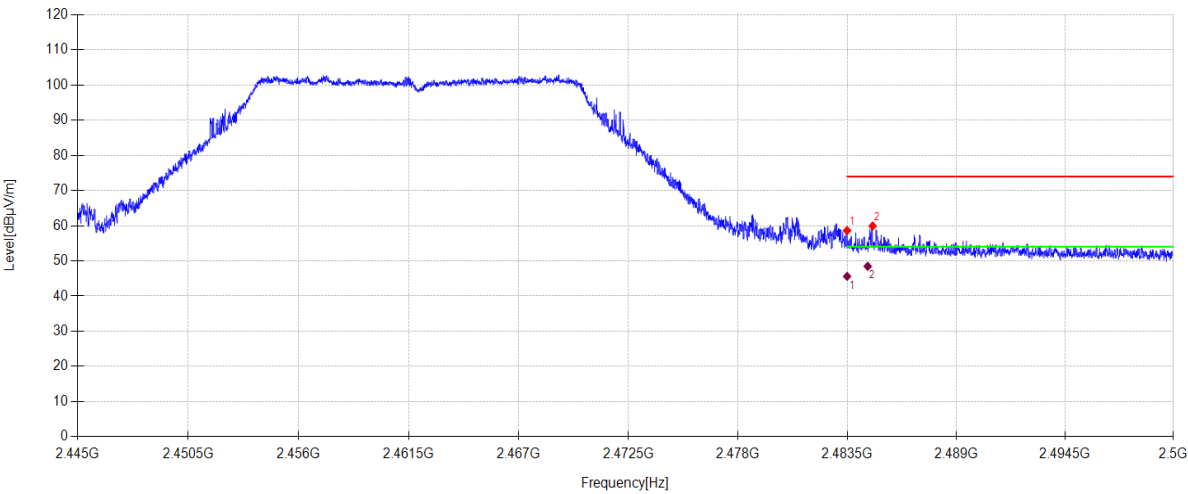

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	27.48	27.53	3.62	0.00	58.63	74.00	15.37	PK	Vertical
2	2484.787	28.76	27.54	3.62	0.00	59.92	74.00	14.08	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	14.45	27.53	3.62	0.00	45.60	54.0	8.40	AV	Vertical
2	2484.537	16.02	27.54	4.90	0.00	48.46	54.0	5.54	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N40 TX 2422MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080713

Memo:

Sample Number:S24051516-001 Power Setting:60

Test Graph

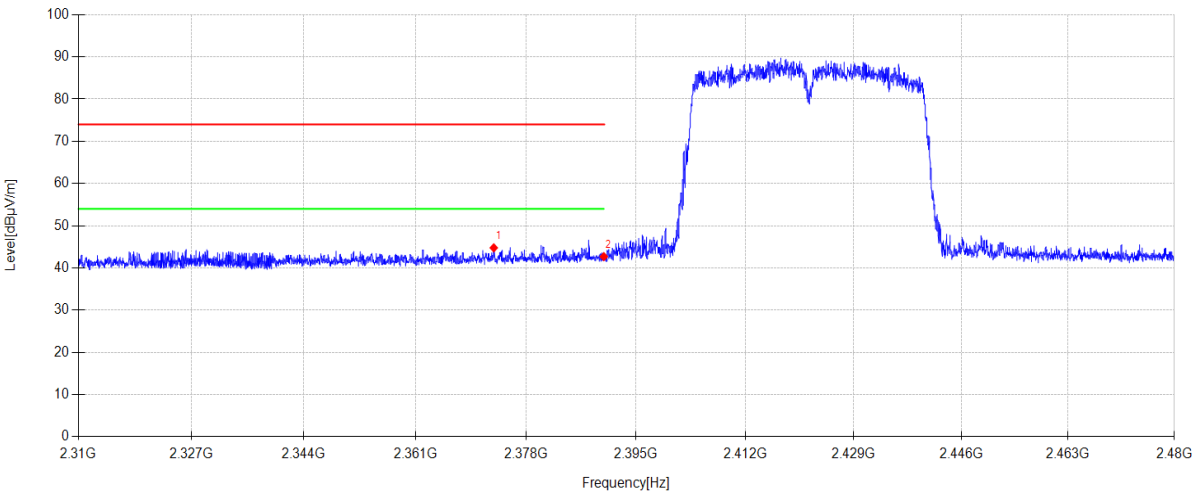

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2373.019	14.01	27.19	3.56	0.00	44.76	74.00	29.24	PK	Horizontal
2	2390.000	11.85	27.26	3.57	0.00	42.68	74.00	31.32	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N40 TX 2422MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\14

Memo:

Sample Number:S24051516-001 Power Setting:60

Test Graph

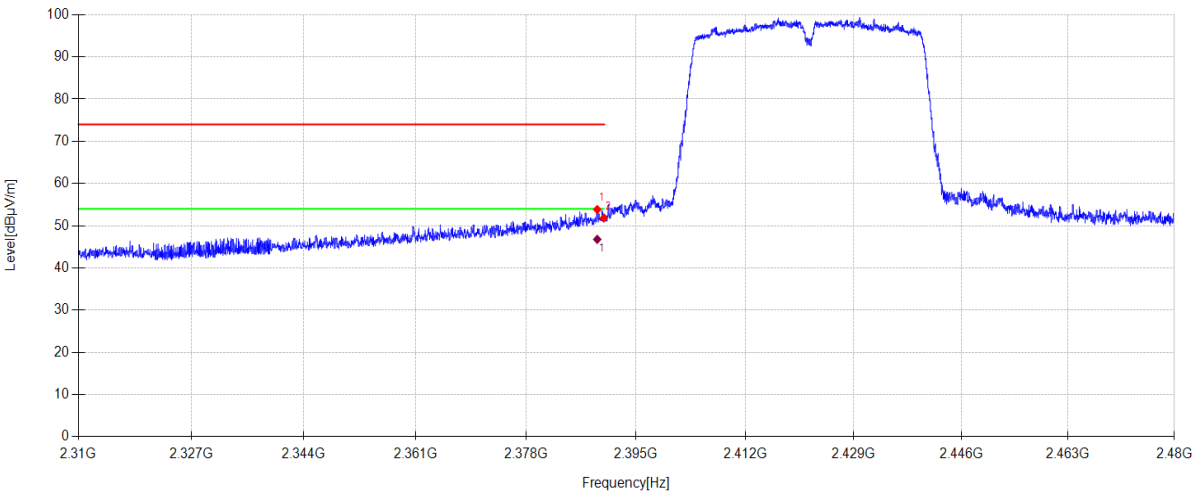

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.982	23.01	27.26	3.57	0.00	53.84	74.00	20.16	PK	Vertical
2	2390.000	20.98	27.26	3.57	0.00	51.81	74.00	22.19	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.982	15.94	27.26	3.57	0.00	46.77	54.0	7.23	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N40 TX 2452MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 080715

Memo:

Sample Number:S24051516-001 Power Setting:60

Test Graph

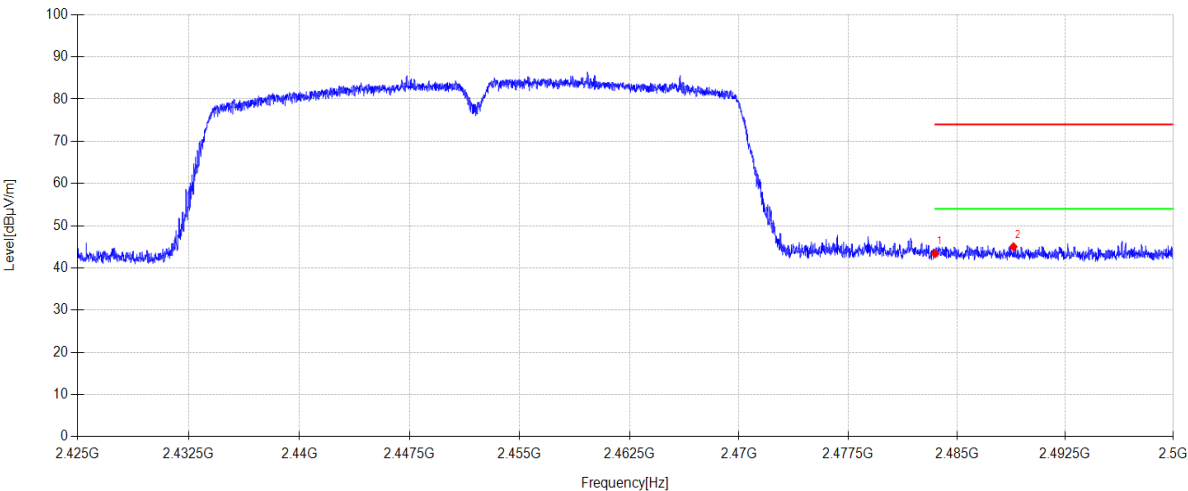

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.24	27.53	3.62	0.00	43.39	74.00	30.61	PK	Horizontal
2	2488.915	13.84	27.56	3.62	0.00	45.02	74.00	28.98	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Gen Liu

EUT:

Dual-band WiFi6 AX1500 Router

Model Number:

Flow AX1501

Test Mode:

11N40 TX 2452MHz ANT1+2

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24051516-2E\FCC ABOVE 1G 0807\16

Memo:

Sample Number:S24051516-001 Power Setting:60

Test Graph

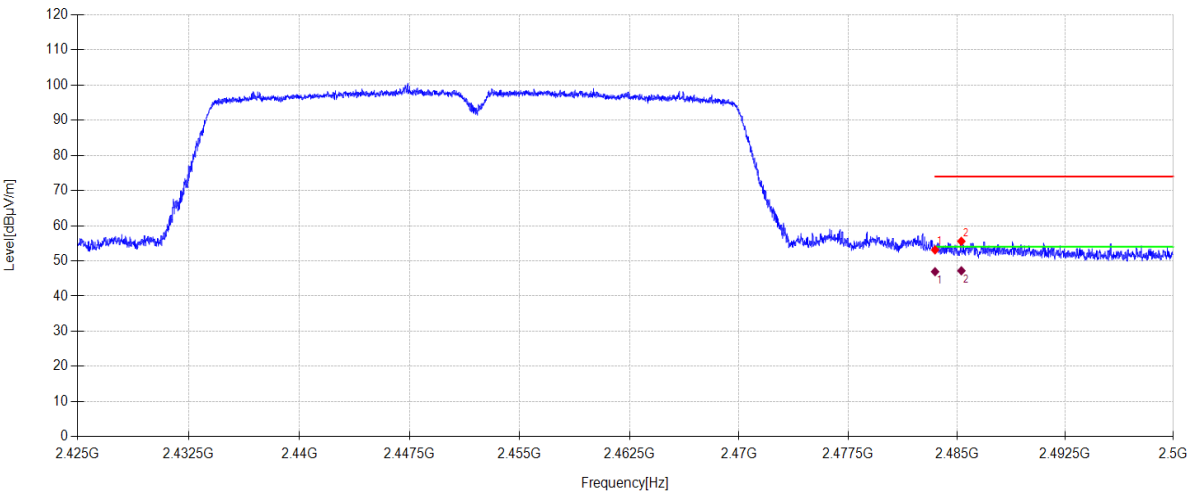

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.97	27.53	3.62	0.00	53.12	74.00	20.88	PK	Vertical
2	2485.315	24.41	27.54	3.62	0.00	55.57	74.00	18.43	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.78	27.53	3.62	0.00	46.93	54.0	7.07	AV	Vertical
2	2485.315	16.04	27.54	3.62	0.00	47.20	54.0	6.80	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14.Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2025/07/08
Δ-shaped artificial power network	SCHWARZBEC K	PVDC 8301	DDT-ZC03939	2025/03/31
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2025/07/08
Three-phase artificial power network	SCHWARZBEC K	NSLK 8163	DDT-ZC01572	2025/07/08
Pulse Limiter	SCHWARZBEC K	VTSD 9561	DDT-ZC02128	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2025/07/08

14.2. Block diagram of test setup

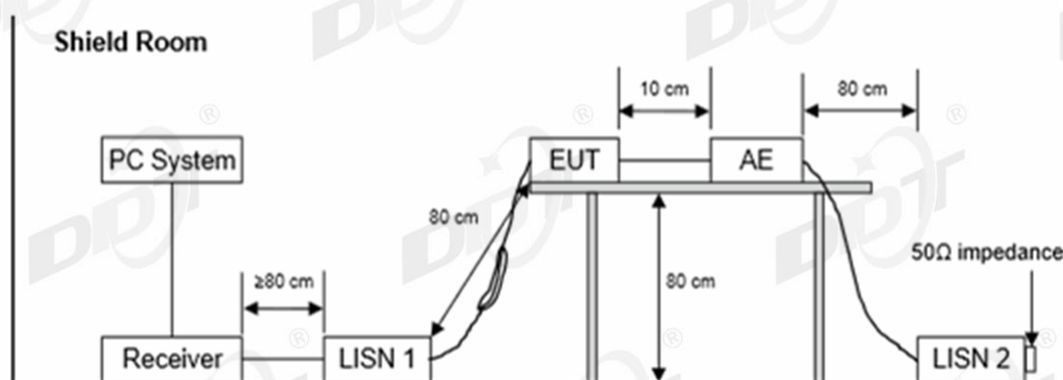

14.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “-----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 6# Shield Room

D:\2024 Report Date\Q24051516-2E\RE-FCC.EM6

Test Date : 2024-05-23

Tested By : Genliu

EUT : Dual-band WiFi6 AX1500 Router

Model Number : Flow AX1501


Power Supply : AC 120V/60Hz

Test Mode : 2.4GWIFI mode

Condition : Temp:21.5°C,Humi:51.8%

LISN : 2023 ENV 216 3#/NEUTRAL

Memo :

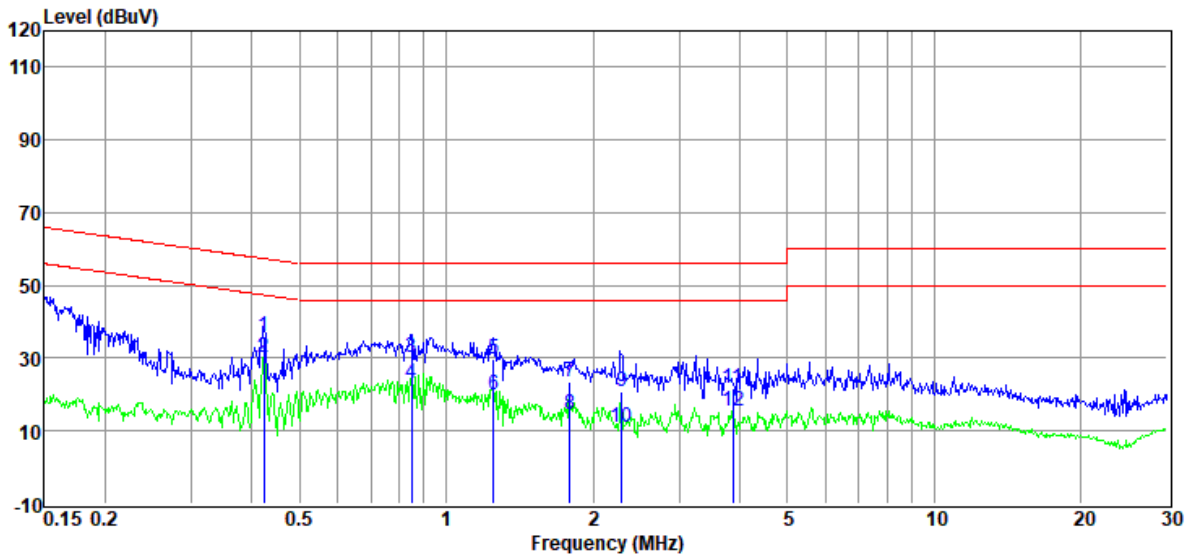

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.42	15.98	9.94	0.13	9.96	36.01	57.37	-21.36	QP	NEUTRAL
2	0.42	10.23	9.94	0.13	9.96	30.26	47.37	-17.11	Average	NEUTRAL
3	0.85	9.93	10.00	0.20	9.97	30.10	56.00	-25.90	QP	NEUTRAL
4	0.85	3.11	10.00	0.20	9.97	23.28	46.00	-22.72	Average	NEUTRAL
5	1.25	9.99	9.59	0.25	9.98	29.81	56.00	-26.19	QP	NEUTRAL
6	1.25	0.08	9.59	0.25	9.98	19.90	46.00	-26.10	Average	NEUTRAL
7	1.79	3.37	10.01	0.26	9.99	23.63	56.00	-32.37	QP	NEUTRAL
8	1.79	-5.73	10.01	0.26	9.99	14.53	46.00	-31.47	Average	NEUTRAL
9	2.29	0.96	9.78	0.26	10.00	21.00	56.00	-35.00	QP	NEUTRAL
10	2.29	-8.93	9.78	0.26	10.00	11.11	46.00	-34.89	Average	NEUTRAL
11	3.86	2.12	9.50	0.27	10.01	21.90	56.00	-34.10	QP	NEUTRAL
12	3.86	-4.14	9.50	0.27	10.01	15.64	46.00	-30.36	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-05-23

EUT

: Dual-band WiFi6 AX1500 Router

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.5°C,Humi:51.8%

D:\2024 Report Date\Q24051516-2E\RE-FCC.EM6

Tested By

: Genliu

Model Number

: Flow AX1501


Test Mode

: 2.4GWIFI mode

LISN

: 2023 ENV 216 3#/LINE

Memo :

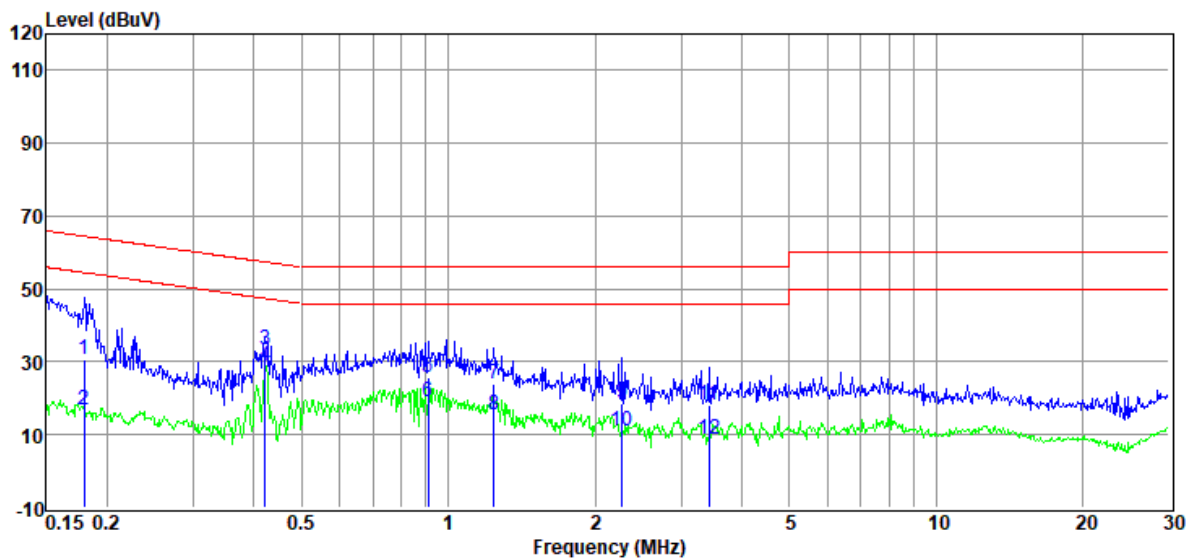

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	10.92	9.63	0.11	9.94	30.60	64.50	-33.90	QP	LINE
2	0.18	-2.93	9.63	0.11	9.94	16.75	54.50	-37.75	Average	LINE
3	0.42	13.17	9.91	0.13	9.95	33.16	57.42	-24.26	QP	LINE
4	0.42	8.73	9.91	0.13	9.95	28.72	47.42	-18.70	Average	LINE
5	0.91	5.97	9.68	0.22	9.97	25.84	56.00	-30.16	QP	LINE
6	0.91	-0.98	9.68	0.22	9.97	18.89	46.00	-27.11	Average	LINE
7	1.24	4.18	9.44	0.25	9.98	23.85	56.00	-32.15	QP	LINE
8	1.24	-4.17	9.44	0.25	9.98	15.50	46.00	-30.50	Average	LINE
9	2.27	-1.29	9.79	0.26	9.99	18.75	56.00	-37.25	QP	LINE
10	2.27	-9.24	9.79	0.26	9.99	10.80	46.00	-35.20	Average	LINE
11	3.42	-1.71	9.68	0.27	10.01	18.25	56.00	-37.75	QP	LINE
12	3.42	-11.24	9.68	0.27	10.01	8.72	46.00	-37.28	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q24051516-1E appendix I

-----End Report-----