

FCC RF Test Report

(2.4G Wi-Fi)

Applicant: Shenzhen Liuheliu Medical Instrument Co., Ltd.

Address of Applicant: Floor 4, Building A, Jindingsheng Science and Technology Innovation Park, Qinghu Community, Longhua Street, Longhua District, Shenzhen City

Equipment Under Test (EUT)

Product Name: Wireless Data Terminal

Model No.: LHL-W-003, LHL-W-002, LHL-W-004, LHL-W-005

Trade Mark: yingzhi

FCC ID: 2A7TF-LHL-W-003

Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 05 Jul., 2022

Date of Test: 06 Jul., to 04 Aug., 2022

Date of Report Issued: 05 Aug., 2022

Test Result: PASS

Tested by: Janet Wei **Date:** 05 Aug., 2022

Reviewed by: Wenwen Zhang **Date:** 05 Aug., 2022

Approved by: Wenwen Zhang **Date:** 05 Aug., 2022

Test Engineer
Project Engineer
Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	26 Jul., 2022	Original
01	04 Aug., 2022	1. Updated uncertainty on page 5. 2. Updated test setup and test procedure on page 8/10. 3. Updated Limit on page 12. 4. Updated note 2 on page 32/33. 5. Updated test data on Appendix A – 2.4G Wi-Fi.
02	05 Aug., 2022	Updated Product Name

3 Contents

	Page
1 Cover Page	1
2 Version	2
3 Contents.....	3
4 General Information.....	4
4.1 Client Information	4
4.2 General Description of E.U.T.	4
4.3 Test Mode and Environment	5
4.4 Description of Test Auxiliary Equipment.....	5
4.5 Measurement Uncertainty.....	5
4.6 Additions to, Deviations, or Exclusions from the Method.....	5
4.7 Laboratory Facility.....	6
4.8 Laboratory Location	6
4.9 Test Instruments List	6
5 Measurement Setup and Procedure	8
5.1 Test Channel	8
5.2 Test Setup.....	8
5.3 Test Procedure	10
6 Test Results.....	11
6.1 Summary	11
6.2 Antenna Requirement	13
6.3 AC Power Line Conducted Emission	14
6.4 Emissions in Restricted Frequency Bands.....	16
6.5 Emissions in Non-restricted Frequency Bands.....	32

4 General Information

4.1 Client Information

Applicant:	Shenzhen Liuheliu Medical Instrument Co., Ltd.
Address:	Floor 4, Building A, Jindingsheng Science and Technology Innovation Park, Qinghu Community, Longhua Street, Longhua District, Shenzhen City
Manufacturer:	Shenzhen Liuheliu Medical Instrument Co., Ltd.
Address:	Floor 4, Building A, Jindingsheng Science and Technology Innovation Park, Qinghu Community, Longhua Street, Longhua District, Shenzhen City
Factory:	SHENZHEN SKYWORTH ELECTRONIC APPLIANCE TECH CO., LTD
Address:	4/F, 6/F South, Skyworth Industrial Park, Shiyan Bao'an District, Shenzhen, Guangdong, China

4.2 General Description of E.U.T.

Product Name:	Wireless Data Terminal
Model No.:	LHL-W-003, LHL-W-002, LHL-W-004, LHL-W-005
Operation Frequency:	2412 MHz - 2462 MHz (802.11b, g, n-HT20) 2422 MHz - 2452 MHz (802.11n-HT40)
Channel Numbers:	11 (802.11b, g, n-HT20) 7 (802.11n-HT40)
Channel Separation:	5MHz
Modulation Technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation Technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Antenna Type:	LDS Antenna
Antenna Gain:	0 dBi (declare by applicant)
Antenna Transmit Mode:	SISO (1TX, 1RX)
Power Supply:	Rechargeable Li-ion polymer Battery DC3.8V, 510mAh
Base:	Model No.:LHL-W-003 Input: DC 5V, 0.5A Output: DC 5.0V, 0.5A
Remark:	Model No.: LHL-W-003, LHL-W-002, LHL-W-004, LHL-W-005 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

4.3 Test Mode and Environment

Test Mode:	
Transmitting mode:	Keep the EUT in continuous transmitting with modulation
Per-scan all kind of data rate, the follow list were the worst case:	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n-HT20	6.5Mbps
802.11n-HT40	13.5Mbps
Remark: For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan 802.11b, g, n modulation mode, found 802.11b modulation mode was worse case mode. The report only reflects the test data of worst mode.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1010 mbar

4.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

4.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.11 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (9kHz ~ 30MHz) (3m SAC)	±3.13 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	±4.45 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	±5.34 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

4.6 Additions to, Deviations, or Exclusions from the Method

No

4.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

4.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2024
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	03-07-2022	03-06-2023
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	03-08-2022	03-07-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	03-08-2022	03-07-2023
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	04-07-2022	04-06-2023
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	01-20-2022	01-19-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	01-20-2022	01-19-2023
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	03-30-2022	03-29-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	03-05-2022	03-04-2023
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	01-20-2022	01-19-2023
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	10-27-2021	10-26-2022
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-20-2022	01-19-2023
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-20-2022	01-19-2023
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-20-2022	01-19-2023
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	10-21-2021	10-20-2022
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	02-24-2022	02-23-2023
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	03-30-2022	03-29-2023
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	02-24-2022	02-23-2023
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	10-27-2021	10-26-2022
DC Power Supply	Keysight	E3642A	WXJ025-2	11-27-2020	11-26-2023
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	03-19-2021	03-18-2023
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	11-19-2021	11-18-2022
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

5 Measurement Setup and Procedure


5.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

802.11b, 802.11g, 802.11n-HT20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
802.11n-HT40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	6	2437	9	2452

5.2 Test Setup


1) Conducted emission measurement:

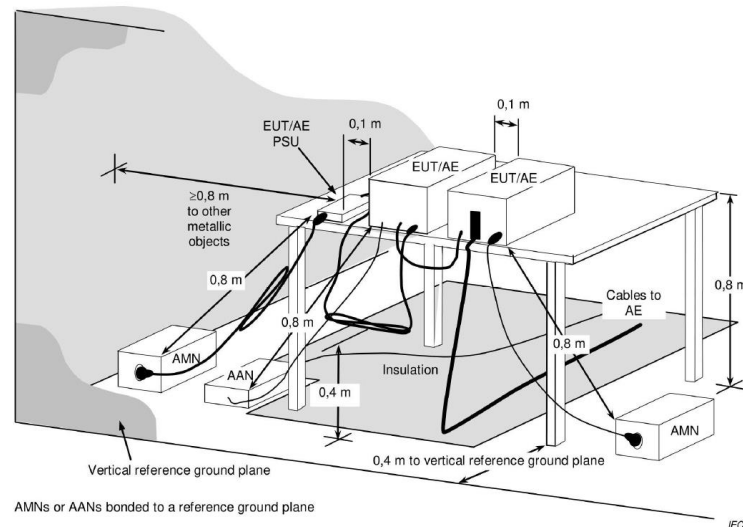


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:


9kHz ~ 30 MHz (3m SAC)

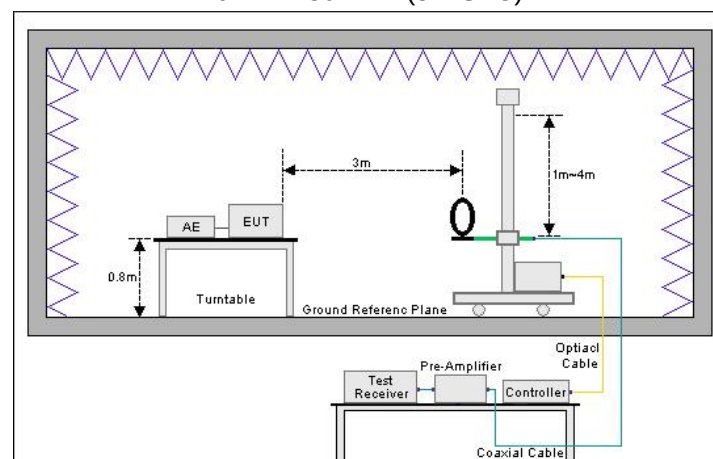


Below 1GHz (3m SAC)

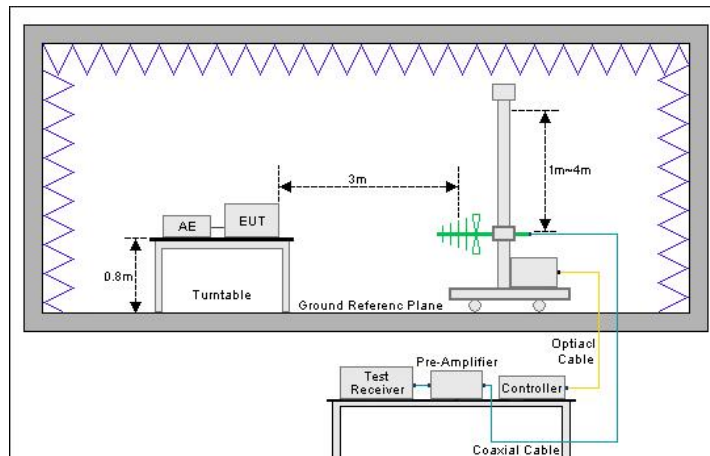

Above 1GHz (3m SAC)

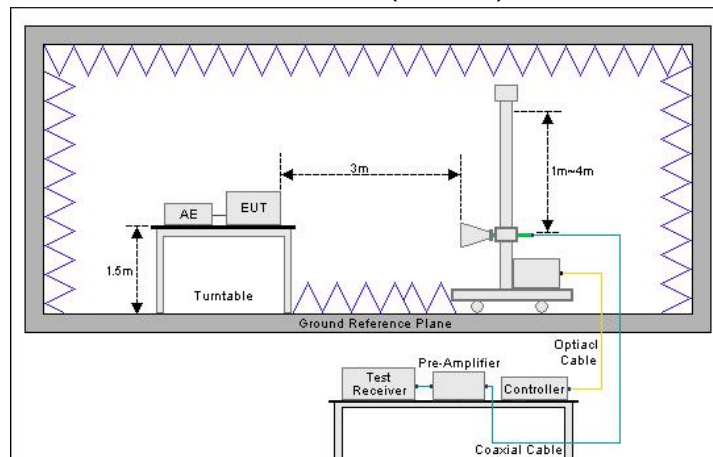

3) Conducted test method

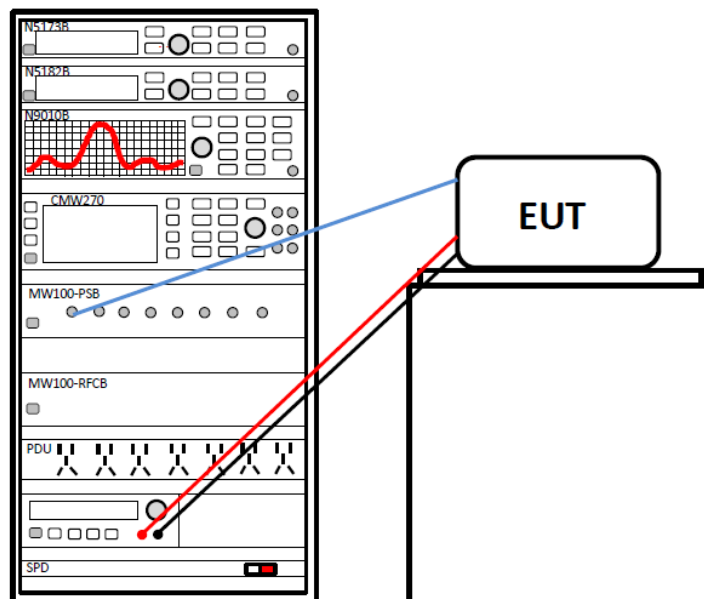

5.3 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	For below 30MHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna in coaxial and coplanar polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For 30MHz - 1GHz: 4. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 5. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 6. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The Wi-Fi antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

6 Test Results

6.1 Summary

6.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	See Section 6.2	Pass
AC Power Line Conducted Emission	15.207	See Section 6.3	Pass
Duty Cycle	ANSI C63.10-2013	Appendix – 2.4G Wi-Fi	Pass
Conducted Output Power	15.247 (b)(3)	Appendix – 2.4G Wi-Fi	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Appendix – 2.4G Wi-Fi	Pass
Power Spectral Density	15.247 (e)	Appendix – 2.4G Wi-Fi	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	Appendix – 2.4G Wi-Fi	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	See Section 6.4	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	See Section 6.5	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).			
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

6.1.2 Test Limit


Test items	Limit																																																				
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr><tr><td colspan="3">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Limit (dBμV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	56	46	5 – 30	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																																					
Frequency (MHz)	Limit (dBμV)																																																				
	Quasi-Peak	Average																																																			
0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1																																																			
0.5 – 5	56	46																																																			
5 – 30	60	50																																																			
Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																																																					
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																																																				
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																																																				
99% Occupied Bandwidth	N/A																																																				
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																																																				
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																																																				
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th>Frequency(MHz)</th><th colspan="2">Limit(dBμV/m) @3m</th><th>Detector</th></tr><tr><td>0.009-0.490</td><td colspan="2">107.60</td><td>Quasi-peak</td></tr><tr><td>0.490-1.705</td><td colspan="2">66.74</td><td>Quasi-peak</td></tr><tr><td>1.705-30.0</td><td colspan="2">69.54</td><td>Quasi-peak</td></tr><tr><th rowspan="2">Frequency(MHz)</th><th colspan="2">Limit(dBμV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@3m</th><th>@10m</th></tr><tr><td>30-88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88-216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216-960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960-1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Limit(dBμV/m) @3m</th><th rowspan="2"></th></tr><tr><th>Average</th><th>Peak</th></tr><tr><td>Above 1 GHz</td><td>54.0</td><td>74.0</td><td></td></tr><tr><td colspan="4">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency(MHz)	Limit(dBμV/m) @3m		Detector	0.009-0.490	107.60		Quasi-peak	0.490-1.705	66.74		Quasi-peak	1.705-30.0	69.54		Quasi-peak	Frequency(MHz)	Limit(dBμV/m)		Detector	@3m	@10m	30-88	40.0	30.0	Quasi-peak	88-216	43.5	33.5	Quasi-peak	216-960	46.0	36.0	Quasi-peak	960-1000	54.0	44.0	Quasi-peak	Frequency	Limit(dBμV/m) @3m			Average	Peak	Above 1 GHz	54.0	74.0		Note: The measurement bandwidth shall be 1 MHz or greater.			
Frequency(MHz)	Limit(dBμV/m) @3m		Detector																																																		
0.009-0.490	107.60		Quasi-peak																																																		
0.490-1.705	66.74		Quasi-peak																																																		
1.705-30.0	69.54		Quasi-peak																																																		
Frequency(MHz)	Limit(dBμV/m)		Detector																																																		
	@3m	@10m																																																			
30-88	40.0	30.0	Quasi-peak																																																		
88-216	43.5	33.5	Quasi-peak																																																		
216-960	46.0	36.0	Quasi-peak																																																		
960-1000	54.0	44.0	Quasi-peak																																																		
Frequency	Limit(dBμV/m) @3m																																																				
	Average	Peak																																																			
Above 1 GHz	54.0	74.0																																																			
Note: The measurement bandwidth shall be 1 MHz or greater.																																																					

6.2 Antenna Requirement

Standard Requirement:	FCC Part 15 C Section 15.203/15.247 (b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247 (b)(4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The Wi-Fi antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna is 0 dBi. See product internal photos for details.	

6.3 AC Power Line Conducted Emission

Product name:	Wireless Data Terminal	Product model:	LHL-W-003
Test by:	Janet	Test mode:	2.4G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

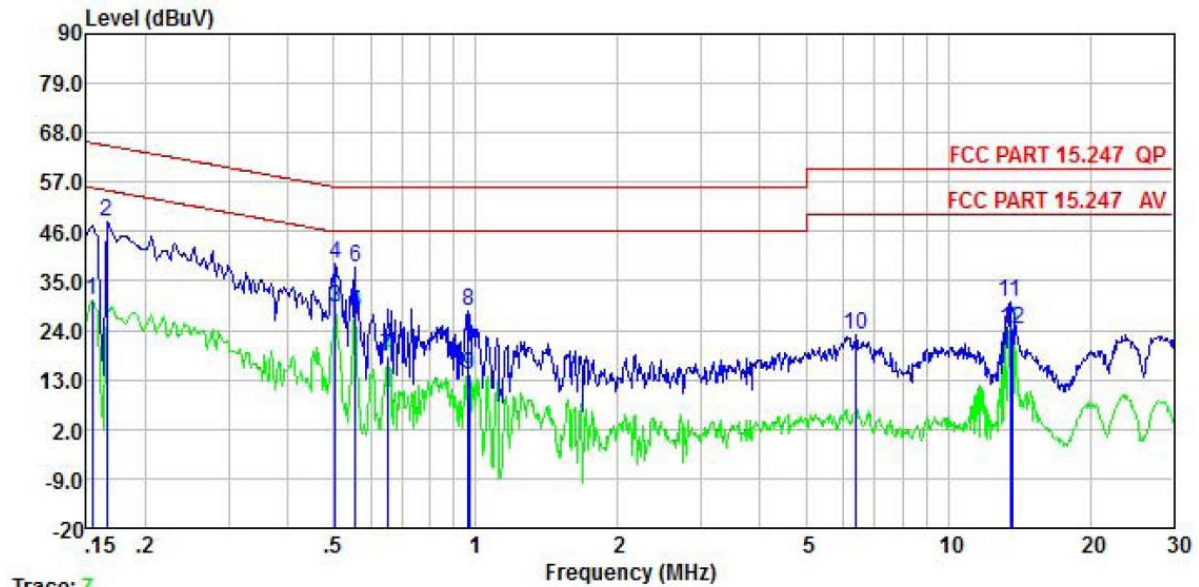


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	30.81	0.04	0.01	30.86	55.78	-24.92	Average
2	0.166	48.24	0.04	0.01	48.29	65.16	-16.87	QP
3	0.505	29.07	0.05	0.03	29.15	46.00	-16.85	Average
4	0.505	38.83	0.05	0.03	38.91	56.00	-17.09	QP
5	0.555	28.01	0.06	0.02	28.09	46.00	-17.91	Average
6	0.555	38.06	0.06	0.02	38.14	56.00	-17.86	QP
7	0.651	18.19	0.07	0.03	18.29	46.00	-27.71	Average
8	0.963	27.99	0.07	0.05	28.11	56.00	-27.89	QP
9	0.963	14.07	0.07	0.05	14.19	46.00	-31.81	Average
10	6.352	22.88	0.16	0.09	23.13	60.00	-36.87	QP
11	13.551	30.06	0.27	0.12	30.45	60.00	-29.55	QP
12	13.695	24.01	0.27	0.12	24.40	50.00	-25.60	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Wireless Data Terminal	Product model:	LHL-W-003
Test by:	Janet	Test mode:	2.4G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

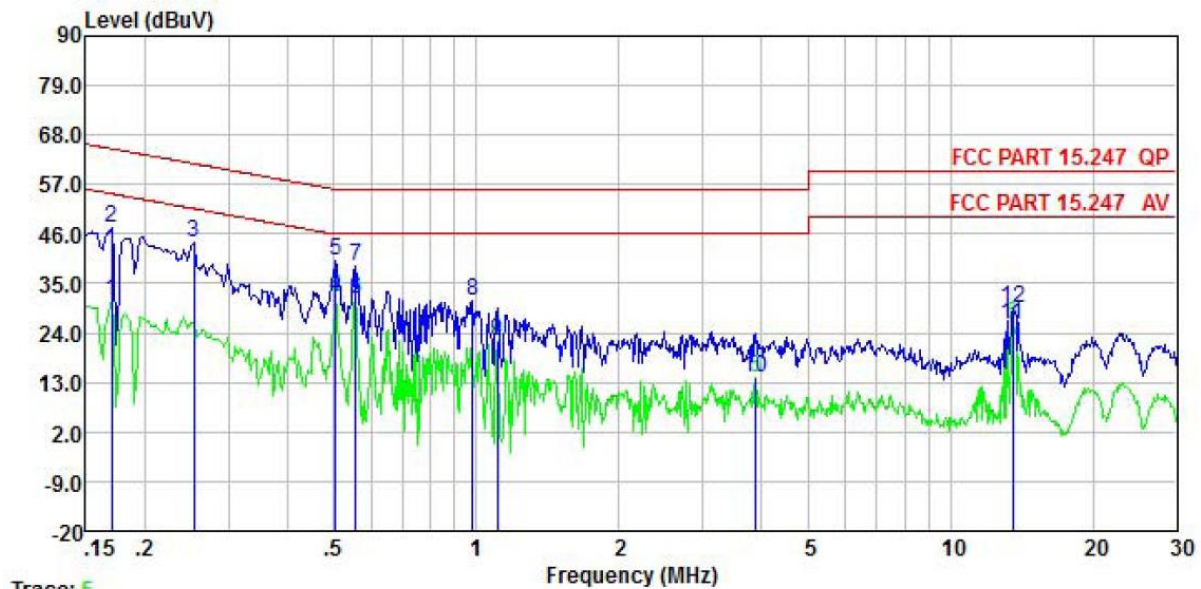


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.170	31.15	0.06	0.01	31.22	54.94	-23.72	Average
2	0.170	47.12	0.06	0.01	47.19	64.94	-17.75	QP
3	0.253	44.02	0.05	0.01	44.08	61.64	-17.56	QP
4	0.505	31.98	0.04	0.03	32.05	46.00	-13.95	Average
5	0.505	39.89	0.04	0.03	39.96	56.00	-16.04	QP
6	0.555	31.40	0.05	0.02	31.47	46.00	-14.53	Average
7	0.555	38.70	0.05	0.02	38.77	56.00	-17.23	QP
8	0.984	31.23	0.06	0.05	31.34	56.00	-24.66	QP
9	1.106	22.28	0.06	0.07	22.41	46.00	-23.59	Average
10	3.881	13.75	0.10	0.08	13.93	46.00	-32.07	Average
11	13.551	25.34	0.25	0.12	25.71	50.00	-24.29	Average
12	13.623	29.32	0.26	0.12	29.70	60.00	-30.30	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

6.4 Emissions in Restricted Frequency Bands

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

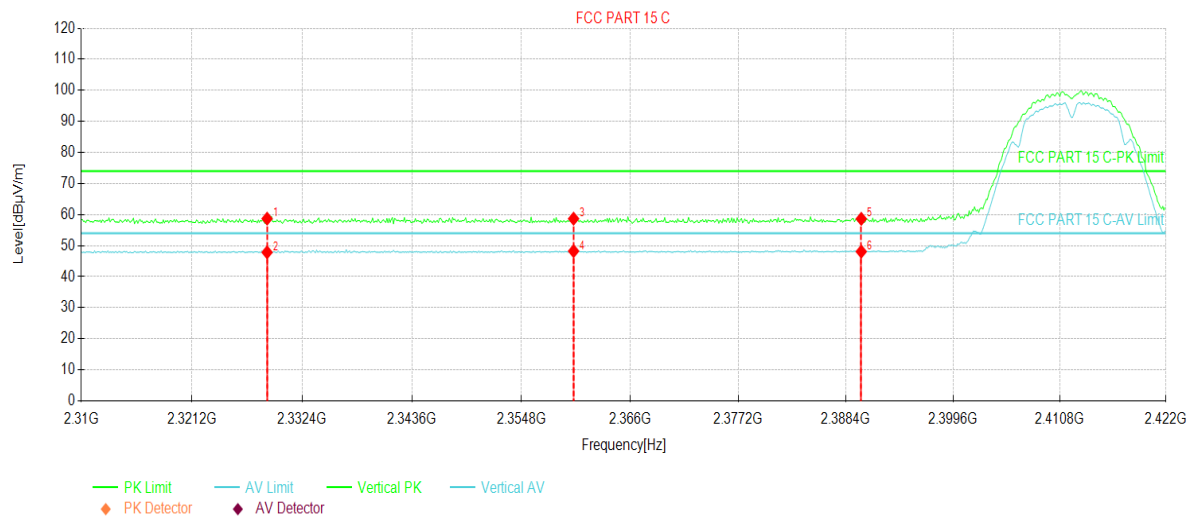


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2328.81	23.55	58.69	35.14	74.00	15.31	PK	Vertical
2	2328.81	12.70	47.84	35.14	54.00	6.16	AV	Vertical
3	2360.17	23.31	58.68	35.37	74.00	15.32	PK	Vertical
4	2360.17	12.86	48.23	35.37	54.00	5.77	AV	Vertical
5	2390.00	23.03	58.63	35.60	74.00	15.37	PK	Vertical
6	2390.00	12.47	48.07	35.60	54.00	5.93	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

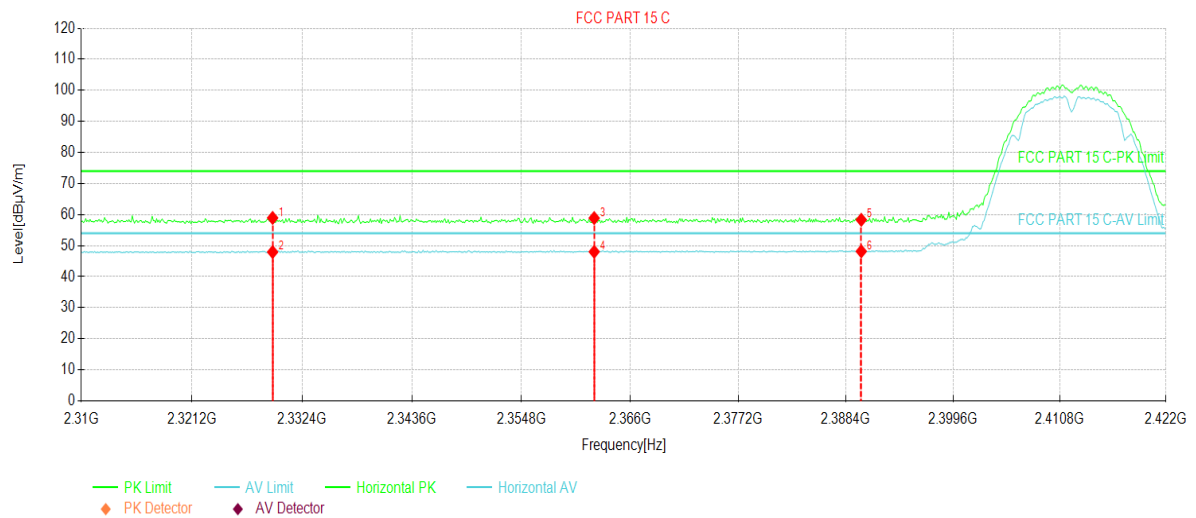


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2329.37	23.77	58.91	35.14	74.00	15.09	PK	Horizontal
2	2329.37	12.80	47.94	35.14	54.00	6.06	AV	Horizontal
3	2362.30	23.47	58.86	35.39	74.00	15.14	PK	Horizontal
4	2362.30	12.64	48.03	35.39	54.00	5.97	AV	Horizontal
5	2390.00	22.72	58.32	35.60	74.00	15.68	PK	Horizontal
6	2390.00	12.56	48.16	35.60	54.00	5.84	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

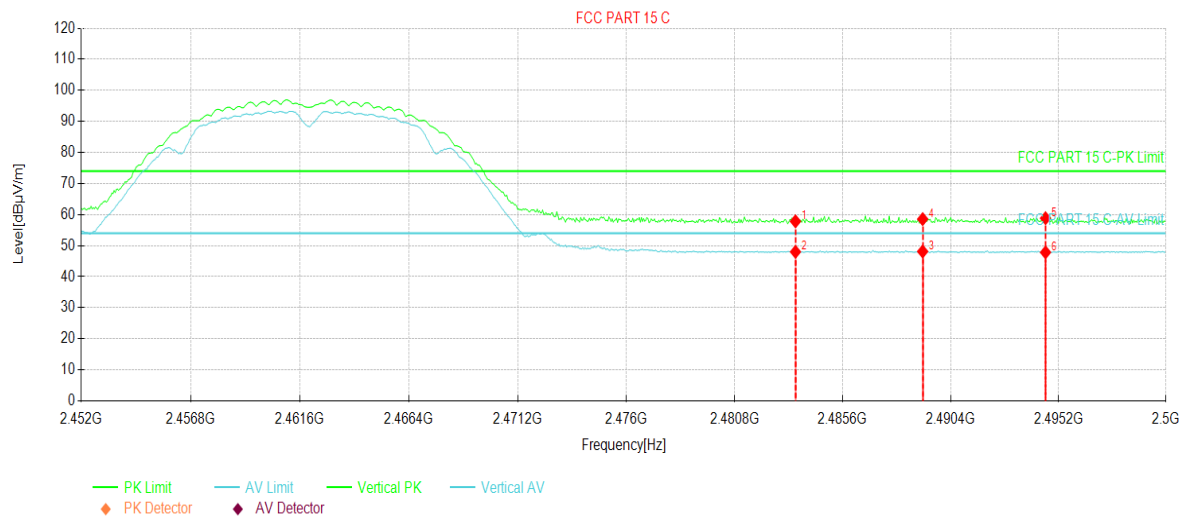


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.31	57.82	35.51	74.00	16.18	PK	Vertical
2	2483.50	12.49	48.00	35.51	54.00	6.00	AV	Vertical
3	2489.15	12.61	48.11	35.50	54.00	5.89	AV	Vertical
4	2489.15	23.04	58.54	35.50	74.00	15.46	PK	Vertical
5	2494.62	23.34	58.83	35.49	74.00	15.17	PK	Vertical
6	2494.62	12.34	47.83	35.49	54.00	6.17	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

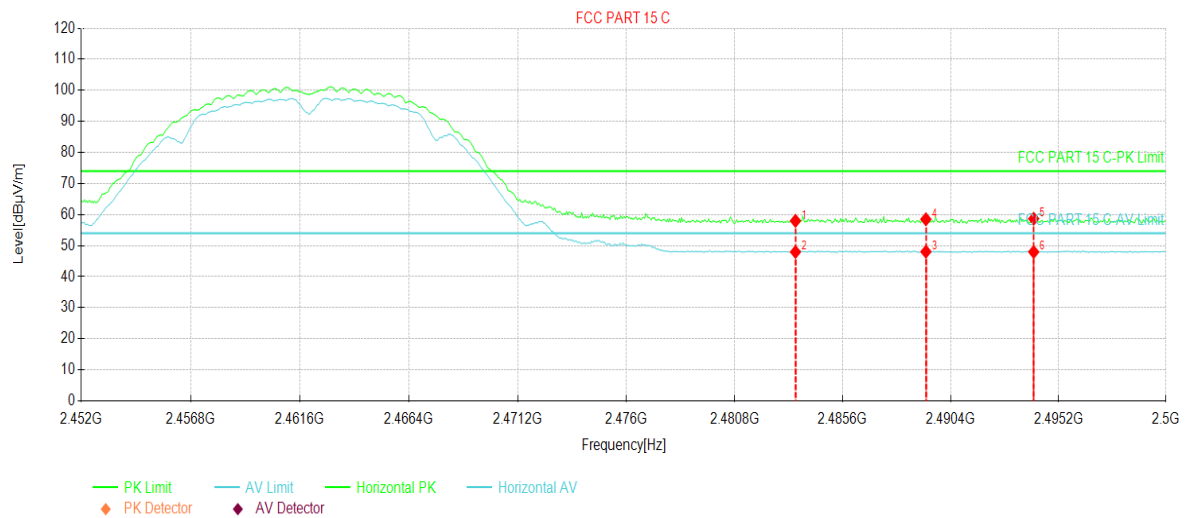


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.46	57.97	35.51	74.00	16.03	PK	Horizontal
2	2483.50	12.44	47.95	35.51	54.00	6.05	AV	Horizontal
3	2489.29	12.54	48.04	35.50	54.00	5.96	AV	Horizontal
4	2489.29	22.99	58.49	35.50	74.00	15.51	PK	Horizontal
5	2494.09	23.17	58.66	35.49	74.00	15.34	PK	Horizontal
6	2494.09	12.48	47.97	35.49	54.00	6.03	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

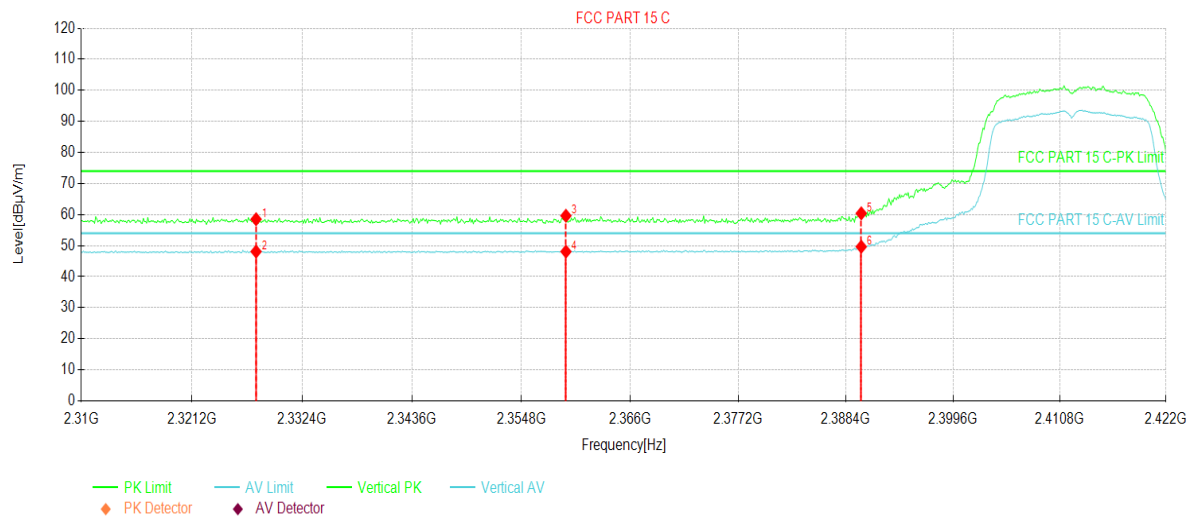


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2327.69	23.37	58.50	35.13	74.00	15.50	PK	Vertical
2	2327.69	12.95	48.08	35.13	54.00	5.92	AV	Vertical
3	2359.39	24.24	59.61	35.37	74.00	14.39	PK	Vertical
4	2359.39	12.71	48.08	35.37	54.00	5.92	AV	Vertical
5	2390.00	24.79	60.39	35.60	74.00	13.61	PK	Vertical
6	2390.00	14.04	49.64	35.60	54.00	4.36	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

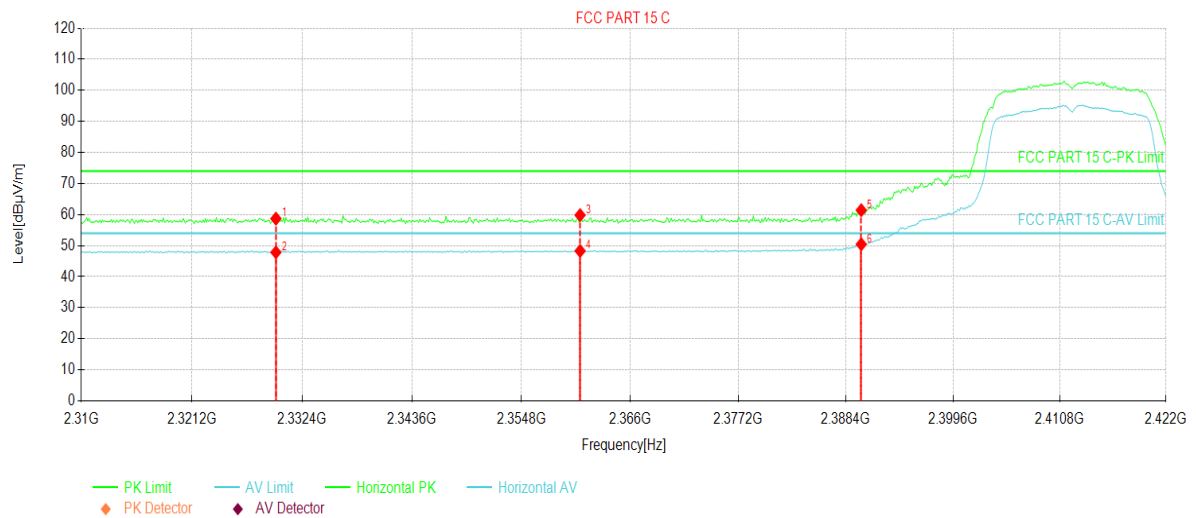


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2329.71	23.54	58.68	35.14	74.00	15.32	PK	Horizontal
2	2329.71	12.69	47.83	35.14	54.00	6.17	AV	Horizontal
3	2360.84	24.45	59.83	35.38	74.00	14.17	PK	Horizontal
4	2360.84	12.91	48.29	35.38	54.00	5.71	AV	Horizontal
5	2390.00	25.81	61.41	35.60	74.00	12.59	PK	Horizontal
6	2390.00	14.82	50.42	35.60	54.00	3.58	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

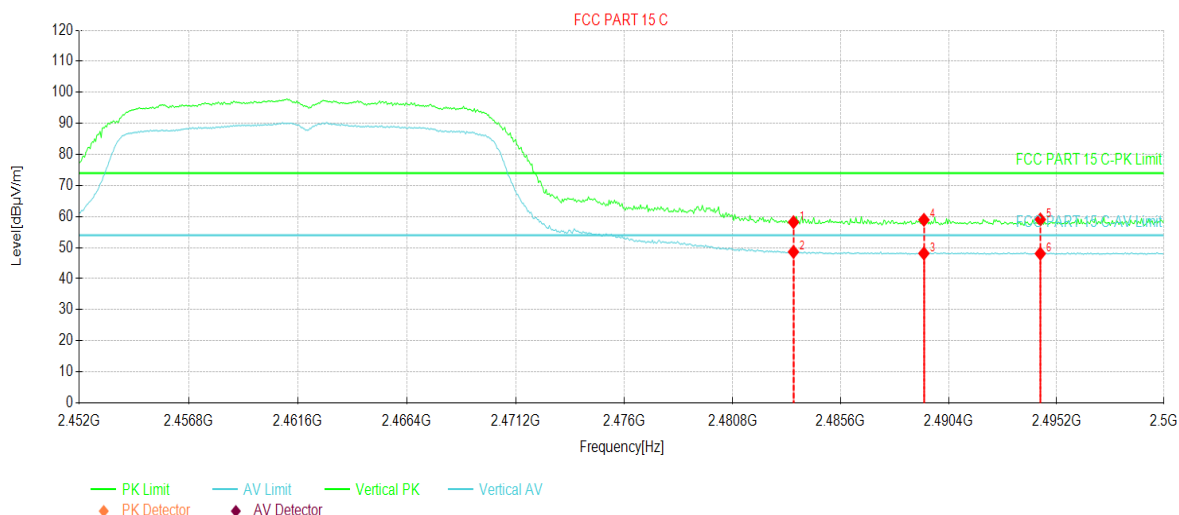


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.69	58.20	35.51	74.00	15.80	PK	Vertical
2	2483.50	13.11	48.62	35.51	54.00	5.38	AV	Vertical
3	2489.29	12.63	48.13	35.50	54.00	5.87	AV	Vertical
4	2489.29	23.44	58.94	35.50	74.00	15.06	PK	Vertical
5	2494.48	23.56	59.05	35.49	74.00	14.95	PK	Vertical
6	2494.48	12.57	48.06	35.49	54.00	5.94	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

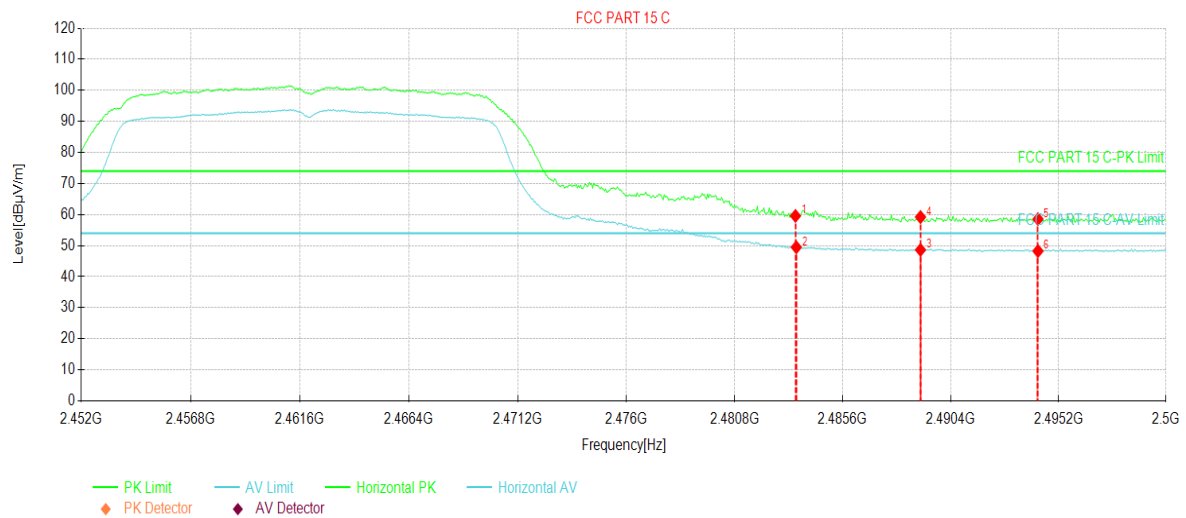


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	24.06	59.57	35.51	74.00	14.43	PK	Horizontal
2	2483.53	13.97	49.48	35.51	54.00	4.52	AV	Horizontal
3	2489.05	13.13	48.63	35.50	54.00	5.37	AV	Horizontal
4	2489.05	23.69	59.19	35.50	74.00	14.81	PK	Horizontal
5	2494.28	23.06	58.55	35.49	74.00	15.45	PK	Horizontal
6	2494.28	12.76	48.25	35.49	54.00	5.75	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

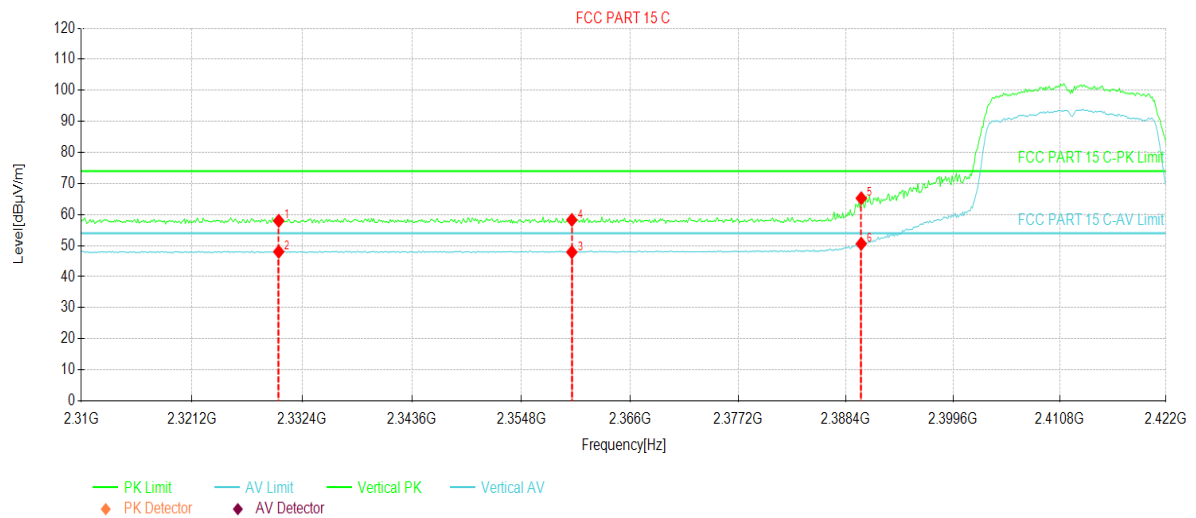


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2330.00	22.85	58.00	35.15	74.00	16.00	PK	Vertical
2	2330.00	12.89	48.04	35.15	54.00	5.96	AV	Vertical
3	2360.00	12.53	47.90	35.37	54.00	6.10	AV	Vertical
4	2360.00	22.90	58.27	35.37	74.00	15.73	PK	Vertical
5	2390.00	29.66	65.26	35.60	74.00	8.74	PK	Vertical
6	2390.00	15.00	50.60	35.60	54.00	3.40	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

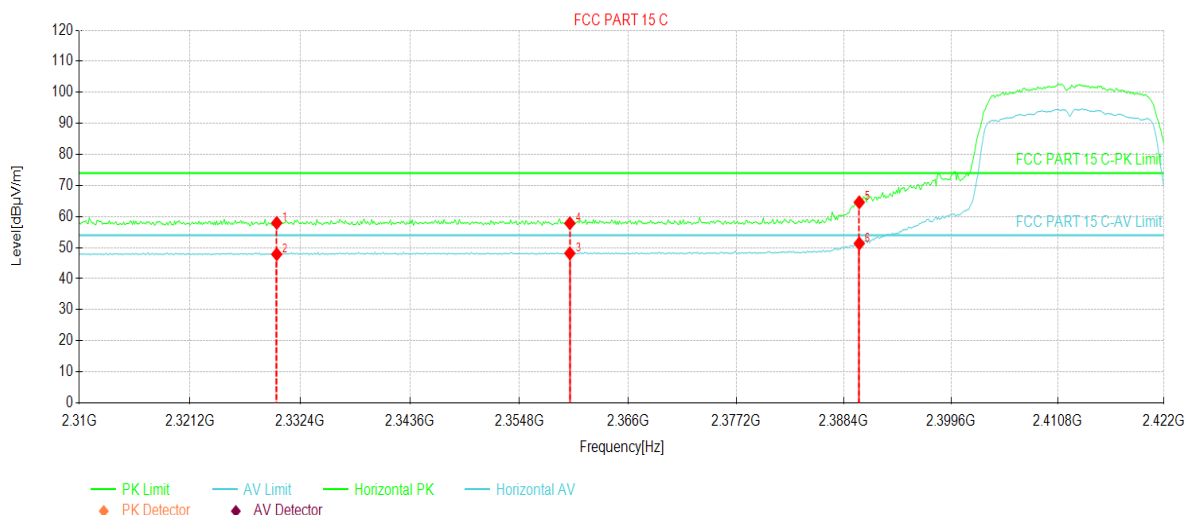


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2330.00	22.78	57.93	35.15	74.00	16.07	PK	Horizontal
2	2330.00	12.71	47.86	35.15	54.00	6.14	AV	Horizontal
3	2360.00	12.80	48.17	35.37	54.00	5.83	AV	Horizontal
4	2360.00	22.47	57.84	35.37	74.00	16.16	PK	Horizontal
5	2390.00	28.98	64.58	35.60	74.00	9.42	PK	Horizontal
6	2390.00	15.72	51.32	35.60	54.00	2.68	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

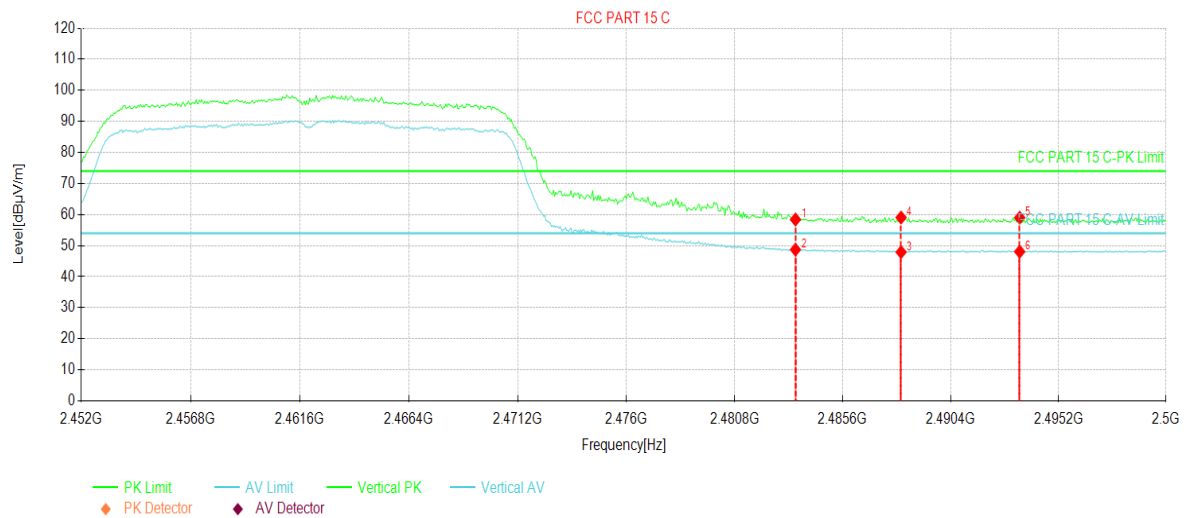


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.90	58.41	35.51	74.00	15.59	PK	Vertical
2	2483.50	13.20	48.71	35.51	54.00	5.29	AV	Vertical
3	2488.19	12.41	47.91	35.50	54.00	6.09	AV	Vertical
4	2488.19	23.55	59.05	35.50	74.00	14.95	PK	Vertical
5	2493.47	23.50	58.99	35.49	74.00	15.01	PK	Vertical
6	2493.47	12.57	48.06	35.49	54.00	5.94	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

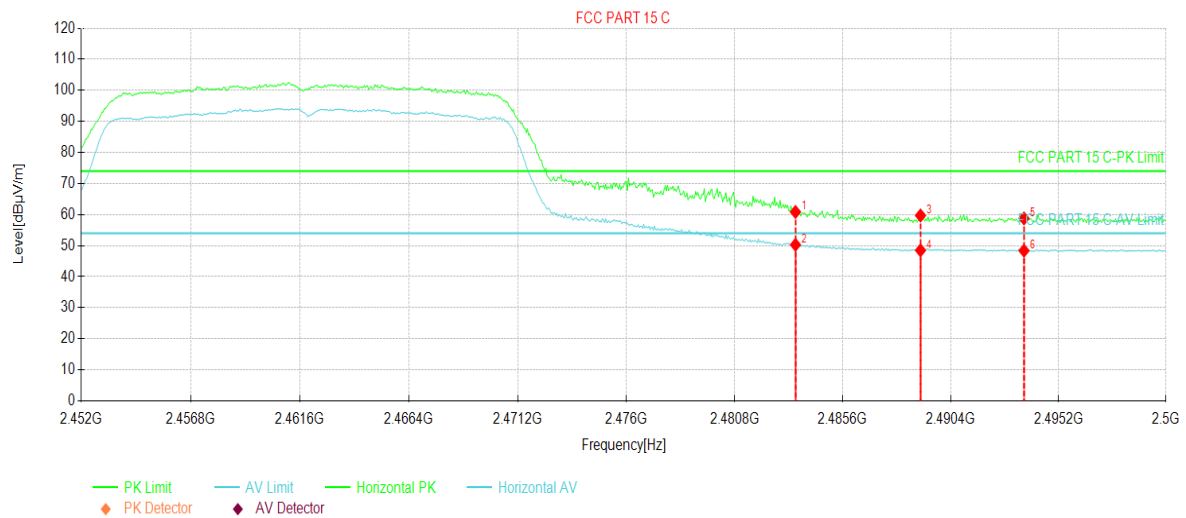


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	25.33	60.84	35.51	74.00	13.16	PK	Horizontal
2	2483.50	14.76	50.27	35.51	54.00	3.73	AV	Horizontal
3	2489.05	24.20	59.70	35.50	74.00	14.30	PK	Horizontal
4	2489.05	12.98	48.48	35.50	54.00	5.52	AV	Horizontal
5	2493.66	23.27	58.76	35.49	74.00	15.24	PK	Horizontal
6	2493.66	12.88	48.37	35.49	54.00	5.63	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

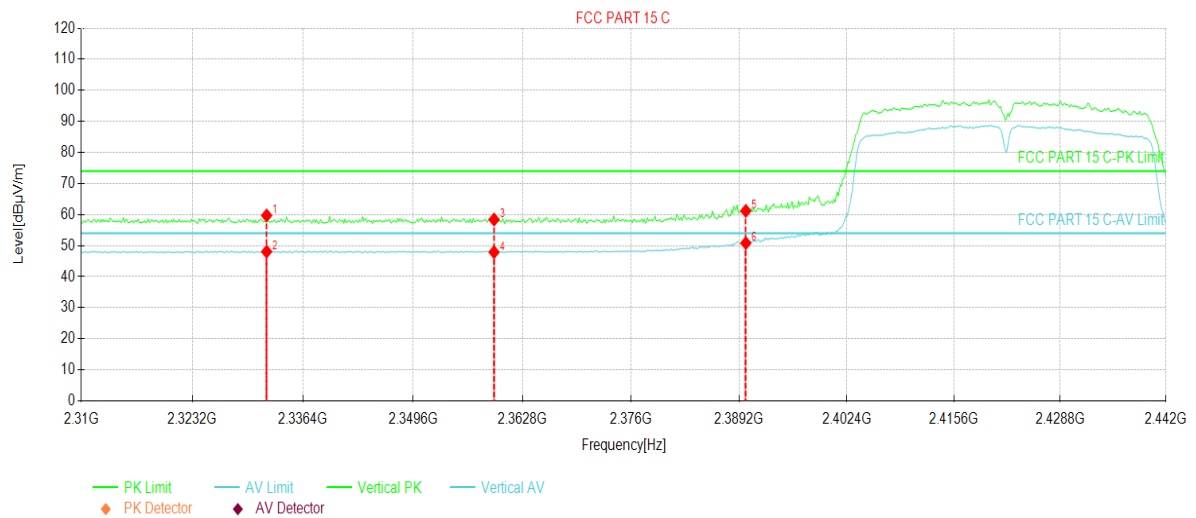


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2332.04	24.55	59.71	35.16	74.00	14.29	PK	Vertical
2	2332.04	12.91	48.07	35.16	54.00	5.93	AV	Vertical
3	2359.36	23.04	58.41	35.37	74.00	15.59	PK	Vertical
4	2359.36	12.51	47.88	35.37	54.00	6.12	AV	Vertical
5	2390.00	25.60	61.20	35.60	74.00	12.80	PK	Vertical
6	2390.00	15.22	50.82	35.60	54.00	3.18	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

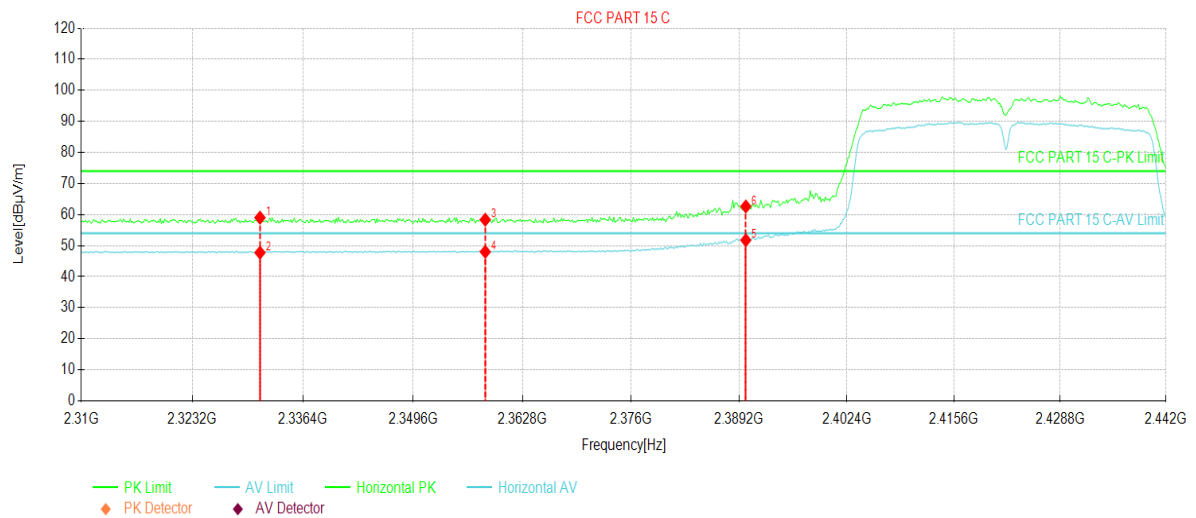


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2331.25	23.85	59.00	35.15	74.00	15.00	PK	Horizontal
2	2331.25	12.59	47.74	35.15	54.00	6.26	AV	Horizontal
3	2358.31	22.99	58.35	35.36	74.00	15.65	PK	Horizontal
4	2358.31	12.64	48.00	35.36	54.00	6.00	AV	Horizontal
5	2390.00	16.16	51.76	35.60	54.00	2.24	AV	Horizontal
6	2390.00	27.01	62.61	35.60	74.00	11.39	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

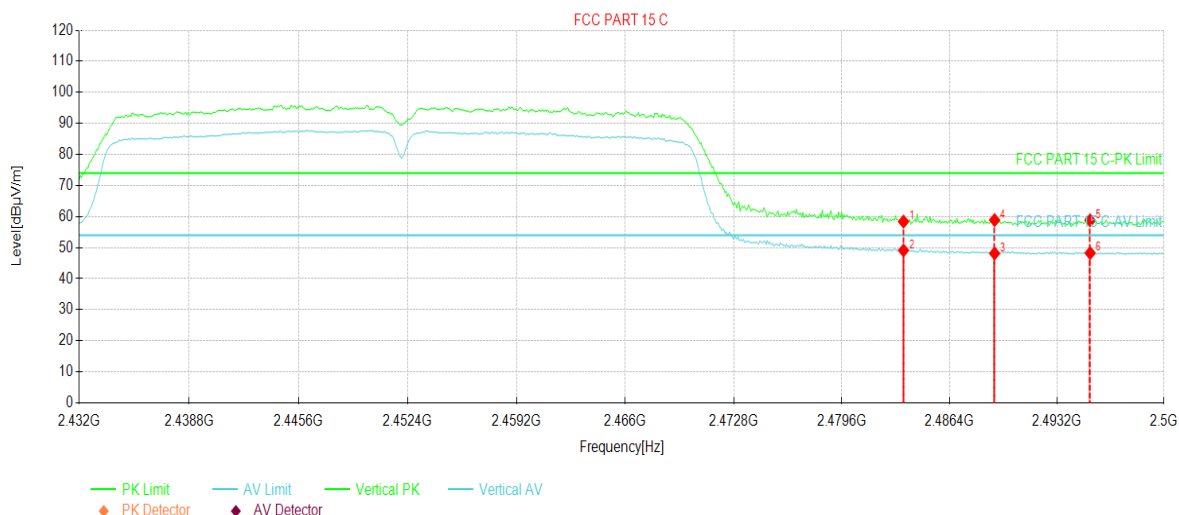


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.88	58.39	35.51	74.00	15.61	PK	Vertical
2	2483.50	13.59	49.10	35.51	54.00	4.90	AV	Vertical
3	2489.25	12.63	48.13	35.50	54.00	5.87	AV	Vertical
4	2489.25	23.37	58.87	35.50	74.00	15.13	PK	Vertical
5	2495.30	23.31	58.80	35.49	74.00	15.20	PK	Vertical
6	2495.30	12.76	48.25	35.49	54.00	5.75	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

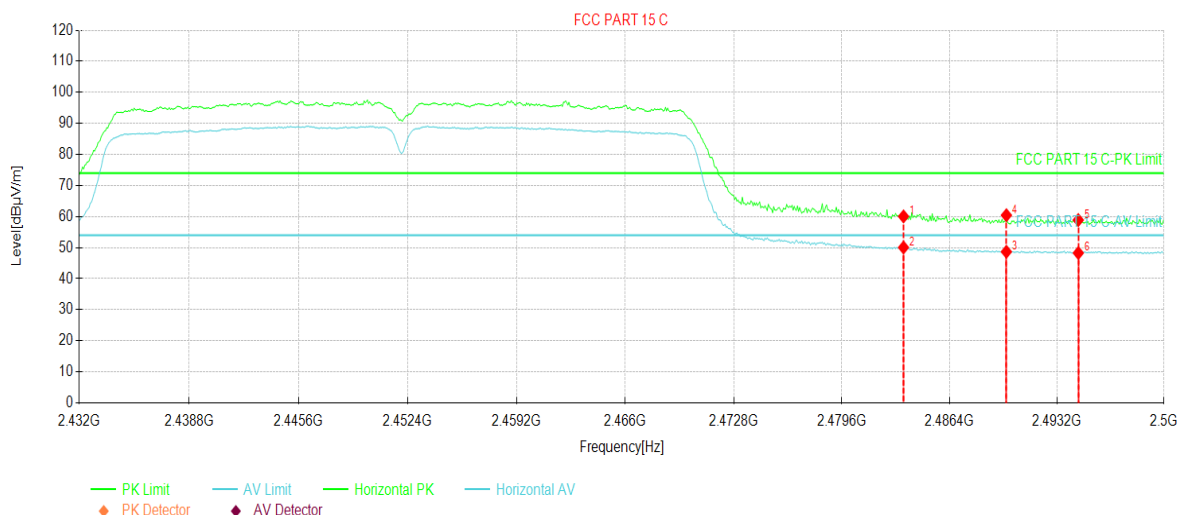

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	24.54	60.05	35.51	74.00	13.95	PK	Horizontal
2	2483.50	14.53	50.04	35.51	54.00	3.96	AV	Horizontal
3	2490.00	13.16	48.66	35.50	54.00	5.34	AV	Horizontal
4	2490.00	24.92	60.42	35.50	74.00	13.58	PK	Horizontal
5	2494.56	23.39	58.88	35.49	74.00	15.12	PK	Horizontal
6	2494.56	12.77	48.26	35.49	54.00	5.74	AV	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

6.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	2.4G Wi-Fi mode
Test Frequency:	9KHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

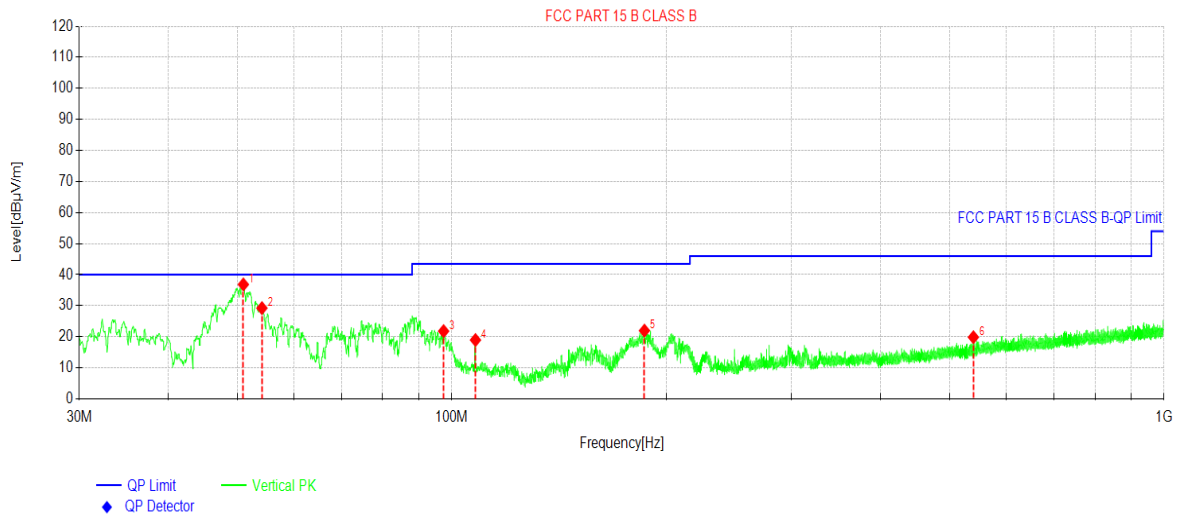


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	51.0005	49.71	36.85	-12.86	40.00	3.15	PK	Vertical
2	54.1530	42.35	29.23	-13.12	40.00	10.77	PK	Vertical
3	97.4150	36.84	21.81	-15.03	43.50	21.69	PK	Vertical
4	107.988	33.69	18.96	-14.73	43.50	24.54	PK	Vertical
5	186.461	38.35	21.97	-16.38	43.50	21.53	PK	Vertical
6	540.026	27.99	19.86	-8.13	46.00	26.14	PK	Vertical

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Wireless Data Terminal	Product Model:	LHL-W-003
Test By:	Janet	Test mode:	2.4G Wi-Fi mode
Test Frequency:	9KHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

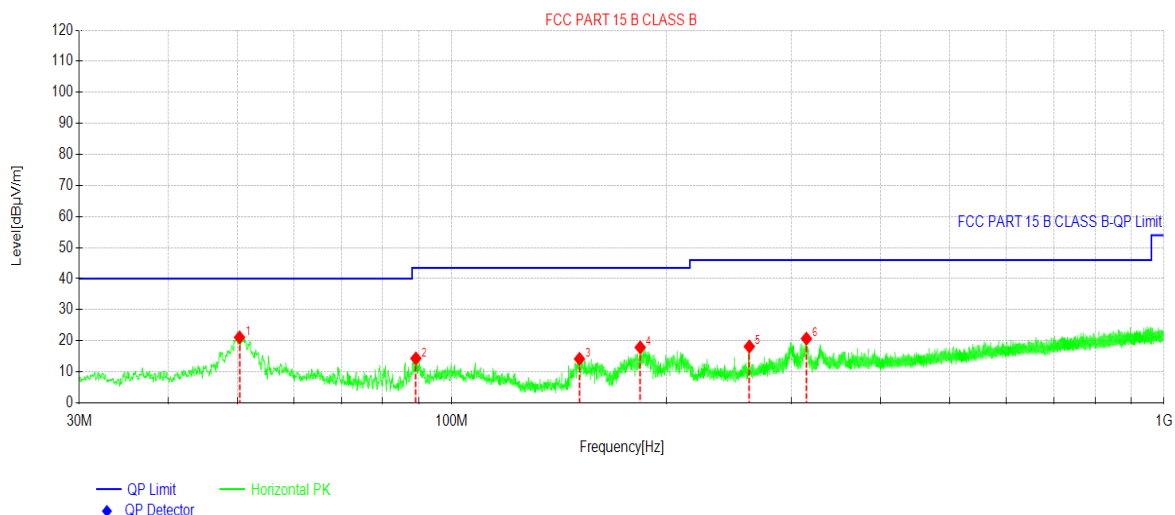

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	50.3700	33.91	21.11	-12.80	40.00	18.89	PK	Horizontal
2	89.0730	30.91	14.30	-16.61	43.50	29.20	PK	Horizontal
3	151.153	32.42	14.17	-18.25	43.50	29.33	PK	Horizontal
4	183.939	34.53	17.87	-16.66	43.50	25.63	PK	Horizontal
5	261.733	31.99	18.14	-13.85	46.00	27.86	PK	Horizontal
6	314.792	33.32	20.68	-12.64	46.00	25.32	PK	Horizontal

Remark:

- Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Above 1GHz

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	60.31	-9.46	50.85	74.00	23.15	Vertical
4824.00	55.35	-9.46	45.89	74.00	28.11	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	58.00	-9.46	48.54	54.00	5.46	Vertical
4824.00	50.83	-9.46	41.37	54.00	12.63	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	60.48	-9.11	51.37	74.00	22.63	Vertical
4874.00	55.34	-9.11	46.23	74.00	27.77	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	57.73	-9.11	48.62	54.00	5.38	Vertical
4874.00	50.75	-9.11	41.64	54.00	12.36	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	60.29	-8.74	51.55	74.00	22.45	Vertical
4924.00	55.32	-8.74	46.58	74.00	27.42	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	58.00	-8.74	49.26	54.00	4.74	Vertical
4924.00	50.77	-8.74	42.03	54.00	11.97	Horizontal
Remark: 1. Level = Read level + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	60.17	-9.46	50.71	74.00	23.29	Vertical
4824.00	55.64	-9.46	46.18	74.00	27.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	57.81	-9.46	48.35	54.00	5.65	Vertical
4824.00	50.65	-9.46	41.19	54.00	12.81	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	60.37	-9.11	51.26	74.00	22.74	Vertical
4874.00	55.17	-9.11	46.06	74.00	27.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	58.08	-9.11	48.97	54.00	5.03	Vertical
4874.00	51.00	-9.11	41.89	54.00	12.11	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	59.83	-8.74	51.09	74.00	22.91	Vertical
4924.00	56.07	-8.74	47.33	74.00	26.67	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	58.20	-8.74	49.46	54.00	4.54	Vertical
4924.00	50.92	-8.74	42.18	54.00	11.82	Horizontal
Remark: 1. Level = Read level + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	60.50	-9.46	51.04	74.00	22.96	Vertical
4824.00	55.83	-9.46	46.37	74.00	27.63	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	57.45	-9.46	47.99	54.00	6.01	Vertical
4824.00	50.71	-9.46	41.25	54.00	12.75	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	60.98	-9.11	51.87	74.00	22.13	Vertical
4874.00	55.33	-9.11	46.22	74.00	27.78	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	57.23	-9.11	48.12	54.00	5.88	Vertical
4874.00	50.67	-9.11	41.56	54.00	12.44	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	60.59	-8.74	51.85	74.00	22.15	Vertical
4924.00	55.67	-8.74	46.93	74.00	27.07	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	57.58	-8.74	48.84	54.00	5.16	Vertical
4924.00	50.75	-8.74	42.01	54.00	11.99	Horizontal
Remark: 1. Level = Read level + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	60.02	-9.32	50.70	74.00	23.30	Vertical
4844.00	55.42	-9.32	46.10	74.00	27.90	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	57.91	-9.32	48.59	54.00	5.41	Vertical
4844.00	51.00	-9.32	41.68	54.00	12.32	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	59.66	-9.11	50.55	74.00	23.45	Vertical
4874.00	55.62	-9.11	46.51	74.00	27.49	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	58.39	-9.11	49.28	54.00	4.72	Vertical
4874.00	50.90	-9.11	41.79	54.00	12.21	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	59.88	-8.90	50.98	74.00	23.02	Vertical
4904.00	55.32	-8.90	46.42	74.00	27.58	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	57.96	-8.90	49.06	54.00	4.94	Vertical
4904.00	50.59	-8.90	41.69	54.00	12.31	Horizontal
Remark: 1. Level = Read level + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----