



## 11.4. Test Results

Pass


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

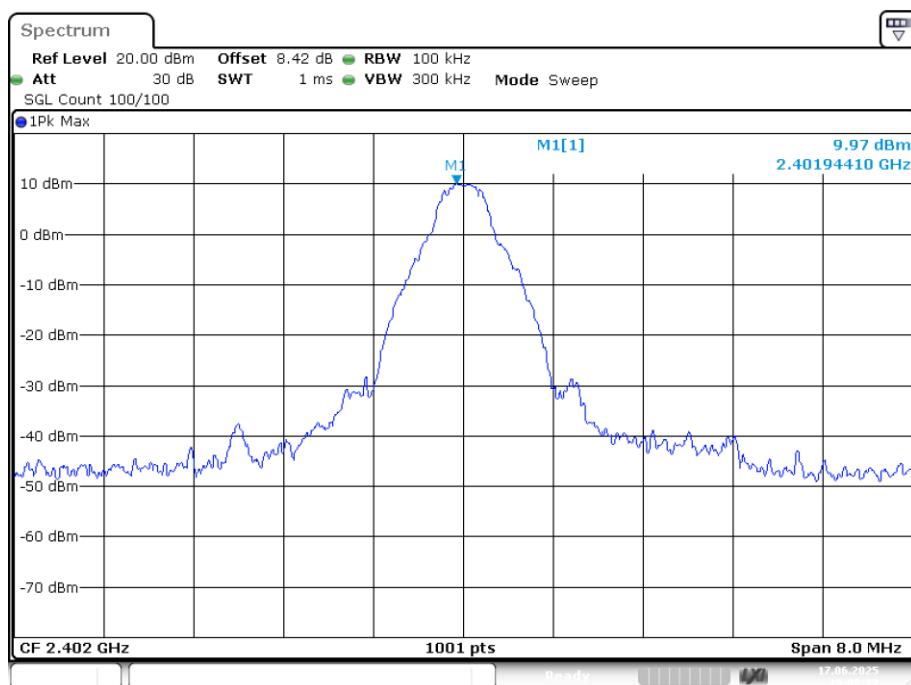

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

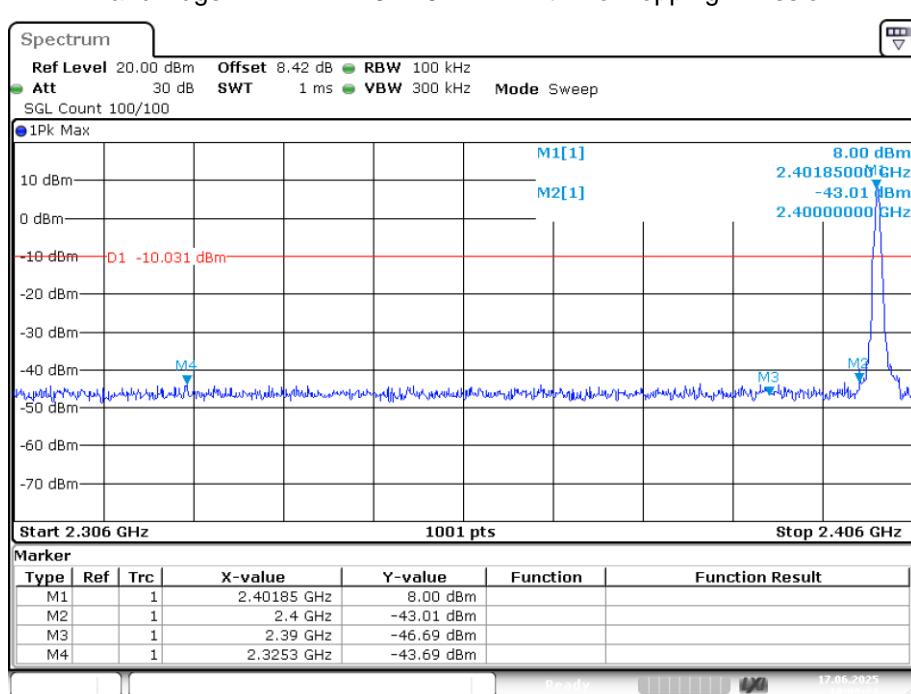


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

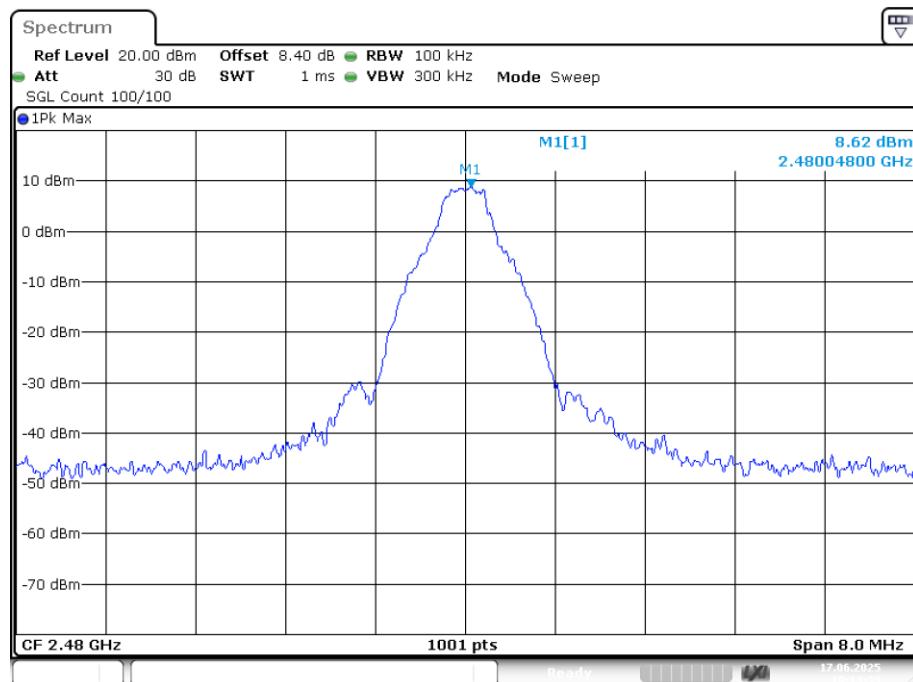


Date: 17.JUN.2025 18:13:33

### Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

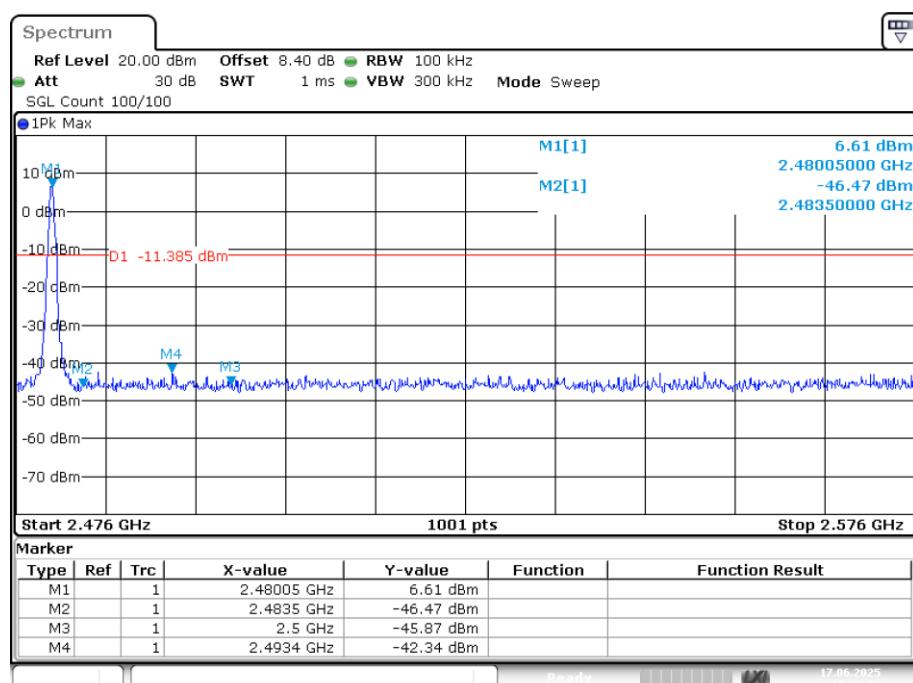


Date: 17.JUN.2025 18:13:36

### Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

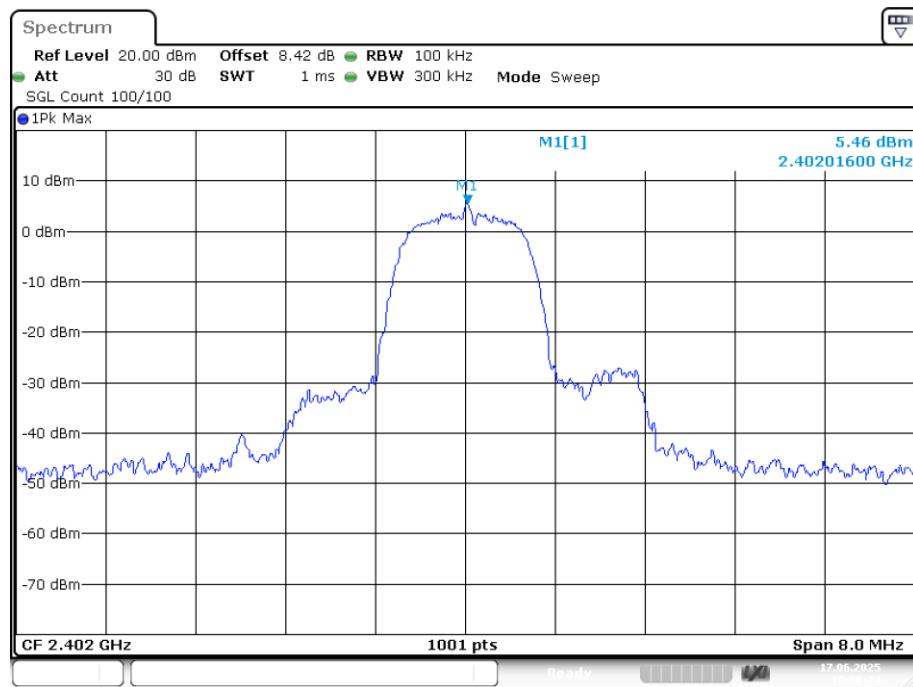


Date: 17.JUN.2025 18:36:24

### Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

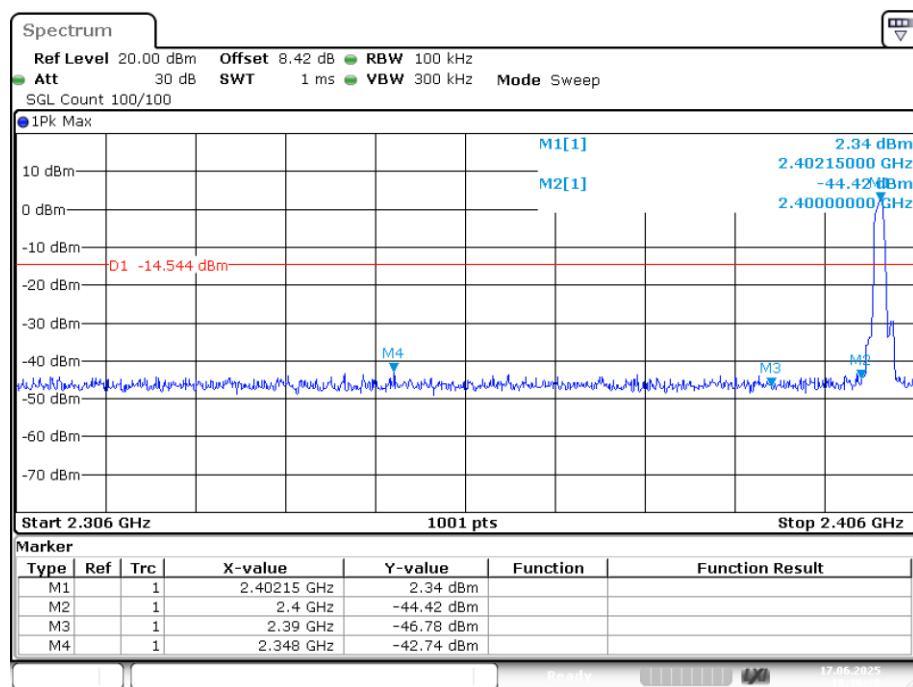


Date: 17.JUN.2025 18:36:28

### Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

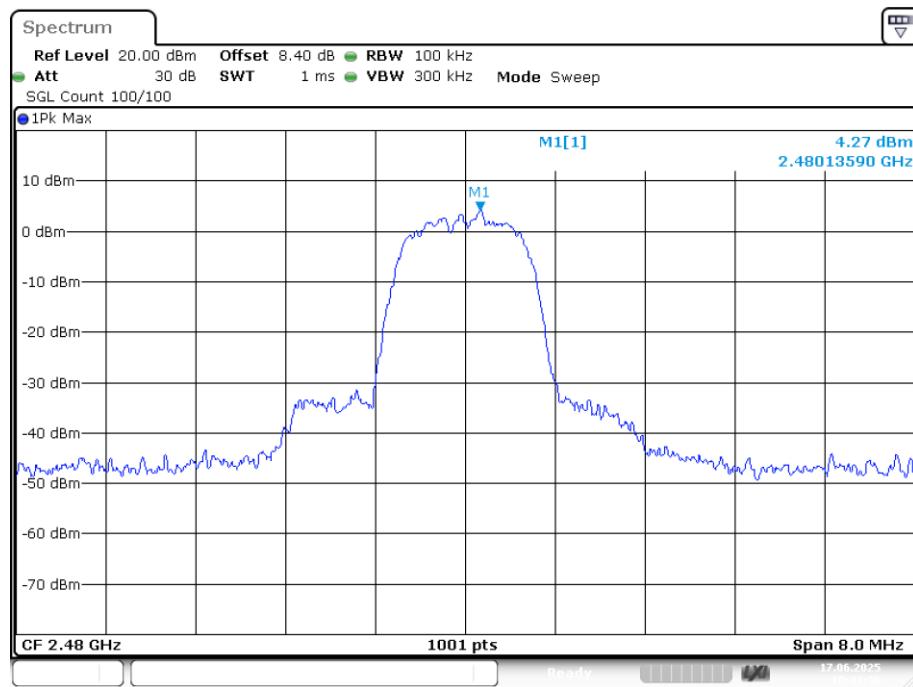


Date: 17.JUN.2025 18:41:36

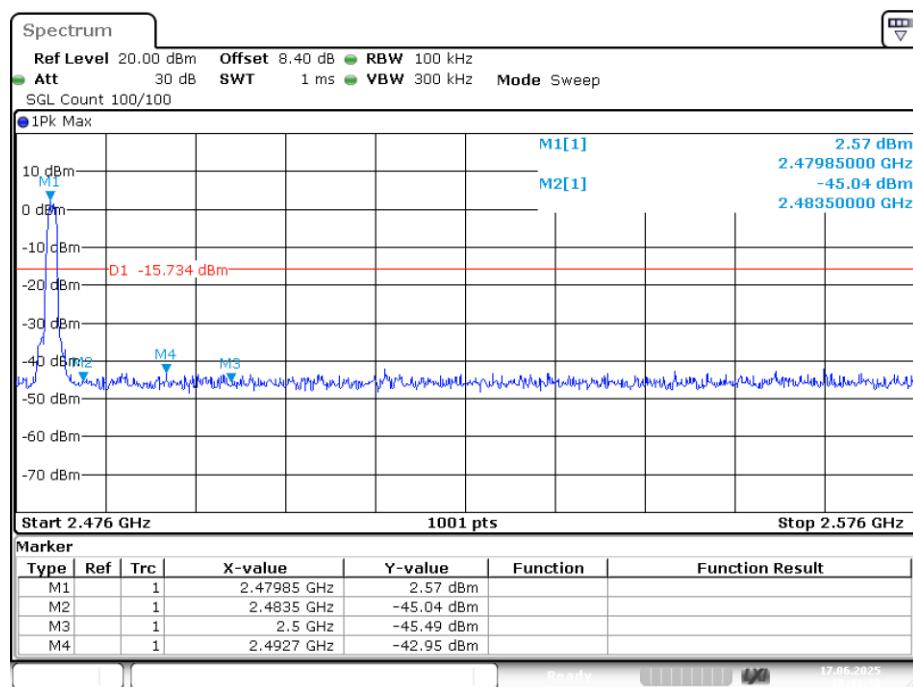**Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission**


Date: 17.JUN.2025 18:41:40

**Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref**

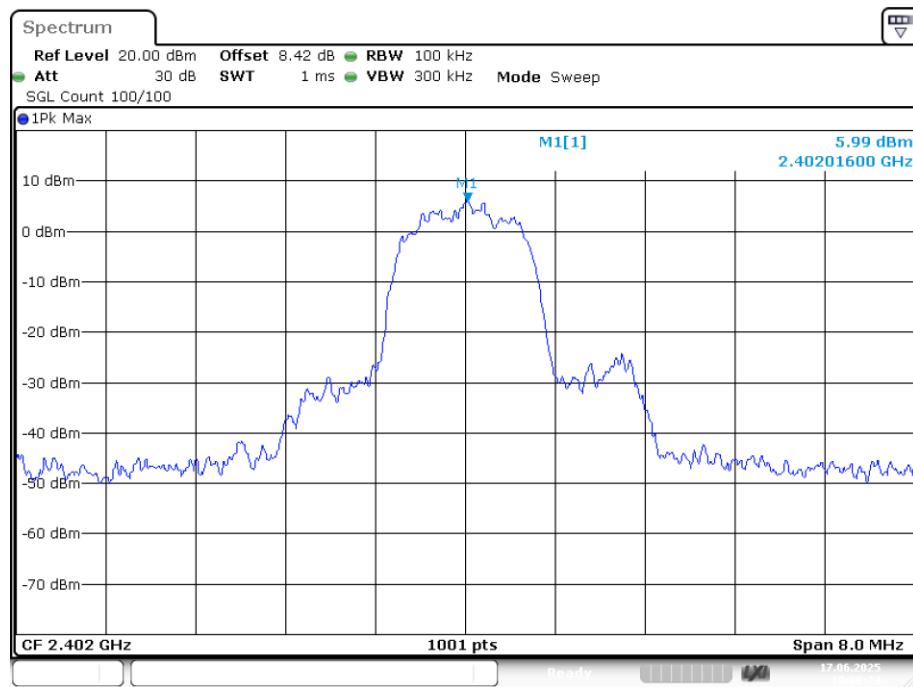


Date: 17.JUN.2025 19:06:24

### Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

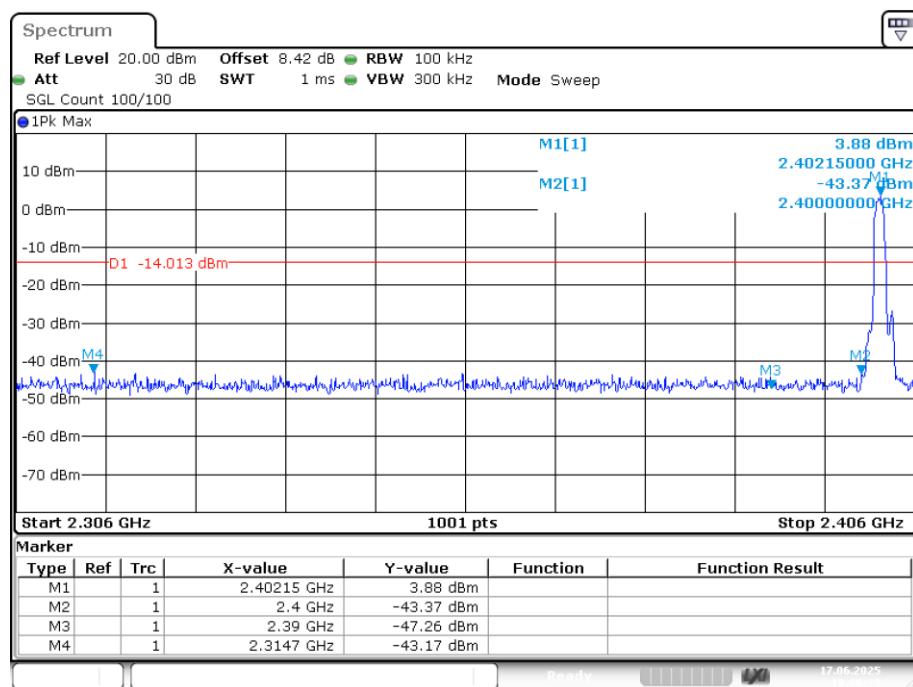


Date: 17.JUN.2025 19:06:28

### Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

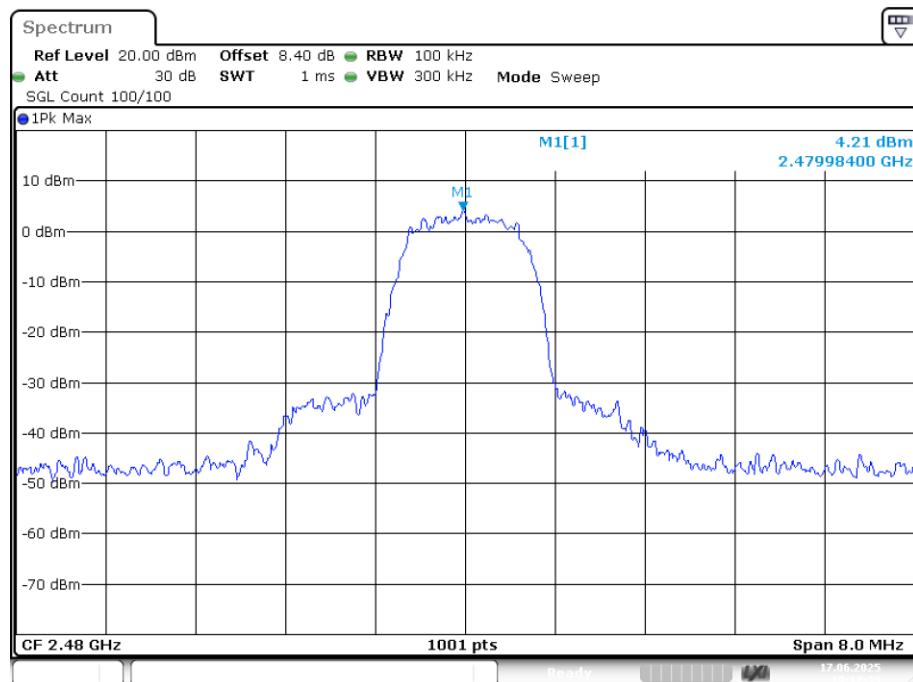


Date: 17.JUN.2025 19:17:32

### Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

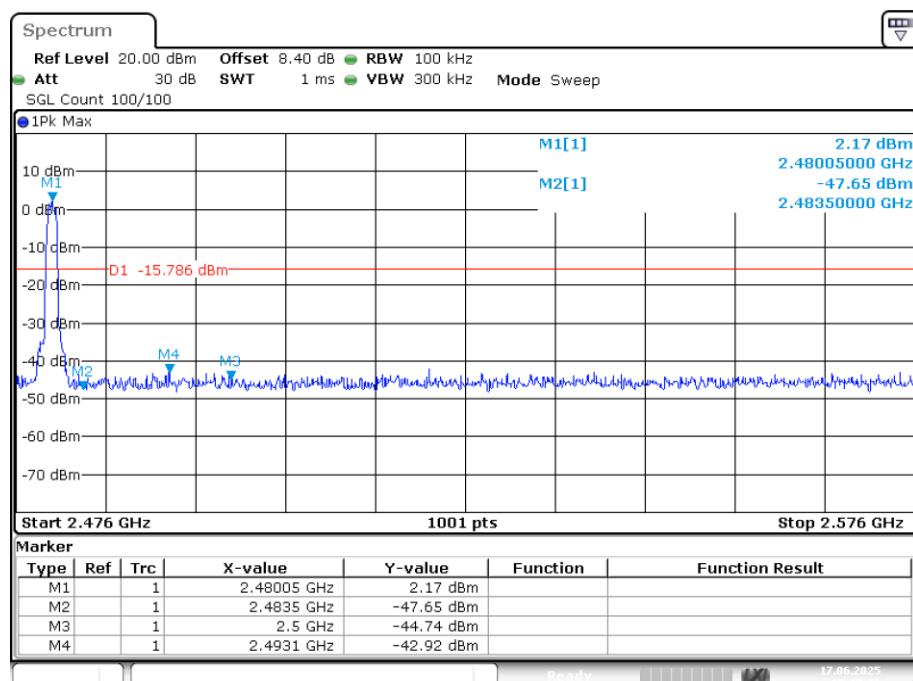


Date: 17.JUN.2025 19:17:36

## Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

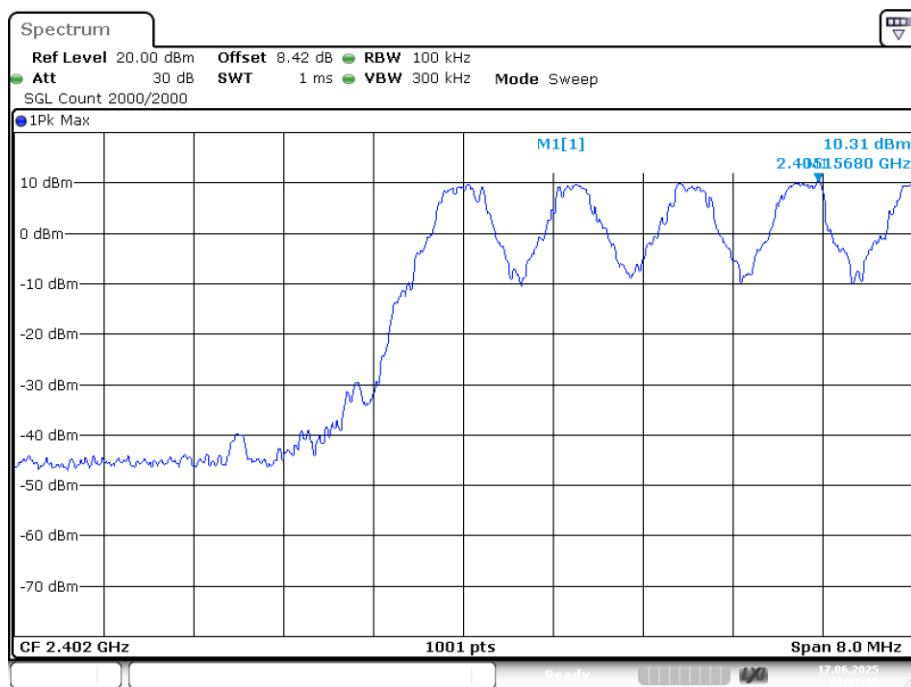


Date: 17.JUN.2025 18:17:17

## Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

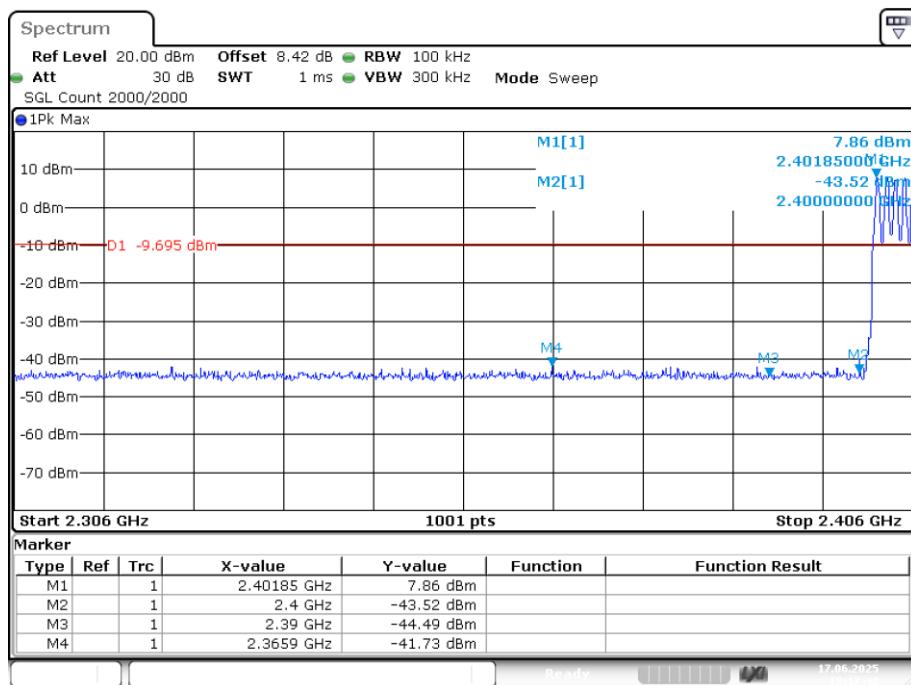


Date: 17.JUN.2025 18:17:42

## Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

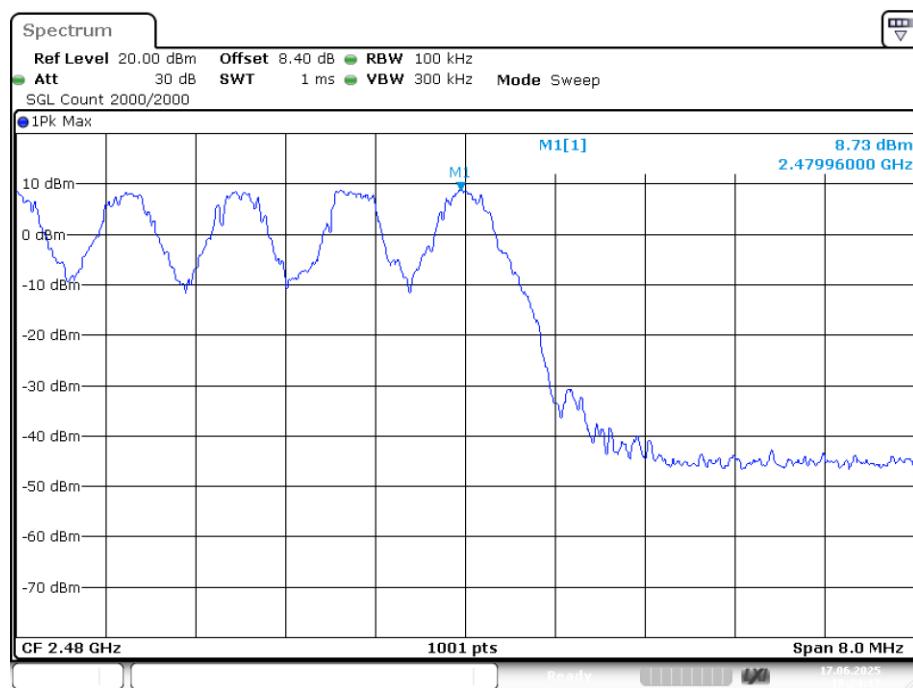


Date: 17.JUN.2025 18:24:17

### Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

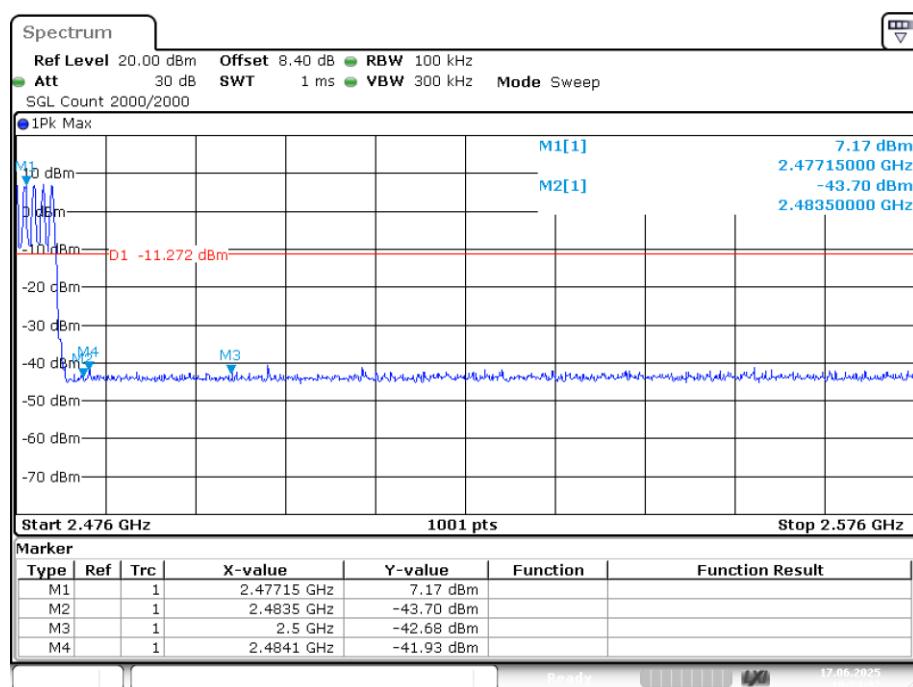


Date: 17.JUN.2025 18:24:32

### Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

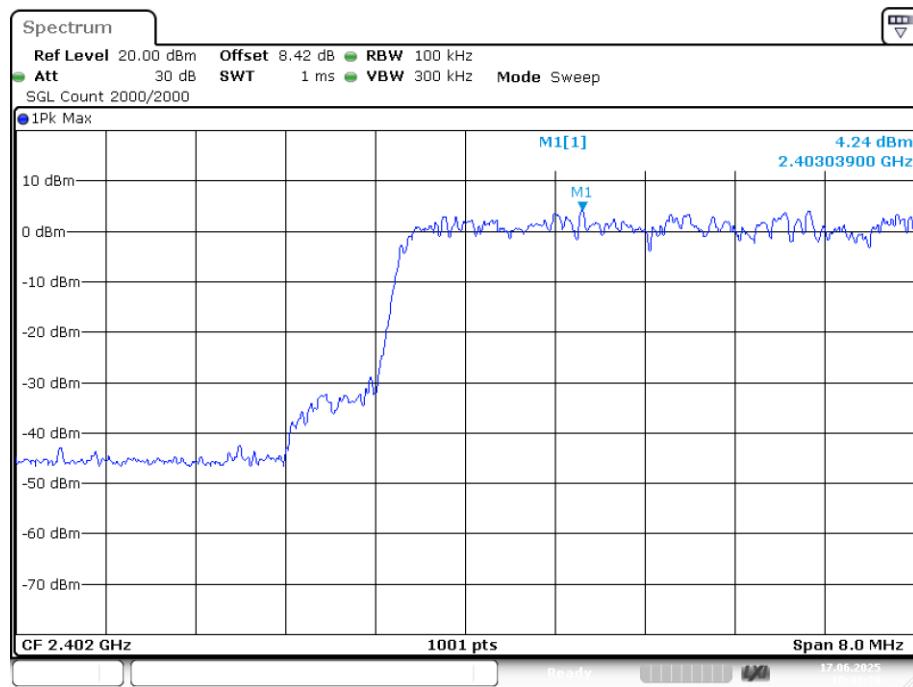


Date: 17.JUN.2025 18:43:39

### Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

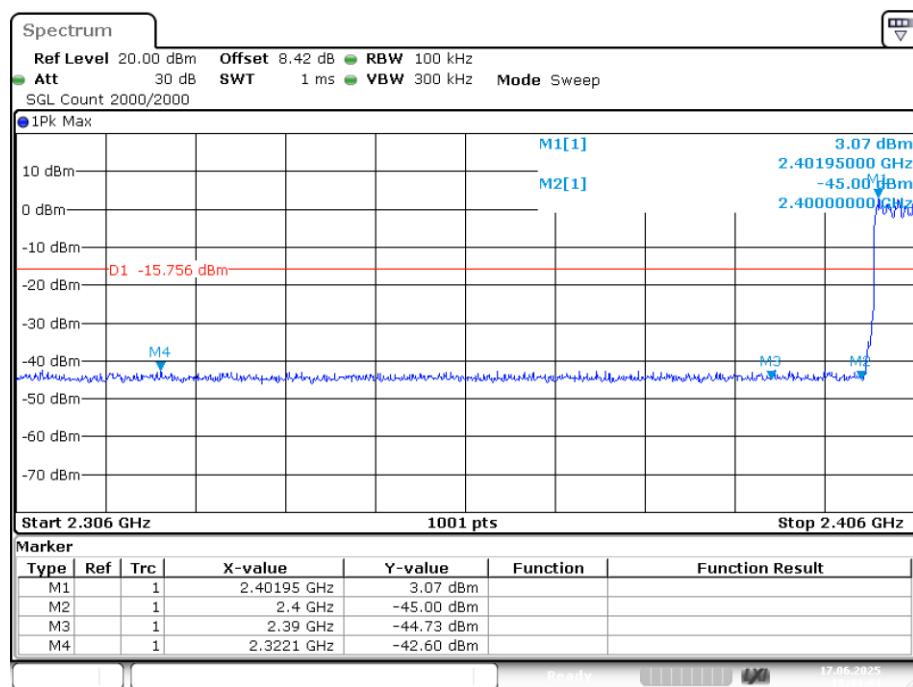


Date: 17.JUN.2025 18:44:04

### Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

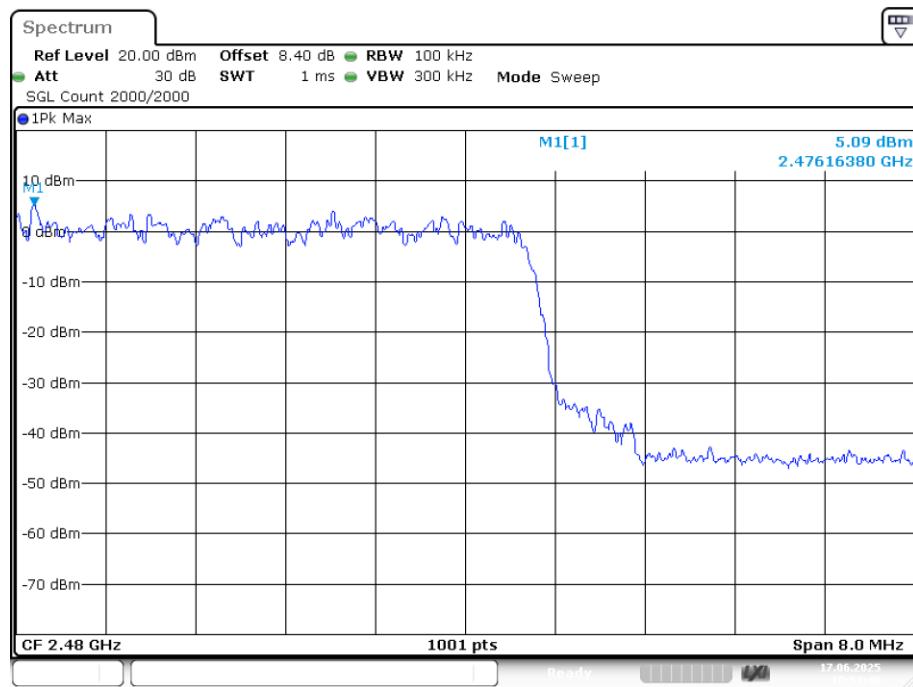


Date: 17.JUN.2025 18:53:40

### Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

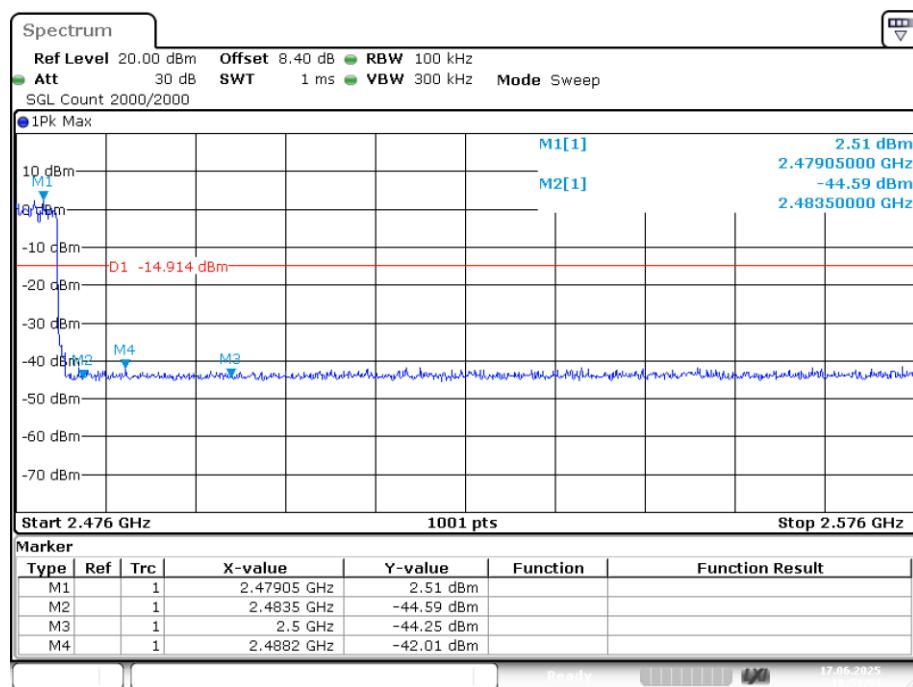


Date: 17.JUN.2025 18:53:55

### Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

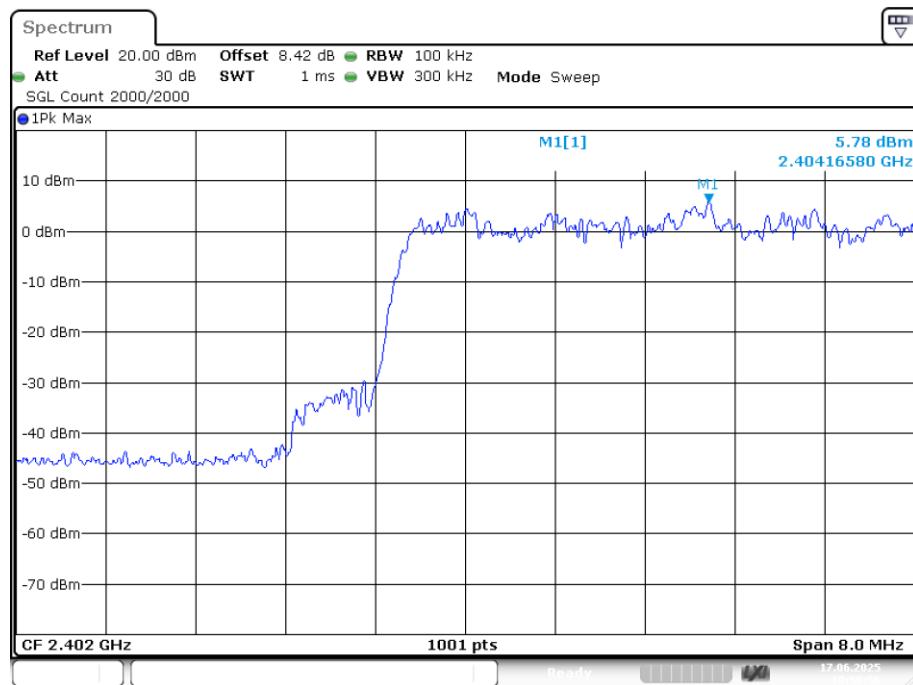


Date: 17.JUN.2025 19:50:56

### Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

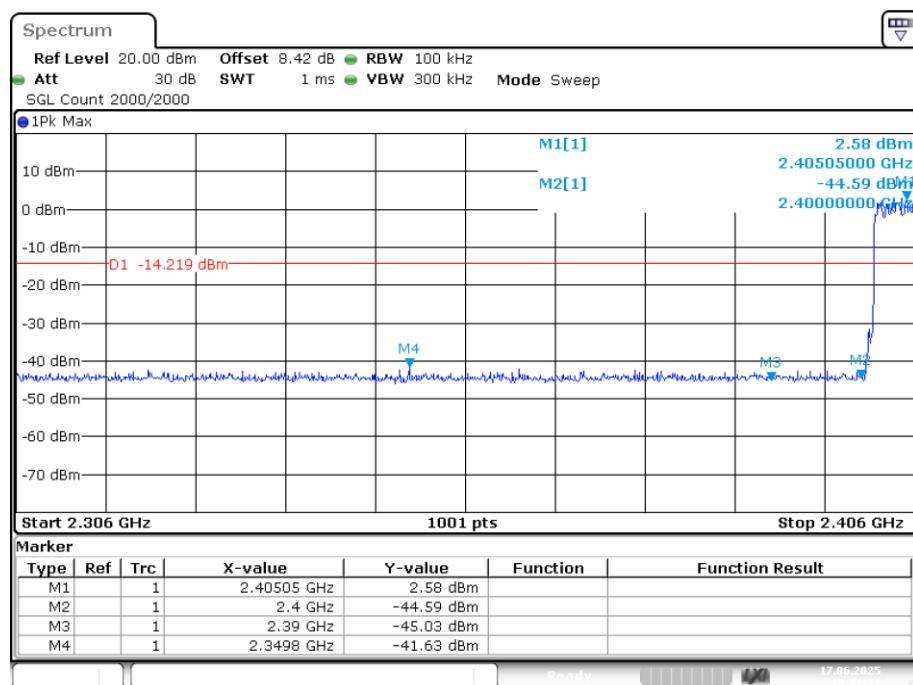


Date: 17.JUN.2025 19:51:21

### Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

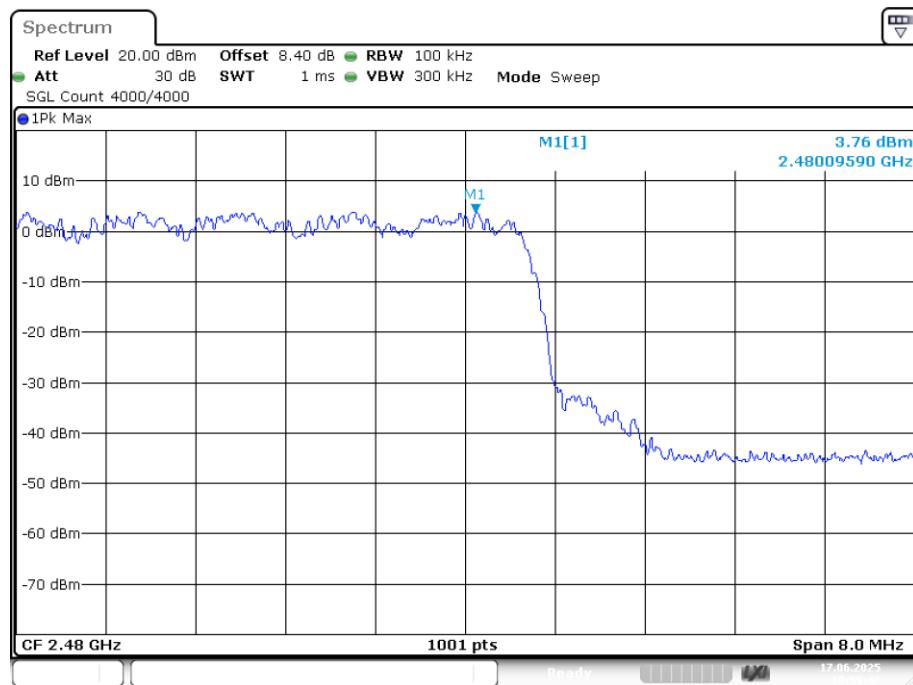

Date: 17.JUN.2025 19:59:47


### Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

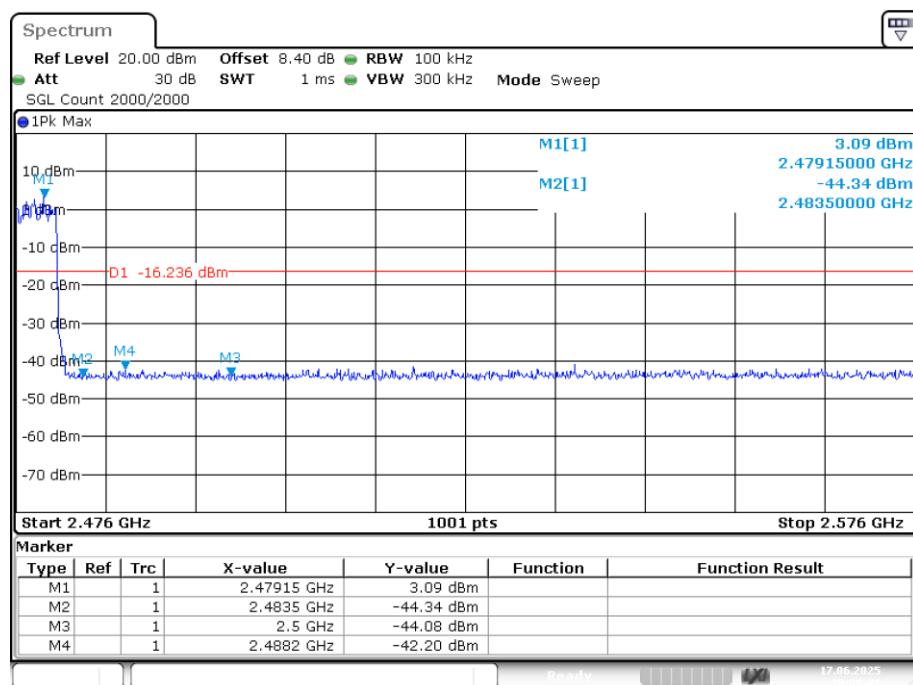

Date: 17.JUN.2025 20:00:02

## 12. POWER LINE CONDUCTED EMISSIONS

### 12.1. Block Diagram of Test Setup

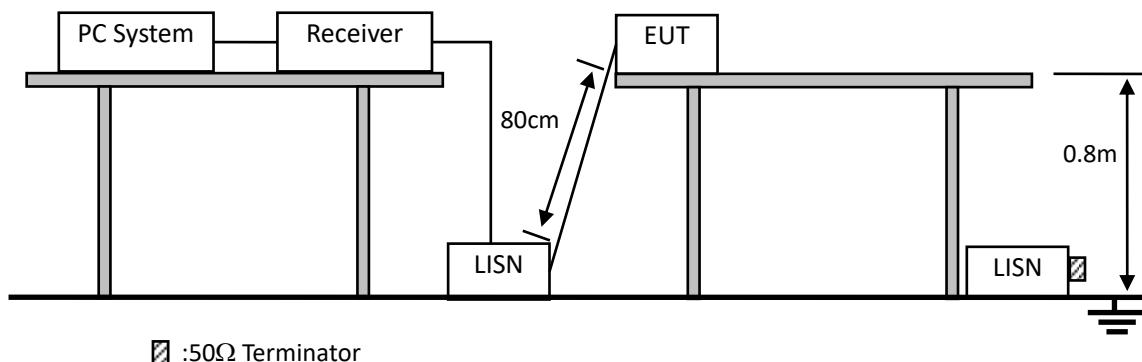

### 12.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 12.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 12.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

## Line:

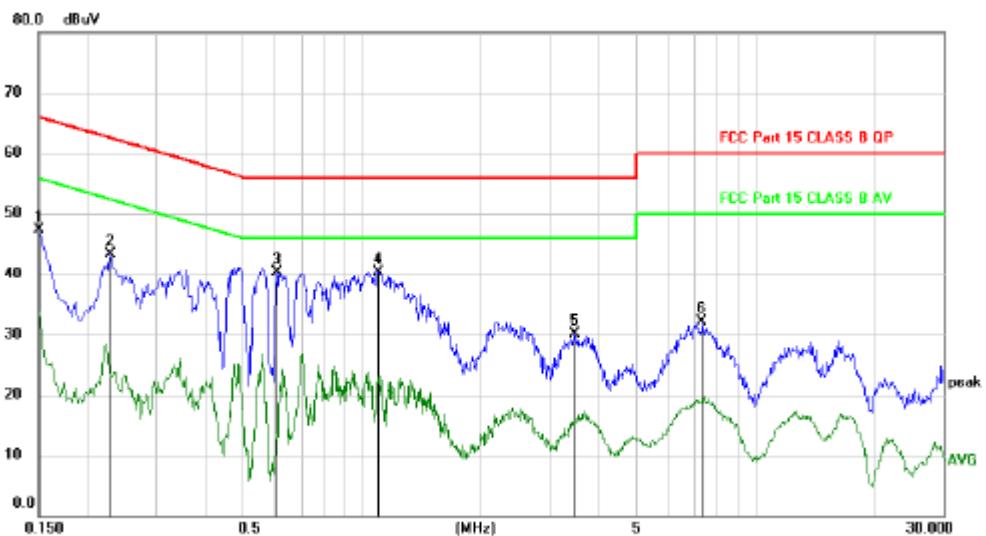


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	47.18	0.14	47.32	66.00	-18.68	peak		
2	0.2280	43.06	0.15	43.21	62.52	-19.31	peak		
3 *	0.6060	40.21	0.12	40.33	56.00	-15.67	peak		
4	1.0950	40.10	0.12	40.22	56.00	-15.78	peak		
5	3.4620	29.93	0.21	30.14	56.00	-25.86	peak		
6	7.3050	31.81	0.33	32.14	60.00	-27.86	peak		

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

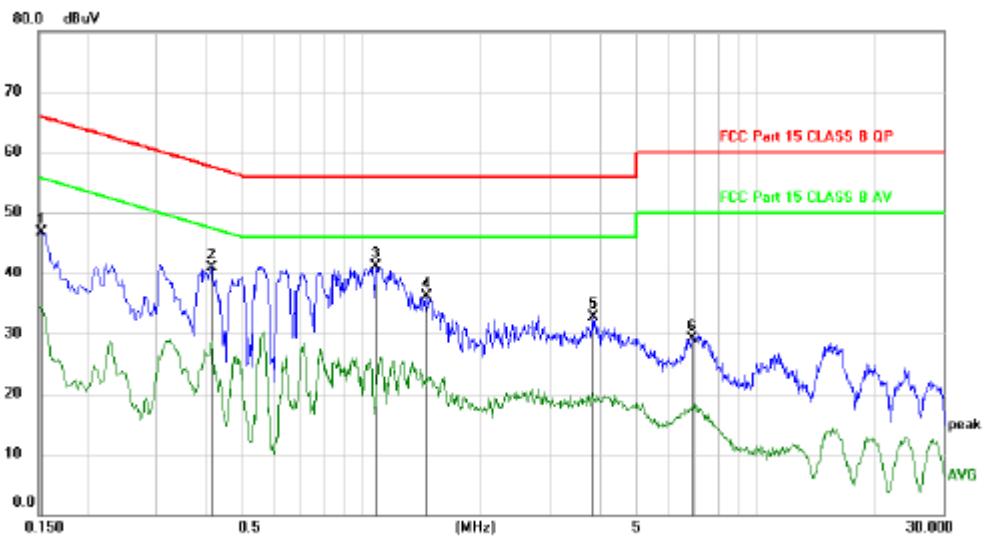**Neutral:**

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1530	46.61	0.14	46.75	65.84	-19.09	peak		
2	0.4140	40.85	0.14	40.99	57.57	-16.58	peak		
3	*	1.0830	40.96	0.12	41.08	56.00	-14.92	peak	
4	1.4580	35.97	0.14	36.11	56.00	-19.89	peak		
5	3.8580	32.45	0.20	32.65	56.00	-23.35	peak		
6	6.9030	28.77	0.32	29.09	60.00	-30.91	peak		

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz mode with the worst data is listed.

## 13. ANTENNA REQUIREMENTS

### 13.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 13.2. Result

The EUT antenna is Internal Antenna. It complies with the standard requirement.

## 14. TEST SETUP PHOTO

### 14.1. Photo of Radiated Emission Test

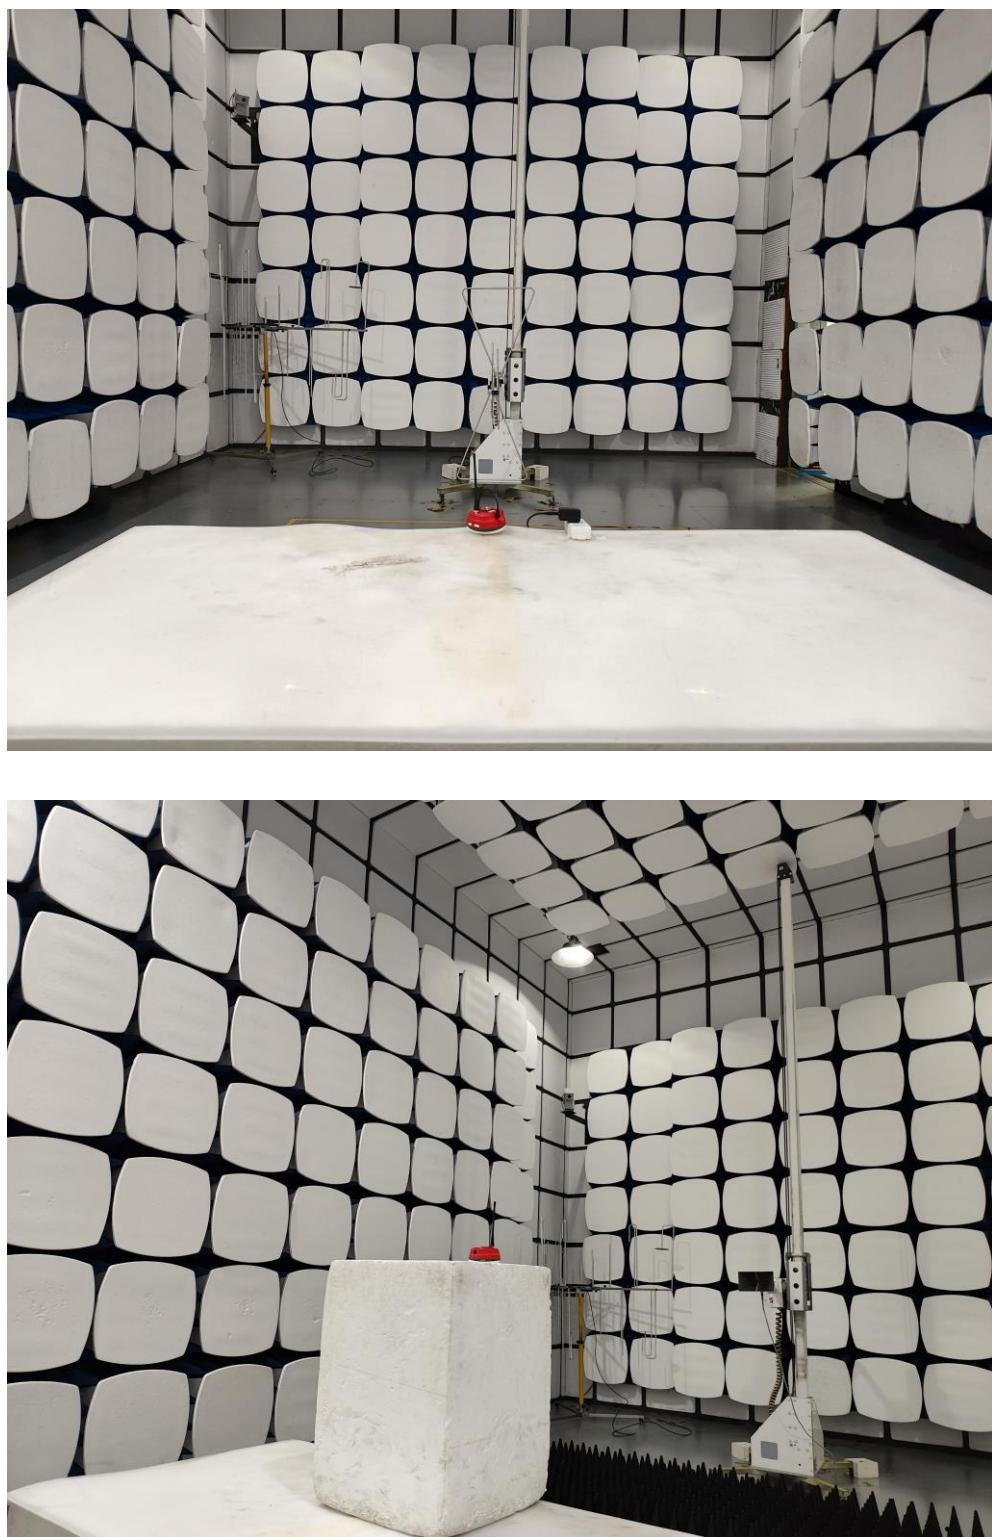

#### 14.2.Photo of Conducted Emission Test



-----END OF REPORT-----