






802.11ax(HE20), Channel No. 1

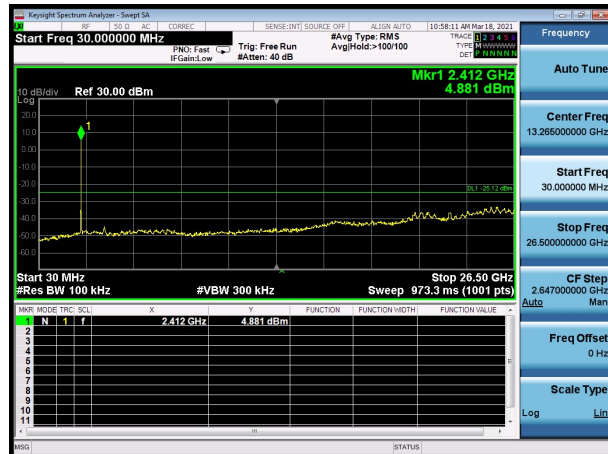


802.11ax(HE40), Channel No. 3

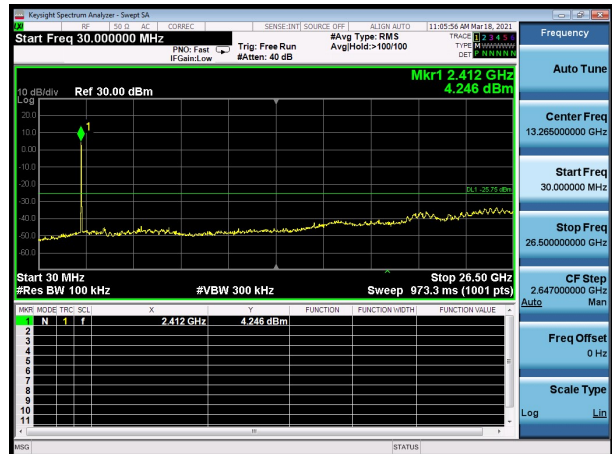


802.11ax(HE20), Channel No. 6

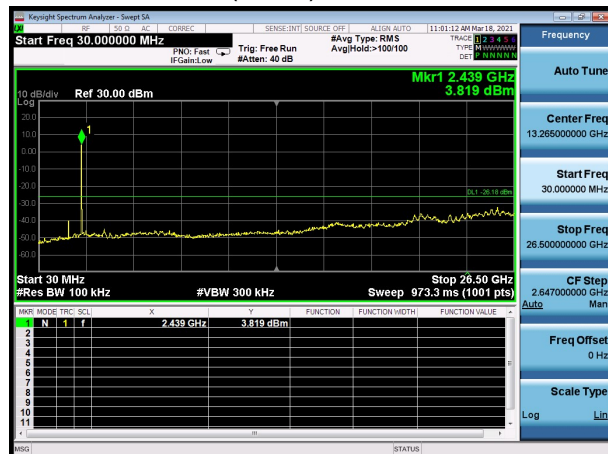


802.11ax(HE40), Channel No. 6

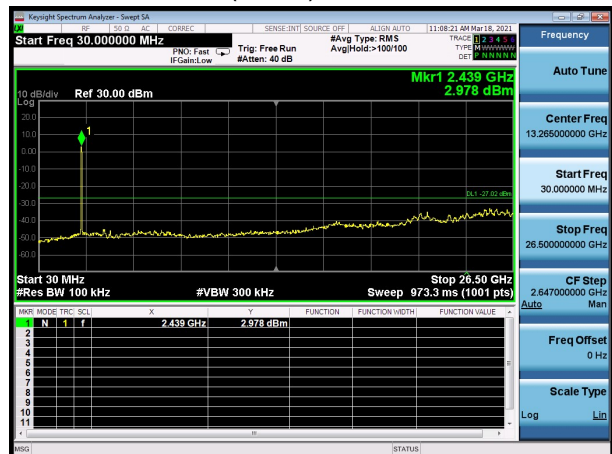

802.11ax(HE20), Channel No. 11

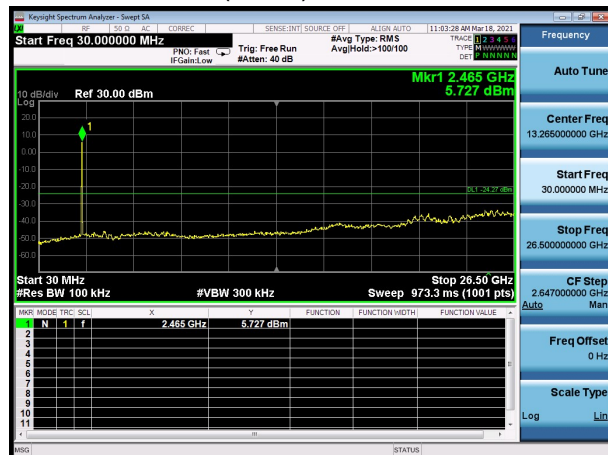


802.11ax(HE40), Channel No. 9

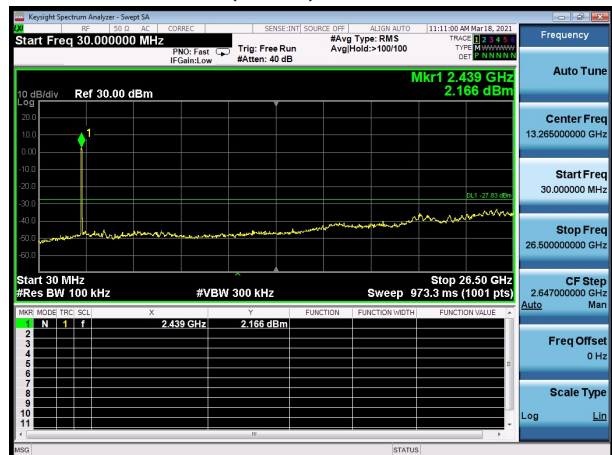





Bluetooth LE (125K), Channel No.: 0

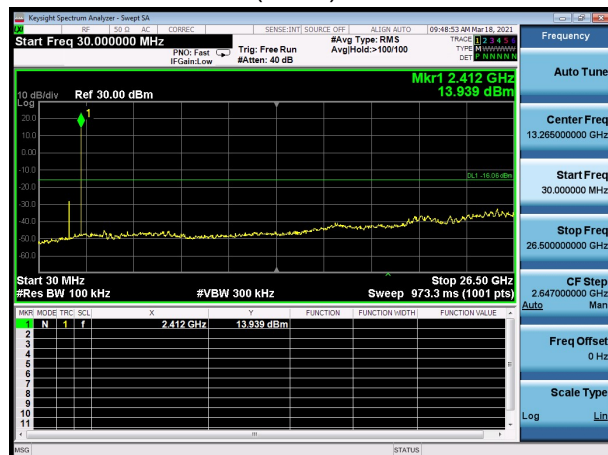

Bluetooth LE (125K), Channel No.: 19

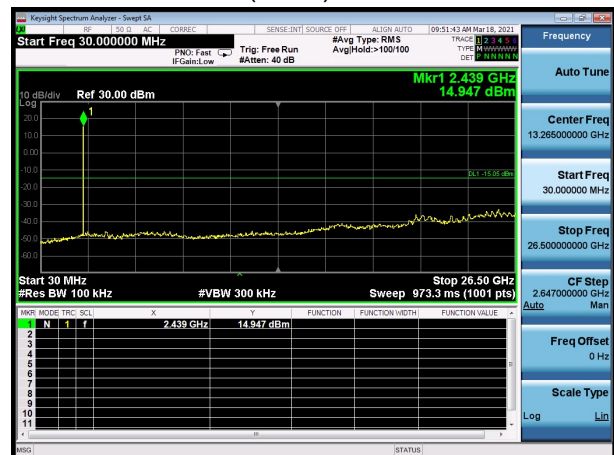


Bluetooth LE (125K), Channel No.: 39

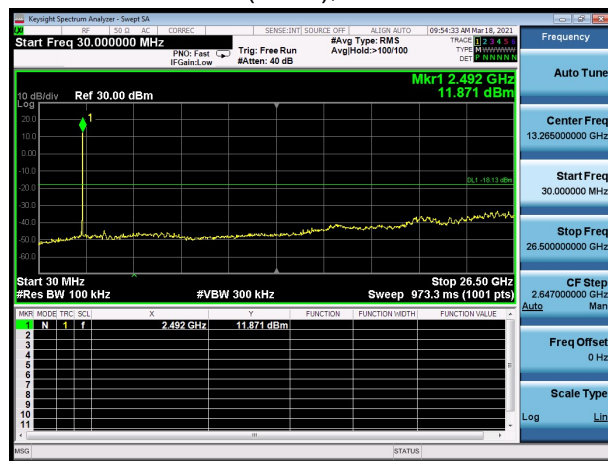





Bluetooth LE (1M), Channel No.: 0

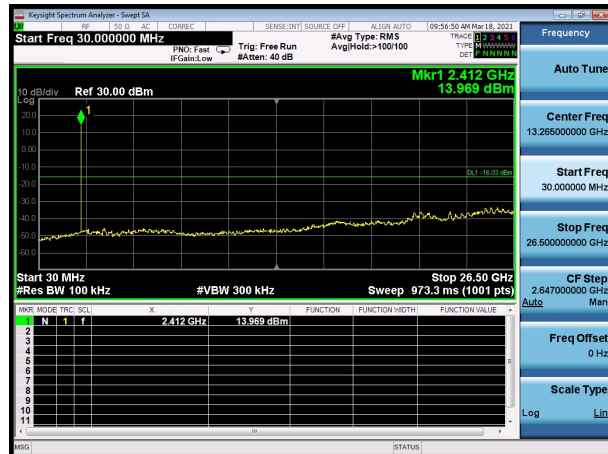


Bluetooth LE (2M), Channel No.: 0

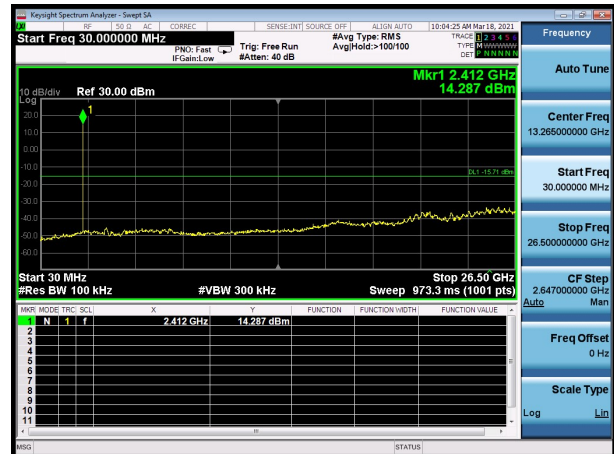


Bluetooth LE (1M), Channel No.: 19

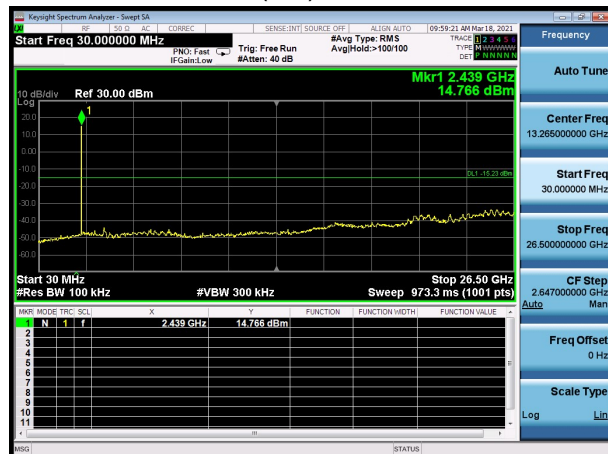


Bluetooth LE (2M), Channel No.: 19

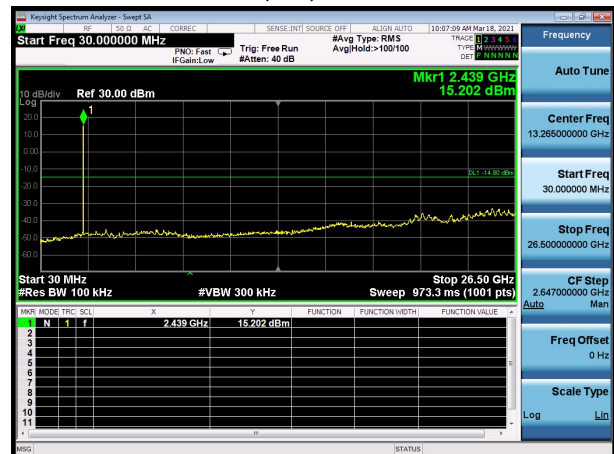

Bluetooth LE (1M), Channel No.: 39

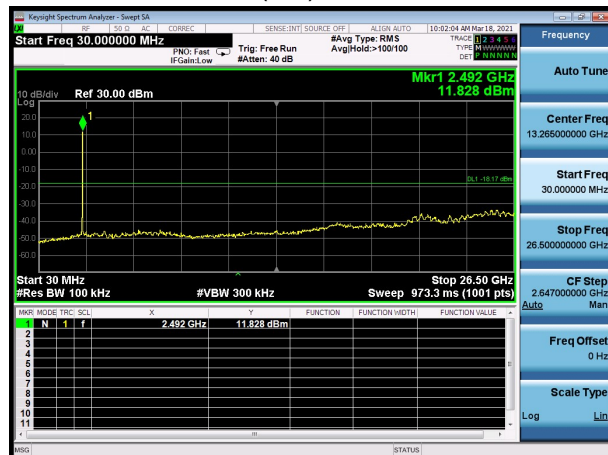

Bluetooth LE (2M), Channel No.: 39

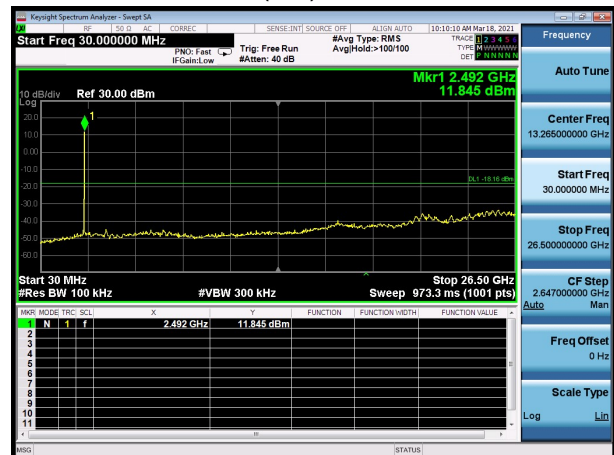

5.6. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

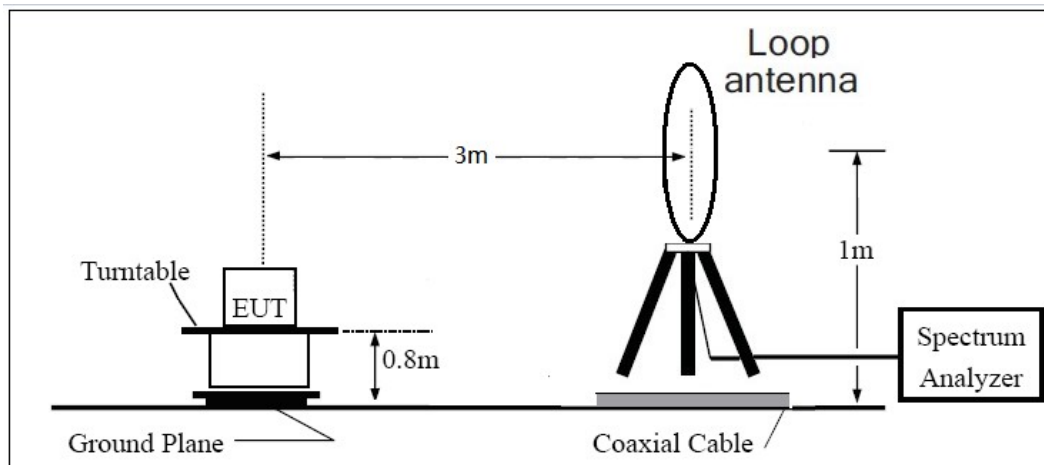

30MHz ~ 1GHz

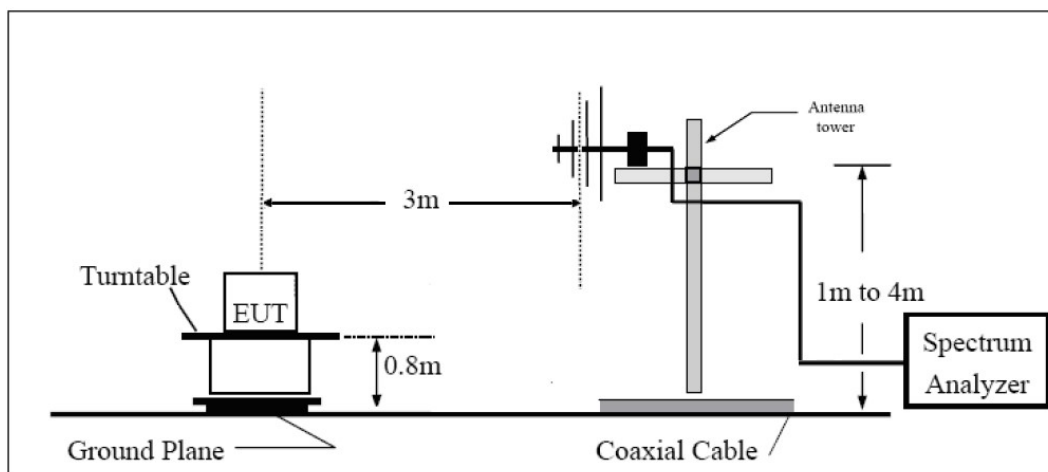

Above 1GHz

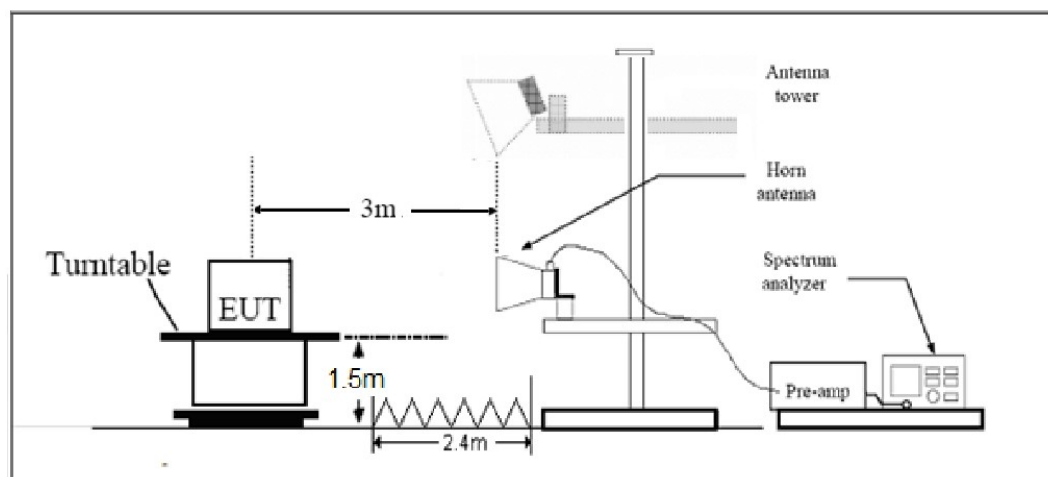

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that "In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))."

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB




Test Results:

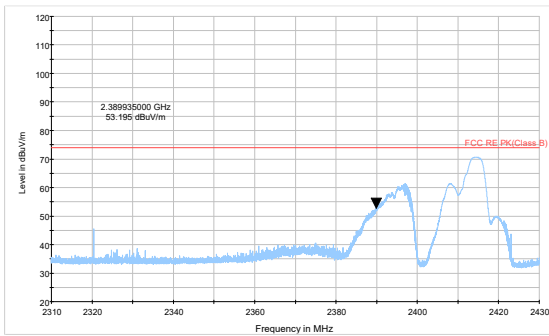


802.11b-Channel 1 Peak

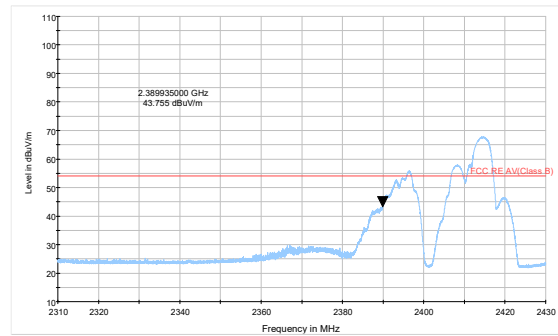


802.11b-Channel 1 Average

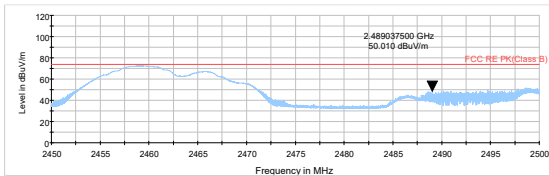


802.11b-Channel 11 Average

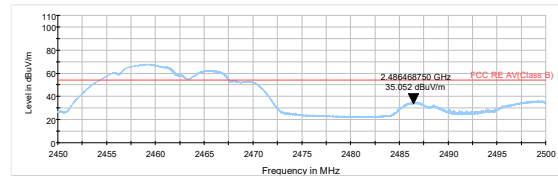


802.11b-Channel 11 Average

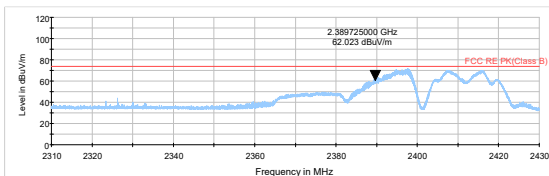


802.11g-Channel 1 Average

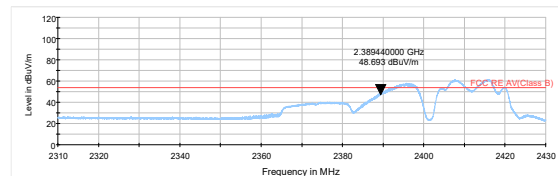


802.11g-Channel 1 Average

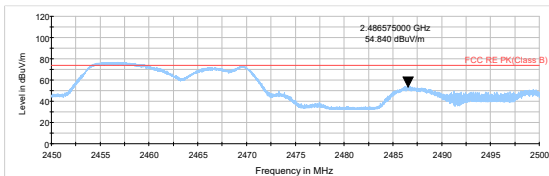


802.11g-Channel 11 Average

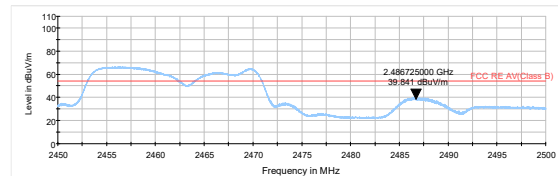


802.11g-Channel 11 Average

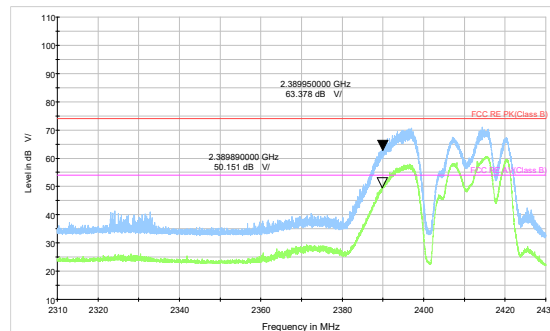


802.11n HT20 -Channel 1 Peak+ Average

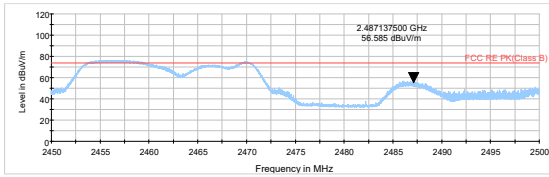


802.11n HT20 -Channel 11 Peak

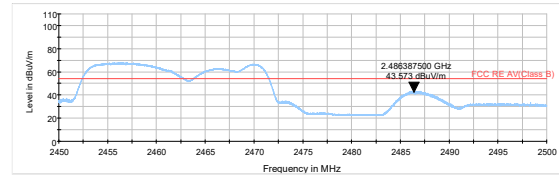


802.11n HT20 -Channel 11 Average

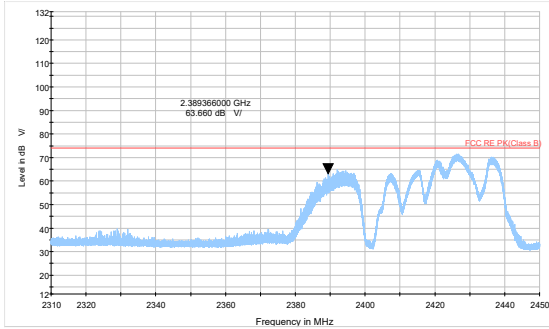


802.11n HT40 -Channel 3 Peak

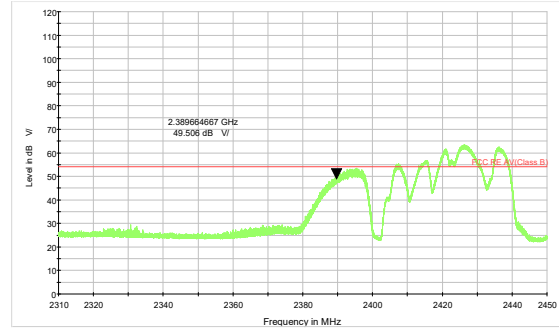

802.11n HT40 -Channel 3 Average

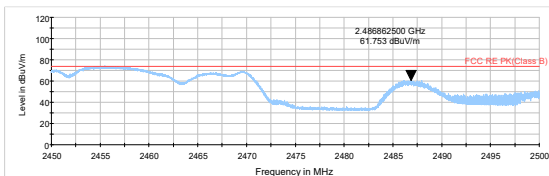


802.11n HT40 -Channel 9 Peak

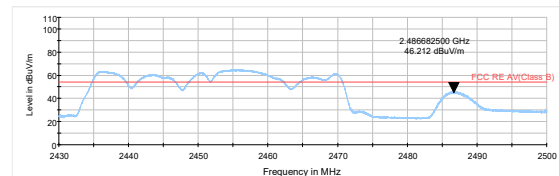


802.11n HT40 -Channel 9 Average

During the test, the preliminary test was performed in both data rate for BLE, 2Mbps was selected as the worst case. The test data of the worst-case condition was recorded in this report

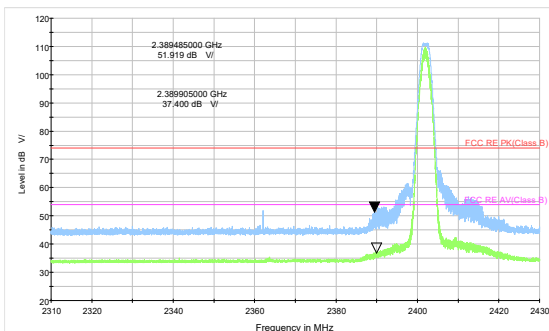

Bluetooth LE (2M) Channel 0 Peak & Average

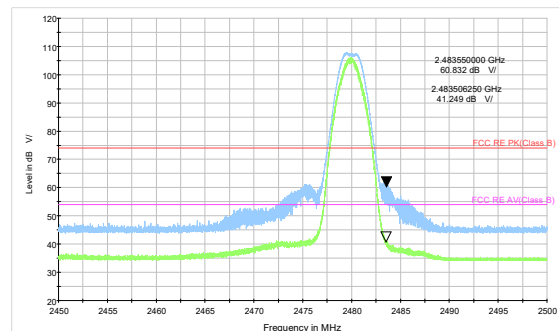

Bluetooth LE (2M) Channel 39 Peak & Average

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz are more than 20dB below the limit are not reported.


The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

After the pretest, MIMO was selected as the worst antenna.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11ax (HE20) CH6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A font (Level in dB μ V/) in the test plot =(level in dB μ V/m)

Continuous TX mode:

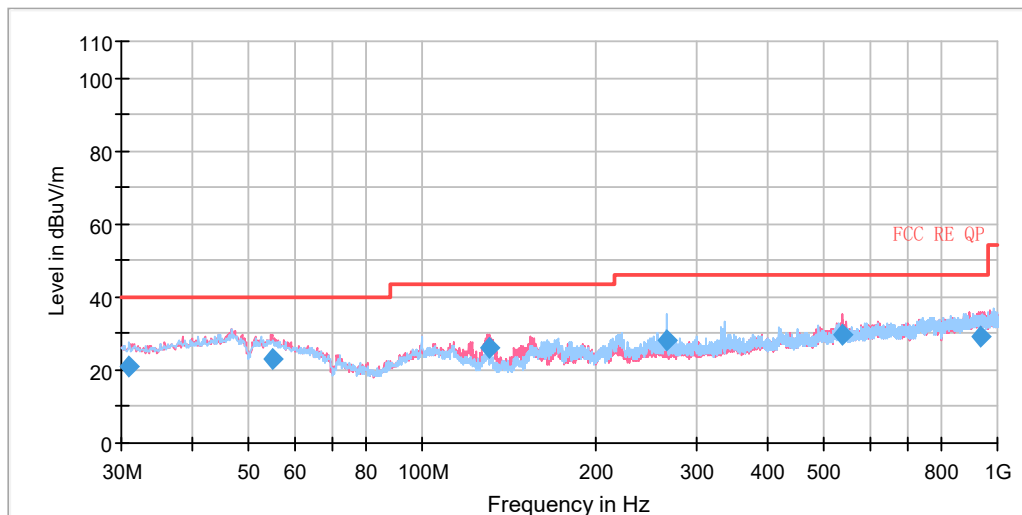


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.963750	20.76	125.0	H	123.0	-0.9	19.24	40.00
54.856250	22.85	225.0	V	128.0	-1.8	17.15	40.00
130.390000	25.87	100.0	V	198.0	-9.0	17.63	43.50
266.068750	28.05	100.0	H	234.0	-5.1	17.95	46.00
536.096250	29.68	100.0	V	194.0	0.3	16.32	46.00
931.780000	29.01	225.0	V	1.0	5.1	16.99	46.00


Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

802.11b CH1

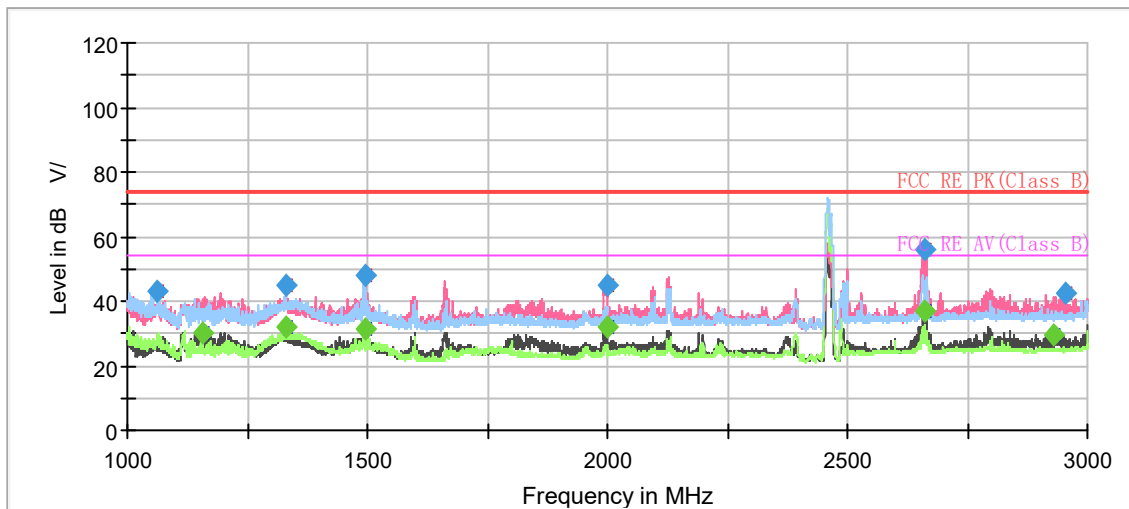

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

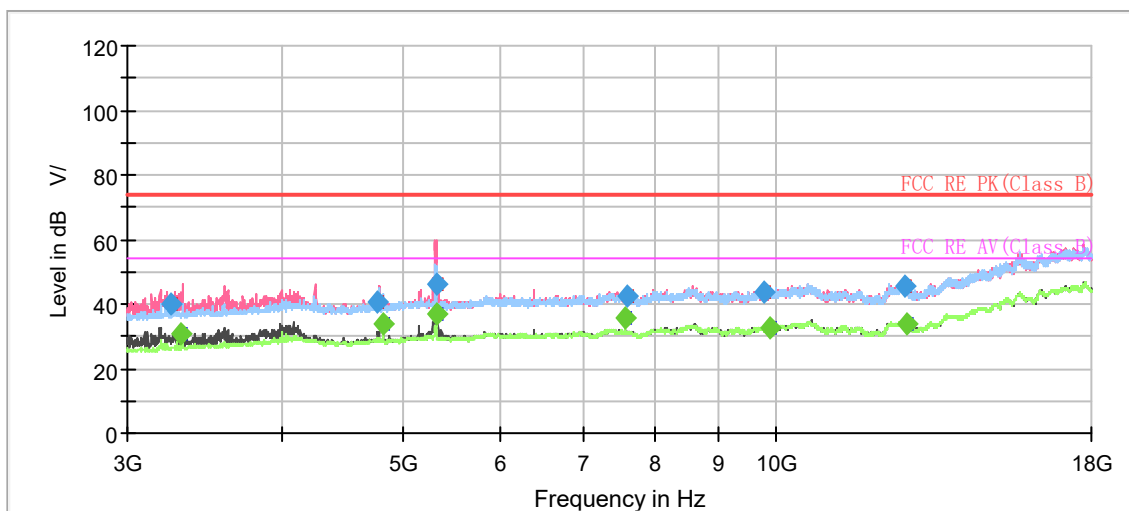


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarizat ion	Azimuth (deg)	Correct Factor (dB)
1118.250000	43.83	---	74.00	30.17	200.0	V	303.0	-18.2
1118.750000	---	33.65	54.00	20.35	100.0	V	305.0	-18.2
1328.750000	46.62	---	74.00	27.38	200.0	V	238.0	-17.1
1352.250000	---	30.93	54.00	23.07	200.0	H	172.0	-17.0
1494.000000	46.65	---	74.00	27.35	200.0	V	303.0	-16.2
1496.250000	---	31.23	54.00	22.77	200.0	V	282.0	-16.2
1659.750000	---	28.06	54.00	25.94	200.0	V	119.0	-15.2
1672.250000	39.25	---	74.00	34.75	100.0	V	249.0	-15.1
1992.750000	45.27	---	74.00	28.73	100.0	V	316.0	-13.4
1998.250000	---	31.23	54.00	22.77	200.0	V	119.0	-13.4
2655.250000	55.76	---	74.00	18.24	100.0	V	221.0	-10.7
2663.000000	---	36.12	54.00	17.88	100.0	V	260.0	-10.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH6

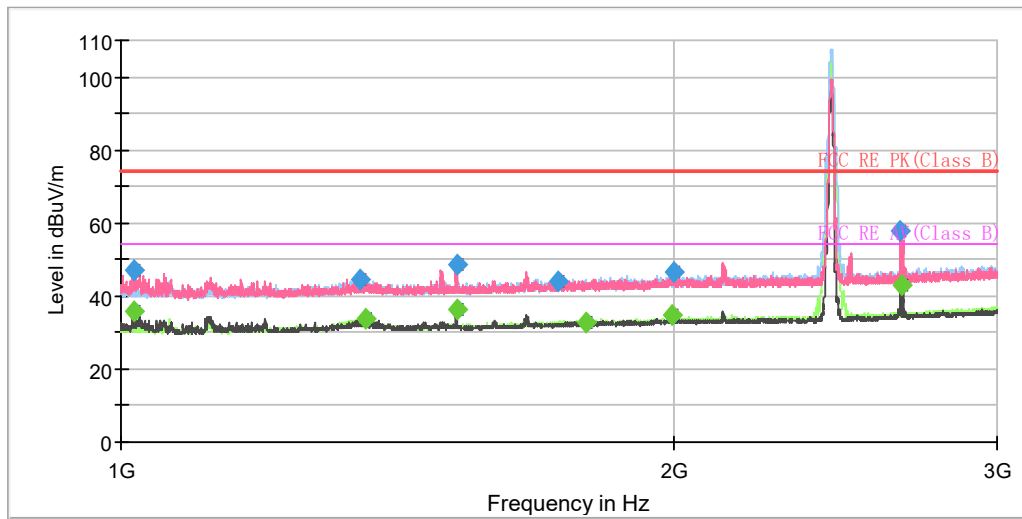

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

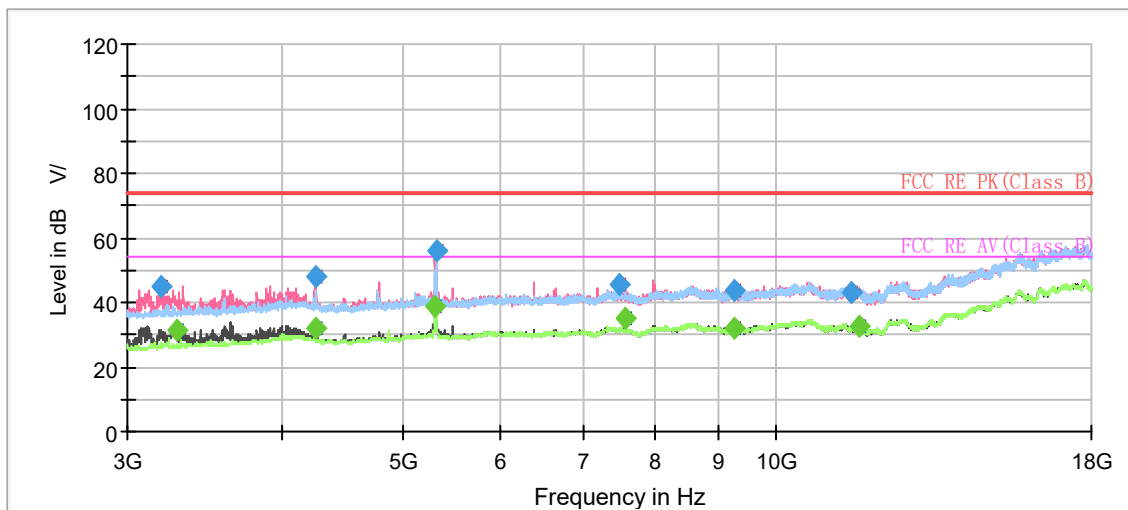


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1016.750000	47.06	---	74.00	26.94	200.0	V	293.0	-8.8
1017.250000	---	35.91	54.00	18.09	200.0	V	293.0	-8.8
1349.500000	44.66	---	74.00	29.34	200.0	H	170.0	-7.0
1359.000000	---	33.53	54.00	20.47	100.0	H	199.0	-6.9
1523.250000	---	36.18	54.00	17.83	100.0	V	343.0	-6.0
1523.250000	48.72	---	74.00	25.28	100.0	V	343.0	-6.0
1731.500000	43.80	---	74.00	30.20	200.0	V	192.0	-4.9
1791.500000	---	32.58	54.00	21.42	200.0	H	22.0	-4.5
1996.000000	---	34.73	54.00	19.27	100.0	V	263.0	-3.4
1998.500000	46.73	---	74.00	27.27	200.0	V	209.0	-3.4
2656.250000	57.81	---	74.00	16.19	100.0	V	263.0	-0.7
2659.500000	---	42.76	54.00	11.24	100.0	V	263.0	-0.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH11

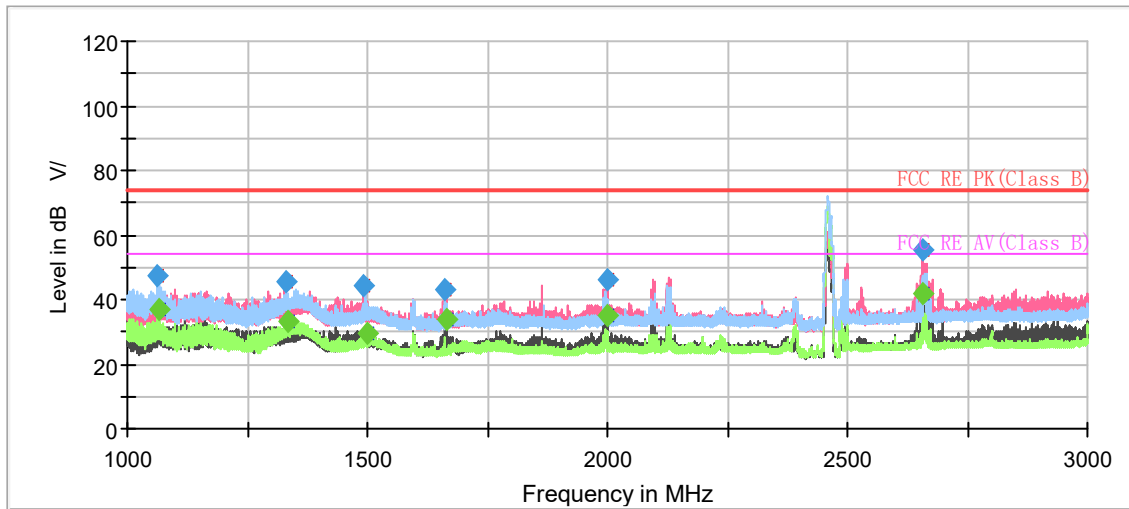

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

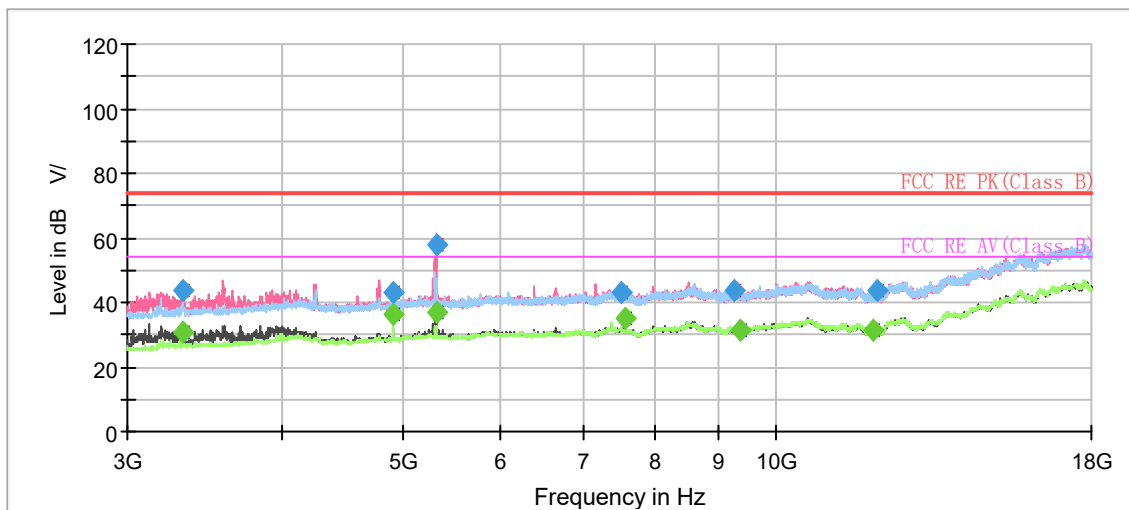


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1063.200000	47.21	---	74.00	26.79	100.0	H	329.0	-18.0
1066.133333	---	36.85	54.00	17.15	100.0	H	33.0	-18.0
1329.733333	45.71	---	74.00	28.29	200.0	H	331.0	-16.6
1332.733333	---	33.49	54.00	20.51	200.0	H	357.0	-16.6
1493.466667	44.31	---	74.00	29.69	200.0	V	36.0	-15.6
1499.133333	---	29.82	54.00	24.18	200.0	V	36.0	-15.6
1661.466667	42.80	---	74.00	31.20	200.0	V	311.0	-14.7
1665.533333	---	33.82	54.00	20.18	200.0	V	330.0	-14.7
1999.466667	---	34.88	54.00	19.12	100.0	V	336.0	-12.7
1999.733333	45.92	---	74.00	28.08	200.0	V	105.0	-12.7
2656.400000	55.09	---	74.00	18.91	100.0	V	287.0	-9.6
2656.400000	---	41.81	54.00	12.19	100.0	V	287.0	-9.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH1

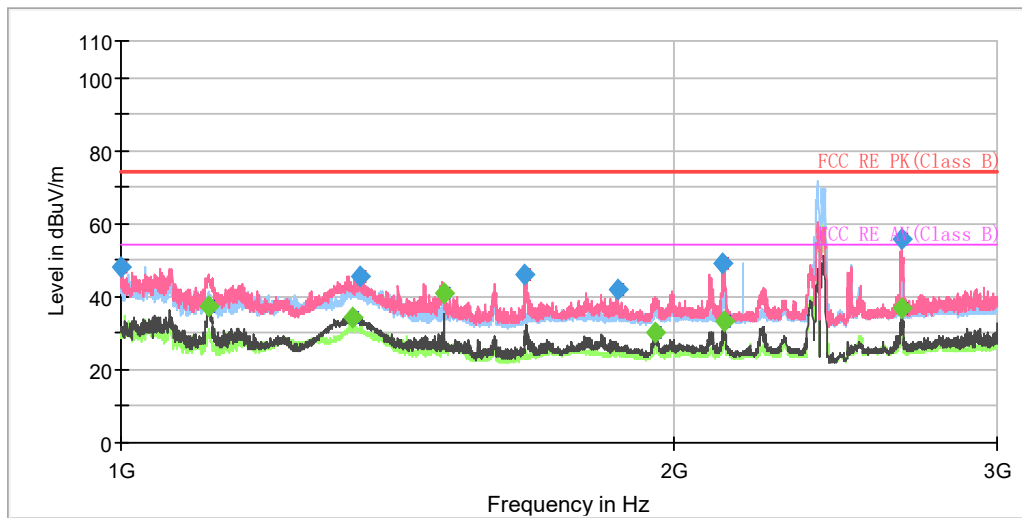

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

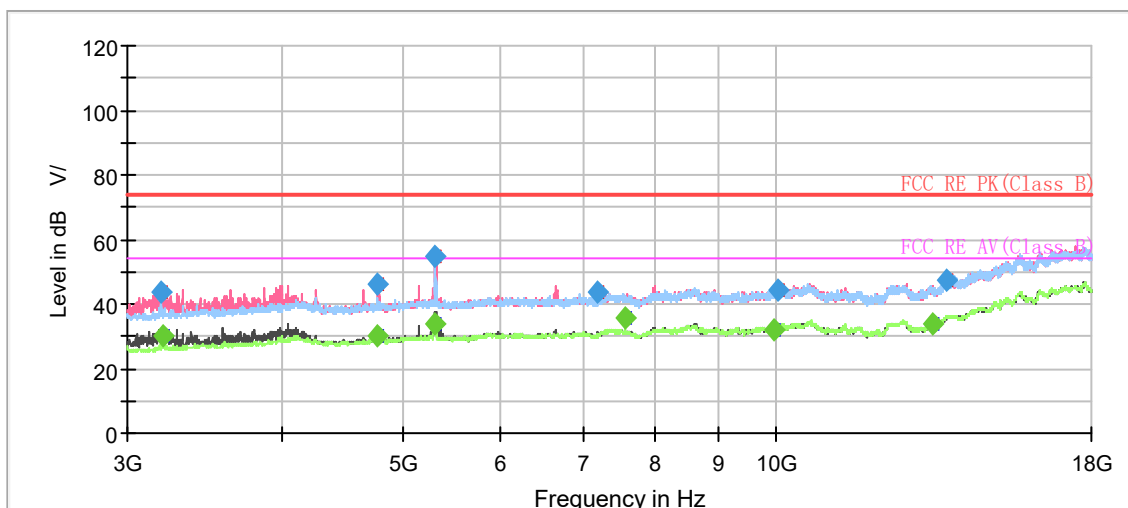


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarizat ion	Azimuth (deg)	Correct Factor (dB)
1000.000000	48.19	---	74.00	25.81	200.0	V	309.0	-18.9
1116.250000	---	37.37	54.00	16.63	200.0	V	303.0	-18.3
1337.500000	---	34.37	54.00	19.63	200.0	V	298.0	-17.0
1349.750000	45.55	---	74.00	28.45	200.0	V	309.0	-17.0
1500.000000	---	41.15	54.00	12.85	200.0	H	225.0	-16.2
1659.250000	45.86	---	74.00	28.14	200.0	V	0.0	-15.2
1866.250000	42.01	---	74.00	31.99	200.0	V	350.0	-14.1
1952.250000	---	30.34	54.00	23.66	200.0	V	292.0	-13.6
2125.000000	49.07	---	74.00	24.93	100.0	V	177.0	-12.9
2130.750000	---	33.04	54.00	20.96	100.0	V	194.0	-12.8
2664.000000	---	36.91	54.00	17.09	100.0	V	265.0	-10.7
2664.000000	55.92	---	74.00	18.08	100.0	V	265.0	-10.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH6

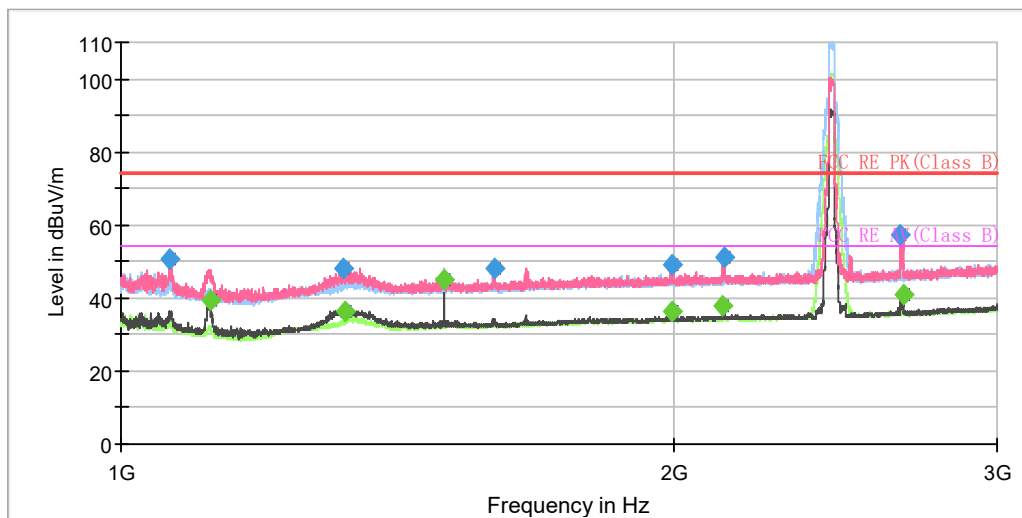

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

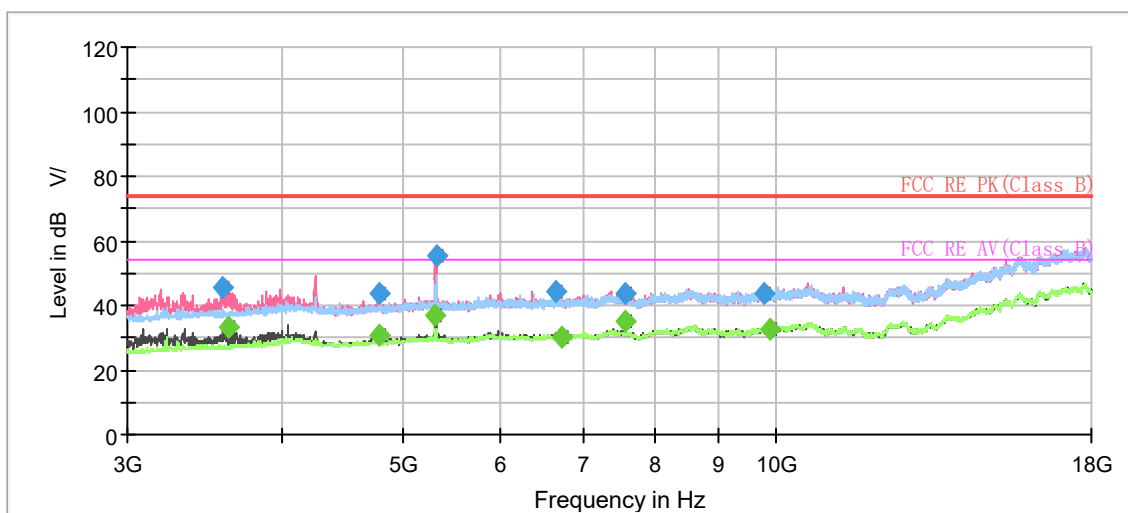


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1063.750000	50.63	---	74.00	23.37	200.0	V	292.0	-8.5
1118.500000	---	39.41	54.00	14.59	200.0	V	304.0	-8.2
1321.250000	48.28	---	74.00	25.72	200.0	V	304.0	-7.1
1323.750000	---	36.57	54.00	17.43	200.0	V	292.0	-7.1
1499.750000	---	45.07	54.00	8.93	200.0	H	230.0	-6.2
1596.750000	48.33	---	74.00	25.67	200.0	V	330.0	-5.6
1996.000000	---	36.48	54.00	17.52	100.0	V	183.0	-3.4
1996.000000	49.03	---	74.00	24.97	100.0	V	183.0	-3.4
2125.750000	---	37.94	54.00	16.06	100.0	V	189.0	-2.9
2129.750000	51.18	---	74.00	22.82	100.0	V	189.0	-2.8
2656.000000	57.29	---	74.00	16.71	200.0	V	286.0	-0.7
2666.250000	---	40.91	54.00	13.09	100.0	V	324.0	-0.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH11

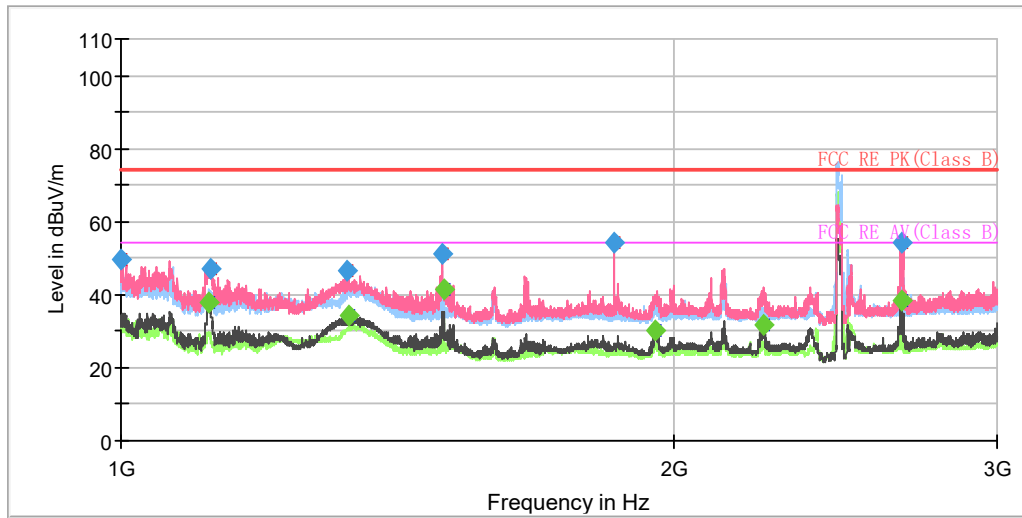

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

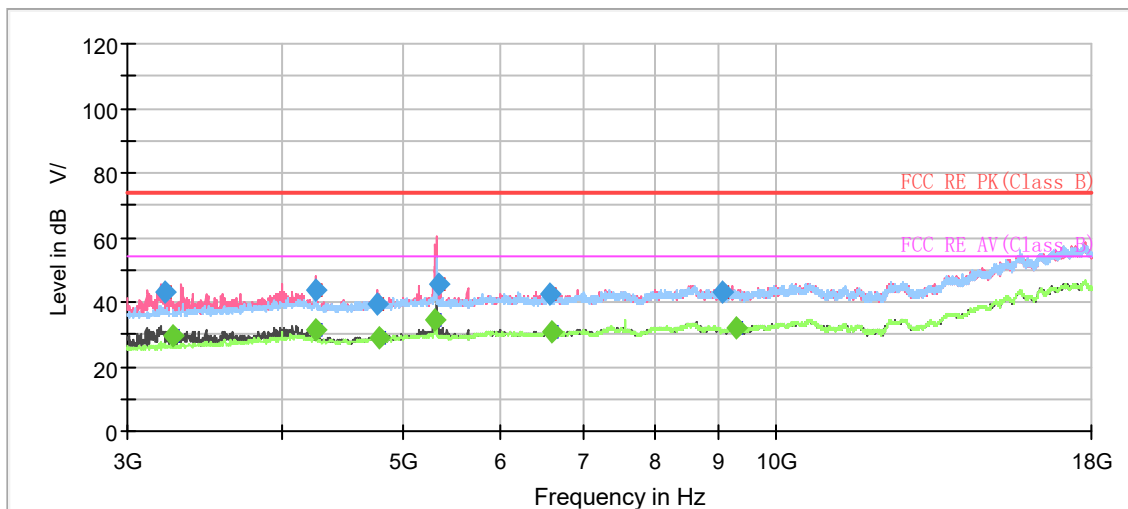


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.500000	49.61	---	74.00	24.39	200.0	V	0.0	-18.9
1117.000000	---	37.88	54.00	16.12	200.0	V	302.0	-18.3
1118.750000	47.03	---	74.00	26.97	200.0	V	302.0	-18.2
1328.000000	46.39	---	74.00	27.61	200.0	V	318.0	-17.1
1330.250000	---	34.36	54.00	19.64	200.0	V	313.0	-17.1
1495.250000	51.12	---	74.00	22.88	200.0	V	340.0	-16.2
1500.000000	---	41.39	54.00	12.61	200.0	H	221.0	-16.2
1855.750000	54.44	---	74.00	19.56	200.0	V	94.0	-14.2
1952.750000	---	30.39	54.00	23.61	200.0	V	290.0	-13.6
2236.500000	---	31.84	54.00	22.16	200.0	V	318.0	-12.5
2664.250000	---	38.21	54.00	15.79	100.0	V	276.0	-10.7
2664.500000	54.28	---	74.00	19.72	100.0	V	276.0	-10.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH1

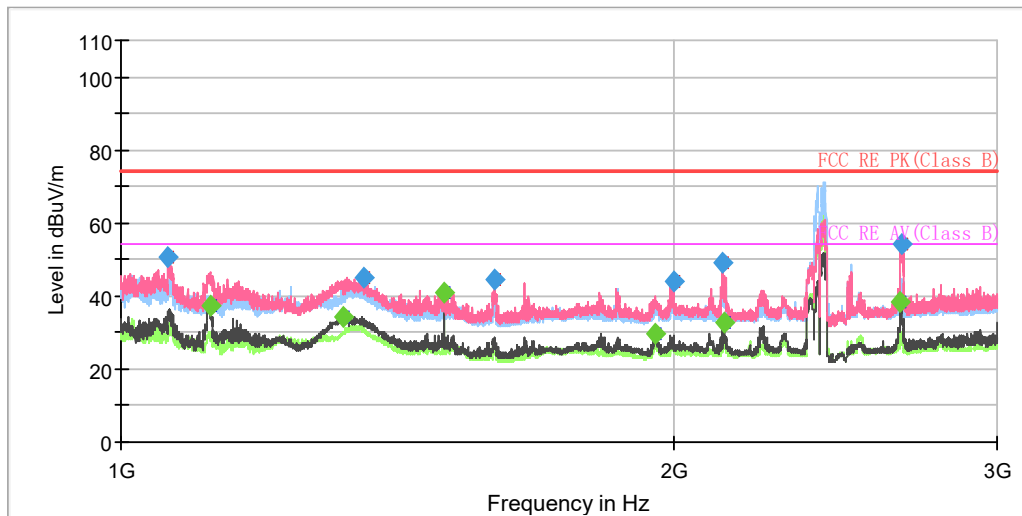

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

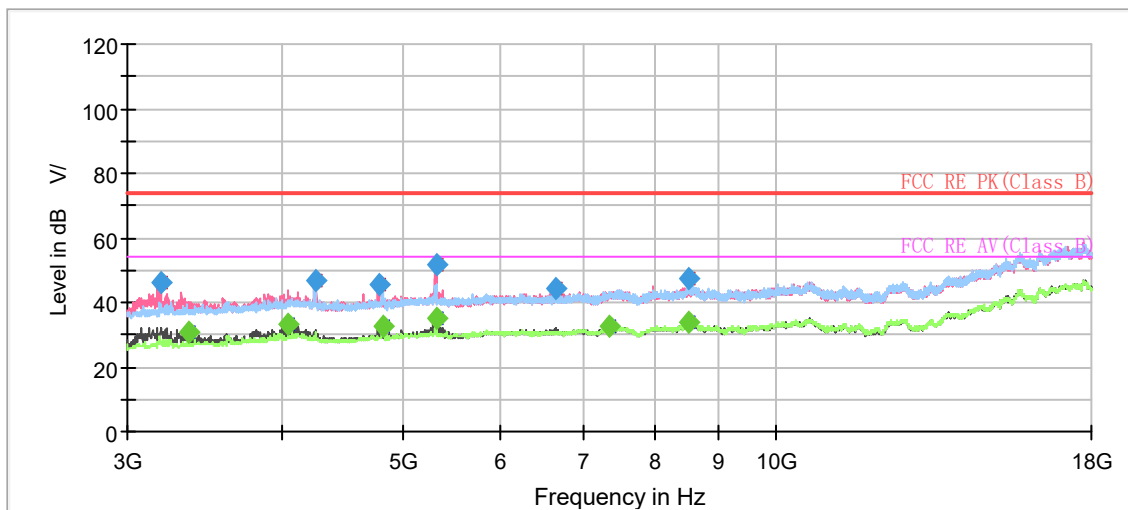


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1061.500000	50.75	---	74.00	23.25	200.0	V	299.0	-18.5
1117.750000	---	37.39	54.00	16.61	200.0	V	305.0	-18.2
1320.250000	---	34.44	54.00	19.56	200.0	V	299.0	-17.1
1355.500000	44.95	---	74.00	29.05	200.0	V	293.0	-16.9
1500.000000	---	41.00	54.00	13.00	200.0	H	223.0	-16.2
1598.500000	44.46	---	74.00	29.54	200.0	V	321.0	-15.6
1953.500000	---	29.58	54.00	24.42	200.0	V	288.0	-13.6
1998.750000	44.21	---	74.00	29.79	200.0	V	210.0	-13.4
2125.250000	48.87	---	74.00	25.13	200.0	V	252.0	-12.9
2130.500000	---	32.87	54.00	21.13	100.0	V	205.0	-12.8
2656.500000	---	38.55	54.00	15.45	100.0	V	216.0	-10.7
2663.750000	54.32	---	74.00	19.68	100.0	V	216.0	-10.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH6

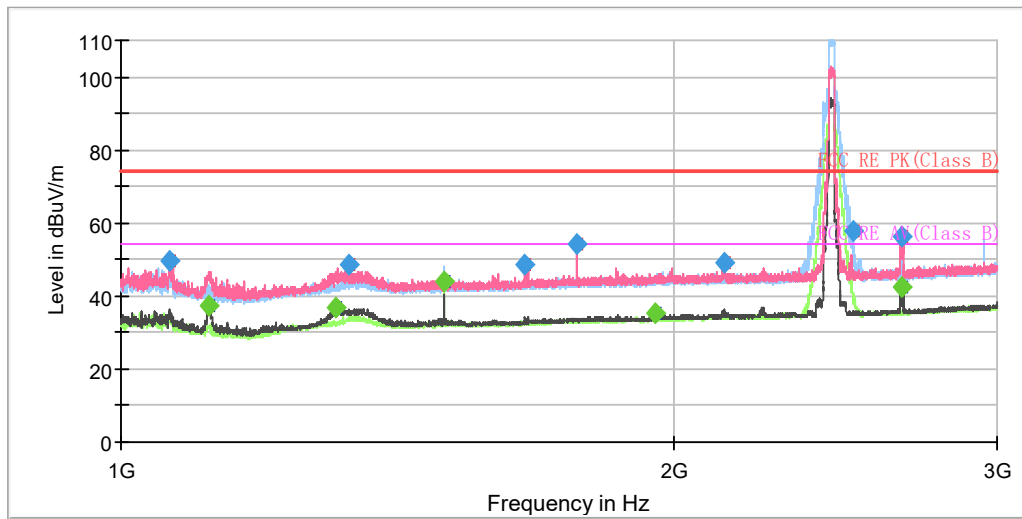

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

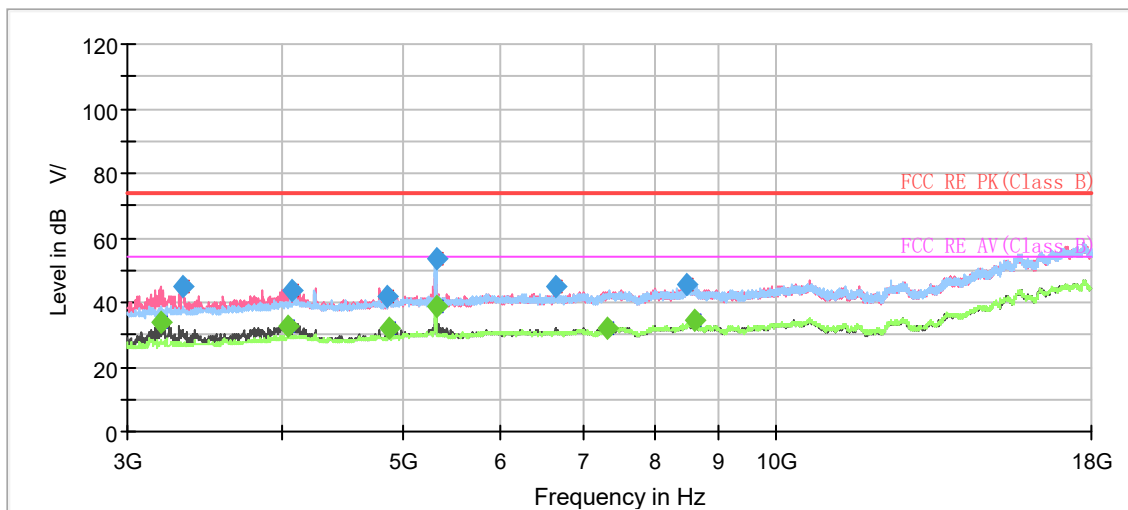


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1063.750000	49.82	---	74.00	24.18	200.0	H	296.0	-8.5
1117.000000	---	37.55	54.00	16.45	200.0	V	295.0	-8.3
1308.000000	---	36.66	54.00	17.34	200.0	V	307.0	-7.2
1331.250000	48.69	---	74.00	25.31	200.0	V	290.0	-7.1
1500.000000	---	43.78	54.00	10.22	200.0	H	230.0	-6.2
1660.500000	48.66	---	74.00	25.34	200.0	V	0.0	-5.2
1770.250000	54.41	---	74.00	19.59	200.0	V	349.0	-4.6
1952.750000	---	35.22	54.00	18.78	200.0	V	295.0	-3.6
2129.750000	49.15	---	74.00	24.85	200.0	V	260.0	-2.8
2502.000000	57.94	---	74.00	16.06	100.0	H	199.0	-1.4
2662.500000	56.53	---	74.00	17.47	100.0	V	218.0	-0.7
2663.000000	---	42.34	54.00	11.66	100.0	V	218.0	-0.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH11

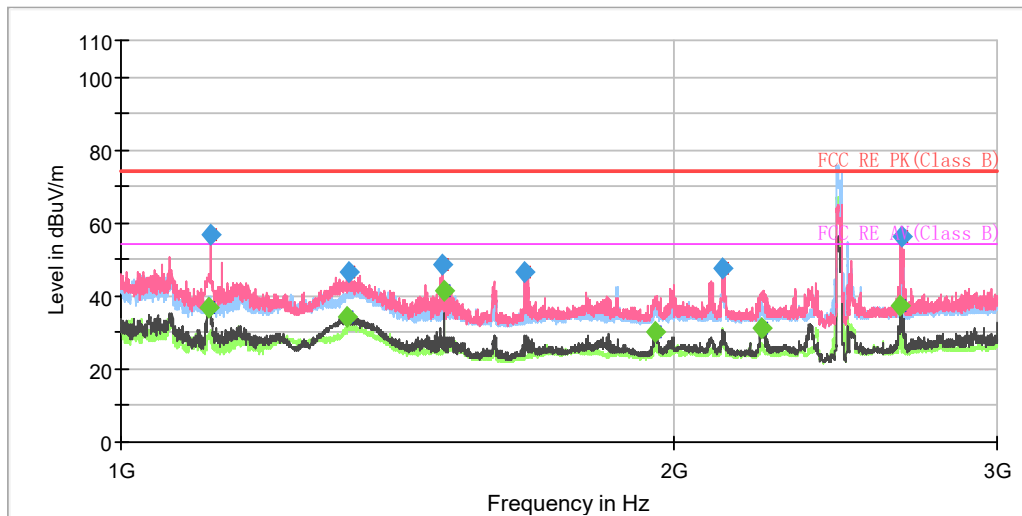

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

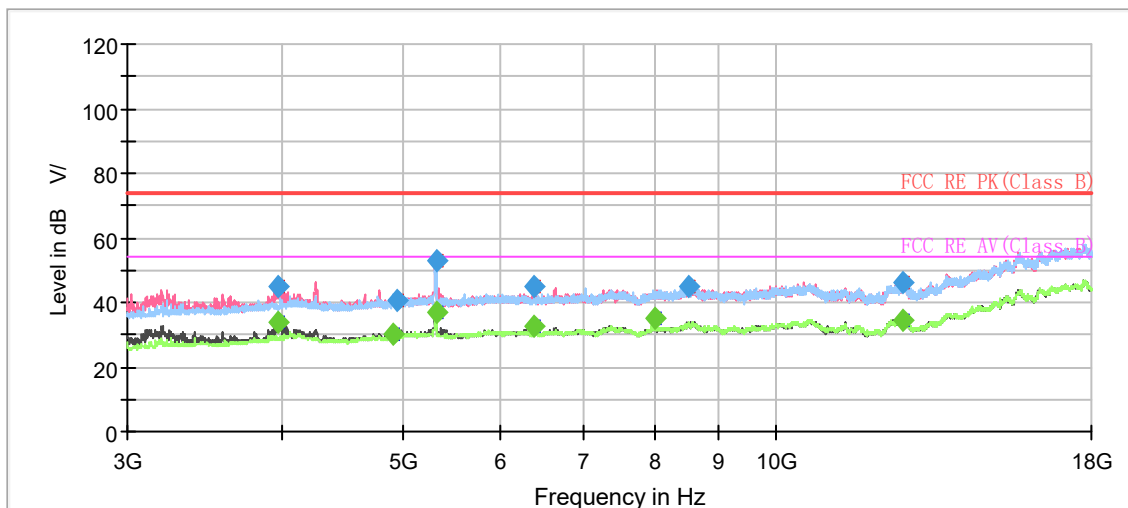


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1115.750000	---	37.09	54.00	16.91	200.0	V	303.0	-18.3
1119.000000	56.90	---	74.00	17.10	200.0	V	303.0	-18.2
1328.250000	---	34.14	54.00	19.86	200.0	V	298.0	-17.1
1330.000000	46.57	---	74.00	27.43	100.0	V	60.0	-17.1
1494.750000	48.66	---	74.00	25.34	200.0	V	325.0	-16.2
1500.000000	---	41.22	54.00	12.78	200.0	H	220.0	-16.2
1659.500000	46.79	---	74.00	27.21	200.0	V	15.0	-15.2
1954.250000	---	30.05	54.00	23.95	200.0	V	298.0	-13.6
2127.000000	47.55	---	74.00	26.45	100.0	V	182.0	-12.8
2232.750000	---	31.25	54.00	22.75	200.0	V	319.0	-12.6
2656.000000	---	37.58	54.00	16.42	100.0	V	217.0	-10.7
2665.000000	56.22	---	74.00	17.78	200.0	V	275.0	-10.7


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH3

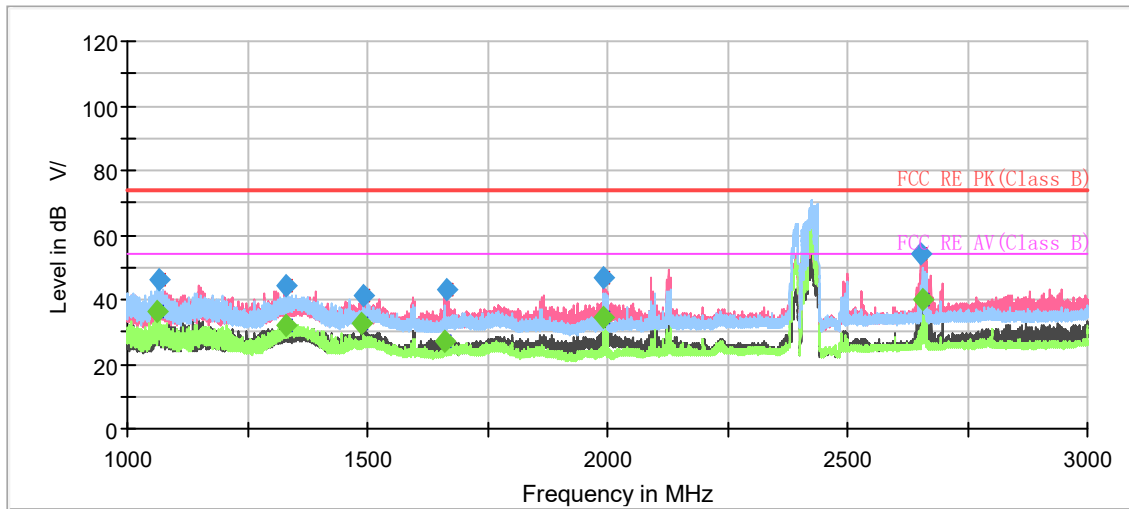

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

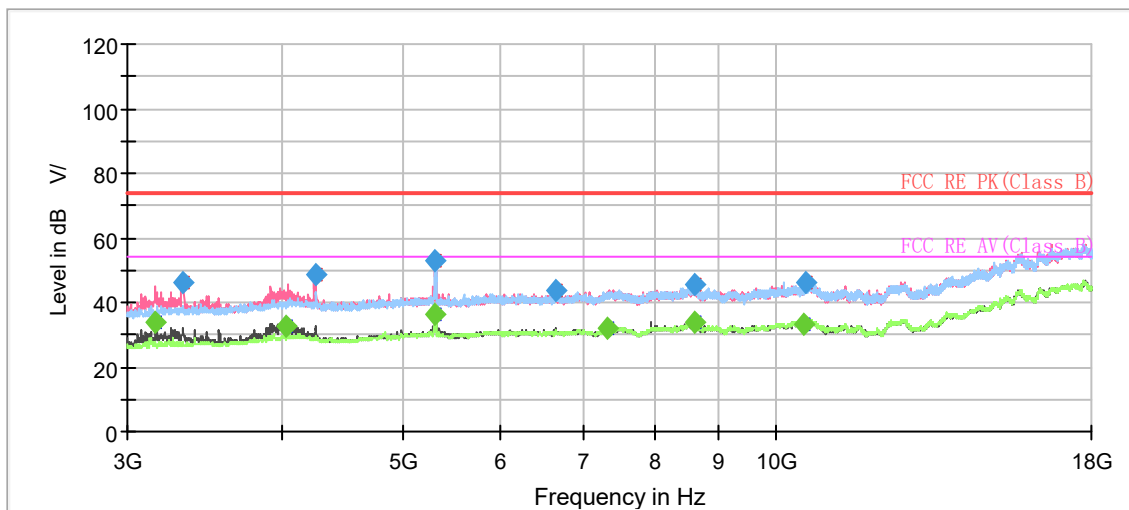

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarizat ion	Azimuth (deg)	Correct Factor (dB)
1063.466667	---	36.34	54.00	17.66	100.0	H	46.0	-18.0
1064.733333	46.05	---	74.00	27.95	200.0	H	43.0	-18.0
1328.866667	44.12	---	74.00	29.88	100.0	H	0.0	-16.6
1328.866667	---	32.29	54.00	21.71	100.0	H	0.0	-16.6
1488.266667	---	32.68	54.00	21.32	200.0	V	240.0	-15.6
1491.066667	41.03	---	74.00	32.97	100.0	V	262.0	-15.6
1661.800000	---	27.35	54.00	26.65	200.0	V	316.0	-14.7
1665.600000	42.80	---	74.00	31.20	200.0	V	266.0	-14.7
1992.266667	---	34.37	54.00	19.63	100.0	V	327.0	-12.7
1992.733333	46.65	---	74.00	27.35	100.0	V	327.0	-12.7
2654.800000	54.20	---	74.00	19.80	200.0	V	214.0	-9.6
2655.533333	---	39.97	54.00	14.03	200.0	V	214.0	-9.6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)