

Report on the Radio Testing

For

Meggitt

on

WTPS PSD

Report no. TRA-055479-47-02A

26 April 2023

RF915 8.0



0026

Report Number: TRA-055479-47-02A
Issue: A

REPORT ON THE RADIO TESTING OF A
Meggitt
WTPS PSD
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247

TEST DATE: 06/12/2022 to 08/12/2022

Tested by: Michael Else

Written by: Michael Else
Radio Test Engineer

Approved by: John Charters
Date: 26 April 2023

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	26 April 2023	Original

2 Summary

TEST REPORT NUMBER:	TRA-055479-47-02A
WORKS ORDER NUMBER:	TRA-055479-00
PURPOSE OF TEST:	Certification
TEST SPECIFICATION:	47CFR15.247
EQUIPMENT UNDER TEST (EUT):	WTPS PSD
FCC IDENTIFIER:	2A83B423420
EUT SERIAL NUMBER:	AS34043
MANUFACTURER/AGENT:	Meggitt
ADDRESS:	Route de Moncor 4 PO Box 1616 Fribourg 1701 Switzerland
CLIENT CONTACT:	Raphael Goutagny ☎ 41264071297 ✉ raphael.goutagny@ch.meggitt.com
ORDER NUMBER:	PO_4551035521
TEST DATE:	06/12/2022 to 08/12/2022
TESTED BY:	Michael Else Element

2.1 Test Summary

Test Method and Description		Requirement Clause 47CFR15	Applicable to this equipment	Result / Note
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		15.247 (d)	☒	Pass
AC power line conducted emissions		15.207	☐	Note 1
Occupied bandwidth		15.247 (a) (2)	☒	Pass
Conducted carrier power	Peak	15.247 (b) (3)	☒	Pass
	Max.		☐	
Out of band emissions		15.247 (d)	☒	Pass
Power spectral density		15.247 (e)	☒	Pass
Calculation of duty correction		-	☐	Note 2

Specific Note:

1. The EUT is a battery powered device / The EUT has a non-replaceable and non-rechargeable 3.0V, 0.55 mAh Lithium battery.
2. The EUT is transmitting at 100% in test mode, so the Duty cycle is not required

General Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction	7
5	Test Specifications	8
5.1	Normative References	8
5.2	Deviations from Test Standards	8
6	Glossary of Terms.....	9
7	Equipment under Test.....	10
7.1	EUT Identification.....	10
7.2	System Equipment	10
7.3	EUT Mode of Operation	10
7.4	EUT Radio Parameters	10
7.4.1	General	10
7.4.2	Antennas.....	11
7.5	EUT Description	11
8	Modifications	12
9	EUT Test Setup	13
9.1	Block Diagram.....	13
9.2	General Set-up Photograph	14
9.3	Measurement software.....	14
10	General Technical Parameters.....	15
10.1	Normal Conditions.....	15
10.2	Varying Test Conditions	15
11	Radiated emissions.....	16
11.1	Definitions	16
11.2	Test Parameters.....	16
11.3	Test Limit.....	16
11.4	Test Method	17
11.5	Test Equipment.....	18
11.6	Test Results	19
12	Occupied Bandwidth	24
12.1	Definition	24
12.2	Test Parameters.....	24
12.3	Test Limit.....	24
12.4	Test Method	25
12.5	Test Equipment.....	25
12.6	Test Results	26
13	Maximum peak conducted output power.....	27
13.1	Definition	27
13.2	Test Parameters.....	27
13.3	Test Limit.....	28
13.4	Test Method	28
13.5	Test Equipment.....	28
13.6	Test Results	29
14	Out-of-band and conducted spurious emissions	30
14.1	Definition	30
14.2	Test Parameters.....	30
14.3	Test Limit.....	31
14.4	Test Method	31
14.5	Test Equipment.....	31
14.6	Test Results	32
15	Power spectral density	33
15.1	Definition	33
15.2	Test Parameters.....	33
15.3	Test Limit.....	33
15.4	Test Method	34
15.5	Test Equipment.....	34
15.6	Test Results	34
16	Measurement Uncertainty	35
17	RF Exposure	37

4 Introduction

This report TRA-055479-47-02A presents the results of the Radio testing on a Meggitt, WTPS PSD to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Meggitt by Element, at the address detailed below.

☐	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	☒	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

The test laboratory is accredited for the above sites under the US-UK MRA,

Designation number(s):

Element Hull UK2007
Element Skelmersdale UK2020

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment under Test

7.1 EUT Identification

- Name: WTPS PSD
- Serial Number: AS34043
- Model Number: 423-420-099-022
- Software Revision: Not Applicable
- Build Level / Revision Number: Not Applicable

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

Laptop: HP Elitebook 840 G3
Serial Number: 5CG8290QDJ

7.3 EUT Mode of Operation

EUT was set to operate in test modes using customer supplied laptop running HCI Tester Version 3.0.0.37

7.4 EUT Radio Parameters

7.4.1 General

Frequency of operation:	2402 MHz – 2480 MHz
Modulation type(s):	GFSK
Channel spacing:	1 MHz
Declared output power(s):	0 dBm
Nominal Supply Voltage:	3.0V, 0.55 mAh Lithium battery (Non-Rechargeable / Non-Replaceable)
Duty cycle:	100%

7.4.2 Antennas

Type:	2.4 GHz Mini Antenna, SMT
Manufacturer:	Johanson Technology Inc.
Model number:	2450AT18B100
Frequency range:	2400 MHz -2500 MHz
Impedance:	50 Ohm
Gain:	0.5 dBi (Peak)
Length:	3.20 mm +- 0.2 mm
Mounting:	Surface mount

7.5 EUT Description

The EUT is a wireless tyre pressure sensor (WTPS) - Pressure sensor device (PSD) for aircrafts. This report covers the testing of the Bluetooth Low Energy Radio only


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup


9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:



9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:

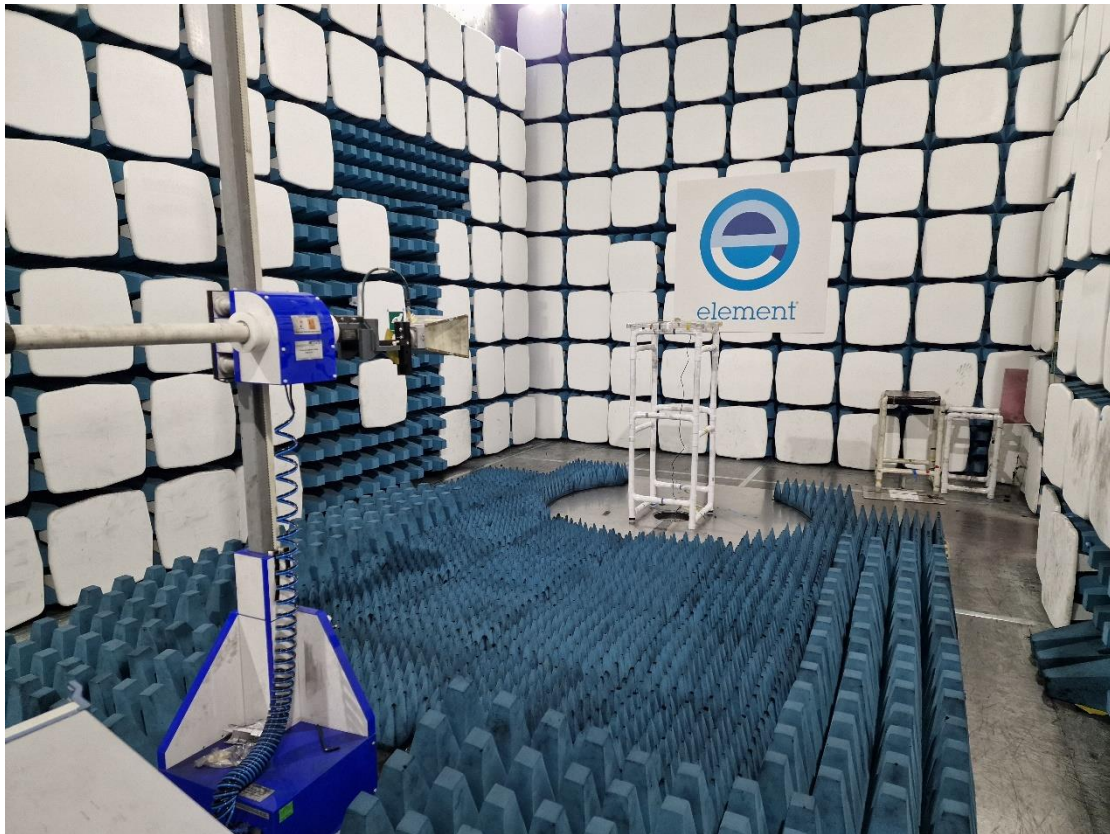

9.3 Measurement software

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5
Element Transmitter Bench Test
ETS Lindgren EMPower V1.0.4.2

10 General Technical Parameters

10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 3 Vdc from internal non-replaceable, non-rechargeable lithium battery.

10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
☐	Mains	110 Vac +/-2 %	85 % and 115 %
☒	Battery	New battery	N/A

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber 3
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	2402 MHz, 2440 MHz & 2480 MHz
Deviations from Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 38 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	Powered by USB cable during testing

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (μV/m at 3 m)</i>	<i>Field Strength (dBμV/m at 3 m)</i>
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

On frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function. On frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBμV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

$$\text{Factor} = CL + AF - PA$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBμV;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup



11.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal not required
Radio Chamber - PP	Rainford EMC	ATS	REF940	2023-11-06
FSU26	R&S	Spectrum Analyser	U405	2023-04-21
8449B	Agilent	Pre Amp	L572	2023-10-24
3115	EMCO	1-18GHz Horn	L139	2024-07-01
SN 4478	BSC	2.4G Band Stop Filter	U543	2023-02-03
AFH-07000	Atlantic Microwave	High Pass Filter	U558	2023-02-03
20240-20	Flann	Horn 18-26GHz (&U330)	L263A	2024-06-23
6201-69	Watkins Johnson	PreAmp	U372	2023-03-01
CBL6112B	Chase	Bilog	U093	2023-09-15
ESR7	R&S	EMI Receiver	U456	2023-01-25


11.6 Test Results

Common emissions, 30 MHz to 1 GHz


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
167.810	44.0	-11.6	2.32	277.9	3.0	0.0	Horz	QP	0.0	32.4	43.5	-11.1
168.019	42.4	-11.6	1.0	189.0	3.0	0.0	Vert	QP	0.0	30.8	43.5	-12.7
240.018	41.9	-9.4	1.06	79.1	3.0	0.0	Horz	QP	0.0	32.5	46.0	-13.5
38.223	28.3	-8.4	1.0	334.9	3.0	0.0	Vert	QP	0.0	19.9	40.0	-20.1
120.220	31.9	-9.4	1.0	146.1	3.0	0.0	Vert	QP	0.0	22.5	43.5	-21.0
240.127	33.8	-9.4	1.0	104.9	3.0	0.0	Vert	QP	0.0	24.4	46.0	-21.6

Frequency: 2402 MHz; Power Setting: 0dBm; Modulation: GFSK;


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
4803.483	49.5	3.1	1.37	270.1	3.0	0.0	Horz	AV	0.0	52.6	54.0	-1.4
4803.475	45.8	3.1	1.22	134.1	3.0	0.0	Vert	AV	0.0	48.9	54.0	-5.1
4803.492	56.9	3.1	1.37	270.1	3.0	0.0	Horz	PK	0.0	60.0	74.0	-14.0
4803.367	54.6	3.1	1.22	134.1	3.0	0.0	Vert	PK	0.0	57.7	74.0	-16.3

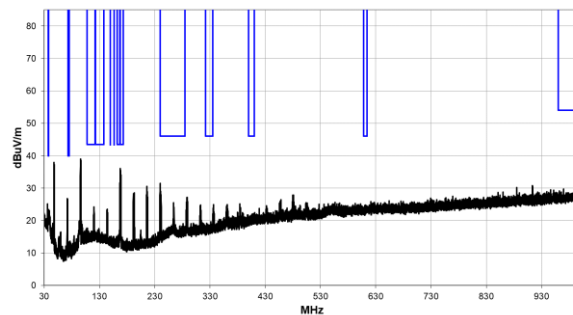


30 MHz to 1 GHz

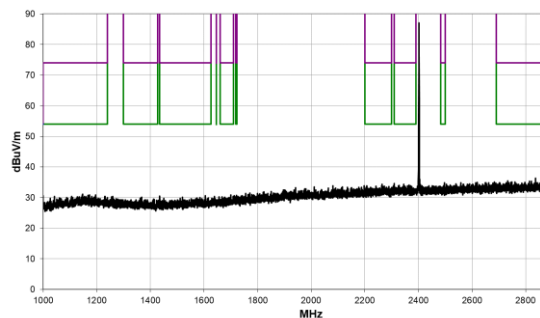


1 GHz to 3 GHz

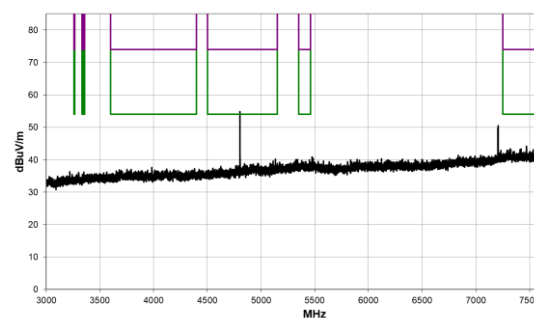

3 GHz to 8 GHz

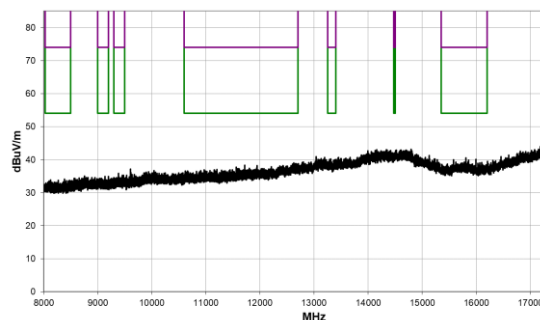


8 GHz to 18 GHz

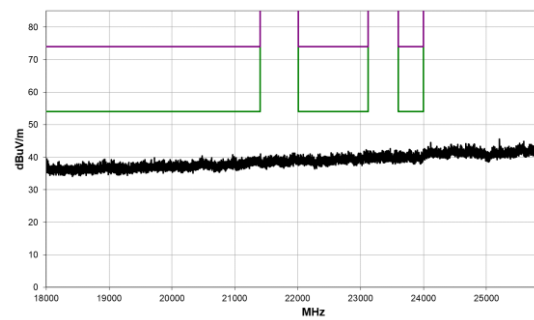


18 GHz to 26.5 GHz

Frequency: 2440 MHz; Power Setting: 0dBm; Modulation: GFSK;


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
4880.458	46.4	3.3	1.25	222.9	3.0	0.0	Horz	AV	0.0	49.7	54.0	-4.3
7319.200	41.4	7.7	1.14	124.9	3.0	0.0	Horz	AV	0.0	49.1	54.0	-4.9
7320.683	40.8	7.7	1.4	334.0	3.0	0.0	Vert	AV	0.0	48.5	54.0	-5.5
4879.450	40.8	3.3	1.14	134.9	3.0	0.0	Vert	AV	0.0	44.1	54.0	-9.9
7320.692	52.3	7.7	1.14	124.9	3.0	0.0	Horz	PK	0.0	60.0	74.0	-14.0
7320.883	51.5	7.7	1.4	334.0	3.0	0.0	Vert	PK	0.0	59.2	74.0	-14.8
4879.517	54.5	3.3	1.25	222.9	3.0	0.0	Horz	PK	0.0	57.8	74.0	-16.2
4879.350	51.1	3.3	1.14	134.9	3.0	0.0	Vert	PK	0.0	54.4	74.0	-19.6

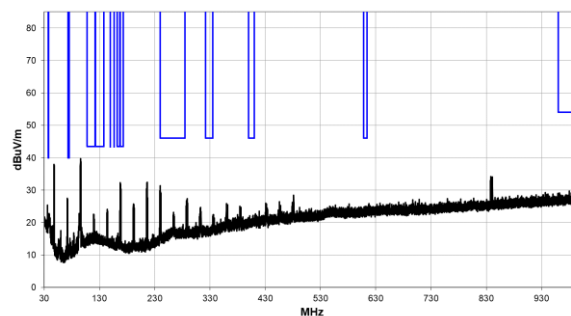


30 MHz to 1 GHz

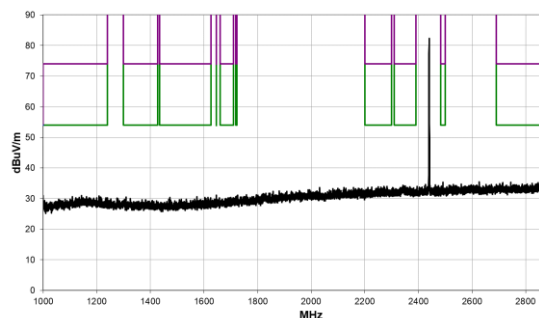


1 GHz to 3 GHz

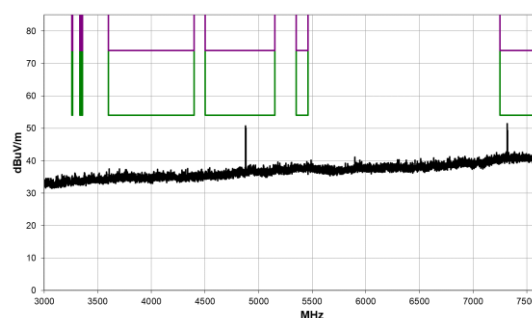

3 GHz to 8 GHz

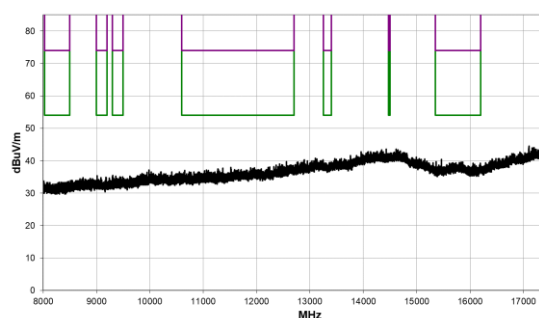


8 GHz to 18 GHz

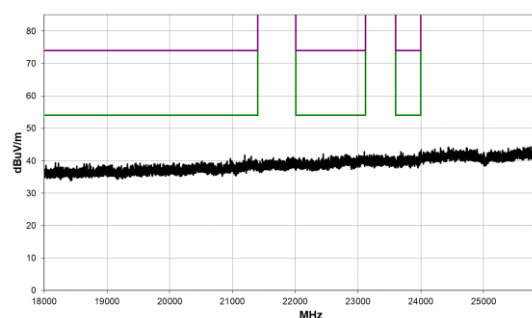


18 GHz to 26.5 GHz

Frequency: 2480 MHz; Power Setting: 0 dBm; Modulation: GFSK;


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7440.817	40.5	7.7	1.32	130.0	3.0	0.0	Horz	AV	0.0	48.2	54.0	-5.8
4959.558	44.0	3.5	1.26	221.9	3.0	0.0	Horz	AV	0.0	47.5	54.0	-6.5
7440.742	39.8	7.7	1.26	314.0	3.0	0.0	Vert	AV	0.0	47.5	54.0	-6.5
4959.550	39.6	3.5	1.25	137.0	3.0	0.0	Vert	AV	0.0	43.1	54.0	-10.9
7441.042	51.3	7.7	1.32	130.0	3.0	0.0	Horz	PK	0.0	59.0	74.0	-15.0
7439.158	50.6	7.7	1.26	314.0	3.0	0.0	Vert	PK	0.0	58.3	74.0	-15.7
4959.567	52.9	3.5	1.26	221.9	3.0	0.0	Horz	PK	0.0	56.4	74.0	-17.6
4959.567	50.0	3.5	1.25	137.0	3.0	0.0	Vert	PK	0.0	53.5	74.0	-20.5

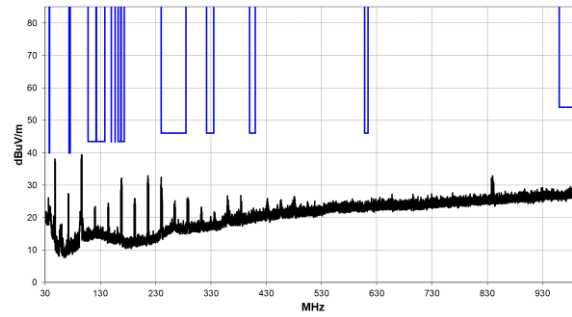


30 MHz to 1 GHz

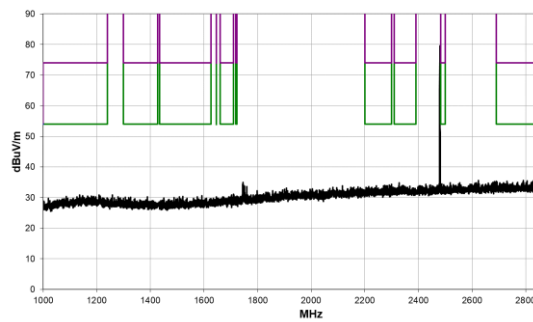


1 GHz to 3 GHz

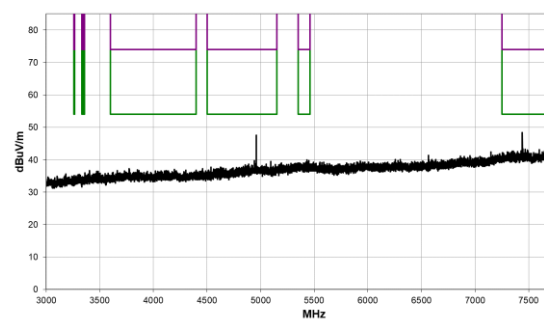

3 GHz to 8 GHz

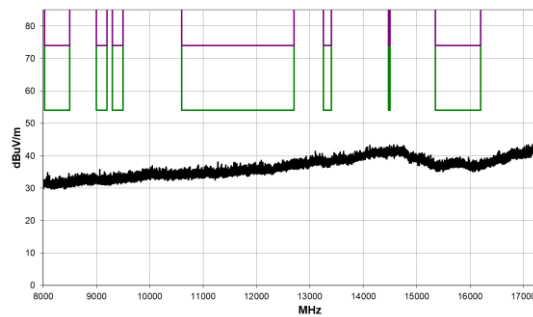


8 GHz to 18 GHz

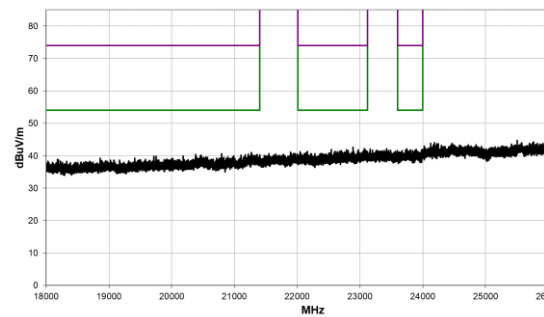

18 GHz to 26.5 GHz

Upper radiated band edge peak/average

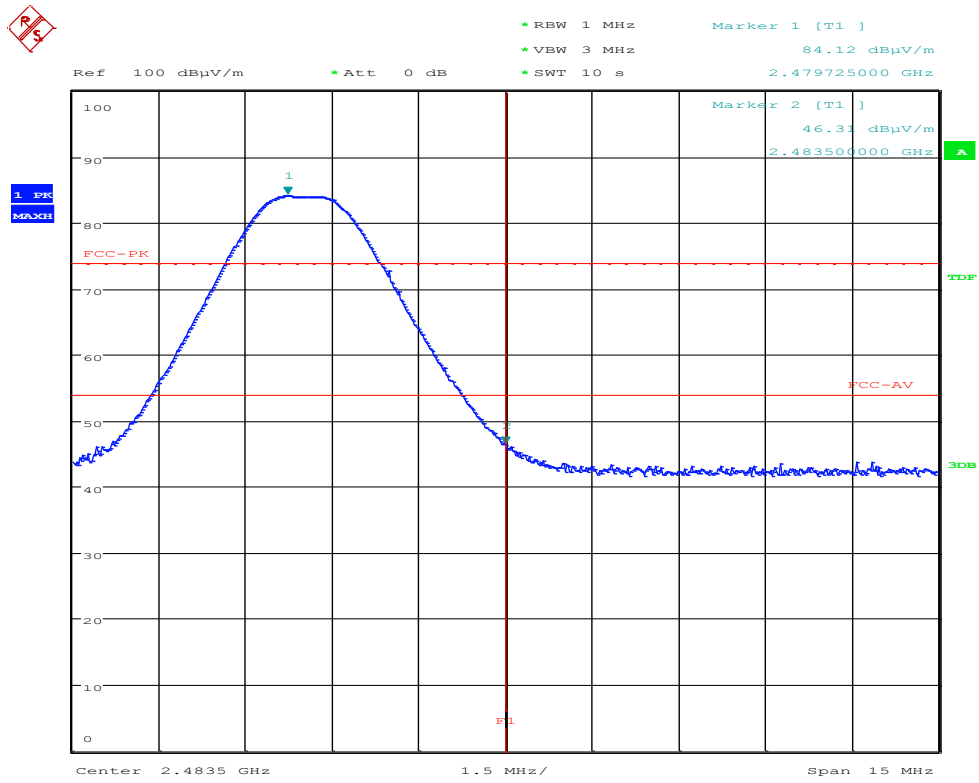

Date: 7.DEC.2022 10:46:05

Peak levels meet the Average limit

12 Occupied Bandwidth

12.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber 3
Test Standard and Clause:	6 dB Bandwidth: ANSI C63.10-2013, Clause 11.8
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	2 MHz
EUT Test Modulations:	GFSK
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Span: (requirement 2 to 5 times OBW)	3 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 20 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	(as declared)

12.3 Test Limit


The minimum -6 dB bandwidth shall be at least 500 kHz.

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iii Test Setup




12.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required
Radio Chamber - PP	Rainford EMC	ATS	REF940	2023-11-06
Spectrum Analyser	R&S	FSU26	U405	2023-04-21
1-18GHz Horn	EMCO	3115	L139	2024-07-01
Pre Amp	Agilent	8449B	L572	2023-10-24

12.6 Test Results


Bandwidth Type: 6 dB; Modulation: GFSK; Data rate: 1 Mbps				
Frequency (MHz)	F_L (MHz)	F_H (MHz)	Bandwidth (kHz)	Result
2402	2401.639423	2402.346154	706.731	PASS
2440	2439.634615	2440.355769	721.154	PASS
2480	2479.634615	2480.360577	725.962	PASS

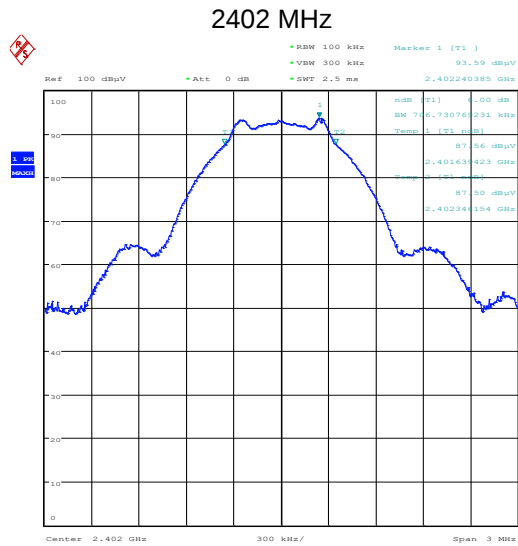

Date: 8.DEC.2022 08:02:54

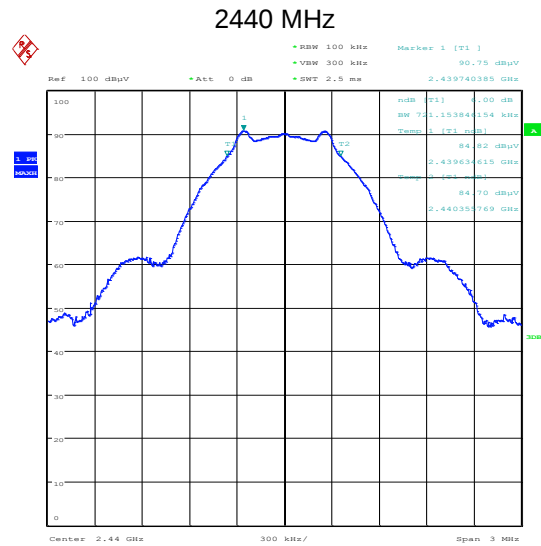

Date: 8.DEC.2022 08:05:09

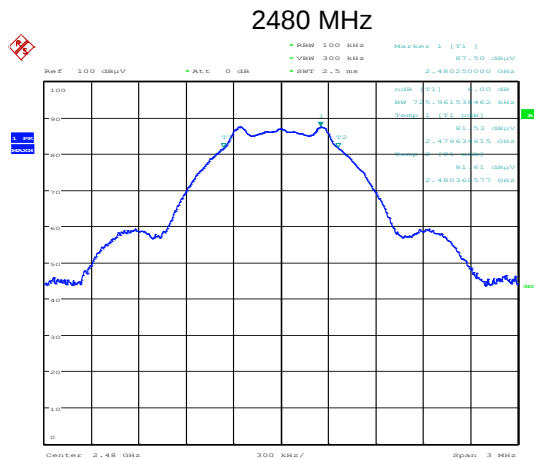

Date: 8.DEC.2022 08:07:59

13 Maximum peak conducted output power

13.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber 3
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.9.1
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	1 MHz
Deviations From Standard:	None
Measurement BW:	3 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Battery Power = new battery.

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 38 % RH	20 % RH to 75 % RH (as declared)

13.3 Test Limit


For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iv Test Setup



13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal not required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2023-11-06
FSU26	R&S	Spectrum Analyser	U405	2023-04-21
8449B	Agilent	Pre Amp	L572	2023-10-24
3115	EMCO	1-18GHz Horn	L139	2024-07-01

13.6 Test Results

The following formula was used to convert field strength (E) in volts/metre to conducted output power in watts:

$$\text{Conducted Output Power} = (E \times d)^2 / (30 \times G)$$

Where,

E is the electric field strength in V/m

d is the measurement distance in meters (m)

G is the antenna numerical gain referenced to isotropic gain of 0.5 dBi

Modulation: GFSK; Data rate: 1 Mbps; Power setting: 0 dBm					
Frequency (MHz)	Peak Field Strength (dBμV/m)	Peak Field Strength (V/m)	Distance (m)	Maximum peak conducted output power (W)	Result
2402	90.06	0.03	3.00	0.000271	PASS
2440	86.70	0.02	3.00	0.000125	PASS
2480	82.75	0.01	3.00	0.000050	PASS

14 Out-of-band and conducted spurious emissions

14.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber 3
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.11
EUT Channels / Frequencies Measured:	2402 MHz, 2440 MHz & 2480 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 26.5 GHz

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	230 V ac ± 10 % (as declared)

14.3 Test Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure v Test Setup



14.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal not required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2023-11-06
FSU26	R&S	Spectrum Analyser	U405	2023-04-21
8449B	Agilent	Pre Amp	L572	2023-10-24
3115	EMCO	1-18GHz Horn	L139	2024-07-01


14.6 Test Results

Frequency: 2402 MHz; Modulation: GFSK; Data rate: 1Mbps; Power setting: 0 dBm;				
Emission Frequency (MHz)	Peak Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2402	90.06	N/A	N/A	REF
7205.100	58.3	70.06	11.6	Pass

Frequency: 2440 MHz; Modulation: GFSK; Data rate: 1Mbps; Power setting: 0 dBm;						
Emission Frequency (MHz)	Peak Field Strength (dBμV/m)	Distance (m)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
No emissions within 20 dB of the limit.						PASS

Frequency: 2480 MHz; Modulation: GFSK; Data rate: 1Mbps; Power setting: 0 dBm;						
Emission Frequency (MHz)	Peak Field Strength (dBμV/m)	Distance (m)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
No emissions within 20 dB of the limit.						PASS

Lower Band Edge

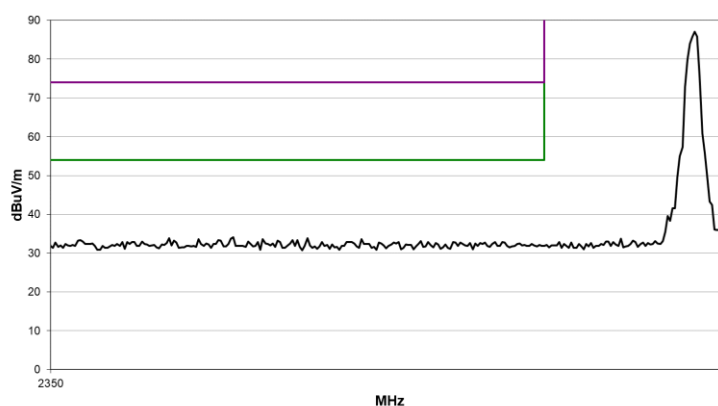

Note: See radiated spurious emissions section 11, for plots covering the out of band emissions frequency range

15 Power spectral density

15.1 Definition

The power per unit bandwidth.

15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio chamber 3
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	1 MHz
Deviations From Standard:	None
Measurement BW:	3 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 kHz
Measurement Span: (requirement 1.5 times Channel BW)	1.5 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 31.6 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	(as declared)

15.3 Test Limit


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vi Test Setup



15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal not required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2023-11-06
FSU26	R&S	Spectrum Analyser	U405	2023-04-21
8449B	Agilent	Pre Amp	L572	2023-10-24
3115	EMCO	1-18GHz Horn	L139	2024-07-01

15.6 Test Results

The following formula may be used to convert field strength (FS) in volts/metre to transmitter output power (TP) in watts:

$$TP = (FS \times D)^2 / (30 \times G)$$

where D is the distance in metres between the two antennas and G is the antenna numerical gain referenced to isotropic gain.

FS is the electric field strength in V/m

D is the measurement distance in meters (m)

G is the antenna numerical gain referenced to isotropic gain of 0.5 dBi

Modulation: GFSK; Data rate: 1Mbps;					
Channel Frequency (MHz)	Peak Field Strength (dBµV/m)	Distance (m)	Antenna Gain	Max. Power (dBm)	Result
2402	80.65	3.00	1.12	-15.08	PASS
2440	77.10	3.00	1.12	-18.63	PASS
2480	72.19	3.00	1.12	-23.54	PASS

16 Measurement Uncertainty

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

Test/Measurement	Budget Number	MU
Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions		
Absolute RF power (via antenna connector) Dare RPR3006W Power Head	MU4001	0.9 dB
Carrier Power and PSD - Spectrum Analysers	MU4004	0.9 dB
Adjacent Channel Power	MU4002	1.9 dB
Transmitter conducted spurious emissions	MU4041	0.9 dB
Conducted power and spurious emissions 40 GHz to 50 GHz	MU4042	2.4 dB
Conducted power and spurious emissions 50 GHz to 75 GHz	MU4043	2.5 dB
Conducted power and spurious emissions 75 GHz to 110 GHz	MU4044	2.4 dB
Radiated RF Power and Spurious emissions ERP and EIRP		
Effective Radiated Power Reverb Chamber	MU4020	3.7 dB
Effective Radiated Power	MU4021	4.7 dB
TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna	MU4046	5.3 dB
TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna	MU4047	5.1 dB
TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn	MU4048	2.7 dB
TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn	MU4049	2.7 dB
Spurious Emissions Electric and Magnetic Field		
Radiated Spurious Emissions 30 MHz to 1 GHz	MU4037	4.7 dB
Radiated Spurious Emissions 1-18 GHz	MU4032	4.5 dB
E Field Emissions 18GHz to 26 GHz	MU4024	3.2 dB
E Field Emissions 26GHz to 40 GHz	MU4025	3.3 dB
E Field Emissions 40GHz to 50 GHz	MU4026	3.5 dB
E Field Emissions 50GHz to 75 GHz	MU4027	3.6 dB
E Field Emissions 75GHz to 110 GHz	MU4028	3.6 dB
Radiated Magnetic Field Emissions	MU4031	2.3 dB
Frequency Measurements		
Frequency Deviation	MU4022	0.316 kHz
Frequency error using CMTA test set	MU4023	113.441 Hz
Frequency error using GPS locked frequency source	MU4045	0.0413 ppm
Bandwidth/Spectral Mask Measurements		
Channel Bandwidth	MU4005	3.87 %
Transmitter Mask Amplitude	MU4039	1.3 dB
Transmitter Mask Frequency	MU4040	2.59 %
Time Domain Measurements		
Transmission Time	MU4038	4.40 %
Dynamic Frequency Selection (DFS) Parameters		
DFS Analyser - Measurement Time	MU4006	679 μ s
DFS Generator - Frequency Error	MU4007	92 Hz
DFS Threshold Conducted	MU4008	1.3 dB
DFS Threshold Radiated	MU4009	3.2 dB

Test/Measurement	Budget Number	MU
Receiver Parameters		
EN300328 Receiver Blocking	MU4010	1.1 dB
EN301893 Receiver Blocking	MU4011	1.1 dB
EN303340 Adjacent Channel Selectivity	MU4012	1.1 dB
EN303340 Overloading	MU4013	1.1 dB
EN303340 Receiver Blocking	MU4014	1.1 dB
EN303340 Receiver Sensitivity	MU4015	0.9 dB
EN303372-1 Image Rejection	MU4016	1.4 dB
EN303372-1 Receiver Blocking	MU4017	1.1 dB
EN303372-2 Adjacent Channel Selectivity	MU4018	1.1 dB
EN303372-2 Dynamic Range	MU4019	0.9 dB
Receiver Blocking Talk Mode Conducted	MU4033	1.2 dB
Receiver Blocking Talk Mode- radiated	MU4034	3.4 dB
Rx Blocking, listen mode, blocking level	MU4035	3.2 dB
Rx Blocking, listen mode, radiated Threshold Measurement	MU4036	3.4 dB
Adjacent Sub Band Selectivity	MU4003	4.2 dB

17 RF Exposure

General SAR test reduction and exclusion guidance

KDB 447498

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

In the frequency range below 100 MHz to 6 GHz and test separation distance of 50mm, the SAR Test Exclusion Threshold for operation in the 2400 – 2483.5 MHz band will be determined as follows

SAR Exclusion Threshold (SARET)

The SAR Test Exclusion Threshold for frequencies in the range 100 MHz to 6 GHz, and for test separation distance of ≤ 50 mm, is determined as follows.

$$\text{SAR Exclusion Threshold (SARET)} = (\text{NT} \times \text{TSD}_A) / \sqrt{f_{\text{GHz}}}$$

Where,

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)

TSD_A = Minimum Test separation distance or 50 mm (whichever is lower)

f_{GHz} = Transmit frequency in GHz

Evaluation Frequency	2402 MHz	2440 MHz	2480 MHz	
SAR Exclusion Threshold	9.7	9.6	9.5	mW
Radiated Field Strength	96.06	86.70	82.75	dBuV/m (@3m)
Antenna Gain	0.5	0.5	0.5	dBi
Conducted Power	0.27	0.13	0.05	mW
SAR Evaluation	<i>Exempt</i>			

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.