

TEST REPORT

Report No.: BCTC2208590163-2E

Applicant: Shenzhen Amitec Electronics Co.Ltd.

Product Name: SOLR

Model/Type Ref.: X5802001000

Tested Date: 2022-08-03 to 2022-08-24

Issued Date: 2022-08-25

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A8DJ-X5802001000

Product Name: SOLR
Trademark: N/A
Model/Type Ref.: X5802001000
Prepared For: Shenzhen Amitec Electronics Co.Ltd.
Address: Unit 1706, Rongchao Building A, Haixiu Road, Bao'An, Shenzhen, China. 518133
Manufacturer: Shenzhen Amitec Electronics Co.Ltd.
Address: Unit 1706, Rongchao Building A, Haixiu Road, Bao'An, Shenzhen, China. 518133
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2022-08-03
Sample tested Date: 2022-08-03 to 2022-08-24
Issue Date: 2022-08-25
Report No.: BCTC2208590163-2E
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310
Test Results: PASS

Tested by:



Eric Yang/Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Product Information	5
2.1 Product Information	5
2.2 Support Equipment	5
2.3 Test Mode	5
3. Test Facility And Test Instrument Used	6
3.1 Test Facility	6
3.2 Test Instrument Used	6
4. Method Of Measurement	7
4.1 Applicable Standard	7
4.2 Block Diagram Of Test Setup	7
4.3 Limit	8
4.4 Test procedure	8
4.5 Equipment Approval Considerations	9
4.6 E and H field Strength	10
5. Photographs Of Test Set-Up	14

(Note: N/A Means Not Applicable)

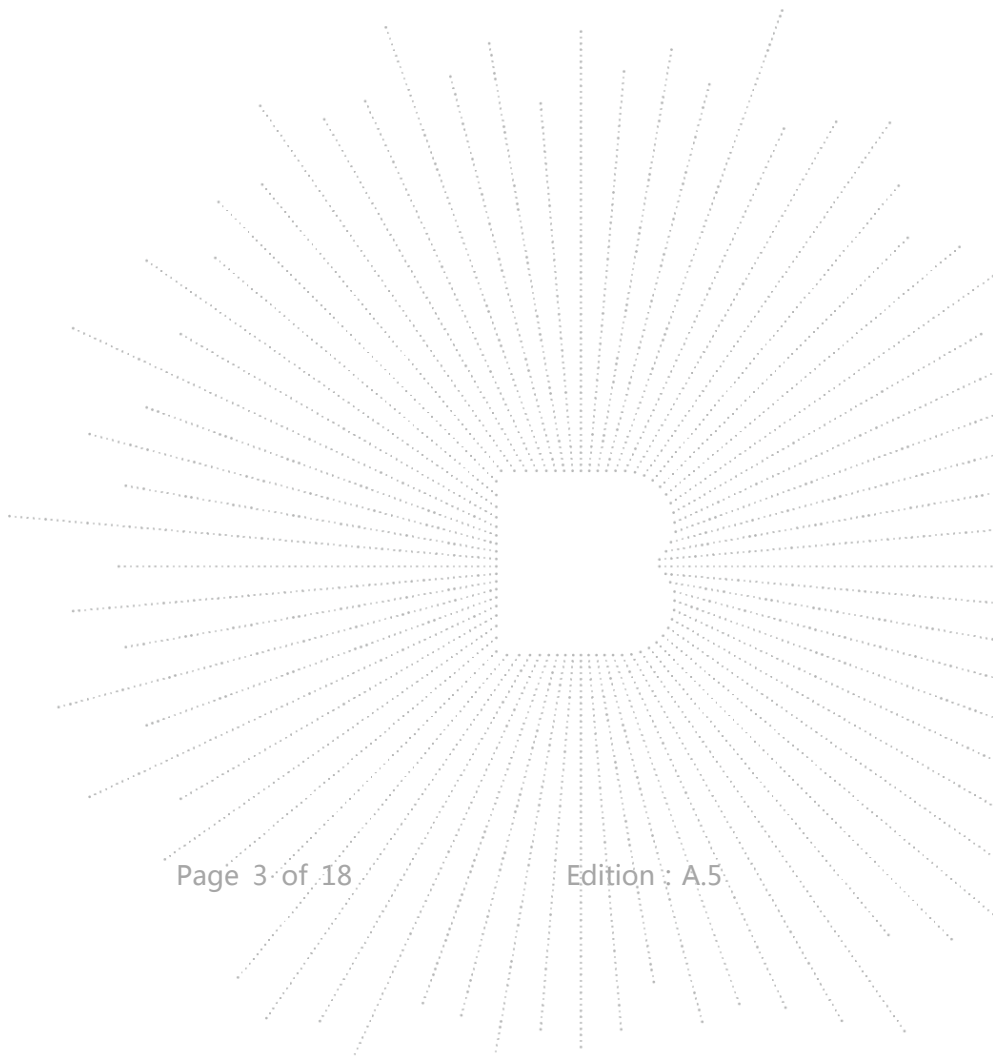

1. Version

Report No.	Issue Date	Description	Approved
BCTC2208590163-2E	2022-08-25	Original	Valid

2. Product Information

2.1 Product Information

Model/Type Ref.: X5802001000
 Model differences: N/A
 Product Description: SOLR
 Operation Frequency: 115kHz-220kHz
 Antenna installation: loop coil antenna
 Ratings: Input: 5V/2A
 USB Output: 5V/2A(Max.)
 Wireless charger Output: 5V/1A(Max.)

2.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1	Mobile phone	Apple	11	N/A	Auxiliary
2	Adapter	N/A	CD122	N/A	Auxiliary

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

Test Modes 1	Keeping TX+Charging mode
--------------	--------------------------

3. Test Facility And Test Instrument Used

3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

3.2 Test Instrument Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electromagnetic radiation tester	Wavecontrol	SMP160	19SN0980	Aug. 30, 2021	Aug. 29, 2022
Electromagnetic field probe	Wavecontrol	WP400-3	20WP120082	Aug. 30, 2021	Aug. 29, 2022
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023


4. Method Of Measurement

4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

4.2 Block Diagram Of Test Setup

A

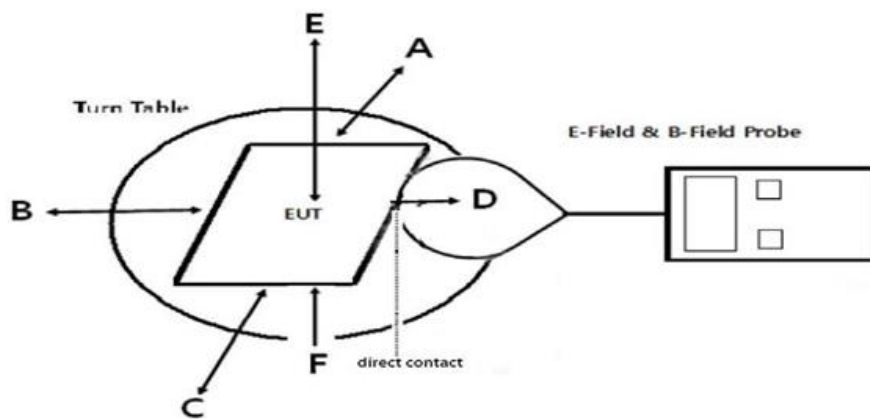

B

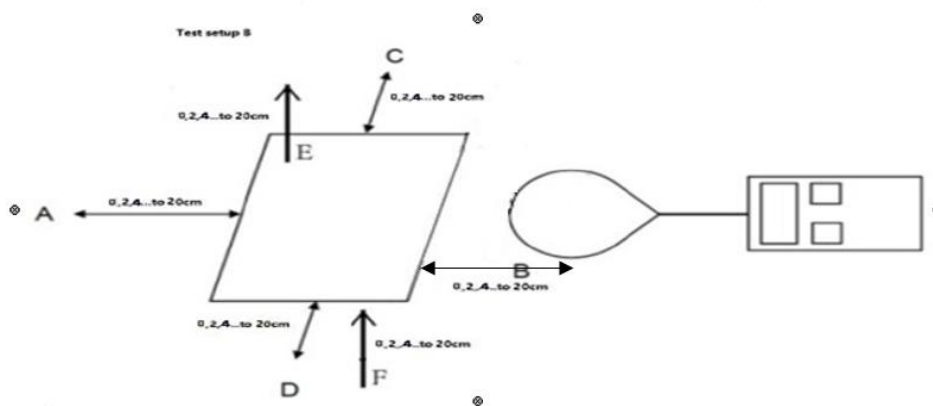

4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

4.4 Test procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03r01.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03r01

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115-220KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 5 watts.

3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

Yes, the transfer system includes only single primary coils.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

No, the EUT is a Portable wireless charge power bank.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

4.6 E and H field Strength

For setup A:

H-Filed Strength at 0 cm from edges surrounding the EUT (A/m)

Frequency Range (kHz)	Operation condition	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)	Test Position F (A/m)	Limits (A/m)
115-220	1% battery	0.066	0.068	0.077	0.072	0.065	0.061	1.63
115-220	50% battery	0.068	0.066	0.070	0.072	0.066	0.072	1.63
115-220	99% battery	0.063	0.063	0.078	0.077	0.064	0.068	1.63

E-Filed Strength at 0 cm from edges surrounding the EUT (V/m)

Frequency Range (kHz)	Operation condition	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)	Test Position F (V/m)	Limits (V/m)
115-220	1% battery	0.581	0.745	0.663	0.750	0.736	0.652	614
115-220	50% battery	0.493	0.712	0.745	0.674	0.596	0.506	614
115-220	99% battery	0.674	0.495	0.824	0.68	0.781	0.618	614

For setup B:

1% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.039	0.090	0.078	0.086	0.104	0.112	1.63
2	0.146	0.050	0.112	0.086	0.026	0.048	1.63
4	0.067	0.011	0.108	0.027	0.154	0.131	1.63
6	0.002	0.141	0.052	0.098	0.115	0.006	1.63
8	0.093	0.076	0.040	0.094	0.152	0.015	1.63
10	0.080	0.132	0.109	0.020	0.129	0.096	1.63
12	0.031	0.068	0.023	0.155	0.156	0.062	1.63
14	0.107	0.074	0.125	0.041	0.083	0.094	1.63
16	0.129	0.083	0.073	0.045	0.050	0.081	1.63
18	0.149	0.004	0.031	0.013	0.044	0.036	1.63
20	0.001	0.116	0.130	0.036	0.103	0.014	1.63

E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.025	0.008	0.131	0.144	0.050	0.102	614
2	0.119	0.022	0.134	0.028	0.150	0.000	614
4	0.113	0.111	0.020	0.081	0.023	0.111	614
6	0.024	0.120	0.024	0.155	0.154	0.130	614
8	0.049	0.154	0.080	0.075	0.027	0.086	614
10	0.094	0.127	0.049	0.083	0.044	0.117	614
12	0.105	0.099	0.151	0.022	0.002	0.026	1.63
14	0.143	0.142	0.115	0.062	0.050	0.076	614
16	0.033	0.085	0.054	0.100	0.055	0.104	614
18	0.130	0.115	0.023	0.130	0.001	0.082	614
20	0.155	0.117	0.044	0.144	0.089	0.094	614

50% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.027	0.047	0.039	0.033	0.126	0.121	1.63
2	0.033	0.146	0.065	0.151	0.106	0.038	1.63
4	0.061	0.110	0.127	0.121	0.097	0.083	1.63
6	0.129	0.040	0.131	0.067	0.044	0.096	1.63
8	0.056	0.037	0.140	0.129	0.003	0.007	1.63
10	0.133	0.095	0.030	0.082	0.002	0.138	1.63
12	0.122	0.034	0.008	0.113	0.109	0.154	1.63
14	0.137	0.112	0.061	0.078	0.001	0.109	1.63
16	0.151	0.001	0.013	0.111	0.014	0.033	1.63
18	0.135	0.079	0.129	0.147	0.096	0.118	1.63
20	0.103	0.080	0.009	0.134	0.068	0.089	1.63

E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.011	0.147	0.120	0.020	0.085	0.097	614
2	0.105	0.083	0.012	0.024	0.156	0.044	614
4	0.034	0.035	0.151	0.033	0.047	0.087	614
6	0.153	0.090	0.025	0.084	0.072	0.028	614
8	0.100	0.064	0.005	0.088	0.154	0.131	614
10	0.101	0.012	0.034	0.140	0.098	0.054	614
12	0.127	0.123	0.100	0.088	0.064	0.125	614
14	0.140	0.064	0.075	0.098	0.082	0.112	614
16	0.062	0.152	0.082	0.112	0.085	0.135	614
18	0.090	0.088	0.117	0.060	0.120	0.079	614
20	0.062	0.137	0.142	0.007	0.124	0.080	614

99% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.124	0.019	0.047	0.150	0.127	0.125	1.63
2	0.120	0.027	0.026	0.139	0.031	0.124	1.63
4	0.033	0.133	0.035	0.039	0.090	0.034	1.63
6	0.007	0.115	0.004	0.007	0.110	0.131	1.63
8	0.049	0.135	0.013	0.082	0.101	0.044	1.63
10	0.105	0.126	0.150	0.142	0.053	0.116	1.63
12	0.019	0.007	0.152	0.136	0.081	0.120	1.63
14	0.153	0.057	0.132	0.047	0.154	0.091	1.63
16	0.153	0.127	0.008	0.125	0.129	0.027	1.63
18	0.091	0.002	0.079	0.055	0.109	0.002	1.63
20	0.089	0.148	0.022	0.073	0.084	0.028	1.63

E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.015	0.016	0.093	0.009	0.006	0.127	614
2	0.040	0.122	0.127	0.057	0.078	0.120	614
4	0.094	0.110	0.124	0.122	0.125	0.045	614
6	0.144	0.153	0.119	0.052	0.117	0.004	614
8	0.125	0.110	0.000	0.058	0.156	0.051	614
10	0.023	0.151	0.118	0.110	0.091	0.104	614
12	0.087	0.109	0.156	0.086	0.048	0.013	614
14	0.120	0.113	0.128	0.040	0.014	0.101	614
16	0.063	0.117	0.102	0.018	0.102	0.004	614
18	0.087	0.097	0.001	0.119	0.055	0.058	614
20	0.145	0.032	0.060	0.145	0.089	0.017	614

Note: In the frequency range of 1k-10M, except the fundamental frequency, other transmissions of the power transmission system are less than 20dB lower than the maximum fundamental transmission, so it is not necessary to evaluate.

5. Photographs Of Test Set-Up









STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****