

# TEST REPORT

Applicant Name : Shenzhen Huion Trend Technology Co., Ltd.  
Address : Huion Science and Technology Park, Keji 1st Road, Bao'an District,  
Shenzhen China

Report Number : RA221230-64660E-RF-00A  
FCC ID: 2A8IG-D226

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Creative Pen Computer  
Model No.: KS1601  
Multiple Model(s) No.: KS1301,KT1001,KT1101,KT1201, KT1601  
Trade Mark:




Date Received: 2022/12/30  
Report Date: 2023/02/27

|              |       |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:



Andy Yu  
EMC Engineer

## Approved By:



Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

|                                                                          |           |
|--------------------------------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                                   | <b>4</b>  |
| <b>GENERAL INFORMATION.....</b>                                          | <b>5</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                 | 5         |
| OBJECTIVE .....                                                          | 5         |
| TEST METHODOLOGY .....                                                   | 5         |
| MEASUREMENT UNCERTAINTY.....                                             | 6         |
| TEST FACILITY .....                                                      | 6         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                    | <b>7</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                  | 7         |
| EUT EXERCISE SOFTWARE .....                                              | 7         |
| SPECIAL ACCESSORIES.....                                                 | 7         |
| EQUIPMENT MODIFICATIONS .....                                            | 7         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                 | 7         |
| EXTERNAL I/O CABLE.....                                                  | 7         |
| BLOCK DIAGRAM OF TEST SETUP .....                                        | 8         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                     | <b>9</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                         | <b>10</b> |
| <b>FCC§15.247 (I), §1.1307 (B) (1) &amp; §2.1093 – RF EXPOSURE .....</b> | <b>11</b> |
| APPLICABLE STANDARD .....                                                | 11        |
| <b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>                           | <b>12</b> |
| APPLICABLE STANDARD .....                                                | 12        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                     | 12        |
| <b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>               | <b>13</b> |
| APPLICABLE STANDARD .....                                                | 13        |
| EUT SETUP .....                                                          | 13        |
| EMI TEST RECEIVER SETUP.....                                             | 13        |
| TEST PROCEDURE .....                                                     | 13        |
| TRANSD FACTOR & MARGIN CALCULATION.....                                  | 14        |
| TEST DATA .....                                                          | 14        |
| <b>FCC §15.205, §15.209 &amp; §15.247(D) – RADIATED EMISSIONS .....</b>  | <b>17</b> |
| APPLICABLE STANDARD .....                                                | 17        |
| EUT SETUP .....                                                          | 17        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                        | 18        |
| TEST PROCEDURE .....                                                     | 18        |
| FACTOR & MARGIN CALCULATION .....                                        | 18        |
| TEST DATA .....                                                          | 18        |
| <b>FCC §15.247(A) (1)-CHANNEL SEPARATION TEST .....</b>                  | <b>26</b> |
| APPLICABLE STANDARD .....                                                | 26        |
| TEST PROCEDURE .....                                                     | 26        |
| TEST DATA .....                                                          | 26        |

|                                                                                         |           |
|-----------------------------------------------------------------------------------------|-----------|
| <b>FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b> | <b>29</b> |
| APPLICABLE STANDARD .....                                                               | 29        |
| TEST PROCEDURE .....                                                                    | 29        |
| TEST DATA .....                                                                         | 30        |
| <b>FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST .....</b>                  | <b>40</b> |
| APPLICABLE STANDARD .....                                                               | 40        |
| TEST PROCEDURE .....                                                                    | 40        |
| TEST DATA .....                                                                         | 40        |
| <b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....</b>                   | <b>43</b> |
| APPLICABLE STANDARD .....                                                               | 43        |
| TEST PROCEDURE .....                                                                    | 43        |
| TEST DATA .....                                                                         | 43        |
| <b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>                         | <b>54</b> |
| APPLICABLE STANDARD .....                                                               | 54        |
| TEST PROCEDURE .....                                                                    | 54        |
| TEST DATA .....                                                                         | 54        |
| <b>FCC §15.247(D) - BAND EDGES TESTING.....</b>                                         | <b>61</b> |
| APPLICABLE STANDARD .....                                                               | 61        |
| TEST PROCEDURE .....                                                                    | 61        |
| TEST DATA .....                                                                         | 61        |

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number          | Description of Revision | Date of Revision |
|-----------------|------------------------|-------------------------|------------------|
| 0               | RA221230-64660E-RF-00A | Original Report         | 2023-02-27       |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                        |                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------|
| Product                | Creative Pen Computer                                                                                        |
| Tested Model           | KS1601                                                                                                       |
| Multiple Models        | KS1301,KT1001,KT1101,KT1201, KT1601<br>(model difference see product declaration letter of similarity)       |
| Frequency Range        | Bluetooth: 2402~2480MHz                                                                                      |
| Transmit Peak Power    | 3.41dBm                                                                                                      |
| Modulation Technique   | Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK                                                                       |
| Antenna Specification* | -2.03dBi (provided by the applicant)                                                                         |
| Voltage Range          | DC 15.4V from battery or DC 5V/9V/12V/15V/20V from adapter                                                   |
| Sample serial number   | 1WNZ for Conducted and Radiated Emissions Test<br>1WO0 for RF Conducted Test<br>(Assigned by ATC)            |
| Sample/EUT Status      | Good condition                                                                                               |
| Adapter Information    | Model: RH-PD65W<br>Input: AC 100-240V,50/60Hz,1.5A<br>Output: DC 5V,3A/9V,3A/12V,3A/15V,3A/20V,3.25A,65W max |

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

| Parameter                          |                 | Uncertainty            |
|------------------------------------|-----------------|------------------------|
| Occupied Channel Bandwidth         |                 | 5%                     |
| RF Frequency                       |                 | $0.082 \times 10^{-7}$ |
| RF output power, conducted         |                 | 0.73dB                 |
| Unwanted Emission, conducted       |                 | 1.6dB                  |
| AC Power Lines Conducted Emissions |                 | 2.72dB                 |
| Audio Frequency Response           |                 | 0.1dB                  |
| Low Pass Filter Response           |                 | 1.2dB                  |
| Modulation Limiting                |                 | 1%                     |
| Emissions,<br>Radiated             | 9kHz - 30MHz    | 2.66dB                 |
|                                    | 30MHz - 1GHz    | 4.28dB                 |
|                                    | 1GHz - 18GHz    | 4.98dB                 |
|                                    | 18GHz - 26.5GHz | 5.06dB                 |
|                                    | 26.5GHz - 40GHz | 4.72dB                 |
| Temperature                        |                 | 1°C                    |
| Humidity                           |                 | 6%                     |
| Supply voltages                    |                 | 0.4%                   |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“RTLBTAPP.exe”\* exercise software was used to the EUT tested and the power level is 0X45\*. The software and power level was provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description | Model   | Serial Number |
|--------------|-------------|---------|---------------|
| Unknown      | Earphone    | Unknown | Unknown       |
| ATC          | Load        | Unknown | Unknown       |

### External I/O Cable


| Cable Description                    | Length (m) | From Port  | To            |
|--------------------------------------|------------|------------|---------------|
| Un-shielding Un-Detachable AC Cable  | 1.2        | Receptacle | LISN/AC Mains |
| Un-shielding Detachable Type-C Cable | 1.2        | Adapter    | EUT           |
| Un-shielding Un-Detachable DC Cable  | 0.2        | Load       | EUT           |

## Block Diagram of Test Setup

For conducted emission:

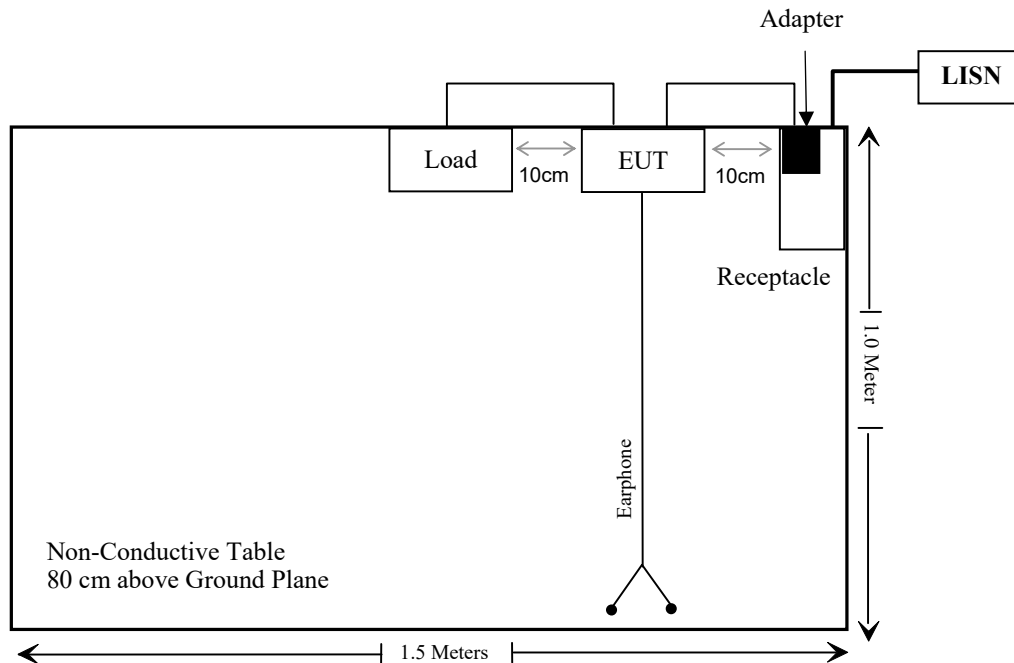

For Radiated Emissions:

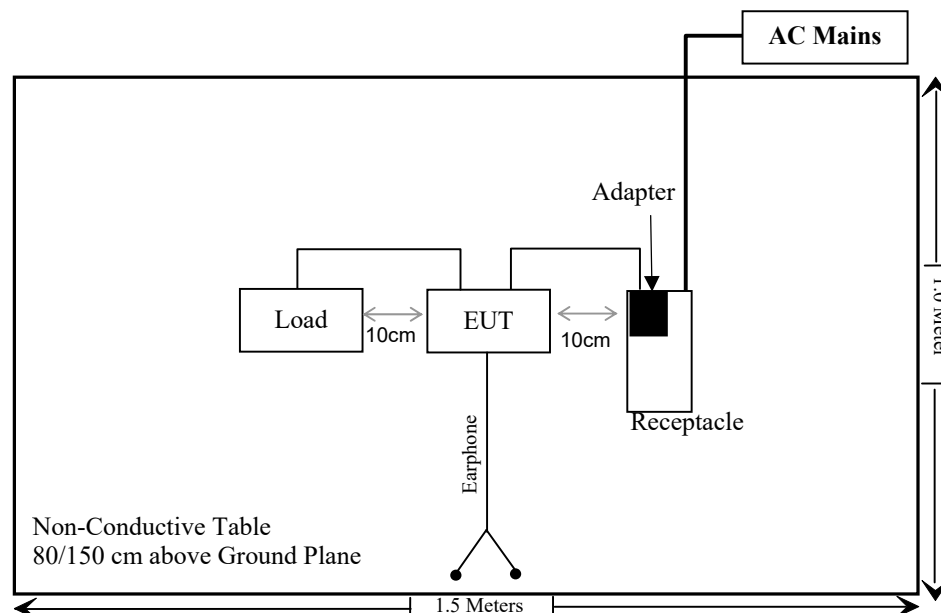

**SUMMARY OF TEST RESULTS**

| FCC Rules                              | Description of Test                               | Result    |
|----------------------------------------|---------------------------------------------------|-----------|
| §15.247 (i), §1.1307 (b) (3) & §2.1093 | RF Exposure                                       | Compliant |
| §15.203                                | Antenna Requirement                               | Compliant |
| §15.207(a)                             | AC Line Conducted Emissions                       | Compliant |
| §15.205, §15.209 & §15.247(d)          | Radiated Emissions                                | Compliant |
| §15.247(a)(1)                          | 20 dB Emission Bandwidth & 99% Occupied Bandwidth | Compliant |
| §15.247(a)(1)                          | Channel Separation Test                           | Compliant |
| §15.247(a)(1)(iii)                     | Time of Occupancy (Dwell Time)                    | Compliant |
| §15.247(a)(1)(iii)                     | Quantity of hopping channel Test                  | Compliant |
| §15.247(b)(1)                          | Peak Output Power Measurement                     | Compliant |
| §15.247(d)                             | Band edges                                        | Compliant |

**TEST EQUIPMENT LIST**

| Manufacturer                                     | Description       | Model             | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------------------------|-------------------|-------------------|---------------|------------------|----------------------|
| <b>Conducted emission test</b>                   |                   |                   |               |                  |                      |
| Rohde& Schwarz                                   | EMI Test Receiver | ESCI              | 100784        | 2022/11/25       | 2023/11/24           |
| Rohde & Schwarz                                  | L.I.S.N.          | ENV216            | 101314        | 2022/11/25       | 2023/11/24           |
| Anritsu Corp                                     | 50 Coaxial Switch | MP59B             | 6100237248    | 2022/12/07       | 2023/12/06           |
| Unknown                                          | RF Coaxial Cable  | No.17             | N0350         | 2022/11/25       | 2023/11/24           |
| Conducted Emission Test Software: e3 19821b (V9) |                   |                   |               |                  |                      |
| <b>Radiated emission test</b>                    |                   |                   |               |                  |                      |
| Rohde& Schwarz                                   | Test Receiver     | ESR               | 102725        | 2022/11/25       | 2023/11/24           |
| Rohde&Schwarz                                    | Spectrum Analyzer | FSV40             | 101949        | 2022/11/25       | 2023/11/24           |
| SONOMA INSTRUMENT                                | Amplifier         | 310 N             | 186131        | 2022/11/08       | 2023/11/07           |
| A.H. Systems, inc.                               | Preamplifier      | PAM-0118P         | 135           | 2022/11/08       | 2023/11/07           |
| Quinstar                                         | Amplifier         | QLW-18405536-J0   | 15964001002   | 2022/11/08       | 2023/11/07           |
| Schwarzbeck                                      | Bilog Antenna     | VULB9163          | 9163-323      | 2021/07/06       | 2024/07/05           |
| Schwarzbeck                                      | Horn Antenna      | BBHA9120D         | 9120D-1067    | 2022/11/30       | 2025/11/29           |
| Schwarzbeck                                      | HORN ANTENNA      | BBHA9170          | 9170-359      | 2022/12/26       | 2025/12/25           |
| Radiated Emission Test Software: e3 19821b (V9)  |                   |                   |               |                  |                      |
| Unknown                                          | RF Coaxial Cable  | No.10             | N050          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable  | No.11             | N1000         | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable  | No.12             | N040          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable  | No.13             | N300          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable  | No.14             | N800          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable  | No.15             | N600          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable  | No.16             | N650          | 2022/11/25       | 2023/11/24           |
| Wainwright                                       | High Pass Filter  | WHKX3.6/18 G-10SS | 5             | 2022/11/25       | 2023/11/24           |
| <b>RF Conducted Test</b>                         |                   |                   |               |                  |                      |
| Rohde&Schwarz                                    | Spectrum Analyzer | FSV-40            | 101495        | 2022/11/25       | 2023/11/24           |
| Rohde&Schwarz                                    | Spectrum Analyzer | FSU26             | 200982        | 2022/07/04       | 2023/07/03           |
| WEINSCHL                                         | 10dB Attenuator   | 5324              | AU 3842       | 2022/11/25       | 2023/11/24           |

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

### Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

### Measurement Result

For worst case:

| Mode | Frequency (MHz) | Max tune-up conducted power (dBm) | Max tune-up conducted power (mW) | Distance (mm) | Calculated value | Threshold (1-g SAR) | SAR Test Exclusion |
|------|-----------------|-----------------------------------|----------------------------------|---------------|------------------|---------------------|--------------------|
| BT   | 2402-2480       | 3.5                               | 2.24                             | 5             | 0.7              | 3.0                 | Yes                |

**Result: No SAR test is required**

## FCC §15.203 – ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain is -2.03dBi, fulfill the requirement of this section. Please refer to the EUT photos.

| Antenna Type | Antenna Gain | Impedance   | Frequency Range |
|--------------|--------------|-------------|-----------------|
| FPC          | -2.03dBi     | 50 $\Omega$ | 2.4~2.5GHz      |

**Result:** Compliance

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup



Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data


### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 23°C      |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by lipa on 2023-02-01.*


*EUT operation mode: Transmitting(worst case is BDR high channel)*

## AC 120V/60 Hz, Line

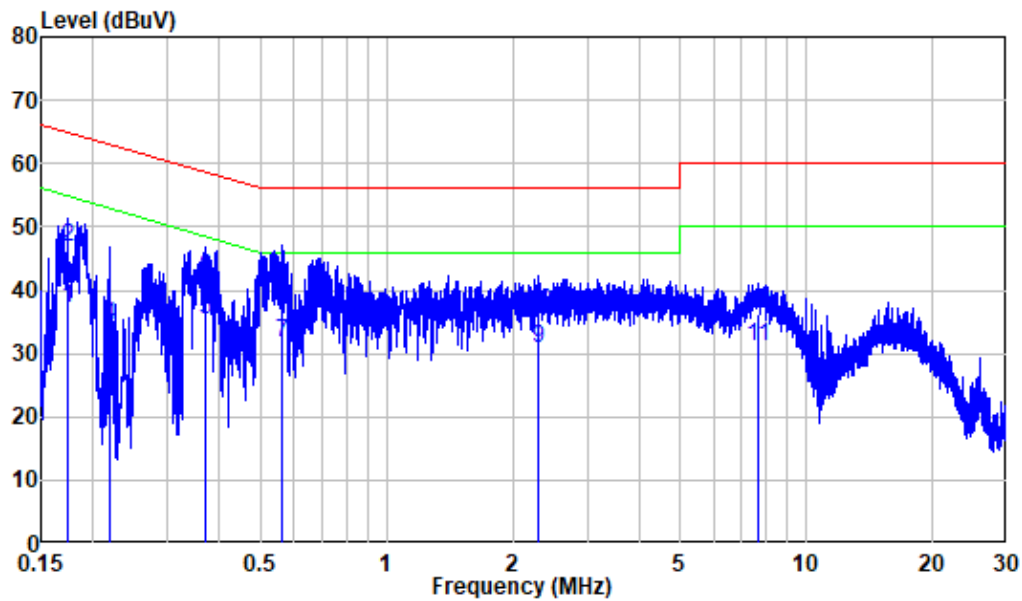

Site : Shielding Room  
 Condition: Line  
 Job No. : RA221230-64660E-RF  
 Mode : BT  
 Power : AC 120V 60Hz

|    | Freq  | Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|-------|--------|------------|-------|------------|------------|---------|
|    | MHz   | dB     | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.174 | 9.90   | 27.09      | 36.99 | 54.77      | -17.78     | Average |
| 2  | 0.174 | 9.90   | 36.75      | 46.65 | 64.77      | -18.12     | QP      |
| 3  | 0.219 | 9.89   | 13.08      | 22.97 | 52.88      | -29.91     | Average |
| 4  | 0.219 | 9.89   | 24.66      | 34.55 | 62.88      | -28.33     | QP      |
| 5  | 0.368 | 9.83   | 25.36      | 35.19 | 48.54      | -13.35     | Average |
| 6  | 0.368 | 9.83   | 32.24      | 42.07 | 58.54      | -16.47     | QP      |
| 7  | 0.561 | 9.84   | 21.98      | 31.82 | 46.00      | -14.18     | Average |
| 8  | 0.561 | 9.84   | 30.40      | 40.24 | 56.00      | -15.76     | QP      |
| 9  | 2.297 | 9.92   | 20.73      | 30.65 | 46.00      | -15.35     | Average |
| 10 | 2.297 | 9.92   | 26.74      | 36.66 | 56.00      | -19.34     | QP      |
| 11 | 7.636 | 9.98   | 21.24      | 31.22 | 50.00      | -18.78     | Average |
| 12 | 7.636 | 9.98   | 26.28      | 36.26 | 60.00      | -23.74     | QP      |

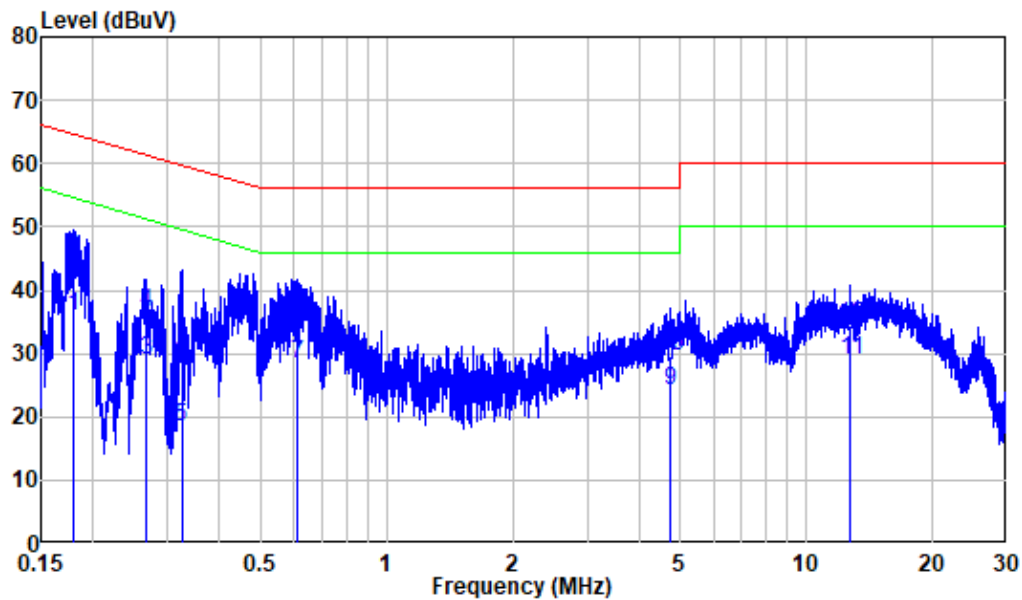**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
 Condition: Neutral  
 Job No. : RA221230-64660E-RF  
 Mode : BT  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.180  | 9.80   | 26.13         | 35.93 | 54.49         | -18.56        | Average |
| 2  | 0.180  | 9.80   | 35.05         | 44.85 | 64.49         | -19.64        | QP      |
| 3  | 0.266  | 9.83   | 19.05         | 28.88 | 51.24         | -22.36        | Average |
| 4  | 0.266  | 9.83   | 26.62         | 36.45 | 61.24         | -24.79        | QP      |
| 5  | 0.324  | 9.85   | 8.71          | 18.56 | 49.59         | -31.03        | Average |
| 6  | 0.324  | 9.85   | 18.58         | 28.43 | 59.59         | -31.16        | QP      |
| 7  | 0.615  | 9.85   | 18.61         | 28.46 | 46.00         | -17.54        | Average |
| 8  | 0.615  | 9.85   | 26.31         | 36.16 | 56.00         | -19.84        | QP      |
| 9  | 4.731  | 9.91   | 14.19         | 24.10 | 46.00         | -21.90        | Average |
| 10 | 4.731  | 9.91   | 19.59         | 29.50 | 56.00         | -26.50        | QP      |
| 11 | 12.733 | 10.03  | 19.09         | 29.12 | 50.00         | -20.88        | Average |
| 12 | 12.733 | 10.03  | 24.27         | 34.30 | 60.00         | -25.70        | QP      |

## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:



Above 1GHz:

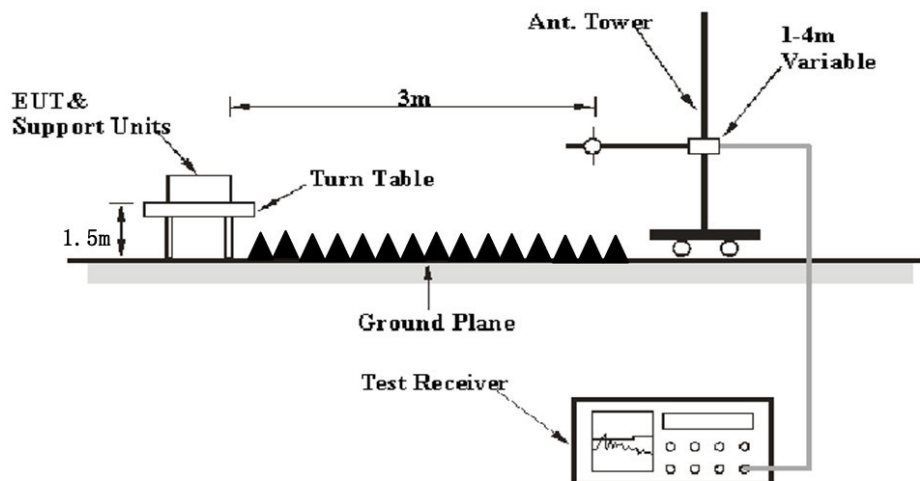

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | PK          |

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N1*L1+N2*L2+...Nn-1*Ln-1+Nn*Ln$ ,

Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20\*log(Duty cycle)

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24~25.5℃  |
| Relative Humidity: | 52~56%    |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Jimi Zheng on 2023-02-01 for below 1GHz, Level Li on 2023-01-13 for above 1GHz*


EUT operation mode: Transmitting

Note: Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded

**Below 1GHz:** (worst case is 8DPSK high channel)

Note: When the test result of Peak was below the limit of QP more than 6dB, just the peak value was recorded.


Horizontal

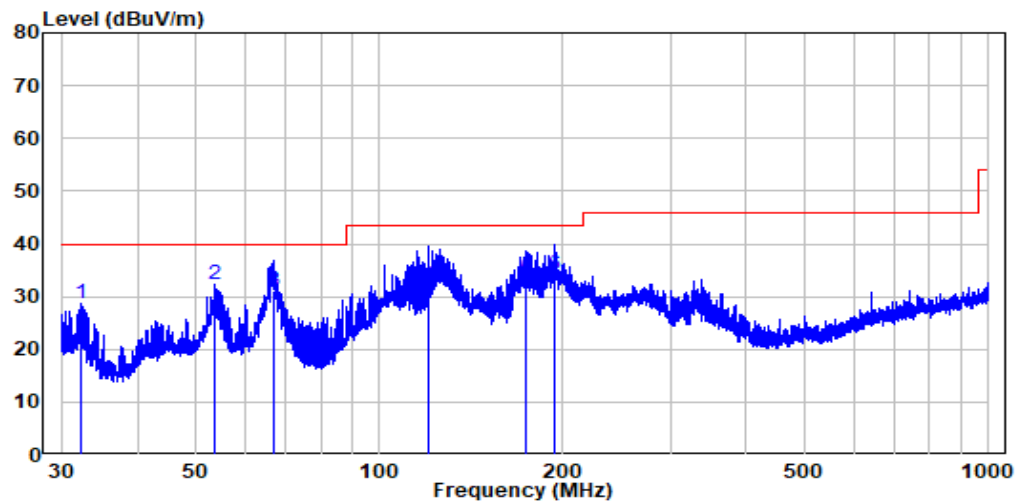

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA221230-64660E-RF  
Test Mode: BT

|   | Freq    | Factor | Read Level | Level  | Limit  | Over   | Remark |
|---|---------|--------|------------|--------|--------|--------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 | 32.321  | -12.12 | 40.71      | 28.59  | 40.00  | -11.41 | Peak   |
| 2 | 53.740  | -10.30 | 42.70      | 32.40  | 40.00  | -7.60  | Peak   |
| 3 | 66.791  | -13.26 | 44.40      | 31.14  | 40.00  | -8.86  | QP     |
| 4 | 120.277 | -13.59 | 45.61      | 32.02  | 43.50  | -11.48 | QP     |
| 5 | 174.119 | -13.17 | 46.50      | 33.33  | 43.50  | -10.17 | QP     |
| 6 | 194.113 | -11.32 | 45.49      | 34.17  | 43.50  | -9.33  | QP     |

Vertical

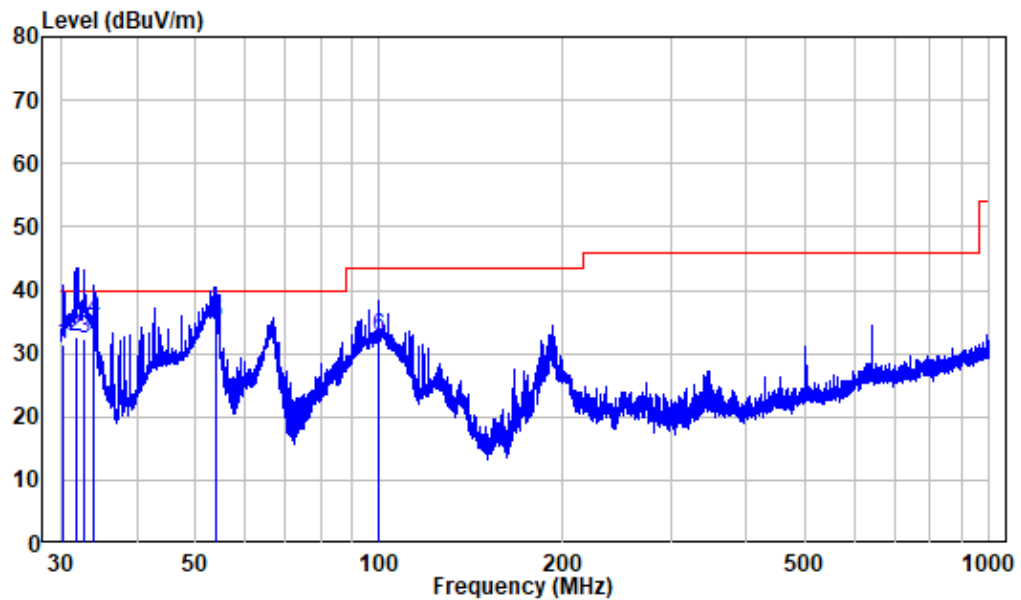

Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA221230-64660E-RF  
Test Mode: BT

|   | Freq Factor |        | Read Level | Level  | Limit  | Over   | Remark |
|---|-------------|--------|------------|--------|--------|--------|--------|
|   | MHz         | dB/m   | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 | 30.357      | -12.35 | 43.89      | 31.54  | 40.00  | -8.46  | QP     |
| 2 | 31.745      | -12.21 | 44.71      | 32.50  | 40.00  | -7.50  | QP     |
| 3 | 32.820      | -12.05 | 44.31      | 32.26  | 40.00  | -7.74  | QP     |
| 4 | 34.066      | -11.83 | 47.30      | 35.47  | 40.00  | -4.53  | QP     |
| 5 | 53.787      | -10.31 | 45.10      | 34.79  | 40.00  | -5.21  | QP     |
| 6 | 99.659      | -11.88 | 44.60      | 32.72  | 43.50  | -10.78 | QP     |

**Above 1GHz: (worst case for 8DPSK)**

| Frequency<br>(MHz)     | Receiver          |        | Turntable<br>Degree | Rx Antenna    |                | Factor<br>(dB/m) | Corrected.<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|------------------------|-------------------|--------|---------------------|---------------|----------------|------------------|-------------------------------------|-------------------|----------------|
|                        | Reading<br>(dBμV) | PK/Ave |                     | Height<br>(m) | Polar<br>(H/V) |                  |                                     |                   |                |
| Low Channel 2402MHz    |                   |        |                     |               |                |                  |                                     |                   |                |
| 2310                   | 61.35             | PK     | 261                 | 1.7           | H              | -7.24            | 54.11                               | 74                | -19.89         |
| 2310                   | 61.26             | PK     | 347                 | 1.6           | V              | -7.24            | 54.02                               | 74                | -19.98         |
| 2390                   | 63.24             | PK     | 222                 | 2.1           | H              | -7.22            | 56.02                               | 74                | -17.98         |
| 2390                   | 62.86             | PK     | 137                 | 1.9           | V              | -7.22            | 55.64                               | 74                | -18.36         |
| 4804                   | 57.32             | PK     | 131                 | 2.1           | H              | -3.51            | 53.81                               | 74                | -20.19         |
| 4804                   | 57.47             | PK     | 358                 | 2.1           | V              | -3.51            | 53.96                               | 74                | -20.04         |
| Middle Channel 2441MHz |                   |        |                     |               |                |                  |                                     |                   |                |
| 4882                   | 56.88             | PK     | 81                  | 1.2           | H              | -3.37            | 53.51                               | 74                | -20.49         |
| 4882                   | 57.13             | PK     | 268                 | 1.2           | V              | -3.37            | 53.76                               | 74                | -20.24         |
| High Channel 2480MHz   |                   |        |                     |               |                |                  |                                     |                   |                |
| 2483.5                 | 64.54             | PK     | 237                 | 2.3           | H              | -7.20            | 57.34                               | 74                | -16.66         |
| 2483.5                 | 63.60             | PK     | 180                 | 1.7           | V              | -7.20            | 56.40                               | 74                | -17.60         |
| 2500                   | 63.32             | PK     | 9                   | 2.5           | H              | -7.18            | 56.14                               | 74                | -17.86         |
| 2500                   | 63.00             | PK     | 320                 | 1.7           | V              | -7.18            | 55.82                               | 74                | -18.18         |
| 4960                   | 56.32             | PK     | 134                 | 1.4           | H              | -3.01            | 53.31                               | 74                | -20.69         |
| 4960                   | 56.34             | PK     | 45                  | 1.4           | V              | -3.01            | 53.33                               | 74                | -20.67         |

| Field Strength of Average |                                        |                |                                            |                                     |                   |                |           |
|---------------------------|----------------------------------------|----------------|--------------------------------------------|-------------------------------------|-------------------|----------------|-----------|
| Frequency<br>(MHz)        | Peak<br>Measurement<br>@3m<br>(dBμV/m) | Polar<br>(H/V) | Duty Cycle<br>Correction<br>Factor<br>(dB) | Corrected.<br>Amplitude<br>(dBμV/m) | FCC Part 15.247   |                |           |
|                           |                                        |                |                                            |                                     | Limit<br>(dBμV/m) | Margin<br>(dB) | Comment   |
| Low Channel 2402MHz       |                                        |                |                                            |                                     |                   |                |           |
| 2310                      | 54.11                                  | H              | -24.81                                     | 29.30                               | 54                | -24.70         | Band Edge |
| 2310                      | 54.02                                  | V              | -24.81                                     | 29.21                               | 54                | -24.79         | Band Edge |
| 2390                      | 56.02                                  | H              | -24.81                                     | 31.21                               | 54                | -22.79         | Band Edge |
| 2390                      | 55.64                                  | V              | -24.81                                     | 30.83                               | 54                | -23.17         | Band Edge |
| 4804                      | 53.81                                  | H              | -24.81                                     | 29.00                               | 54                | -25.00         | Harmonic  |
| 4804                      | 53.96                                  | V              | -24.81                                     | 29.15                               | 54                | -24.85         | Harmonic  |
| Middle Channel 2441MHz    |                                        |                |                                            |                                     |                   |                |           |
| 4882                      | 53.51                                  | H              | -24.81                                     | 28.70                               | 54                | -25.30         | Harmonic  |
| 4882                      | 53.76                                  | V              | -24.81                                     | 28.95                               | 54                | -25.05         | Harmonic  |
| High Channel 2480MHz      |                                        |                |                                            |                                     |                   |                |           |
| 2483.5                    | 57.34                                  | H              | -24.81                                     | 32.53                               | 54                | -21.47         | Band Edge |
| 2483.5                    | 56.40                                  | V              | -24.81                                     | 31.59                               | 54                | -22.41         | Band Edge |
| 2500                      | 56.14                                  | H              | -24.81                                     | 31.33                               | 54                | -22.67         | Band Edge |
| 2500                      | 55.82                                  | V              | -24.81                                     | 31.01                               | 54                | -22.99         | Band Edge |
| 4960                      | 53.31                                  | H              | -24.81                                     | 28.50                               | 54                | -25.50         | Harmonic  |
| 4960                      | 53.33                                  | V              | -24.81                                     | 28.52                               | 54                | -25.48         | Harmonic  |

Note:

Corrected. Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

The worst case duty cycle as below:

Duty cycle = Ton/100ms = 2.875\*2/100=0.0575

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.0575 = -24.81

Duty cycle

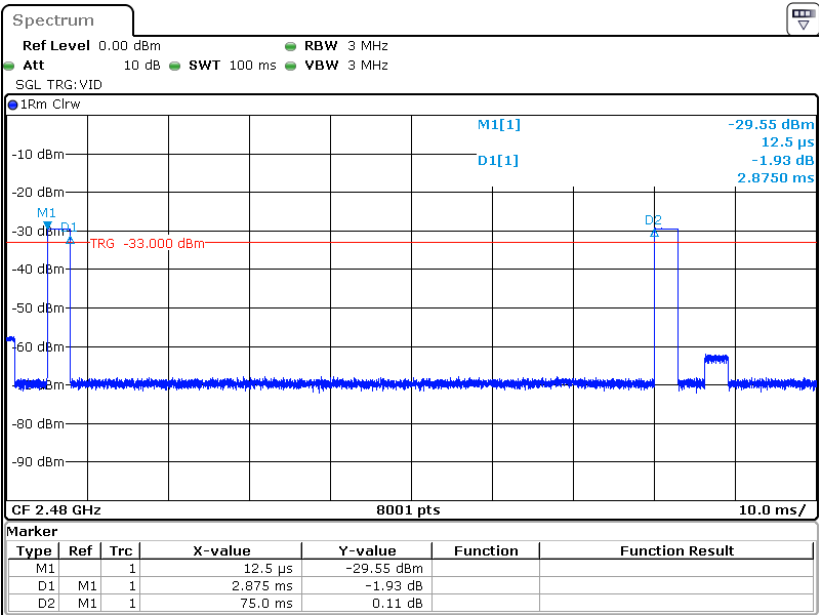


Date: 13.JAN.2023 11:29:22


1 GHz - 18 GHz: (Pre-Scan plots)

Low channel

Horizontal

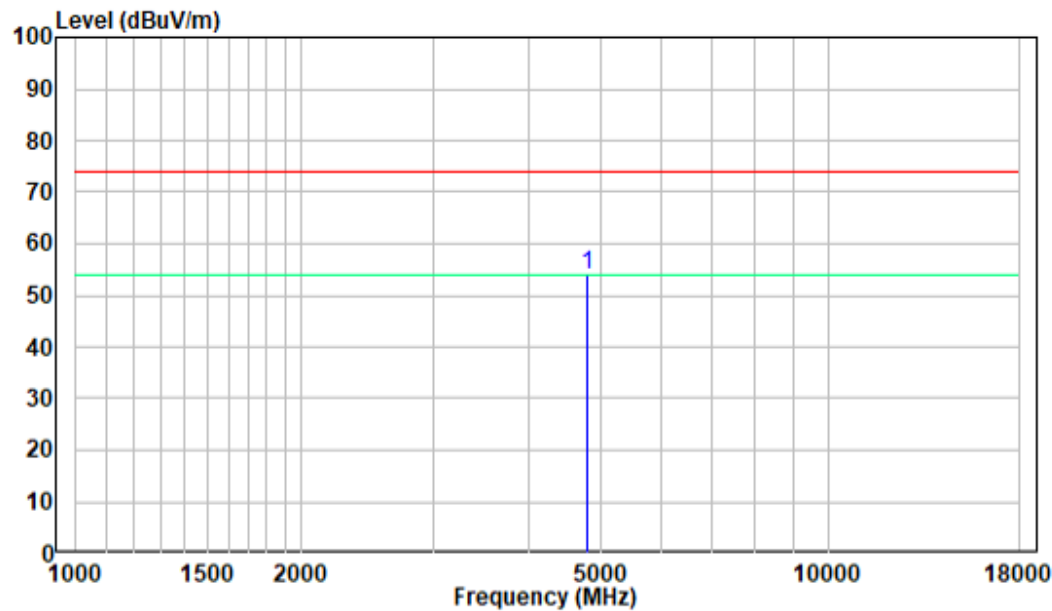


Vertical

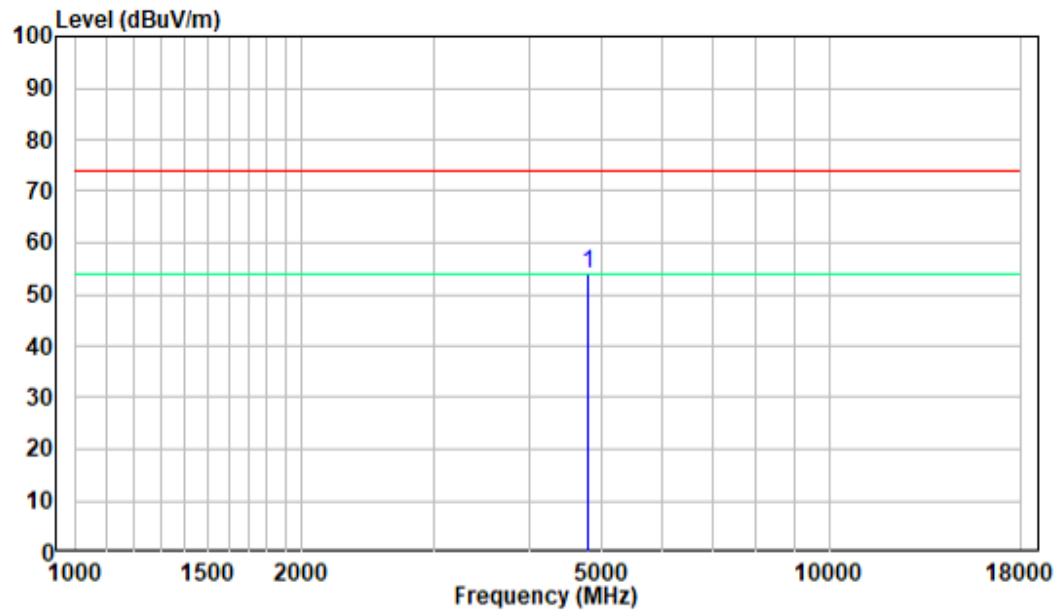


18-25GHz: (Pre-Scan plots)

Low channel

Horizontal

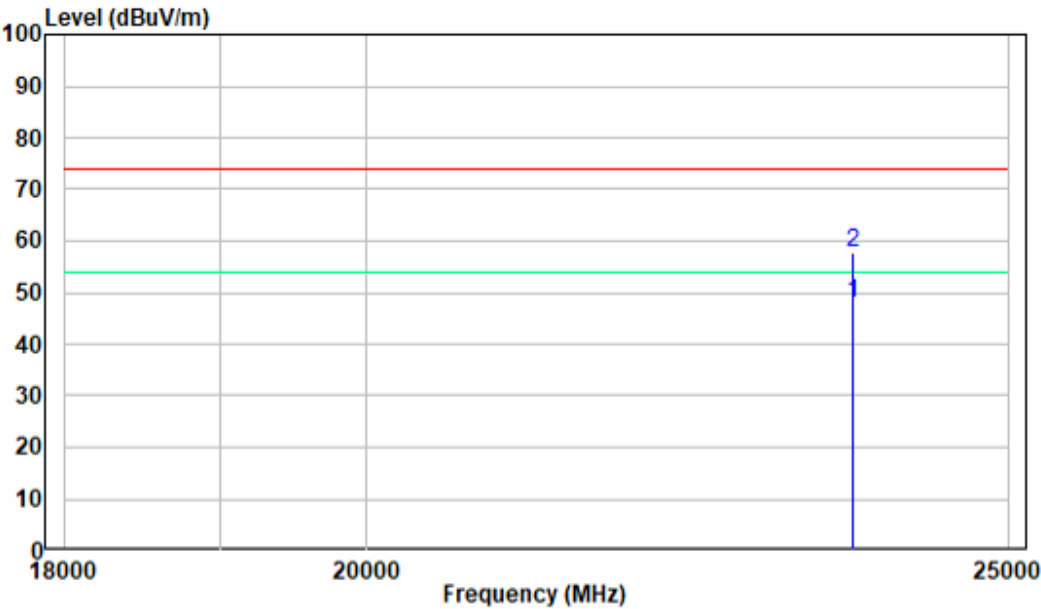

Vertical

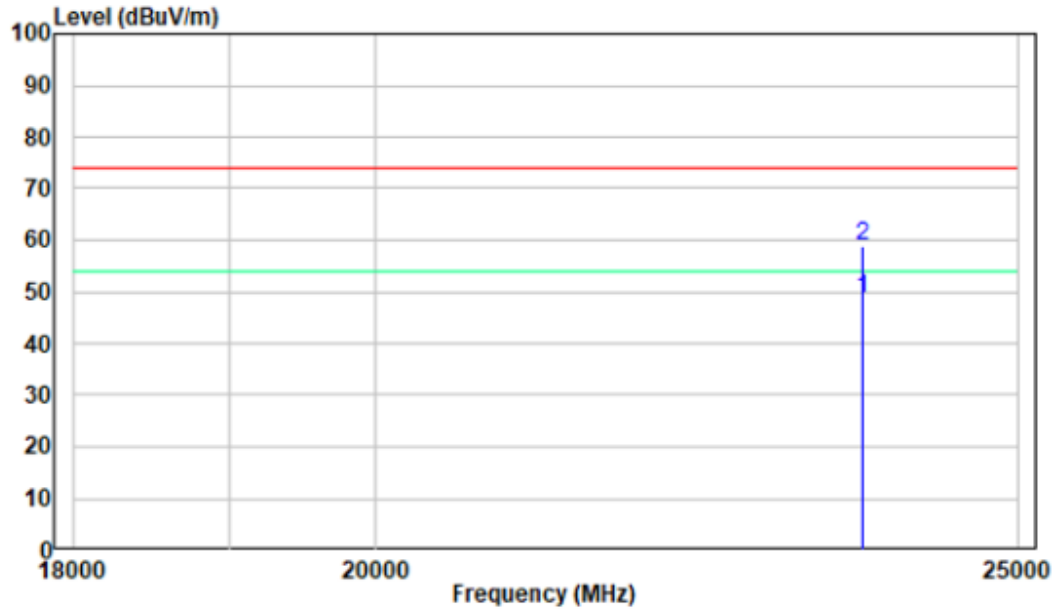

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST


### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

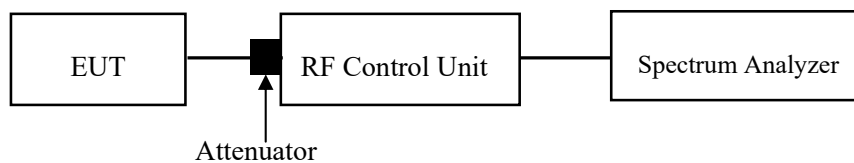

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Andy Yu on 2023-02-07.*


*EUT operation mode: Transmitting*

**Test Result: Pass**


Please refer to following table and plots.

| Test Mode                            | Channel Separation (MHz) | 20 dBc BW (MHz) | Two-thirds of the 20 dB bandwidth (MHz) | Channel Separation Limit            | Result     |
|--------------------------------------|--------------------------|-----------------|-----------------------------------------|-------------------------------------|------------|
| <b>BDR(GFSK)</b>                     |                          |                 |                                         |                                     |            |
| Hopping                              | 1.001                    | 0.966           | 0.644                                   | > two-thirds of the 20 dB bandwidth | Compliance |
| <b>EDR(<math>\pi/4</math>-DQPSK)</b> |                          |                 |                                         |                                     |            |
| Hopping                              | 1.000                    | 1.368           | 0.912                                   | > two-thirds of the 20 dB bandwidth | Compliance |
| <b>EDR(8DPSK)</b>                    |                          |                 |                                         |                                     |            |
| Hopping                              | 1.006                    | 1.353           | 0.902                                   | > two-thirds of the 20 dB bandwidth | Compliance |

### BDR (GFSK)

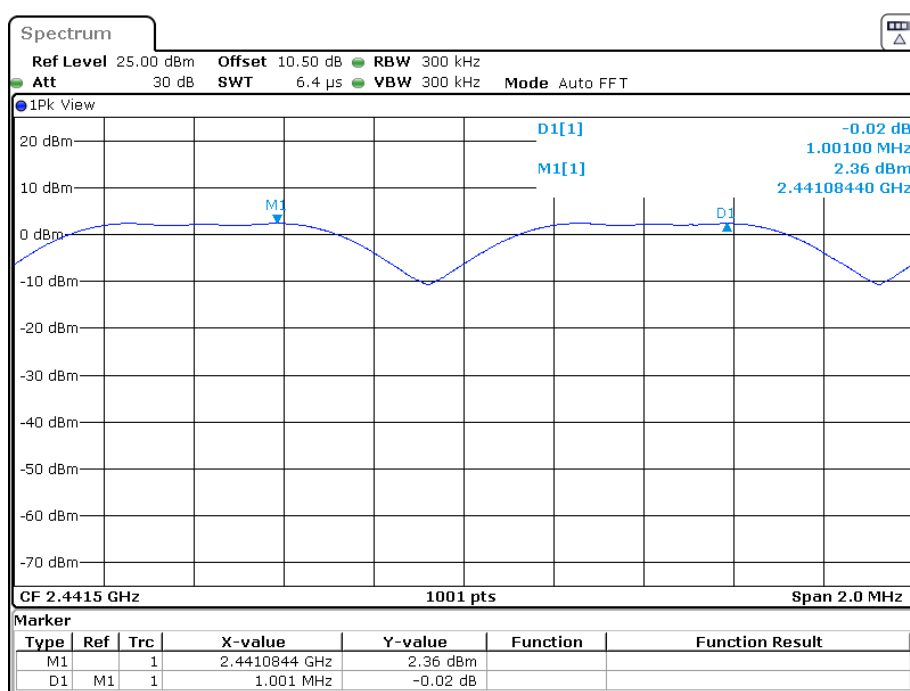


Date: 7.FEB.2023 16:58:28

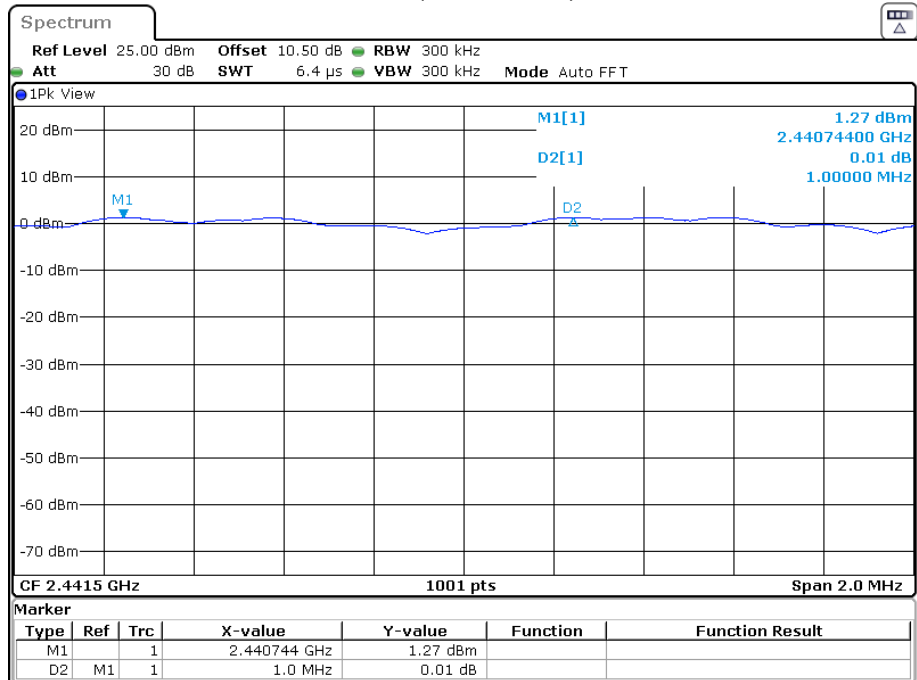EDR ( $\pi/4$ -DQPSK)

Date: 7.FEB.2023 17:02:58

## EDR (8DPSK)

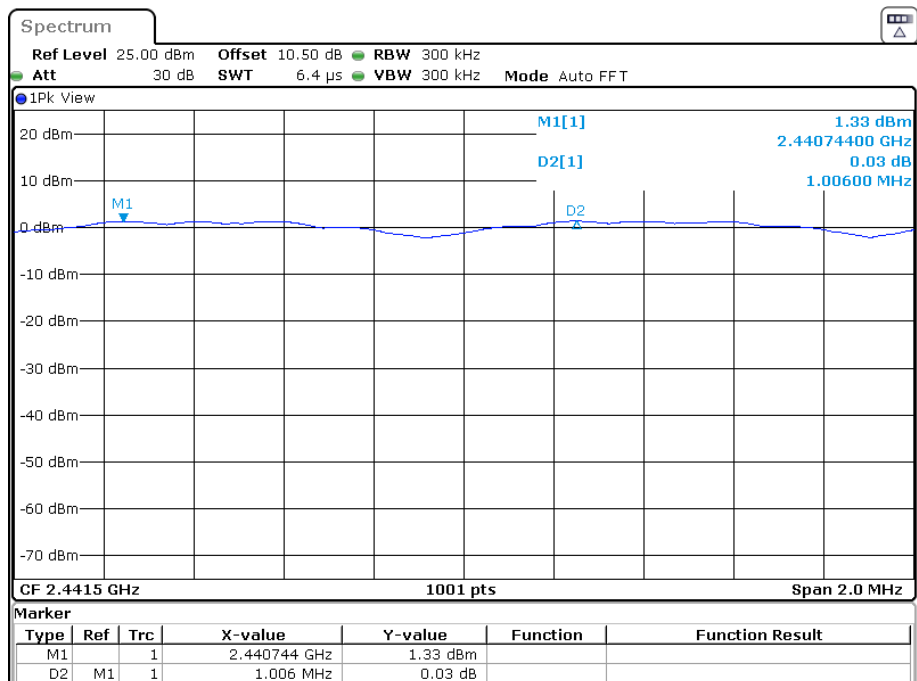

Date: 7.FEB.2023 16:49:34

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

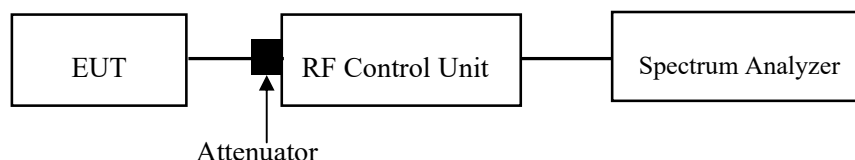

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 56 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Andy Yu on 2023-02-07.*

*EUT operation mode: Transmitting*


**Test Result: Pass**

*Please refer to following table and plots.*

| <b>Mode</b>                               | <b>Channel</b> | <b>Frequency<br/>(MHz)</b> | <b>99% Emission<br/>Bandwidth<br/>(MHz)</b> | <b>20 dB Emission<br/>Bandwidth<br/>(MHz)</b> |
|-------------------------------------------|----------------|----------------------------|---------------------------------------------|-----------------------------------------------|
| <b>BDR<br/>(GFSK)</b>                     | Low            | 2402                       | 0.902                                       | 0.966                                         |
|                                           | Middle         | 2441                       | 0.899                                       | 0.963                                         |
|                                           | High           | 2480                       | 0.902                                       | 0.966                                         |
| <b>EDR<br/>(<math>\pi/4</math>-DQPSK)</b> | Low            | 2402                       | 1.199                                       | 1.368                                         |
|                                           | Middle         | 2441                       | 1.196                                       | 1.368                                         |
|                                           | High           | 2480                       | 1.199                                       | 1.368                                         |
| <b>EDR<br/>(8DPSK)</b>                    | Low            | 2402                       | 1.202                                       | 1.353                                         |
|                                           | Middle         | 2441                       | 1.199                                       | 1.353                                         |
|                                           | High           | 2480                       | 1.199                                       | 1.353                                         |


BDR (GFSK):

20dB Emission Bandwidth, Low Channel

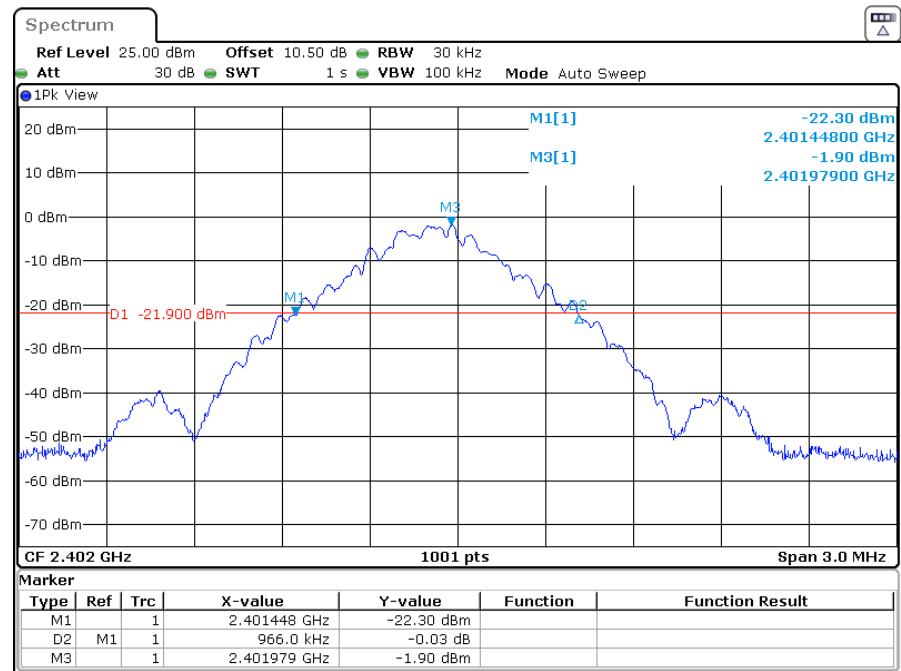


Date: 7.FEB.2023 16:18:48

99% Occupied Bandwidth, Low Channel

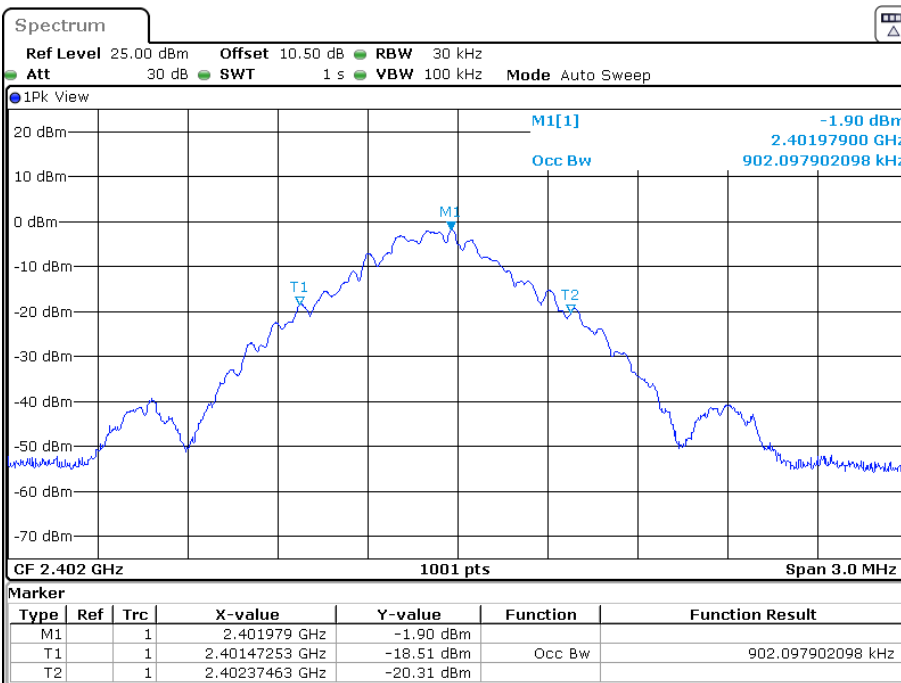


Date: 7.FEB.2023 16:18:27

## 20dB Emission Bandwidth, Middle Channel

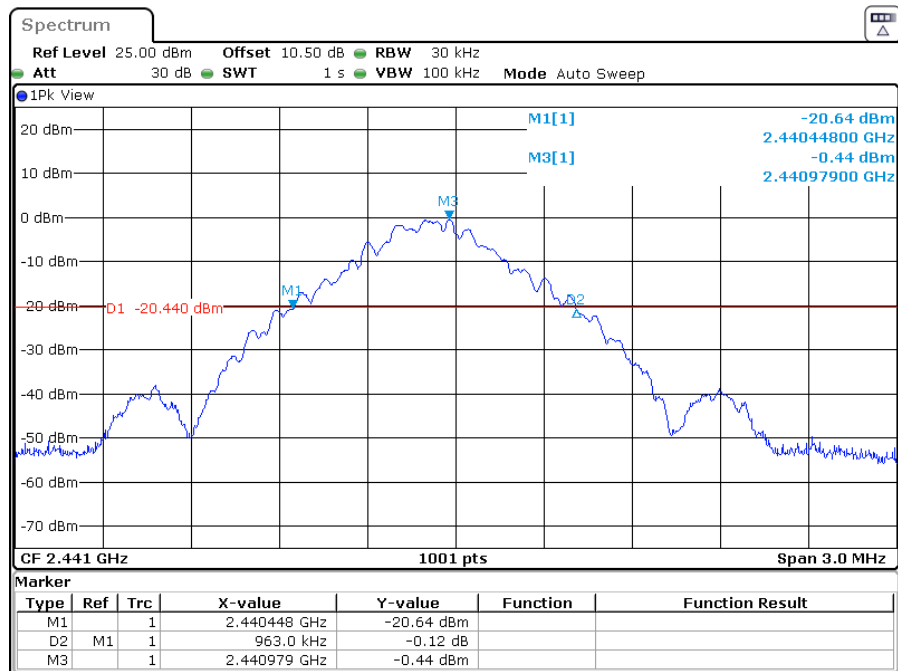


Date: 7.FEB.2023 16:25:11

## 99% Occupied Bandwidth, Middle Channel

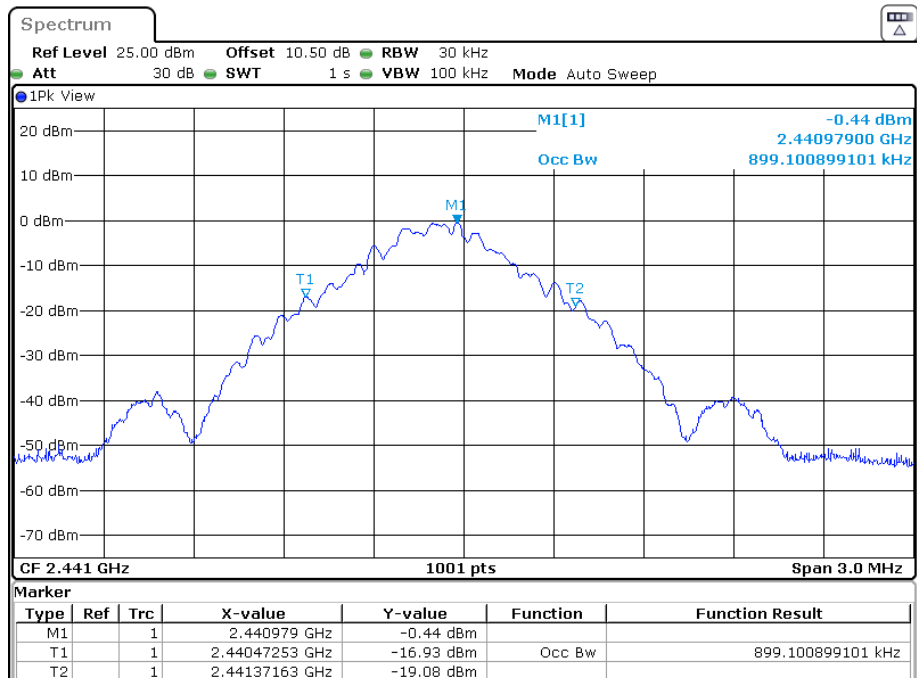


Date: 7.FEB.2023 16:24:50

## 20dB Emission Bandwidth, High Channel

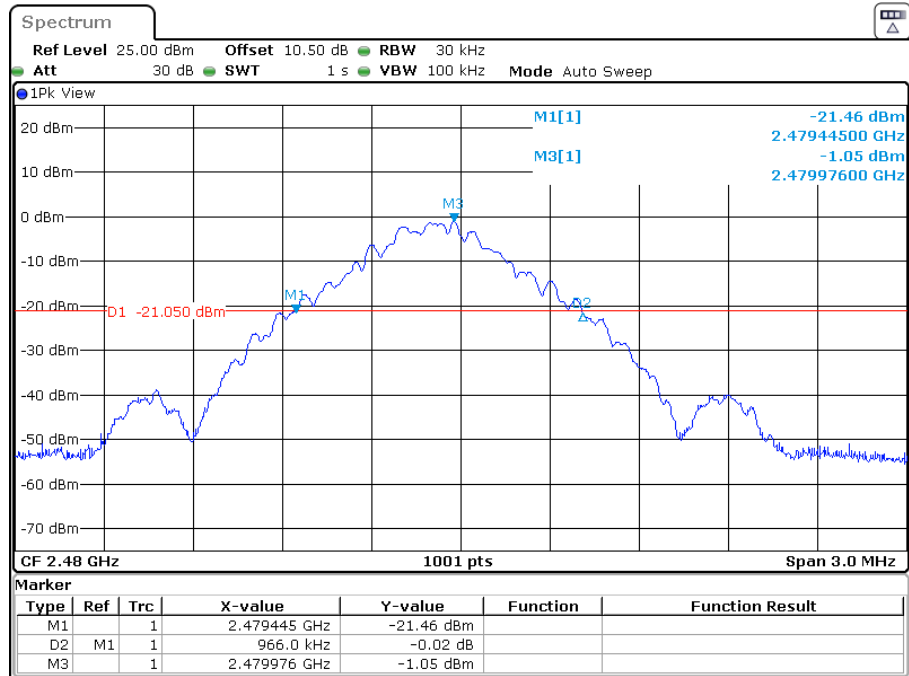

Date: 7.FEB.2023 16:30:31


## 99% Occupied Bandwidth, High Channel

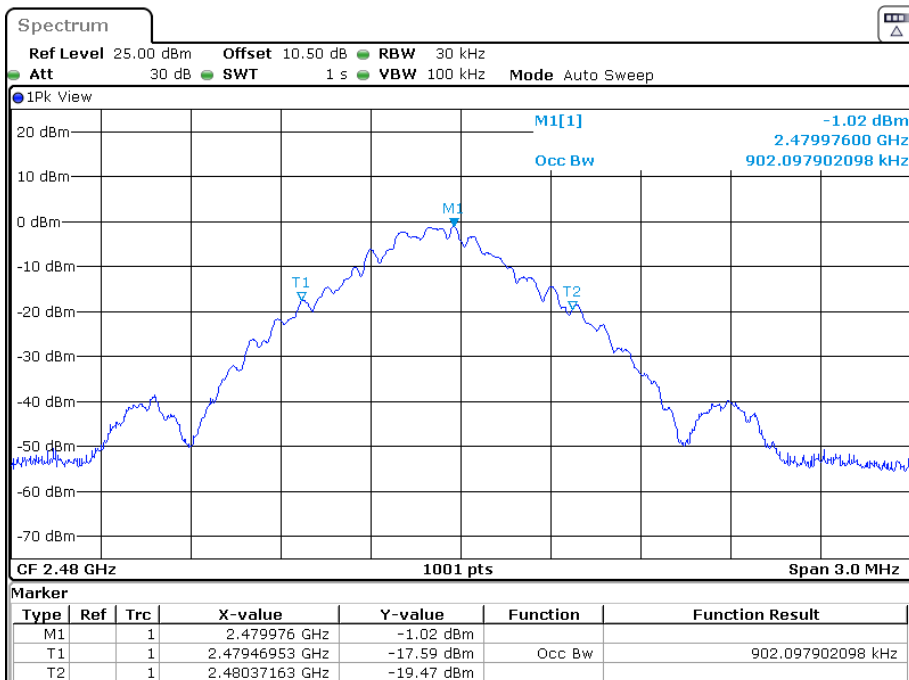

Date: 7.FEB.2023 16:30:11


EDR ( $\pi/4$ -DQPSK):

## 20dB Emission Bandwidth, Low Channel

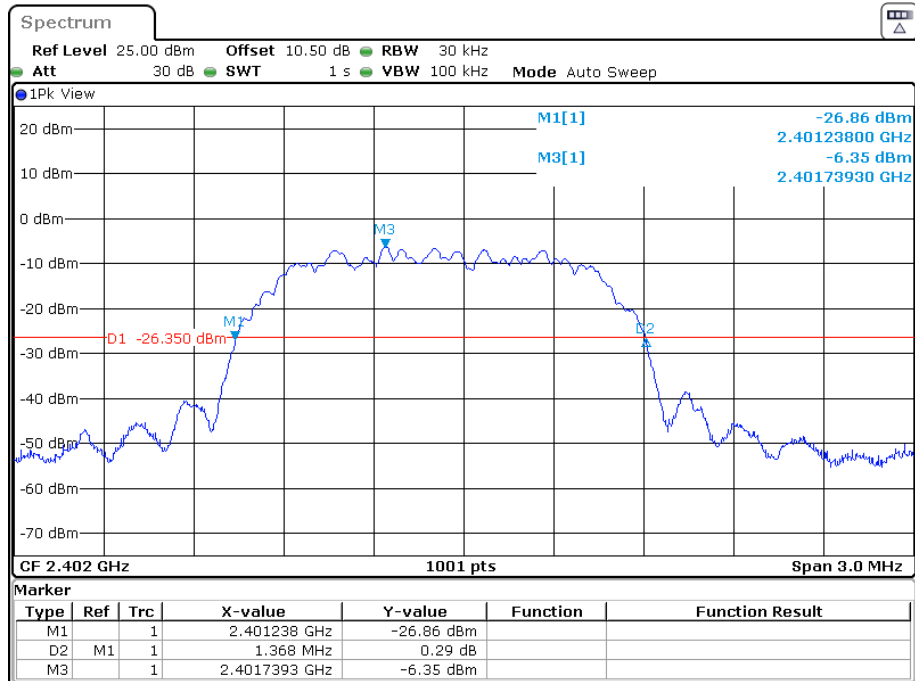


Date: 7.FEB.2023 16:20:39

## 99% Occupied Bandwidth, Low Channel

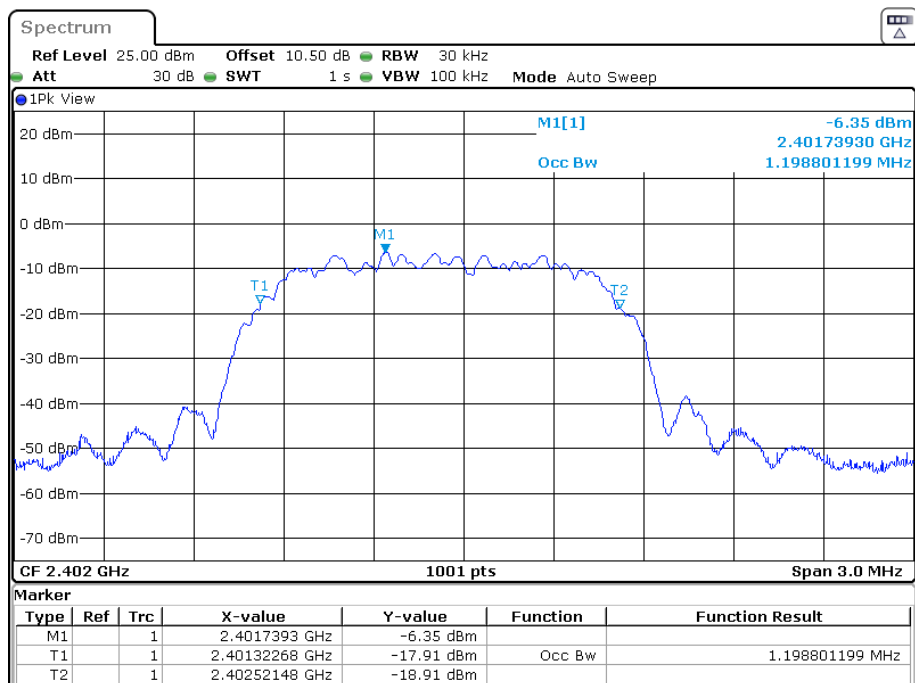


Date: 7.FEB.2023 16:20:07

## 20dB Emission Bandwidth, Middle Channel

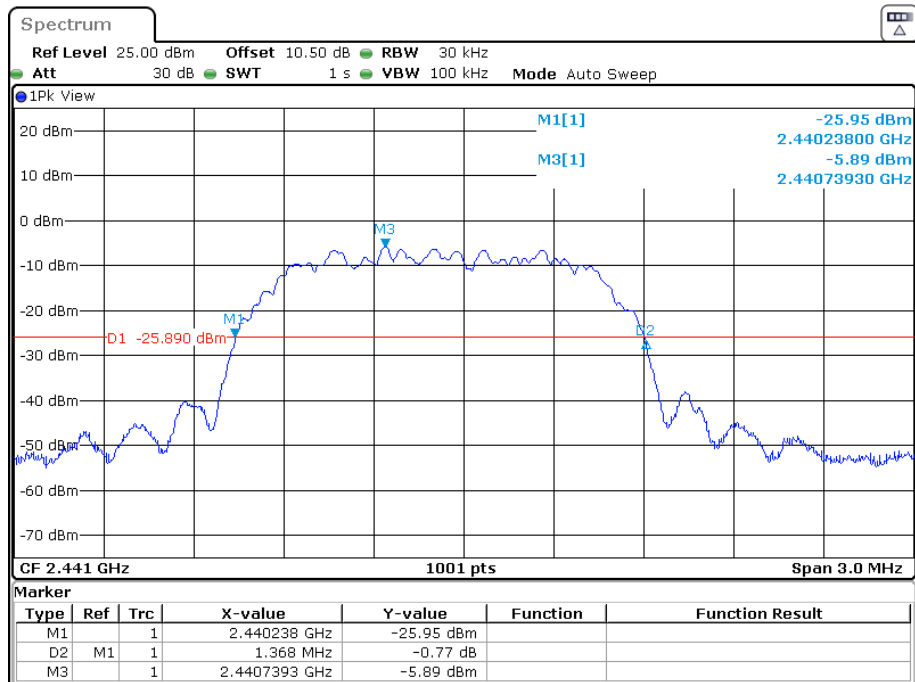


Date: 7.FEB.2023 16:26:45

## 99% Occupied Bandwidth, Middle Channel

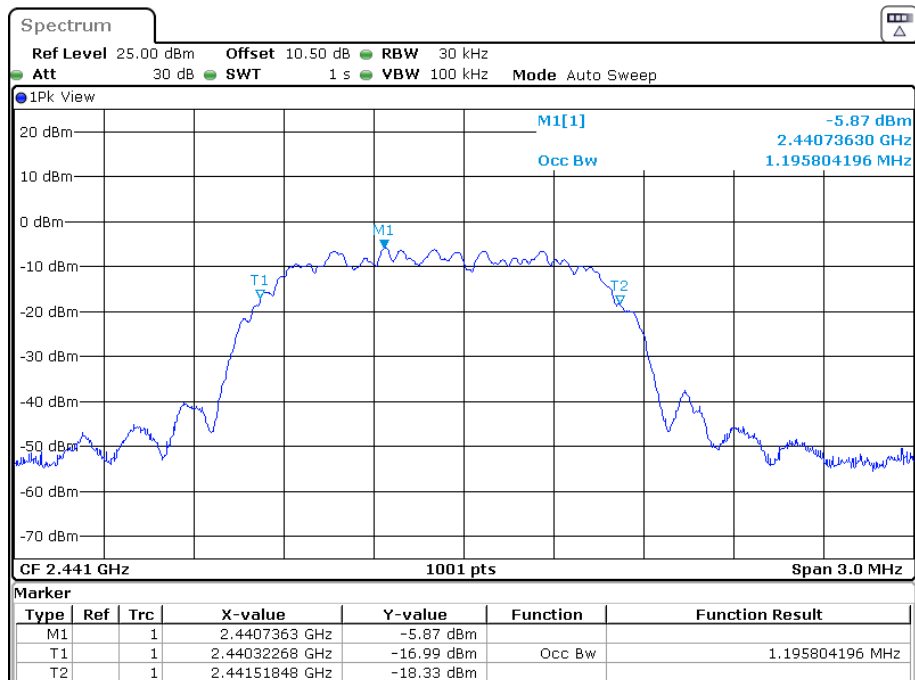


Date: 7.FEB.2023 16:26:13

20dB Emission Bandwidth, High Channel

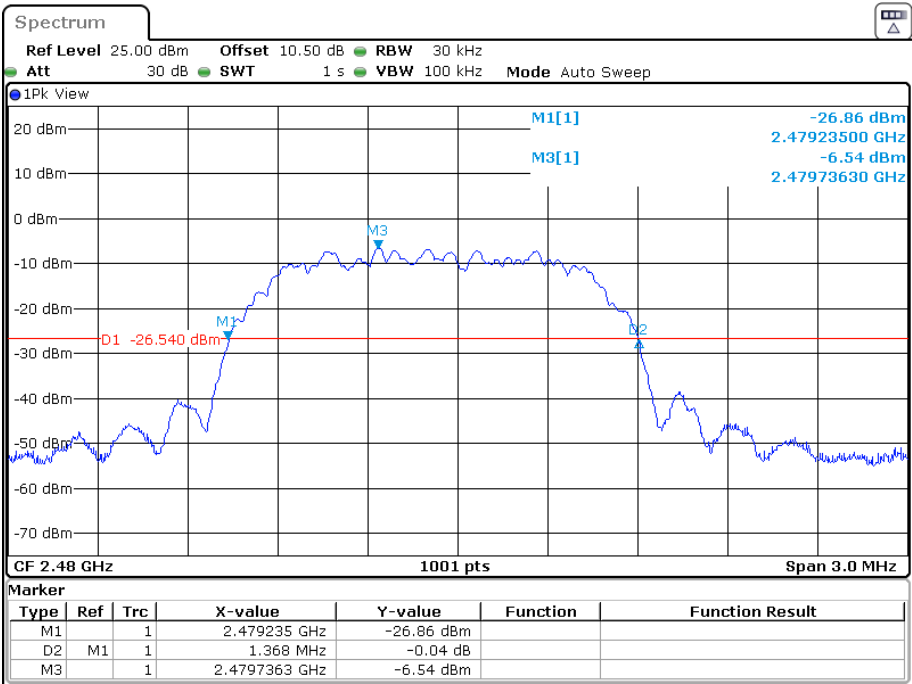


Date: 7.FEB.2023 16:32:34


99% Occupied Bandwidth, High Channel

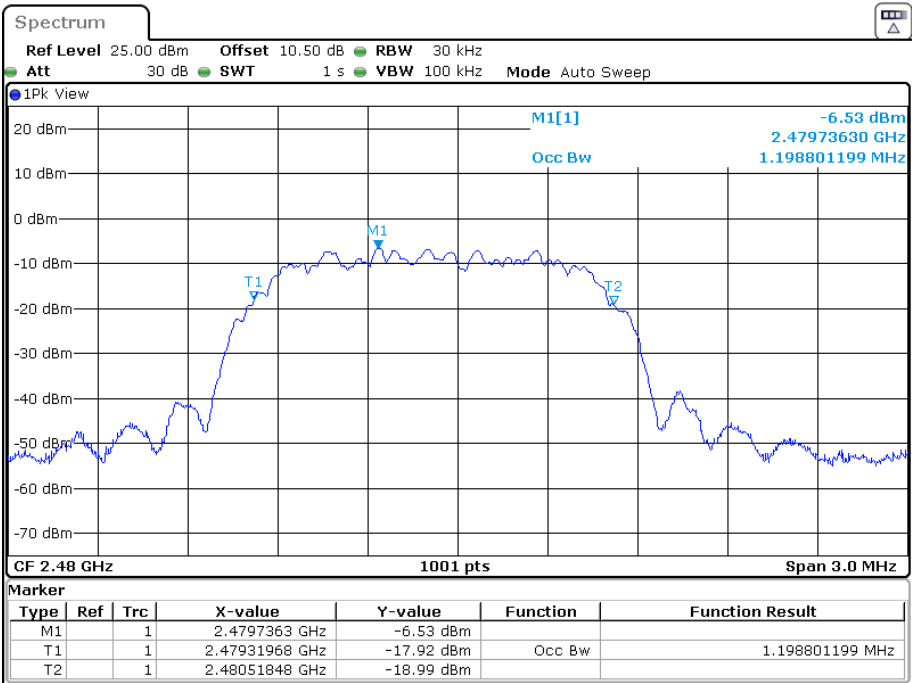

Date: 7.FEB.2023 16:32:02

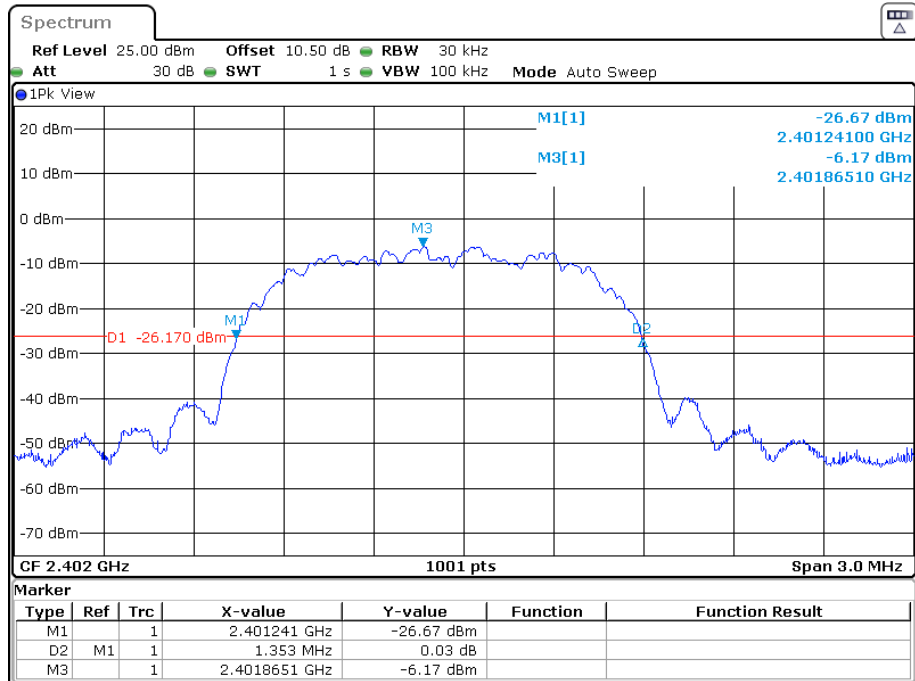
**EDR (8DPSK):****20dB Emission Bandwidth, Low Channel**

Date: 7.FEB.2023 16:22:36

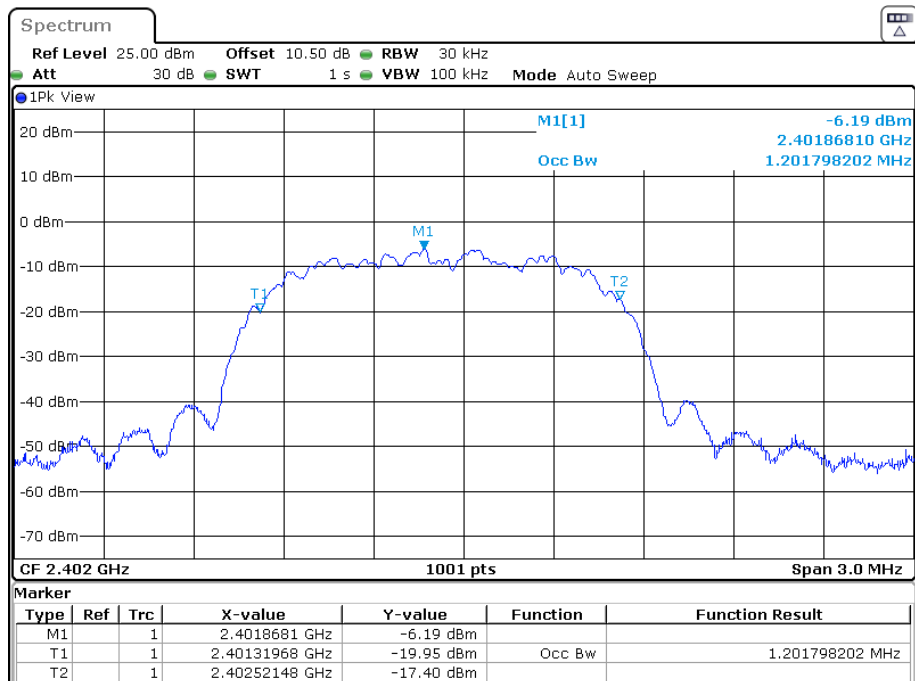**99% Occupied Bandwidth, Low Channel**


Date: 7.FEB.2023 16:22:15

## 20dB Emission Bandwidth, middle Channel

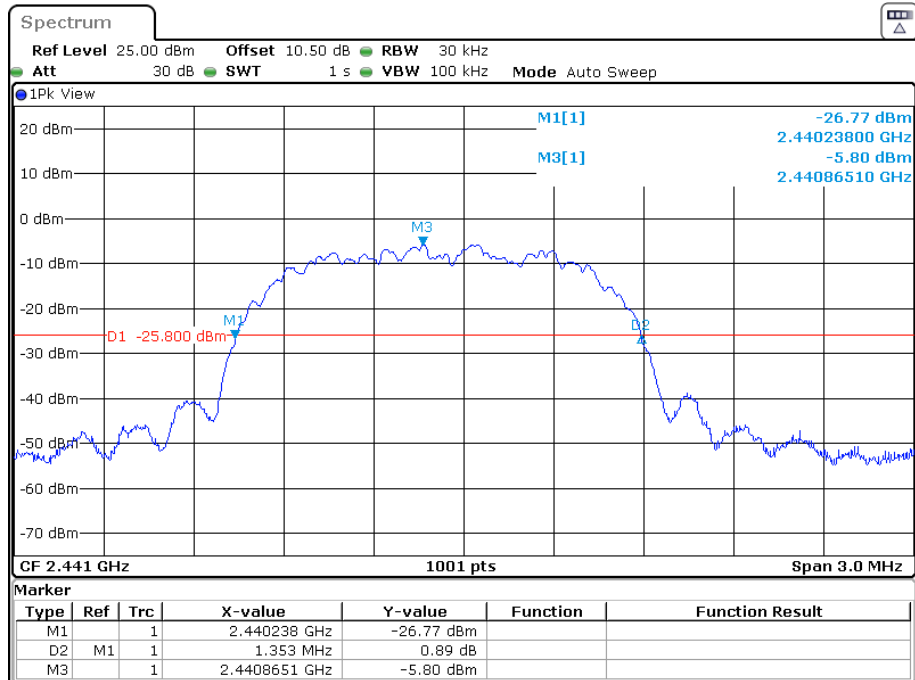


Date: 7.FEB.2023 16:28:15

## 99% Occupied Bandwidth, Middle Channel

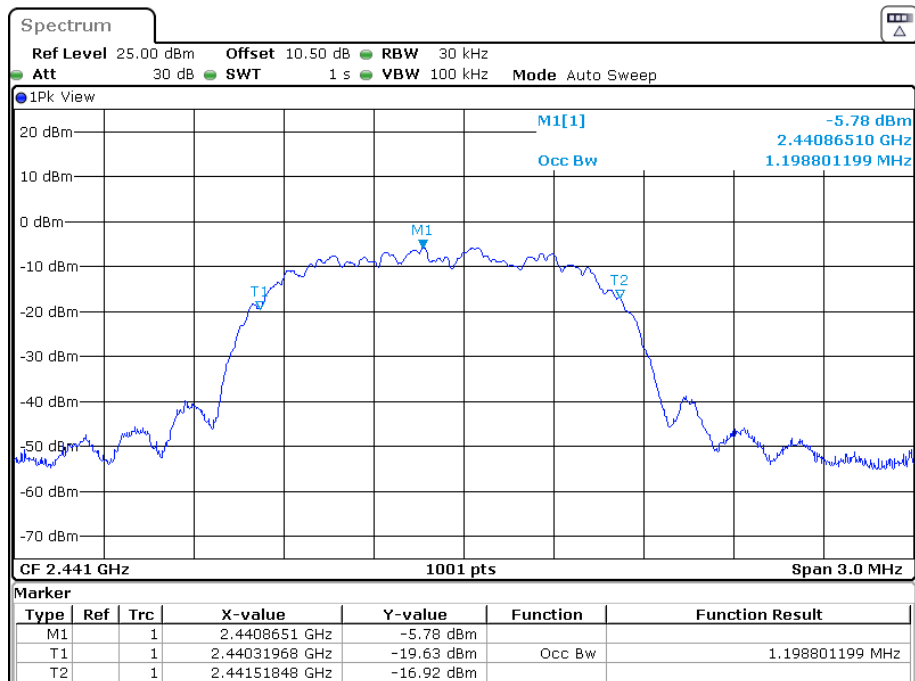


Date: 7.FEB.2023 16:27:41

## 20dB Emission Bandwidth, High Channel

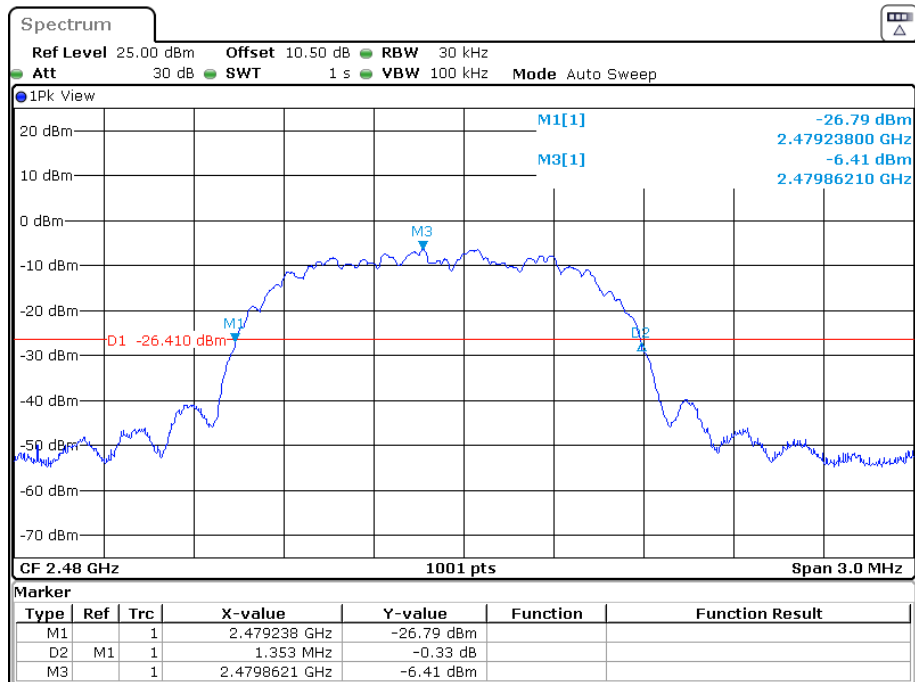

Date: 7.FEB.2023 16:34:38

## 99% Occupied Bandwidth, High Channel

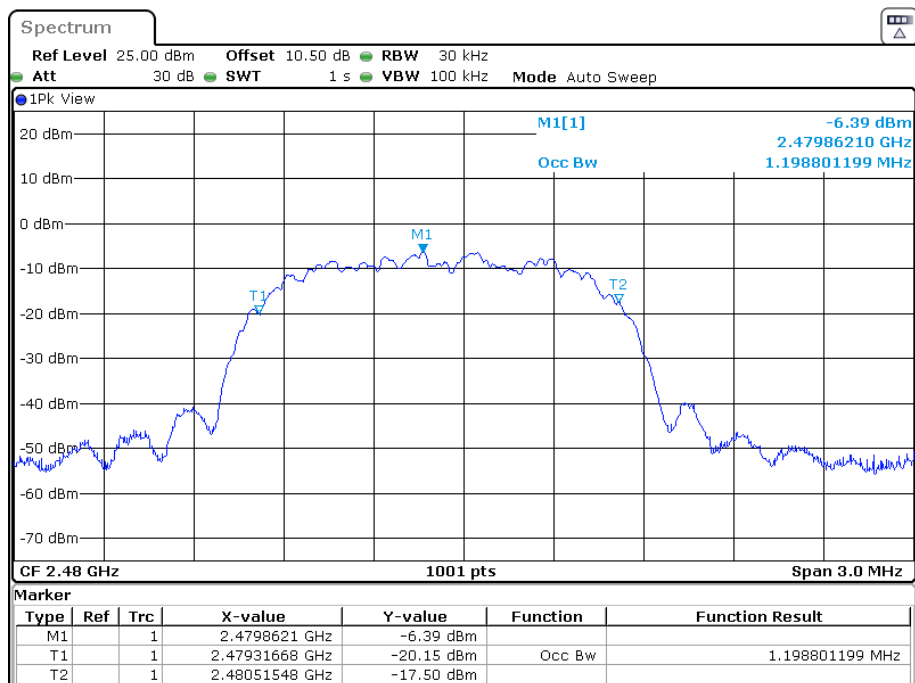

Date: 7.FEB.2023 16:34:07


**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

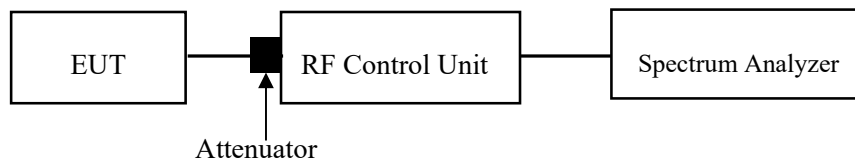**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Andy Yu on 2023-02-07.*


*EUT operation mode: Transmitting*

**Test Result: Pass**


*Please refer to following table and plots.*

| Mode                  | Frequency Range (MHz) | Number of Hopping Channel (CH) | Limit (CH) |
|-----------------------|-----------------------|--------------------------------|------------|
| BDR (GFSK)            | 2400-2483.5           | 79                             | ≥15        |
| EDR ( $\pi/4$ -DQPSK) | 2400-2483.5           | 79                             | ≥15        |
| EDR (8DPSK)           | 2400-2483.5           | 79                             | ≥15        |

BDR (GFSK): Number of Hopping Channels

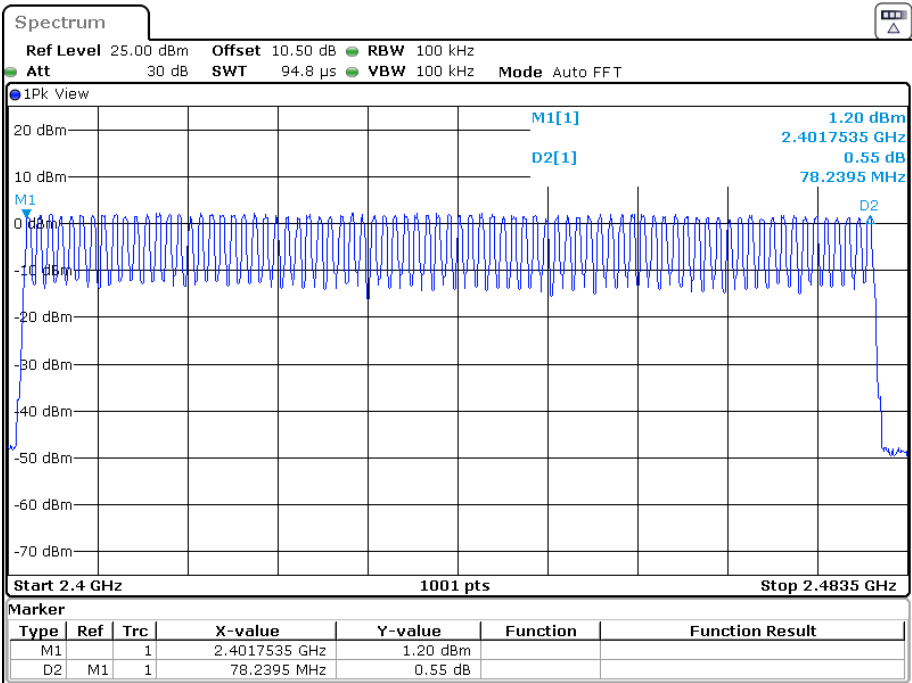


Date: 7.FEB.2023 16:37:38

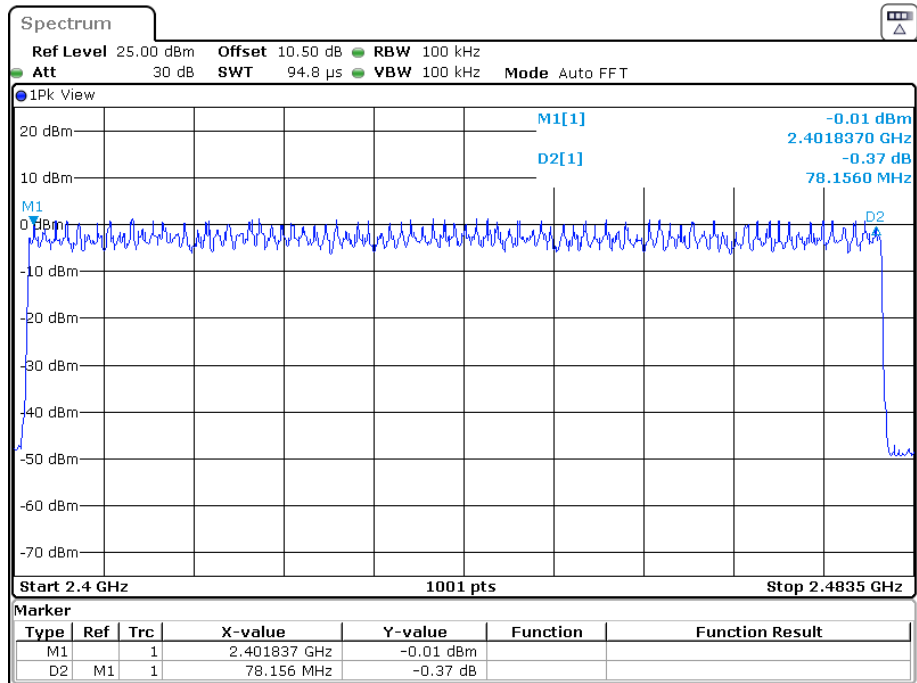EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

Date: 7.FEB.2023 16:42:49

## EDR (8DPSK): Number of Hopping Channels

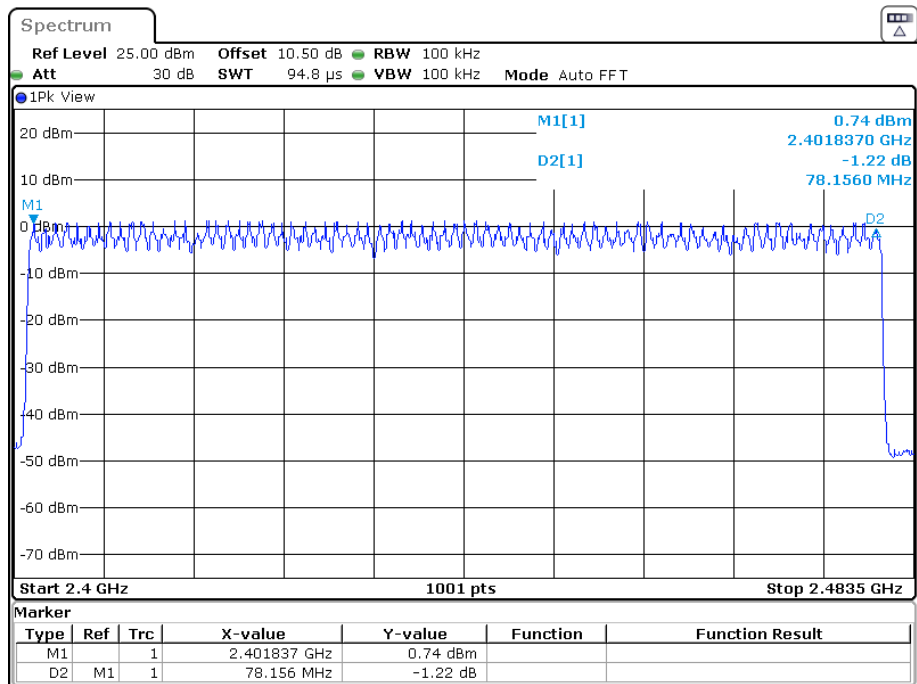

Date: 7.FEB.2023 16:48:53


**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

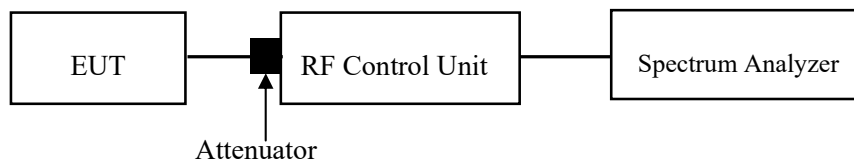**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Andy Yu on 2023-02-07 and 2023-02-24.*

*EUT operation mode: Transmitting*

**Test Result: Pass**


*Please refer to following table and plots*

| Test Mode | Channel | Pulse Time<br>[ms] | Total Hops<br>[Num] | Result[s] | Limit[s]   | Verdict |
|-----------|---------|--------------------|---------------------|-----------|------------|---------|
| DH1       | Hop     | 0.38               | 330                 | 0.125     | $\leq 0.4$ | PASS    |
| DH3       | Hop     | 1.64               | 150                 | 0.246     | $\leq 0.4$ | PASS    |
| DH5       | Hop     | 2.89               | 120                 | 0.347     | $\leq 0.4$ | PASS    |
| 2DH1      | Hop     | 0.39               | 320                 | 0.125     | $\leq 0.4$ | PASS    |
| 2DH3      | Hop     | 1.64               | 130                 | 0.213     | $\leq 0.4$ | PASS    |
| 2DH5      | Hop     | 2.90               | 120                 | 0.348     | $\leq 0.4$ | PASS    |
| 3DH1      | Hop     | 0.39               | 320                 | 0.125     | $\leq 0.4$ | PASS    |
| 3DH3      | Hop     | 1.64               | 180                 | 0.295     | $\leq 0.4$ | PASS    |
| 3DH5      | Hop     | 2.90               | 130                 | 0.377     | $\leq 0.4$ | PASS    |


Note 1: A period time= $0.4 \times 79 = 31.6$ (S), Result= Pulse Time \*Total hops

Note 2: Total hops=Hopping Number in 3.16s\*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)

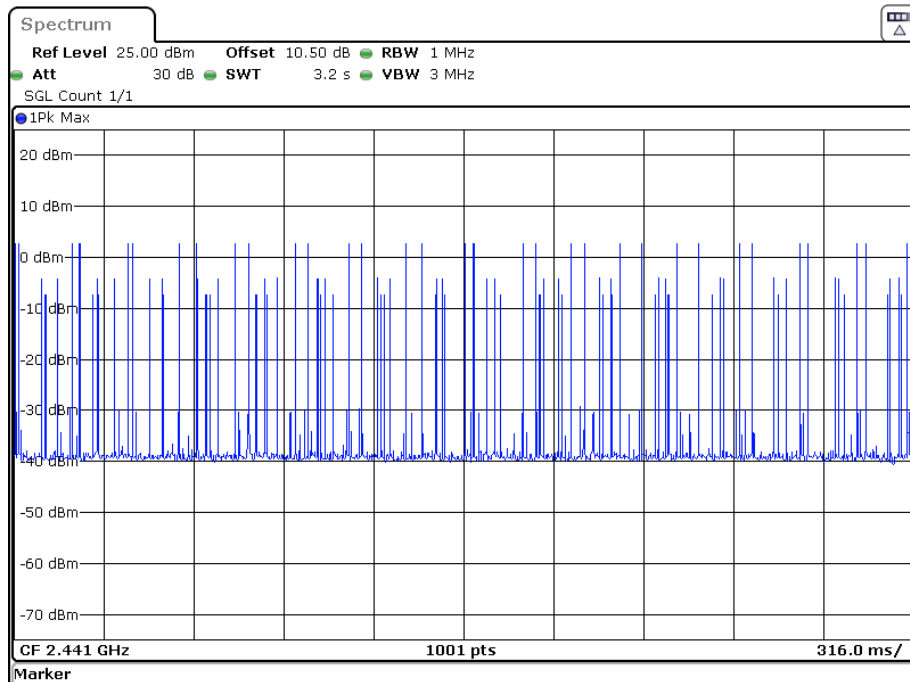
**BDR (GFSK):  
DH1**

Date: 7.FEB.2023 16:35:50

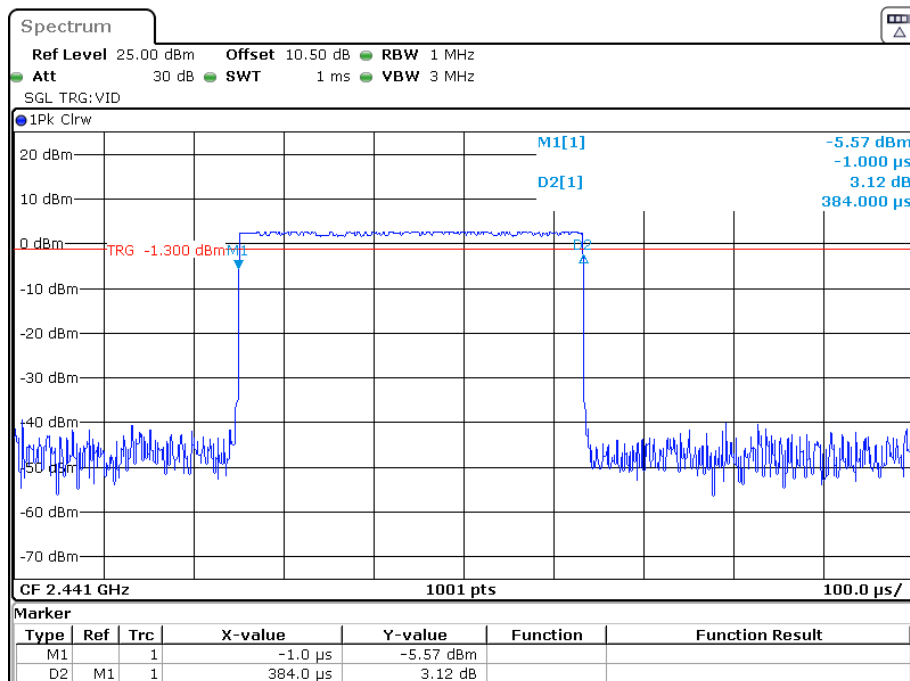


Date: 7.FEB.2023 16:36:05

## DH3

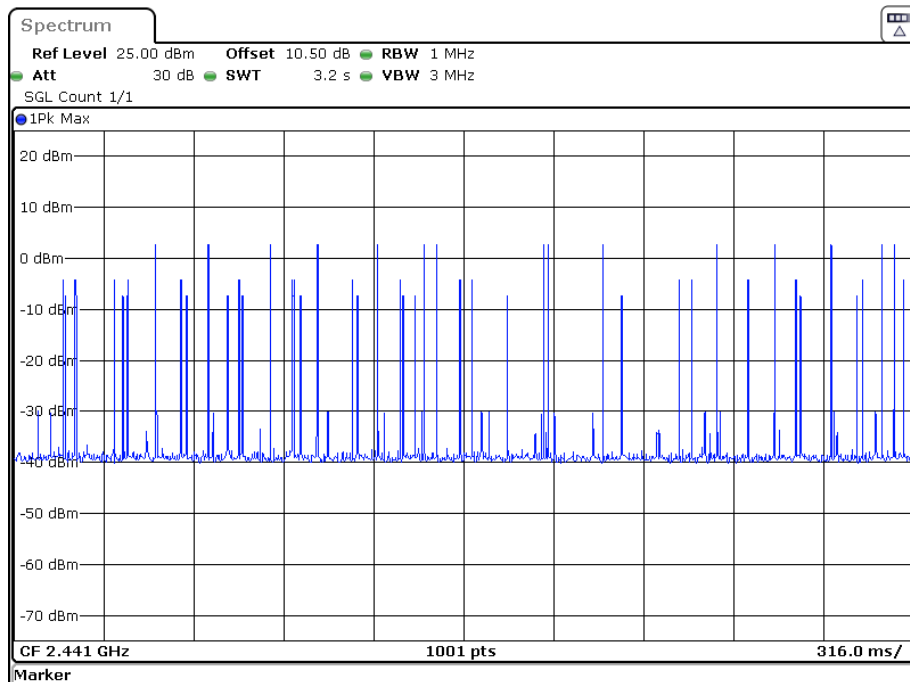


Date: 7.FEB.2023 16:36:25

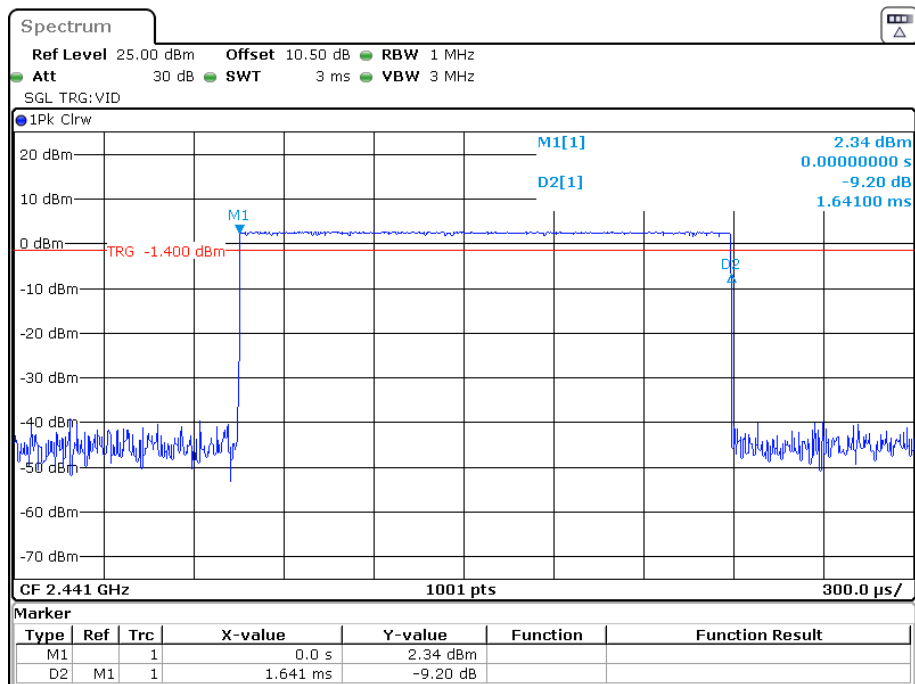


Date: 7.FEB.2023 16:36:42


DH5

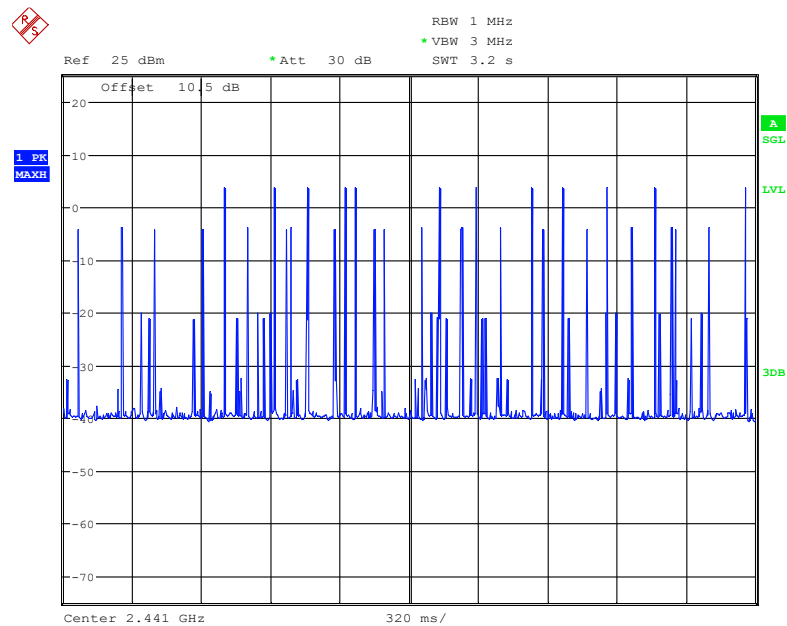


Date: 24.FEB.2023 09:21:50

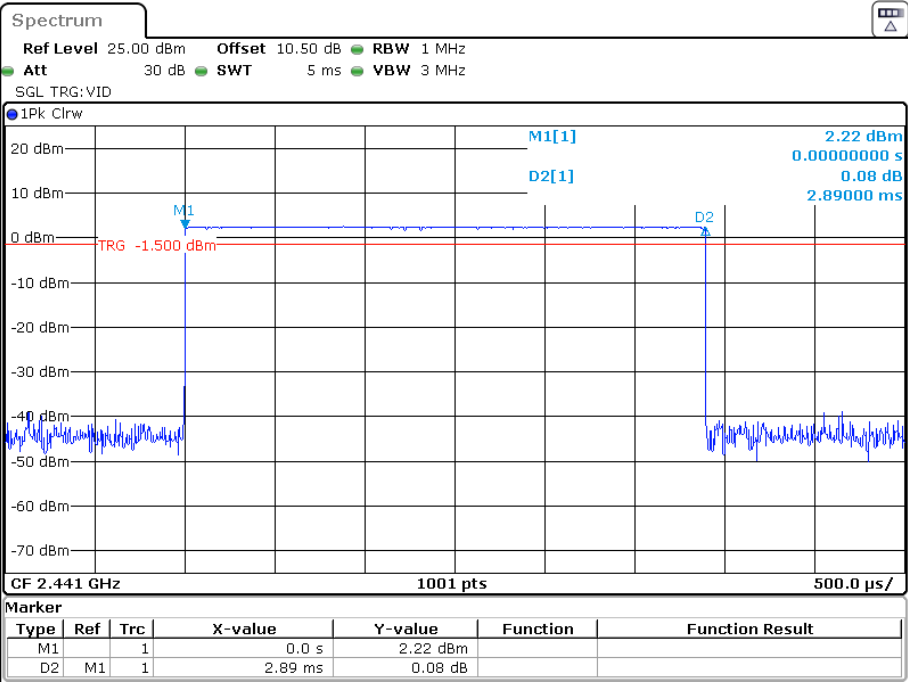

Date: 7.FEB.2023 16:38:25

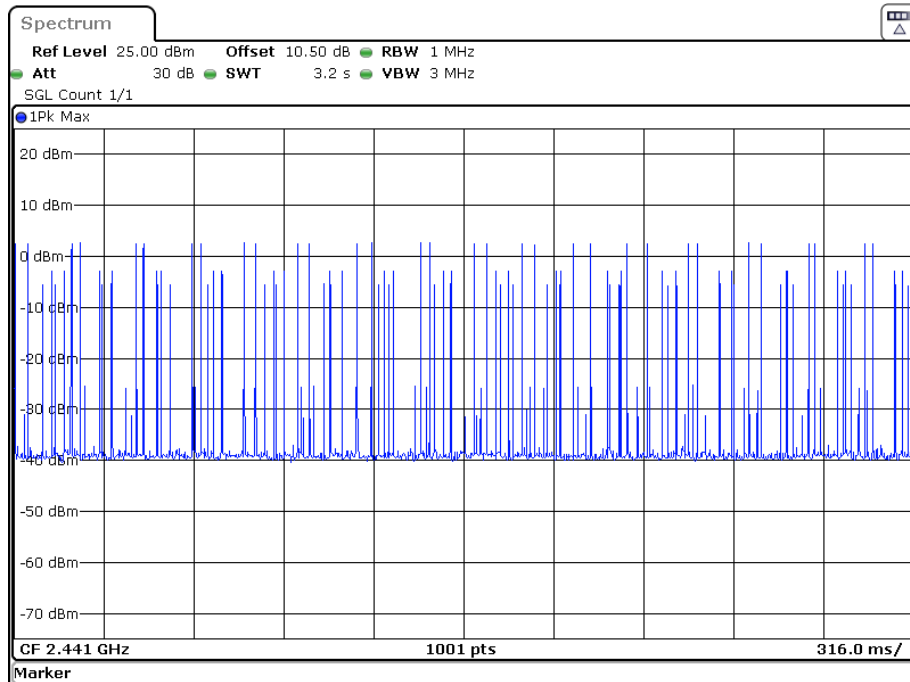
**EDR( $\pi/4$ -DQPSK):  
2DH1**

Date: 7.FEB.2023 16:40:51

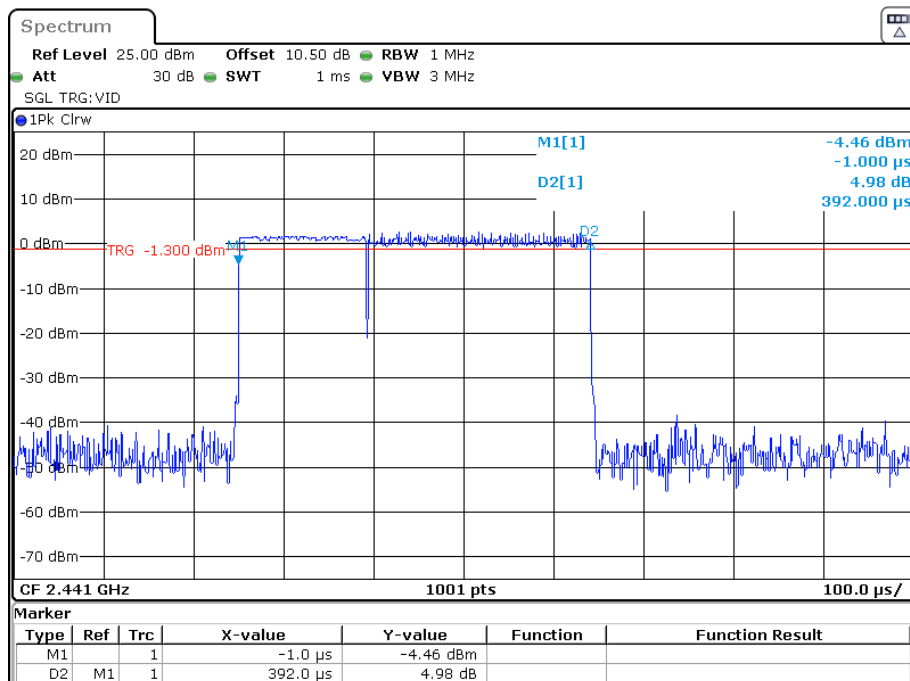


Date: 7.FEB.2023 16:41:08

## 2DH3

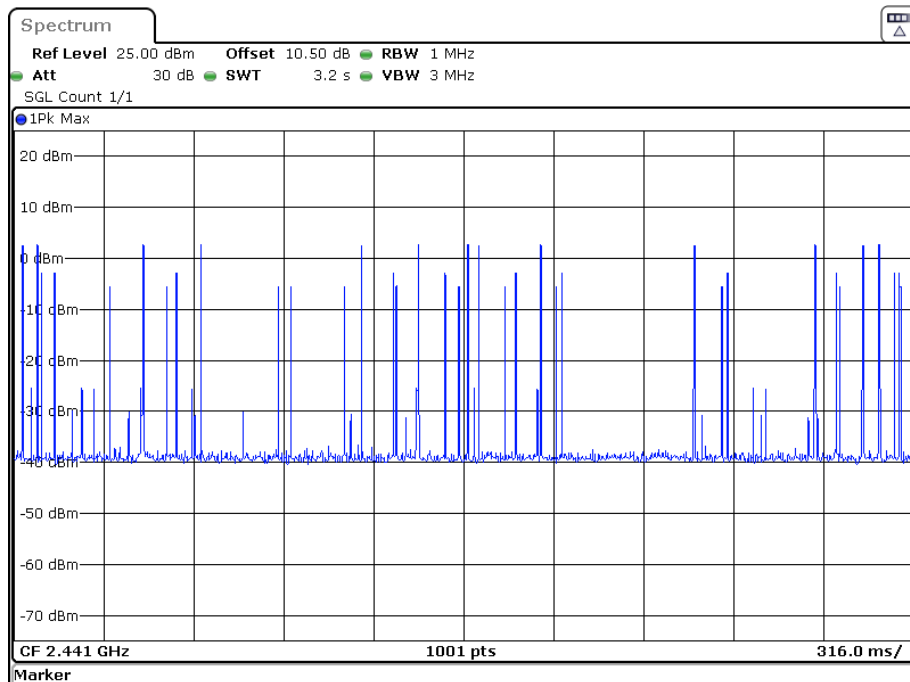


Date: 7.FEB.2023 16:41:27

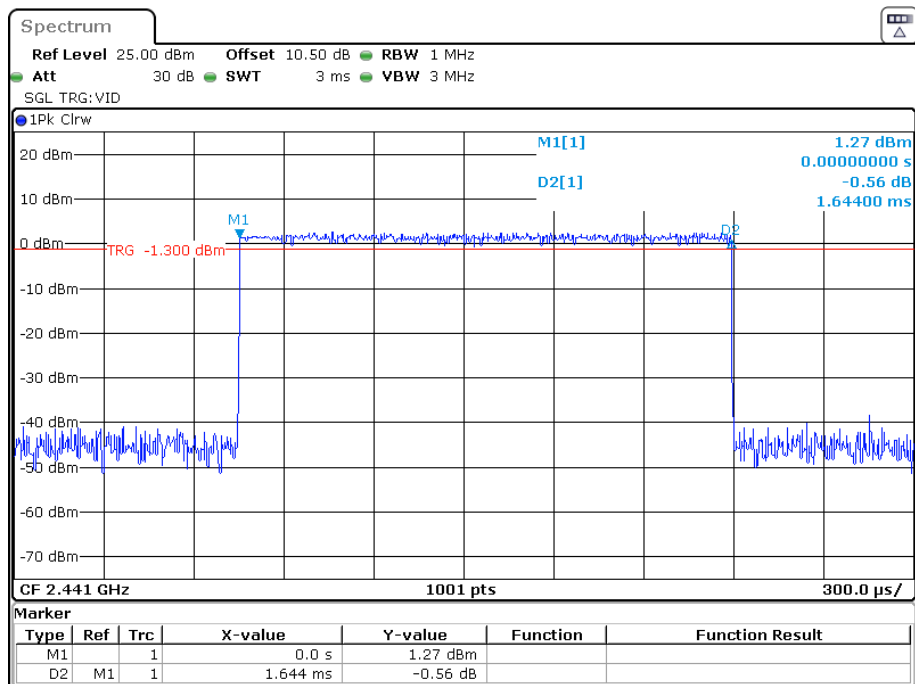


Date: 7.FEB.2023 16:41:44


2DH5

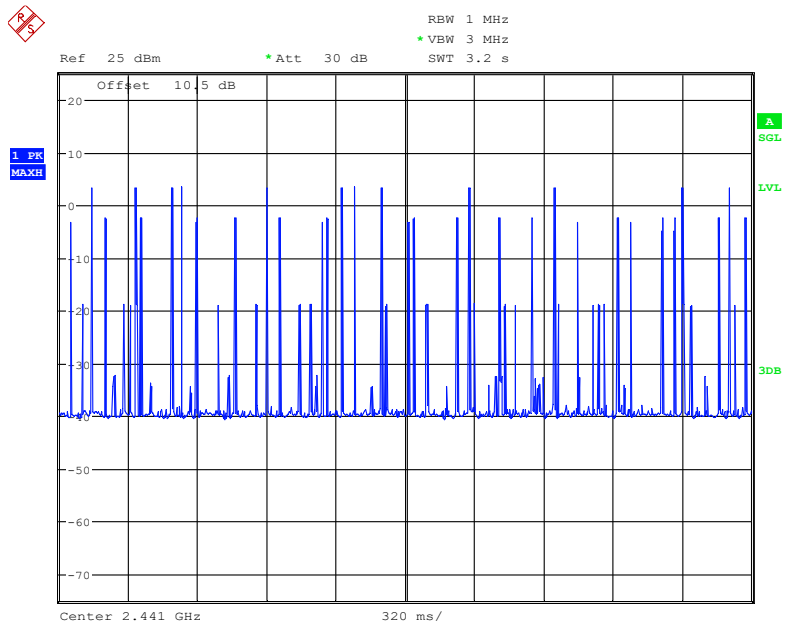


Date: 24.FEB.2023 09:26:25

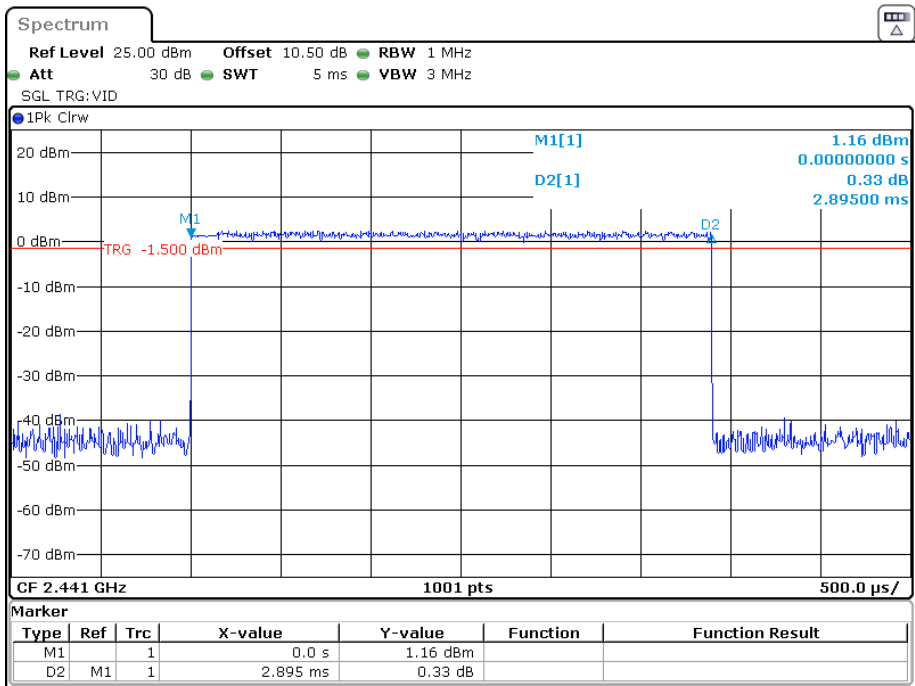

Date: 7.FEB.2023 16:43:38

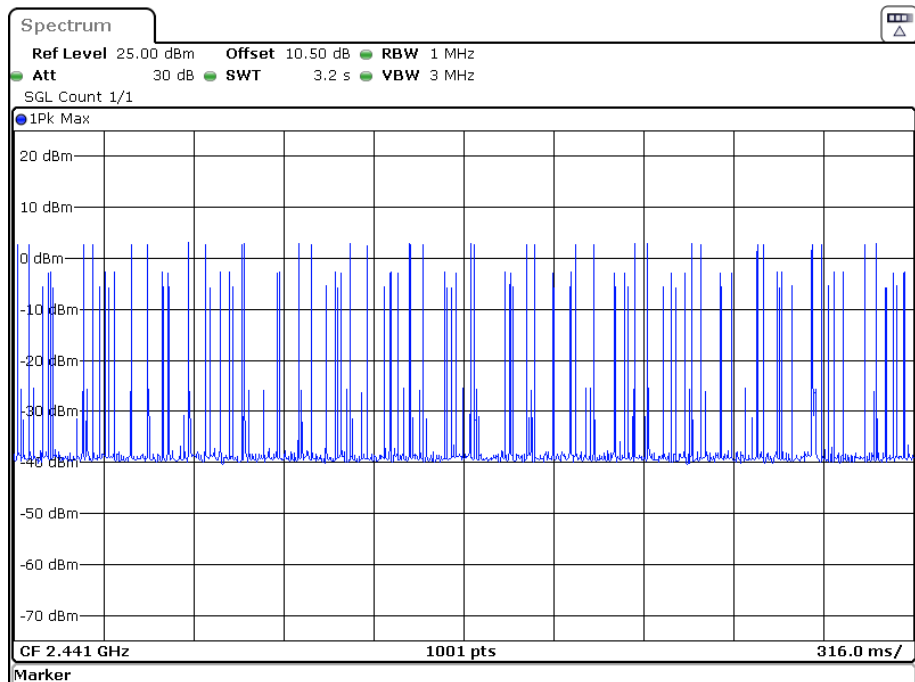
**EDR (8DPSK):  
3DH1**

Date: 7.FEB.2023 16:45:57

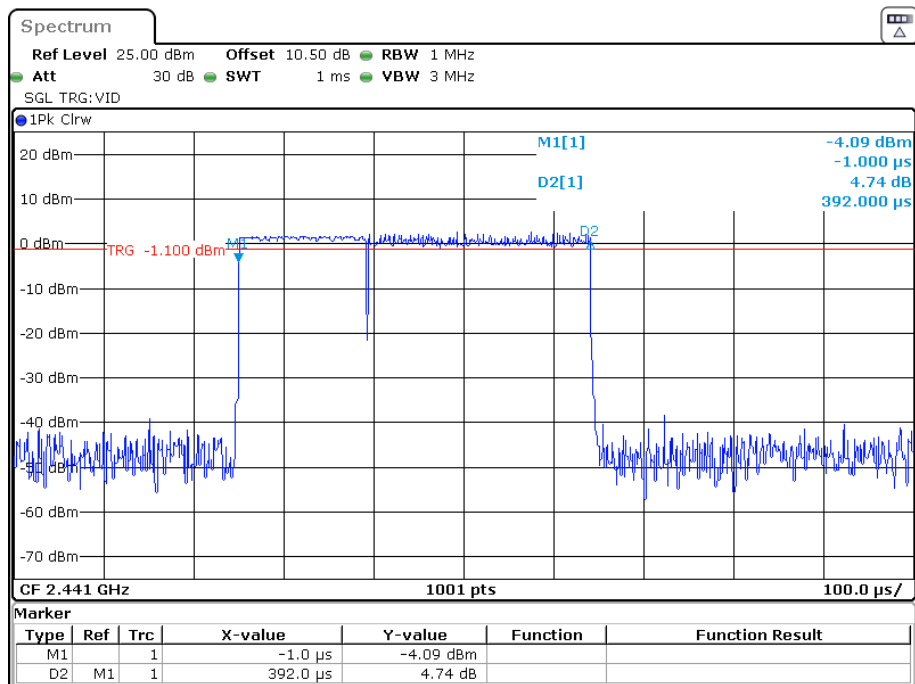


Date: 7.FEB.2023 16:46:13

## 3DH3

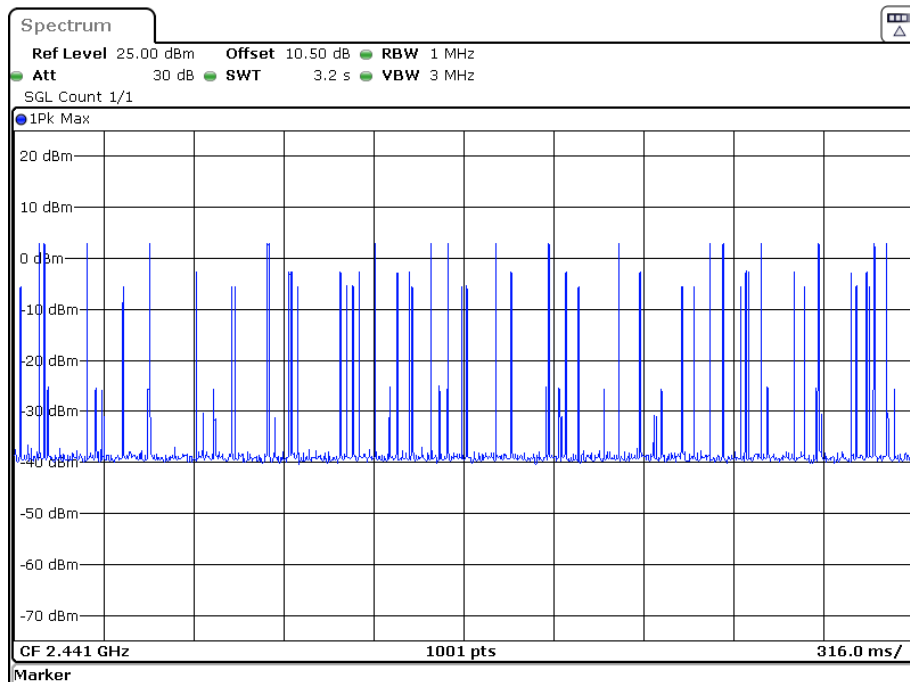


Date: 7.FEB.2023 16:46:33

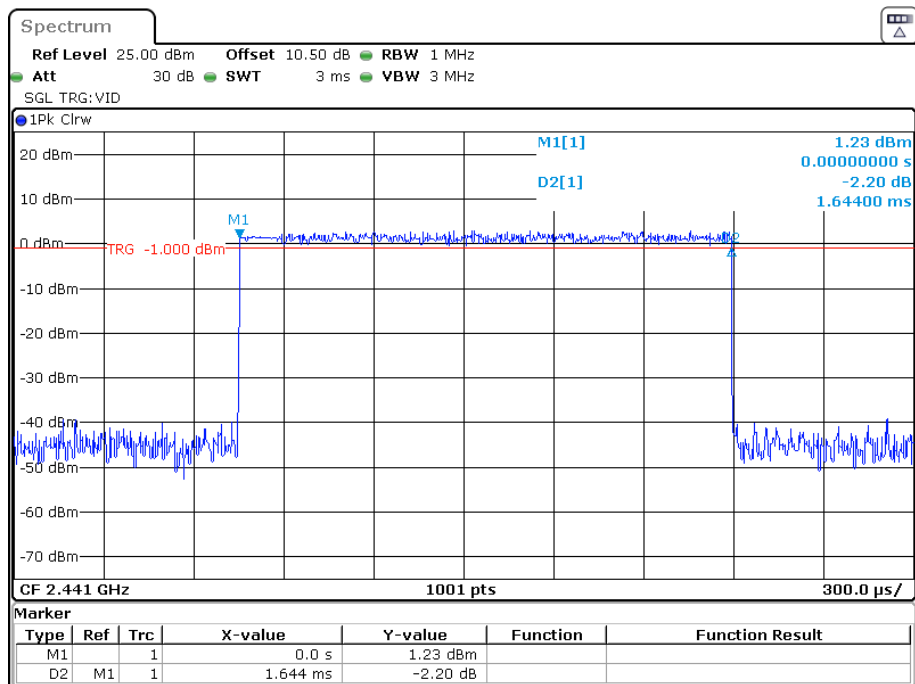


Date: 7.FEB.2023 16:46:49

## 3DH5

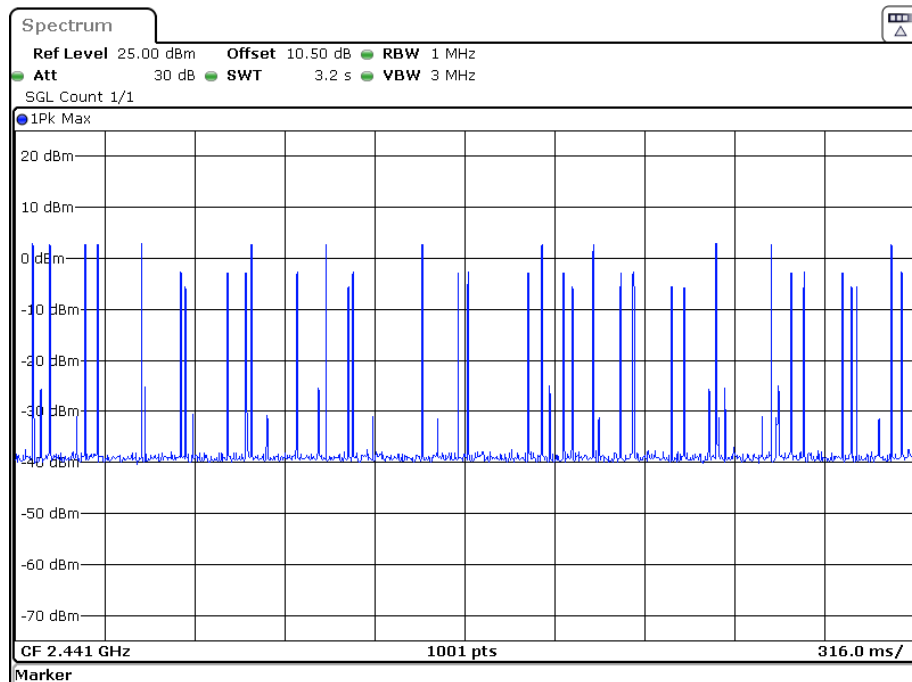

Date: 7.FEB.2023 16:49:48

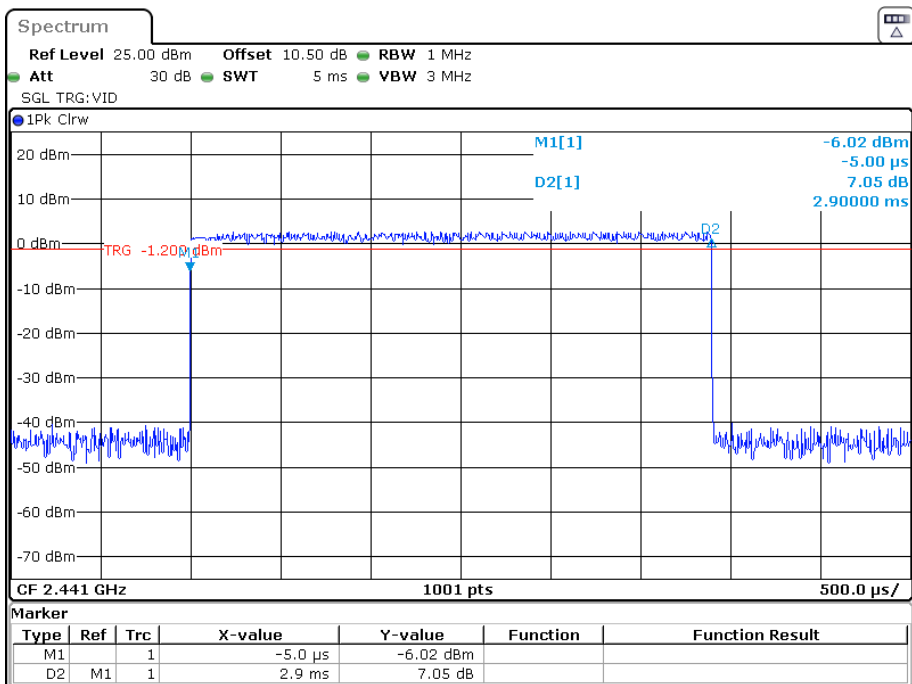

Date: 7.FEB.2023 16:50:04

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

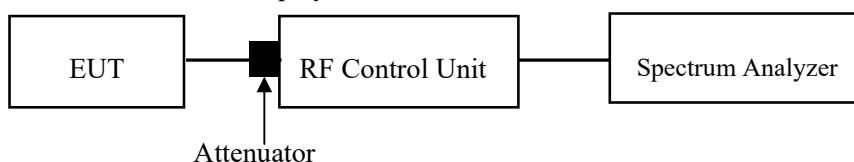

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Andy Yu on 2023-02-07.*

*EUT operation mode: Transmitting*


**Test Result: Pass**

*Please refer to following table and plots.*

| Mode                                      | Channel | Frequency<br>(MHz) | Peak Output Power | Limit<br>(dBm) |
|-------------------------------------------|---------|--------------------|-------------------|----------------|
|                                           |         |                    | (dBm)             |                |
| <b>BDR<br/>(GFSK)</b>                     | Low     | 2402               | 1.15              | 21             |
|                                           | Middle  | 2441               | 2.63              | 21             |
|                                           | High    | 2480               | 2.05              | 21             |
| <b>EDR<br/>(<math>\pi/4</math>-DQPSK)</b> | Low     | 2402               | 2.44              | 21             |
|                                           | Middle  | 2441               | 3.00              | 21             |
|                                           | High    | 2480               | 2.30              | 21             |
| <b>EDR<br/>(8DPSK)</b>                    | Low     | 2402               | 2.89              | 21             |
|                                           | Middle  | 2441               | 3.41              | 21             |
|                                           | High    | 2480               | 2.83              | 21             |


BDR (GFSK):

Low Channel

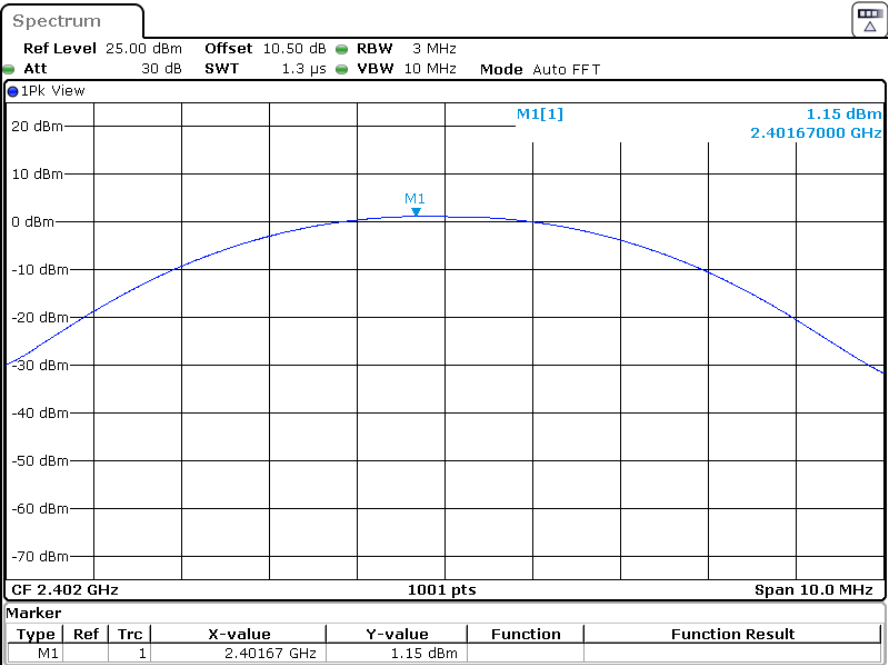


Date: 7.FEB.2023 16:18:06

Middle Channel

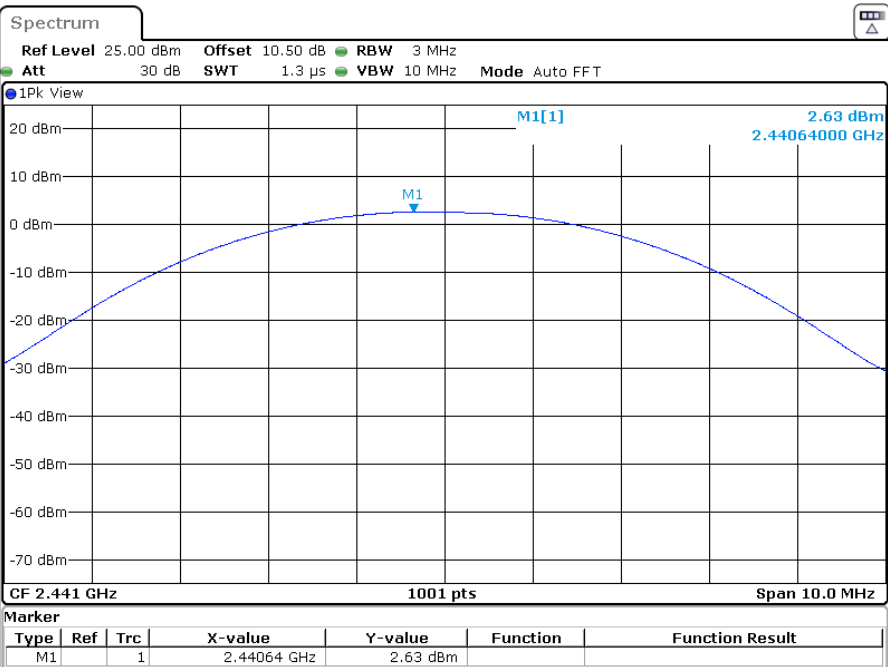


Date: 7.FEB.2023 16:24:18

High Channel

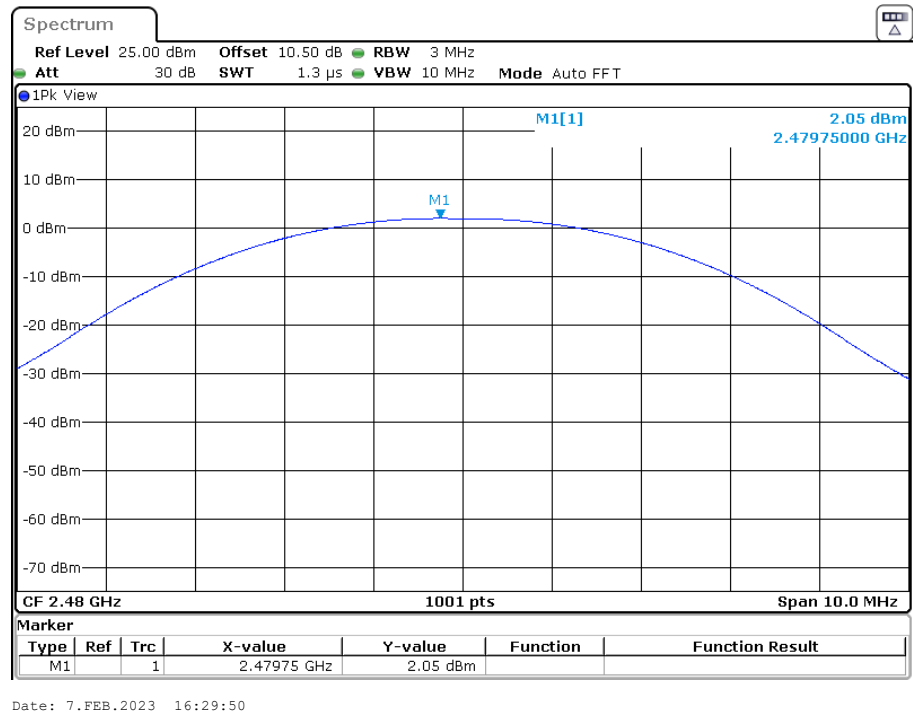


EDR ( $\pi/4$ -DQPSK):

Low Channel

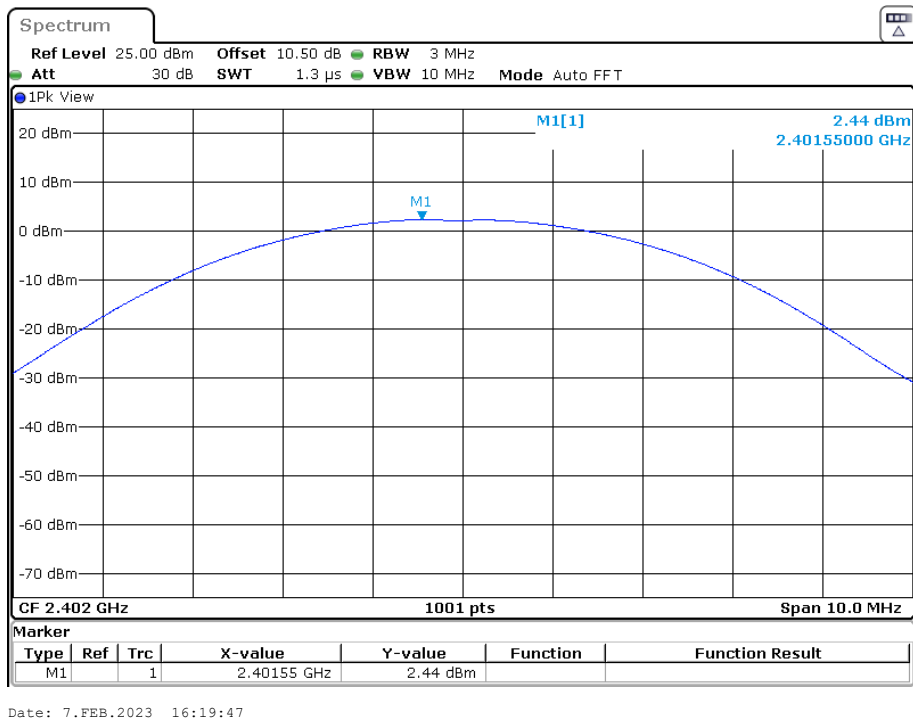


Middle Channel

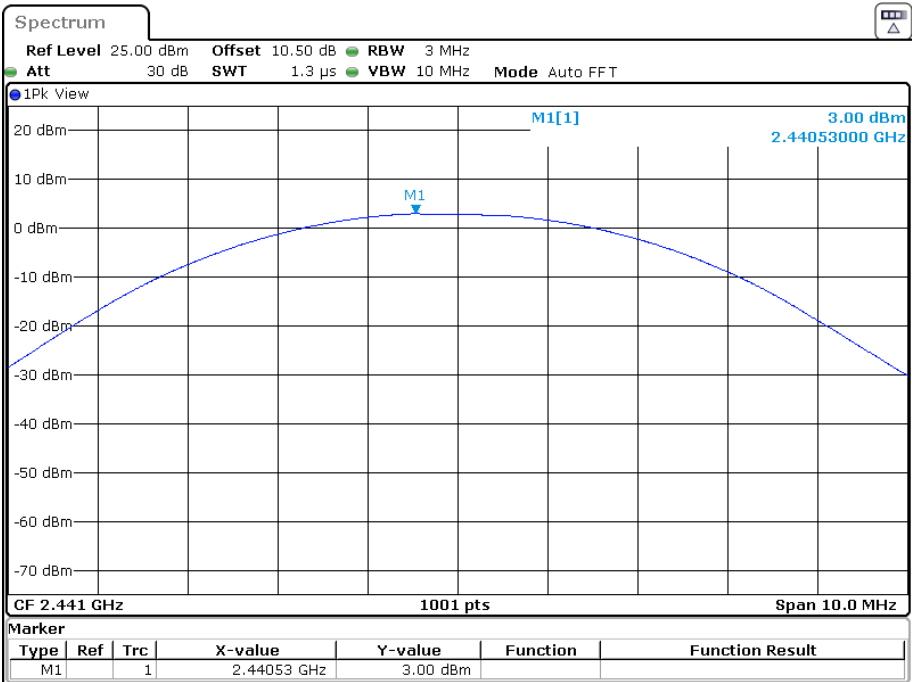

Date: 7.FEB.2023 16:25:52


High Channel

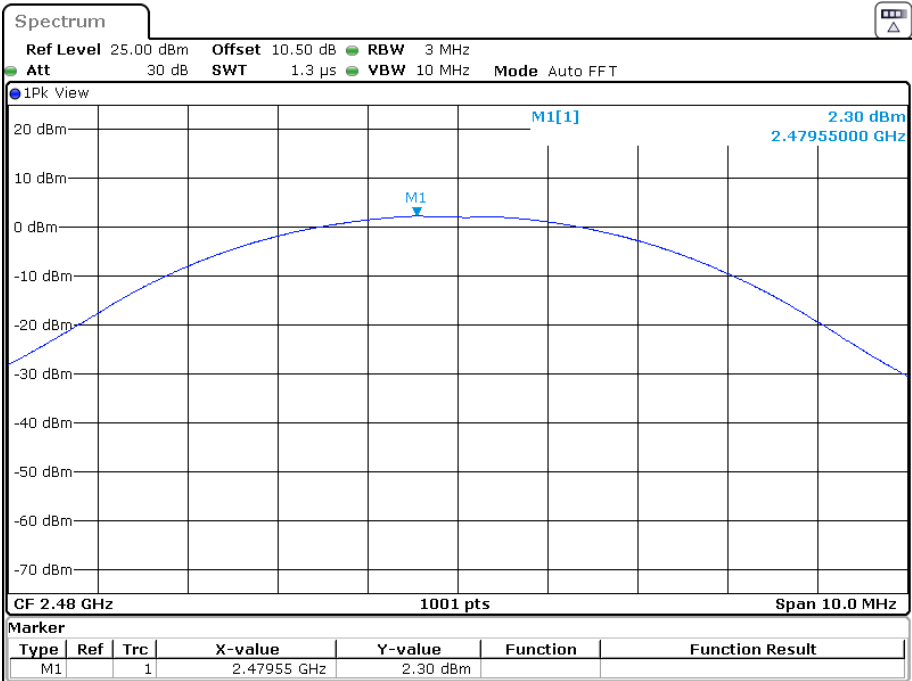

Date: 7.FEB.2023 16:31:29


EDR (8DPSK):

Low Channel

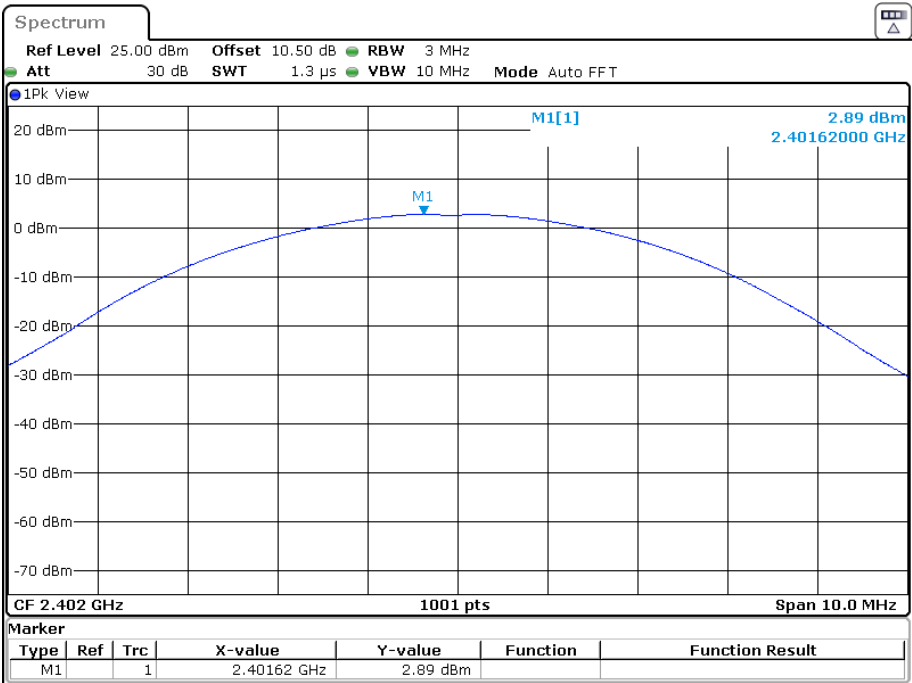


Date: 7.FEB.2023 16:21:55

Middle Channel

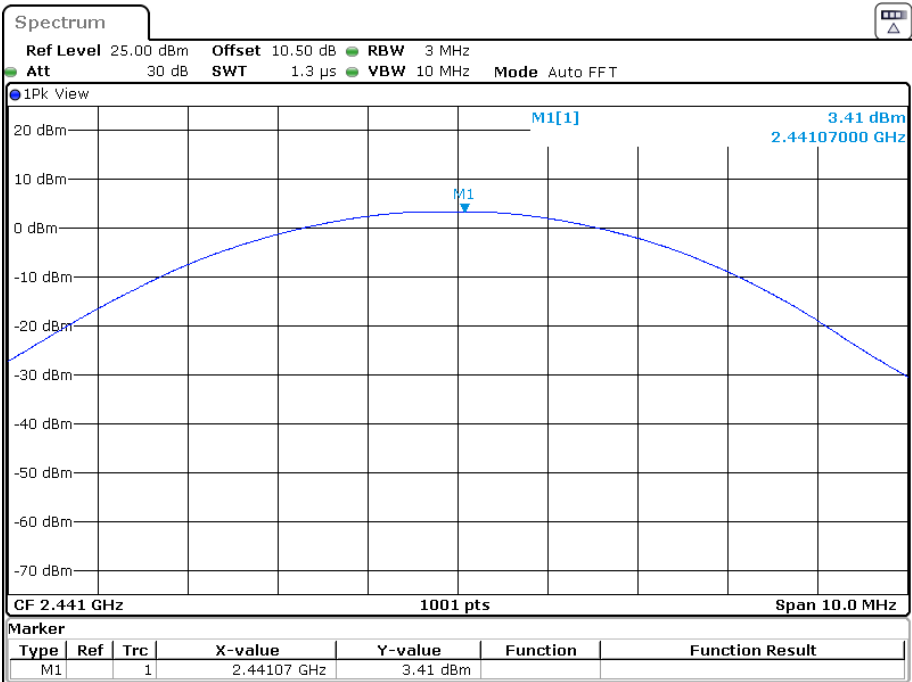

Date: 7.FEB.2023 16:27:22

High Channel

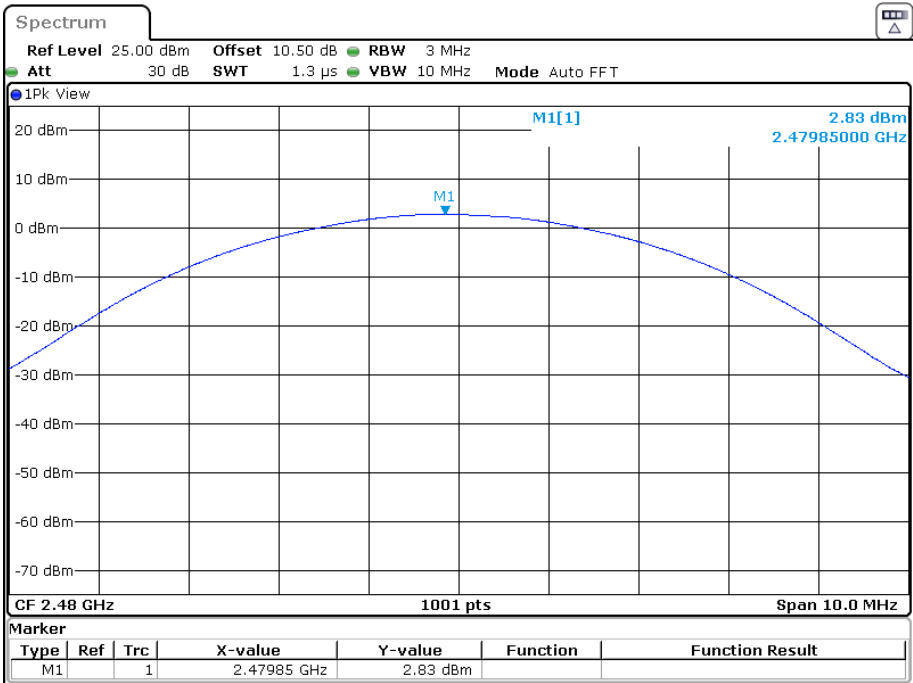

Date: 7.FEB.2023 16:33:46

## FCC §15.247(d) - BAND EDGES TESTING


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

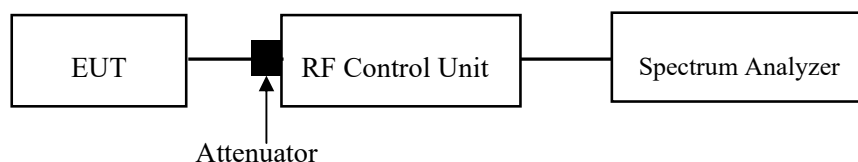

### Test Data

#### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Andy Yu on 2023-02-07.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following plots*

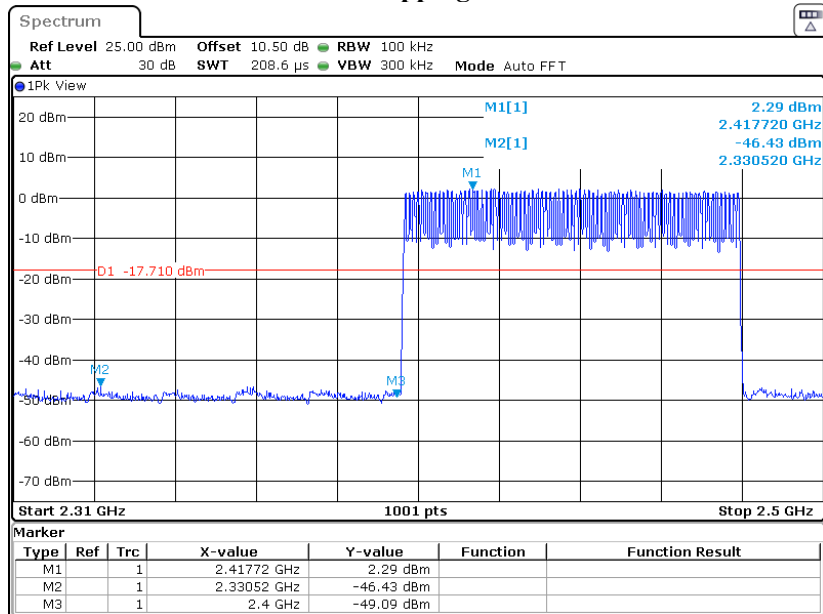
**BDR (GFSK): Band Edge-Left Side  
Hopping**

Date: 7.FEB.2023 16:39:25

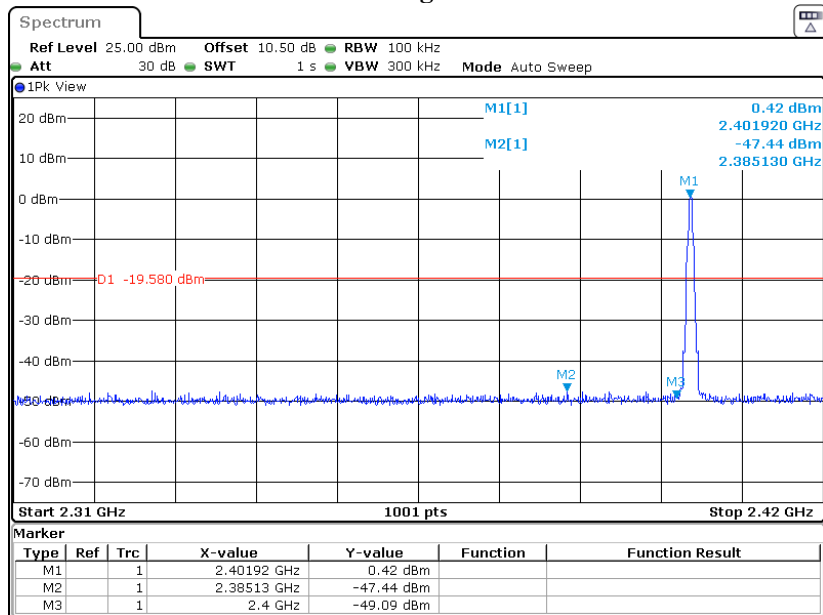**Single**


Date: 7.FEB.2023 16:19:08

### BDR (GFSK): Band Edge-Right Side Hopping

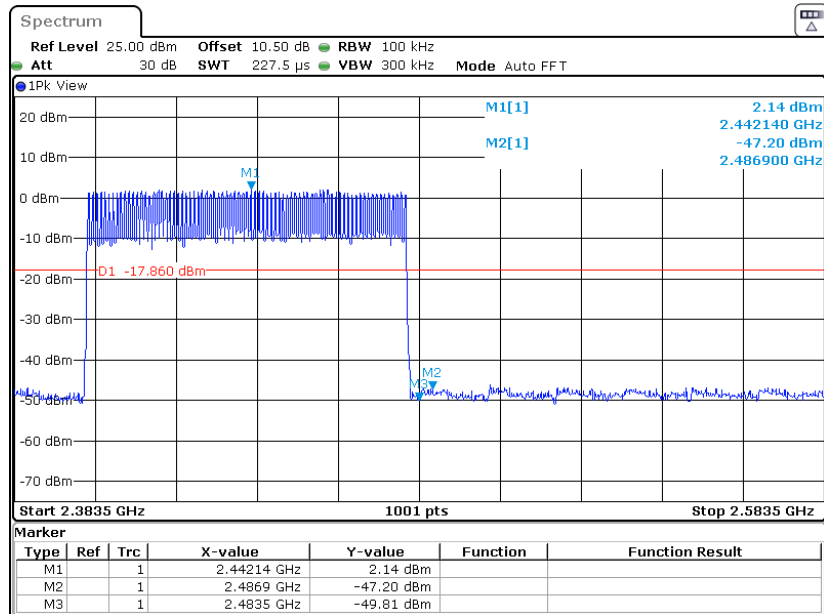


Date: 7.FEB.2023 16:40:04

### Single

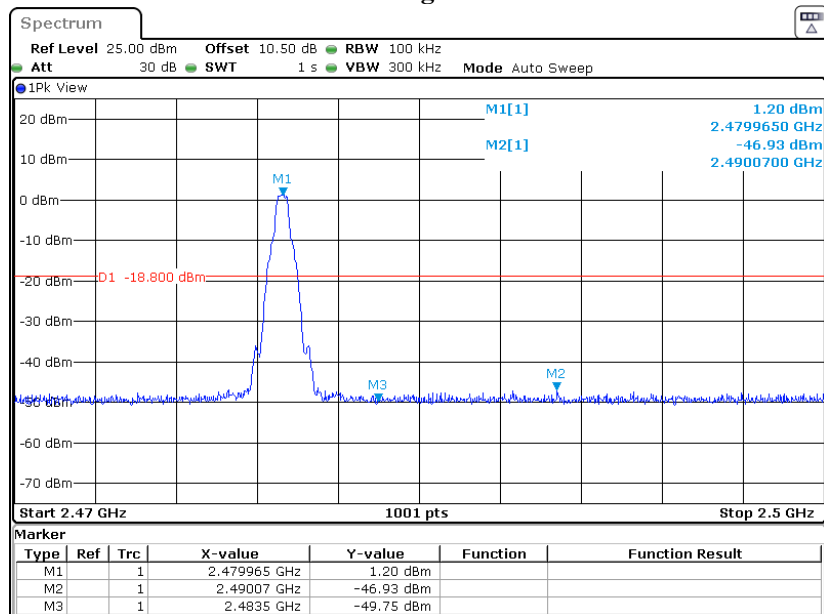


Date: 7.FEB.2023 16:30:52

### EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side Hopping

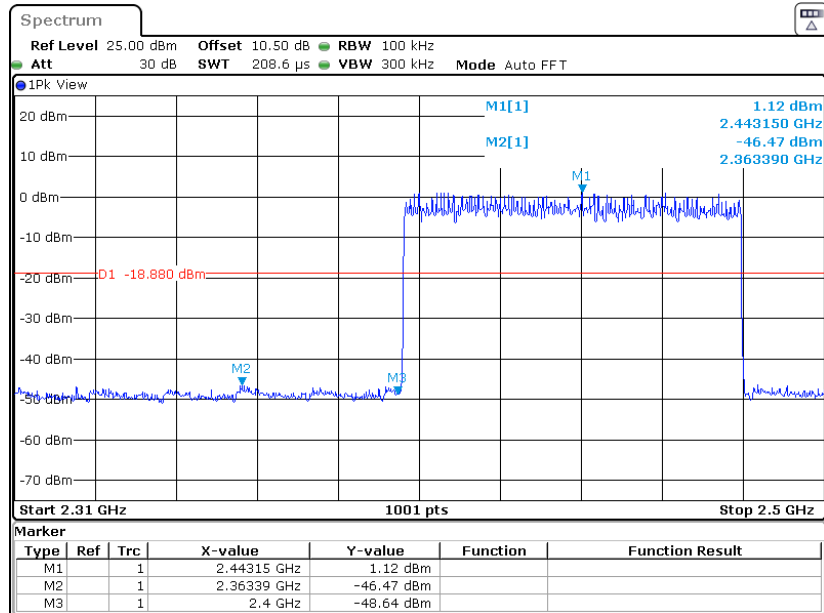


Date: 7.FEB.2023 16:44:37

### Single

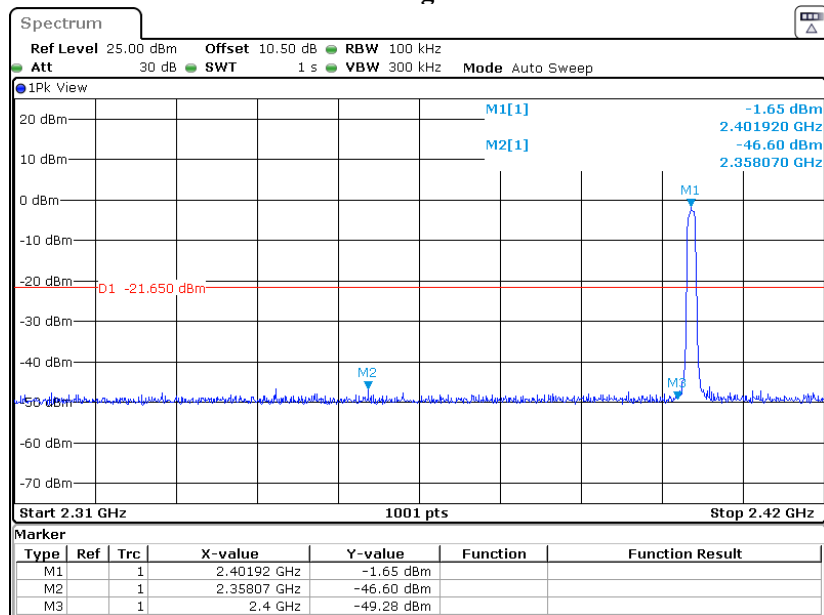


Date: 7.FEB.2023 16:21:12

### EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side Hopping

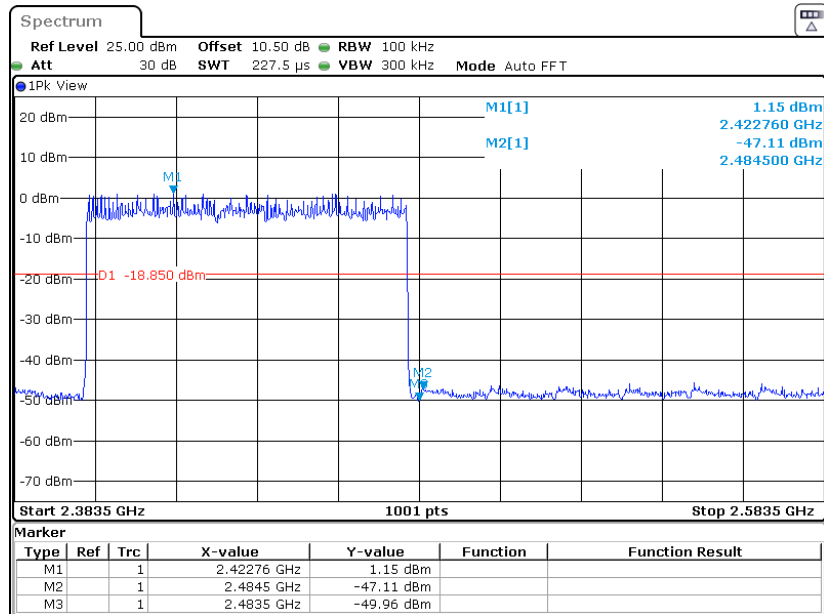


Date: 7.FEB.2023 16:45:36

### Single

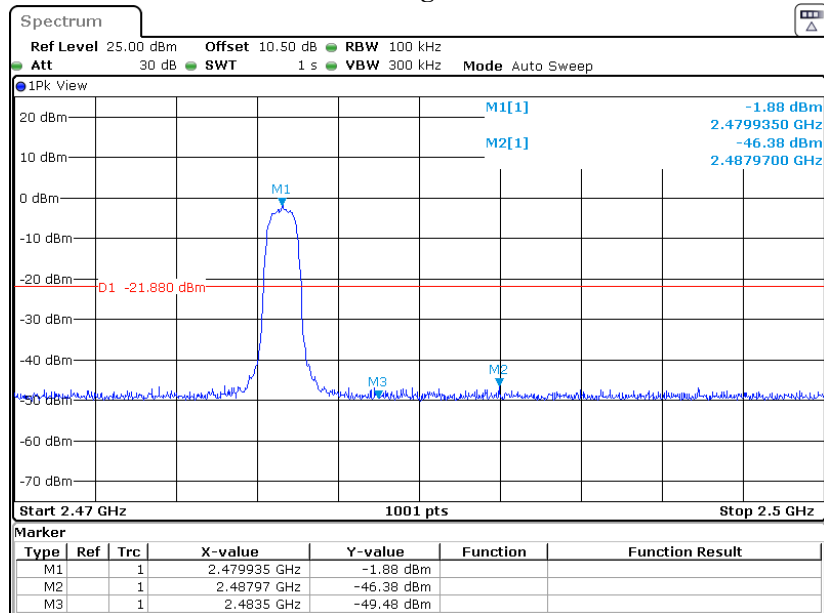


Date: 7.FEB.2023 16:33:07

EDR (8DPSK): Band Edge-Left Side  
Hopping

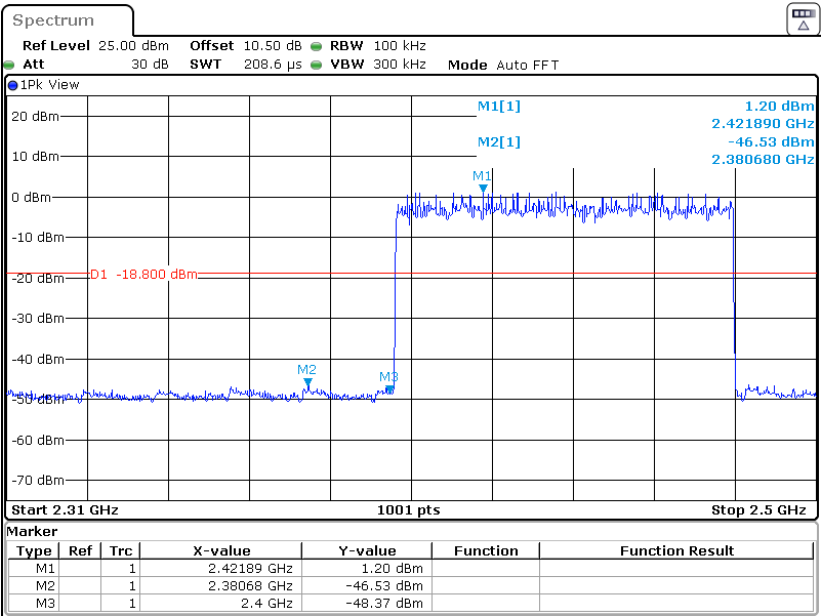


Date: 7.FEB.2023 16:50:53

Single

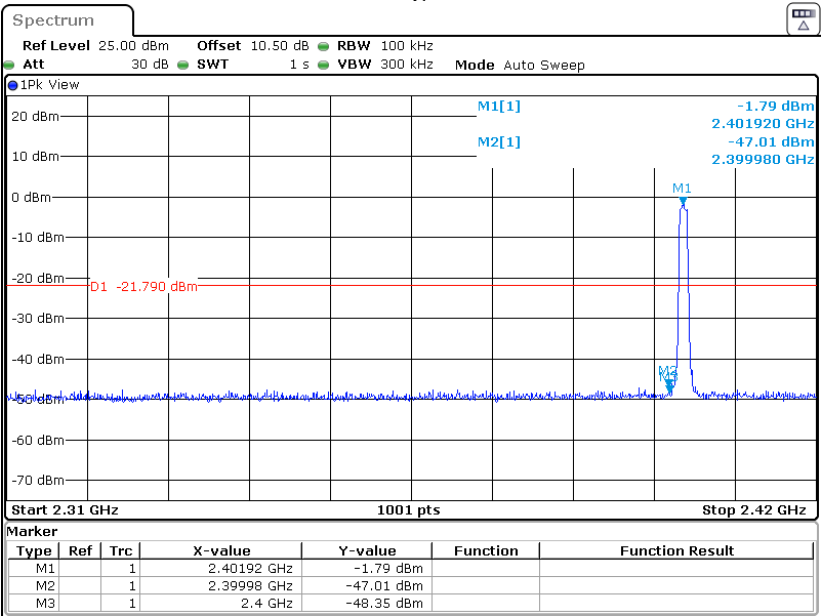


Date: 7.FEB.2023 16:23:08

### EDR (8DPSK): Band Edge-Right Side Hopping

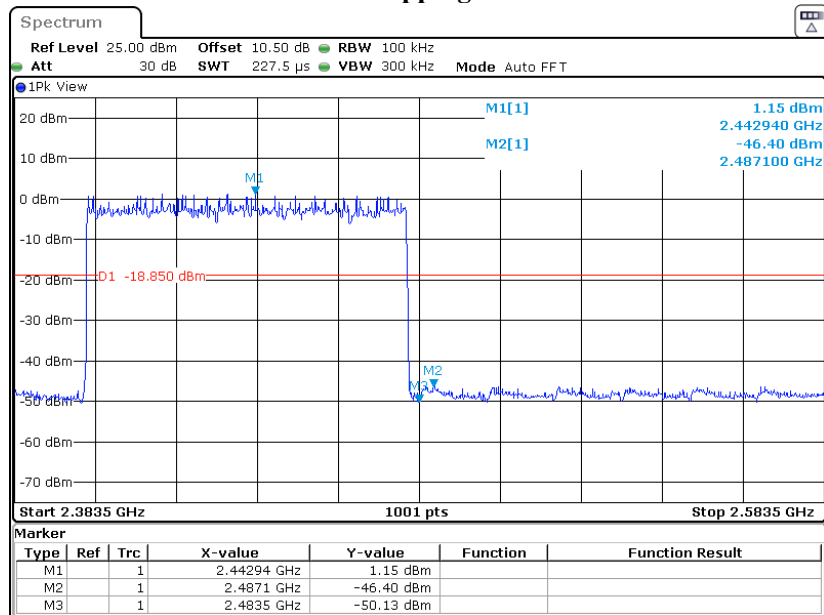

Date: 7.FEB.2023 16:51:52

### Single

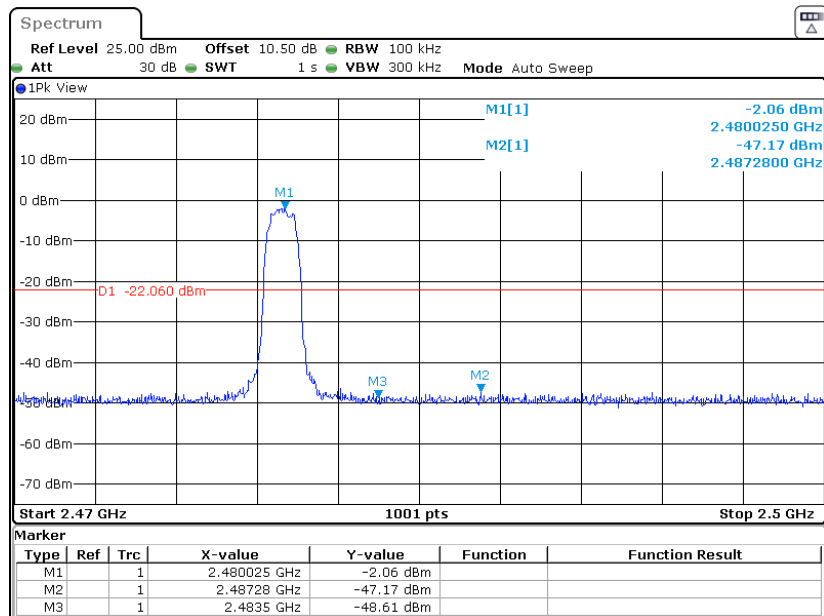

Date: 7.FEB.2023 16:34:59

\*\*\*\*\* END OF REPORT \*\*\*\*\*