


Meander Line Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency (dBi)	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2450MHz	2400MHz	2500MHz
	-1.26	-0.76	1.3	-5.25	-2.46	-1.86
MAX. Gain	1.3dBi					
polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	14.86mm					
Manufacture	Shenzhen Bluetrum Technology Co., Ltd.					


Address:13th Floor, Unit 1, Building A, Smart Plaza, Qiaoxiang Road, Gaofa Community, Shahe Street, Nanshan District, Shenzhen

Antenna Photo & Length (mm)

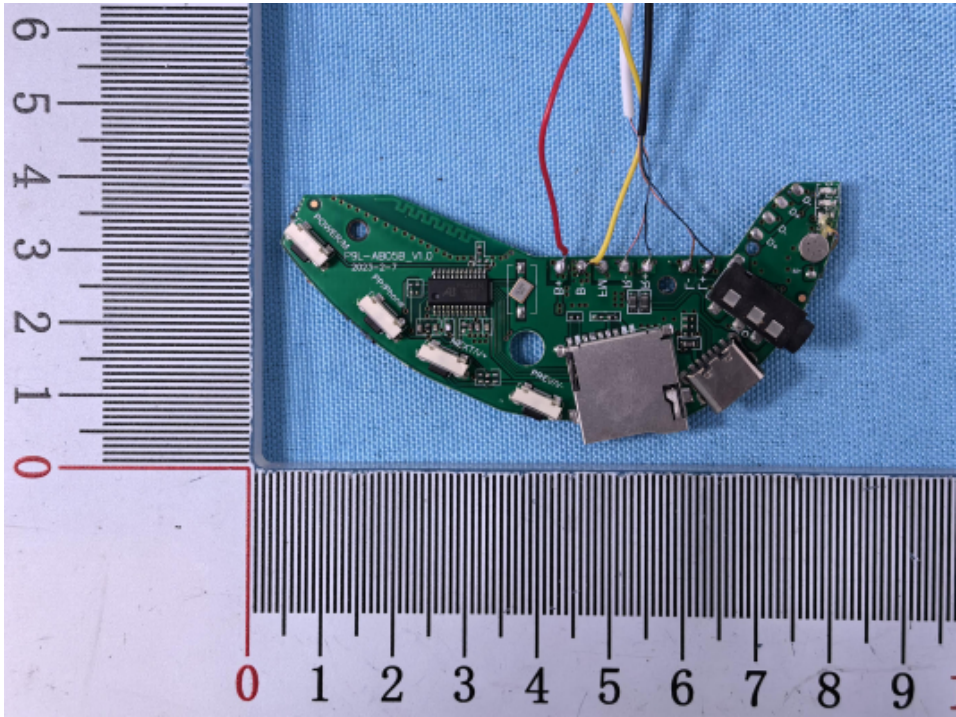

Horizontal: 2400 MHz 2450 MHz 2500 MHz


Max:2 Min:-38 Scale: 5/div

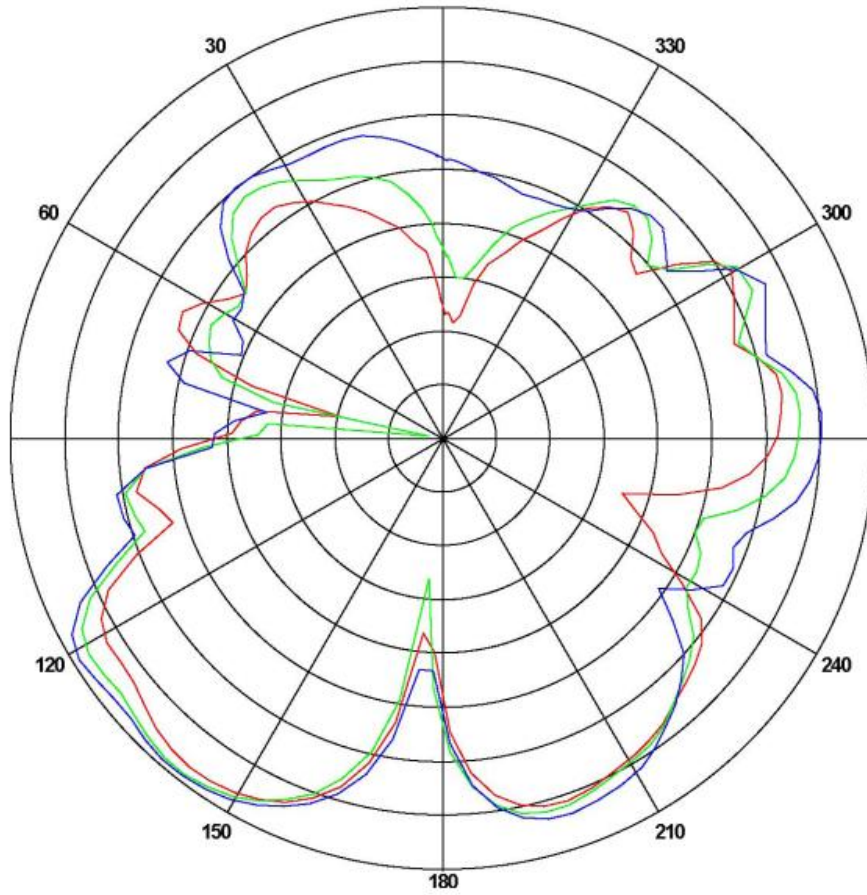

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.765802	-36.5604	-7.48023
2500	1.303061	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Max: 0 Min: -30 Scale: 5/div

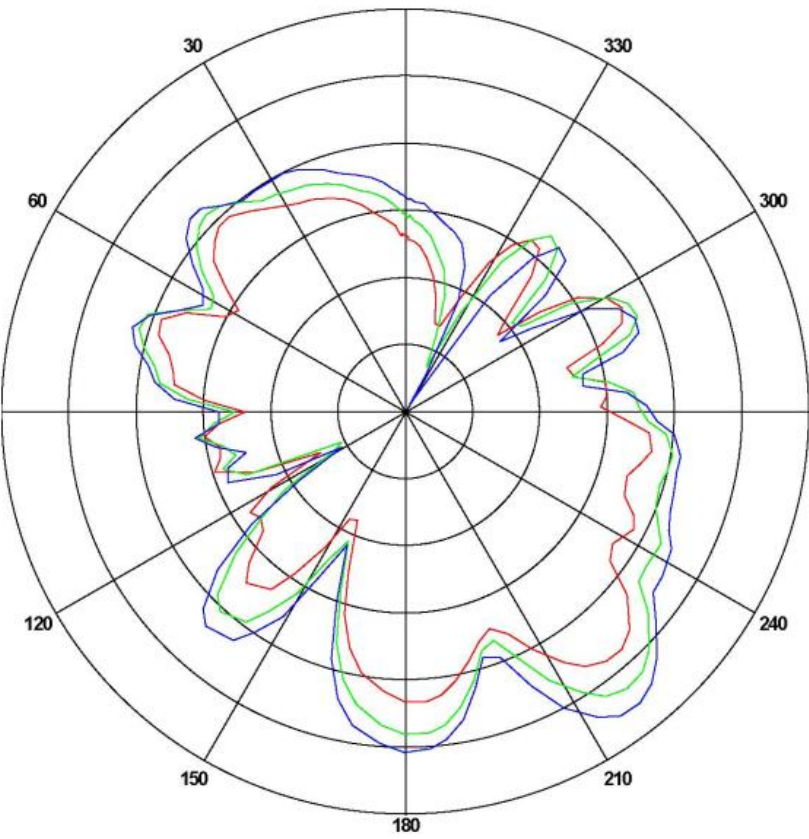

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-5.2537	-22.1424	-12.4294
2450	-2.4652	-24.5837	-10.4702
2500	-1.86120	-29.5214	-9.20432

ANT Test Labs: Attestation of Global Compliance Co., Ltd.