

RF Test Data for 2.4G WiFi (Conducted Measurements)


General Description of EUT	
Product Name:	Laser Engraver
Test Model:	G10
Sample ID:	202208_0350-01-2
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	AC 120V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202208-0350-2	

Contents


1. Duty Cycle.....	3
2. Maximum Conducted Output Power.....	9
3. -6dB Bandwidth.....	10
4. Occupied Channel Bandwidth.....	16
5. Maximum Power Spectral Density Level.....	22
6. Band Edge.....	28
7. Conducted RF Spurious Emission.....	35
8. Restrict Band.....	45

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	90.18	0.45	0.99
NVNT	b	2437	Ant1	89.38	0.49	0.99
NVNT	b	2462	Ant1	90.18	0.45	0.99
NVNT	g	2412	Ant1	89.86	0.46	1.61
NVNT	g	2437	Ant1	89.86	0.46	1.61
NVNT	g	2462	Ant1	89.86	0.46	1.61
NVNT	n(HT20)	2412	Ant1	89.71	0.47	1.64
NVNT	n(HT20)	2437	Ant1	89.71	0.47	1.64
NVNT	n(HT20)	2462	Ant1	89.86	0.46	1.61

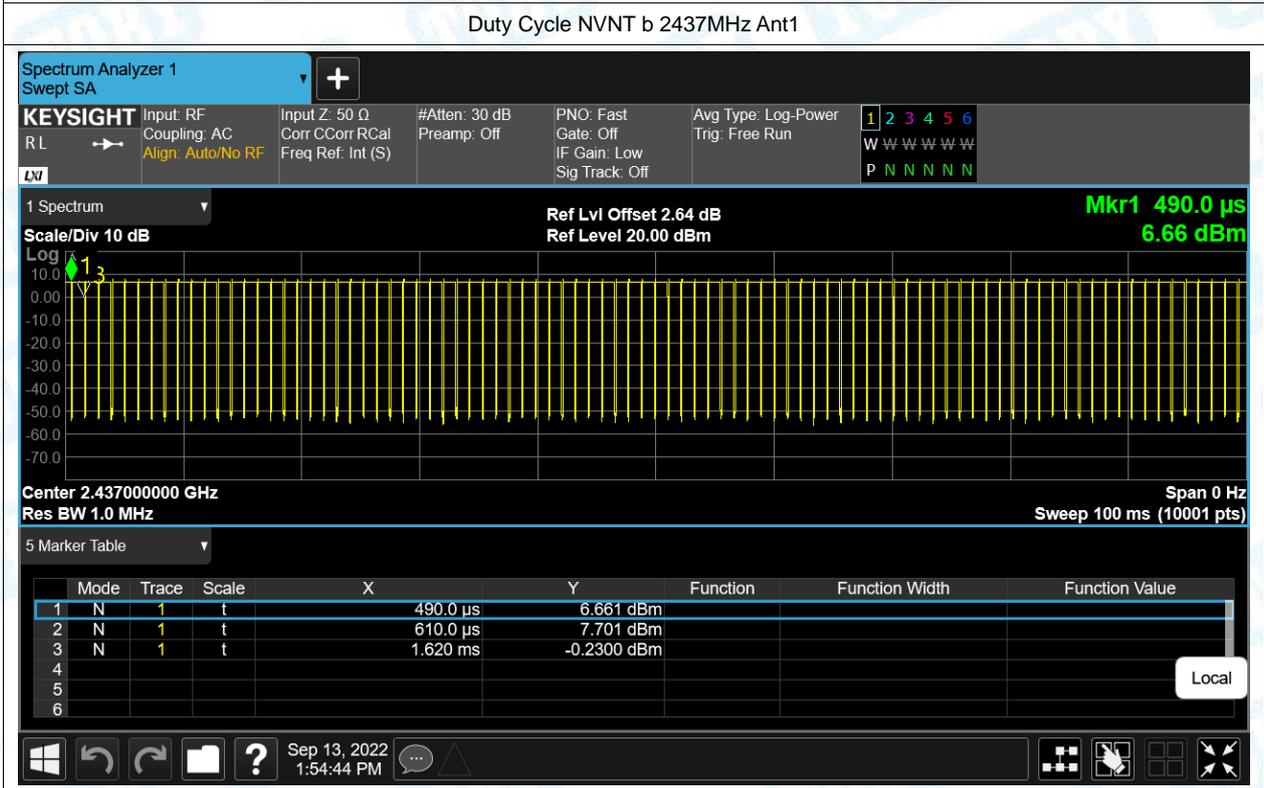


Duty Cycle NVNT b 2462MHz Ant1

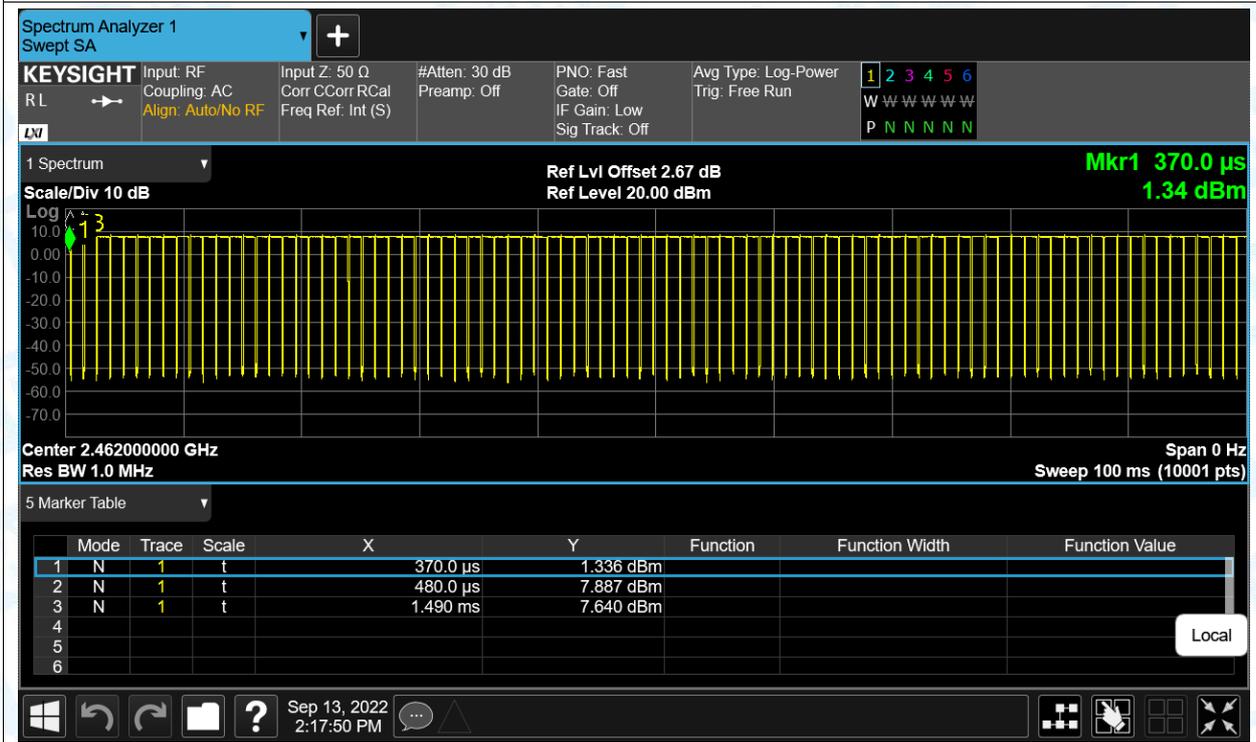


Duty Cycle NVNT g 2412MHz Ant1


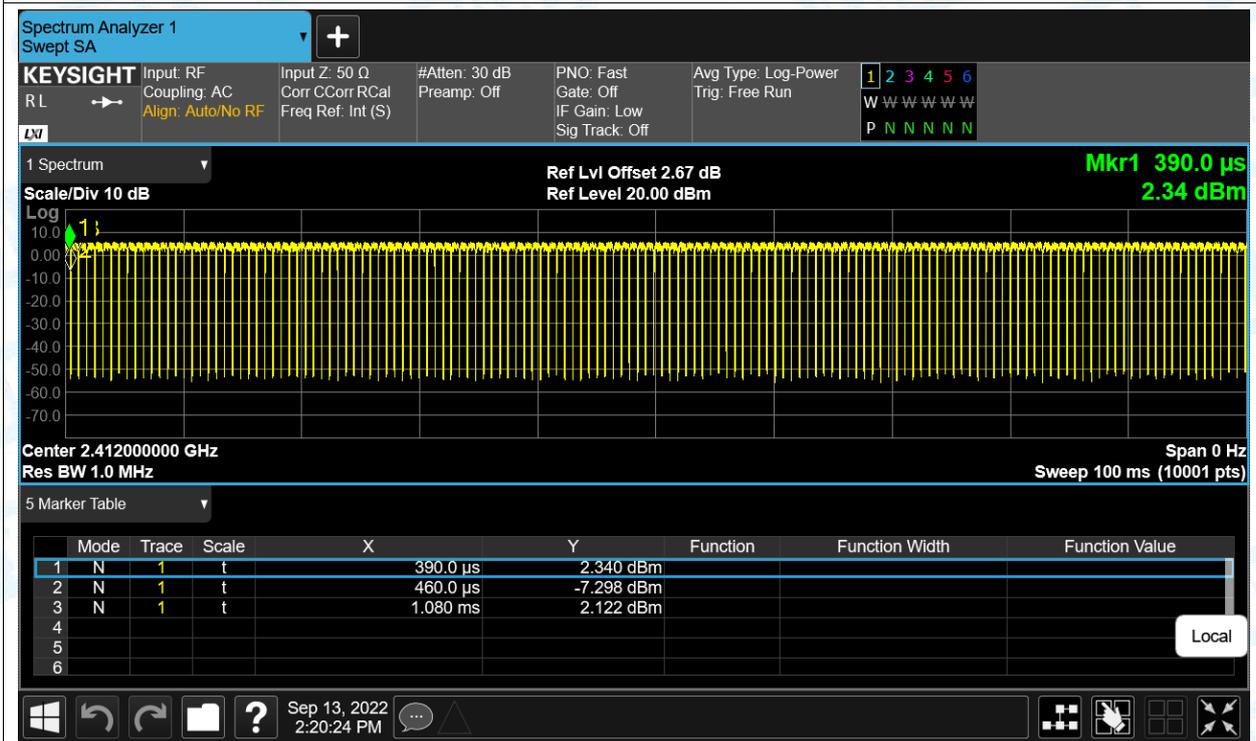



Duty Cycle NVNT g 2437MHz Ant1

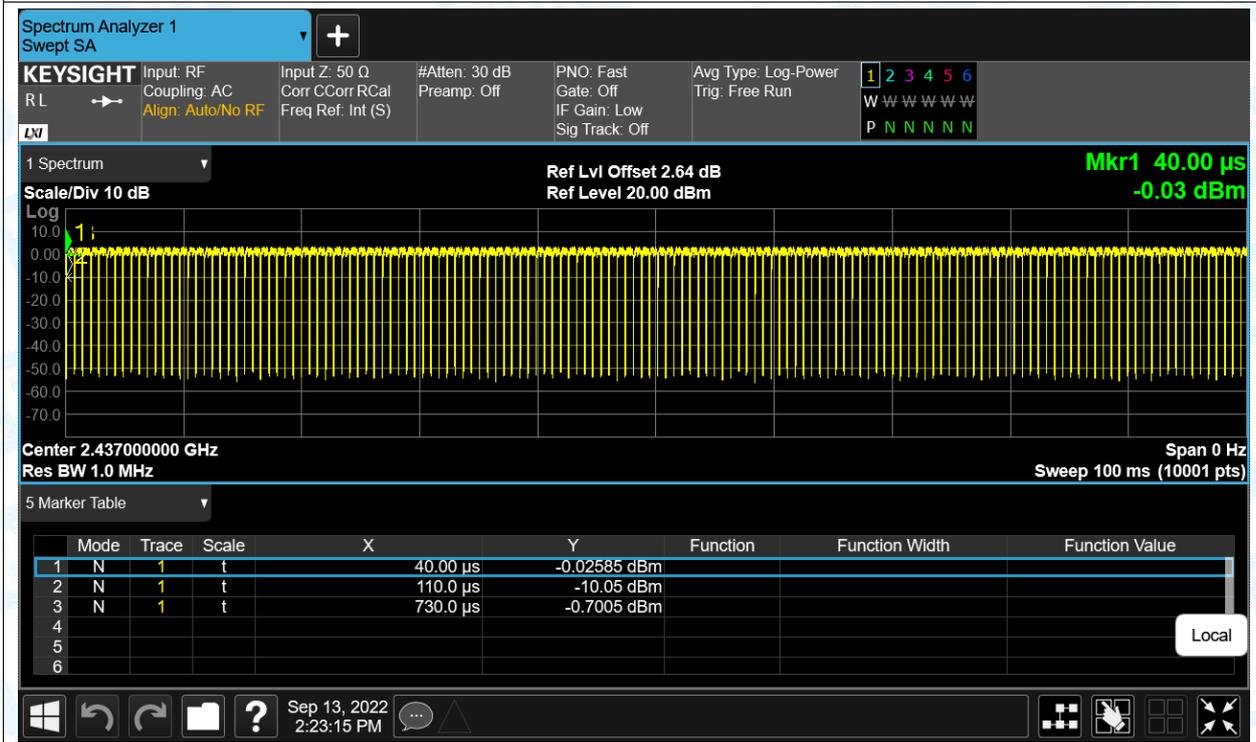

Duty Cycle NVNT g 2462MHz Ant1

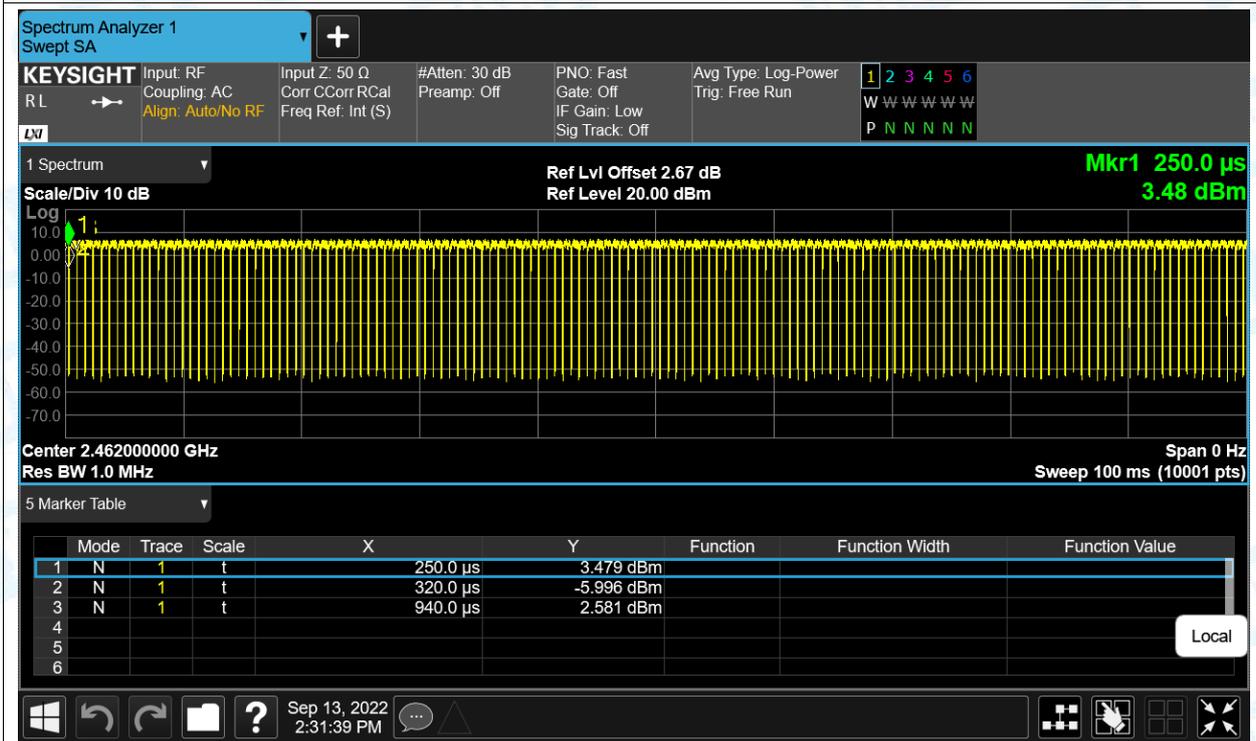

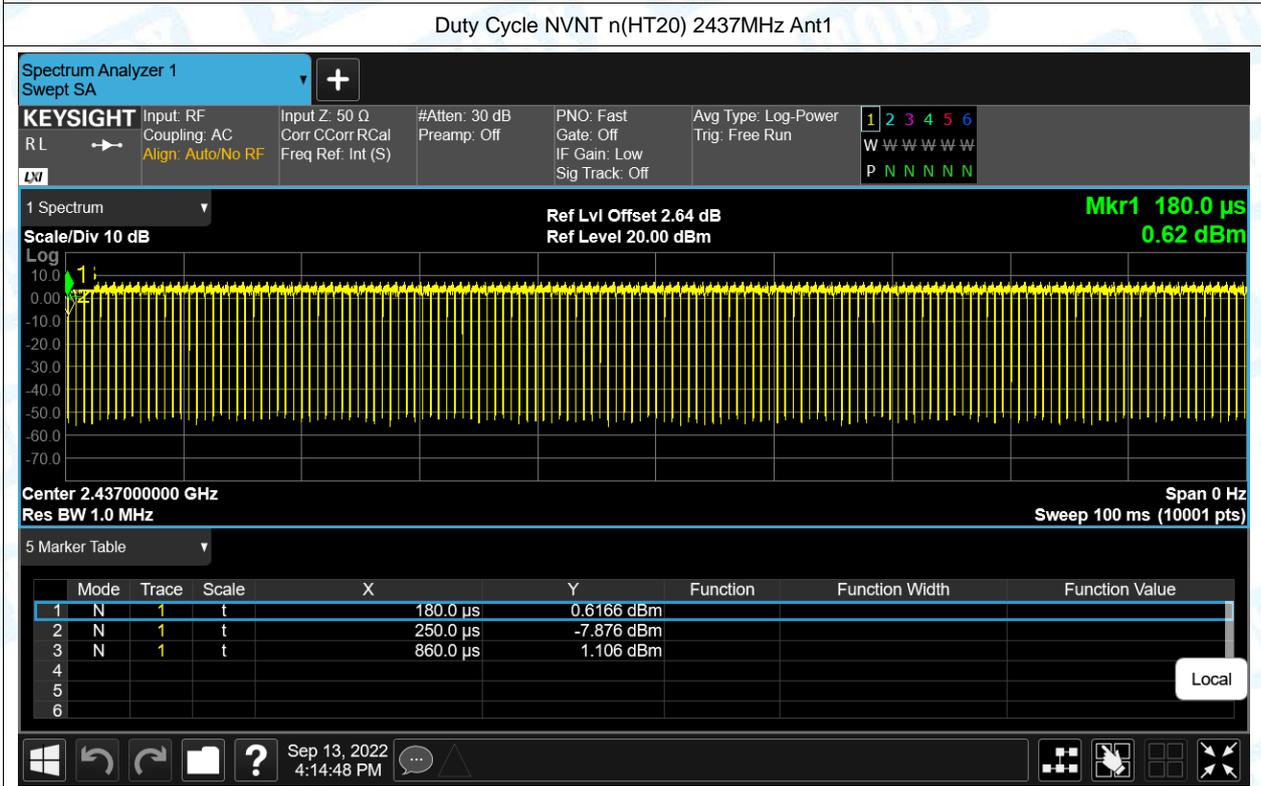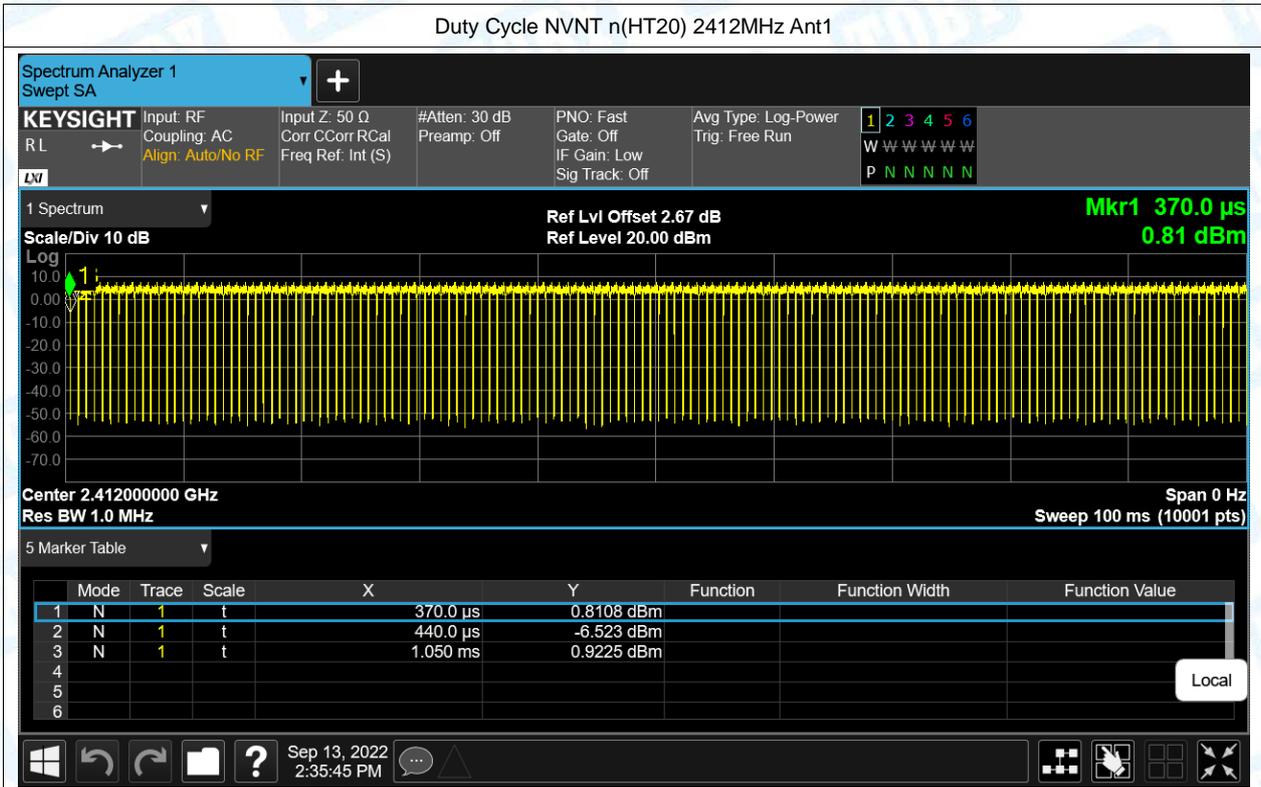

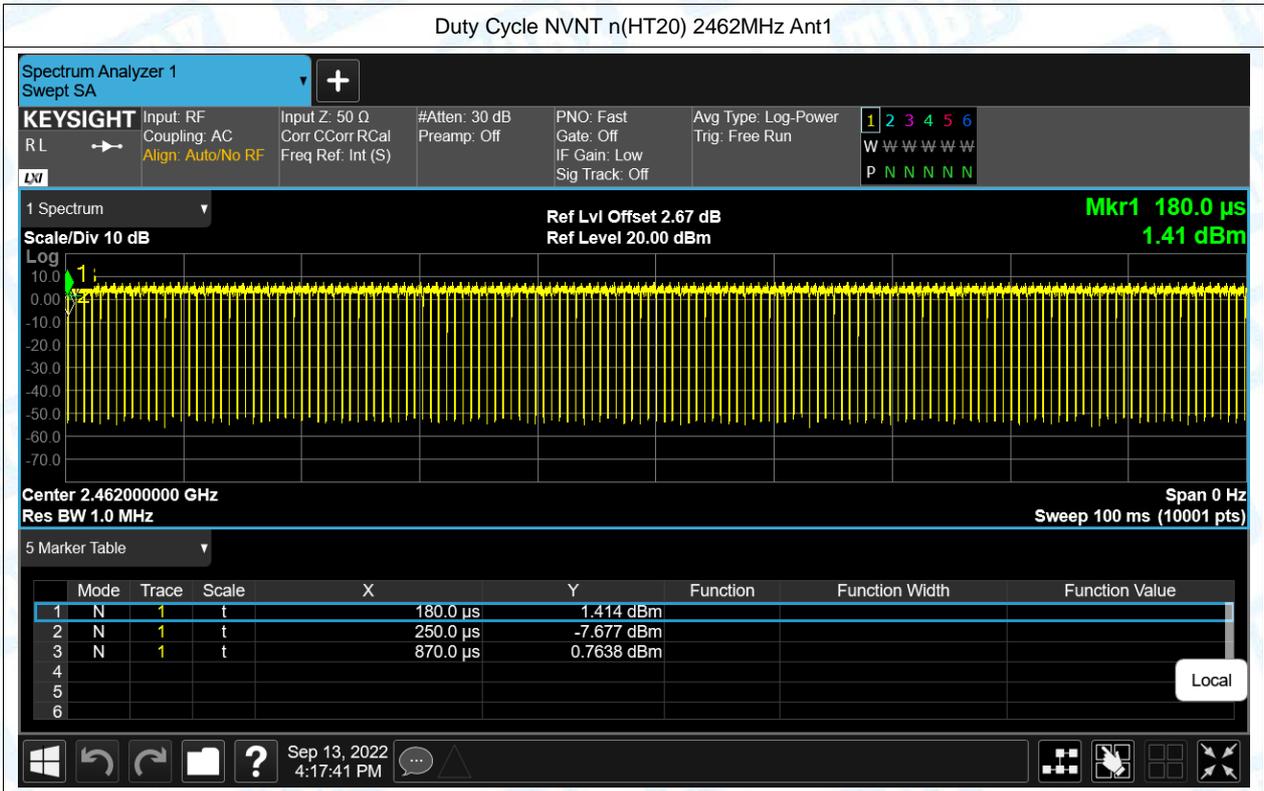




2. Maximum Conducted Output Power



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	13.869	30	Pass
NVNT	b	2437	Ant1	13.812	30	Pass
NVNT	b	2462	Ant1	14.739	30	Pass
NVNT	g	2412	Ant1	15.326	30	Pass
NVNT	g	2437	Ant1	14.743	30	Pass
NVNT	g	2462	Ant1	15.966	30	Pass
NVNT	n(HT20)	2412	Ant1	15.613	30	Pass
NVNT	n(HT20)	2437	Ant1	16.243	30	Pass
NVNT	n(HT20)	2462	Ant1	16.495	30	Pass



3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.03	0.5	Pass
NVNT	b	2437	Ant1	9.59	0.5	Pass
NVNT	b	2462	Ant1	9.53	0.5	Pass
NVNT	g	2412	Ant1	16.37	0.5	Pass
NVNT	g	2437	Ant1	16.33	0.5	Pass
NVNT	g	2462	Ant1	16.37	0.5	Pass
NVNT	n(HT20)	2412	Ant1	17.59	0.5	Pass
NVNT	n(HT20)	2437	Ant1	17.58	0.5	Pass
NVNT	n(HT20)	2462	Ant1	17.58	0.5	Pass

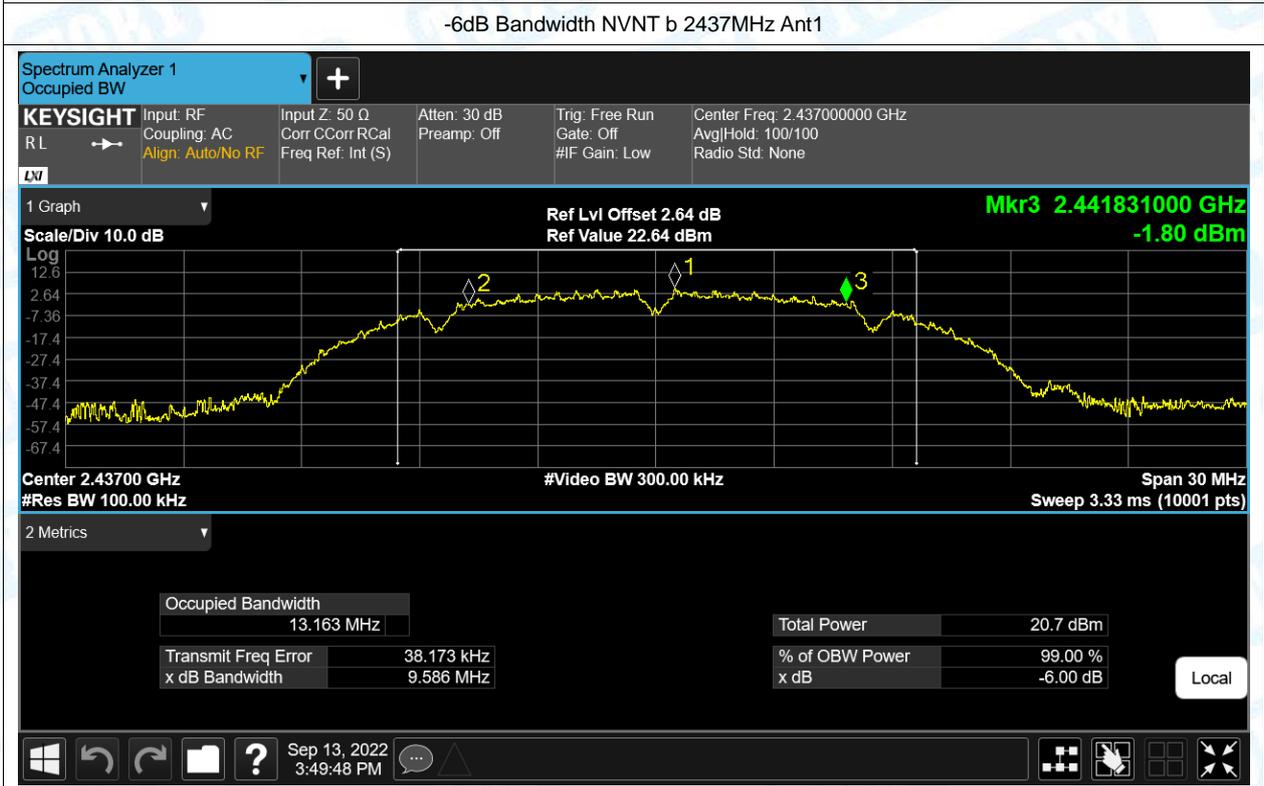

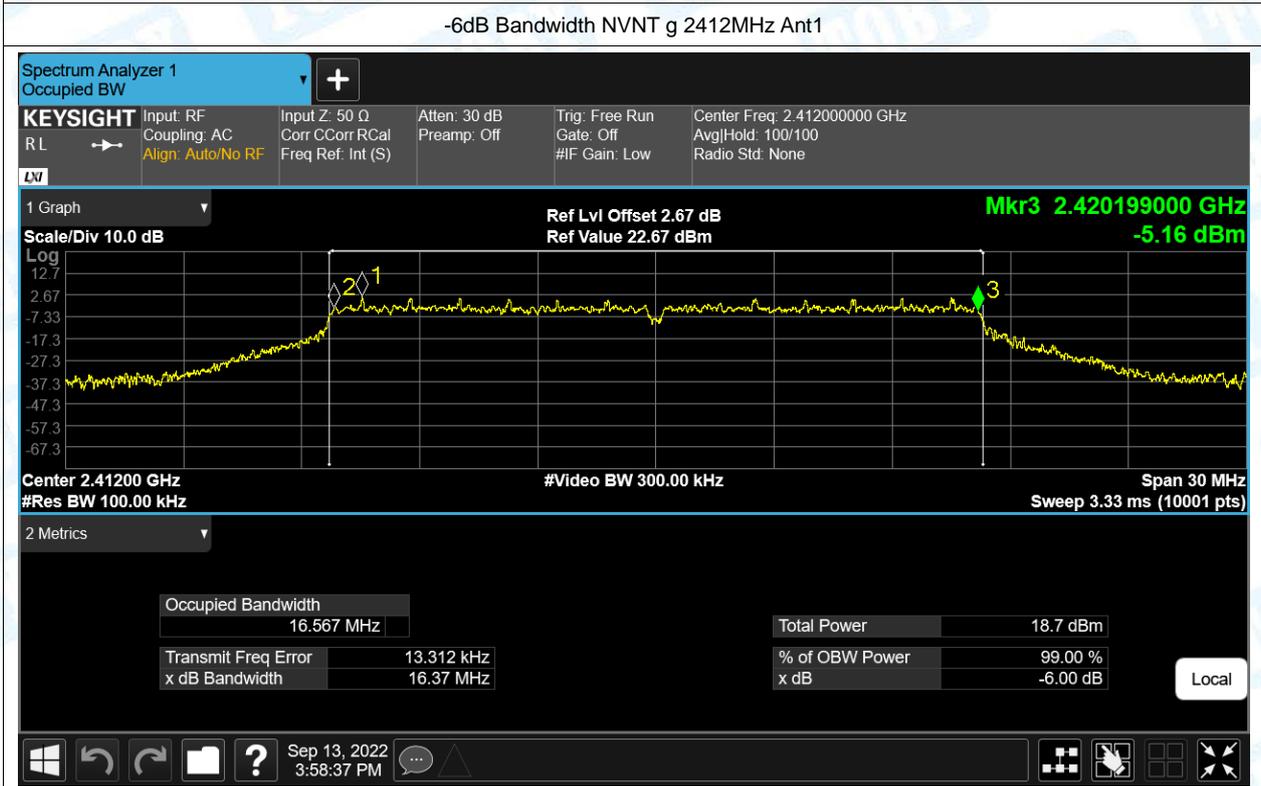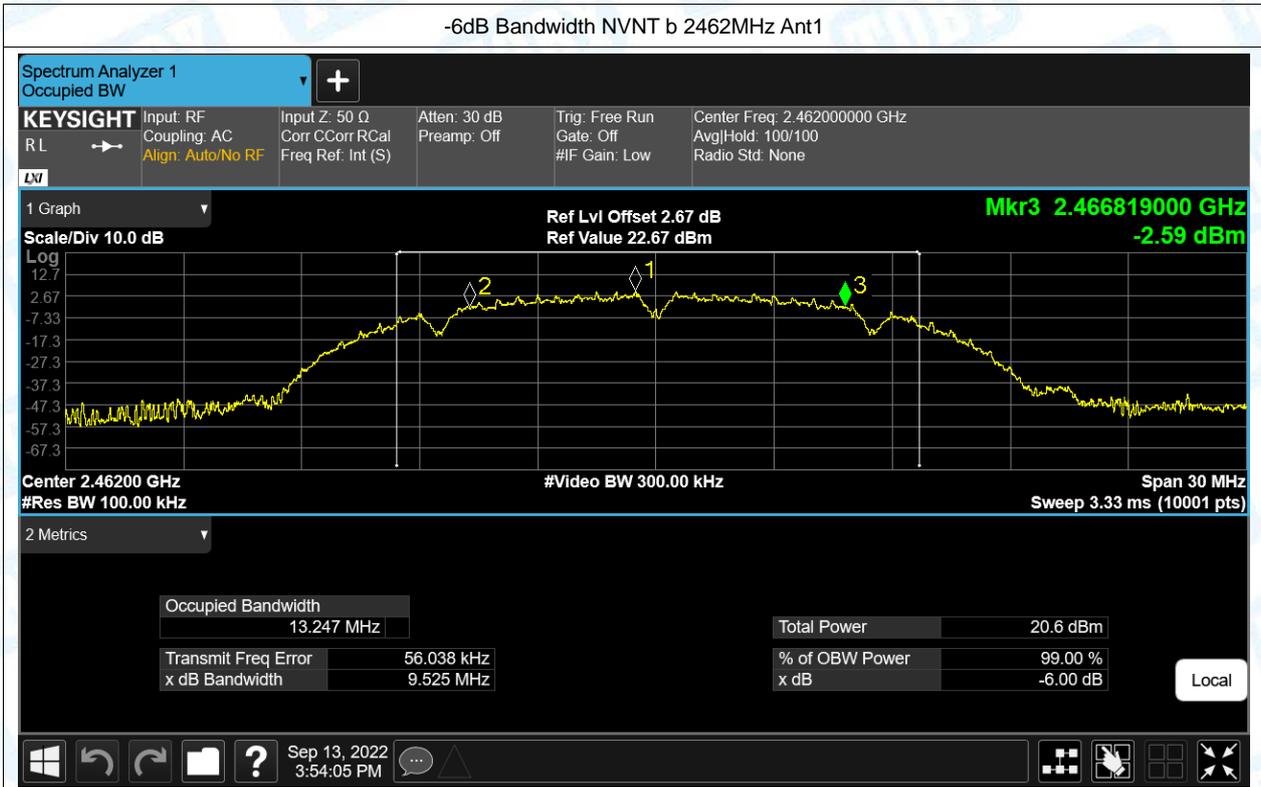

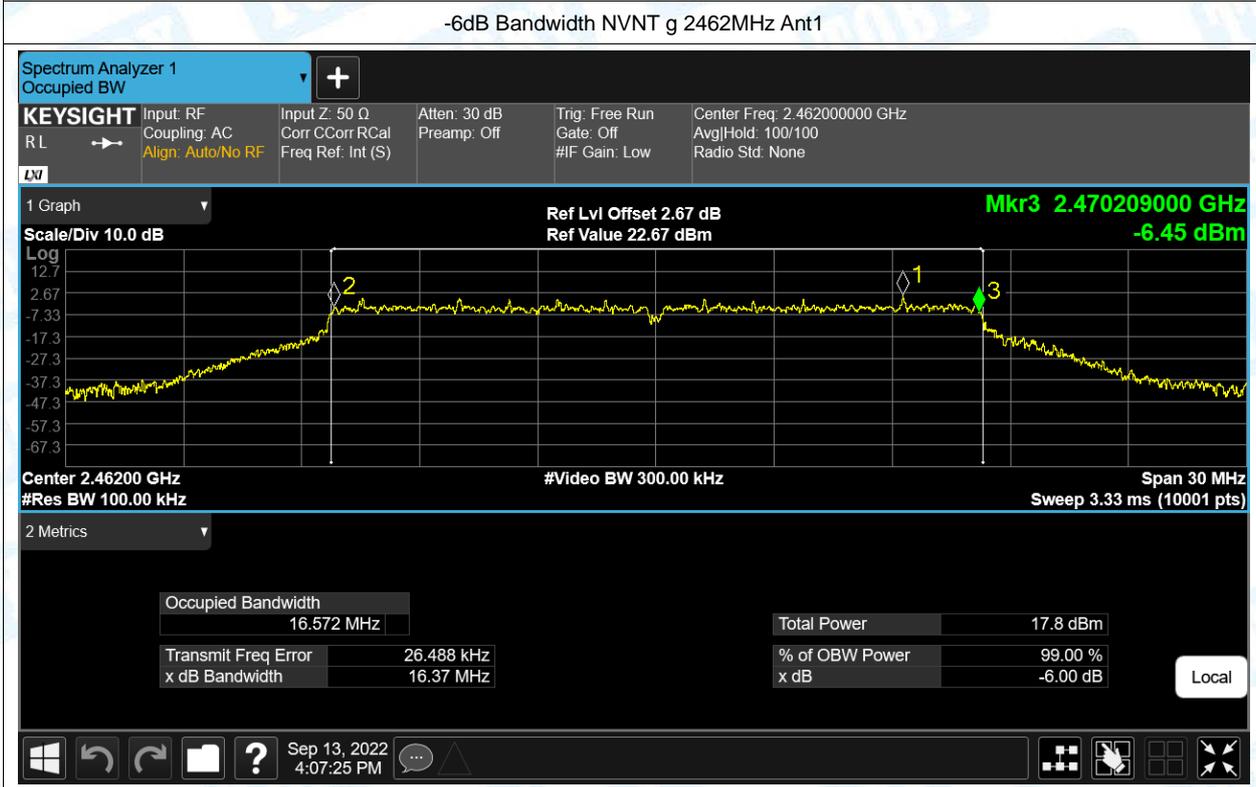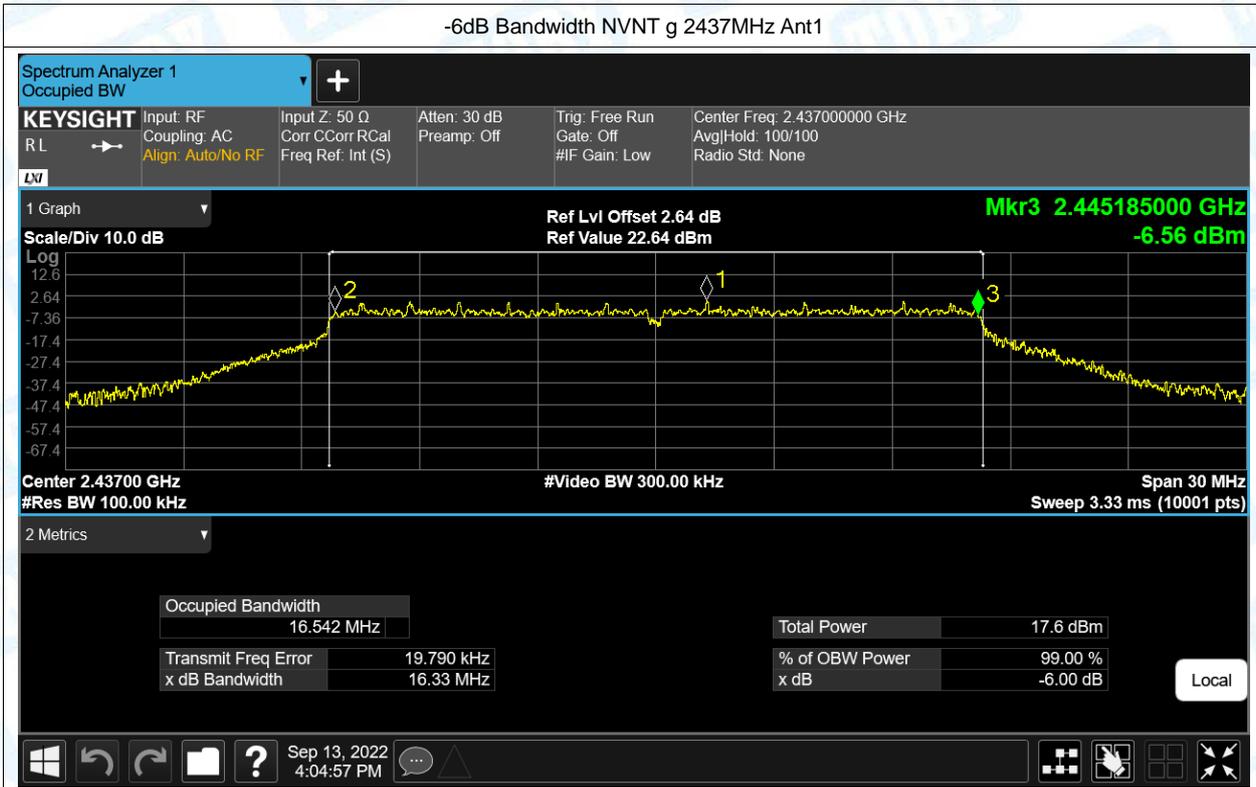

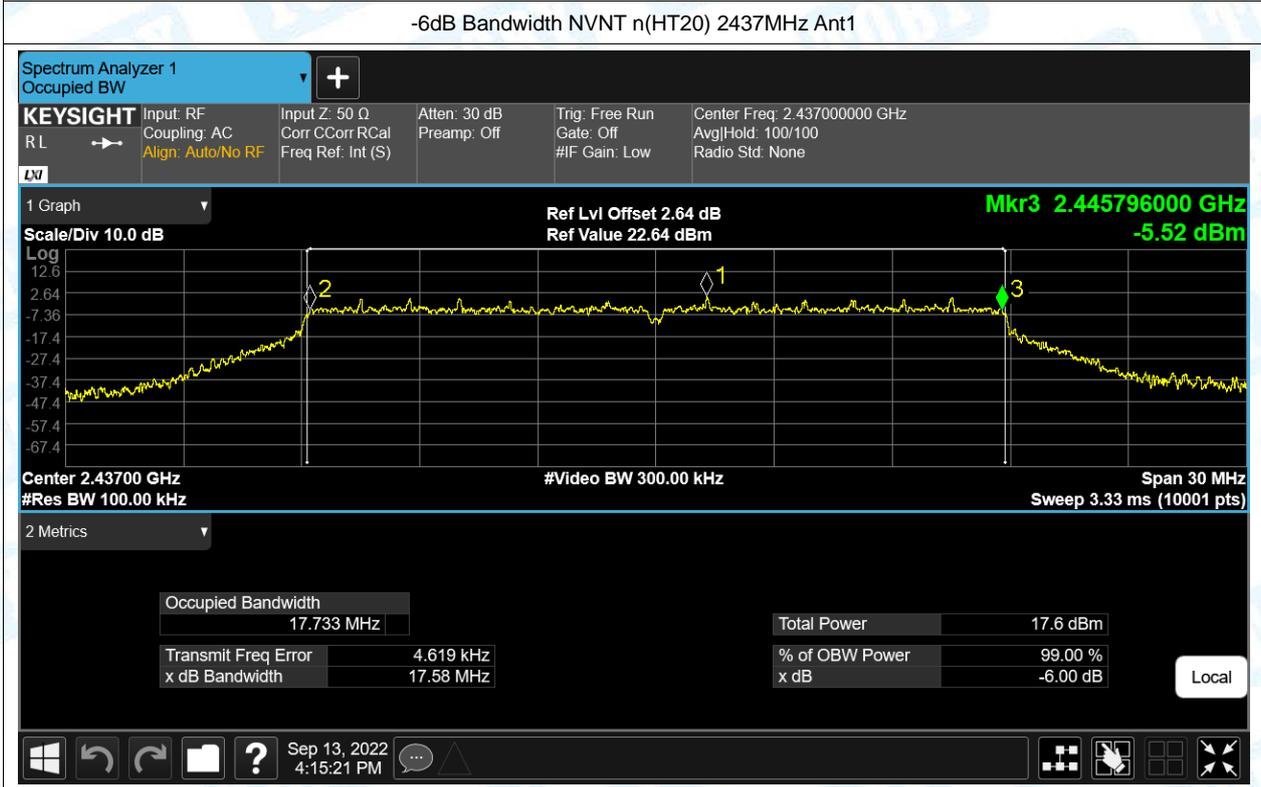
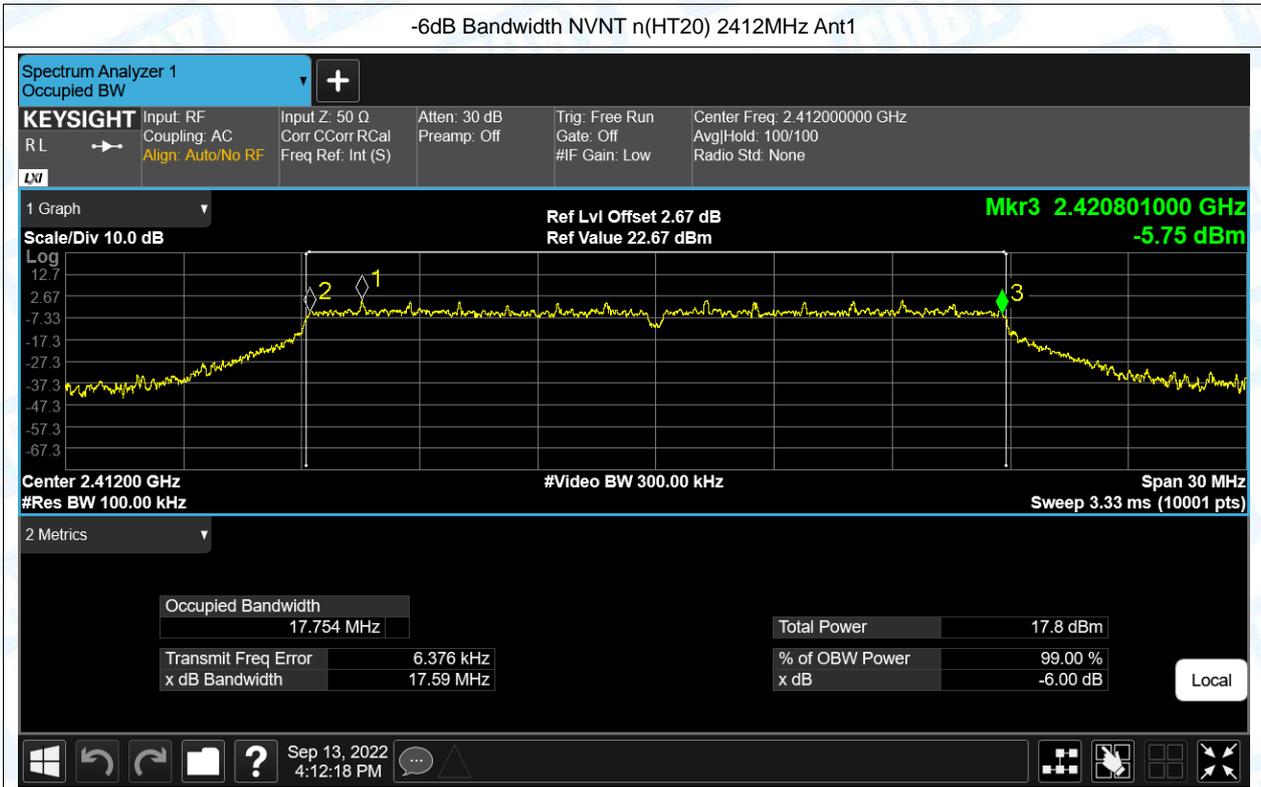



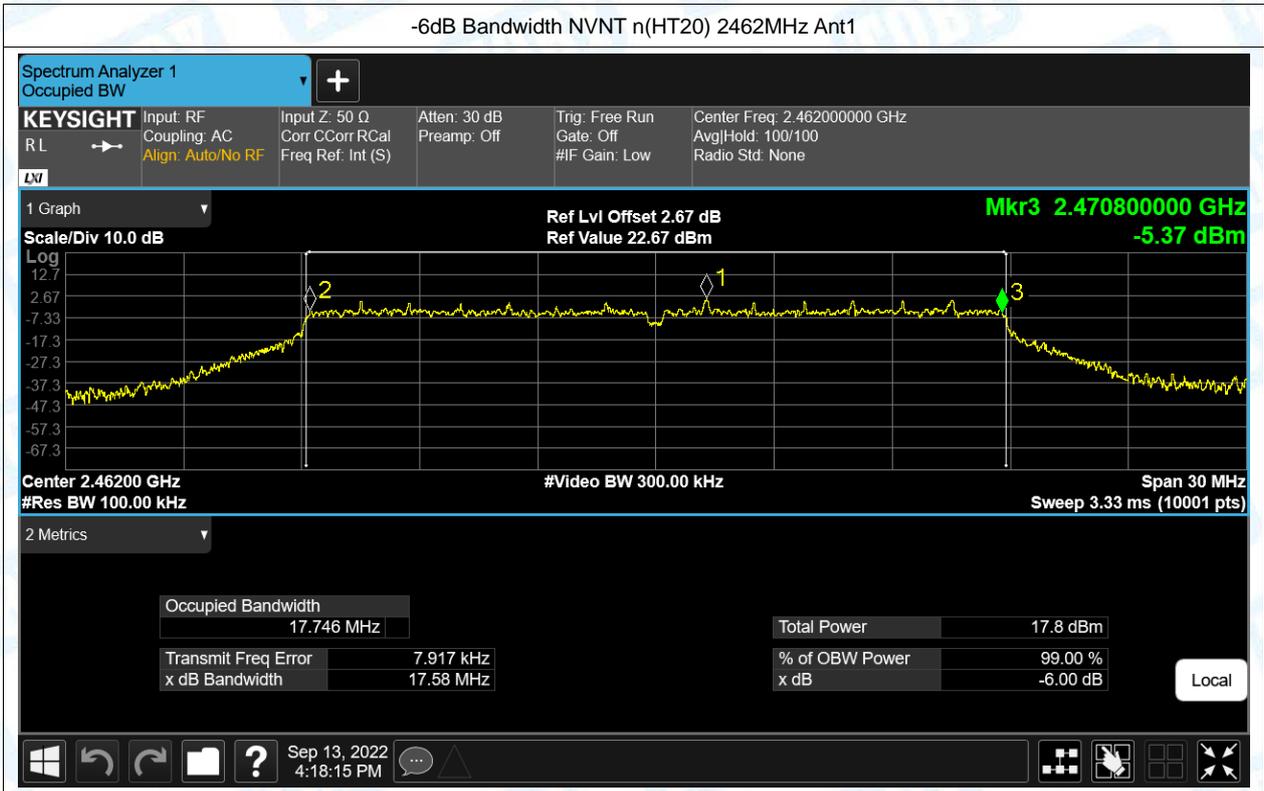




4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.218
NVNT	b	2437	Ant1	13.201
NVNT	b	2462	Ant1	13.241
NVNT	g	2412	Ant1	16.815
NVNT	g	2437	Ant1	16.779
NVNT	g	2462	Ant1	16.789
NVNT	n(HT20)	2412	Ant1	17.936
NVNT	n(HT20)	2437	Ant1	17.894
NVNT	n(HT20)	2462	Ant1	17.941



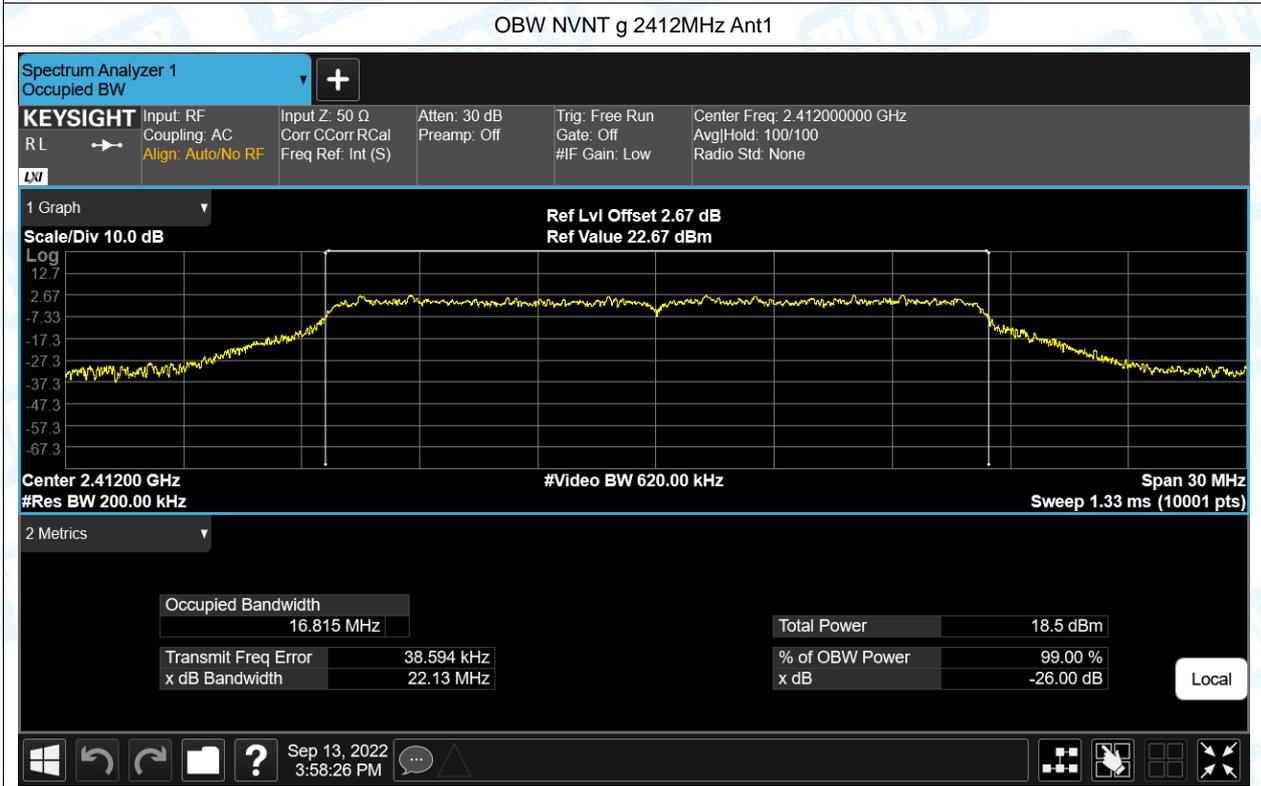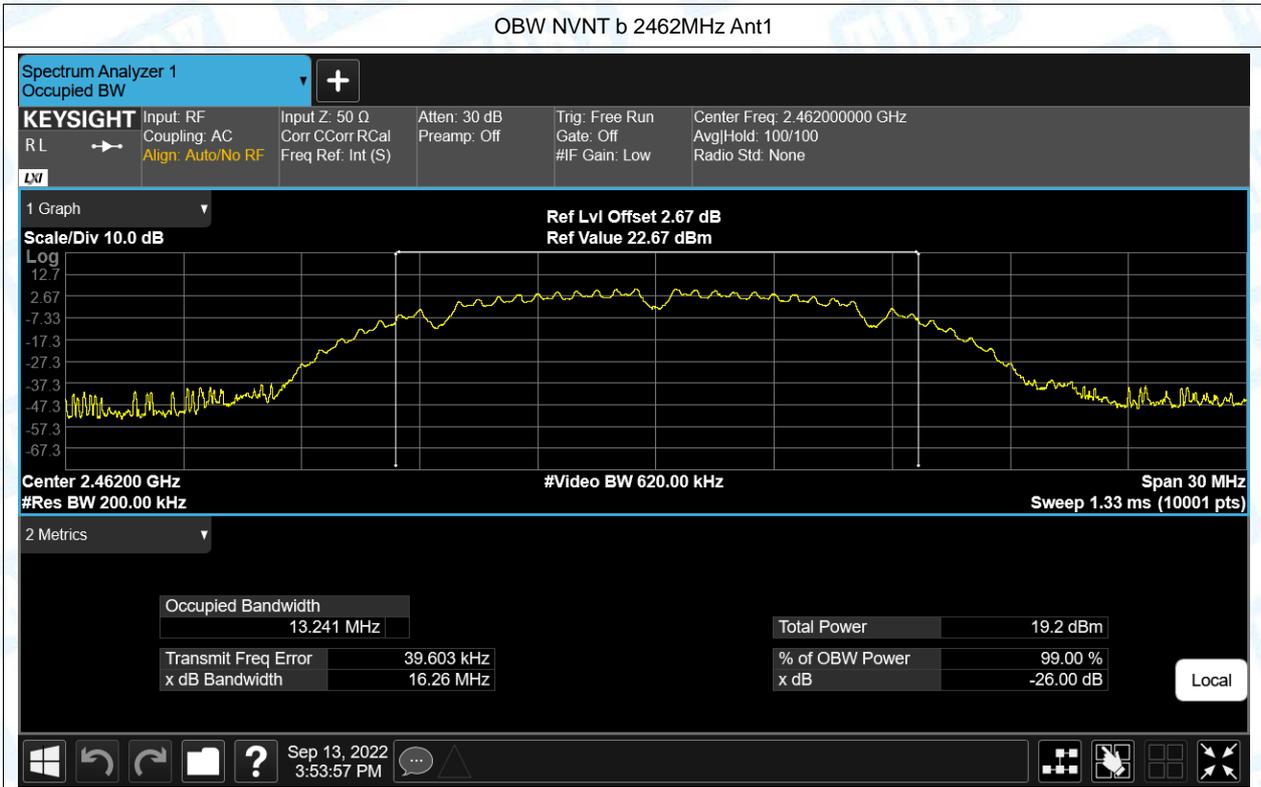

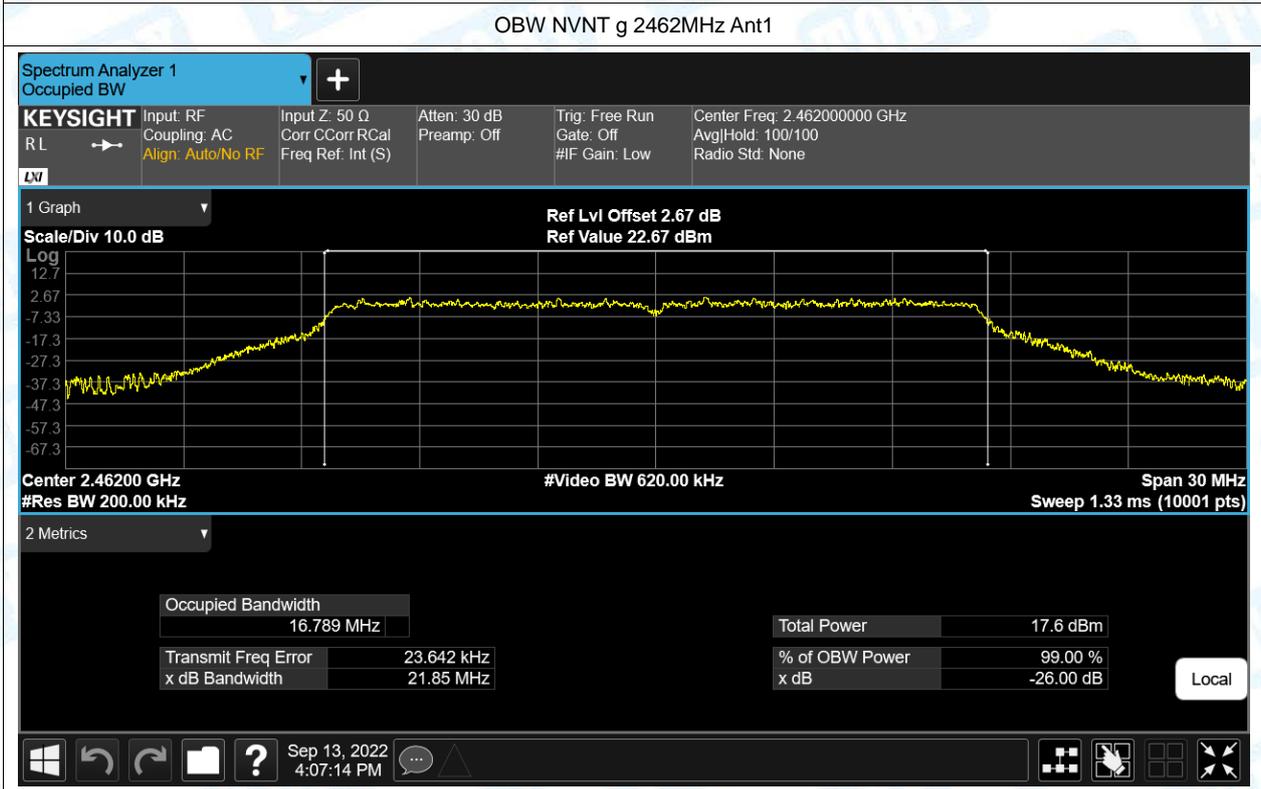
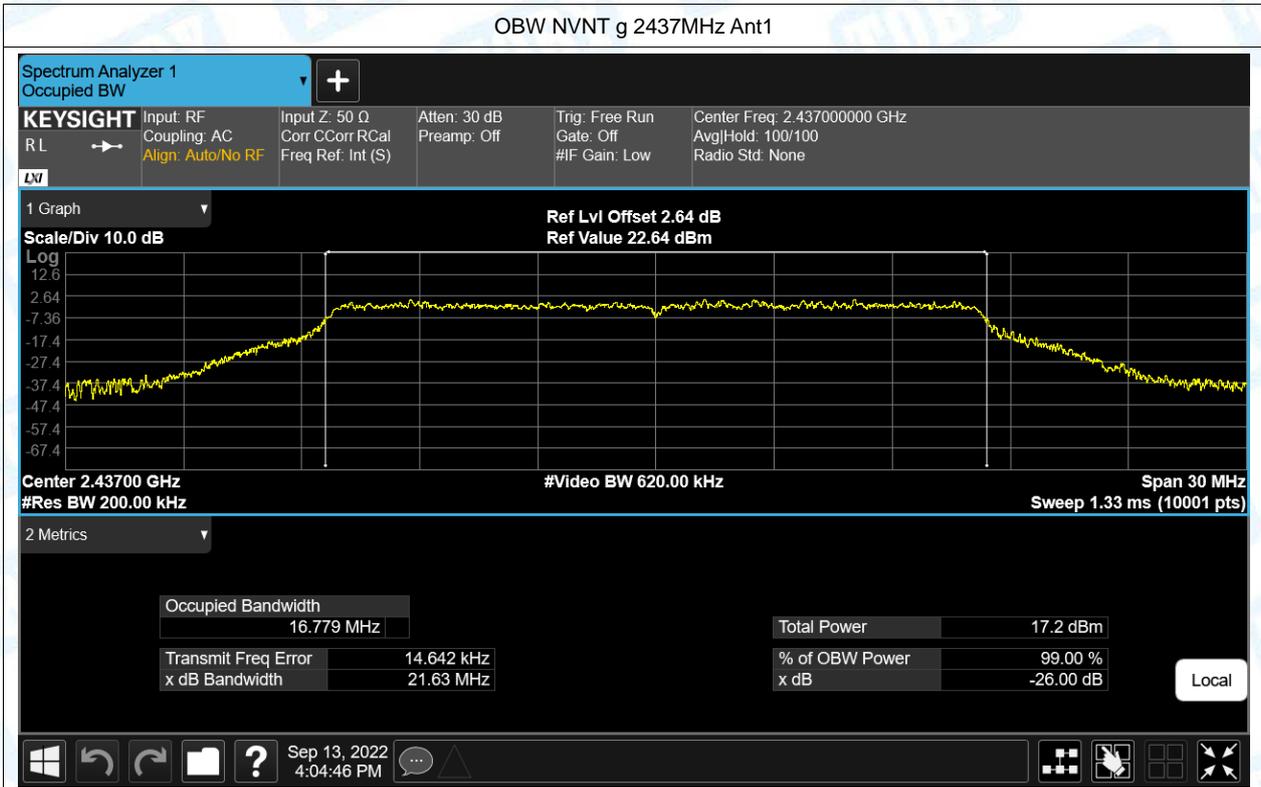


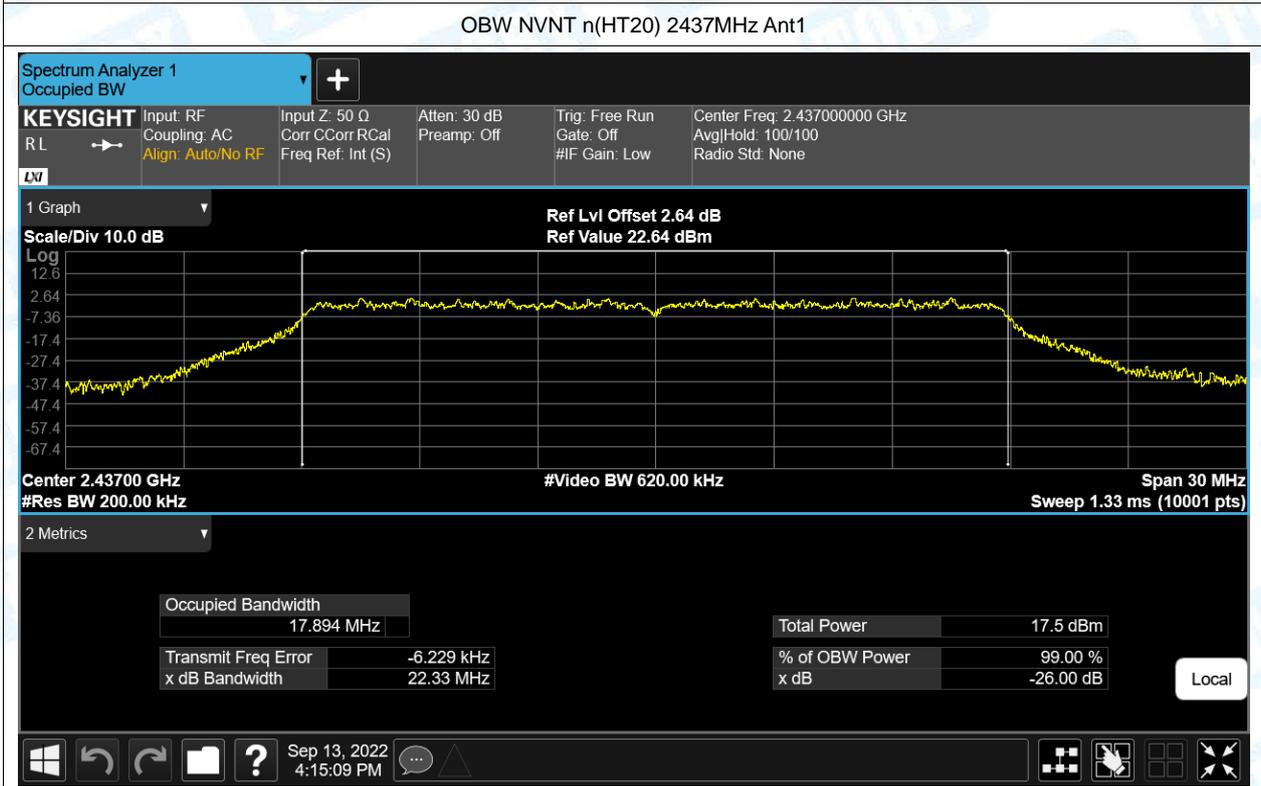
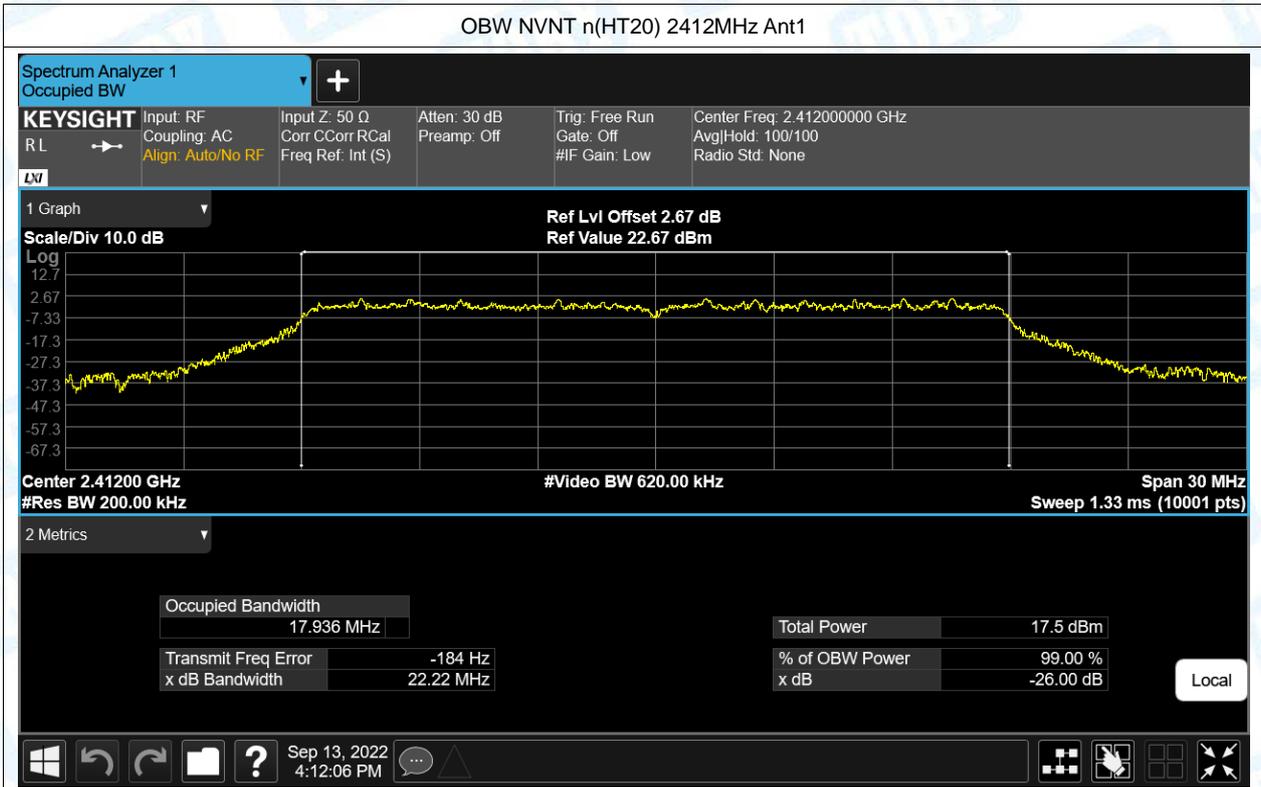








5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-11.859	8	Pass
NVNT	b	2437	Ant1	-11.763	8	Pass
NVNT	b	2462	Ant1	-10.823	8	Pass
NVNT	g	2412	Ant1	-15.034	8	Pass
NVNT	g	2437	Ant1	-15.541	8	Pass
NVNT	g	2462	Ant1	-13.852	8	Pass
NVNT	n(HT20)	2412	Ant1	-14.633	8	Pass
NVNT	n(HT20)	2437	Ant1	-13.874	8	Pass
NVNT	n(HT20)	2462	Ant1	-13.744	8	Pass

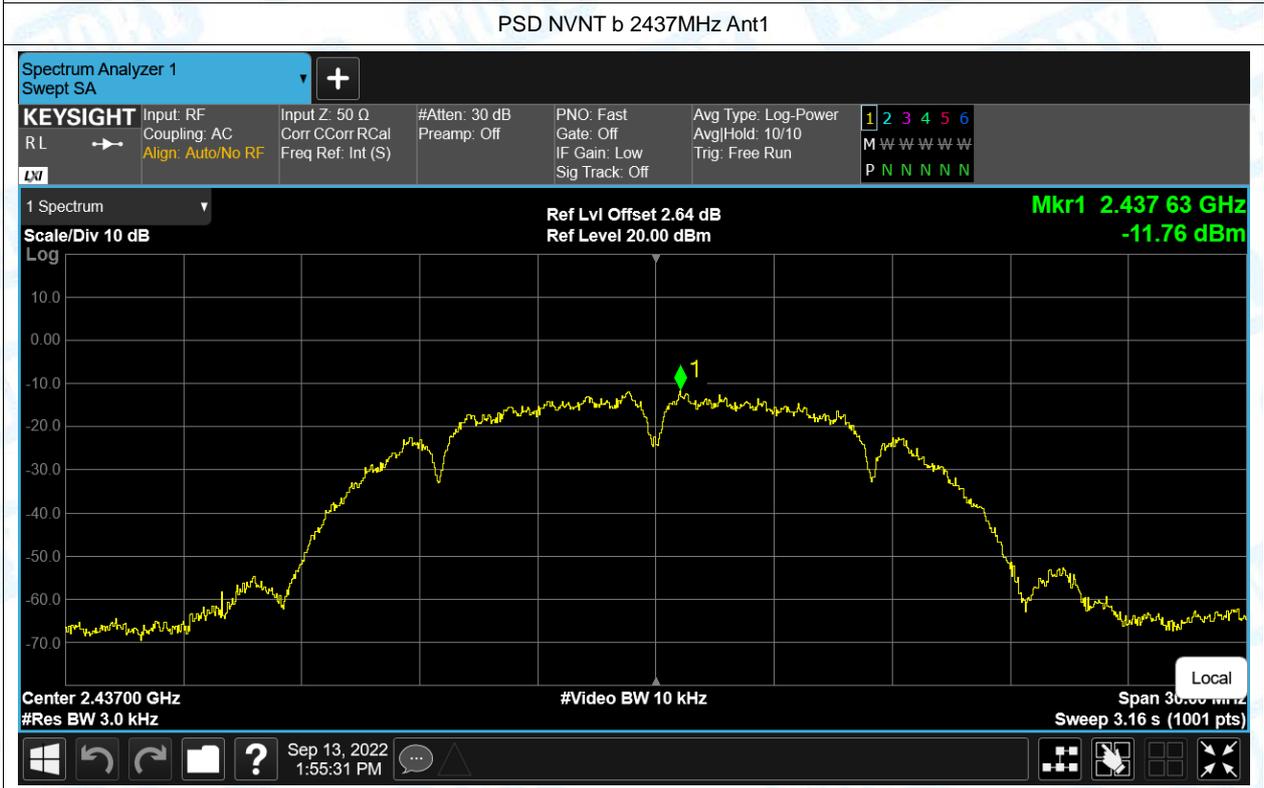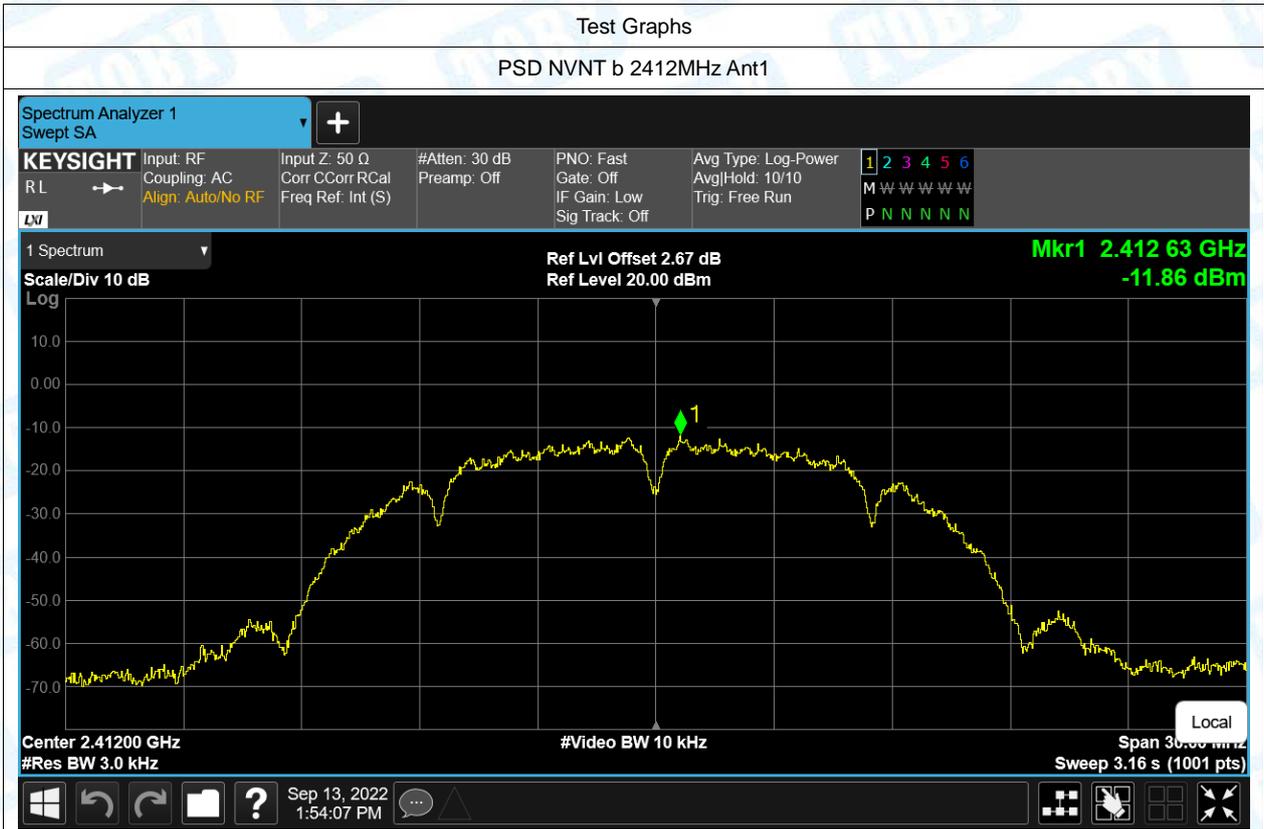

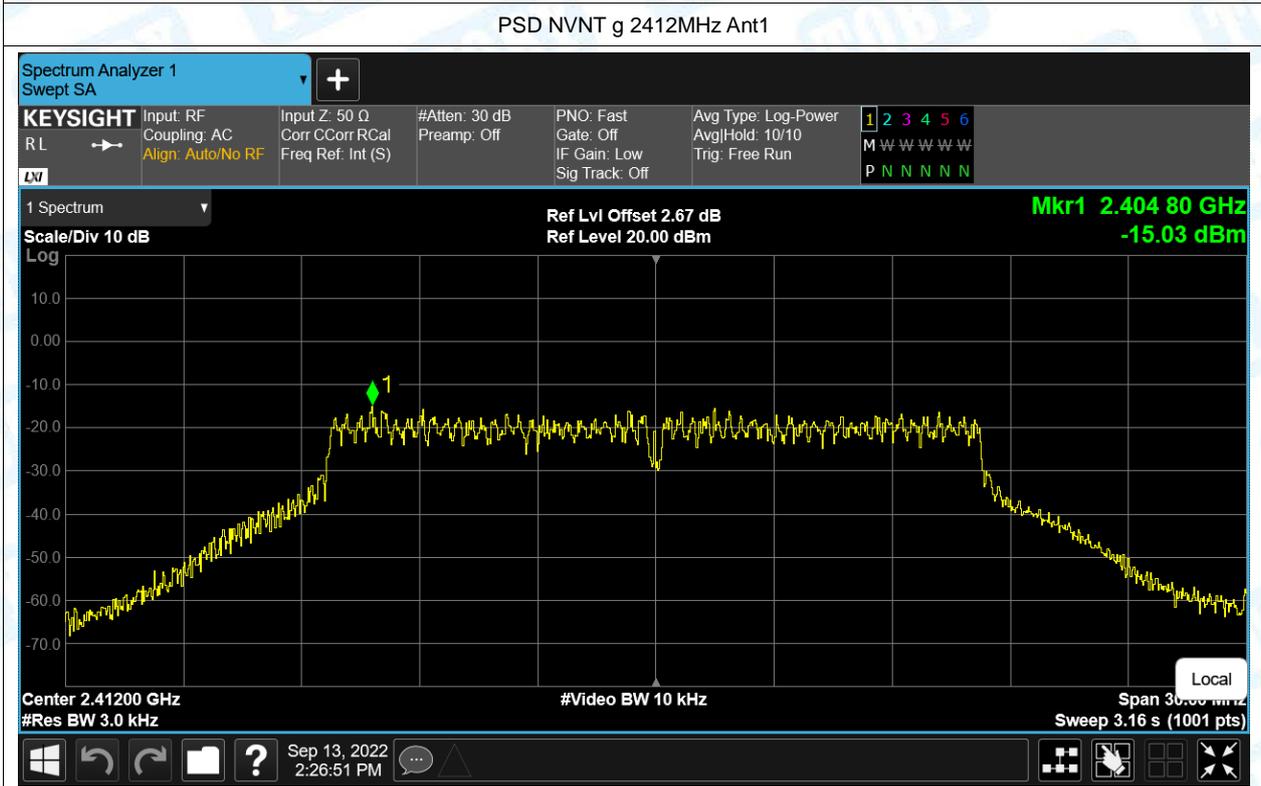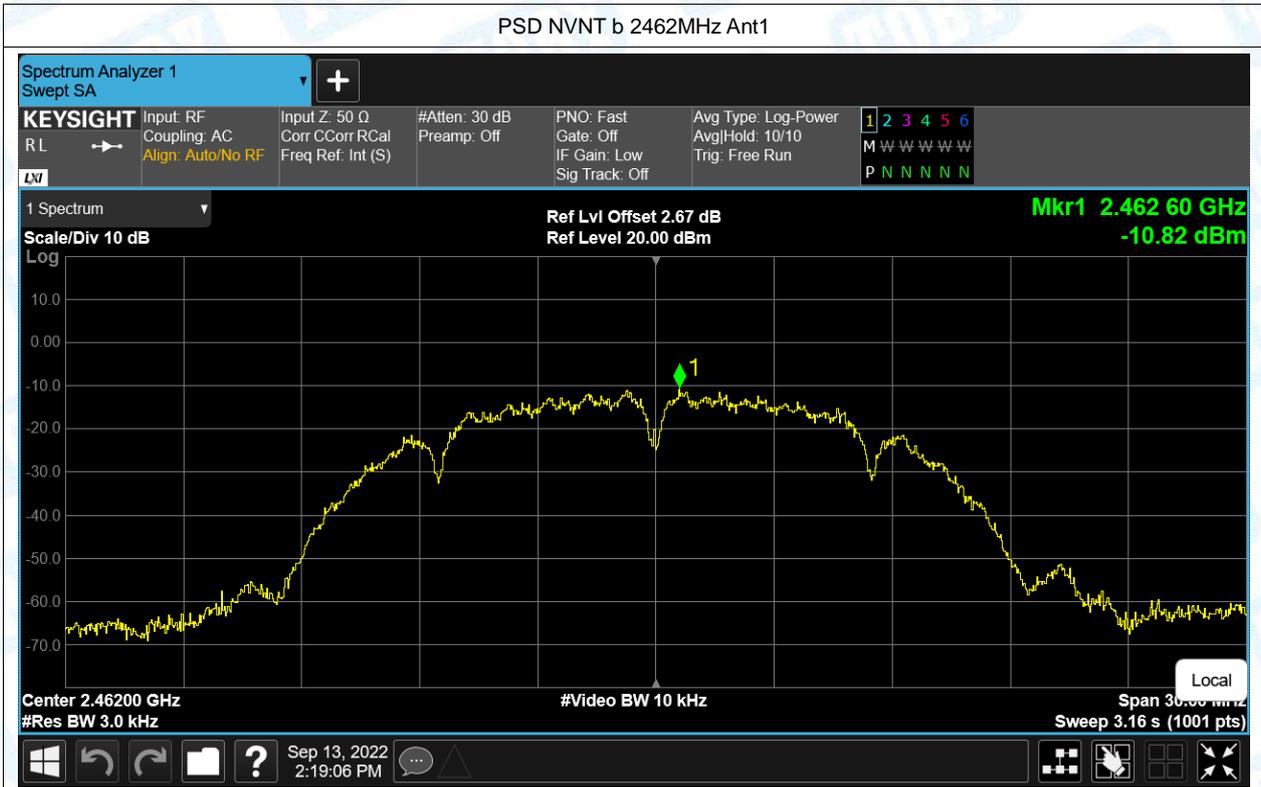

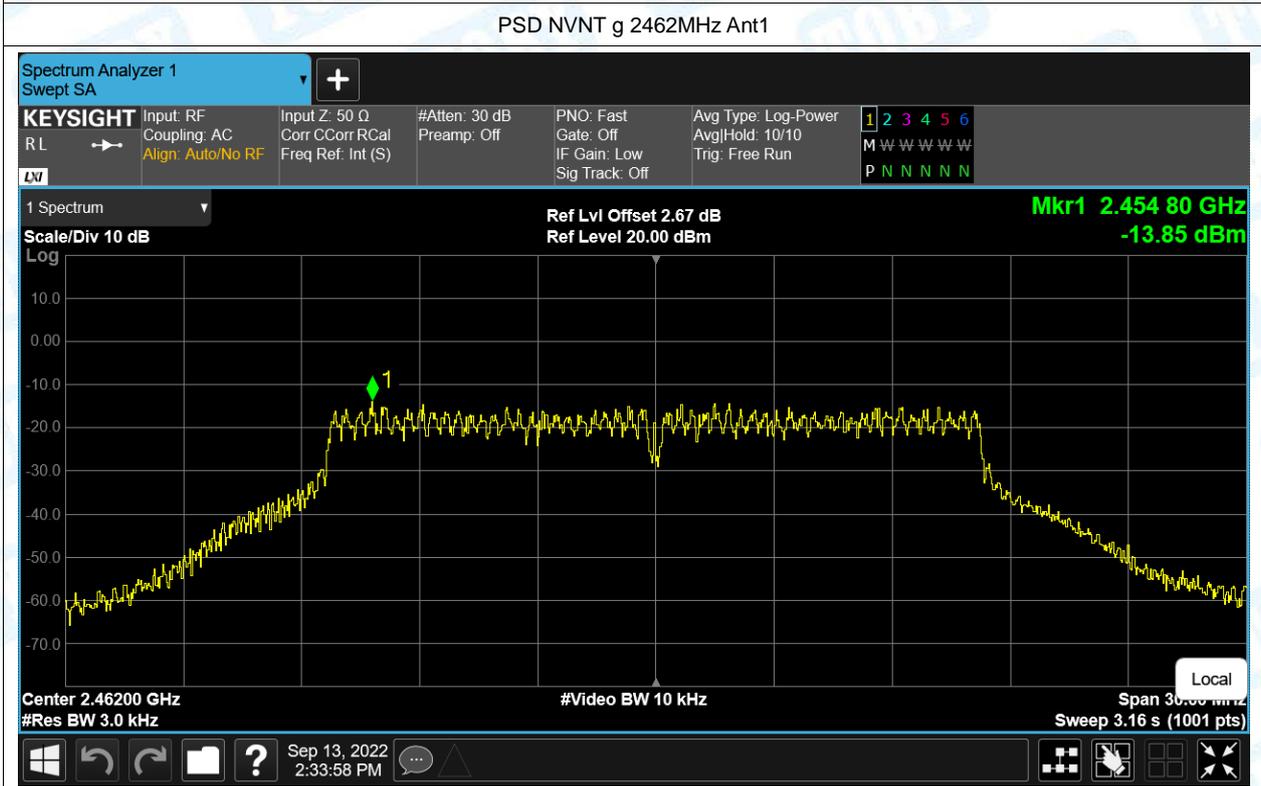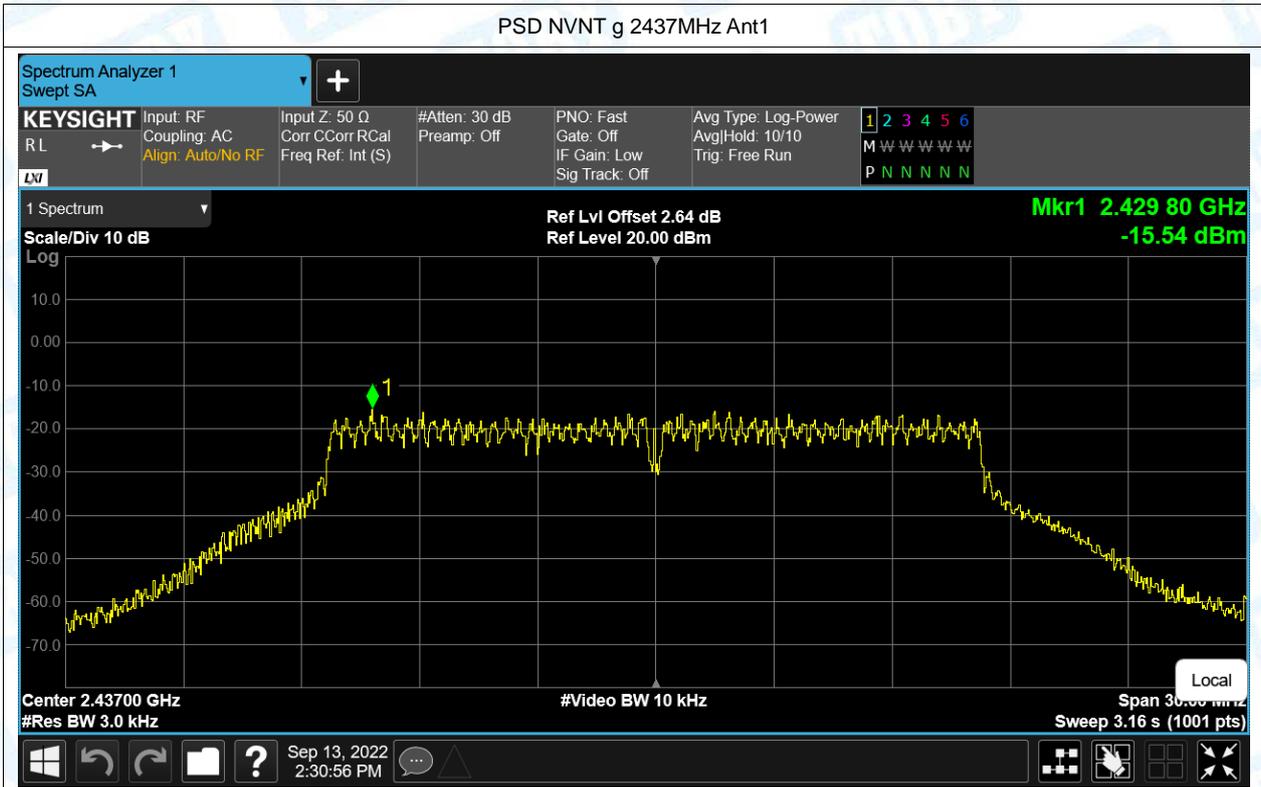

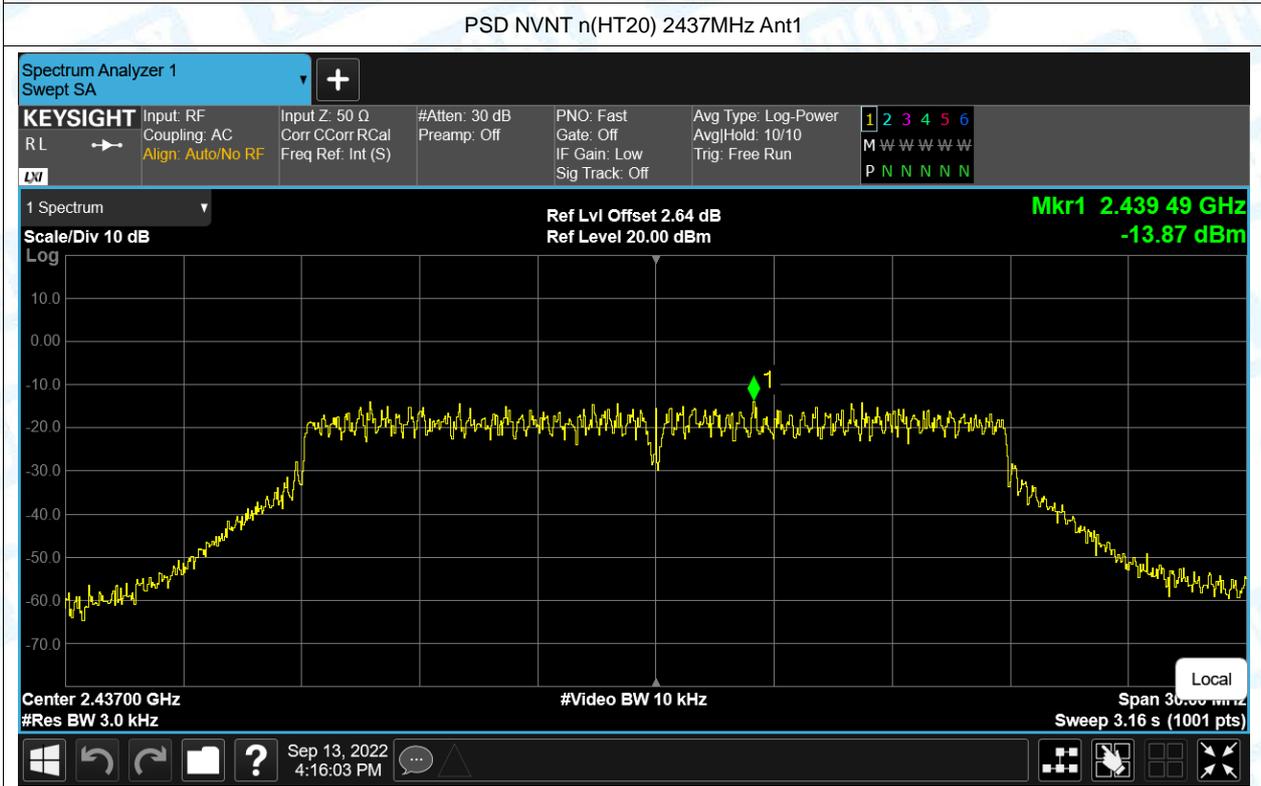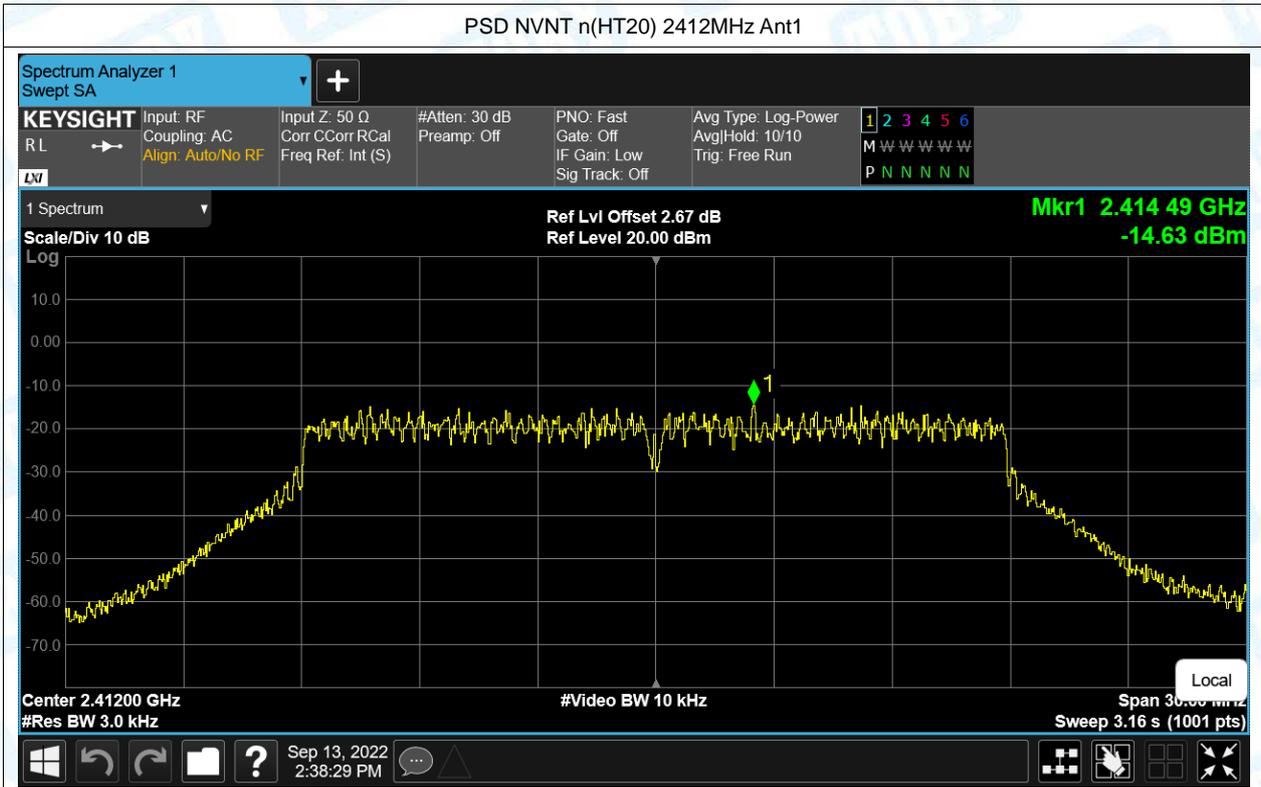



6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-56.52	-20	Pass
NVNT	b	2462	Ant1	-56.89	-20	Pass
NVNT	g	2412	Ant1	-43.6	-20	Pass
NVNT	g	2462	Ant1	-47.46	-20	Pass
NVNT	n(HT20)	2412	Ant1	-41.1	-20	Pass
NVNT	n(HT20)	2462	Ant1	-42.08	-20	Pass



Test Graphs


Band Edge NVNT b 2412MHz Ant1 Ref






Band Edge NVNT b 2412MHz Ant1 Emission


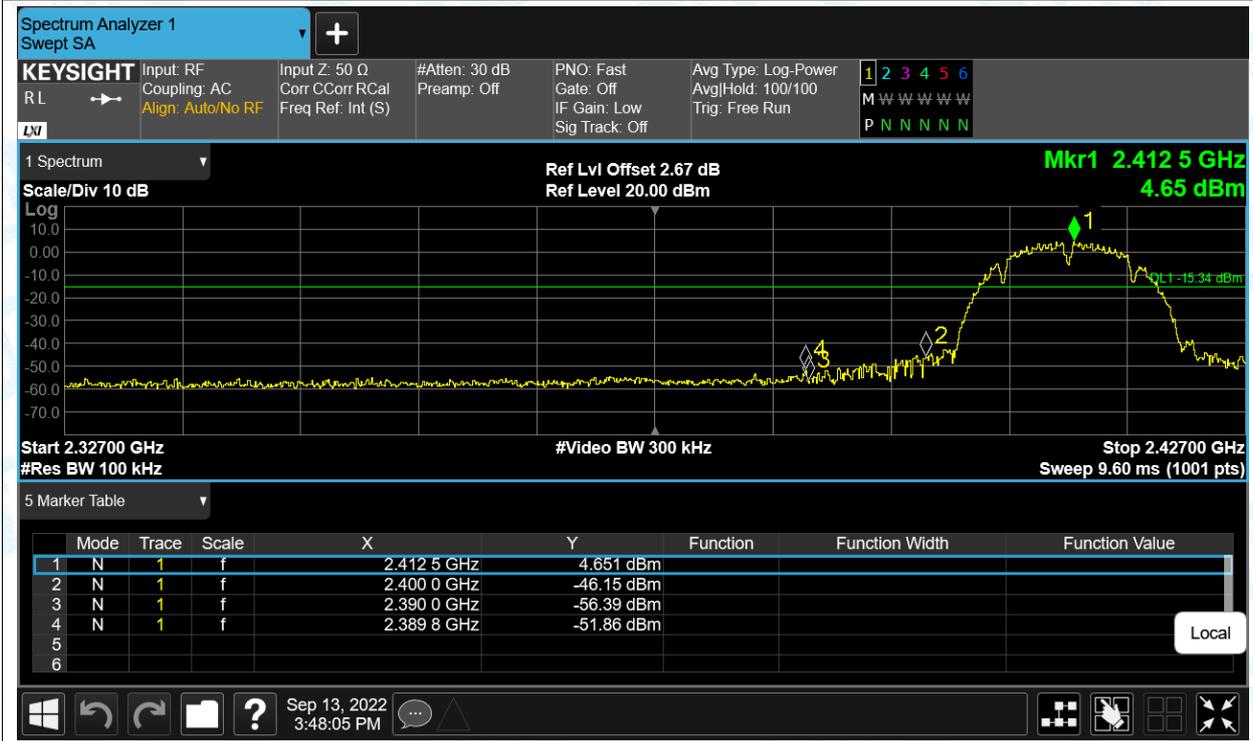


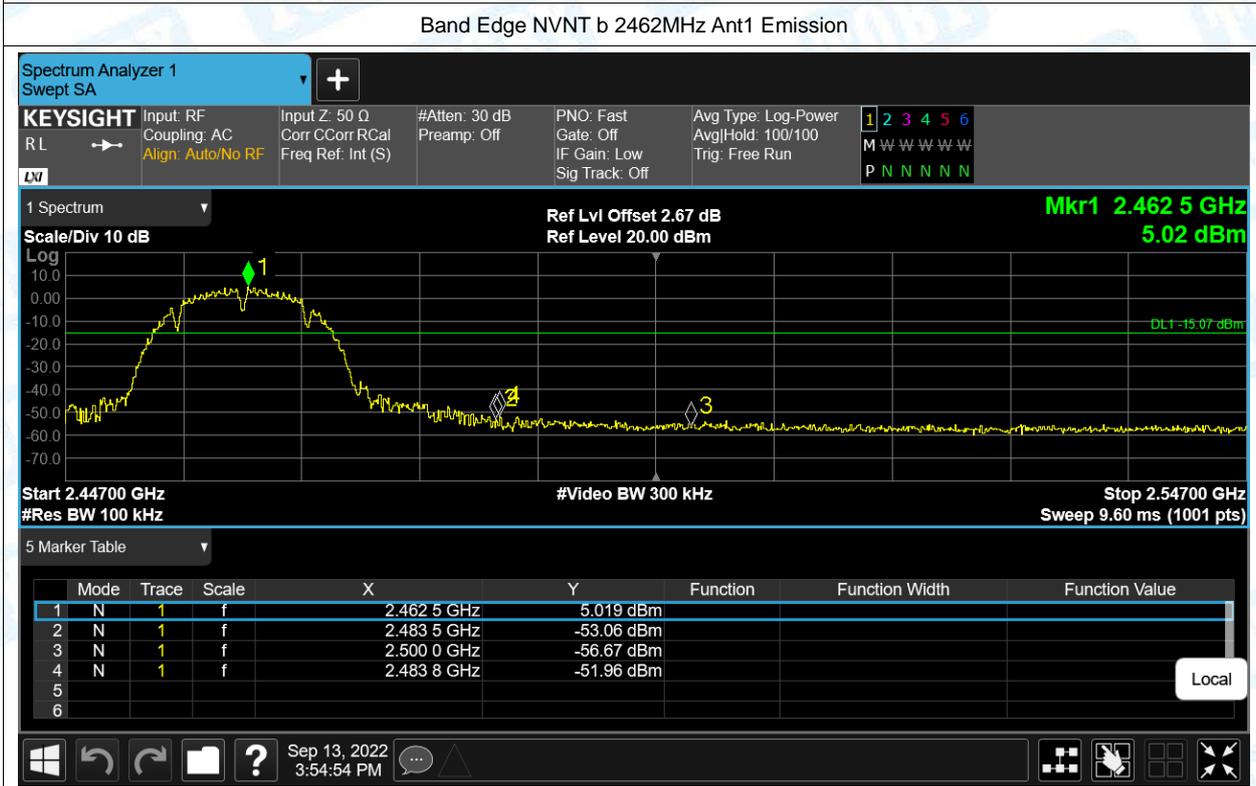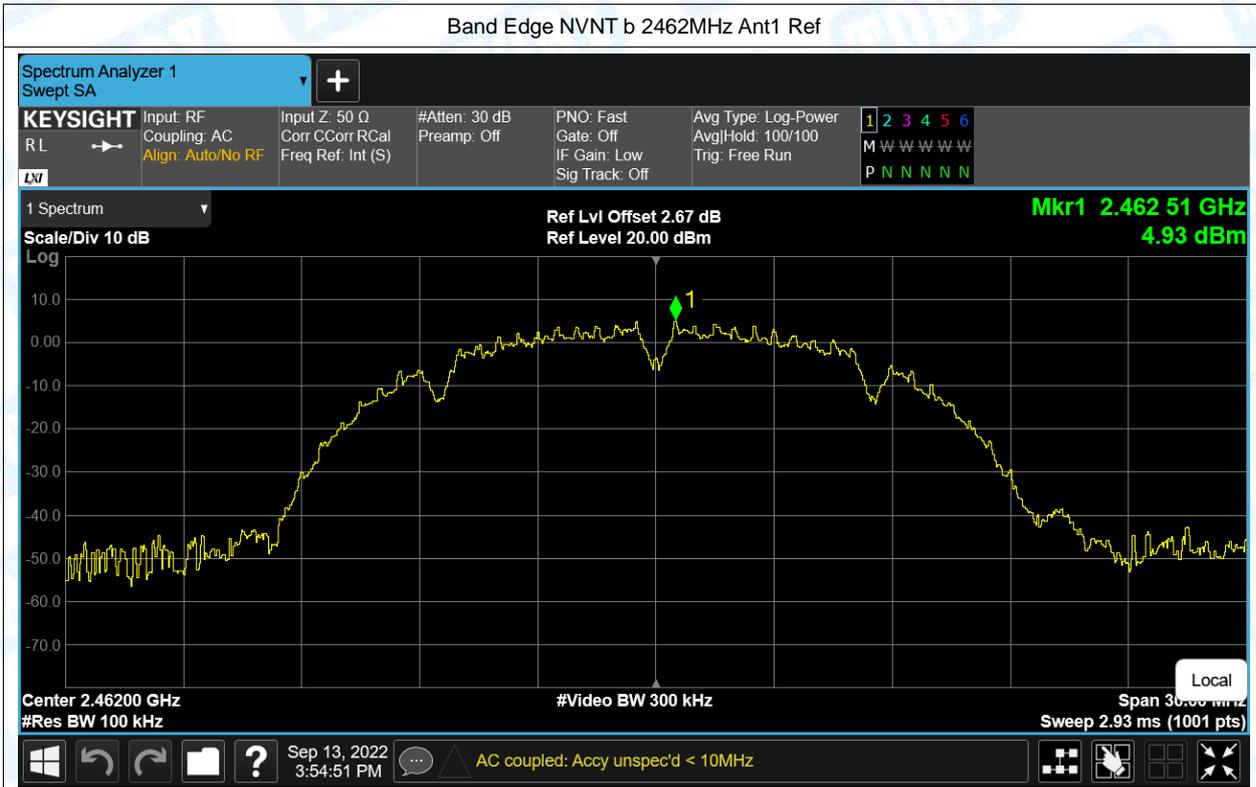

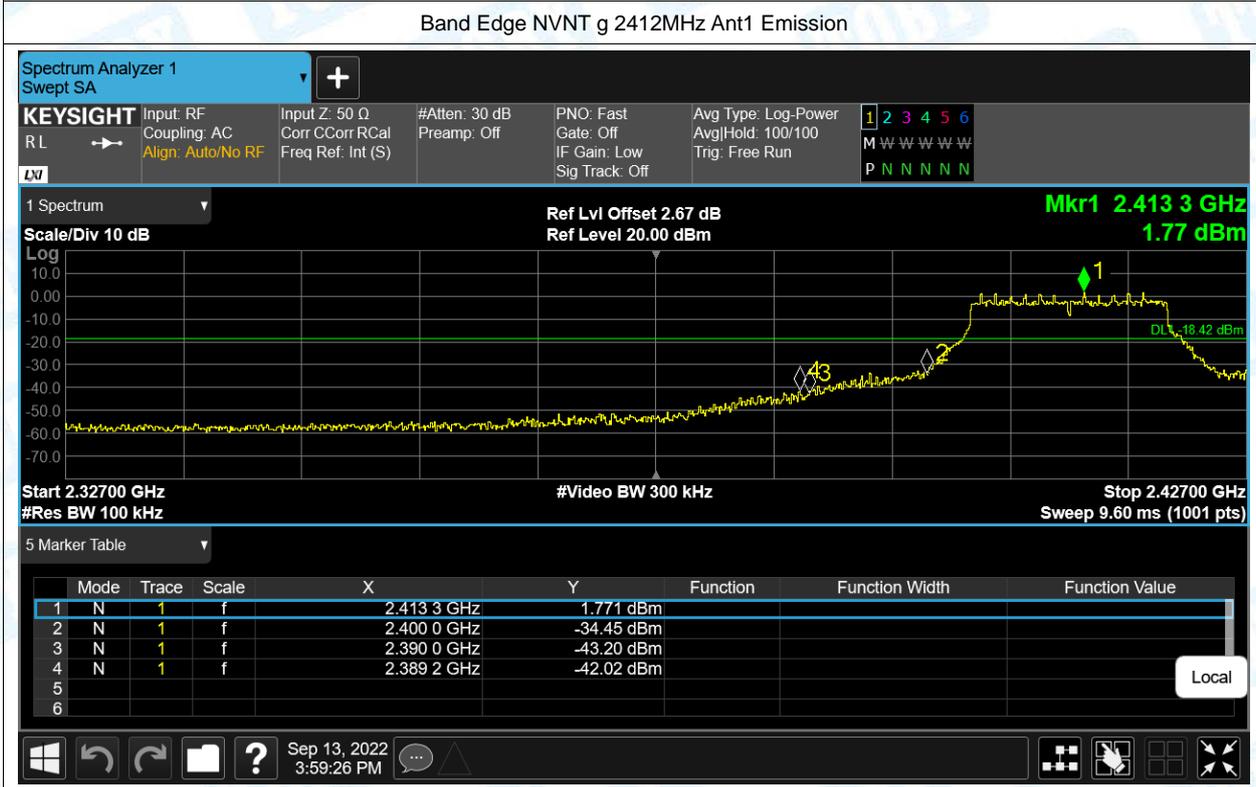


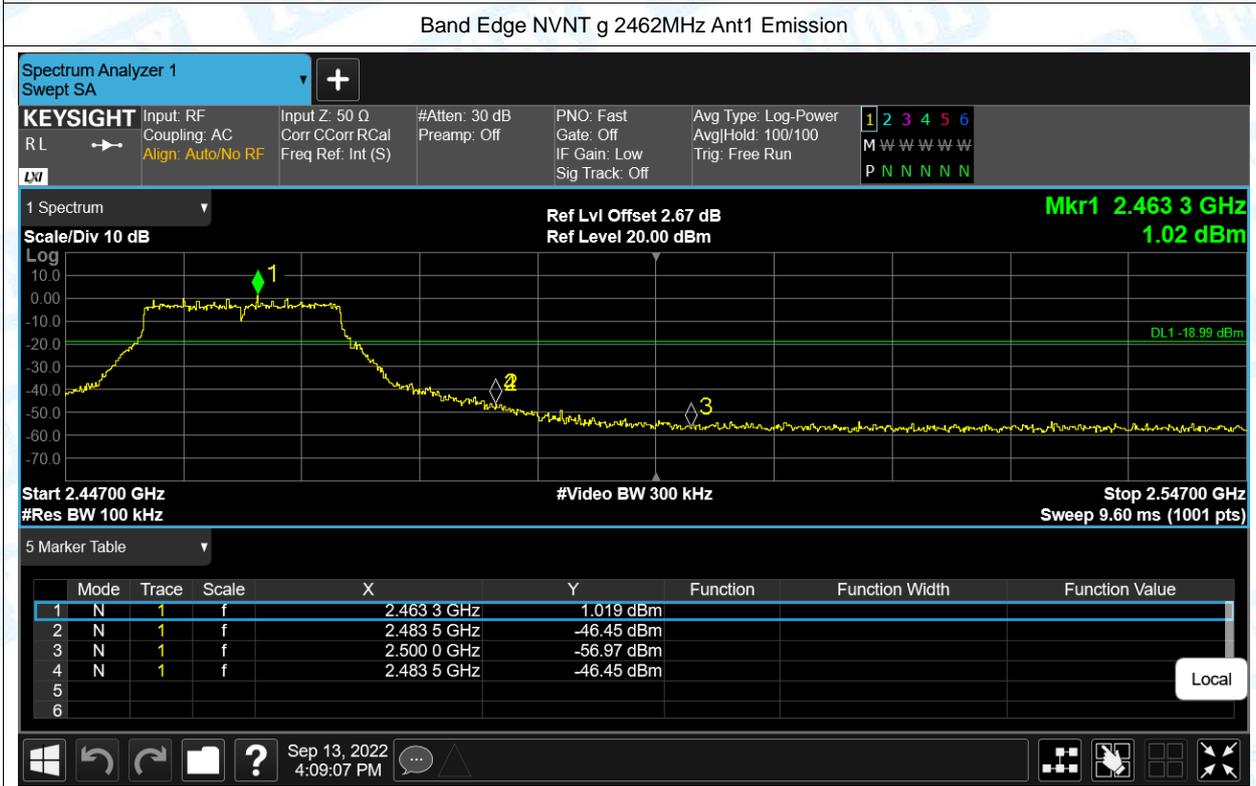


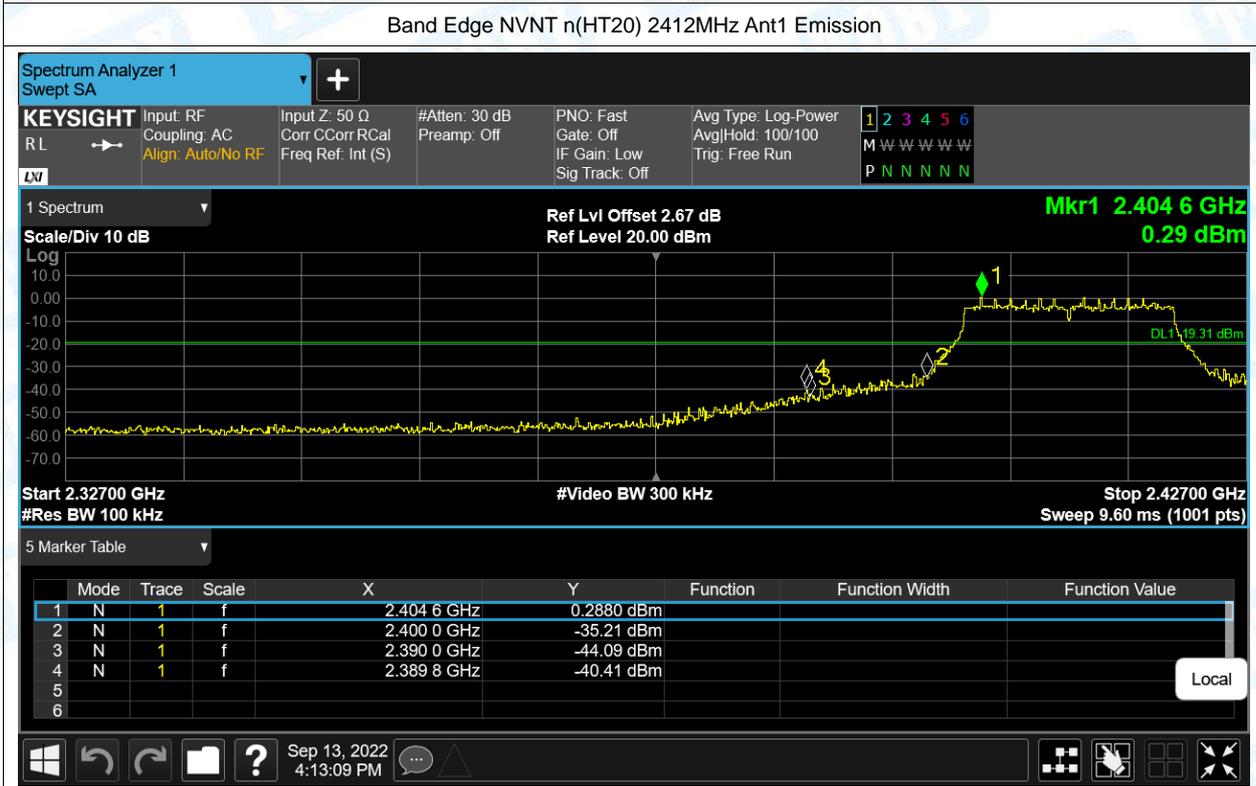
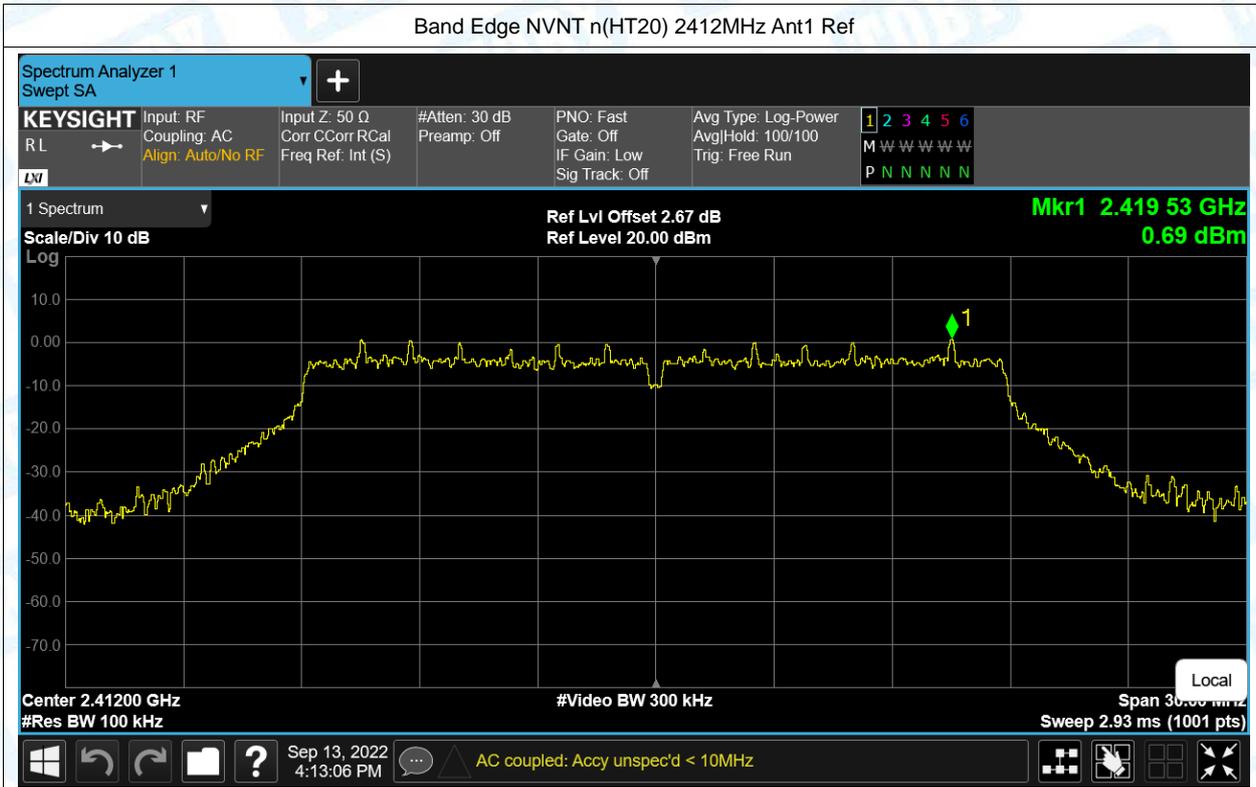


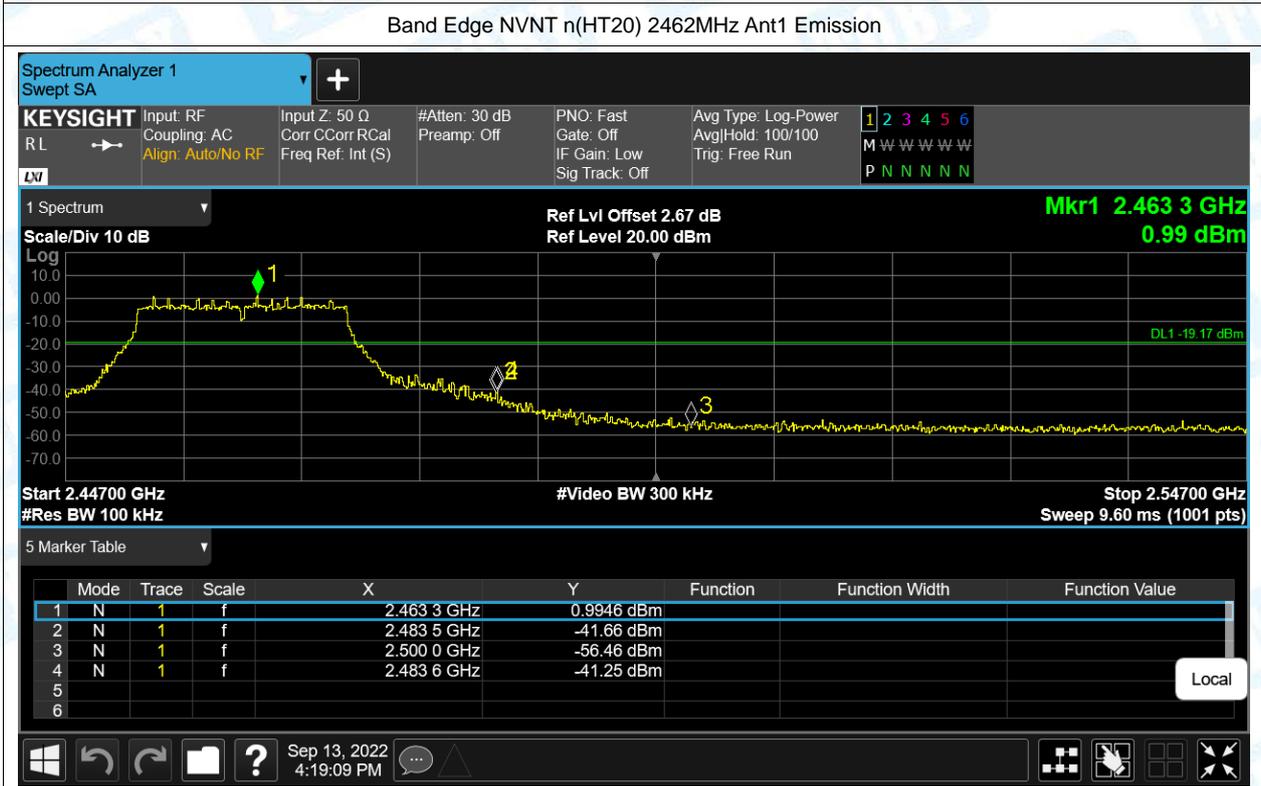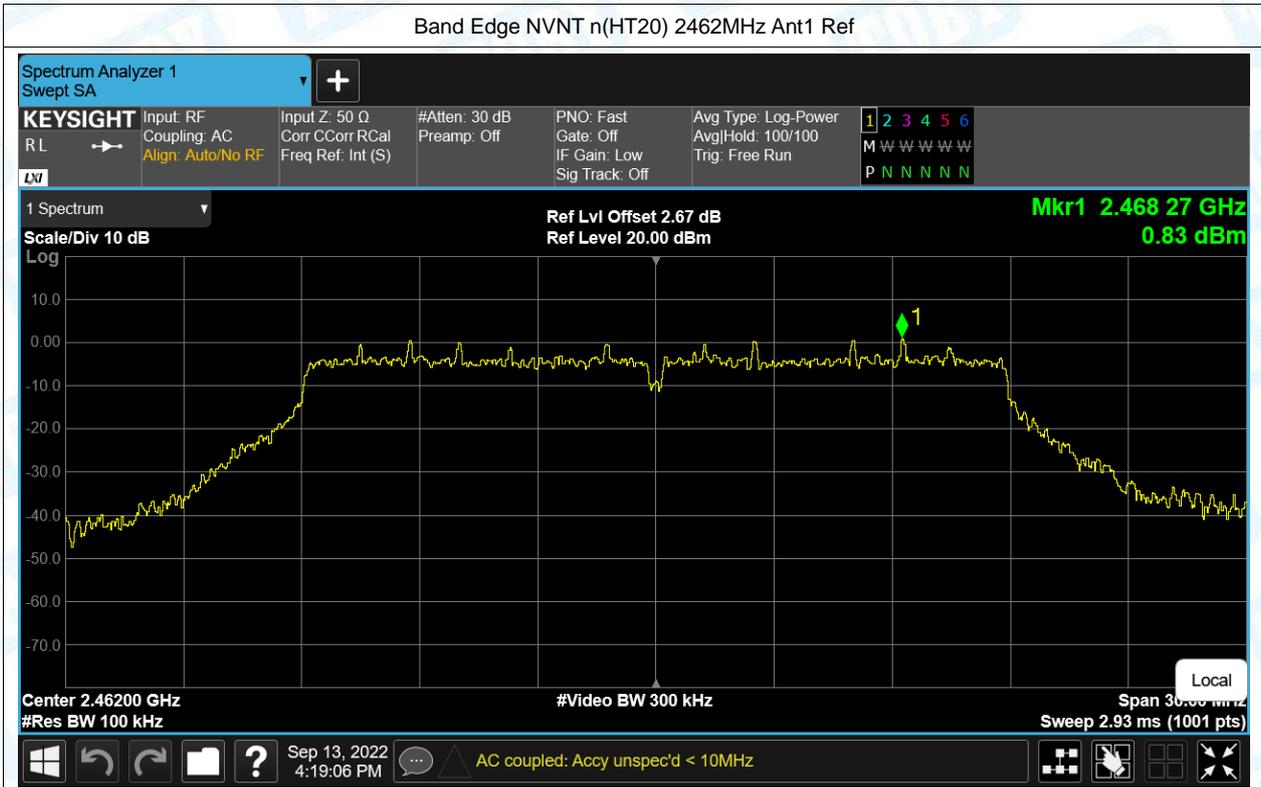




7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-47.45	-20	Pass
NVNT	b	2437	Ant1	-47.98	-20	Pass
NVNT	b	2462	Ant1	-47.15	-20	Pass
NVNT	g	2412	Ant1	-43.64	-20	Pass
NVNT	g	2437	Ant1	-43.23	-20	Pass
NVNT	g	2462	Ant1	-43.56	-20	Pass
NVNT	n(HT20)	2412	Ant1	-42.55	-20	Pass
NVNT	n(HT20)	2437	Ant1	-42.03	-20	Pass
NVNT	n(HT20)	2462	Ant1	-42.97	-20	Pass

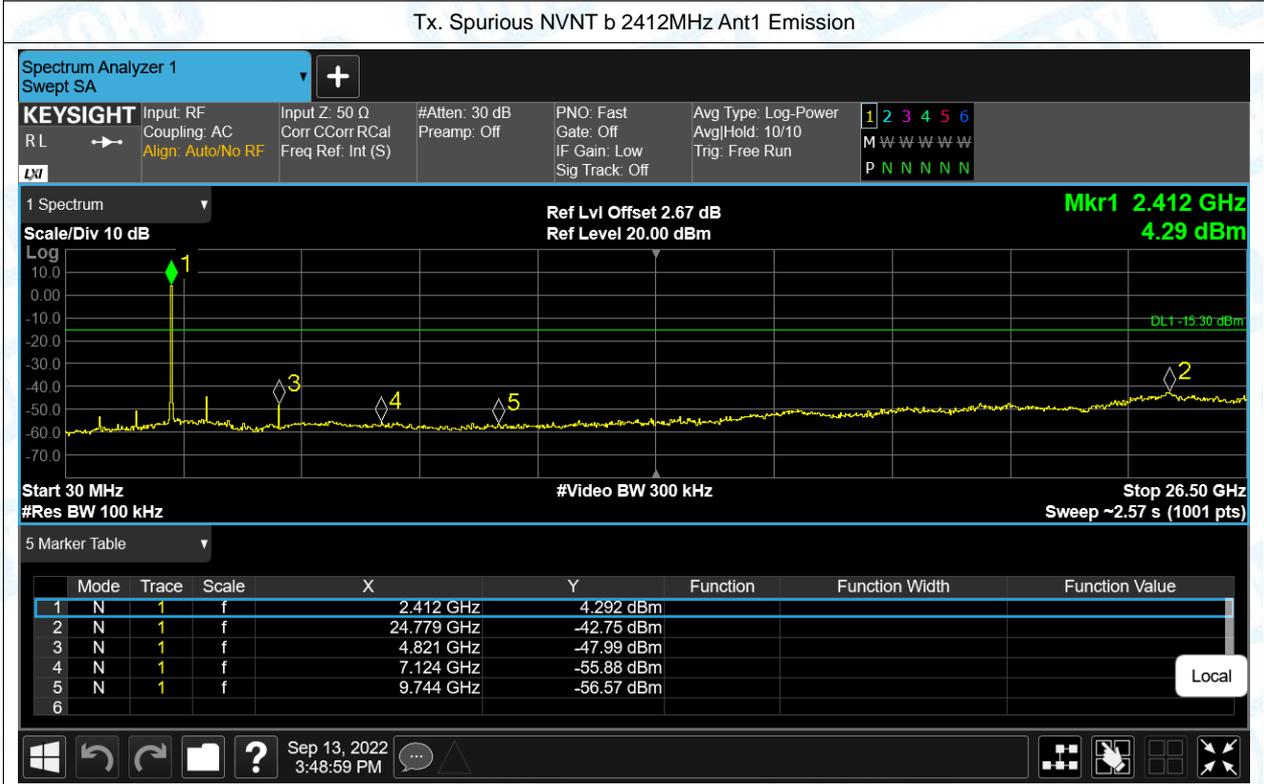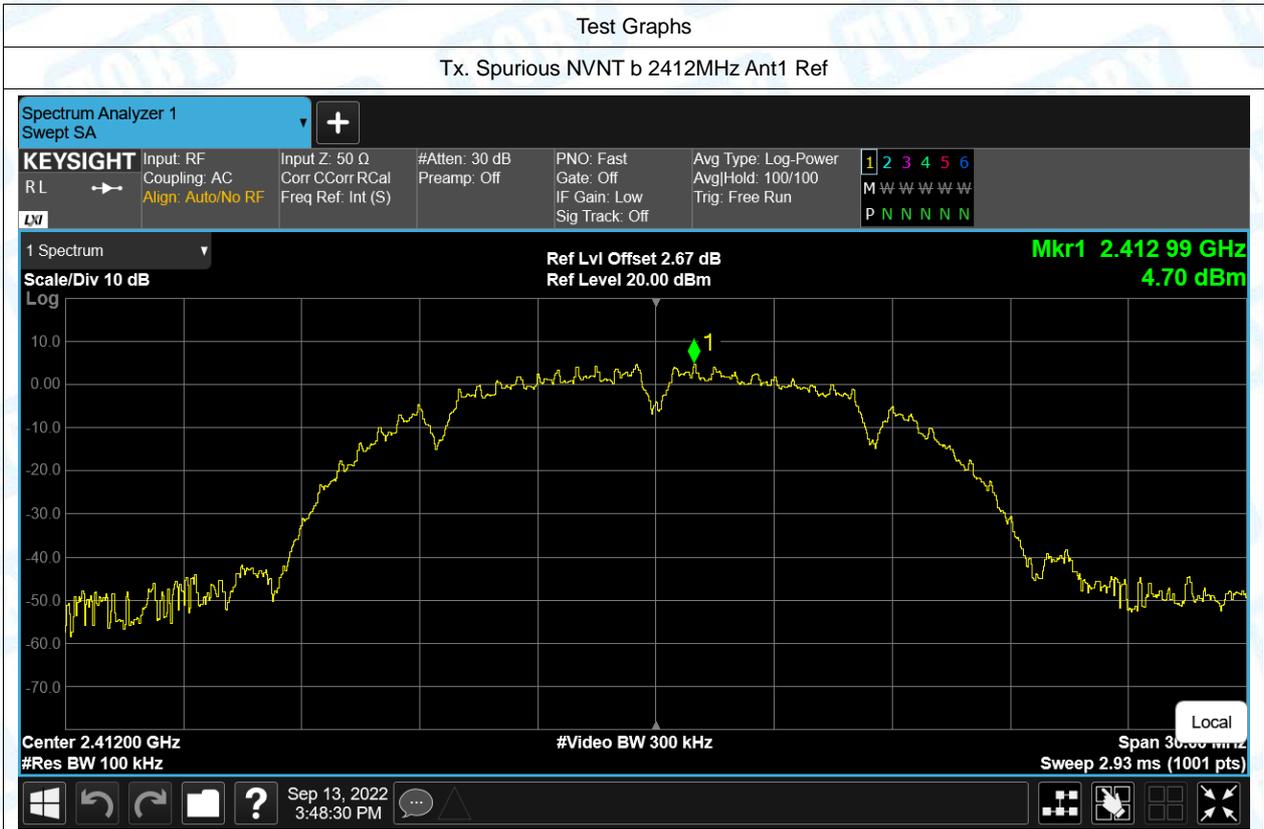

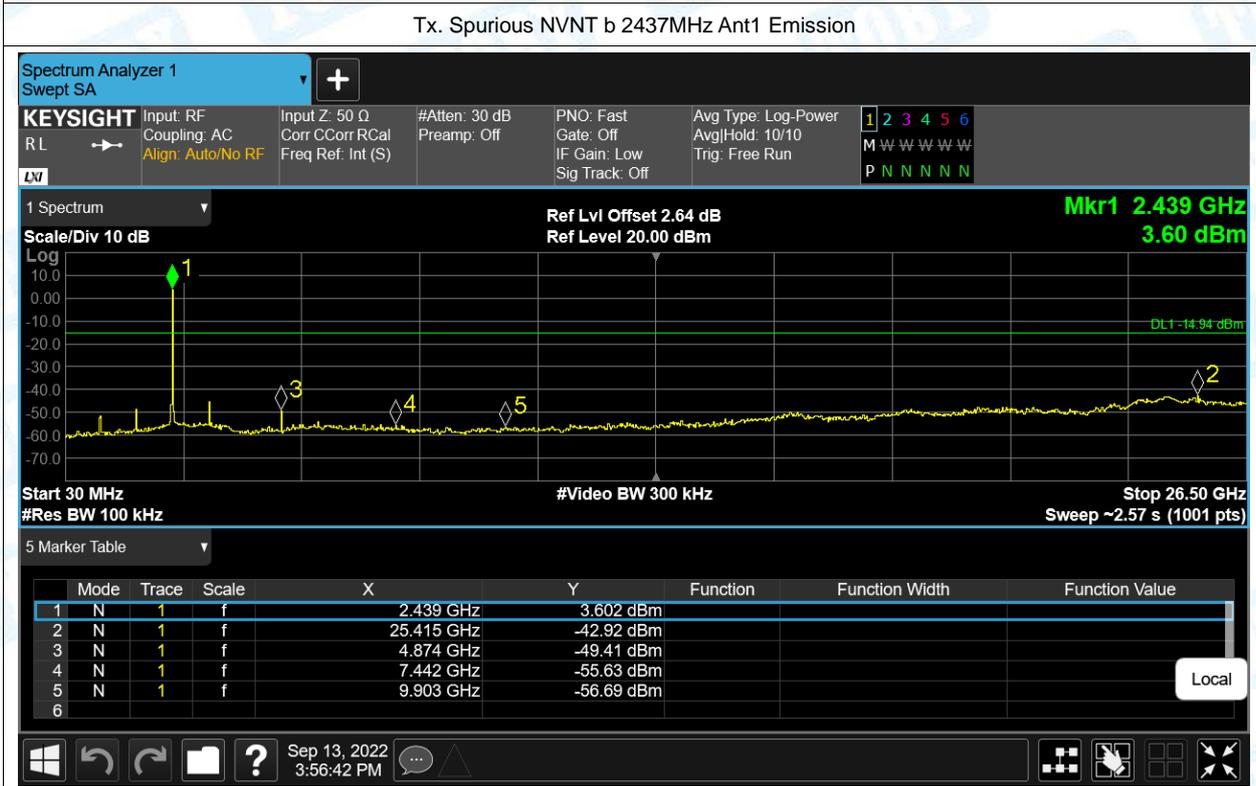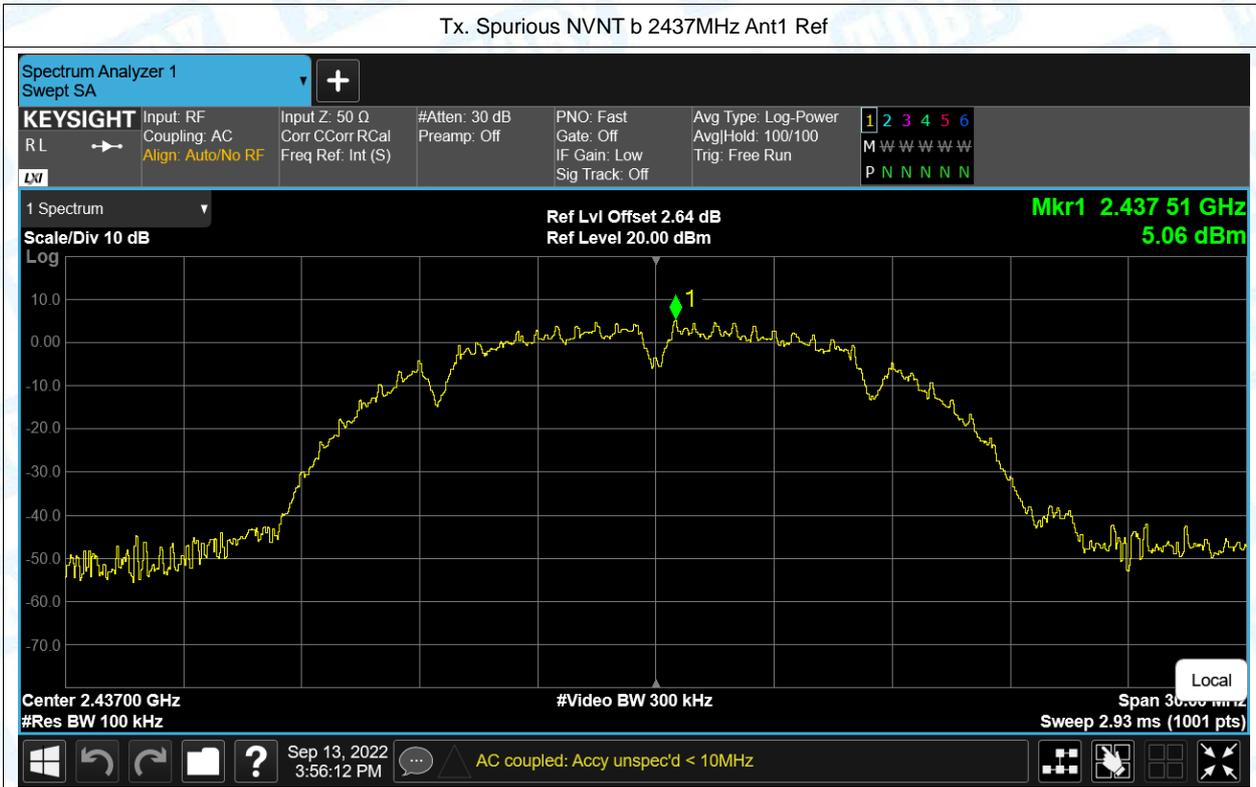

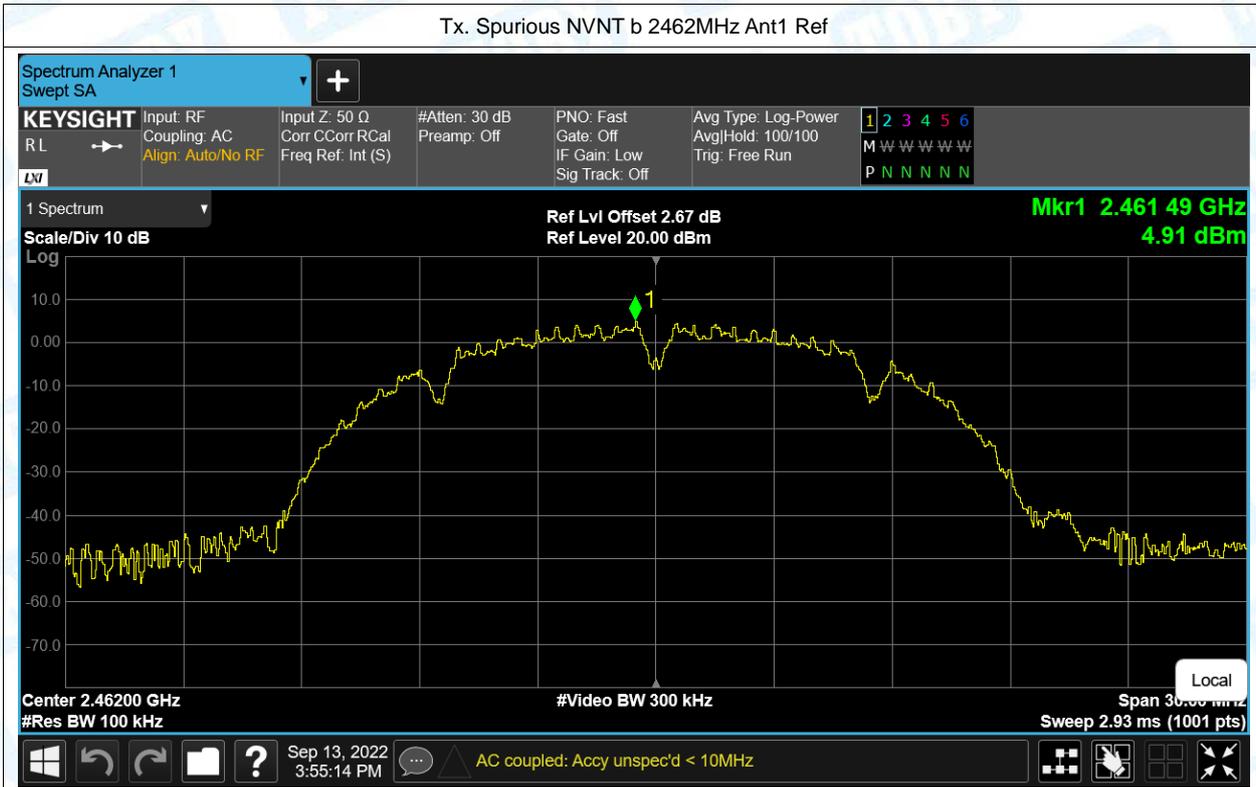


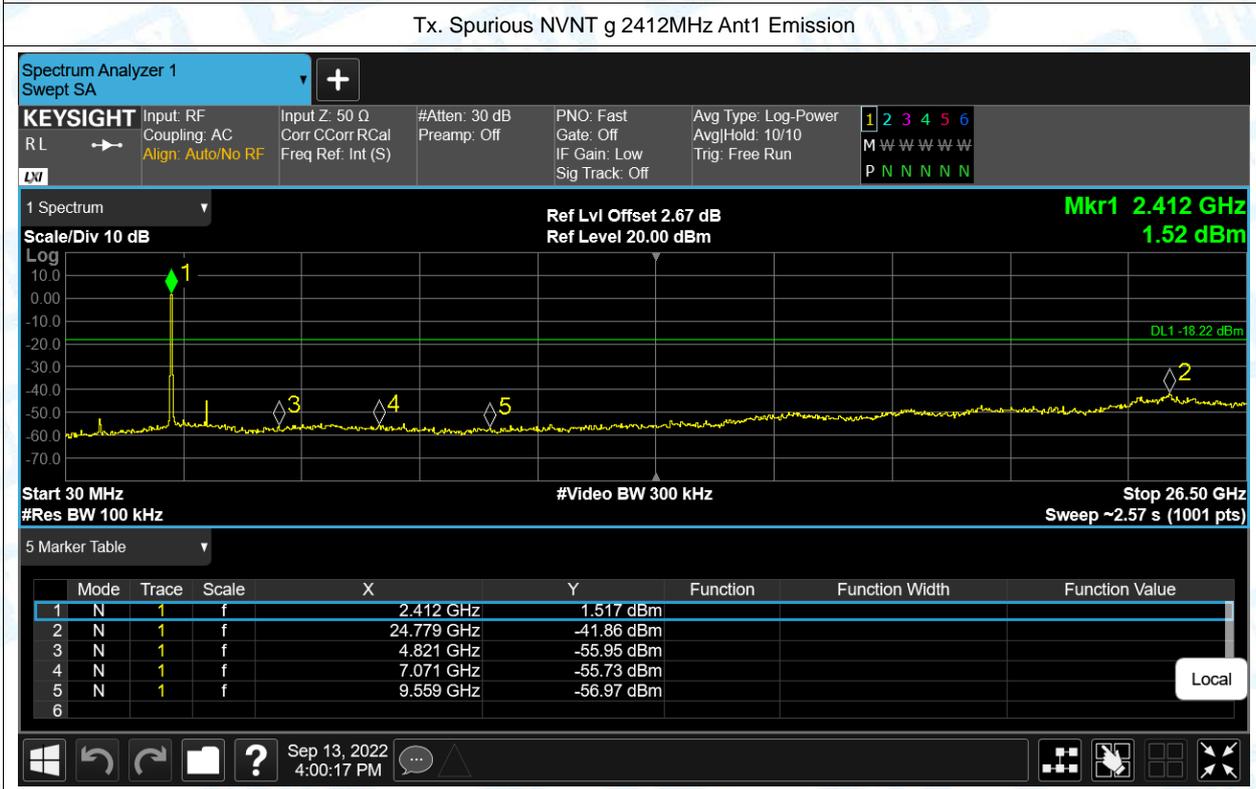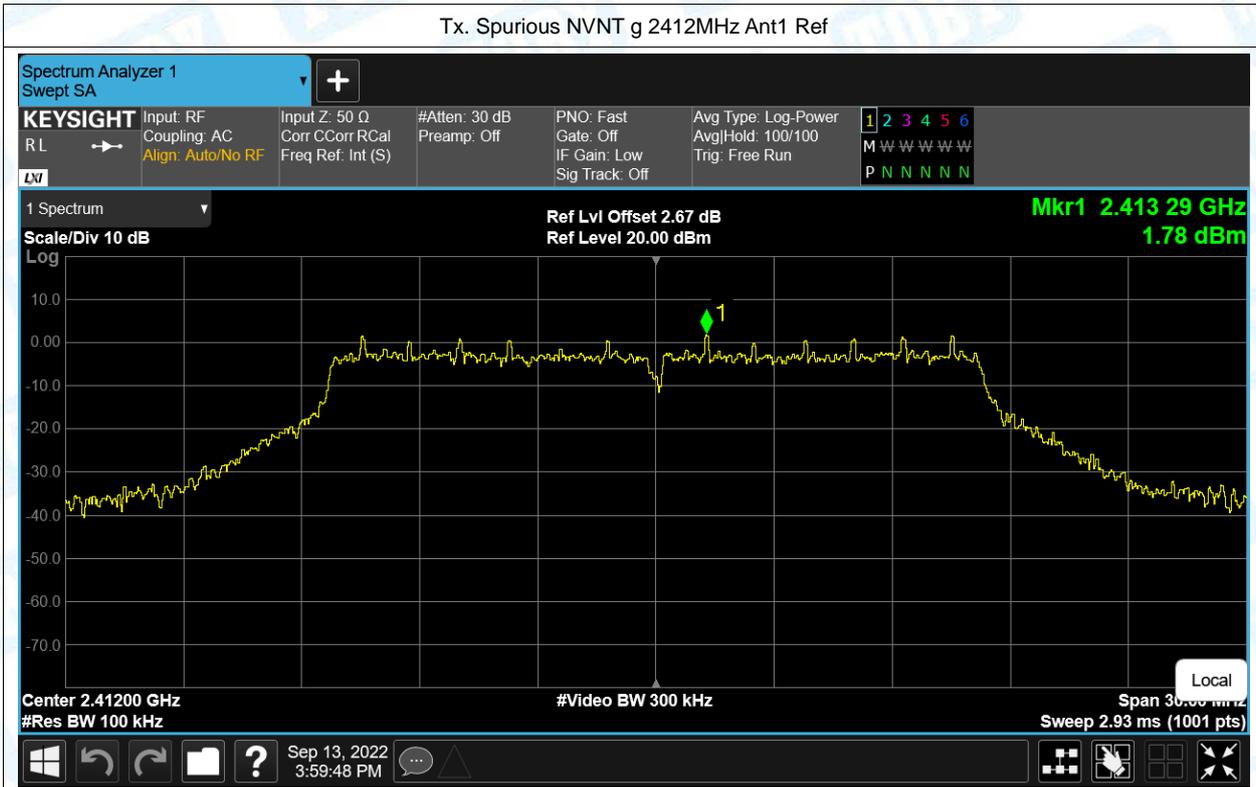

Tx. Spurious NVNT g 2437MHz Ant1 Ref




Tx. Spurious NVNT g 2437MHz Ant1 Emission


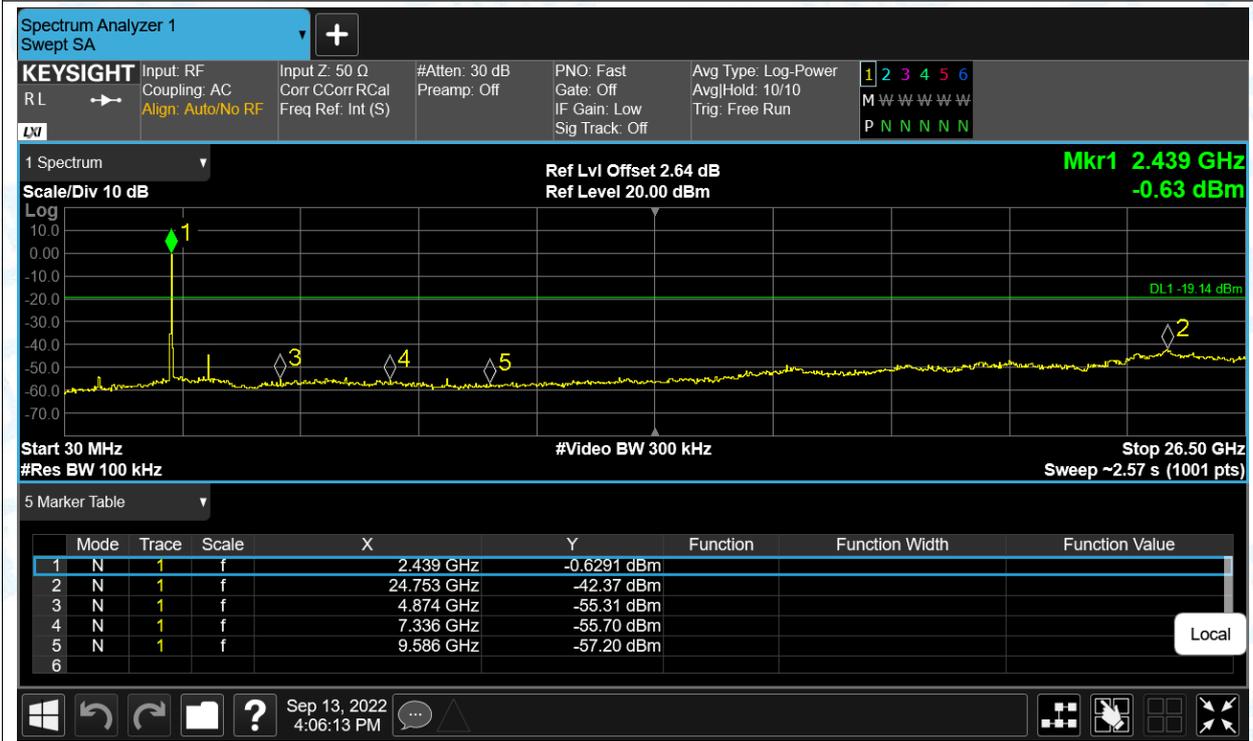




Tx. Spurious NVNT g 2462MHz Ant1 Ref





Tx. Spurious NVNT g 2462MHz Ant1 Emission

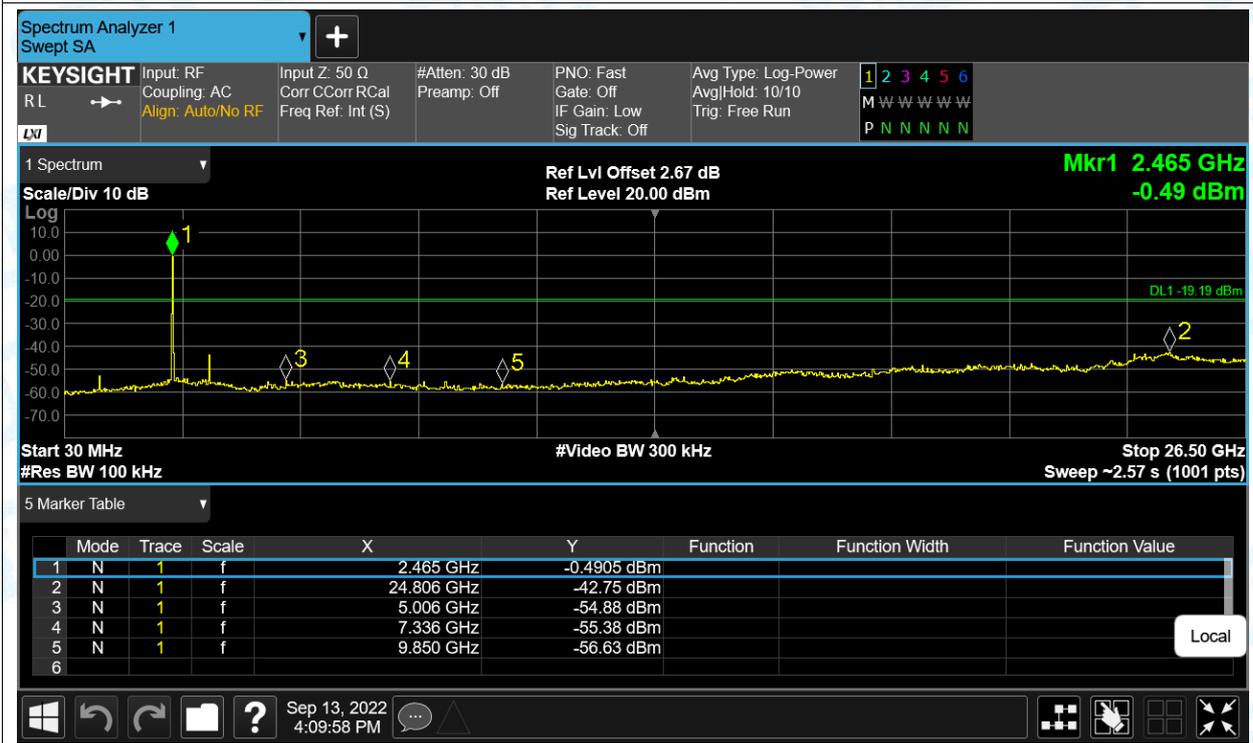

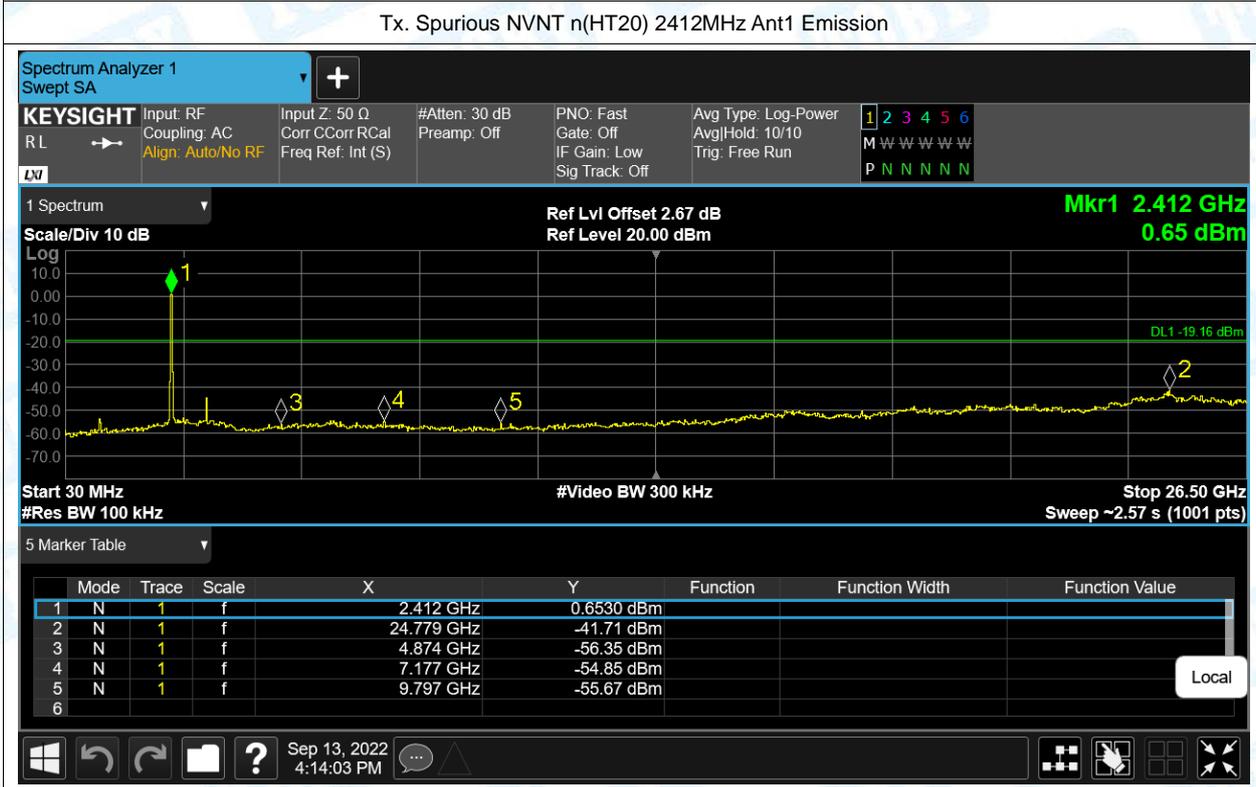
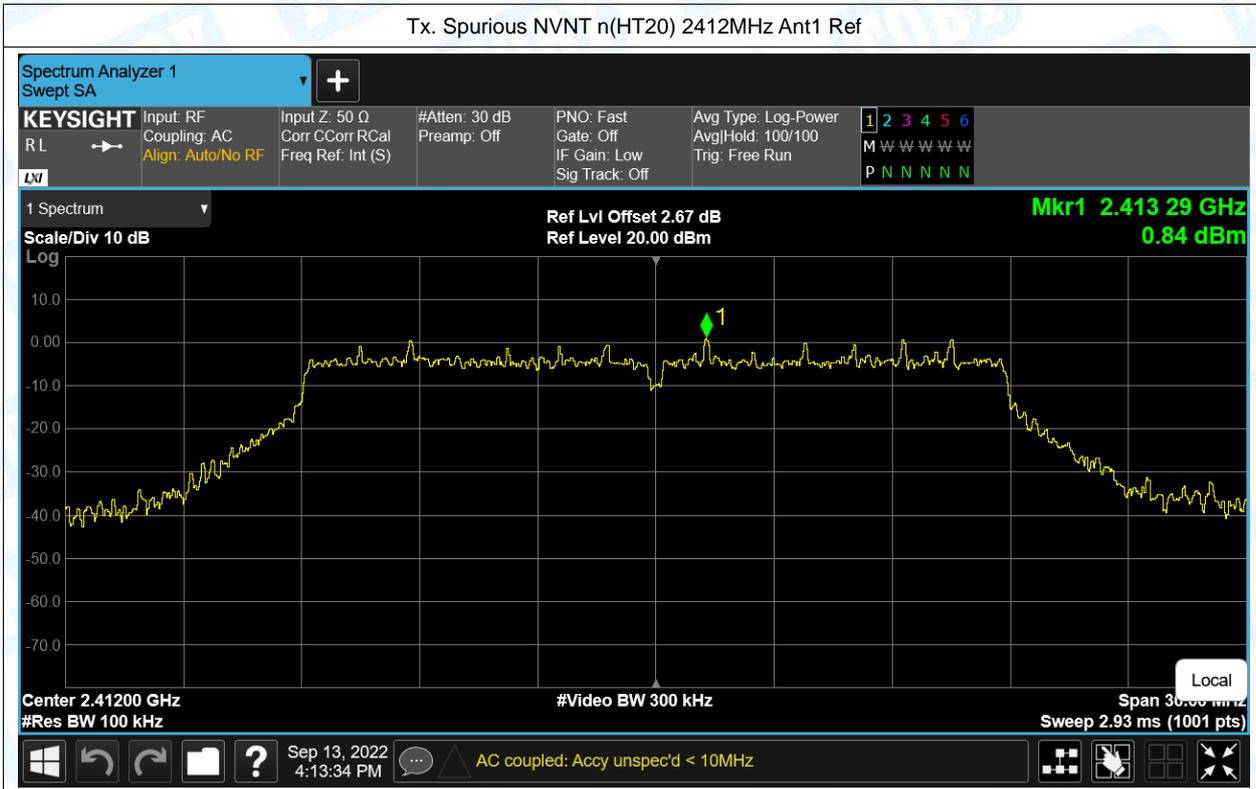


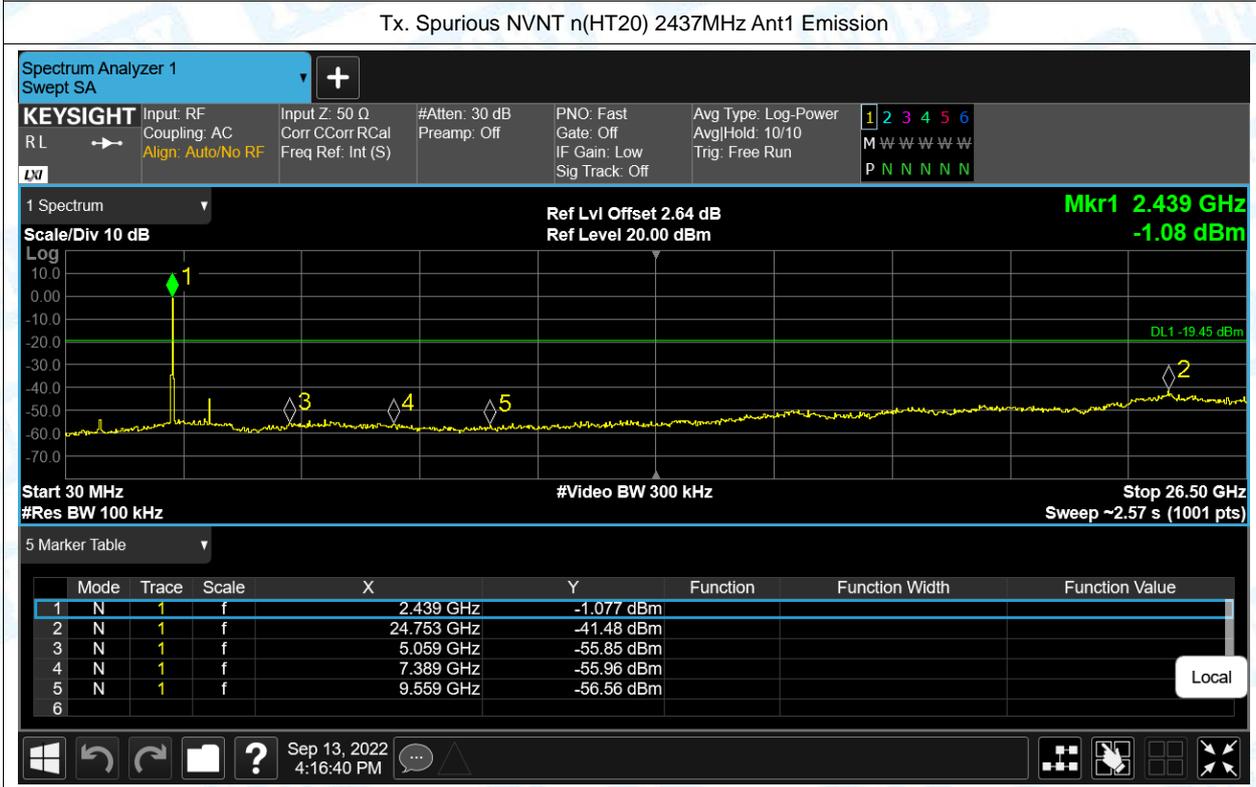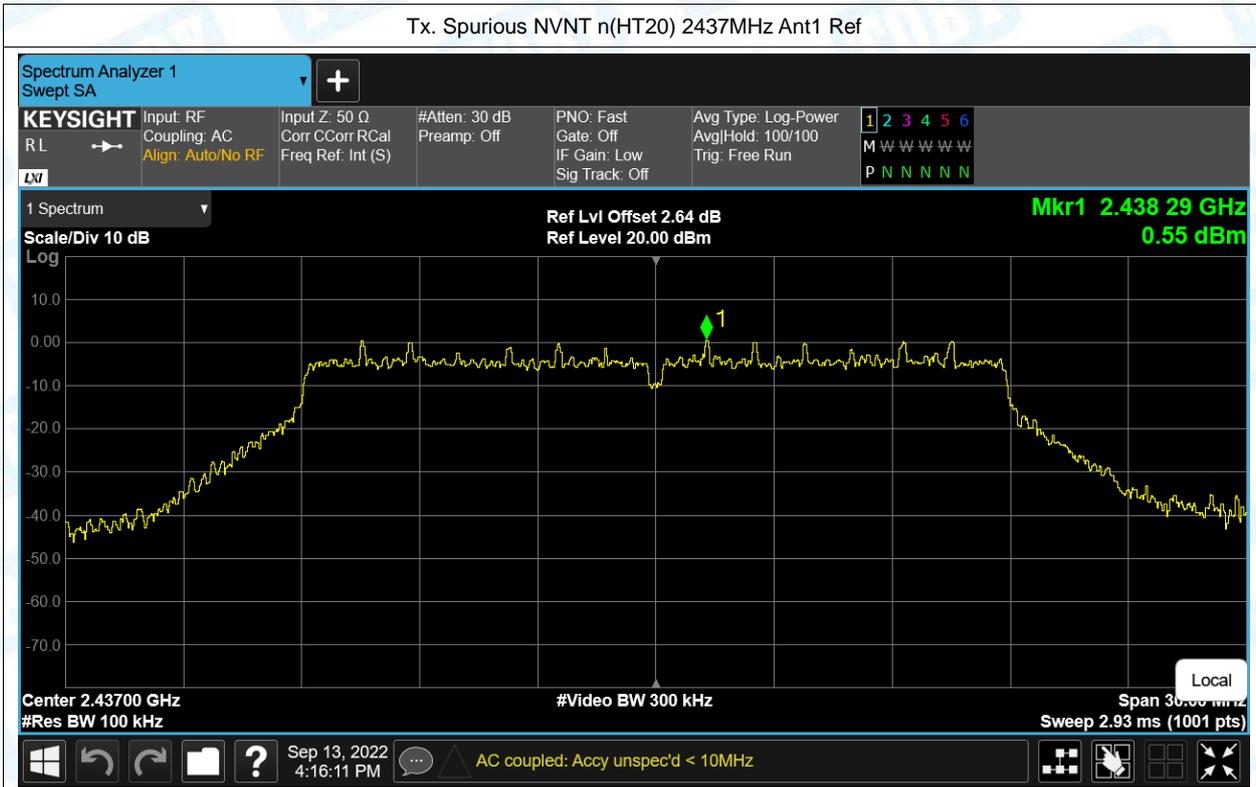

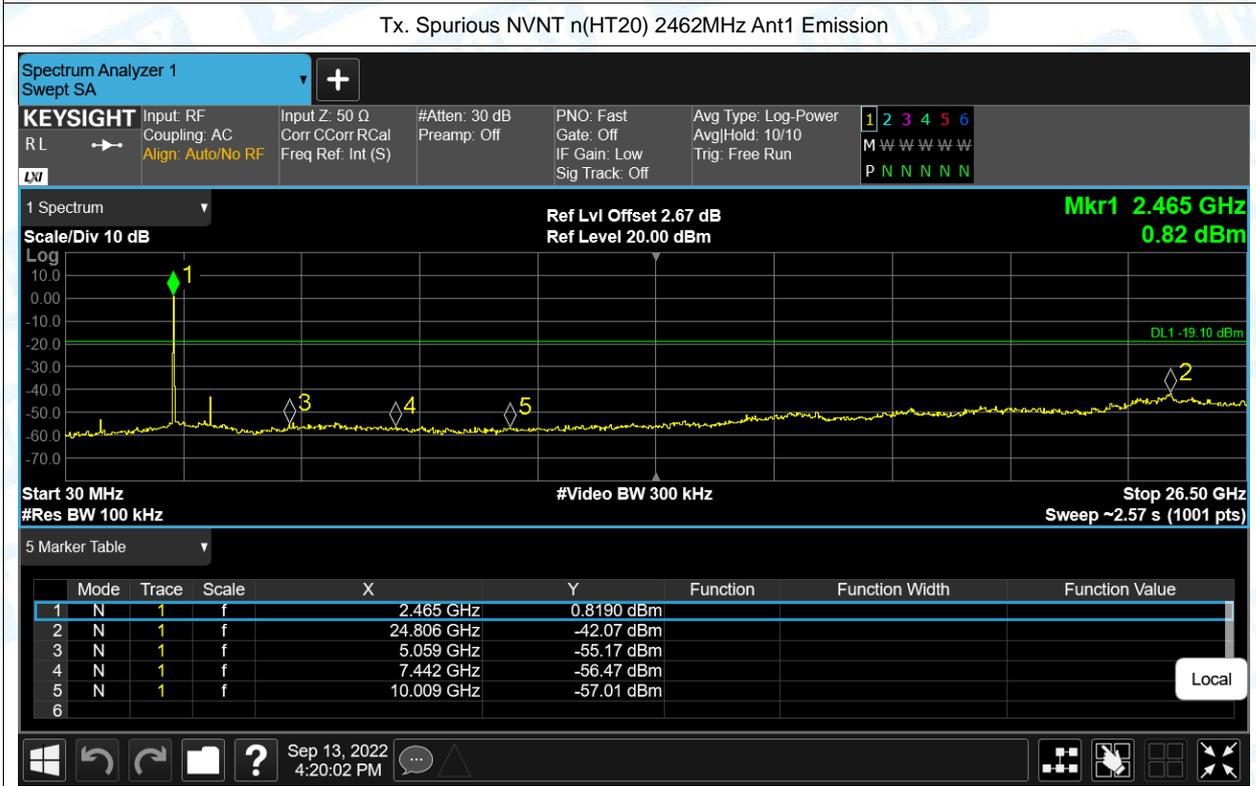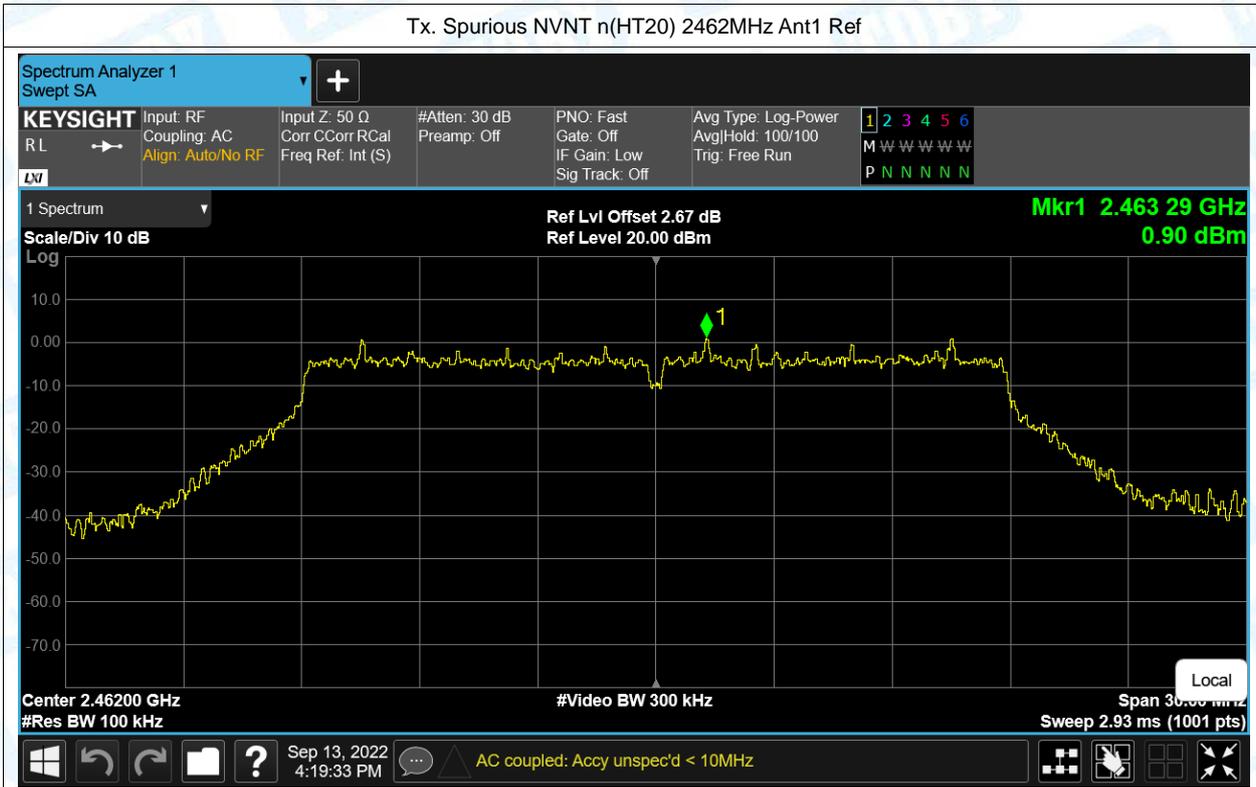


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-46.04	3	52.22	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-55.03	3	43.23	Average	54	Pass
NVNT	b	2412	Ant1	2389.209	-33.95	3	64.31	Peak	74	Pass
NVNT	b	2412	Ant1	2374.467	-52.25	3	46.01	Average	54	Pass
NVNT	b	2412	Ant1	2390	-44.2	3	54.06	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-53.64	3	44.62	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-44.16	3	54.1	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-53.29	3	44.97	Average	54	Pass
NVNT	b	2462	Ant1	2484.259	-32.11	3	66.15	Peak	74	Pass
NVNT	b	2462	Ant1	2488.128	-50.95	3	47.31	Average	54	Pass
NVNT	b	2462	Ant1	2500	-44	3	54.26	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-52.37	3	45.89	Average	54	Pass
NVNT	g	2412	Ant1	2310	-43.11	3	55.15	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-54.85	3	43.41	Average	54	Pass
NVNT	g	2412	Ant1	2389.56	-24.61	3	73.65	Peak	74	Pass
NVNT	g	2412	Ant1	2389.911	-48.99	3	49.27	Average	54	Pass
NVNT	g	2412	Ant1	2390	-36.76	3	61.5	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-49.35	3	48.91	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-26.28	3	71.98	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-47.59	3	50.67	Average	54	Pass
NVNT	g	2462	Ant1	2483.57	-25.84	3	72.42	Peak	74	Pass
NVNT	g	2462	Ant1	2483.517	-47.59	3	50.67	Average	54	Pass
NVNT	g	2462	Ant1	2500	-44.62	3	53.64	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-53.05	3	45.21	Average	54	Pass
NVNT	n(HT20)	2412	Ant1	2310	-46.01	3	52.25	Peak	74	Pass
NVNT	n(HT20)	2412	Ant1	2310	-54.67	3	43.59	Average	54	Pass
NVNT	n(HT20)	2412	Ant1	2389.794	-25.53	3	72.73	Peak	74	Pass
NVNT	n(HT20)	2412	Ant1	2389.209	-47.55	3	50.71	Average	54	Pass
NVNT	n(HT20)	2412	Ant1	2390	-29.2	3	69.06	Peak	74	Pass
NVNT	n(HT20)	2412	Ant1	2390	-47.51	3	50.75	Average	54	Pass
NVNT	n(HT20)	2462	Ant1	2483.5	-27.81	3	70.45	Peak	74	Pass
NVNT	n(HT20)	2462	Ant1	2483.5	-45.22	3	53.04	Average	54	Pass
NVNT	n(HT20)	2462	Ant1	2483.729	-26.25	3	72.01	Peak	74	Pass
NVNT	n(HT20)	2462	Ant1	2483.517	-45.22	3	53.04	Average	54	Pass
NVNT	n(HT20)	2462	Ant1	2500	-43.99	3	54.27	Peak	74	Pass
NVNT	n(HT20)	2462	Ant1	2500	-52.74	3	45.52	Average	54	Pass

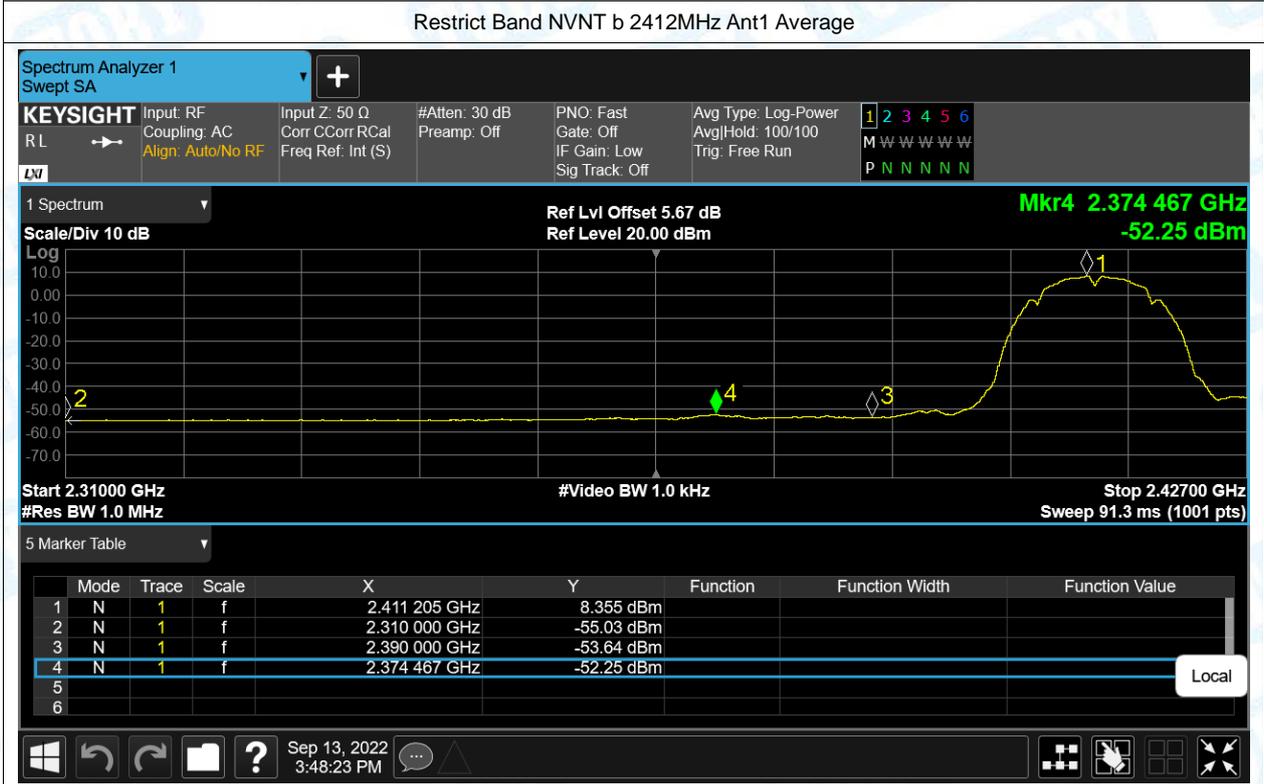
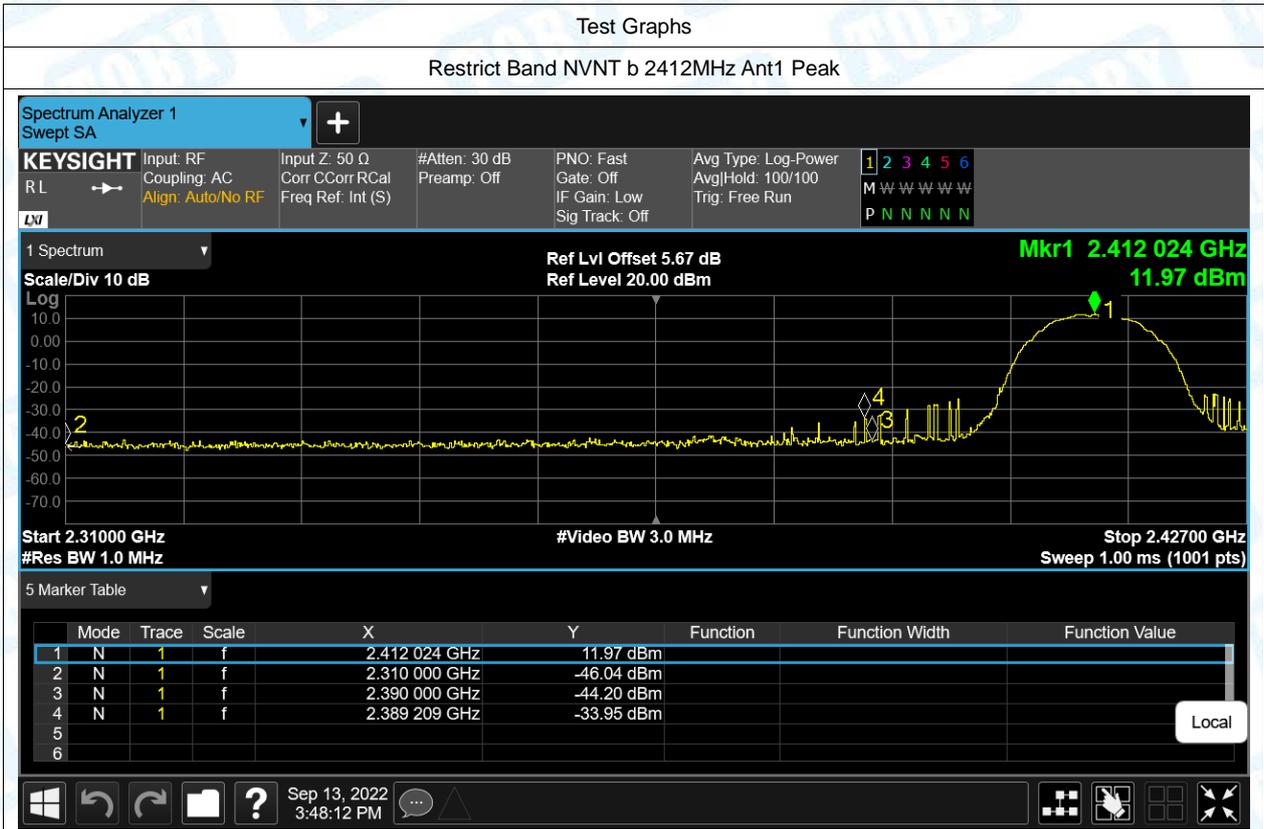


Restrict Band NVNT b 2462MHz Ant1 Peak

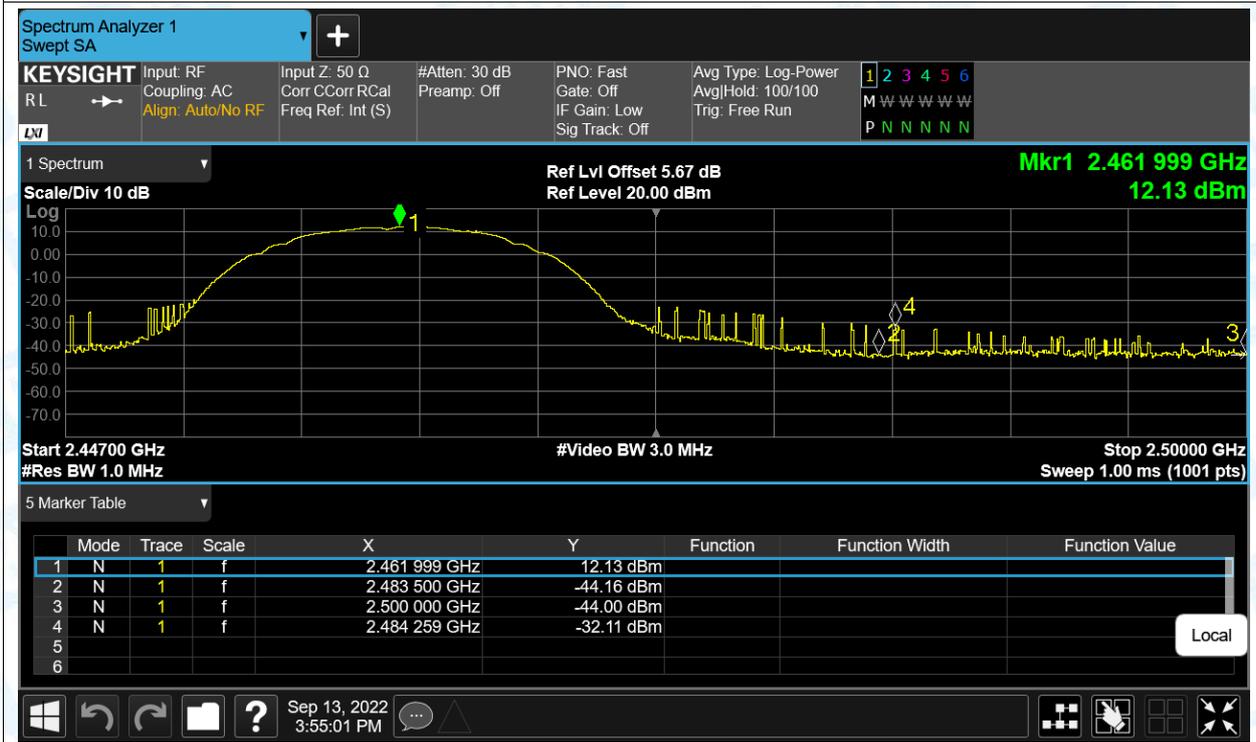


Restrict Band NVNT b 2462MHz Ant1 Average

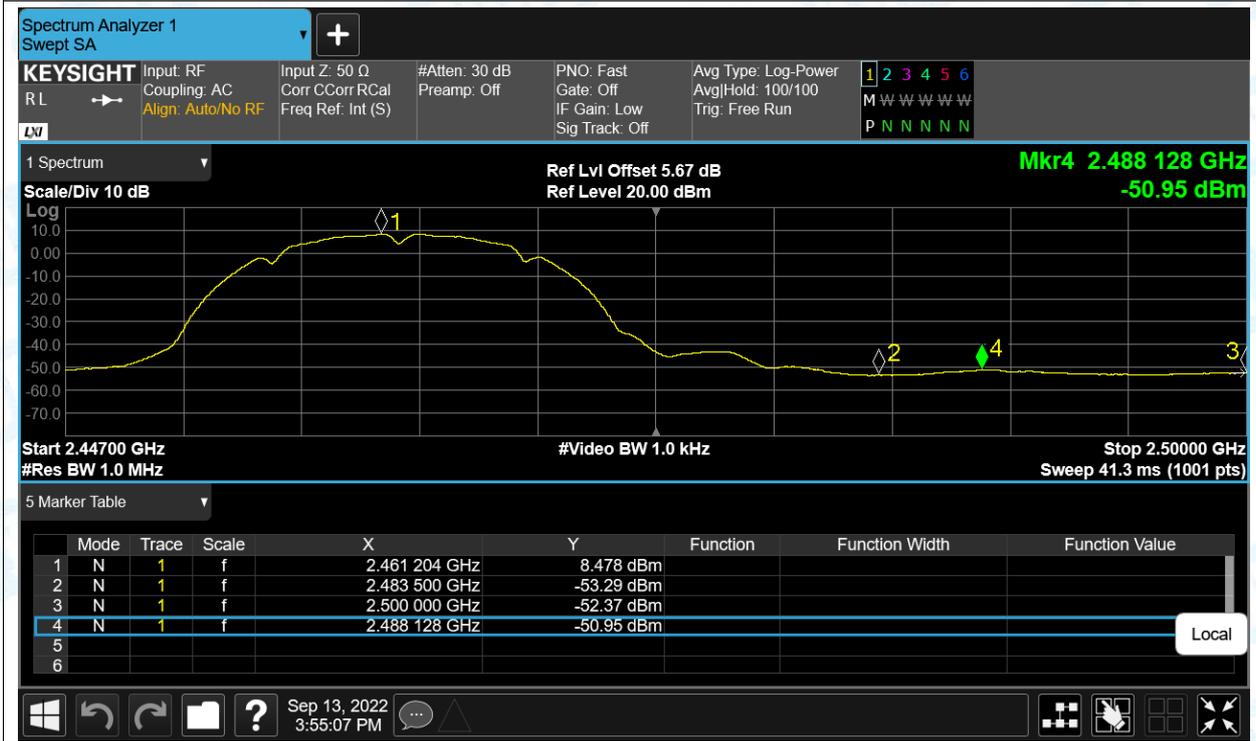


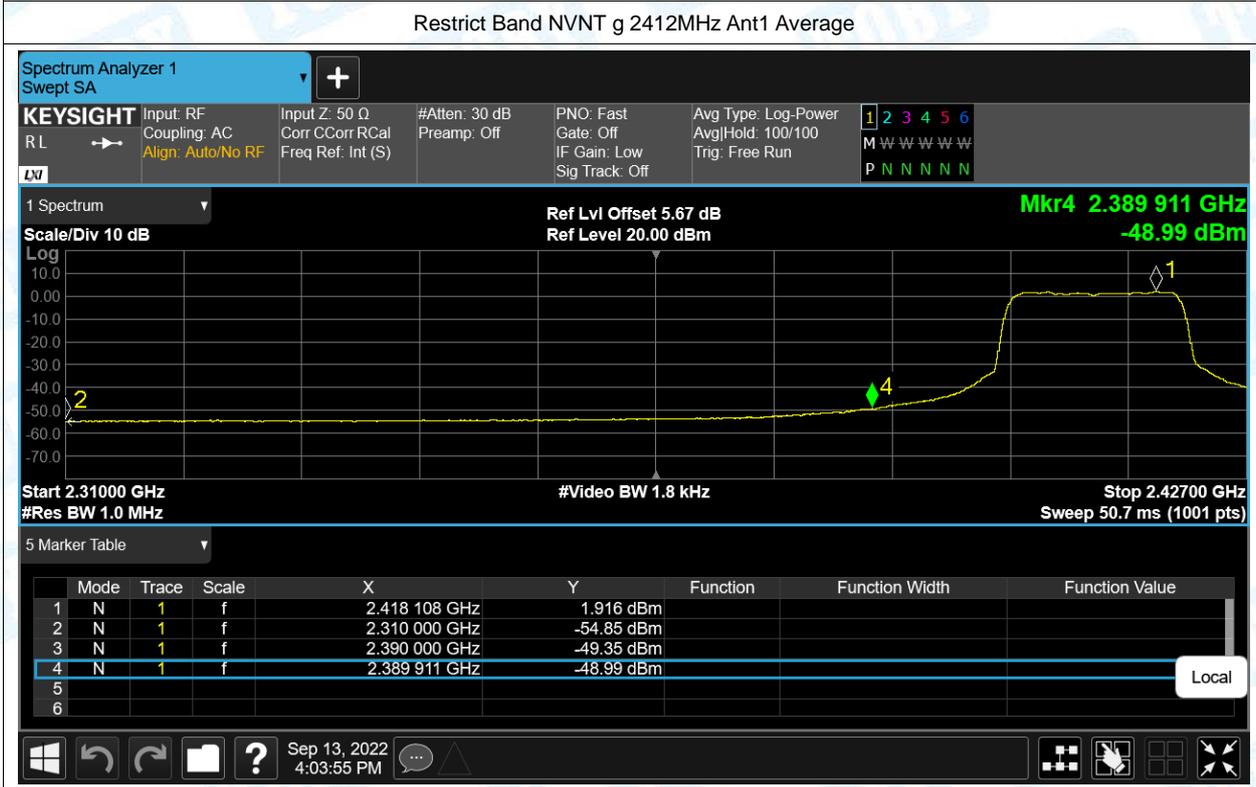
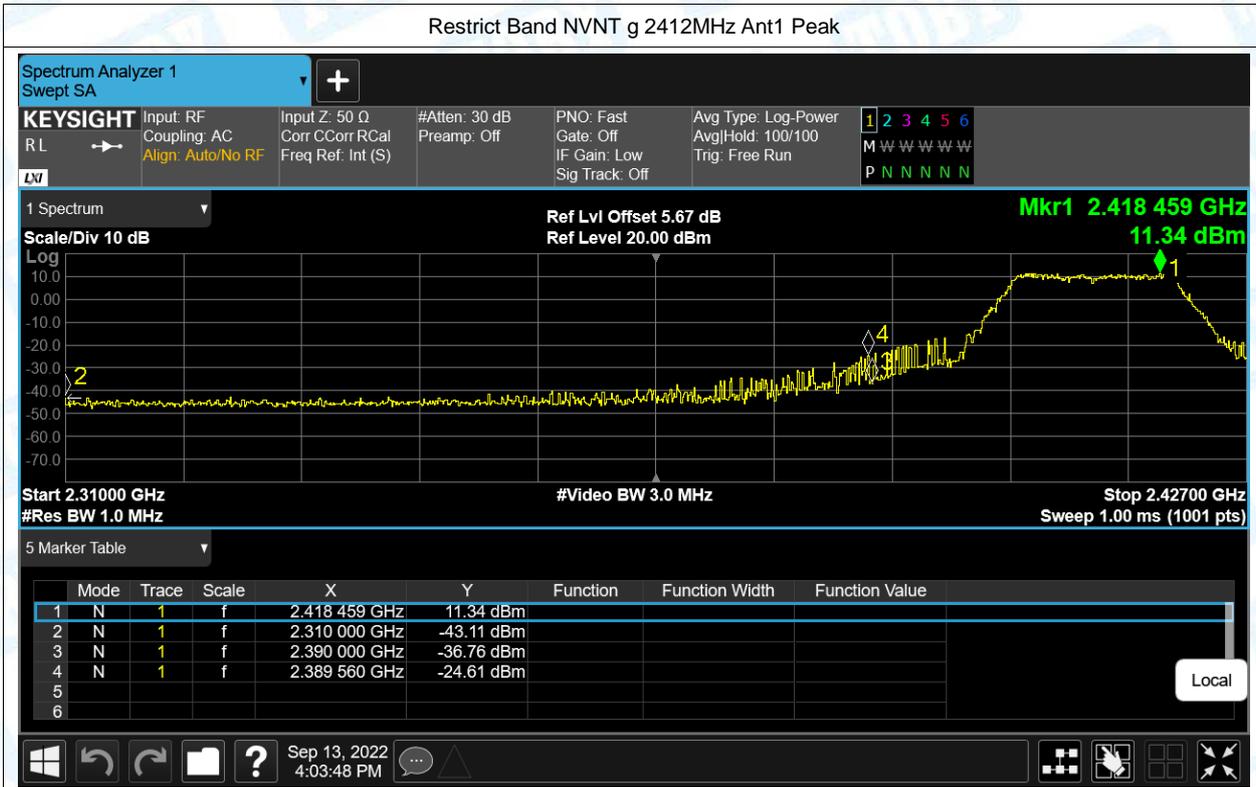




Restrict Band NVNT g 2462MHz Ant1 Peak

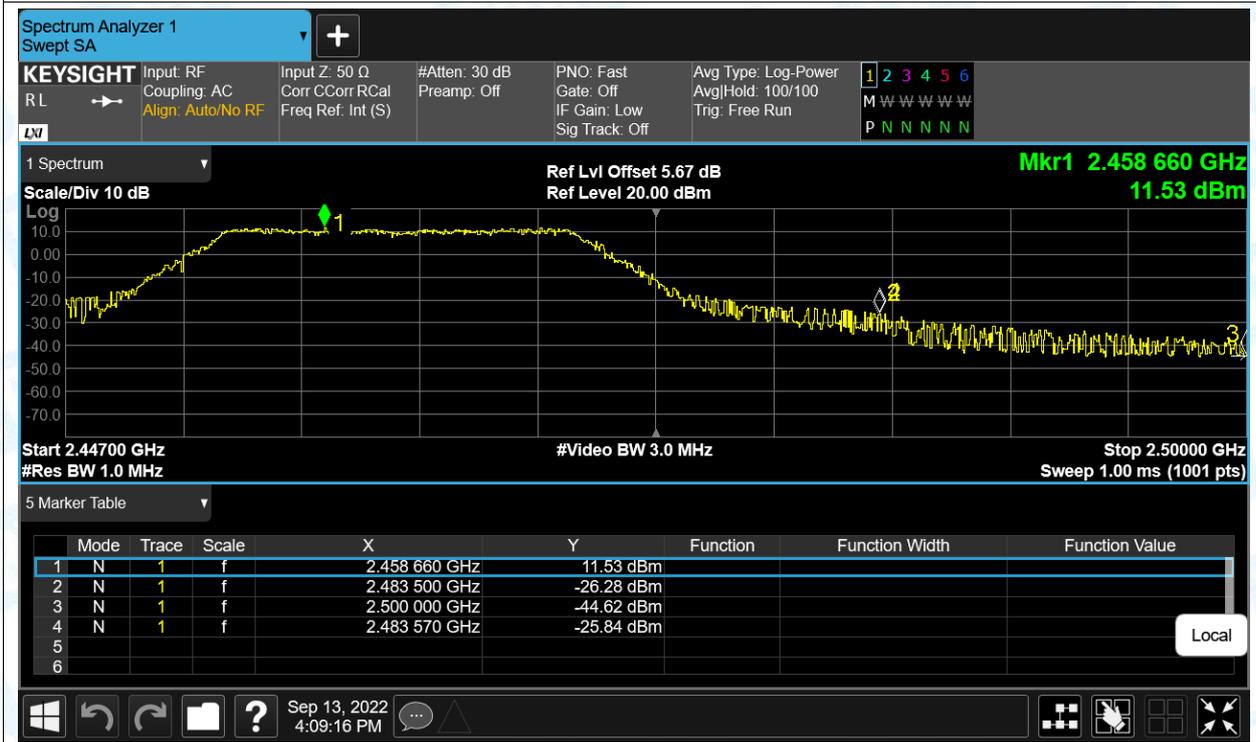

Restrict Band NVNT g 2462MHz Ant1 Average

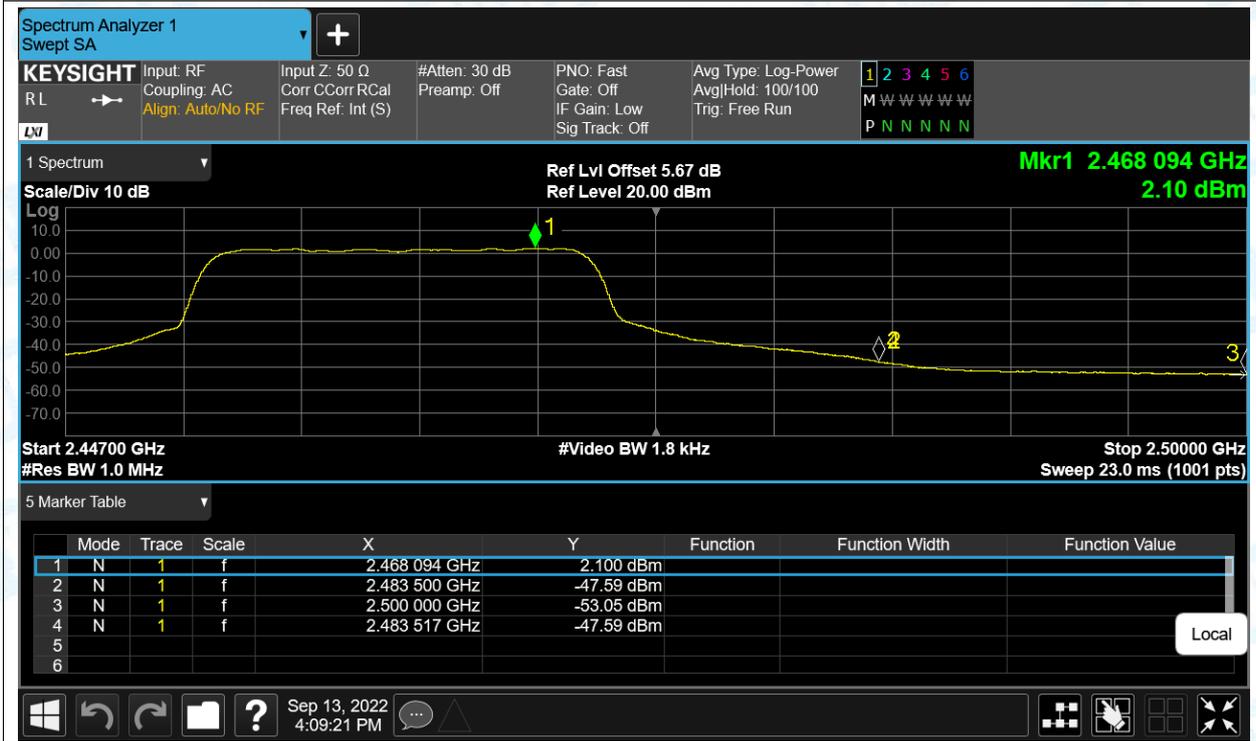

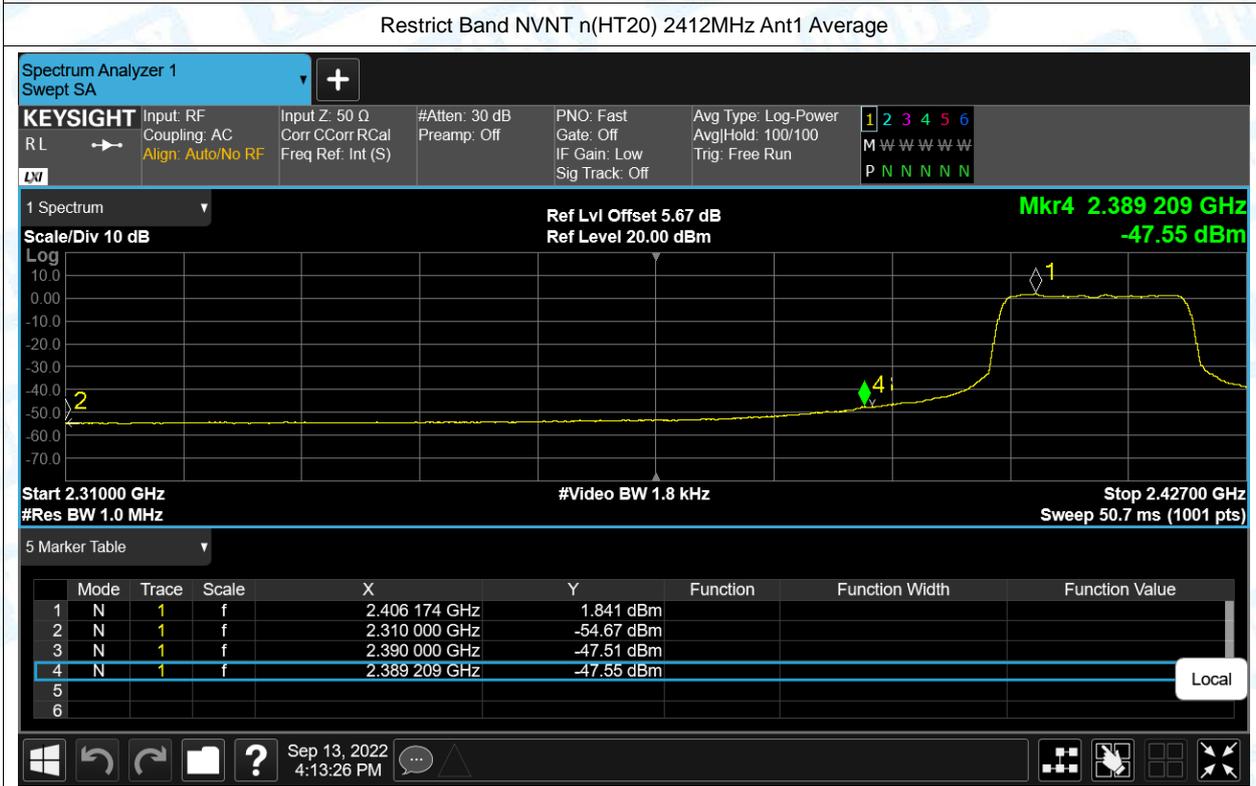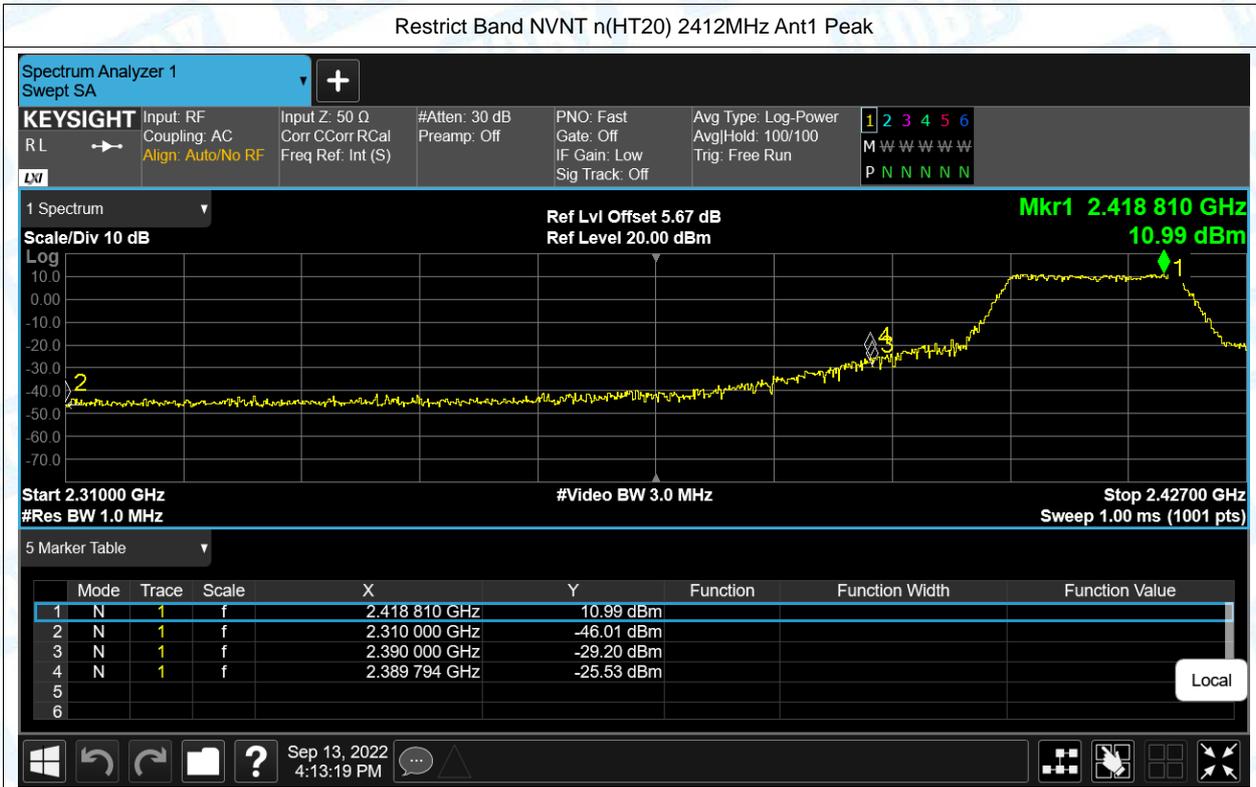

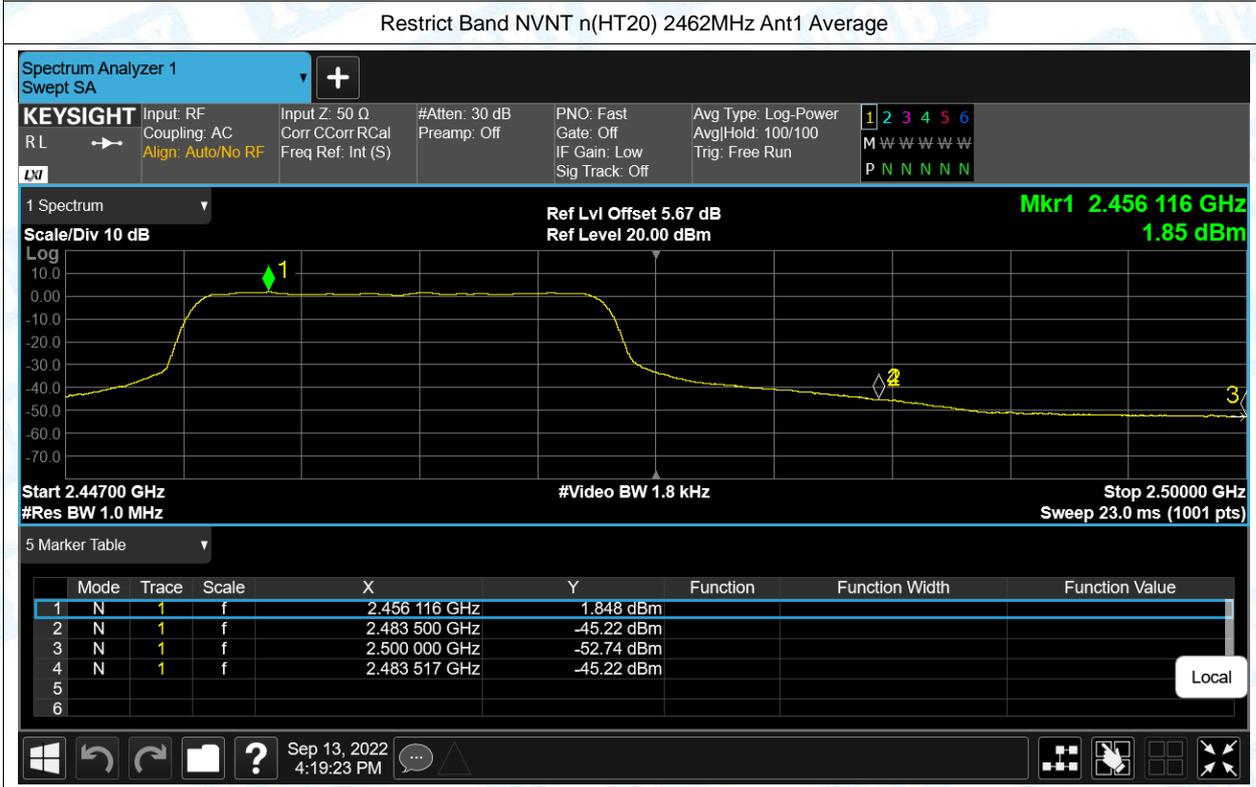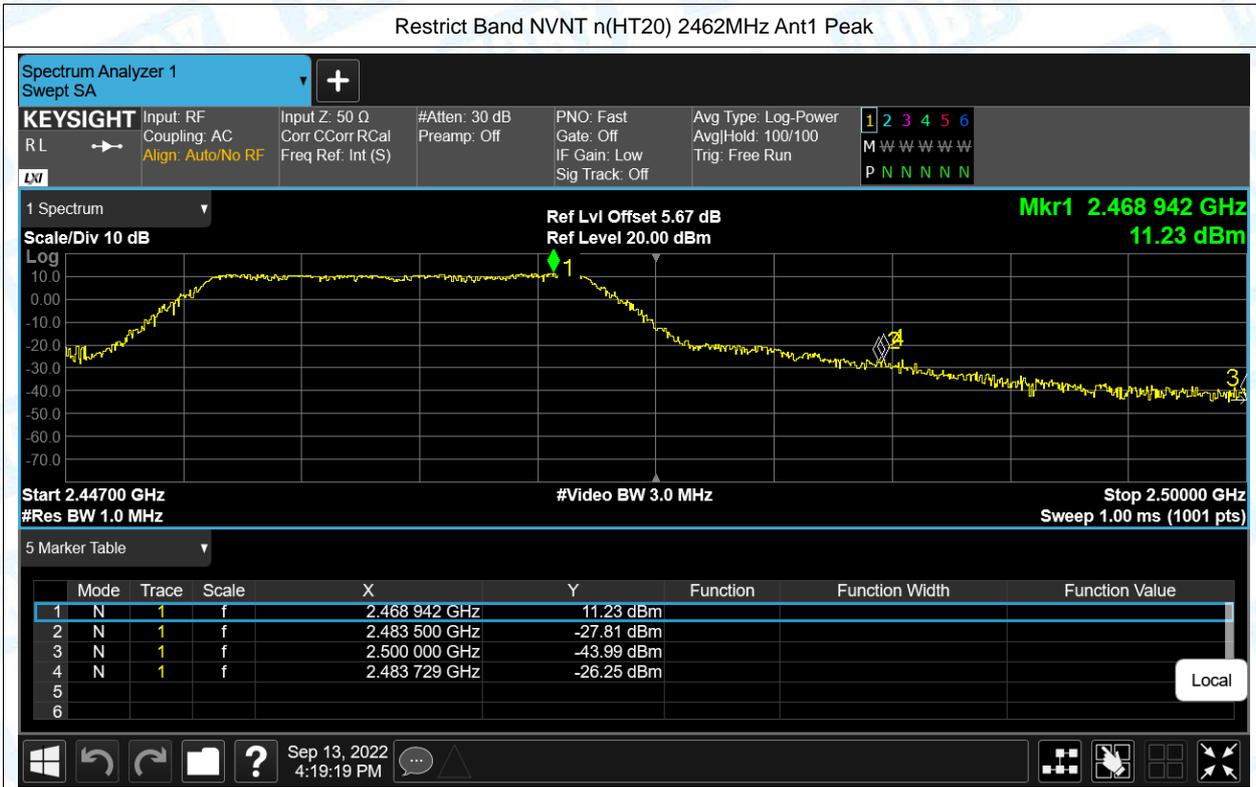

-----END OF THE REPORT-----