



TEST REPORT

Applicant: Dongguan VANCER Information Technology Co., Ltd.
Address of Applicant: Room 616, Building 2, 53 Boyong Road, Humen Town, Dongguan city, Guangdong Province
Manufacturer/Factory: Dongguan VANCER Information Technology Co., Ltd.
Address of Manufacturer/Factory: Room 616, Building 2, 53 Boyong Road, Humen Town, Dongguan city, Guangdong Province
Product Name: Wireless mouse
Model No.: Gemini
Trade Mark: 
FCC ID: 2A8S4-GEMINI
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249
Date of Test: Jul.04,2023-Jul.05,2023
Date of report issued: Jul.06,2023
Test Result : PASS

Remark:

* In the configuration tested, the EUT complied with the standards specified above.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:



Project Engineer

Reviewed by:



Project Manager

Approved by:



Authorized Signature



Report Revision History

Report No.	Description	Issue Date
ET-23060716E	Original	Jul.06,2023

Contents

Page

1	TEST SUMMARY	4
2	GENERAL INFORMATION	5
2.1	GENERAL DESCRIPTION OF EUT	5
2.2	TEST MODE	7
2.3	DESCRIPTION OF SUPPORT UNITS	7
2.4	DEVIATION FROM STANDARDS.....	7
2.5	ABNORMALITIES FROM STANDARD CONDITIONS	7
2.6	TEST FACILITY.....	7
2.7	TEST LOCATION.....	7
2.8	ADDITIONAL INSTRUCTIONS.....	7
3	TEST INSTRUMENTS LIST.....	8
4	TEST RESULTS AND MEASUREMENT DATA	9
4.1	ANTENNA REQUIREMENT	9
4.2	CONDUCTED EMISSIONS	10
4.3	RADIATED EMISSION MEASUREMENT	13
4.3.1	<i>Field Strength of The Fundamental Signal.....</i>	<i>15</i>
4.3.2	<i>Spurious emissions.....</i>	<i>16</i>
4.3.3	<i>Bandedge emissions.....</i>	<i>21</i>
4.4	20dB BANDWIDTH AND 99% BANDWIDTH.....	23
5	TEST SETUP PHOTO	25
6	EUT CONSTRUCTIONAL DETAILS.....	25

1 Test Summary

Test Item	Section in CFR 47	Result	Test by
Antenna requirement	15.203	Pass	/
AC Power Line Conducted Emission	15.207	Pass	Qiao Li
Field strength of the fundamental signal	15.249 (a)	Pass	Qiao Li
Spurious emissions	15.249 (a) (d)/15.209	Pass	Qiao Li
Band edge	15.249 (d)/15.205	Pass	Yvan Fan
20dB Occupied Bandwidth 99% Occupied Bandwidth	15.215 (c)	Pass	Yvan Fan

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013

Measurement Uncertainty

Test Item	Uncertainty Criterion	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±5%	±0.55%	(1)
RF output power, conducted	±1.5dB	±0.99dB	(1)
Power Spectral Density, conducted	±3dB	±0.61dB	(1)
Unwanted Emissions, conducted	±3dB	±0.64dB	(1)
AC Power Line Conducted Emission	±6dB	± 3.02 dB	(1)
Radiated emissions Below 1GHz	±6dB	±4.30 dB	(1)
Radiated emissions Above 1GHz	±6dB	±4.35 dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

2 General Information

2.1 General Description of EUT

Product Name:	Wireless mouse
Model No.:	Gemini
Model of difference:	N/A
Test model:	Gemini
Sample(s) Status:	Engineer sample
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2404MHz~2480MHz
Channel numbers:	16
Channel separation:	2.5MHz
Modulation type:	GFSK
Antenna Type:	PCB Antenna
Antenna gain:	2.34dBi (Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.)
Battery:	Model: SDX602030 DC 3.7V/ 2500mAh
Power supply:	DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2404 MHz	11	2453 MHz	21	/	31	/
2	2407 MHz	12	2459 MHz	22	/	32	/
3	2414 MHz	13	2463 MHz	23	/	33	/
4	2419 MHz	14	2466 MHz	24	/	34	/
5	2422 MHz	15	2473 MHz	25	/	35	/
6	2426 MHz	16	2480 MHz	26	/	36	/
7	2436 MHz	17	/	27	/	37	/
8	2439 MHz	18	/	28	/	38	/
9	2441 MHz	19	/	29	/	39	/
10	2445 MHz	20	/	30	/	40	/

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2404 MHz
The middle channel	2441 MHz
The Highest channel	2480 MHz

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: For battery operated equipment, the EUT was performed using a new DC 3.7V battery.</i>	

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	Xiao mi	5V/2A	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392
Fax:	+86 755 27219460

2.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

3 Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESC17	100605	2023.3.02	2024.3.01
2	EMI Test Receiver	Rohde&schwarz	ESC13	102696	2023.3.02	2024.3.01
3	Loop Antenna	schwarabeck	FMZB 1519 B	FMZB 1519 B	2022.3.11	2024.3.10
4	Broadband antenna	schwarabeck	VULB9168	1064	2022.3.11	2024.3.10
5	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2022.3.11	2024.3.10
6	amplifier	EMtrace	RP01A	50117	2023.3.02	2024.3.01
7	Artificial power network	schwarabeck	NSLK8127	8127483	2023.3.02	2024.3.01
8	Artificial power network	ETS	3186/2NM	1132	2023.3.02	2024.3.01
9	10dB attenuator	HUBER+SUHNER	10dB	/	2023.3.02	2024.3.01
10	amplifier	Space-Dtronics	EWLAN0118 G-P40	19113001	2023.3.02	2024.3.01
11	Filter	Xingbo	XBLBQ-GTA19	210410-3-1	2023.3.06	2024.3.05
12	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2023.3.02	2024.3.01
13	Power detector box	MWRFtest	MW100-PSB	MW201020JYT	2022.11.18	2023.11.17
14	Power meter	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	2023.03.30	2024.03.29

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:
FCC part 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:
The antenna is PCB antenna, the best case gain of the antenna is 2.34dBi, reference to the appendix II for details.

4.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207,						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	24.6 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	AC 120V/60Hz						
Test results:	Pass						

Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode (2441MHz) data.


Measurement data

Line:

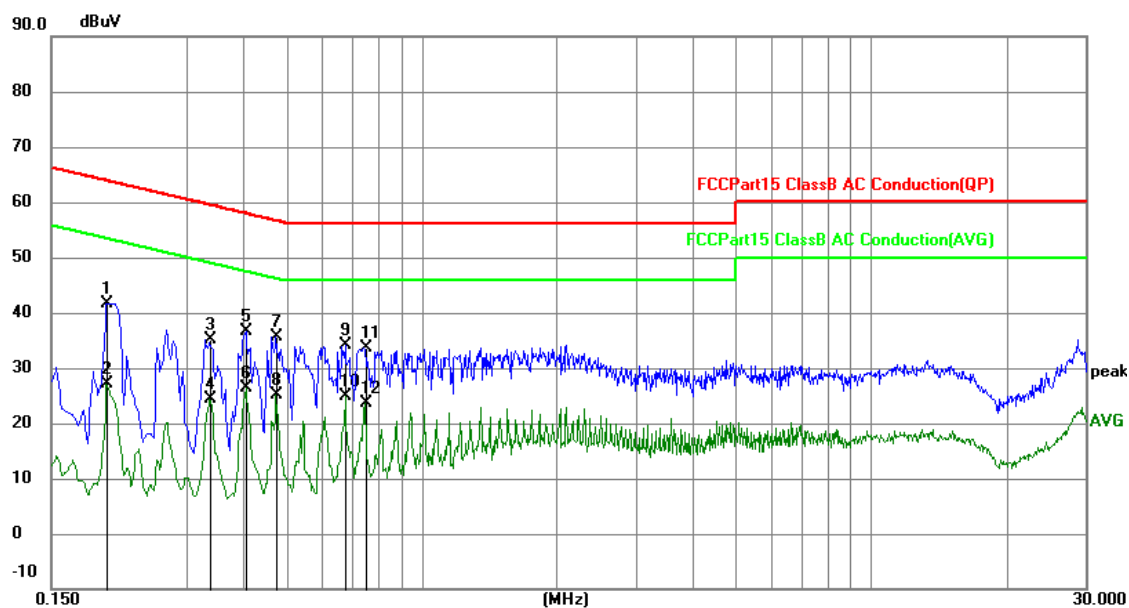

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1995	31.85	9.81	41.66	63.63	-21.97	QP
2	0.1995	17.23	9.81	27.04	53.63	-26.59	AVG
3	0.3390	25.31	9.88	35.19	59.23	-24.04	QP
4	0.3390	14.49	9.88	24.37	49.23	-24.86	AVG
5	0.4065	26.63	9.90	36.53	57.72	-21.19	QP
6	0.4065	16.42	9.90	26.32	47.72	-21.40	AVG
7	0.4740	25.64	9.93	35.57	56.44	-20.87	QP
8	0.4740	15.25	9.93	25.18	46.44	-21.26	AVG
9	0.6764	24.26	9.94	34.20	56.00	-21.80	QP
10	0.6764	14.96	9.94	24.90	46.00	-21.10	AVG
11	0.7483	23.59	9.94	33.53	56.00	-22.47	QP
12	0.7483	13.58	9.94	23.52	46.00	-22.48	AVG

Neutral:

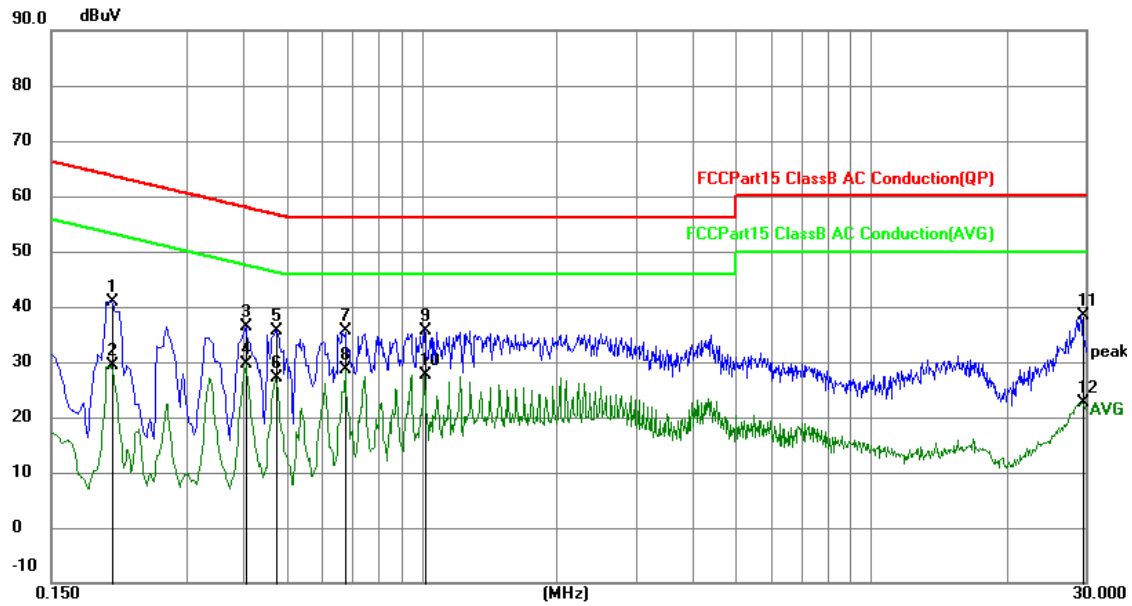




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2040	31.12	9.81	40.93	63.45	-22.52	QP
2	0.2040	19.47	9.81	29.28	53.45	-24.17	AVG
3	0.4065	26.56	9.90	36.46	57.72	-21.26	QP
4	0.4065	19.72	9.90	29.62	47.72	-18.10	AVG
5	0.4740	25.77	9.93	35.70	56.44	-20.74	QP
6	0.4740	17.24	9.93	27.17	46.44	-19.27	AVG
7	0.6764	25.66	9.94	35.60	56.00	-20.40	QP
8	0.6764	18.81	9.94	28.75	46.00	-17.25	AVG
9	1.0184	25.60	9.96	35.56	56.00	-20.44	QP
10	1.0184	17.68	9.96	27.64	46.00	-18.36	AVG
11	29.6025	28.86	9.50	38.36	60.00	-21.64	QP
12	29.6025	13.11	9.50	22.61	50.00	-27.39	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Level = Receiver Read level + Factor (Factor = LISN Factor + Cable Loss + Attenuator Factor)
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Radiated Emission measurement

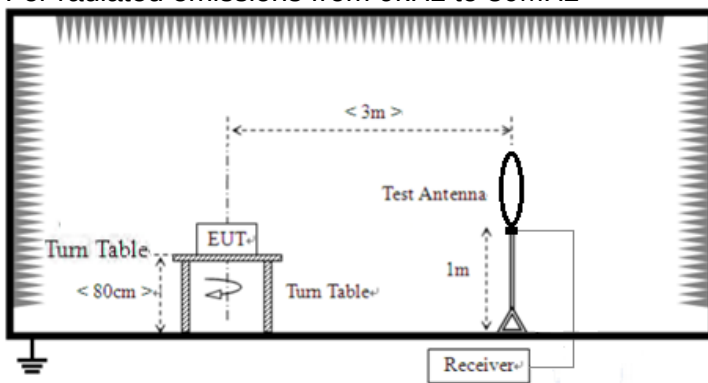Test Requirement:	FCC Part15 C Section 15.209 & 15.249 (a) &(d).				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
5000 @3m			Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				

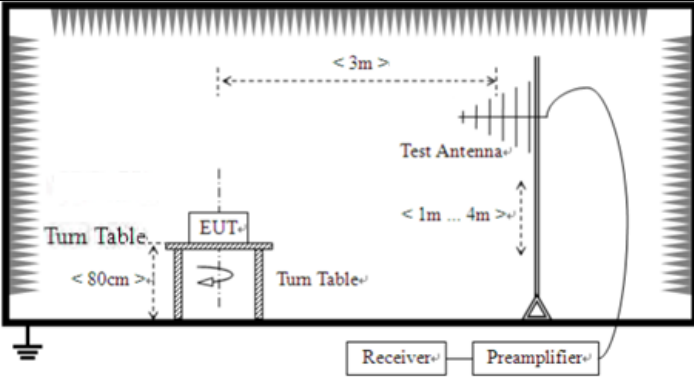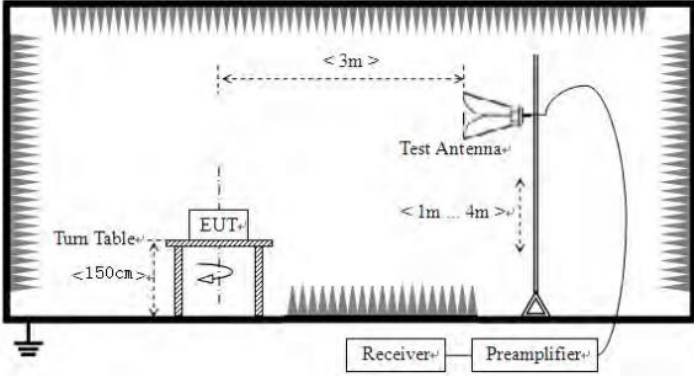	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test environment:	Temp.: 24.2 °C Humid.: 47% Press.: 1012mbar
Test voltage:	DC3.7V
Test results:	Pass

4.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2404.00	108.16	-14.43	93.73	114.00	-20.27	Vertical
2404.00	105.87	-14.43	91.44	114.00	-22.56	Horizontal
2441.00	111.18	-14.29	96.89	114.00	-17.11	Vertical
2441.00	108.93	-14.29	94.64	114.00	-19.36	Horizontal
2480.00	107.02	-14.13	92.89	114.00	-21.11	Vertical
2480.00	104.26	-14.13	90.13	114.00	-23.87	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2404.00	91.78	-14.43	77.35	94.00	-16.65	Vertical
2404.00	88.86	-14.43	74.43	94.00	-19.57	Horizontal
2441.00	90.03	-14.29	75.74	94.00	-18.26	Vertical
2441.00	87.78	-14.29	73.49	94.00	-20.51	Horizontal
2480.00	87.26	-14.13	73.13	94.00	-20.87	Vertical
2480.00	86.02	-14.13	71.89	94.00	-22.11	Horizontal


4.3.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


■ Below 1GHz

Horizontal:

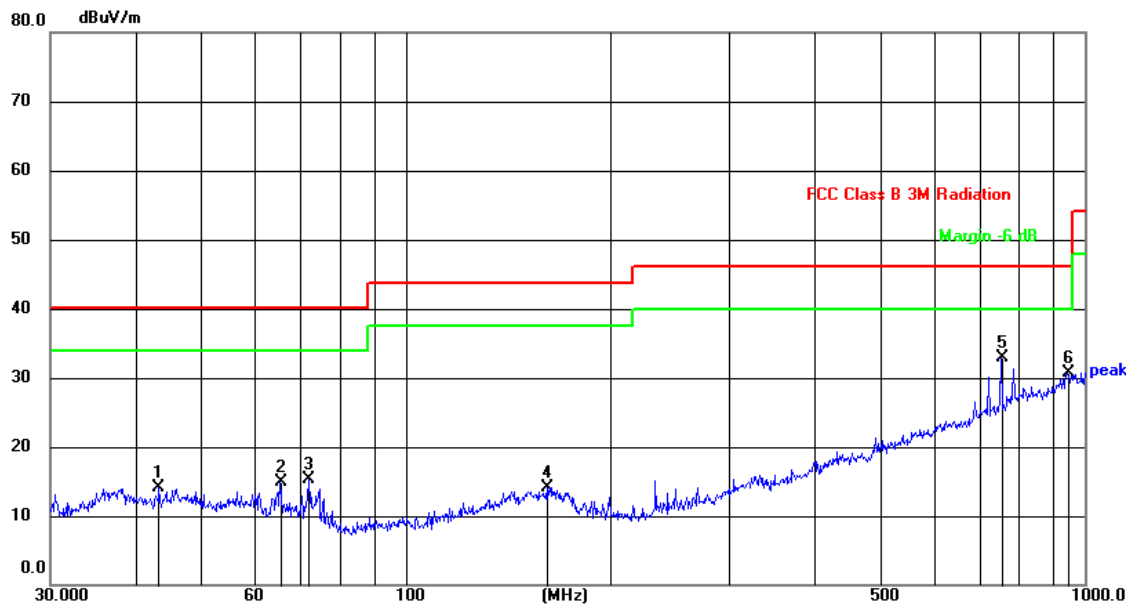

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.3534	35.12	-21.10	14.02	40.00	-25.98	QP
2	65.3432	38.37	-23.41	14.96	40.00	-25.04	QP
3	72.0843	39.92	-24.56	15.36	40.00	-24.64	QP
4	161.4742	34.82	-20.63	14.19	43.50	-29.31	QP
5	752.7432	40.89	-8.02	32.87	46.00	-13.13	QP
6	942.1305	34.79	-4.07	30.72	46.00	-15.28	QP

Vertical:

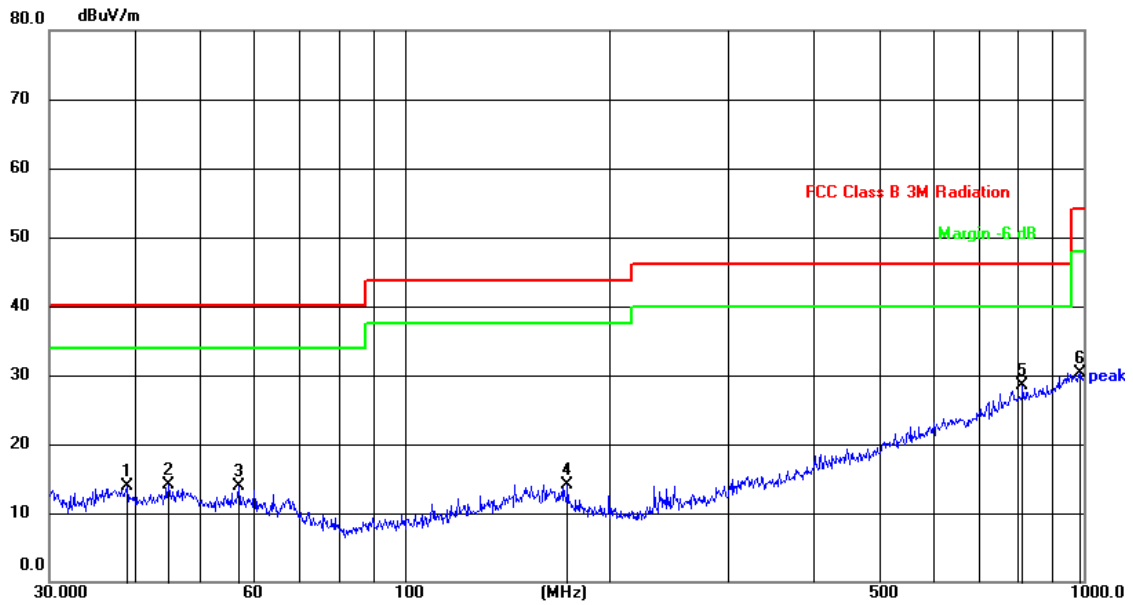

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.0244	34.97	-21.10	13.87	40.00	-26.13	QP
2	44.9006	35.27	-21.18	14.09	40.00	-25.91	QP
3	56.9912	36.29	-22.32	13.97	40.00	-26.03	QP
4	173.8135	35.72	-21.56	14.16	43.50	-29.34	QP
5	813.1115	35.01	-6.45	28.56	46.00	-17.44	QP
6	986.0716	33.74	-3.48	30.26	54.00	-23.74	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4808.00	68.24	-9.88	58.36	74.00	-15.64	Horizontal
7212.00	58.82	-4.17	54.65	74.00	-19.35	Horizontal
9616.00	---	---	---	---	---	Horizontal
12020.00	---	---	---	---	---	Horizontal
4808.00	69.77	-9.88	59.89	74.00	-14.11	Vertical
7212.00	60.00	-4.17	55.83	74.00	-18.17	Vertical
9616.00	---	---	---	---	---	Vertical
12020.00	---	---	---	---	---	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4808.00	56.64	-9.88	46.76	54.00	-7.24	Horizontal
7212.00	47.60	-4.17	43.43	54.00	-10.57	Horizontal
9616.00	---	---	---	---	---	Horizontal
12020.00	---	---	---	---	---	Horizontal
4808.00	57.77	-9.88	47.89	54.00	-6.11	Vertical
7212.00	47.48	-4.17	43.31	54.00	-10.69	Vertical
9616.00	---	---	---	---	---	Vertical
12020.00	---	---	---	---	---	Vertical

Remark:

1. Final Level =Receiver Read level +Correction Factor(Antenna Factor + Cable Loss – Preamplifier Factor)
2. The emission levels of other frequencies are more than 20 dB below the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	68.66	-9.79	58.87	74.00	-15.13	Horizontal
7323.00	63.34	-3.83	59.51	74.00	-14.49	Horizontal
9764.00	---	---	---	---	---	Horizontal
12205.00	---	---	---	---	---	Horizontal
4882.00	67.38	-9.79	57.59	74.00	-16.41	Vertical
7323.00	63.26	-3.83	59.43	74.00	-14.57	Vertical
9764.00	---	---	---	---	---	Vertical
12205.00	---	---	---	---	---	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	57.66	-9.79	47.87	54.00	-6.13	Horizontal
7323.00	48.15	-3.83	44.32	54.00	-9.68	Horizontal
9764.00	---	---	---	---	---	Horizontal
12205.00	---	---	---	---	---	Horizontal
4882.00	56.81	-9.79	47.02	54.00	-6.98	Vertical
7323.00	47.18	-3.83	43.35	54.00	-10.65	Vertical
9764.00	---	---	---	---	---	Vertical
12205.00	---	---	---	---	---	Vertical

Remark:

1. Final Level = Receiver Read level + Correction Factor (Antenna Factor + Cable Loss – Preamplifier Factor)
2. The emission levels of other frequencies are more than 20 dB below the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	67.99	-9.68	58.31	74.00	-15.69	Horizontal
7440.00	58.01	-3.50	54.51	74.00	-19.49	Horizontal
9920.00	---	---	---	---	---	Horizontal
12400.00	---	---	---	---	---	Horizontal
4960.00	69.52	-9.68	59.84	74.00	-14.16	Vertical
7440.00	57.15	-3.50	53.65	74.00	-20.35	Vertical
9920.00	---	---	---	---	---	Vertical
12400.00	---	---	---	---	---	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	54.87	-9.68	45.19	54.00	-8.81	Horizontal
7440.00	46.96	-3.50	43.46	54.00	-10.54	Horizontal
9920.00	---	---	---	---	---	Horizontal
12400.00	---	---	---	---	---	Horizontal
4960.00	54.94	-9.68	45.26	54.00	-8.74	Vertical
7440.00	47.29	-3.50	43.79	54.00	-10.21	Vertical
9920.00	---	---	---	---	---	Vertical
12400.00	---	---	---	---	---	Vertical

Remark:

1. *Final Level = Receiver Read level + Correction Factor (Antenna Factor + Cable Loss – Preamplifier Factor)*
2. *The emission levels of other frequencies are more than 20 dB below the limit and not show in test report.*
3. *“---”, means this data is too weak instrument of signal is unable to test.*

4.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	58.36	-14.50	43.86	74.00	-30.14	Horizontal
2400.00	68.07	-14.45	53.62	74.00	-20.38	Horizontal
2390.00	59.79	-14.50	45.29	74.00	-28.71	Vertical
2400.00	68.91	-14.45	54.46	74.00	-19.54	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	45.27	-14.50	30.77	54.00	-23.23	Horizontal
2400.00	54.14	-14.45	39.69	54.00	-14.31	Horizontal
2390.00	44.94	-14.50	30.44	54.00	-23.56	Vertical
2400.00	54.99	-14.45	40.54	54.00	-13.46	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	66.70	-14.13	52.57	74.00	-21.43	Horizontal
2500.00	57.89	-14.06	43.83	74.00	-30.17	Horizontal
2483.50	66.69	-14.13	52.56	74.00	-21.44	Vertical
2500.00	56.37	-14.06	42.31	74.00	-31.69	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV/m)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	53.37	-14.13	39.24	54.00	-14.76	Horizontal
2500.00	45.82	-14.06	31.76	54.00	-22.24	Horizontal
2483.50	52.12	-14.13	37.99	54.00	-16.01	Vertical
2500.00	47.19	-14.06	33.13	54.00	-20.87	Vertical

Remark:

1. *Final Level = Receiver Read level + Correction Factor (Antenna Factor + Cable Loss – Preamplifier Factor)*


4.4 20dB Bandwidth and 99% bandwidth

Measurement Data


Test channel	20dB bandwidth(MHz)	Result
Lowest	2.553	Pass
Middle	2.043	
Highest	1.926	

Test channel	99% bandwidth(MHz)	Result
Lowest	2.8321	Pass
Middle	2.6463	
Highest	2.3484	


Test plot as follows:

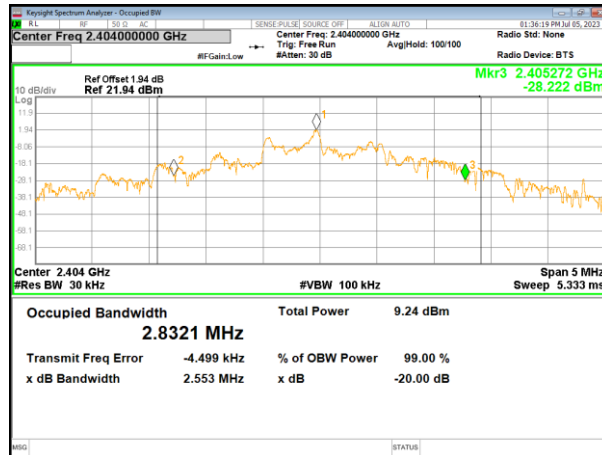

Lowest channel

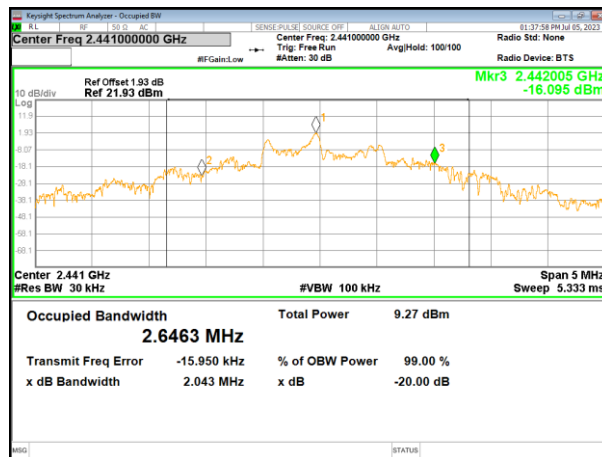

Middle channel

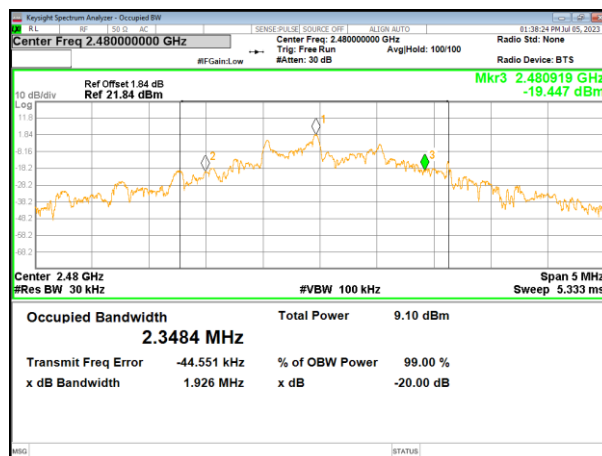

Highest channel

5 Test Setup Photo

Reference to the **appendix I** for details.

6 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----