

The content is subject to update without prior notice.

You can check the latest version on the official website of GDU Technology
www.gdu-tech.com


Copyright © 2024 GDU-Tech Co., Ltd. All rights reserved



Scan the WeChat code to follow GDU-Tech Co., Ltd.



GDU-TECH

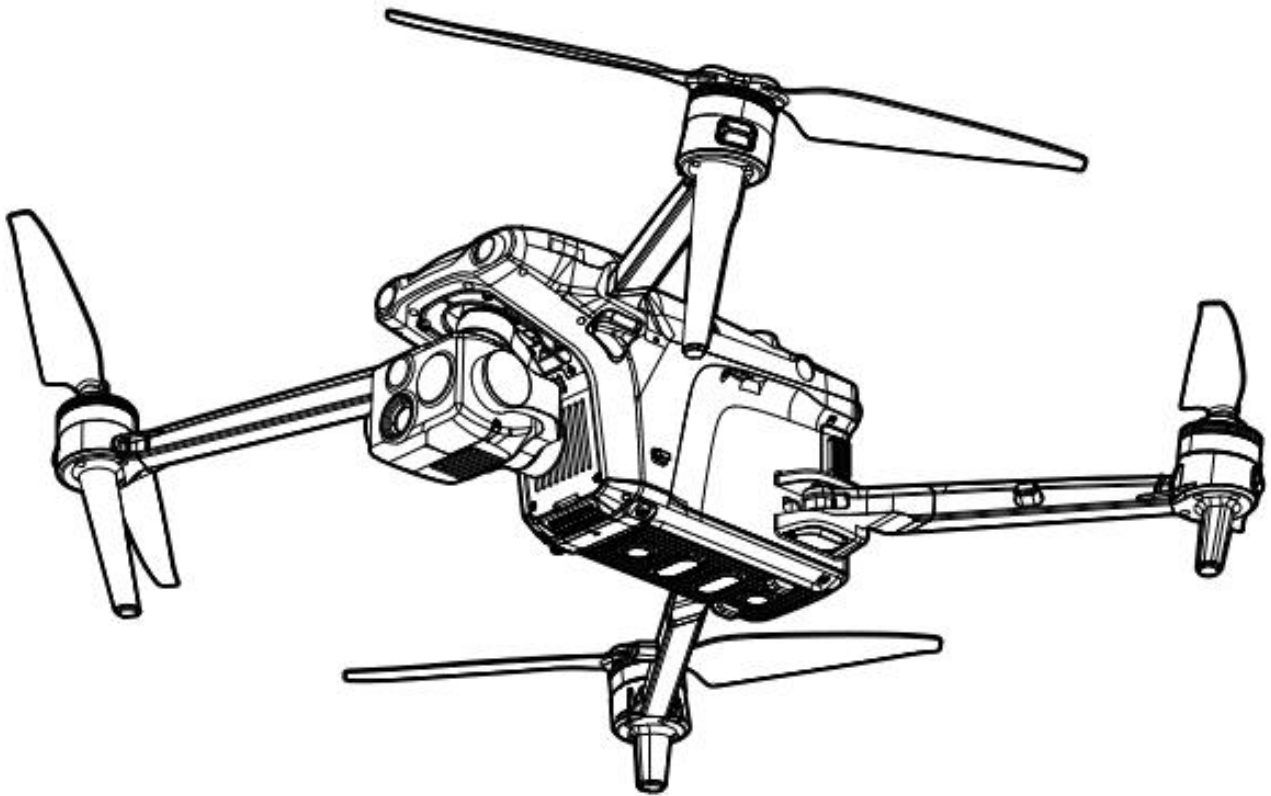

S200

Quick Guide V1.0

**Series Quadcopters
Quadrotor UAV**

2024.04

Instructions

Warning

Thank you for using this product. This is a specialized electronic product, and incorrect operation may cause damage to items, personal injury or even death. The legal consequences caused by this shall be borne by the user. Minors under the age of 18 shall not use this product. To ensure user experience and your personal safety, please read the following documents carefully before using this product:

Disclaimer and Safety Operation Guide

User Manual

This manual is subject to update without prior notice. Please refer to the latest version on the official website (www.gdu-tech.com). The whole machine has a one-year after-sales warranty. For specific after-sales policies, please refer to the official website.

Drone real-name registration

According to the *Civil Unmanned Aerial Vehicle Real-Name Registration Management Regulations* released by the Civil Aviation Administration of China, drone owners must register their real names in the drone real-name registration system (<http://uom.caac.gov.cn>) after purchase, fill in relevant information, and paste the registration mark given by the system on the fuselage.


Introduction

The S200 series drones implement advanced flight control algorithms, camera processing algorithms, gimbal stabilization algorithms, and visual AI algorithms. They integrate omnidirectional obstacle avoidance systems, high-precision RTK systems, and visual positioning systems. They boast advanced automatic flight capabilities, such as automatic cruising, AI intelligent identification and tracking, automatic return, and automatic precise landing, as well as visual assisted positioning, visual omnidirectional obstacle avoidance, etc., ensuring safer and more stable flight. The fuselage can be folded for easy storage and portability, meeting the complex needs of different industries and scenarios.

Highlights


1. Flagship imaging performance, 8K wide-angle, high-definition zoom, an ideal choice for inspection.
2. 10X optical zoom, 160X hybrid zoom, flexible in both near and far distances.
3. Integration of powerful AI capabilities, more intelligent.
4. 45min ultra-long battery life, efficient operation.
5. Omnidirectional perception, safe flight.
6. Maximum flight speed: 21m/s, wind resistance: 12m/s.
7. Rich accessories, unlimited potential.
8. Small and portable, pocket-size.

List of aircraft components

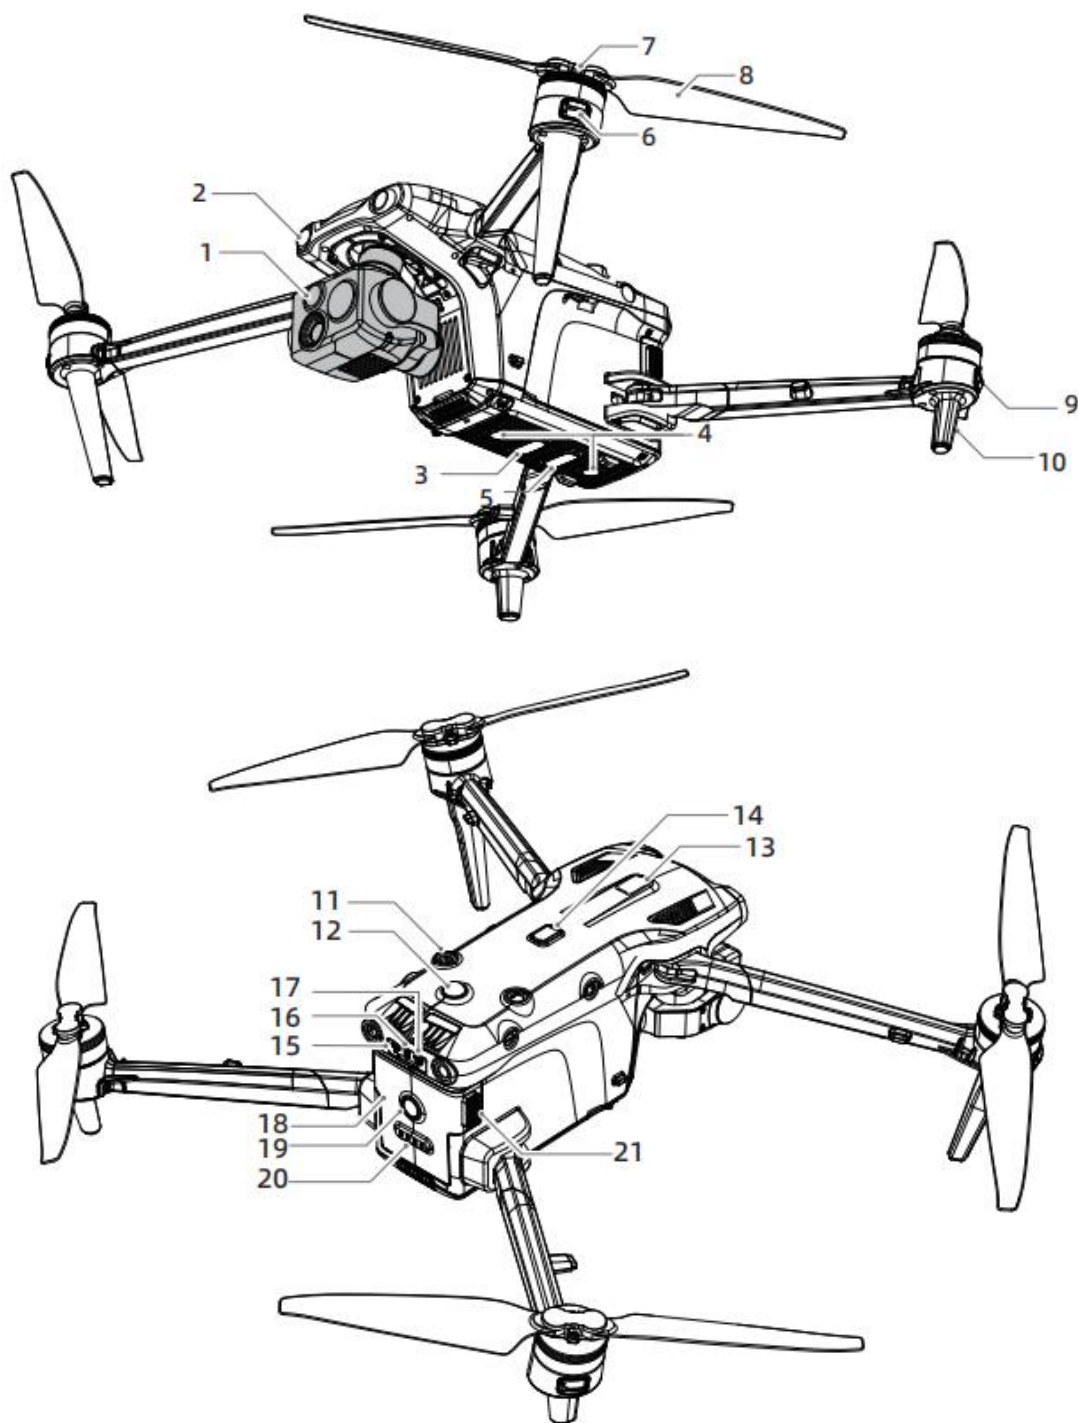

1	Integrated gimbal camera	8	Propeller	15	Parameter adjustment interface (USB-C)
2	Forward obstacle avoidance system	9	Flight status indicator light	16	Camera microSD card slot
3	Fill light	10	Tripod (with antenna)	17	5G/4G interface
4	Downward vision system	11	Upward vision system	18	Intelligent flight battery
5	Infrared sensor system	12	Night flight light	19	Battery switch
6	Indicator light	13	PSDK interface	20	Battery indicator light
7	Motor	14	Parachute interface	21	Battery buckle

Remote controller

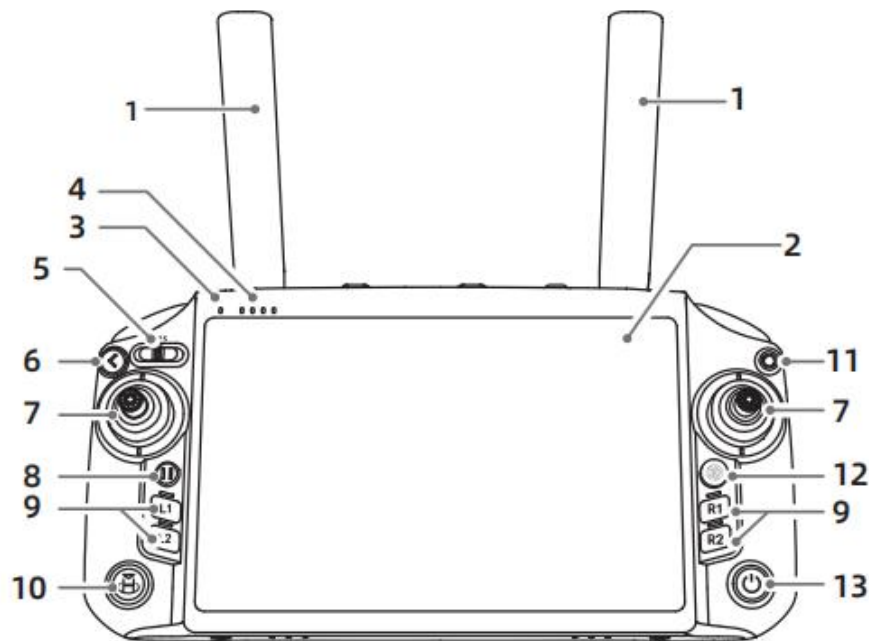

1 Remote controller's external antenna

Transmits control signals and wireless image transmission signals between the remote controller and the aircraft.

2 Touch screen

Displays system and application App screens, supports 10-point touch. Please wipe the water on the screen to ensure effective touch function.

3 Status indicator light

Displays the system status of the remote controller. Detailed description can be found in the remote controller indicator light section.

4 Battery indicator

Displays the battery level of the aircraft.

5 Flight mode switch

Used to switch flight modes: T mode (tripod), P mode (standard), S mode (sport), and A mode (attitude), which can be customized in the App.

6 Back button / system function button

Single click to return to the previous interface, double click to return to the system homepage. Use the back button and other buttons to form a key combination. You can view detailed instructions in the remote control button function section.

7 Joystick

You can switch flight modes in GDU Flight II.

8 Emergency stop button

Short press to make the aircraft brake urgently and hover in place (when GNSS or vision system is effective).

9 L1/L2/R1/R2 buttons (customizable)

The button mapping function can be viewed in GDU Flight II.

10 Smart RTH button

Press and hold to start smart RTH, and short press again to cancel smart RTH.

11 Confirm button


Click to confirm the current operation.

12 Five-way button

Up, down, left, right, and back to center.

13 Power button

Short press once to turn on/off the remote control display. When the remote control is turned off, press and hold for 3-5 seconds to turn on the remote control; when the remote control is turned on, press and hold for 3-5 seconds, and then click the "Power Off" button displayed on the remote control screen to turn off the remote control; when the remote control is turned on, press and hold for 8 seconds to force shutdown.

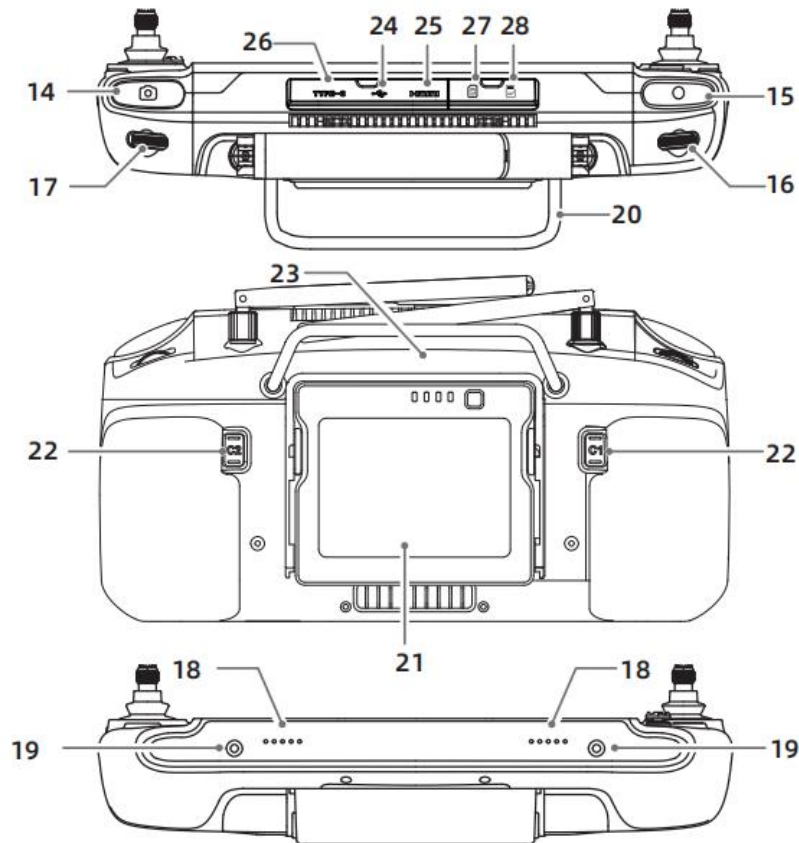

14 Photo button
Press to take a photo.

15 Recording button
Start or stop recording.

16 Left dial
Turn to adjust the pitch angle of the gimbal camera.

17 Right dial
Turn to adjust the EV value of the gimbal camera.

18 Sound pickup
Avoid foreign objects blocking the sound pickup effect when using.

19 Lanyard hole
Can be used to install the remote control strap.

20 Handle

21 External battery for remote control

22 C1/C2 button (customizable)

23 Speaker

24 USB-A interface

Connect to mobile devices, USB card readers, etc., or network adapter output.

25 HDMI interface

Output HDMI signal to external display.

26 Type-C port

Android system debugging, external expansion and connecting to charging devices to charge the remote control.

27 SIM card

Connect to mobile network.

28 SD card

Supports microSD cards.

Prepare the aircraft


First use

The S200 series drones are in storage state when they leave the factory. Please follow the steps below to prepare the aircraft and remote controller.


Prepare the aircraft

When using the aircraft for the first time, you need to charge the intelligent flight battery to activate the battery. Use the standard charger and connect it to the charging base for charging.


1. Start charging to activate the battery. It takes about 50 minutes to fully charge.

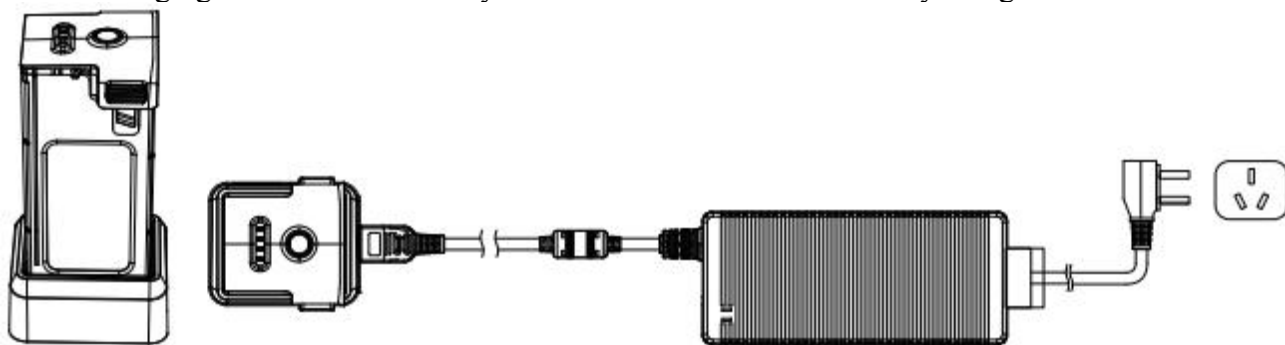

2. Expand the front arm and then expand the rear arm.

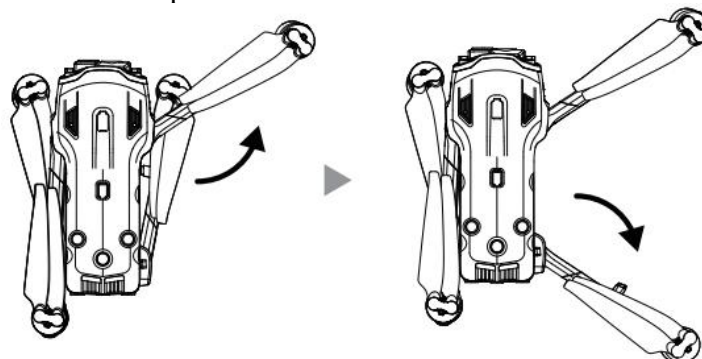


3. Remove the gimbal protective cover.

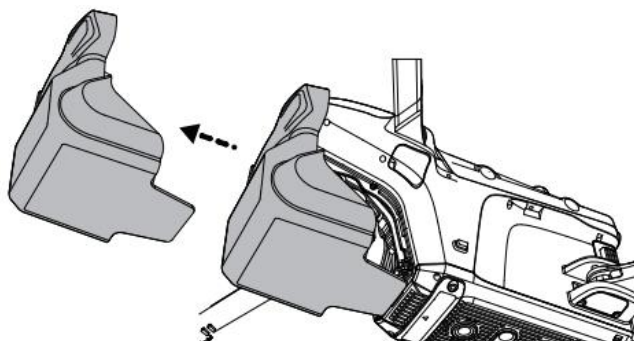

4. Install the propellers.

The aircraft must be equipped with two types of propellers, CW and CCW, two of each type. The CCW propeller has a white arc color mark on the shaft, while the CW propeller is unmarked. The markings of the propellers indicate different rotation directions. Place the propellers on the corresponding motors. The motors with white arc color marks on the middle axis match with the CCW propellers, while the unmarked motors with CW propellers. Use an M2.5 hexagon screwdriver to tighten the propeller locking screws to complete the propeller installation.

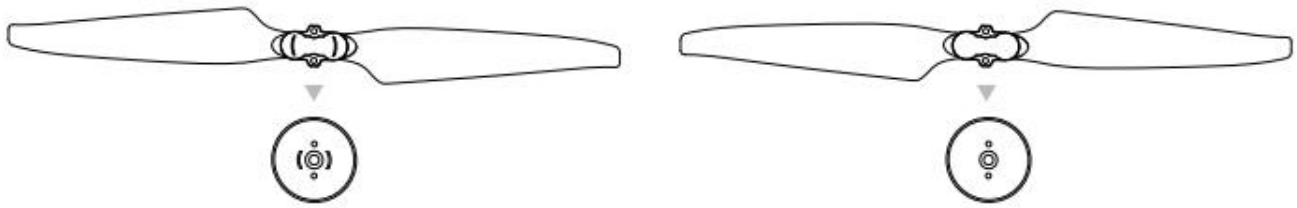


- Make sure the aircraft is turned off before installing the propeller.
- Make sure the gimbal cover has been removed and the front and rear arms have been unfolded to avoid affecting the aircraft initialization.
- When the aircraft is not in use, it is recommended to put the gimbal protection cover in place. Turn the gimbal camera to keep it horizontal and forward, then cover the visual system with the gimbal protection cover. Make sure to align the positioning holes, and then press the buckle to complete the installation.



- The propeller speed can reach up to 7000 RPM, so please keep away for safety.
- Before each flight, be sure to check whether each propeller is intact. If it is aging, damaged or deformed, please replace it before flying.
- Before each flight, be sure to check whether each propeller is installed correctly and firmly.
- Please use the propellers provided by GDU-TECH. Propellers of different models cannot be mixed.
- Before replacing the propeller, make sure the aircraft power is cut off.
- The propeller edge is sharp. Be cautious when replacing the propeller.
- Do not get close to or touch the rotating propeller or motor to avoid injury.
- Before the aircraft is ground tested, make sure the propeller has been removed.


Prepare the remote controller

1. Use the standard charger to connect the remote-control Type-C port to charge to activate the battery.

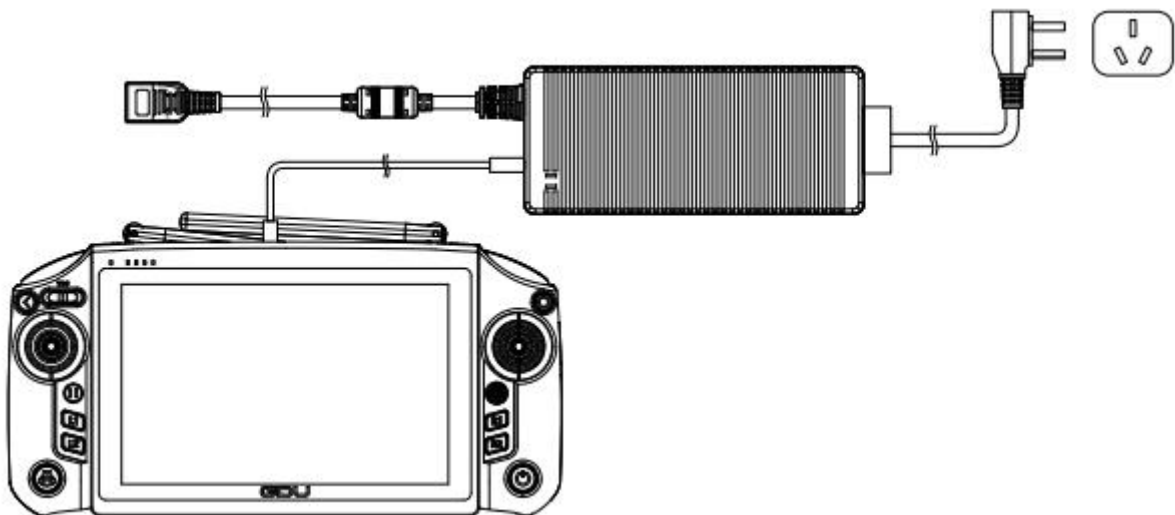

2. Unfold the remote controller's antenna and adjust it to a suitable position. Different antenna positions may result in different signal strengths. According to the relative position of the remote control and the aircraft, adjust the direction of the remote control's external antenna and align the antenna plane with the direction of the aircraft to optimize the signal quality between the remote


control and the aircraft.

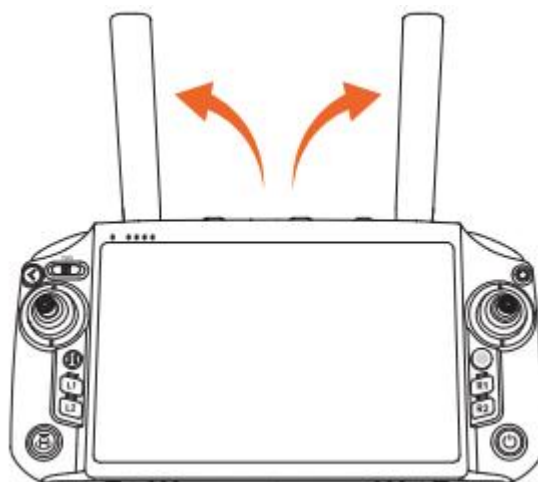

Start/Stop the motor

Start the motor

Bend the stick to start the motor. After the motor starts, release the joystick immediately.

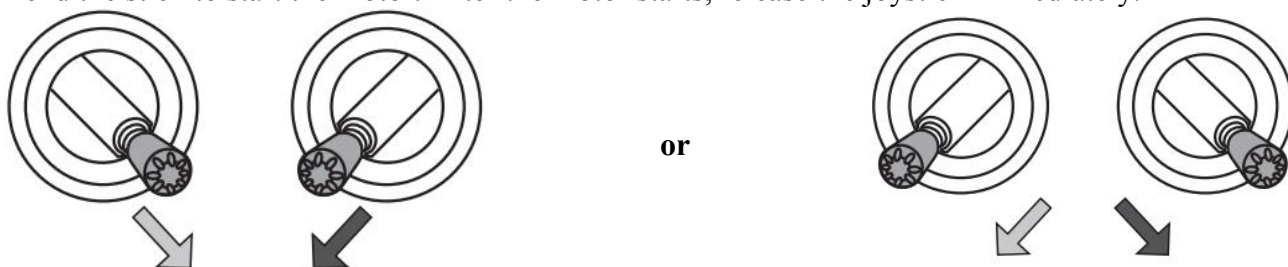

Stop the motor

When the aircraft is on the ground and the motor starts, stop the motor in the following way: push the stick to the lowest position and hold it. The motor stops after 1 second.




Basic flight

1. Place the aircraft on a flat, open ground with the user facing the tail.
2. Turn on the remote control and aircraft.
3. Run the GDU Flight II APP and enter the camera interface.
4. Wait until the aircraft self-check completes. If there is no abnormal prompt in the GDU Flight II APP, you can start the motor.
5. Slowly push the stick upwards to let the aircraft take off smoothly.
6. Pull down the stick to make the aircraft descend.
7. After landing, pull the stick to the lowest position and hold it until the motor stops.
8. After stopping the motor, turn off the power of the aircraft and the remote control in turn.




When taking off, be sure to place the aircraft on a stable and fixed surface. It does not support handheld or palm-held takeoff or landing.

Install/remove the battery

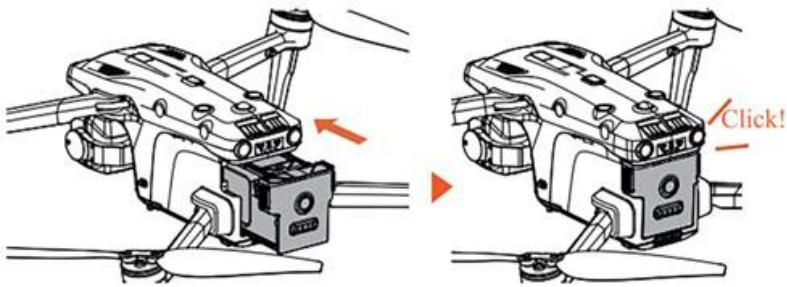


Install the battery



Remove the battery

Charging

1. Take out the aircraft battery;
2. Input voltage: 17V;
3. Charging time: ≤ 50 minutes.

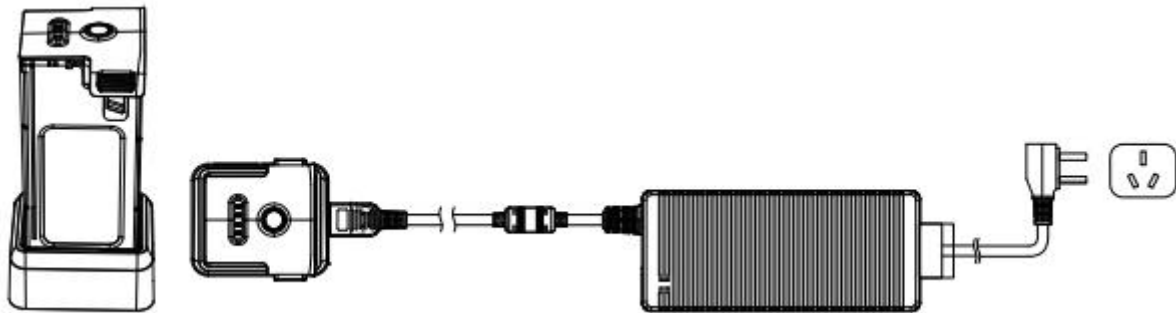

Running this device in a residential environment may cause wireless interference.

Turn on/off the battery

To turn on the battery:

When the battery is turned off, first short press the battery power button once, the power LED indicator will show a scrolling effect, and then long press the power button for 2 seconds to turn on the battery. When the battery is turned on, the power LED lights will light up from bottom to top, and the battery power indicator will show the current battery power.

To turn off the battery:

When the battery is turned on, first short press the battery power button once, the power LED indicator will show a scrolling effect, and then long press the power button for 2 seconds to turn off the battery. After the battery is turned off, the power LED lights will light up from top to bottom until all the indicators are off.

Technical parameters

Aircraft (model: S200/S220)

Weight (including battery and propellers)	$\leq 1650\text{g}$
Wheelbase	486mm
	Vertical: $\pm 0.1\text{ m}$ (visual positioning) $\pm 0.5\text{ m}$ (GNSS) $\pm 0.1\text{ m}$ (RTK)
Hovering accuracy (windless or light wind environment)	Horizontal: $\pm 0.3\text{ m}$ (visual positioning) $\pm 1.5\text{ m}$ (GNSS) $\pm 0.1\text{ m}$ (RTK)
	When RTK FIX, horizontal: $1\text{ cm} + 1\text{ ppm}$
Hovering position accuracy (RTK)	Vertical: $1.5\text{ cm} + 1\text{ ppm}$
Maximum take-off altitude	7000m

Maximum ascent speed	8 m/s
Maximum descent speed	6 m/s
Maximum horizontal flight speed	21 m/s
Maximum tilt angle	35°
Maximum wind speed	12 m/s
Maximum flight time	≥45 min (long battery life version)
Positioning mode	Supports RTK or single Beidou
GNSS	GPS + Galileo + Bei Dou + GLONASS
IP protection level	IP43
Working temperature	-20℃ - 50℃

Wide-angle camera (model: S200/S220)

Image sensor	1/1.49 inch CMOS, effective pixels 50 million
Field of view	85°
Equivalent focal length	24mm
Aperture	f/1.9
Focus point	2m - ∞
	Video: 100 - 6400 (automatic)
ISO	100 - 25600 (manual)
	Photo: 100 - 6400 (automatic)
	100 - 25600 (manual)
Electronic shutter	8s-1/8000 s
Maximum photo size	8000 × 6000
Video resolution	7264×4086@15fps, 3840×2160@30fps/60fps, 1920×1080@30fps
Photo format	JPEG
Video format	MP4

Telephoto camera (model: S200/S220)

Image sensor	1/2-inch CMOS, effective pixels: 48 million
Field of view	25° - 9.7°
Equivalent focal length	96mm - 250mm
Aperture	f/3.7 - f/4.2
Focus point	5 m - ∞
	Video: 100-11200 (automatic)
ISO	100-25600 (manual)
	Photo: 100- 11200 (Automatic)
	100-25600 (manual)
Shutter speed	8s - 1/8000 s
Maximum photo size	8000 × 6000
Video resolution	7264×4086@15fps, 3840x2160@30fpS/60fps, 1920x1080@30fps
Zoom	10X optical zoom, 160X hybrid zoom

Thermal camera (S220)

Sensor type	Uncooled vanadium oxide (VOX)
Sensor resolution	640 × 512
Pixel size	12μm
Focal length	9.1mm
Wavelength range	8μm - 14μm
Temperature measurement	±2℃ or ±2%, whichever is greater

accuracy

Temperature measurement range -20°C to 150°C < (high gain mode)
0°C to 550°C (low gain mode)

Zoom 32 times

Photo resolution 640 × 512

Video resolution 640 × 512@30fps

Gimbal

Stabilization system Three-axis mechanical gimbal (pitch, roll, pan)

Maximum control speed (pitch) $\geq 100^\circ / \text{s}$

Angle jitter $\leq 0.01^\circ$

Perception

Perception system type Six-way binocular vision system, supplemented by infrared sensor at the bottom of the fuselage

Front, back, left, right, top: the surface has rich texture and sufficient lighting conditions (> 15 lux, normal indoor fluorescent lighting environment)

Effective use environment Bottom: the surface is a diffuse reflective material with a reflectivity of > 20% (such as walls, trees, people, etc.), sufficient lighting conditions (> 15lux, normal indoor fluorescent lighting environment)

Image transmission

Maximum signal effective distance (unobstructed and interference-free) FCC: 15 km
SRRC: 8km
MIC/CE: 8km

Antenna Dual-transmitter and four-receiver (transmitter-receiver integrated antenna)

Image transmission frequency band Dual frequency: 2.400 GHz-2.4835 GHz; 5.5 GHz-5.875 GHz

Equivalent omnidirectional radiated power (EIRP) < 28dBm

Remote controller

Size 7.02 inches

Screen resolution 1920 × 1200

Screen brightness > 1000 nits

Touch control Multi-touch control

Battery capacity Built-in lithium battery: 7000mAh@7.2V;
External lithium battery (optional): 7000mAh@7.2V

Charging time Built-in battery: 0-90% power 1.5h, 0-100% power 2.0h;
External battery (optional): fast charging dual battery 0-100% power 3h;

External interface USB-A/Mini HDMI/Type-C/SIM card /SD card

Video Supports 4K/60fps H.264 and 4K/60fps H.265 video

Storage Memory: 4+64G, supports 128G external expansion

Satellite positioning GPS+BD

Size 262 × 139 × 103mm (antenna folded)

Weight	1050g (without external battery), 1300g (with external battery)
Operating temperature	-20 - 50°C

Intelligent flight battery

Capacity	8000 mAh
Battery type	LiPo 4S
Energy	115Wh
Charging environment temperature	5°C - 40°C

Long-endurance intelligent flight battery

Capacity	9400 mAh
Battery type	LiPo 4S
Energy	140Wh
Charging environment temperature	5°C - 40°C

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Specific Absorption Rate (SAR) information:

This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. FCC RF Exposure Information and Statement the SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: This

device has also been tested against this SAR limit.

This device was tested for typical body-worn operations with the back of the This device kept 0mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of This device. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.