

# 承 认 书

客户品名: 303030-00032  
**Product Name of Customer**

我方产品名 (材质) :  
**Product Mame ofOurs(Matenial)** G25\*2.3\*7.6uH 线长 32mm 无线充发射线圈

承 认:  
**APPROVED**


核准: 闫凯 制表: 胡月 日期: DATE2023/12/15

Hunan Rongfeng digital Energy Technology Co., LTD

# 变更记录

## REVISED RECORD

## 一、Plane structure: unit:MM

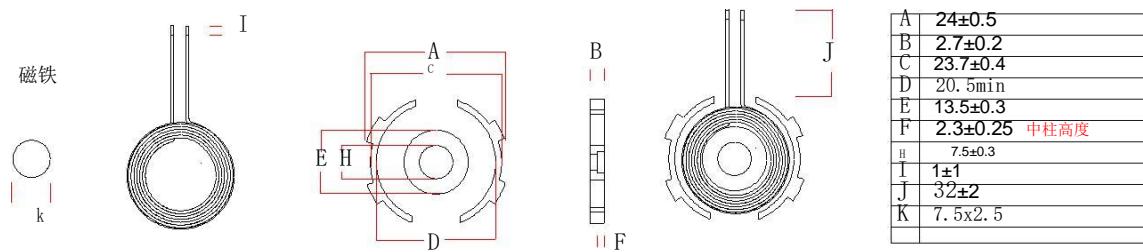

## 二、2. Product parameters:

Foot Position	wire diameter	Cycles	
S -- F	0.08*24p	12	

## 三、Surgical requirements:

1. Secure the cable end to prevent loose cables
2. According to customer requirements, the long thread is cut and tinned, and the tinning depth is 2-4MM
3. Point the appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the product surface is clean and tidy in the process
4. The soft magnetic sheet used is with round holes, without damage
5. Additional process (according to customer requirements) : Install 7.5x2.5mm magnet in the middle round hole of the finished product and in the finished product

Attach a 19mm diameter circular double-sided tape with ears on the back and pack it after

1. Inductance value, Q value:

PIN S — F = 7.6uH ±10%

DCR:150mΩ MAX

Q value ≥29