

FCC TEST REPORT

FCC ID: 2A9PK-P2000

Report Number..... : ZKT-221114L8448-01

Date of Test..... : Oct. 17, 2022 -- Nov. 25, 2022

Date of issue : Nov. 25, 2022

Total number of pages : 68

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : MR12VOLT DIGITAL LIMITED

Address : RM D FLAT 101, 1/F INT'L PLAZA 20 SHEUNG YUET RD
KOWLOON BAY KLN HONGKONG

Manufacturer's name : MR12VOLT DIGITAL LIMITED

Address : RM D FLAT 101, 1/F INT'L PLAZA 20 SHEUNG YUET RD
KOWLOON BAY KLN HONGKONG

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : KDB558074 D0115.247 Meas Guidance v 05r02

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Auto Video adapter kit

Trademark : N/A

Model/Type reference : 2G26M0, P2000

Ratings..... : DC12V 500mA from car-battery


Testing procedure and testing location:**Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.****Address..... : 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China****Tested by (name + signature)..... : Alen He****Reviewer (name + signature)..... : Joe Liu****Approved (name + signature)..... : Lake Xie**

Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	14
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS	16
5.RADIATED BAND EMISSIONMEASUREMENT	23
5.1 TEST REQUIREMENT:	23
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM TEST STANDARD	23
5.4 TEST SETUP	24
5.5 EUT OPERATING CONDITIONS	24
5.6 TEST RESULT	25
6.POWER SPECTRAL DENSITY TEST	27
6.1 APPLIED PROCEDURES / LIMIT	27
6.2 TEST PROCEDURE	27
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27

6.6 TEST RESULT	27
7. CHANNEL BANDWIDTH	28
7.1 APPLIED PROCEDURES / LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULT	28
8. OUTPUT POWER TEST	29
8.1 APPLIED PROCEDURES/LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULT	29
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	30
9.1 APPLICABLE STANDARD	30
9.2 TEST PROCEDURE	30
9.3 DEVIATION FROM STANDARD	30
9.4 TEST SETUP	30
9.5 EUT OPERATION CONDITIONS	30
9.6 TEST RESULTS	30
10. ANTENNA REQUIREMENT	31
11.1. -6DB BANDWIDTH	32
11.2. BANDEDGE	39
11.3. MAX. OUTPUT POWER	43
11.4. POWER SPECTRAL DENSITY	44
11.5. SPURIOUS EMISSION	50
12. TEST SETUP PHOTO	62
13. EUT CONSTRUCTIONAL DETAILS	63

1. VERSION

Report No.	Version	Description	Approved
ZKT-221114L8448-01	Rev.01	Initial issue of report	Nov. 25, 2022

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	N/A	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033


2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION**3.1 GENERAL DESCRIPTION OF EUT**

Product Name:	Auto Video adapter kit
Model No.:	P2000
Serial No.:	2G26M0
Model difference:	Their electrical circuit design, layout, components used and internal wiring are identical, Only the name will be different .
Hardware Version:	V1.6
Software Version:	N/A
Sample(s) Status:	Engineer sample
Frequency range:	802.11b/802.11g /802.11n(HT20): 2412MHz -2462MHz 802.11n(HT40): 2422MHz -2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: CCK/DSSS 802.11g/802.11n(H20)/802.11n(HT40): OFDM
Antenna Type:	PCB antenna
Antenna gain:	4.81dBi
Power supply:	DC12V 500mA from car-battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g /802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n(HT40)

Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz


3.2 DESCRIPTION OF TEST MODES

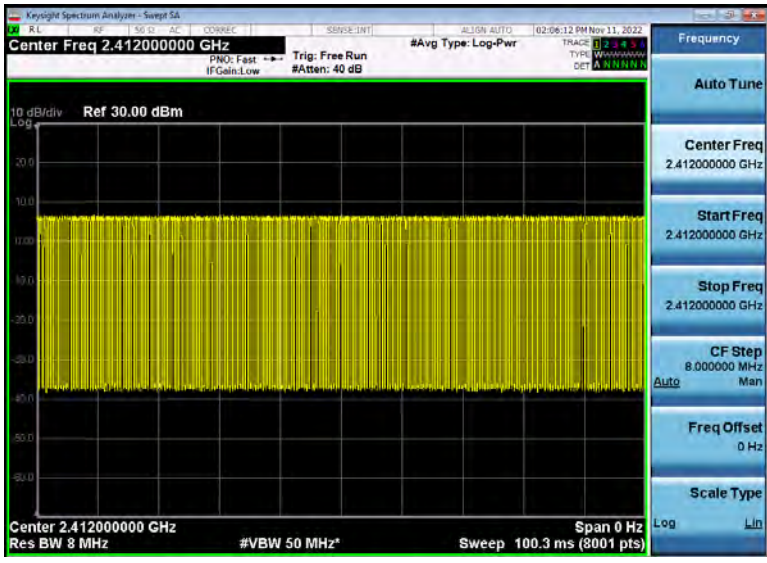Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle is 96.28%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. 	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n (HT20)	802.11n (HT40)
Data rate	11Mbps	54Mbps	MCS7	MCS7

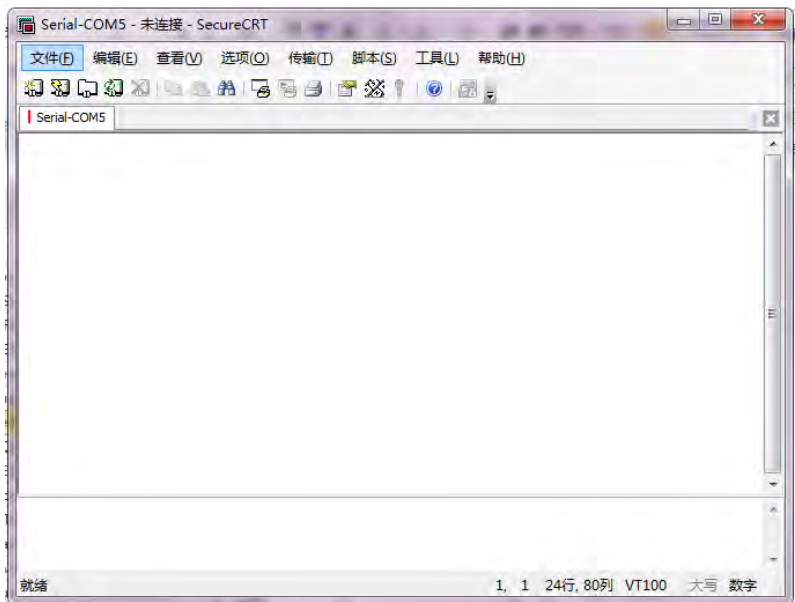Test Software	BT Test Tool
	
Power level setup	<10dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission
N/A

Radiated Emission

Car-battery — EUT

Conducted Spurious

Car-battery — EUT

3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1					
2					

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2022	Oct. 17, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2022	Oct. 16, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2022	Oct. 17, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2022	Oct. 16, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2022	Oct. 16, 2023
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2022	Oct. 16, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 17, 2022	Oct. 16, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2022	Oct. 17, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2022	Oct. 17, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2022	Oct. 17, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2022	Oct. 21, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2022	Oct. 16, 2023
15	MWRF Power Meter Test system	MW	MW100-RPC B	N/A	Oct. 22, 2022	Oct. 21, 2023
16	Power sensor	KEYSIGHT	U200H	MY51190005	Oct. 22, 2022	Oct. 21, 2023
17	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
18	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
19	RF Software	MW	MTS8310	V2.0.0.0	\	\
20	Turntable	MF	MF-7802BS	N/A	\	\
21	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2022	Oct. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2022	Oct. 21, 2023
3	Test Cable	N/A	C01	N/A	Oct. 18, 2022	Oct. 17, 2023
4	Test Cable	N/A	C02	N/A	Oct. 18, 2022	Oct. 17, 2023
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 17, 2022	Oct. 16, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:


(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

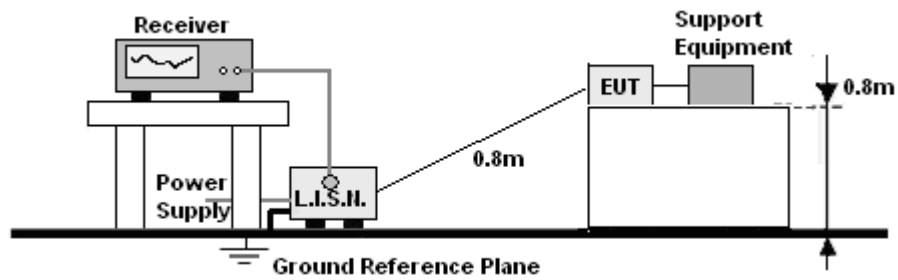

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

N/A
(Not applicable to this device, which is powered by car -battery)

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

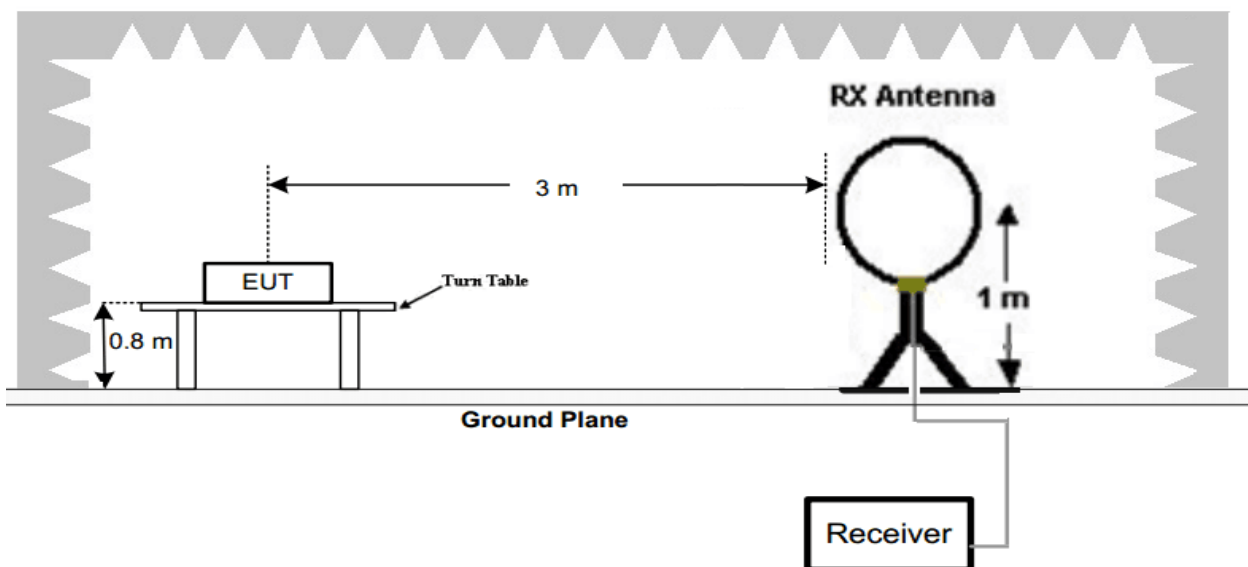

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

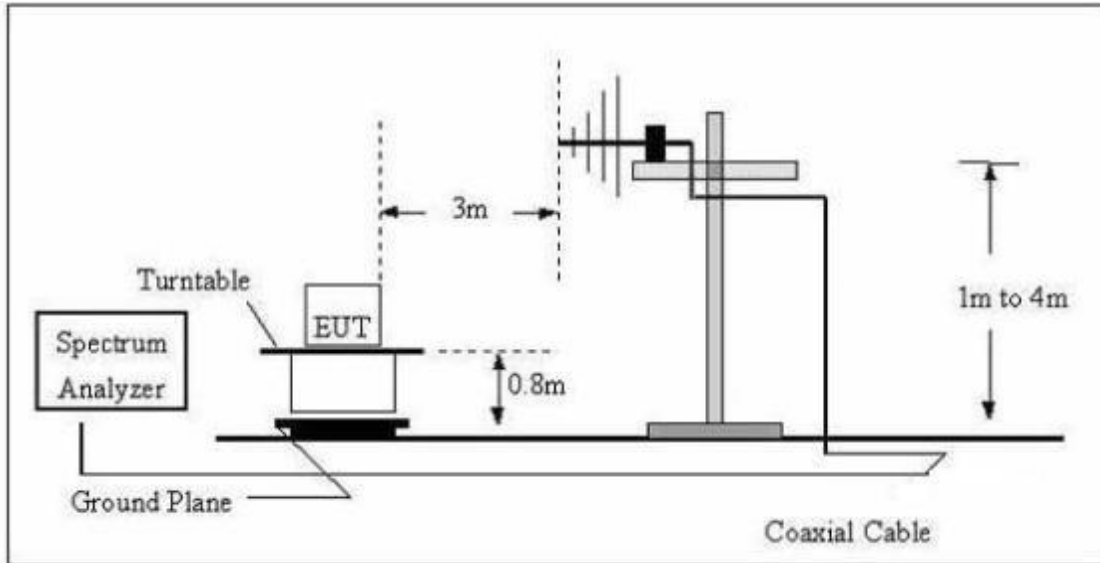

(C) Radiated Emission Test-Up Frequency Above 1GHz

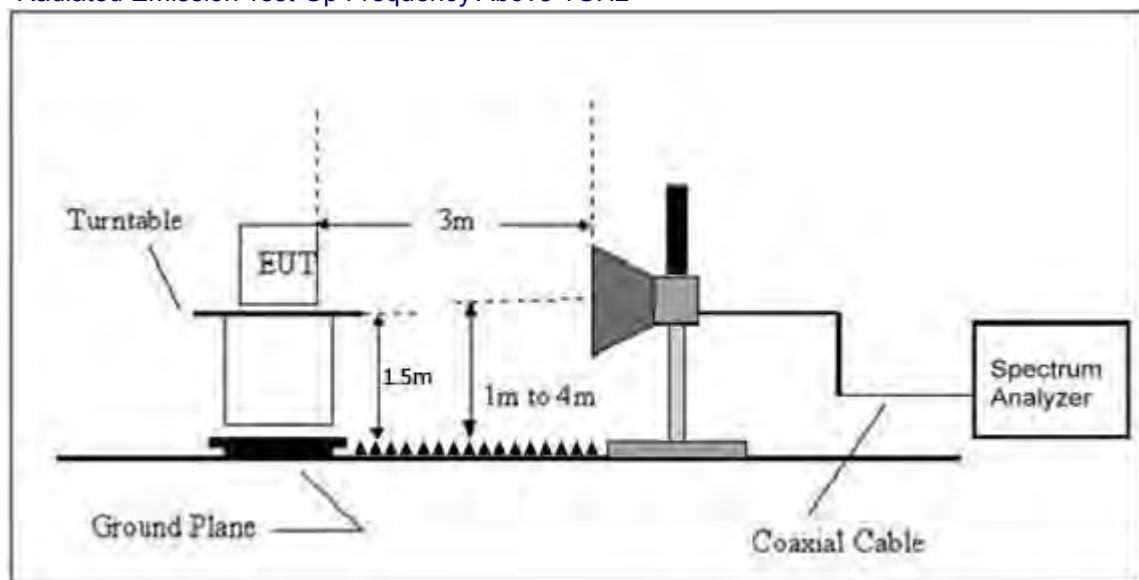

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC12V	Test Mode:	802.11g 2412.00

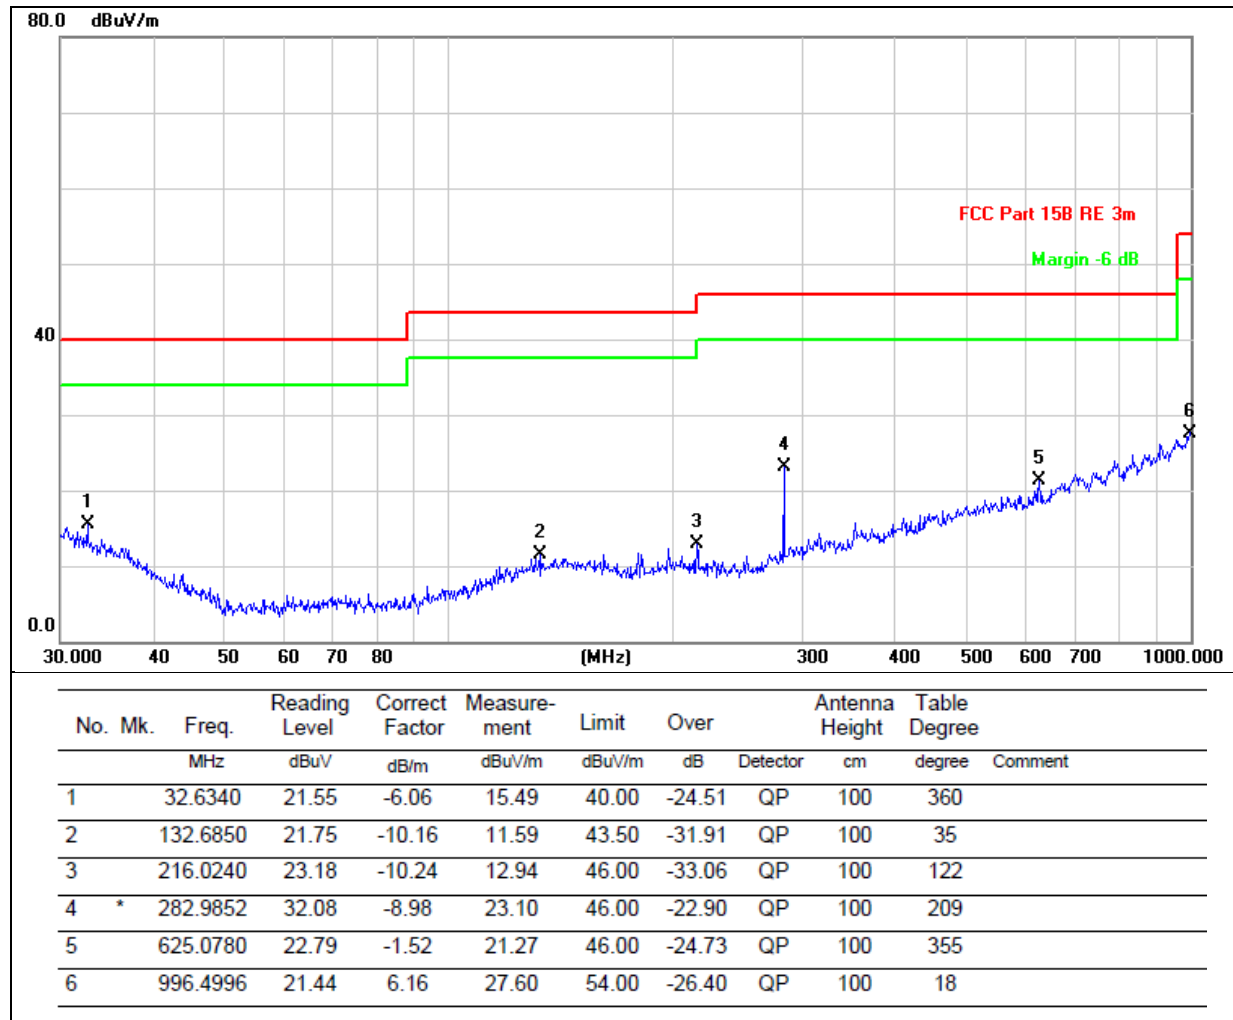

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC12V	Test Mode:	802.11g 2412.00

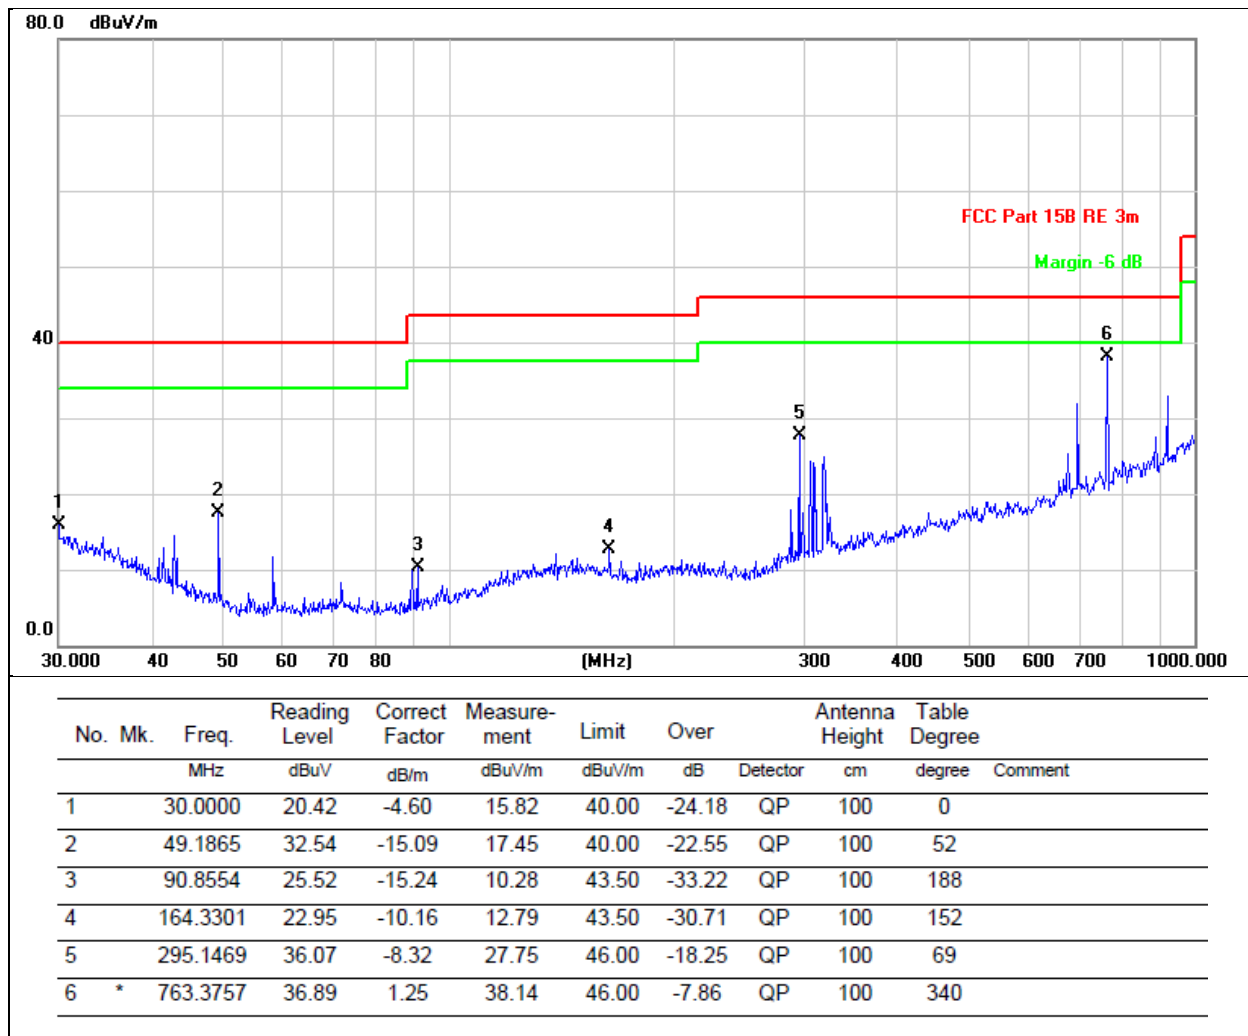

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	46.91	30.55	5.77	24.66	46.79	74.00	-27.21	PK
V	4824	38.09	30.55	5.77	24.66	37.97	54.00	-16.03	AV
V	7236	45.79	30.33	6.32	24.55	46.33	74.00	-27.67	PK
V	7236	35.20	30.33	6.32	24.55	35.74	54.00	-18.26	AV
V	9648	46.99	30.85	7.45	24.69	48.28	74.00	-25.72	PK
V	9648	35.10	30.85	7.45	24.69	36.39	54.00	-17.61	AV
H	4824	46.91	30.55	5.77	24.66	46.79	74.00	-27.21	PK
H	4824	38.03	30.55	5.77	24.66	37.91	54.00	-16.09	AV
H	7236	46.77	30.33	6.32	24.55	47.31	74.00	-26.69	PK
H	7236	35.26	30.33	6.32	24.55	35.80	54.00	-18.20	AV
H	9648	47.03	30.85	7.45	24.69	48.32	74.00	-25.68	PK
H	9648	32.39	30.85	7.45	24.69	33.68	54.00	-20.32	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	48.23	30.55	5.77	24.66	48.11	74.00	-25.89	PK
V	4874	36.69	30.55	5.77	24.66	36.57	54.00	-17.43	AV
V	7311	47.42	30.33	6.32	24.55	47.96	74.00	-26.04	PK
V	7311	34.11	30.33	6.32	24.55	34.65	54.00	-19.35	AV
V	9748	46.30	30.85	7.45	24.69	47.59	74.00	-26.41	PK
V	9748	32.30	30.85	7.45	24.69	33.59	54.00	-20.41	AV
H	4874	46.06	30.55	5.77	24.66	45.94	74.00	-28.06	PK
H	4874	35.73	30.55	5.77	24.66	35.61	54.00	-18.39	AV
H	7311	47.14	30.33	6.32	24.55	47.68	74.00	-26.32	PK
H	7311	35.26	30.33	6.32	24.55	35.80	54.00	-18.20	AV
H	9748	44.78	30.85	7.45	24.69	46.07	74.00	-27.93	PK
H	9748	32.79	30.85	7.45	24.69	34.08	54.00	-19.92	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	46.34	30.55	5.77	24.66	46.22	74.00	-27.78	PK
V	4924	35.78	30.55	5.77	24.66	35.66	54.00	-18.34	AV
V	7386	45.90	30.33	6.32	24.55	46.44	74.00	-27.56	PK
V	7386	33.31	30.33	6.32	24.55	33.85	54.00	-20.15	AV
V	9848	47.06	30.85	7.45	24.69	48.35	74.00	-25.65	PK
V	9848	33.00	30.85	7.45	24.69	34.29	54.00	-19.71	AV
H	4924	46.97	30.55	5.77	24.66	46.85	74.00	-27.15	PK
H	4924	36.54	30.55	5.77	24.66	36.42	54.00	-17.58	AV
H	7386	47.25	30.33	6.32	24.55	47.79	74.00	-26.21	PK
H	7386	35.41	30.33	6.32	24.55	35.95	54.00	-18.05	AV
H	9848	46.30	30.85	7.45	24.69	47.59	74.00	-26.41	PK
H	9848	32.90	30.85	7.45	24.69	34.19	54.00	-19.81	AV

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	

Low Channel:2412MHz									
V	4824	45.85	30.55	5.77	24.66	45.73	74.00	-28.27	PK
V	4824	36.78	30.55	5.77	24.66	36.66	54.00	-17.34	AV
V	7236	47.47	30.33	6.32	24.55	48.01	74.00	-25.99	PK
V	7236	34.94	30.33	6.32	24.55	35.48	54.00	-18.52	AV
V	9648	45.12	30.85	7.45	24.69	46.41	74.00	-27.59	PK
V	9648	34.94	30.85	7.45	24.69	36.23	54.00	-17.77	AV
H	4824	45.86	30.55	5.77	24.66	45.74	74.00	-28.26	PK
H	4824	36.22	30.55	5.77	24.66	36.10	54.00	-17.90	AV
H	7236	46.43	30.33	6.32	24.55	46.97	74.00	-27.03	PK
H	7236	34.34	30.33	6.32	24.55	34.88	54.00	-19.12	AV
H	9648	45.00	30.85	7.45	24.69	46.29	74.00	-27.71	PK
H	9648	33.41	30.85	7.45	24.69	34.70	54.00	-19.30	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	48.53	30.55	5.77	24.66	48.41	74.00	-25.59	PK
V	4874	36.96	30.55	5.77	24.66	36.84	54.00	-17.16	AV
V	7311	46.89	30.33	6.32	24.55	47.43	74.00	-26.57	PK
V	7311	35.36	30.33	6.32	24.55	35.90	54.00	-18.10	AV
V	9748	46.17	30.85	7.45	24.69	47.46	74.00	-26.54	PK
V	9748	35.04	30.85	7.45	24.69	36.33	54.00	-17.67	AV
H	4874	46.75	30.55	5.77	24.66	46.63	74.00	-27.37	PK
H	4874	37.95	30.55	5.77	24.66	37.83	54.00	-16.17	AV
H	7311	46.50	30.33	6.32	24.55	47.04	74.00	-26.96	PK
H	7311	33.72	30.33	6.32	24.55	34.26	54.00	-19.74	AV
H	9748	46.69	30.85	7.45	24.69	47.98	74.00	-26.02	PK
H	9748	34.16	30.85	7.45	24.69	35.45	54.00	-18.55	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	46.97	30.55	5.77	24.66	46.85	74.00	-27.15	PK
V	4924	37.49	30.55	5.77	24.66	37.37	54.00	-16.63	AV
V	7386	47.42	30.33	6.32	24.55	47.96	74.00	-26.04	PK
V	7386	35.51	30.33	6.32	24.55	36.05	54.00	-17.95	AV
V	9848	45.15	30.85	7.45	24.69	46.44	74.00	-27.56	PK
V	9848	32.72	30.85	7.45	24.69	34.01	54.00	-19.99	AV
H	4924	46.32	30.55	5.77	24.66	46.20	74.00	-27.80	PK
H	4924	36.26	30.55	5.77	24.66	36.14	54.00	-17.86	AV
H	7386	47.17	30.33	6.32	24.55	47.71	74.00	-26.29	PK
H	7386	33.57	30.33	6.32	24.55	34.11	54.00	-19.89	AV
H	9848	45.26	30.85	7.45	24.69	46.55	74.00	-27.45	PK
H	9848	33.01	30.85	7.45	24.69	34.30	54.00	-19.70	AV

802.11n20

002: F1120									
Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	47.55	30.55	5.77	24.66	47.43	74.00	-26.57	PK
V	4824	37.99	30.55	5.77	24.66	37.87	54.00	-16.13	AV
V	7236	47.41	30.33	6.32	24.55	47.95	74.00	-26.05	PK

V	7236	34.90	30.33	6.32	24.55	35.44	54.00	-18.56	AV
V	9648	45.45	30.85	7.45	24.69	46.74	74.00	-27.26	PK
V	9648	33.88	30.85	7.45	24.69	35.17	54.00	-18.83	AV
H	4824	48.63	30.55	5.77	24.66	48.51	74.00	-25.49	PK
H	4824	35.95	30.55	5.77	24.66	35.83	54.00	-18.17	AV
H	7236	47.57	30.33	6.32	24.55	48.11	74.00	-25.89	PK
H	7236	34.88	30.33	6.32	24.55	35.42	54.00	-18.58	AV
H	9648	46.97	30.85	7.45	24.69	48.26	74.00	-25.74	PK
H	9648	34.61	30.85	7.45	24.69	35.90	54.00	-18.10	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	46.21	30.55	5.77	24.66	46.09	74.00	-27.91	PK
V	4874	35.55	30.55	5.77	24.66	35.43	54.00	-18.57	AV
V	7311	47.07	30.33	6.32	24.55	47.61	74.00	-26.39	PK
V	7311	33.50	30.33	6.32	24.55	34.04	54.00	-19.96	AV
V	9748	45.23	30.85	7.45	24.69	46.52	74.00	-27.48	PK
V	9748	33.74	30.85	7.45	24.69	35.03	54.00	-18.97	AV
H	4874	48.57	30.55	5.77	24.66	48.45	74.00	-25.55	PK
H	4874	37.45	30.55	5.77	24.66	37.33	54.00	-16.67	AV
H	7311	47.35	30.33	6.32	24.55	47.89	74.00	-26.11	PK
H	7311	35.05	30.33	6.32	24.55	35.59	54.00	-18.41	AV
H	9748	45.50	30.85	7.45	24.69	46.79	74.00	-27.21	PK
H	9748	32.37	30.85	7.45	24.69	33.66	54.00	-20.34	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924	48.48	30.55	5.77	24.66	48.36	74.00	-25.64	PK
V	4924	35.91	30.55	5.77	24.66	35.79	54.00	-18.21	AV
V	7386	47.30	30.33	6.32	24.55	47.84	74.00	-26.16	PK
V	7386	33.31	30.33	6.32	24.55	33.85	54.00	-20.15	AV
V	9848	47.20	30.85	7.45	24.69	48.49	74.00	-25.51	PK
V	9848	32.79	30.85	7.45	24.69	34.08	54.00	-19.92	AV
H	4924	46.13	30.55	5.77	24.66	46.01	74.00	-27.99	PK
H	4924	36.28	30.55	5.77	24.66	36.16	54.00	-17.84	AV
H	7386	46.41	30.33	6.32	24.55	46.95	74.00	-27.05	PK
H	7386	34.42	30.33	6.32	24.55	34.96	54.00	-19.04	AV
H	9848	45.11	30.85	7.45	24.69	46.40	74.00	-27.60	PK
H	9848	33.95	30.85	7.45	24.69	35.24	54.00	-18.76	AV

802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844	46.00	30.55	5.77	24.66	45.88	74.00	-28.12	PK
V	4844	37.35	30.55	5.77	24.66	37.23	54.00	-16.77	AV
V	7266	45.92	30.33	6.32	24.55	46.46	74.00	-27.54	PK
V	7266	33.20	30.33	6.32	24.55	33.74	54.00	-20.26	AV
V	9688	46.83	30.85	7.45	24.69	48.12	74.00	-25.88	PK
V	9688	33.38	30.85	7.45	24.69	34.67	54.00	-19.33	AV
H	4844	45.97	30.55	5.77	24.66	45.85	74.00	-28.15	PK
H	4844	37.81	30.55	5.77	24.66	37.69	54.00	-16.31	AV

H	7266	46.78	30.33	6.32	24.55	47.32	74.00	-26.68	PK
H	7266	34.78	30.33	6.32	24.55	35.32	54.00	-18.68	AV
H	9688	46.65	30.85	7.45	24.69	47.94	74.00	-26.06	PK
H	9688	32.99	30.85	7.45	24.69	34.28	54.00	-19.72	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	46.23	30.55	5.77	24.66	46.11	74.00	-27.89	PK
V	4874	37.88	30.55	5.77	24.66	37.76	54.00	-16.24	AV
V	7311	46.67	30.33	6.32	24.55	47.21	74.00	-26.79	PK
V	7311	35.35	30.33	6.32	24.55	35.89	54.00	-18.11	AV
V	9748	44.90	30.85	7.45	24.69	46.19	74.00	-27.81	PK
V	9748	33.62	30.85	7.45	24.69	34.91	54.00	-19.09	AV
H	4874	48.10	30.55	5.77	24.66	47.98	74.00	-26.02	PK
H	4874	37.94	30.55	5.77	24.66	37.82	54.00	-16.18	AV
H	7311	46.14	30.33	6.32	24.55	46.68	74.00	-27.32	PK
H	7311	34.96	30.33	6.32	24.55	35.50	54.00	-18.50	AV
H	9748	46.64	30.85	7.45	24.69	47.93	74.00	-26.07	PK
H	9748	32.93	30.85	7.45	24.69	34.22	54.00	-19.78	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2452MHz									
V	4904	48.60	30.55	5.77	24.66	48.48	74.00	-25.52	PK
V	4904	35.61	30.55	5.77	24.66	35.49	54.00	-18.51	AV
V	7356	47.35	30.33	6.32	24.55	47.89	74.00	-26.11	PK
V	7356	34.47	30.33	6.32	24.55	35.01	54.00	-18.99	AV
V	9808	46.37	30.85	7.45	24.69	47.66	74.00	-26.34	PK
V	9808	35.13	30.85	7.45	24.69	36.42	54.00	-17.58	AV
H	4904	48.25	30.55	5.77	24.66	48.13	74.00	-25.87	PK
H	4904	36.70	30.55	5.77	24.66	36.58	54.00	-17.42	AV
H	7356	46.70	30.33	6.32	24.55	47.24	74.00	-26.76	PK
H	7356	34.66	30.33	6.32	24.55	35.20	54.00	-18.80	AV
H	9808	47.72	30.85	7.45	24.69	49.01	74.00	-24.99	PK
H	9808	33.44	30.85	7.45	24.69	34.73	54.00	-19.27	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT**5.1 TEST REQUIREMENT:**

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

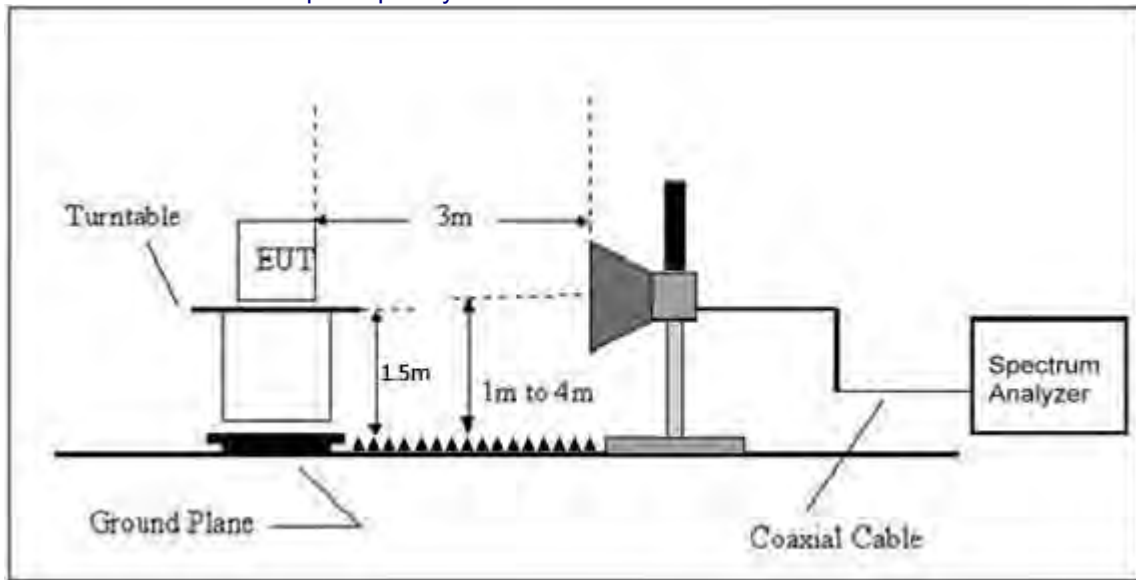

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

ANT1-802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	51.39	30.22	4.85	23.98	50.00	74.00	-24.00	PK	PASS
H	2390.00	39.30	30.22	4.85	23.98	37.91	54.00	-16.09	AV	PASS
H	2400.00	53.72	30.22	4.85	23.98	52.33	74.00	-21.67	PK	PASS
H	2400.00	38.53	30.22	4.85	23.98	37.14	54.00	-16.86	AV	PASS
V	2390.00	50.83	30.22	4.85	23.98	49.44	74.00	-24.56	PK	PASS
V	2390.00	39.77	30.22	4.85	23.98	38.38	54.00	-15.62	AV	PASS
V	2400.00	54.13	30.22	4.85	23.98	52.74	74.00	-21.26	PK	PASS
V	2400.00	37.10	30.22	4.85	23.98	35.71	54.00	-18.29	AV	PASS
High Channel 2462MHz										
H	2483.50	51.92	30.22	4.85	23.98	50.53	74.00	-23.47	PK	PASS
H	2483.50	39.75	30.22	4.85	23.98	38.36	54.00	-15.64	AV	PASS
H	2500.00	52.11	30.22	4.85	23.98	50.72	74.00	-23.28	PK	PASS
H	2500.00	38.59	30.22	4.85	23.98	37.20	54.00	-16.80	AV	PASS
V	2483.50	53.71	30.22	4.85	23.98	52.32	74.00	-21.68	PK	PASS
V	2483.50	37.62	30.22	4.85	23.98	36.23	54.00	-17.77	AV	PASS
V	2500.00	53.94	30.22	4.85	23.98	52.55	74.00	-21.45	PK	PASS
V	2500.00	37.70	30.22	4.85	23.98	36.31	54.00	-17.69	AV	PASS

ANT1-802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	52.33	30.22	4.85	23.98	50.94	74.00	-23.06	PK	PASS
H	2390.00	40.18	30.22	4.85	23.98	38.79	54.00	-15.21	AV	PASS
H	2400.00	52.00	30.22	4.85	23.98	50.61	74.00	-23.39	PK	PASS
H	2400.00	36.46	30.22	4.85	23.98	35.07	54.00	-18.93	AV	PASS
V	2390.00	53.49	30.22	4.85	23.98	52.10	74.00	-21.90	PK	PASS
V	2390.00	40.04	30.22	4.85	23.98	38.65	54.00	-15.35	AV	PASS
V	2400.00	53.53	30.22	4.85	23.98	52.14	74.00	-21.86	PK	PASS
V	2400.00	36.60	30.22	4.85	23.98	35.21	54.00	-18.79	AV	PASS
High Channel 2462MHz										
H	2483.50	51.05	30.22	4.85	23.98	49.66	74.00	-24.34	PK	PASS
H	2483.50	37.94	30.22	4.85	23.98	36.55	54.00	-17.45	AV	PASS
H	2500.00	54.15	30.22	4.85	23.98	52.76	74.00	-21.24	PK	PASS
H	2500.00	36.26	30.22	4.85	23.98	34.87	54.00	-19.13	AV	PASS
V	2483.50	53.05	30.22	4.85	23.98	51.66	74.00	-22.34	PK	PASS
V	2483.50	39.53	30.22	4.85	23.98	38.14	54.00	-15.86	AV	PASS
V	2500.00	53.03	30.22	4.85	23.98	51.64	74.00	-22.36	PK	PASS
V	2500.00	37.56	30.22	4.85	23.98	36.17	54.00	-17.83	AV	PASS

ANT1-802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	52.84	30.22	4.85	23.98	51.45	74.00	-22.55	PK	PASS
H	2390.00	38.90	30.22	4.85	23.98	37.51	54.00	-16.49	AV	PASS
H	2400.00	53.32	30.22	4.85	23.98	51.93	74.00	-22.07	PK	PASS
H	2400.00	38.84	30.22	4.85	23.98	37.45	54.00	-16.55	AV	PASS
V	2390.00	53.01	30.22	4.85	23.98	51.62	74.00	-22.38	PK	PASS
V	2390.00	39.46	30.22	4.85	23.98	38.07	54.00	-15.93	AV	PASS

V	2400.00	53.56	30.22	4.85	23.98	52.17	74.00	-21.83	PK	PASS
V	2400.00	38.32	30.22	4.85	23.98	36.93	54.00	-17.07	AV	PASS
High Channel 2462MHz										
H	2483.50	53.72	30.22	4.85	23.98	52.33	74.00	-21.67	PK	PASS
H	2483.50	38.70	30.22	4.85	23.98	37.31	54.00	-16.69	AV	PASS
H	2500.00	52.24	30.22	4.85	23.98	50.85	74.00	-23.15	PK	PASS
H	2500.00	36.67	30.22	4.85	23.98	35.28	54.00	-18.72	AV	PASS
V	2483.50	52.20	30.22	4.85	23.98	50.81	74.00	-23.19	PK	PASS
V	2483.50	39.87	30.22	4.85	23.98	38.48	54.00	-15.52	AV	PASS
V	2500.00	52.22	30.22	4.85	23.98	50.83	74.00	-23.17	PK	PASS
V	2500.00	37.51	30.22	4.85	23.98	36.12	54.00	-17.88	AV	PASS

ANT1-802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detect or Type	Result
Low Channel 2422MHz										
H	2390.00	52.97	30.22	4.85	23.98	51.58	74.00	-22.42	PK	PASS
H	2390.00	38.87	30.22	4.85	23.98	37.48	54.00	-16.52	AV	PASS
H	2400.00	52.16	30.22	4.85	23.98	50.77	74.00	-23.23	PK	PASS
H	2400.00	36.42	30.22	4.85	23.98	35.03	54.00	-18.97	AV	PASS
V	2390.00	51.01	30.22	4.85	23.98	49.62	74.00	-24.38	PK	PASS
V	2390.00	37.70	30.22	4.85	23.98	36.31	54.00	-17.69	AV	PASS
V	2400.00	52.28	30.22	4.85	23.98	50.89	74.00	-23.11	PK	PASS
V	2400.00	38.01	30.22	4.85	23.98	36.62	54.00	-17.38	AV	PASS
High Channel 2452MHz										
H	2483.50	52.51	30.22	4.85	23.98	51.12	74.00	-22.88	PK	PASS
H	2483.50	38.82	30.22	4.85	23.98	37.43	54.00	-16.57	AV	PASS
H	2500.00	54.00	30.22	4.85	23.98	52.61	74.00	-21.39	PK	PASS
H	2500.00	38.19	30.22	4.85	23.98	36.80	54.00	-17.20	AV	PASS
V	2483.50	52.33	30.22	4.85	23.98	50.94	74.00	-23.06	PK	PASS
V	2483.50	37.92	30.22	4.85	23.98	36.53	54.00	-17.47	AV	PASS
V	2500.00	54.33	30.22	4.85	23.98	52.94	74.00	-21.06	PK	PASS
V	2500.00	38.73	30.22	4.85	23.98	37.34	54.00	-16.66	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

8. OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS


10. ANTENNA REQUIREMENT

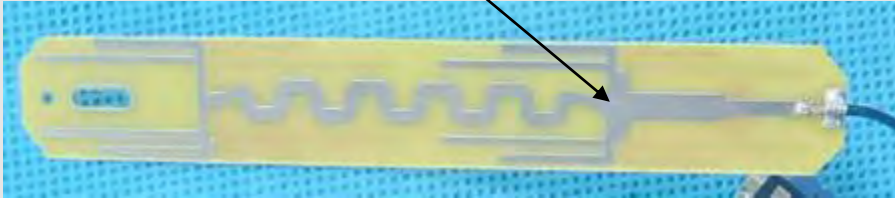Standard requirement:	FCC Part15 C Section 15.203 /247(c)
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Refer to statement below for compliance. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed. Antenna Connected Construction The antenna is PCB antenna, the best case gain of the 4.81dBi; reference to the below photo for details ANT for 2.4G WIFI	
	



11. Appendix1

11.1. -6DB BANDWIDTH


Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	10.68	500	Pass
NVNT	ANT1	802.11b	2437.00	10.56	500	Pass
NVNT	ANT1	802.11b	2462.00	10.79	500	Pass
NVNT	ANT1	802.11g	2412.00	16.37	500	Pass
NVNT	ANT1	802.11g	2437.00	16.33	500	Pass
NVNT	ANT1	802.11g	2462.00	16.31	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	16.60	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.54	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	16.04	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	35.53	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	35.19	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	35.23	500	Pass

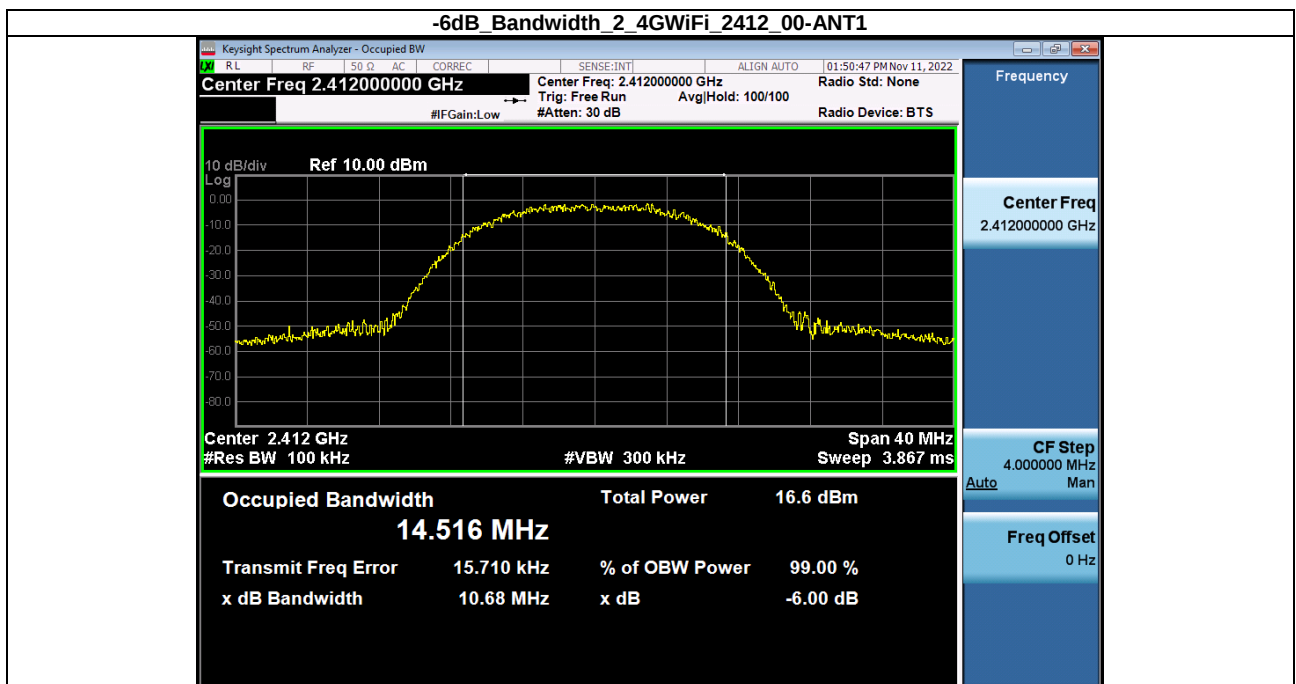



-6dB_Bandwidth_2_4GWiFi_2437_00-ANT1

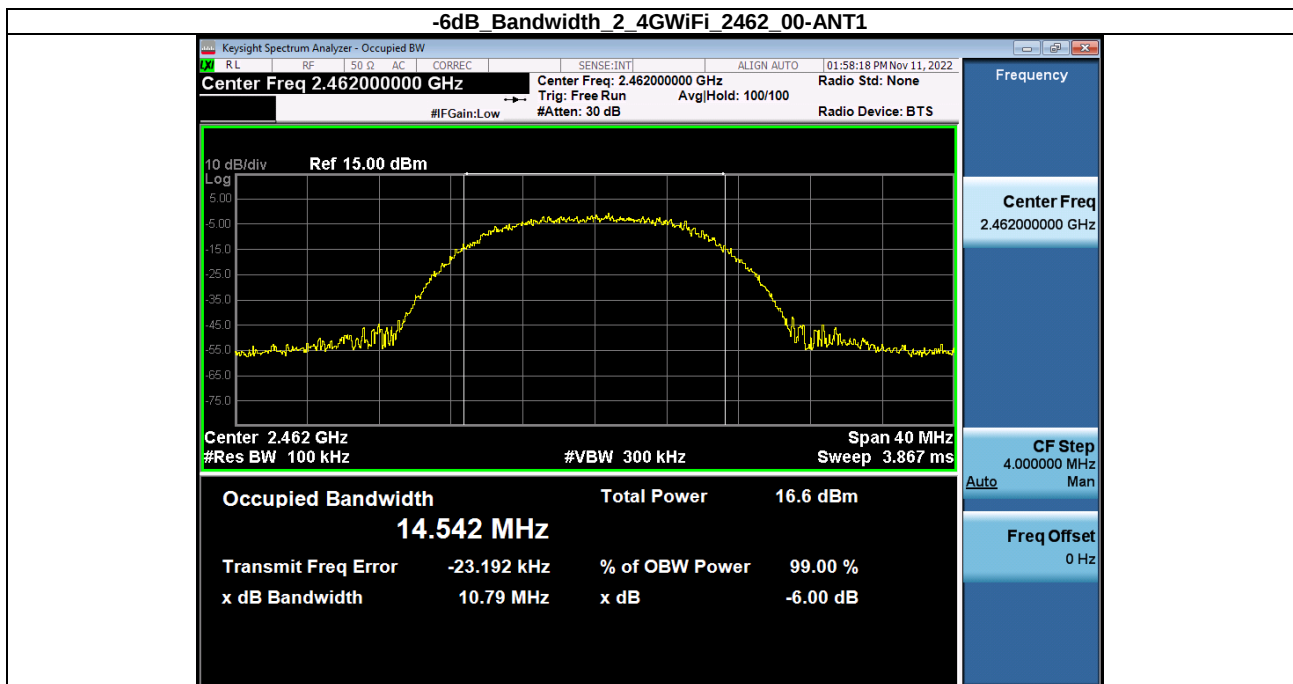
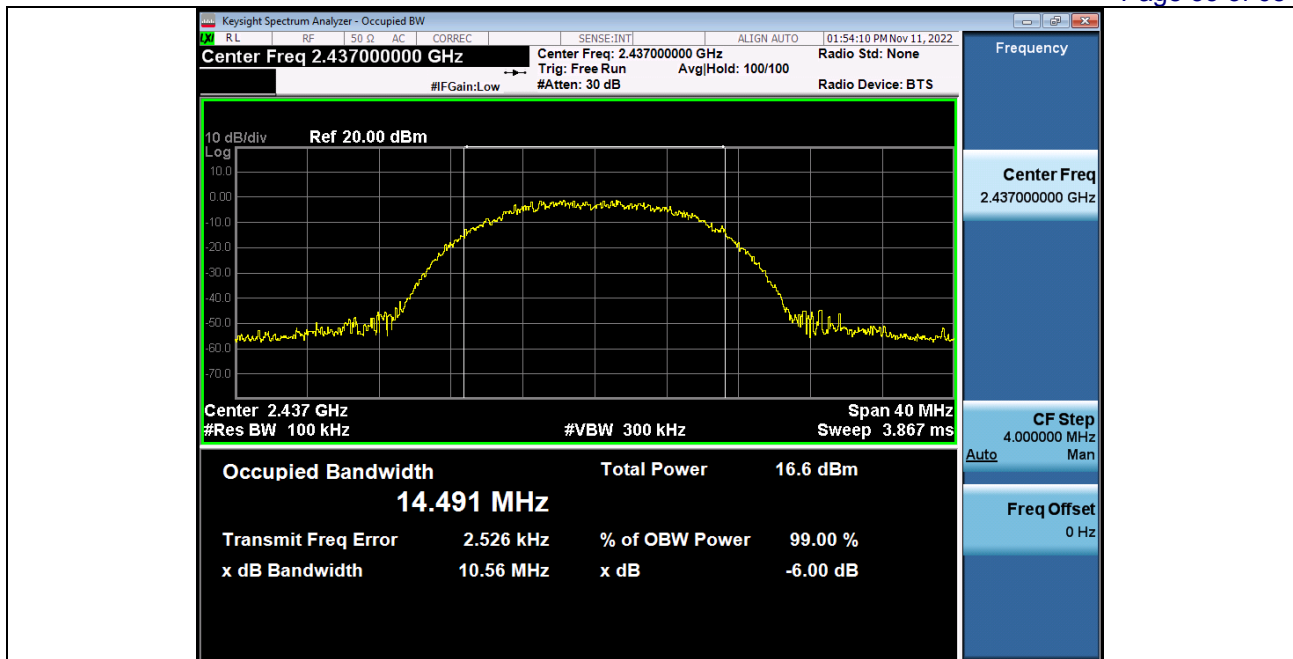




-6dB_Bandwidth_2_4GWiFi_2412_00-ANT1

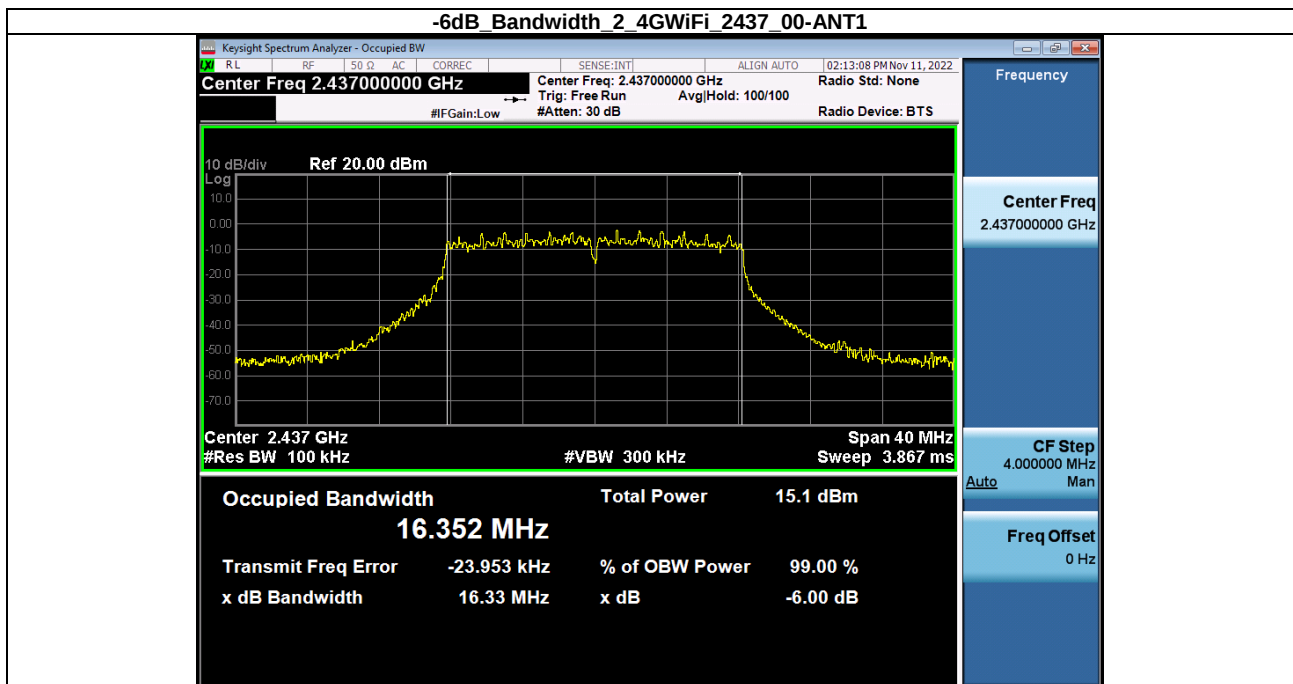


-6dB_Bandwidth_2_4GWiFi_2462_00-ANT1

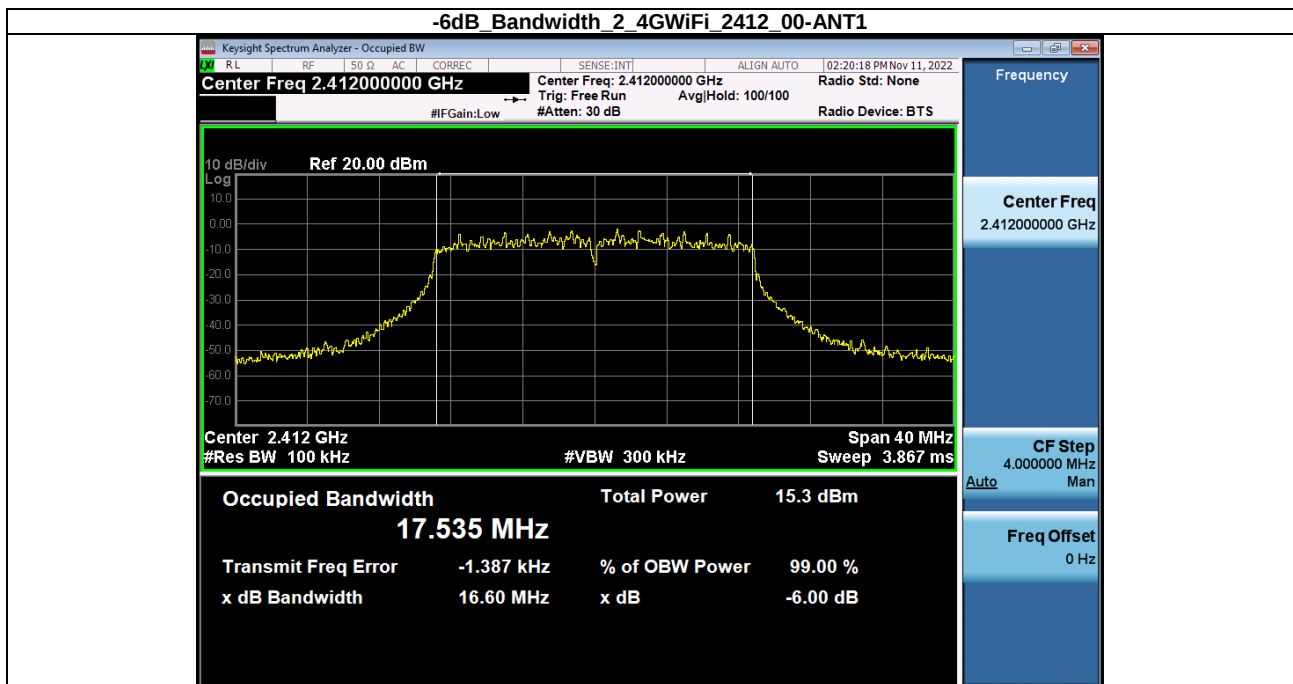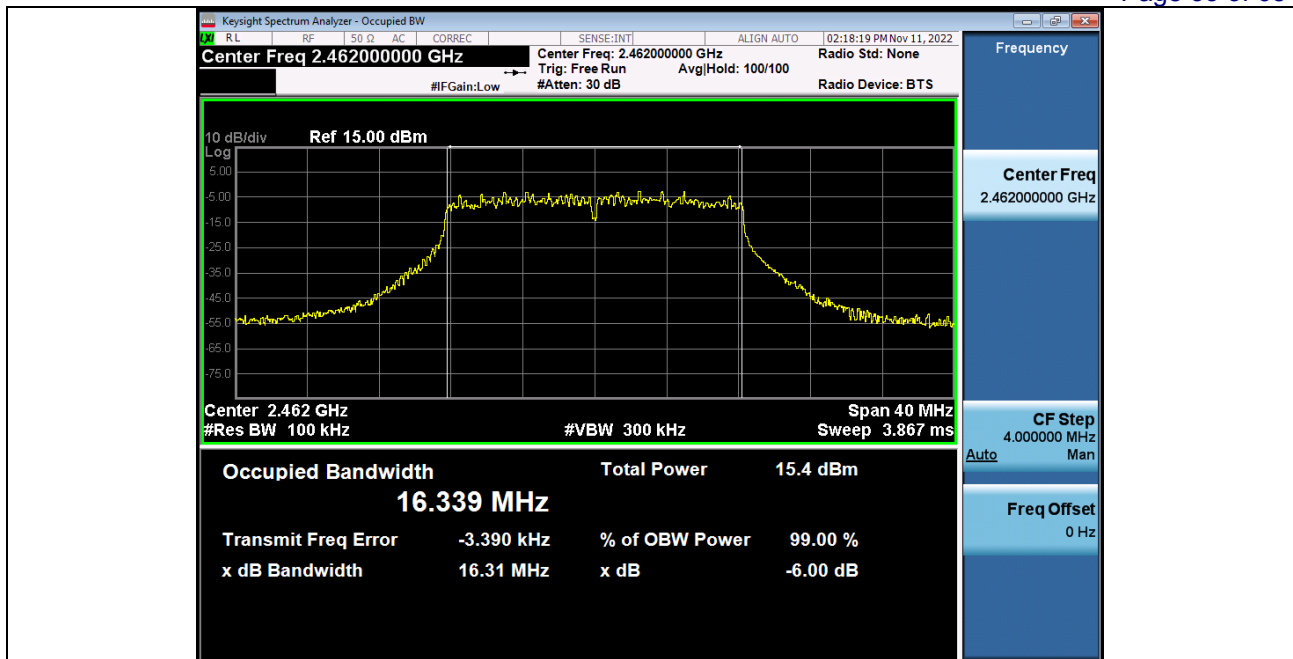

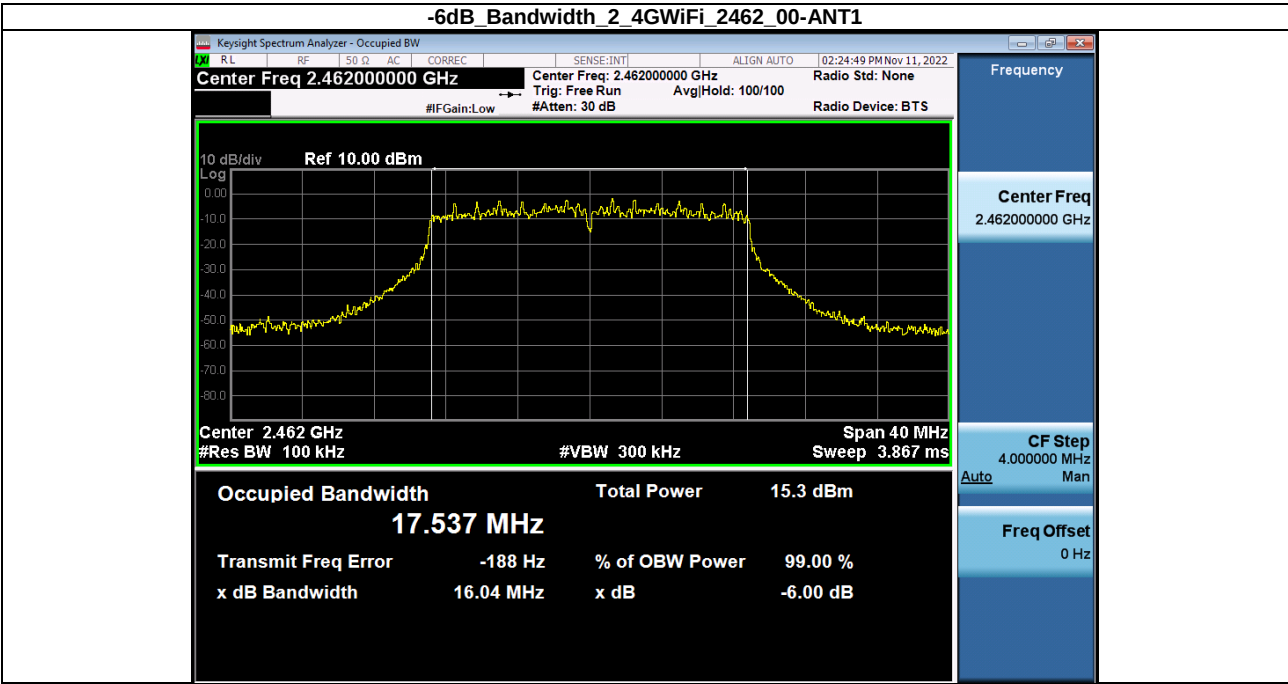
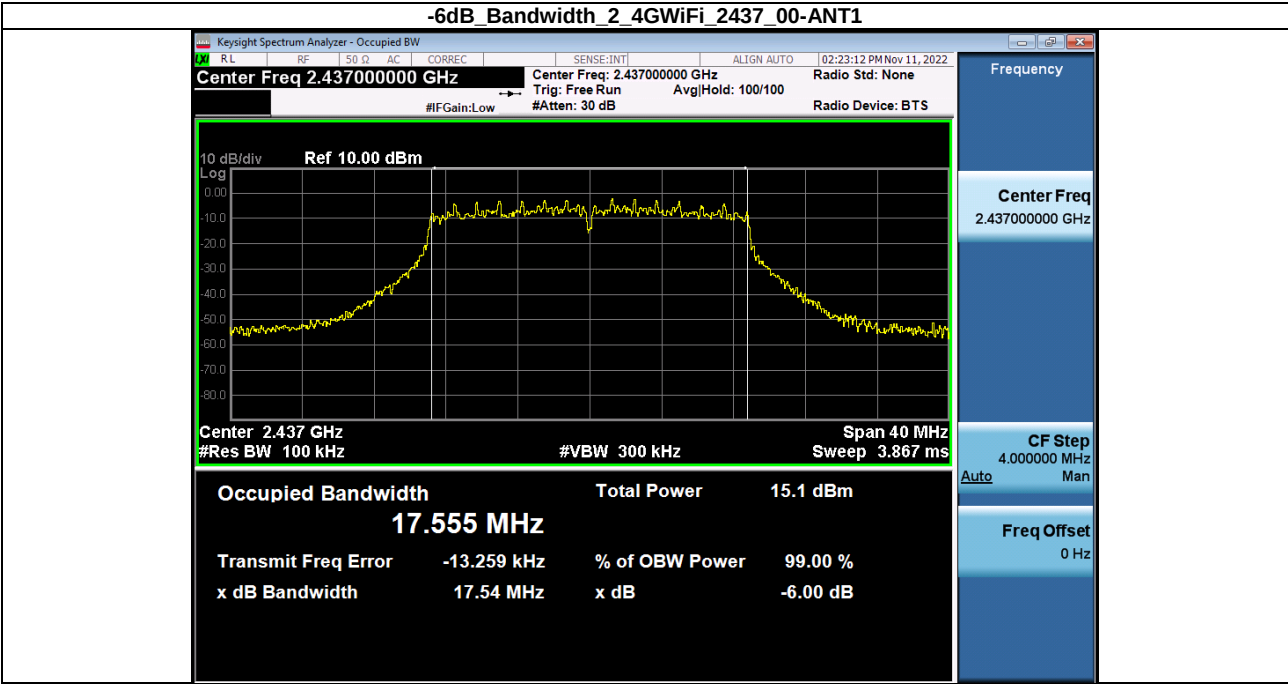


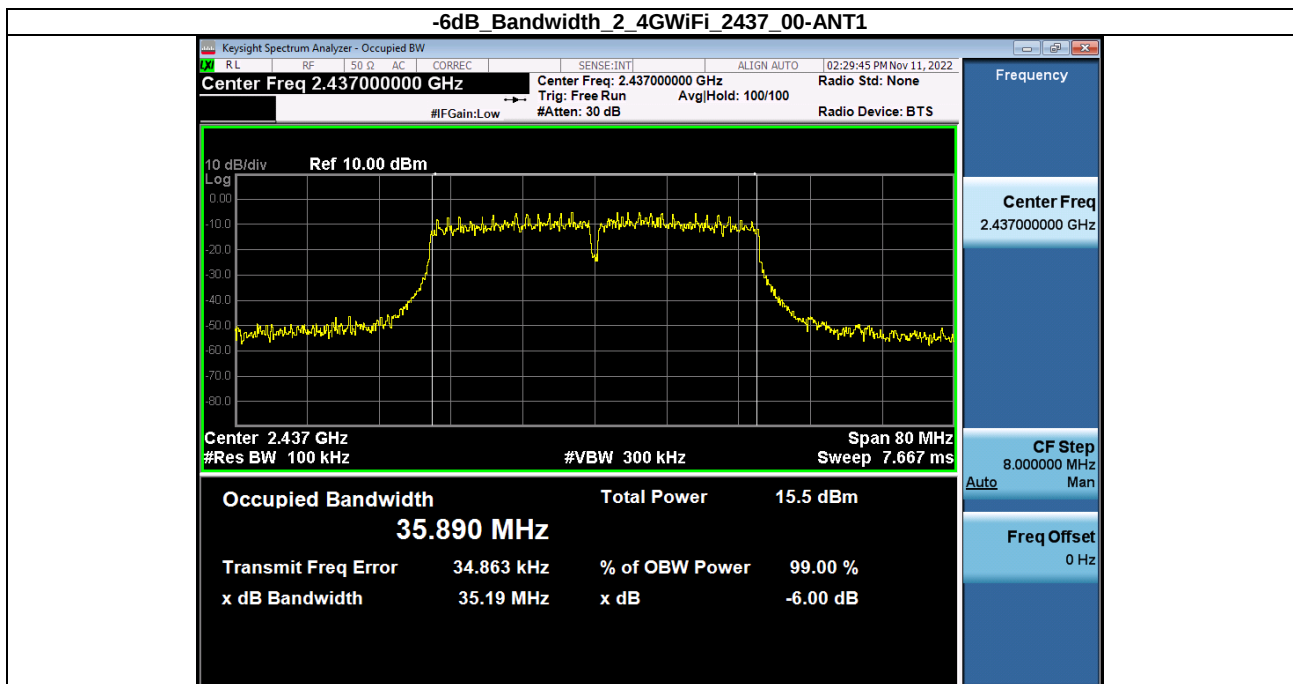
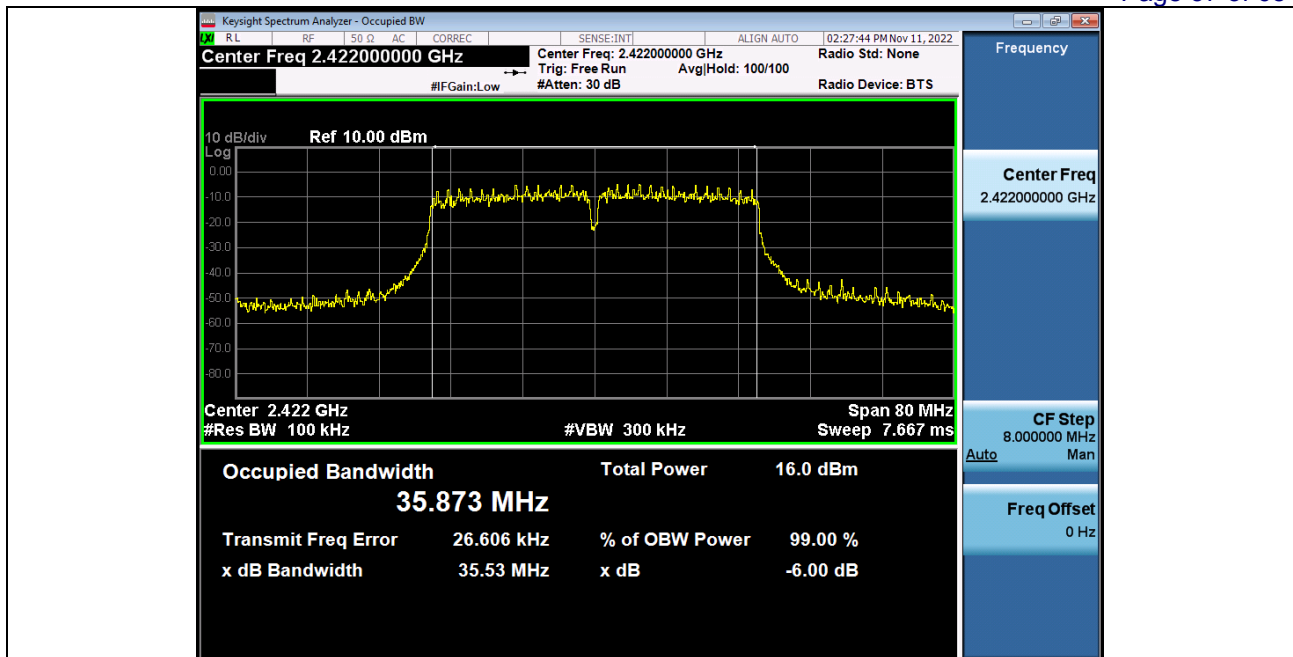


-6dB_Bandwidth_2_4GWiFi_2452_00-ANT1


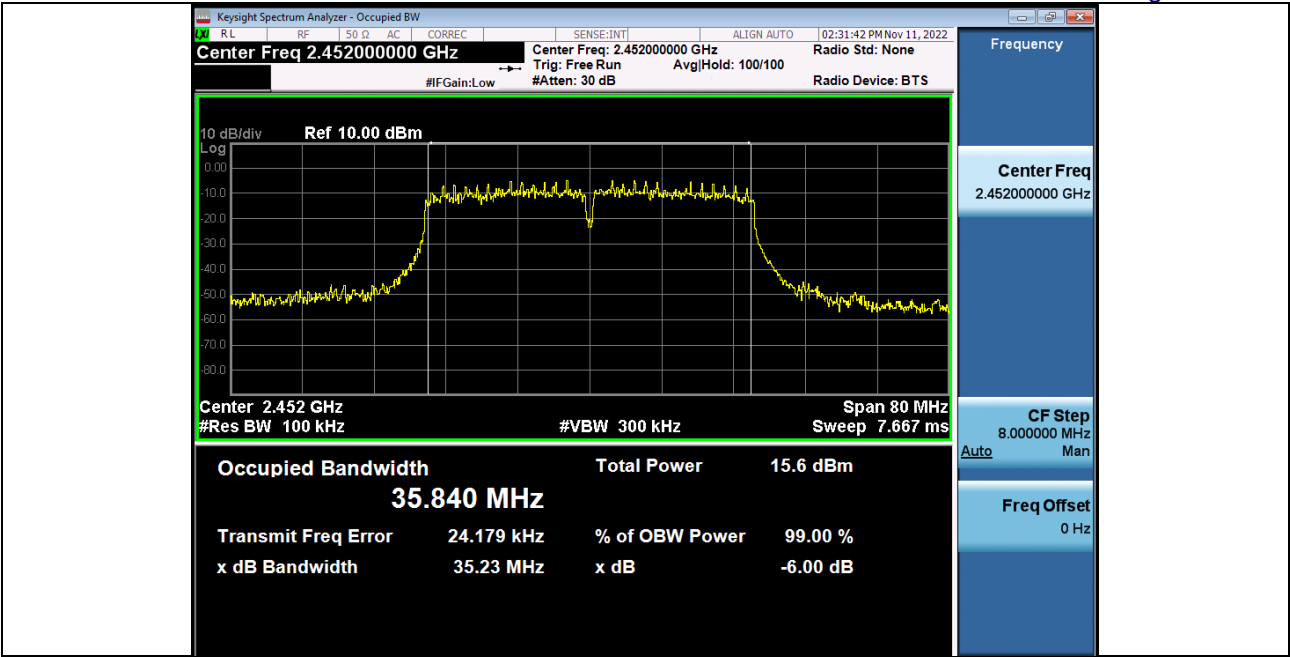



11.2. BANDEGE

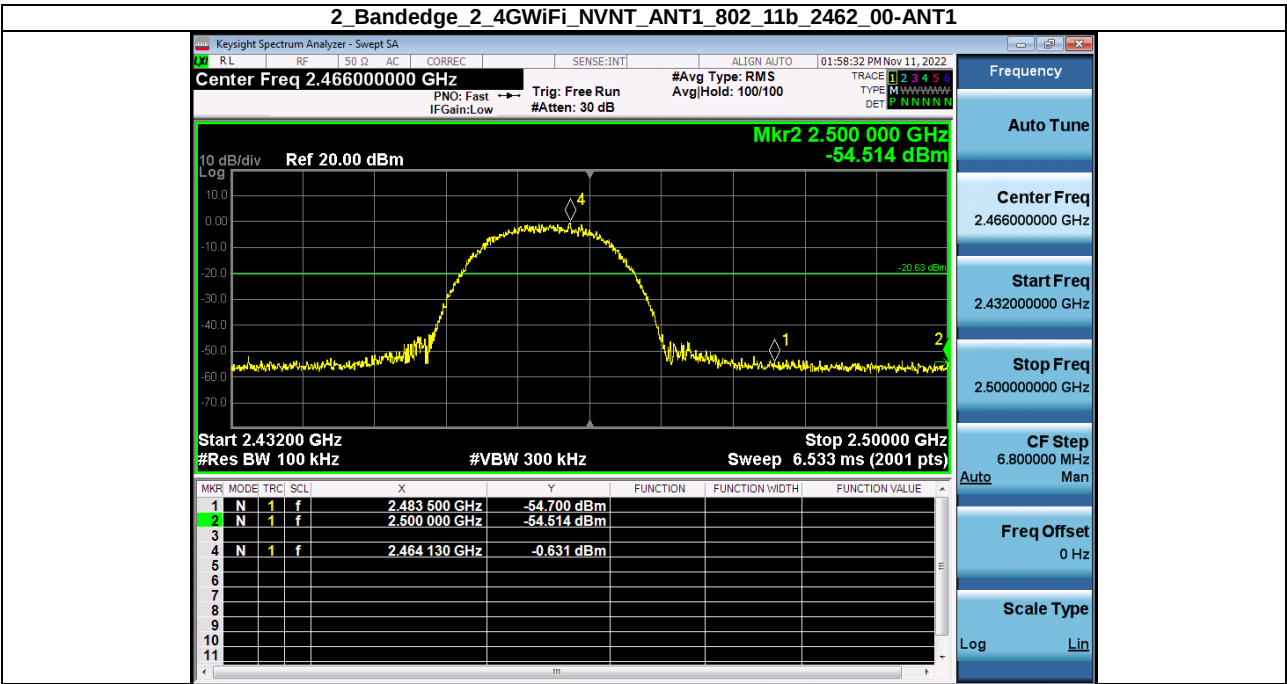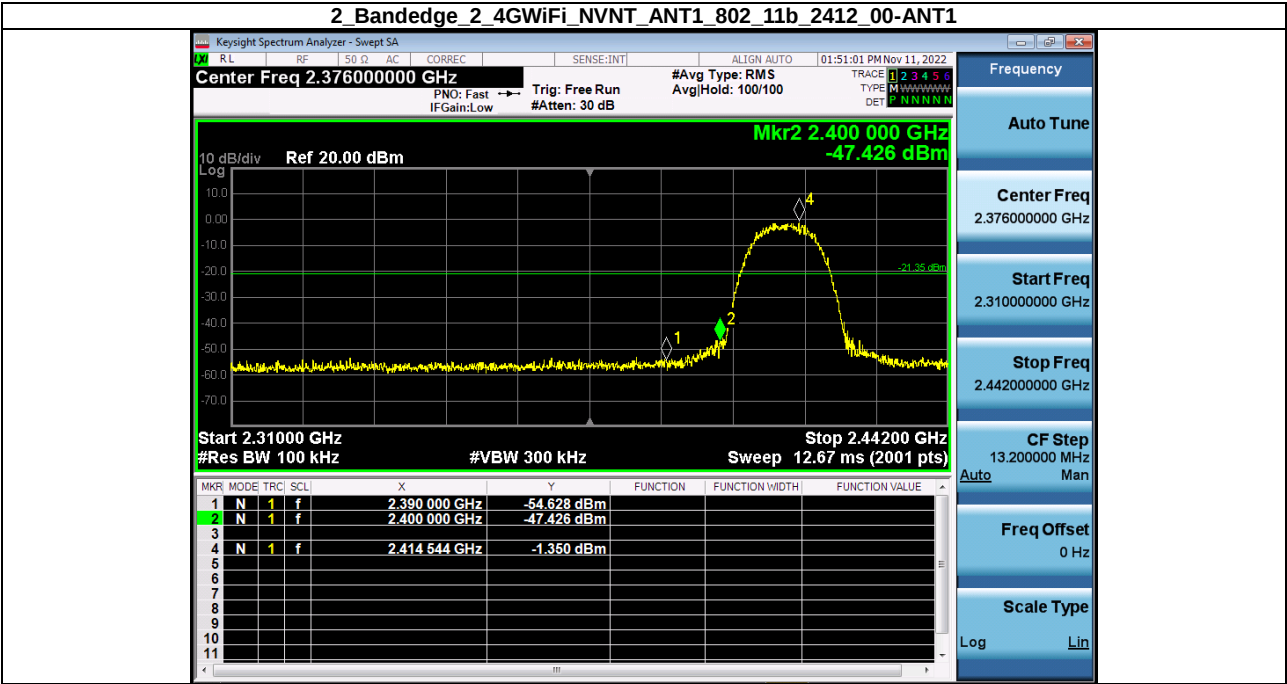

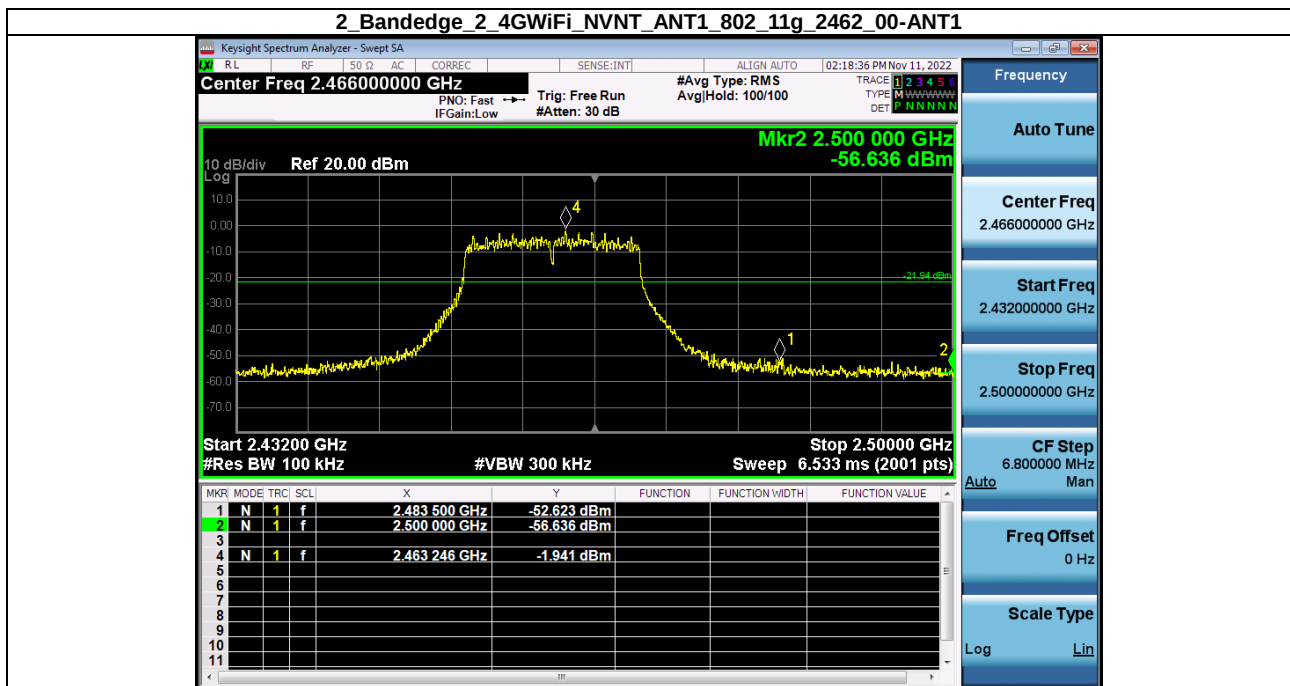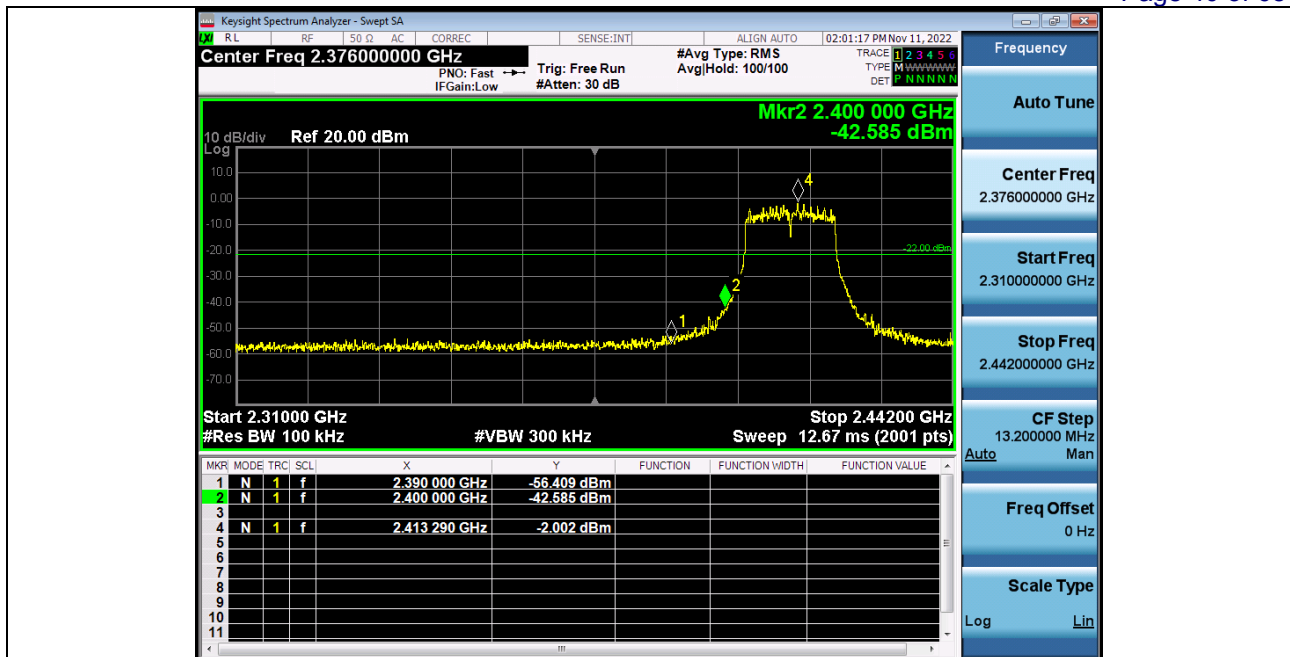


2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2412_00-ANT1

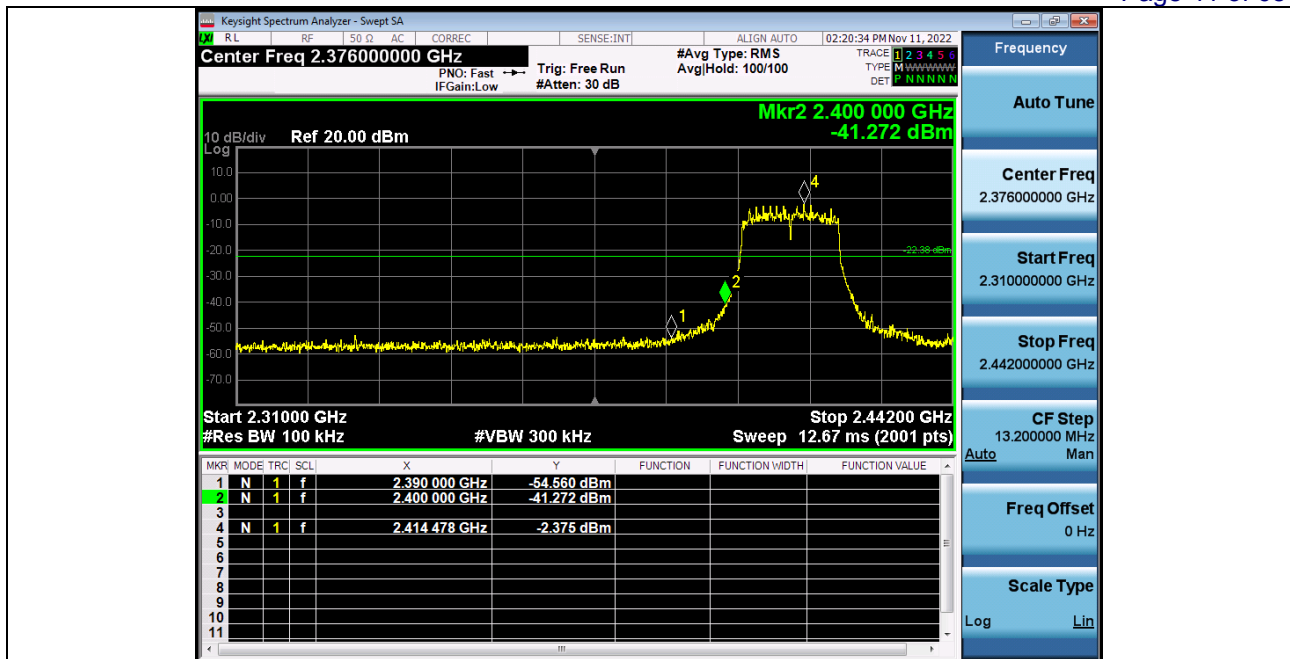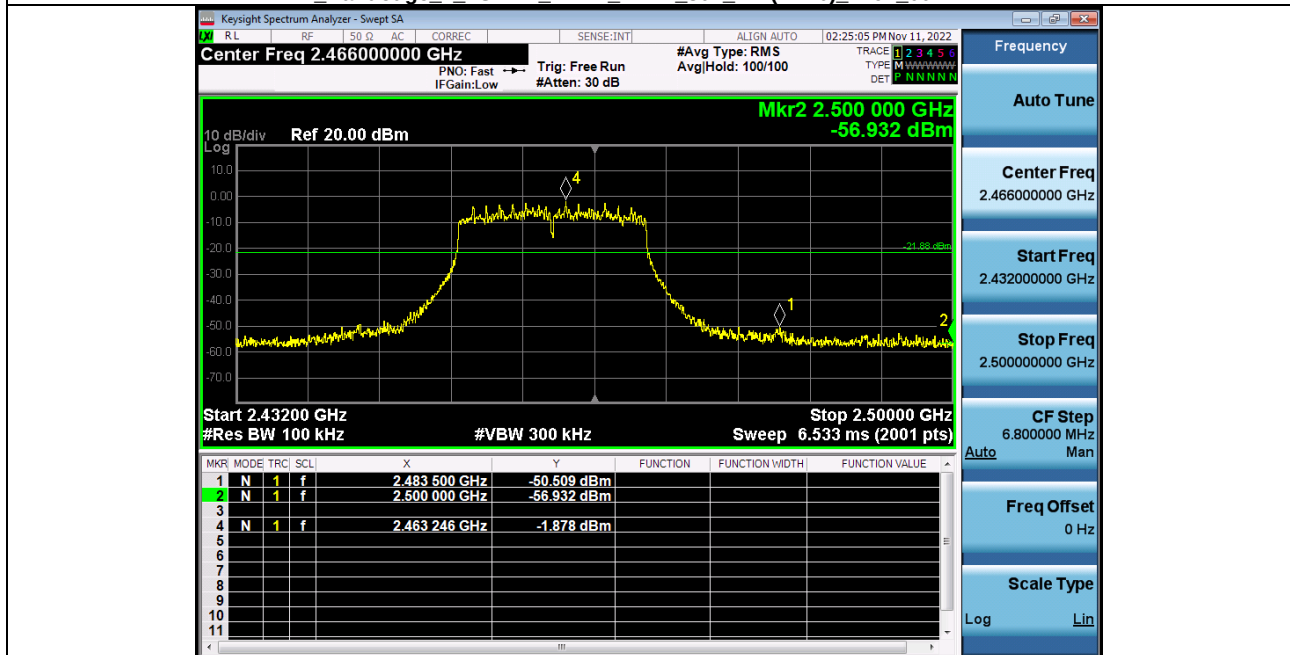**2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2462_00-ANT1****2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2422_00-ANT1**

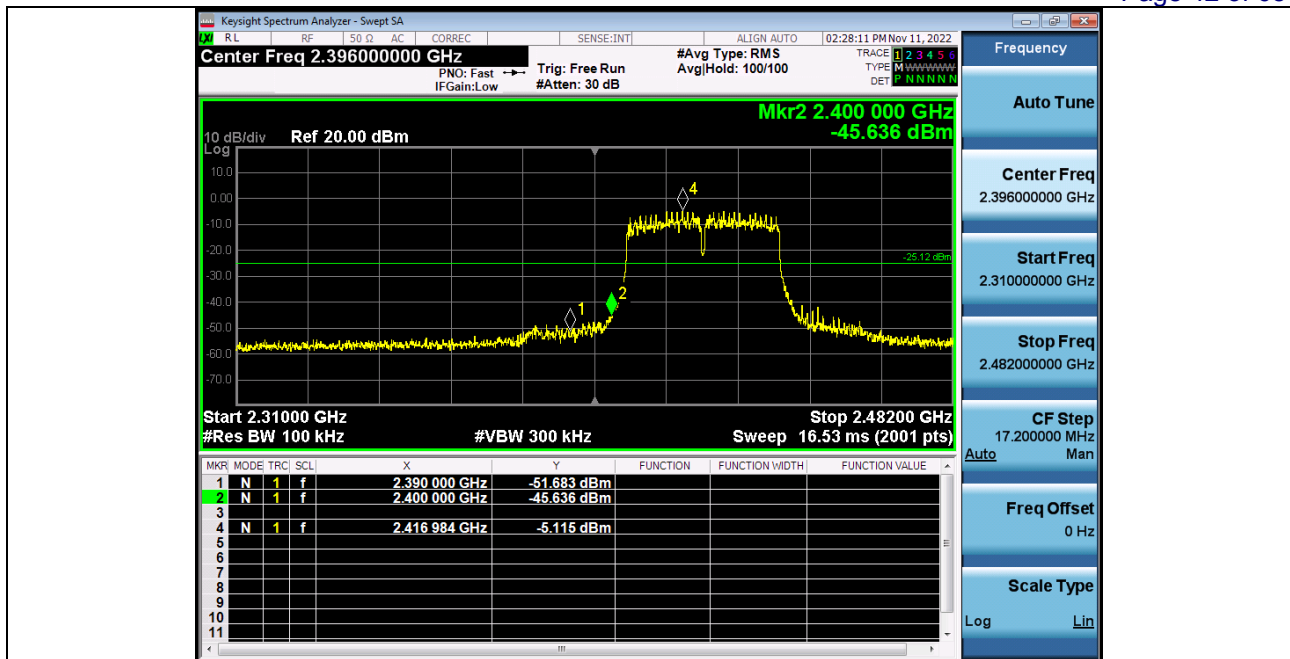

2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2452_00-ANT1


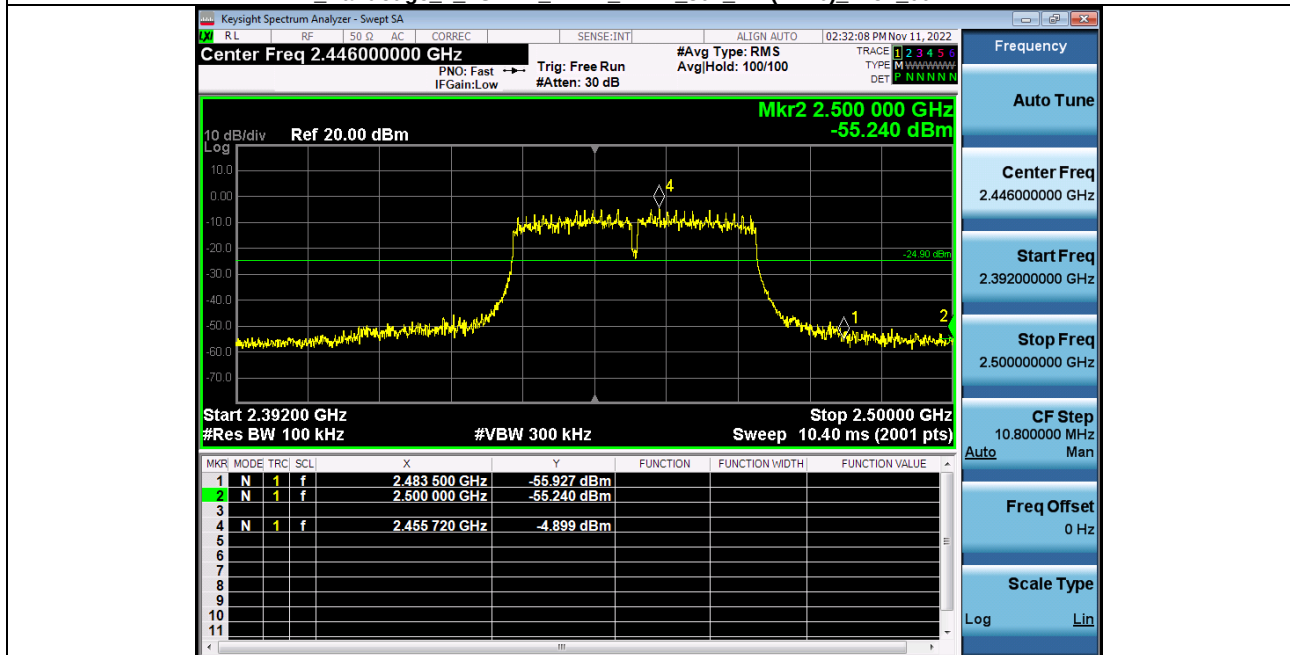


11.3. MAX. OUTPUT POWER


Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	15.54	30	Pass
NVNT	ANT1	802.11b	2437.00	15.77	30	Pass
NVNT	ANT1	802.11b	2462.00	15.88	30	Pass
NVNT	ANT1	802.11g	2412.00	16.06	30	Pass
NVNT	ANT1	802.11g	2437.00	15.34	30	Pass
NVNT	ANT1	802.11g	2462.00	15.89	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	15.58	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	15.33	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	15.64	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	14.79	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	14.43	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	14.94	30	Pass

11.4. POWER SPECTRAL DENSITY


Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	-15.594	8	Pass
NVNT	ANT1	802.11b	2437.00	-15.282	8	Pass
NVNT	ANT1	802.11b	2462.00	-15.167	8	Pass
NVNT	ANT1	802.11g	2412.00	-18.257	8	Pass
NVNT	ANT1	802.11g	2437.00	-18.63	8	Pass
NVNT	ANT1	802.11g	2462.00	-18.163	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-17.449	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-19.012	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-17.97	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-20.706	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	-20.932	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	-22.925	8	Pass

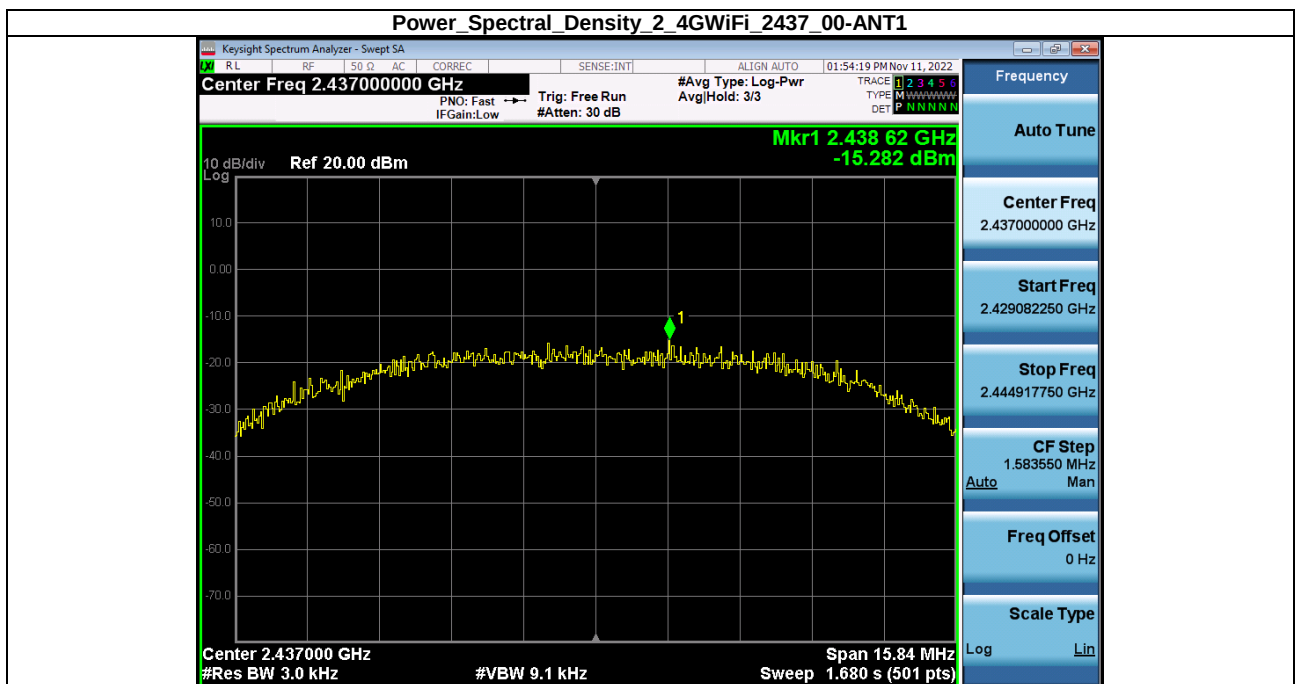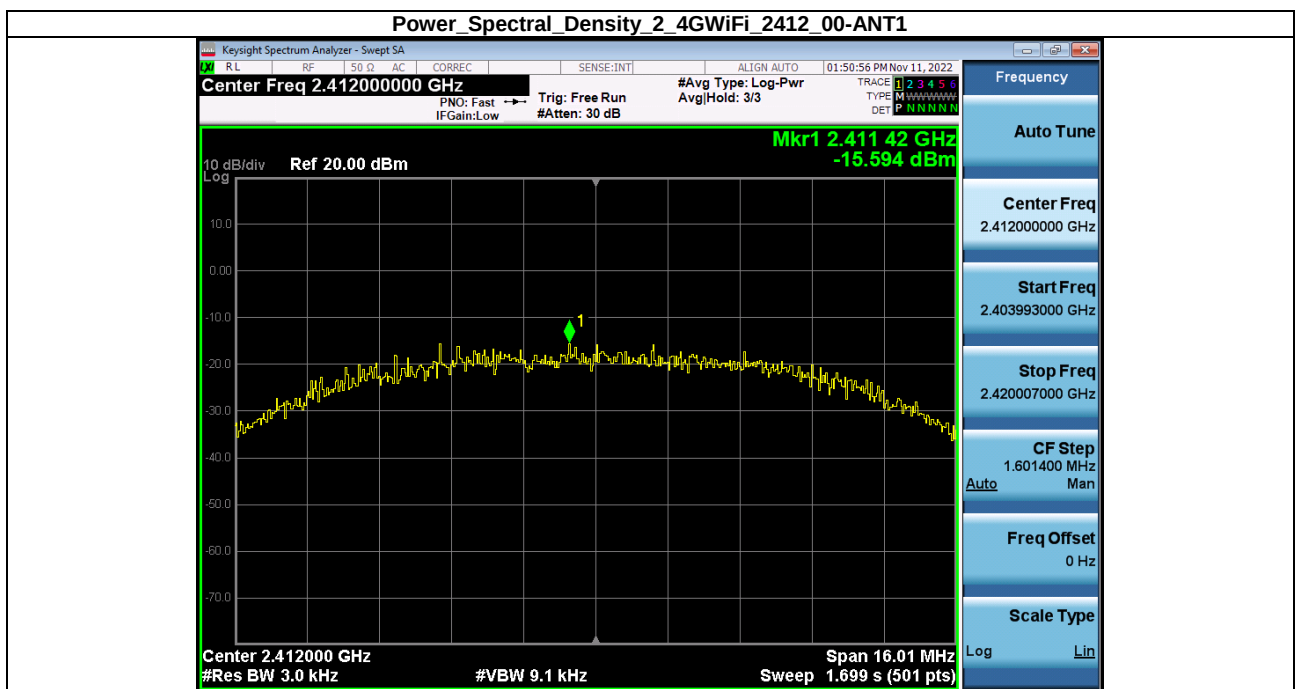



Power_Spectral_Density_2_4GWiFi_2462_00-ANT1

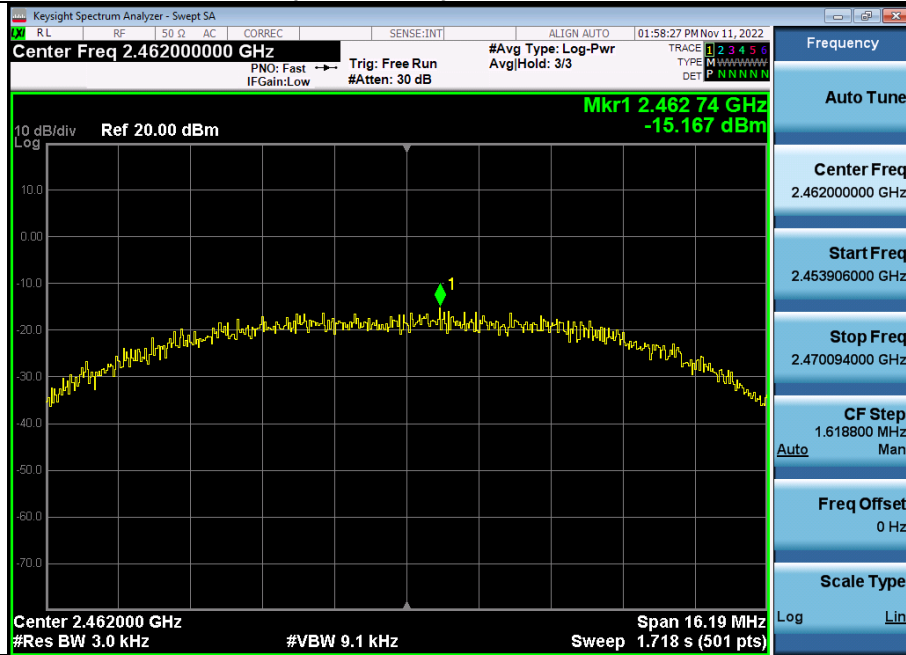



Power_Spectral_Density_2_4GWiFi_2412_00-ANT1

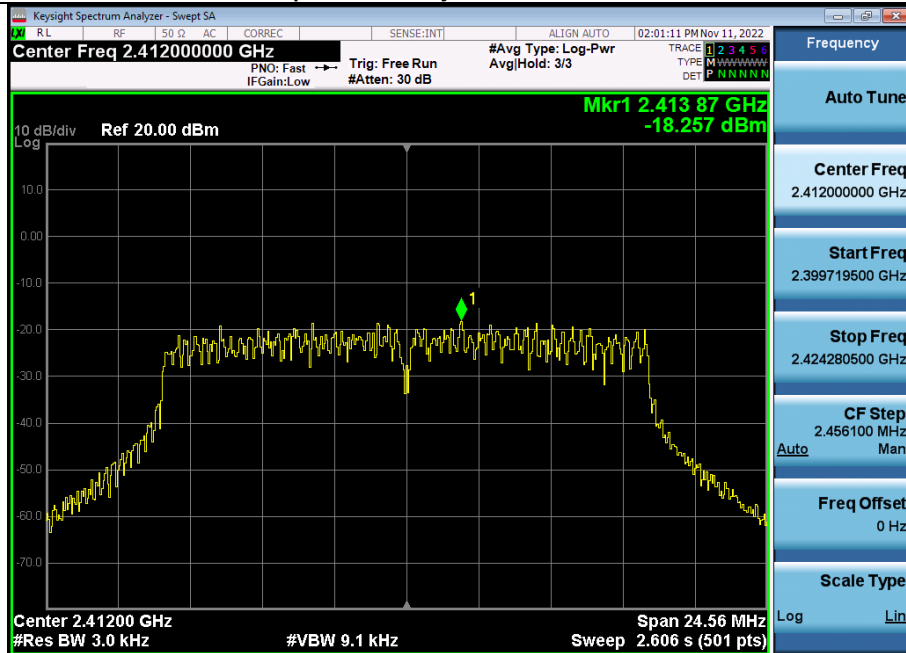



Power_Spectral_Density_2_4GWiFi_2437_00-ANT1

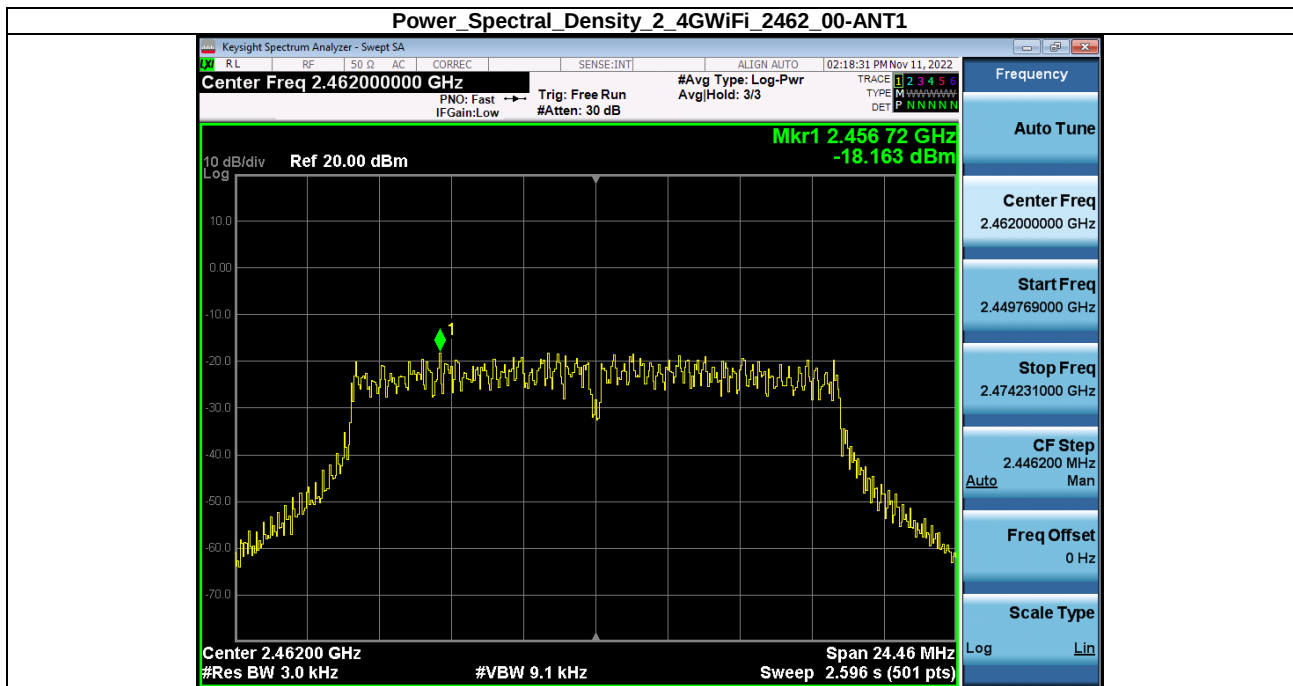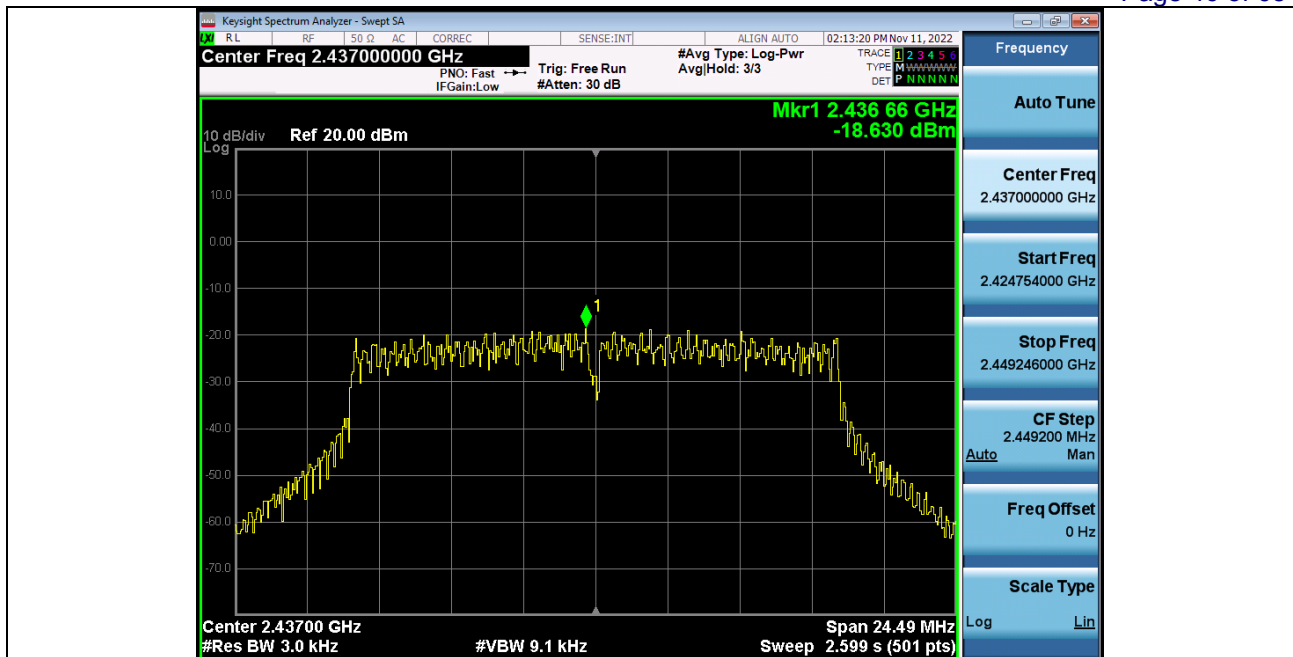



Power Spectral Density_2_4GWiFi_2412_00-ANT1

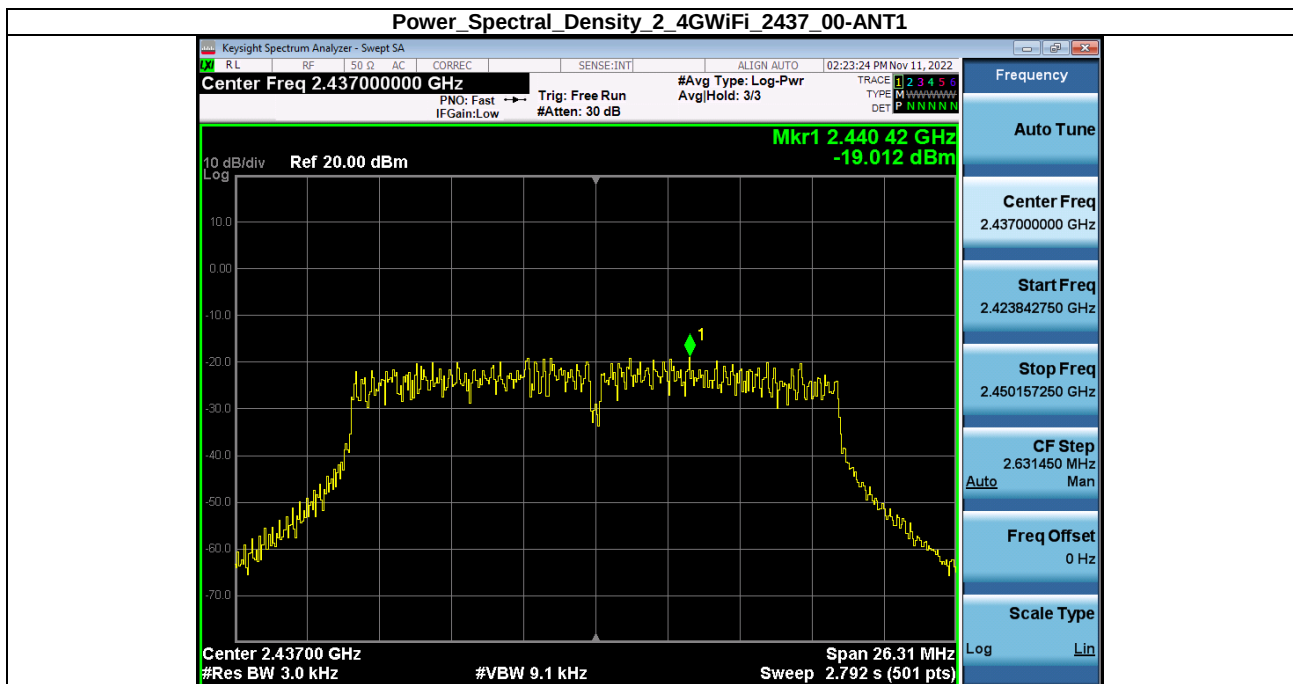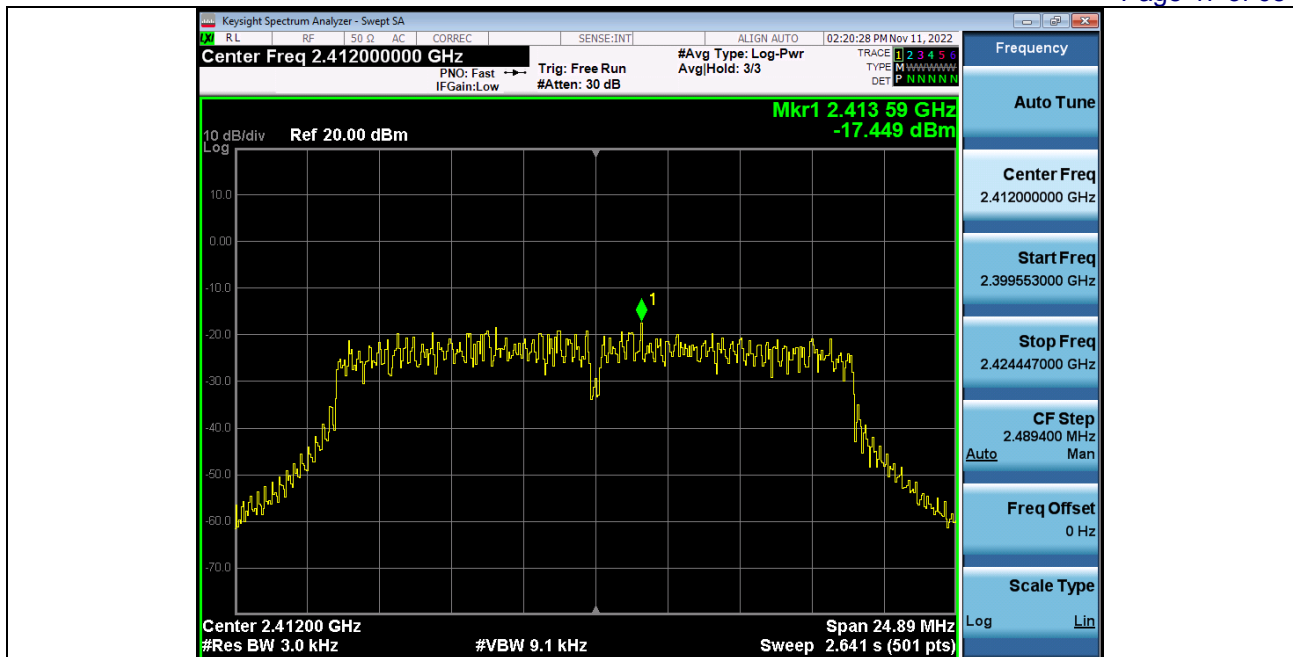


Power Spectral Density 2_4GWiFi_2462_00-ANT1

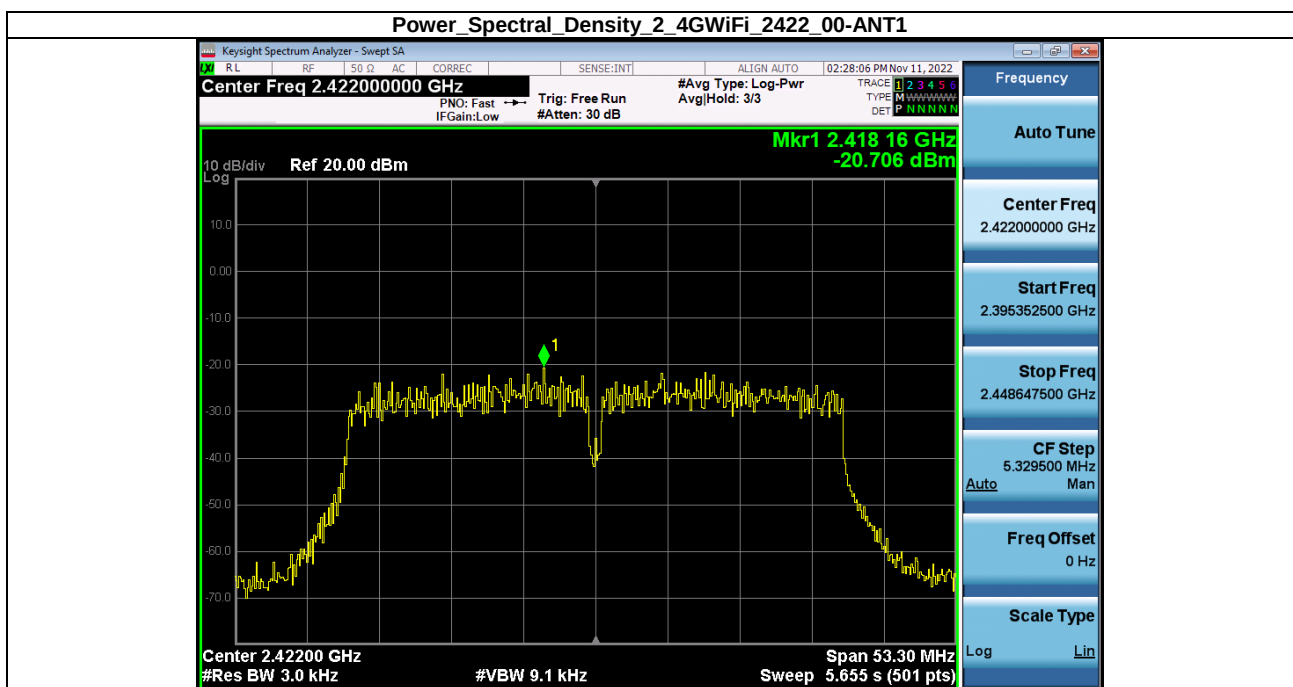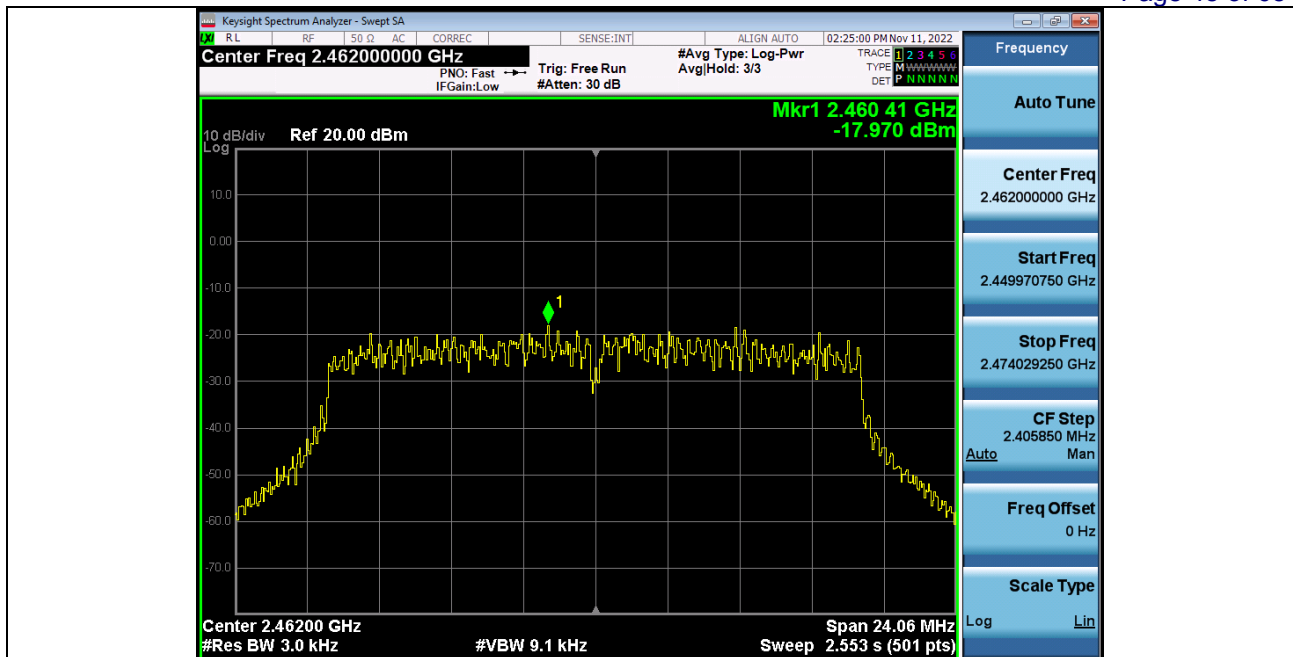


Power_Spectral_Density_2_4GWiFi_2437_00-ANT1

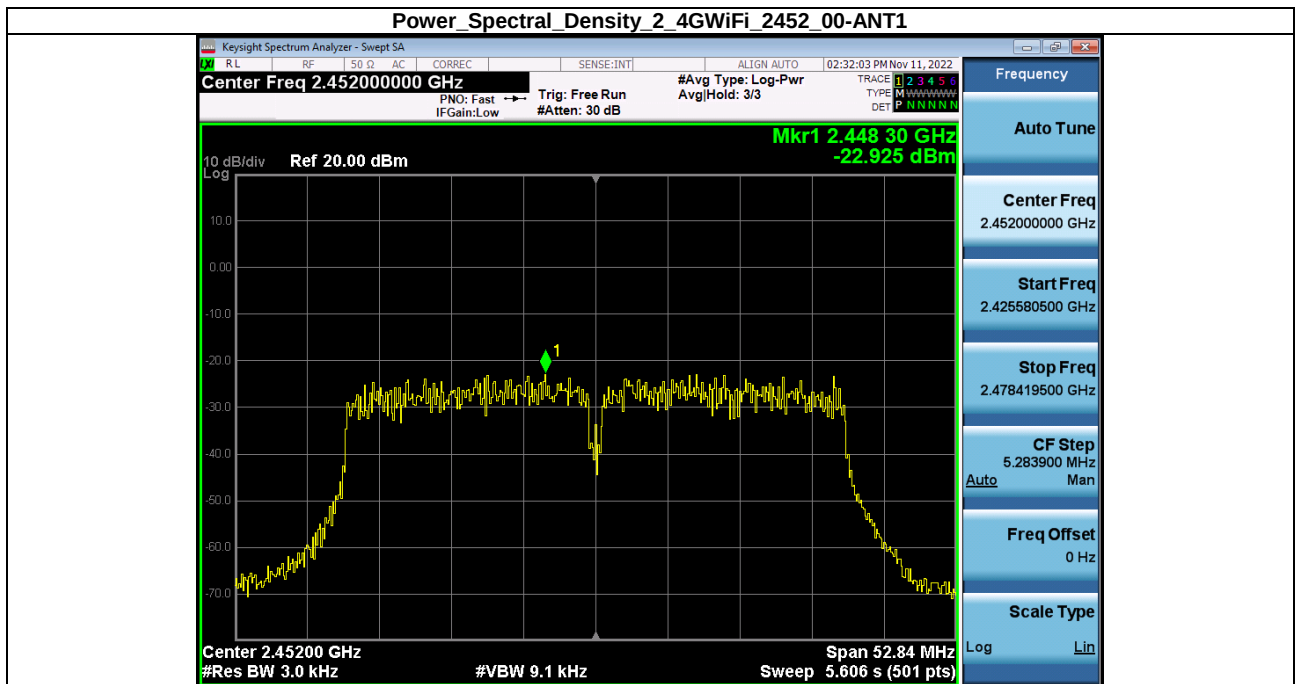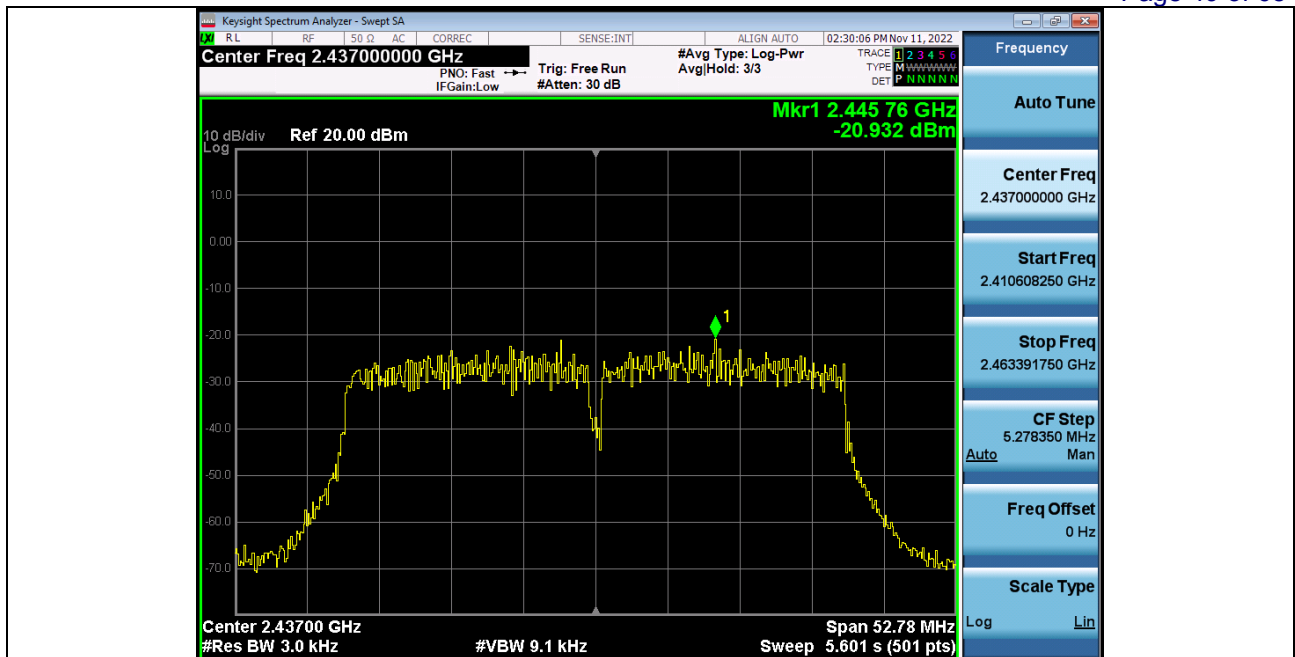


11.5. SPURIOUS EMISSION

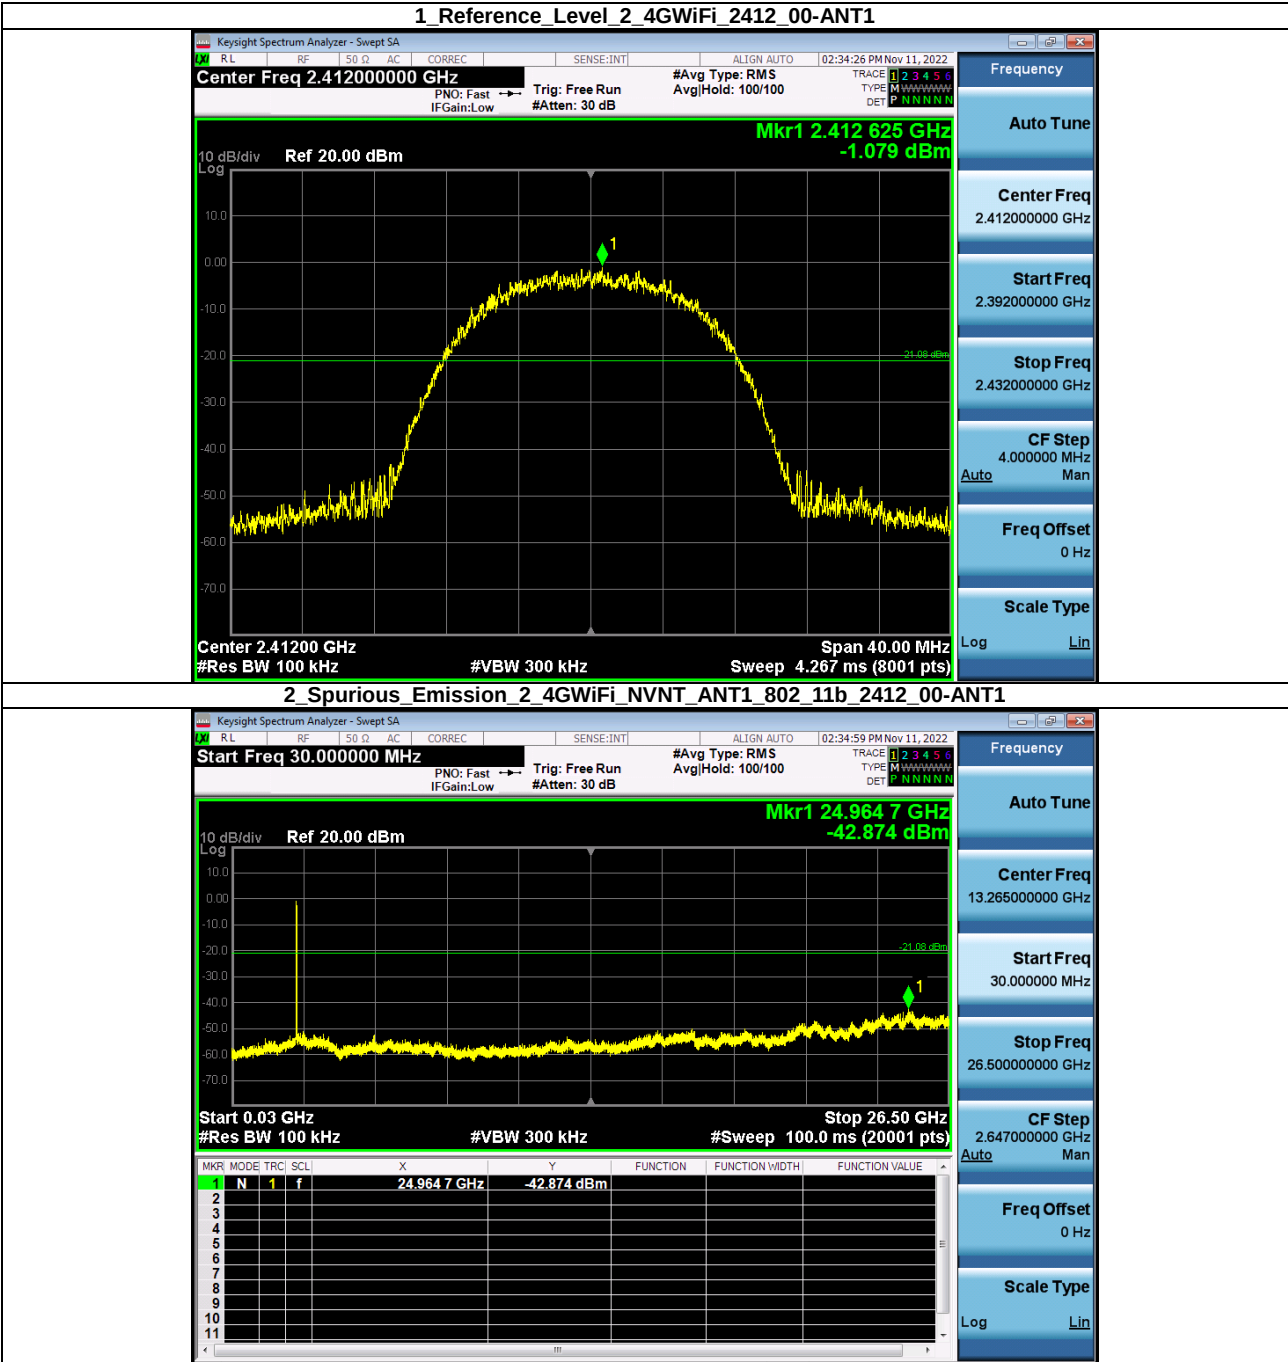


1_Reference_Level_2_4GWiFi_2437_00-ANT1

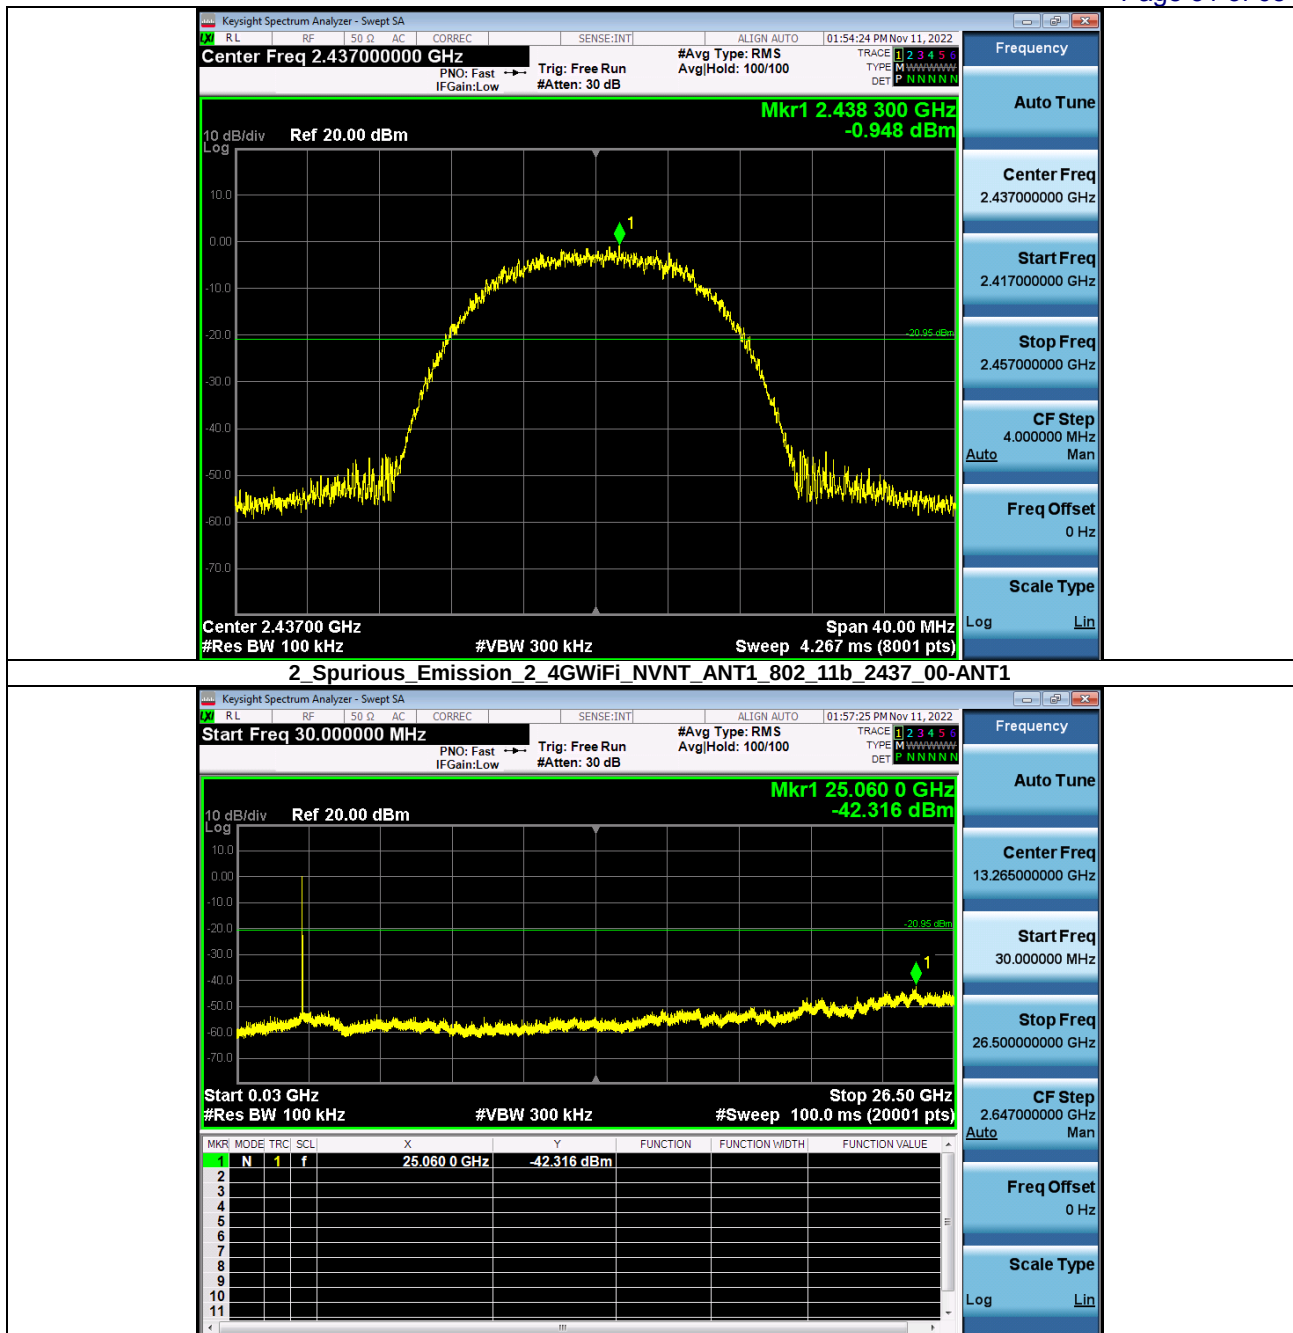


1 Reference Level 2 4GWiFi 2462 00-ANT1

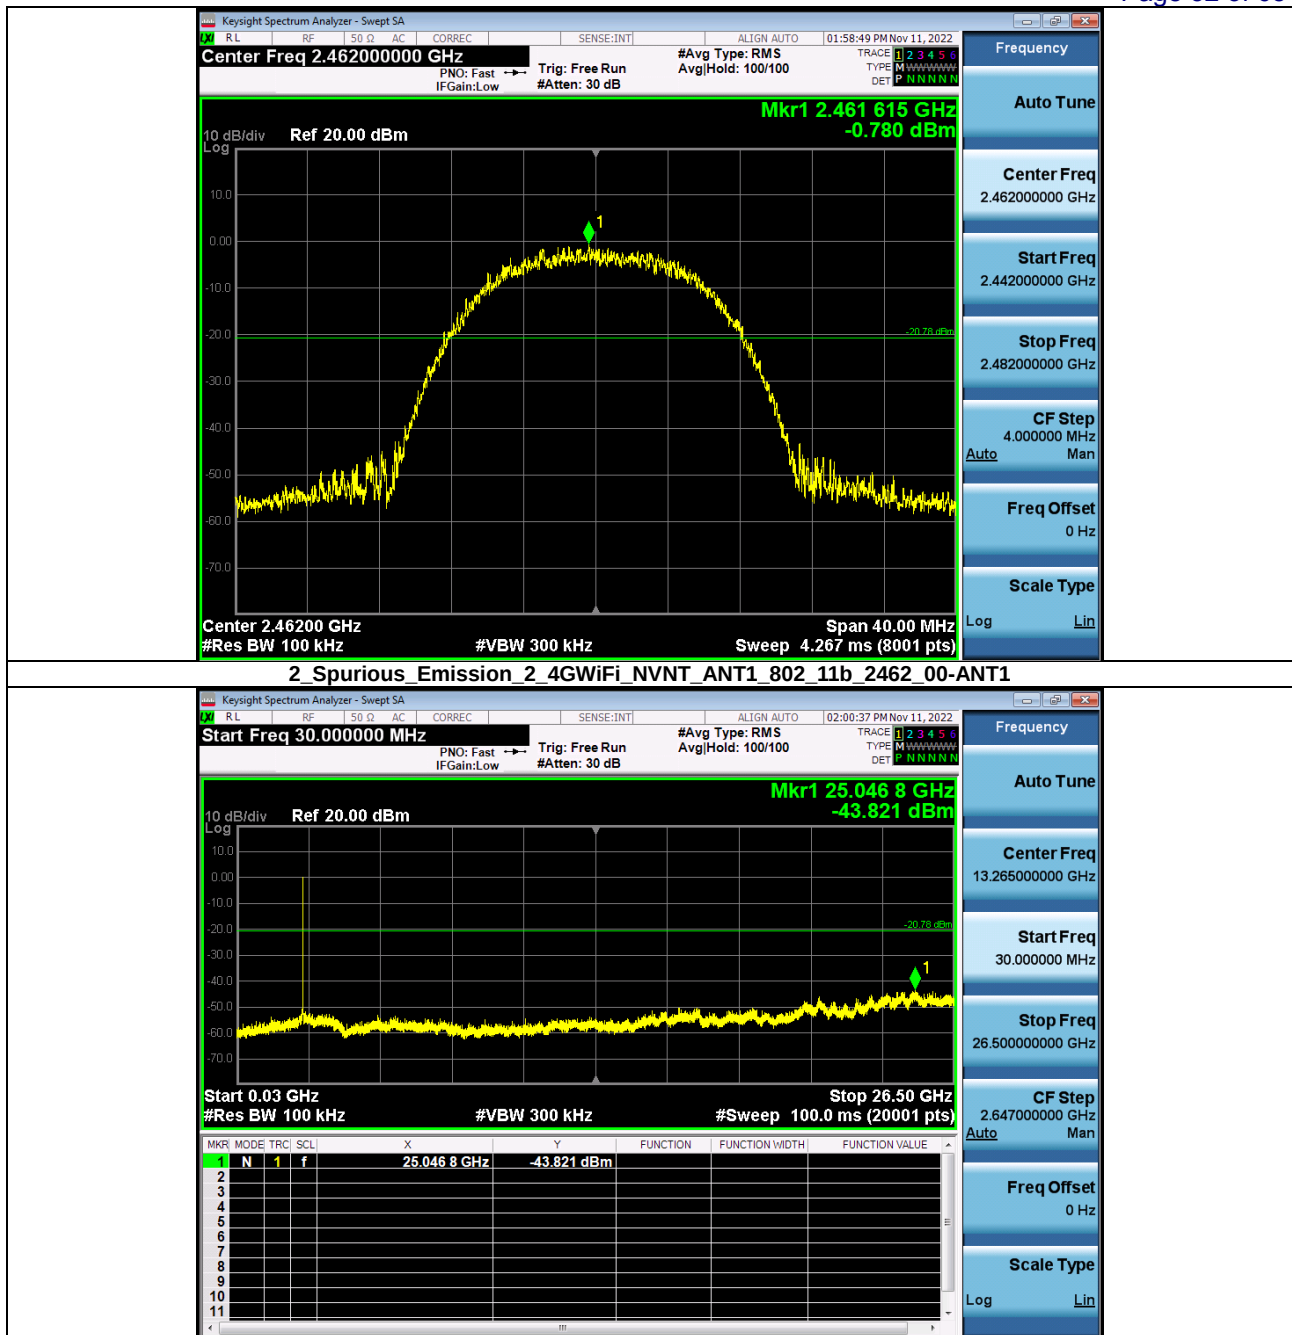

1 Reference Level 2_4GWiFi_2412_00-ANT1

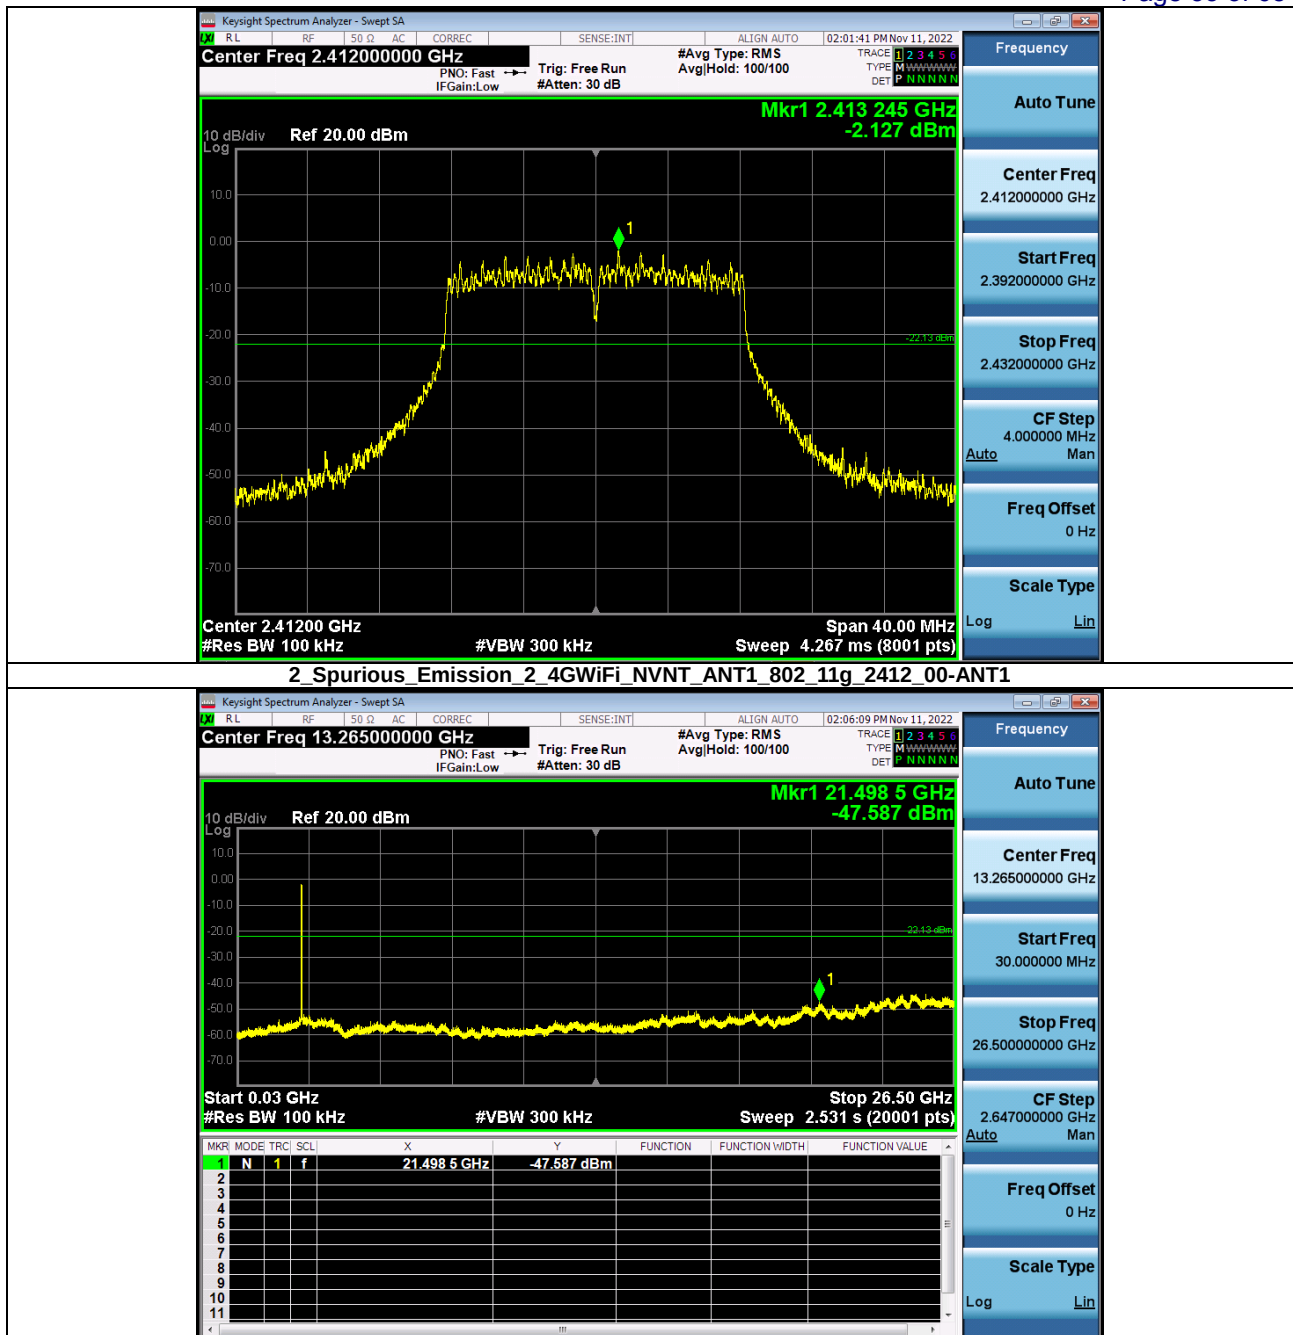


1 Reference Level 2 4GWiFi 2437_00-ANT1

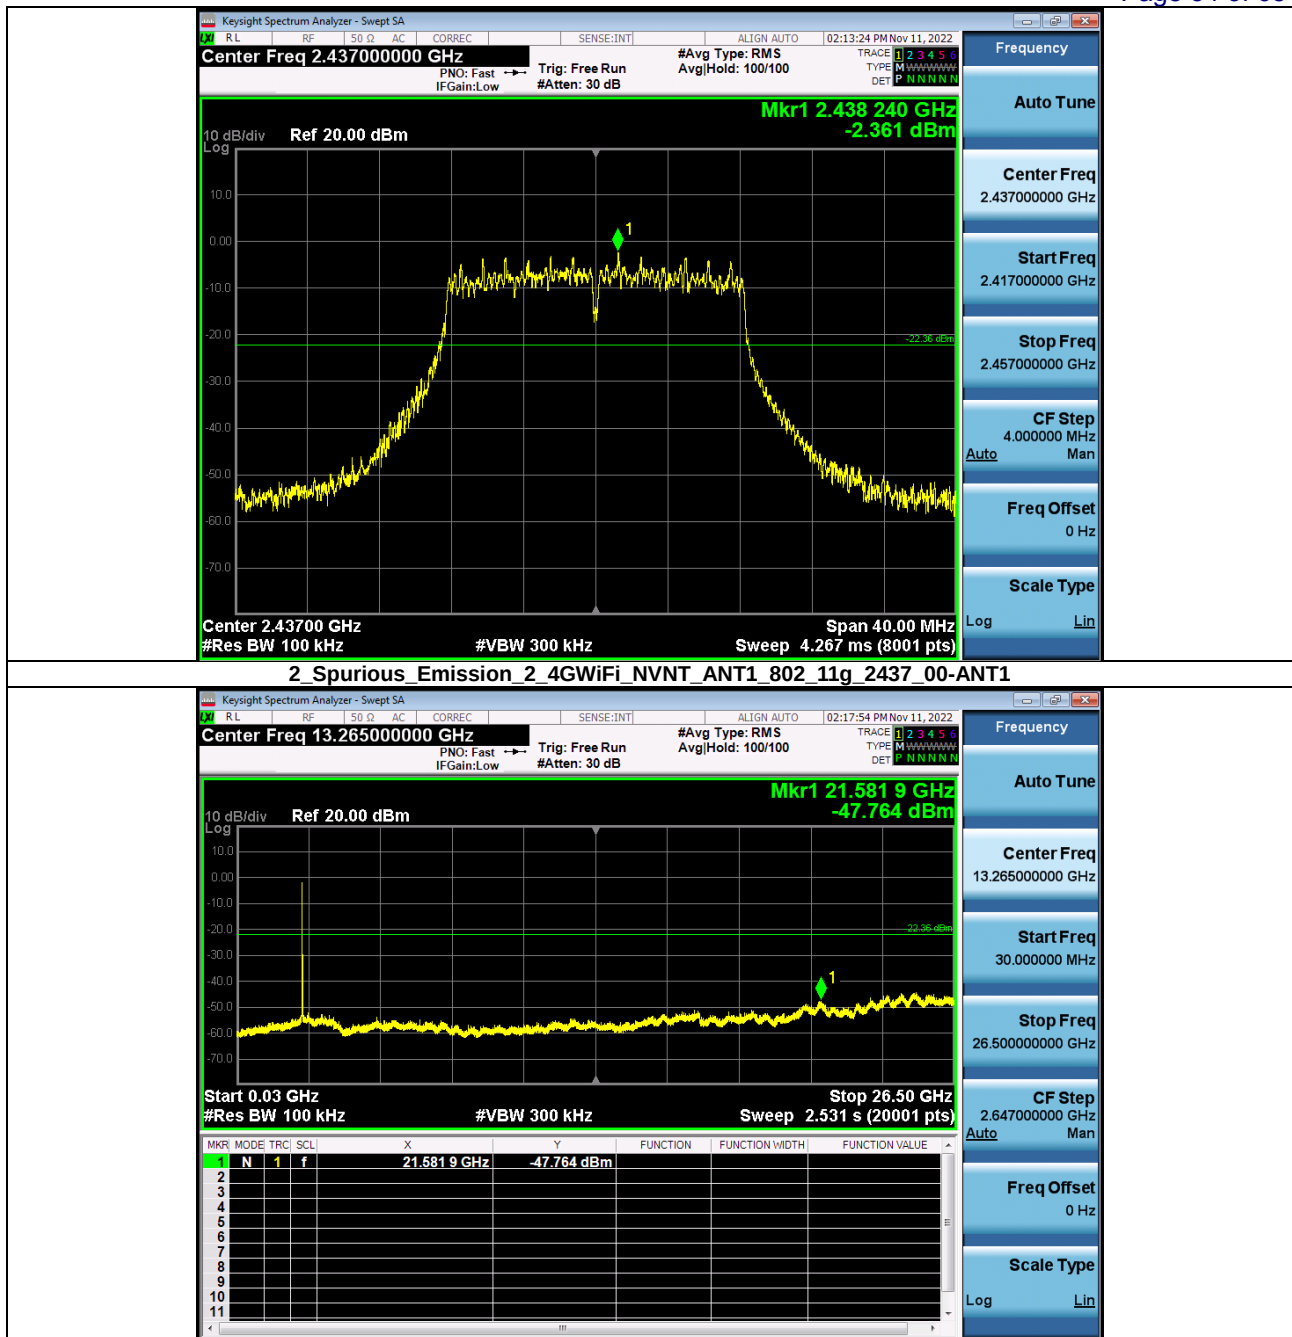


1_ Reference Level 2_4GWiFi_2462_00-ANT1


1. Reference Level 2_4GWiFi_2412_00-ANT1

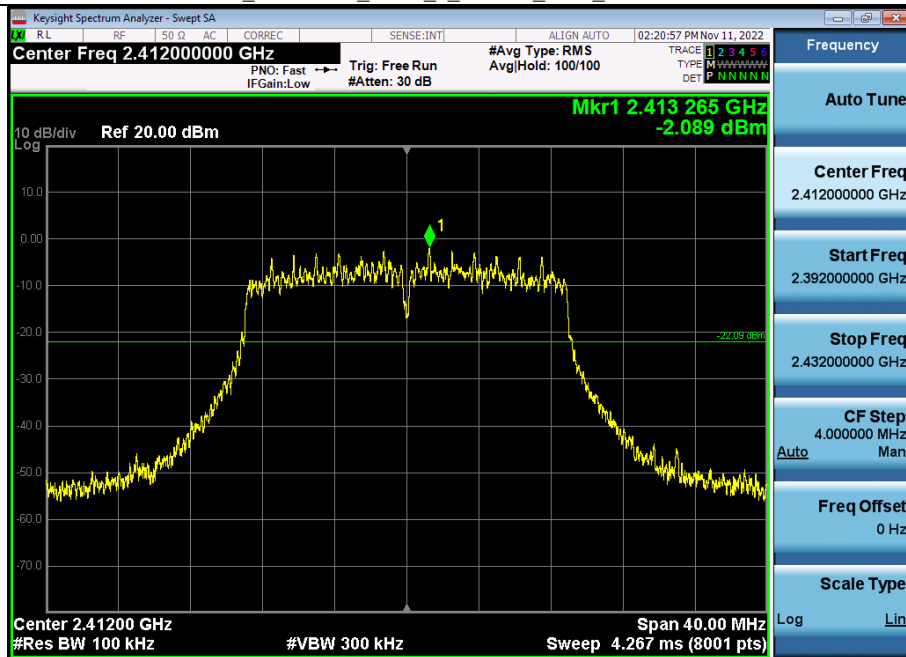


2. Spurious Emission 2_4GWiFi_NVNT ANT1_802_11n(HT20)_2412_00-ANT1

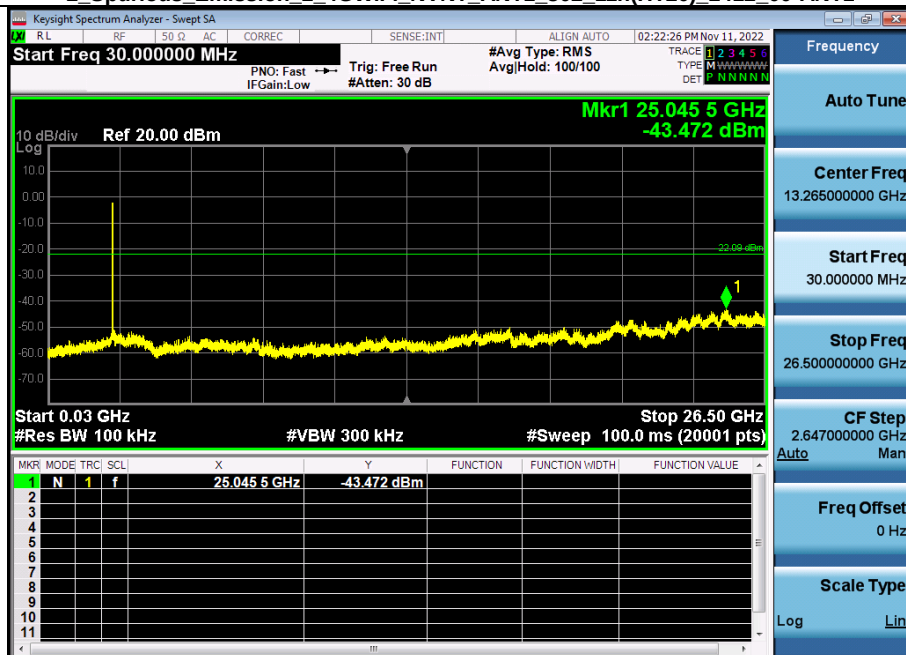


1. Reference Level 2_4GWiFi_2437_00-ANT1

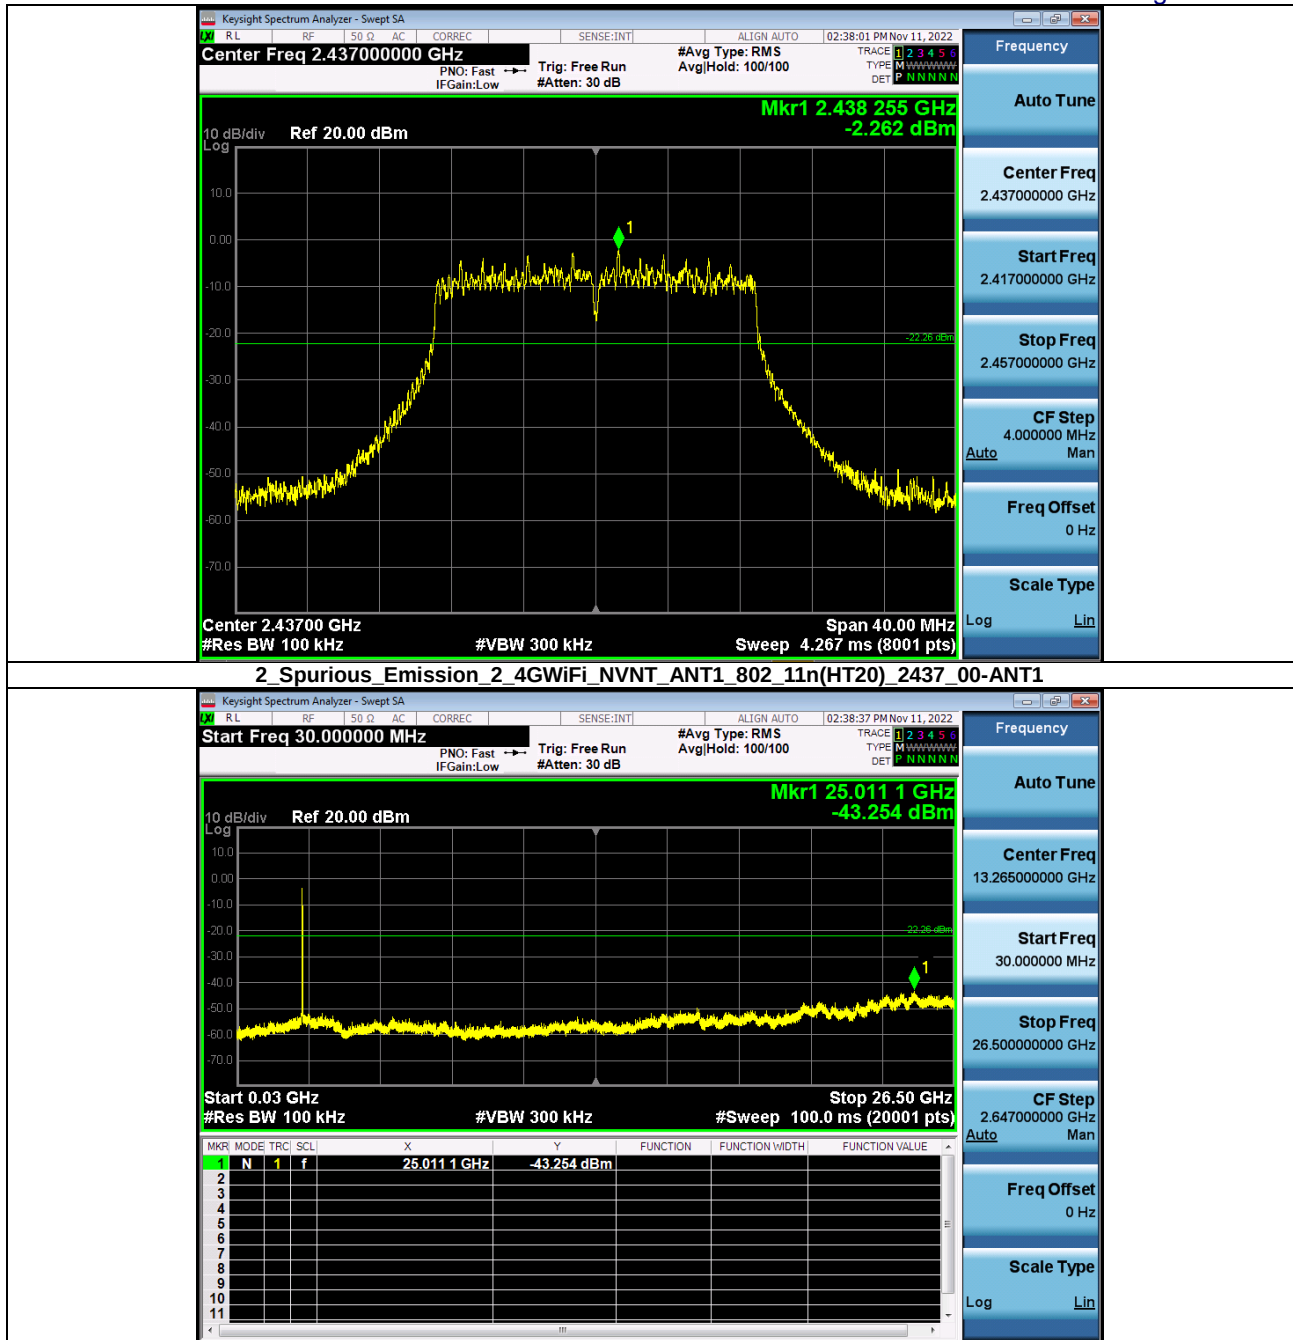


1_Reference_Level_2_4GWiFi_2462_00-ANT1

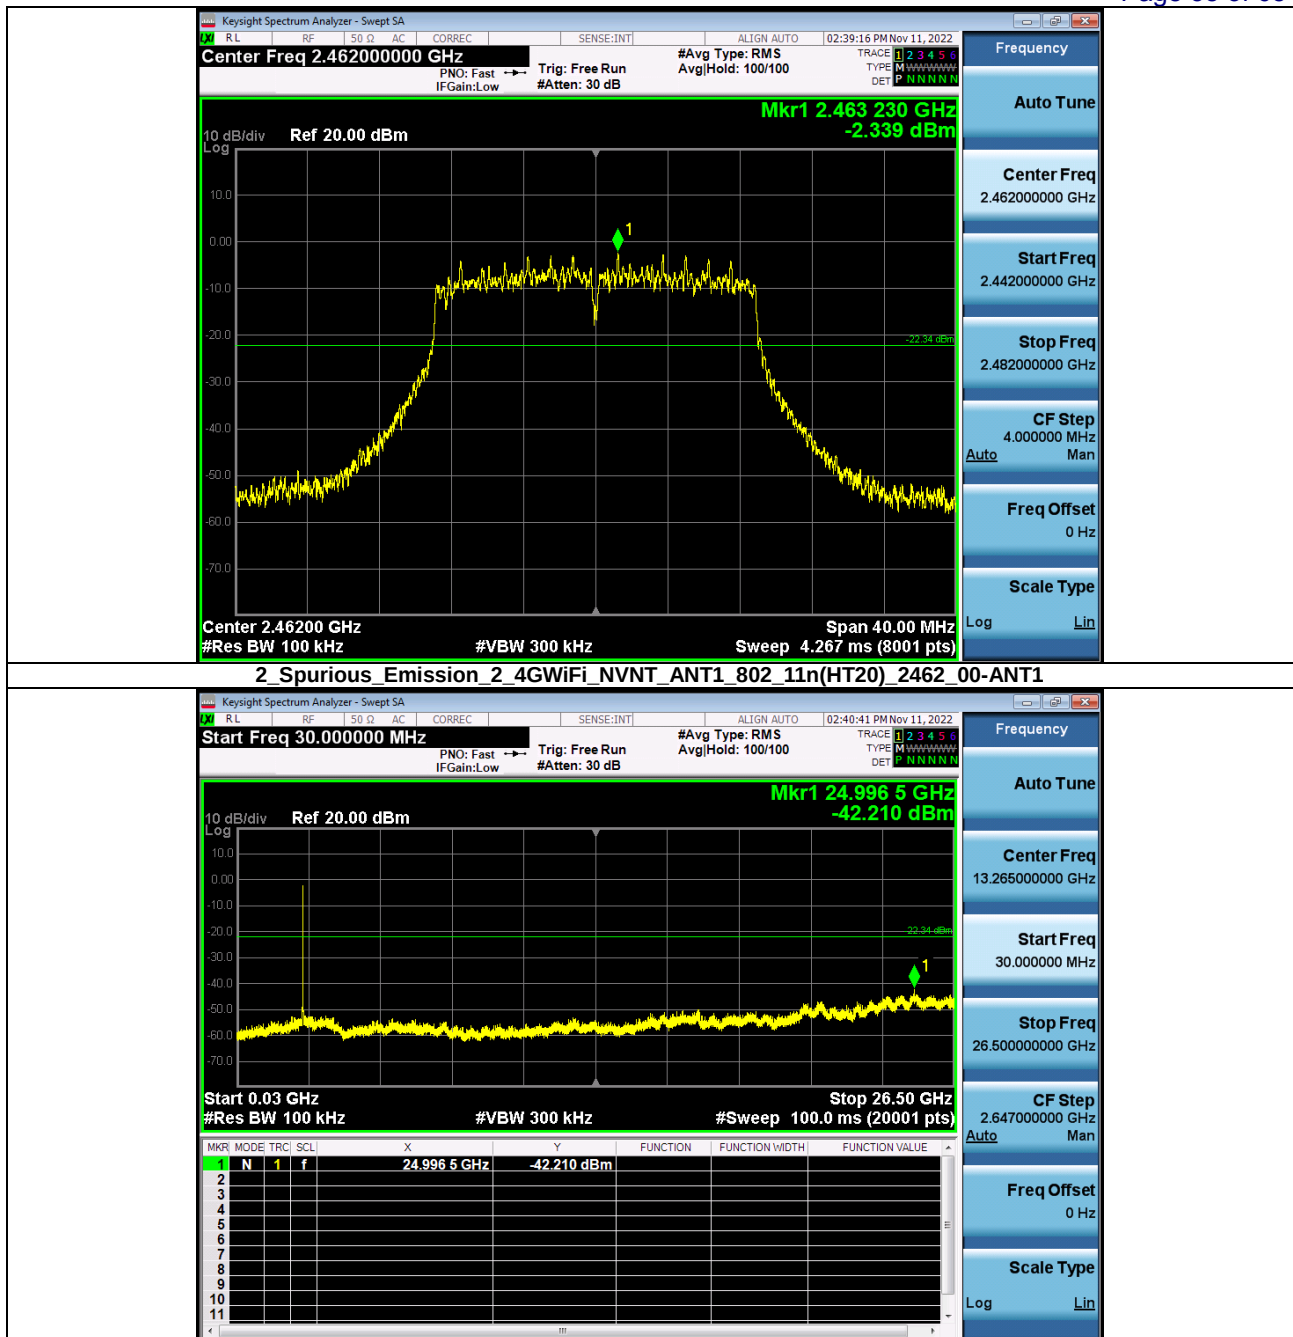

1_ Reference Level 2_4GWiFi_2422_00-ANT1

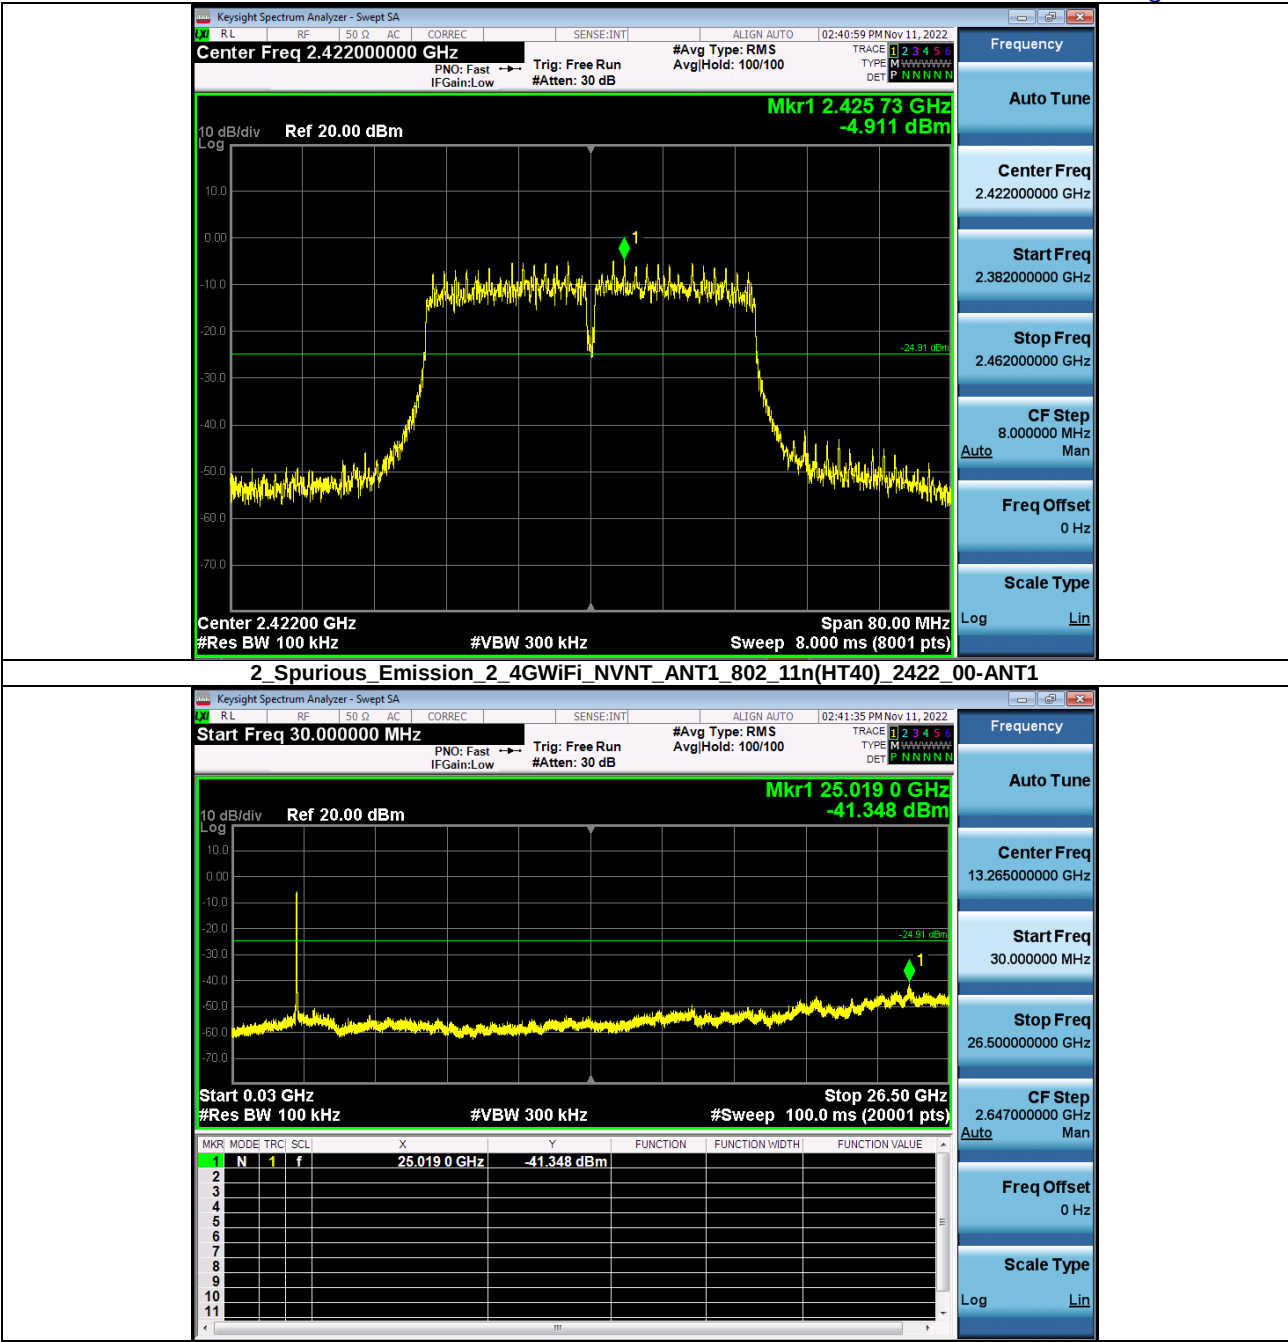


1_Reference Level 2 4GWiFi 2437_00-ANT1

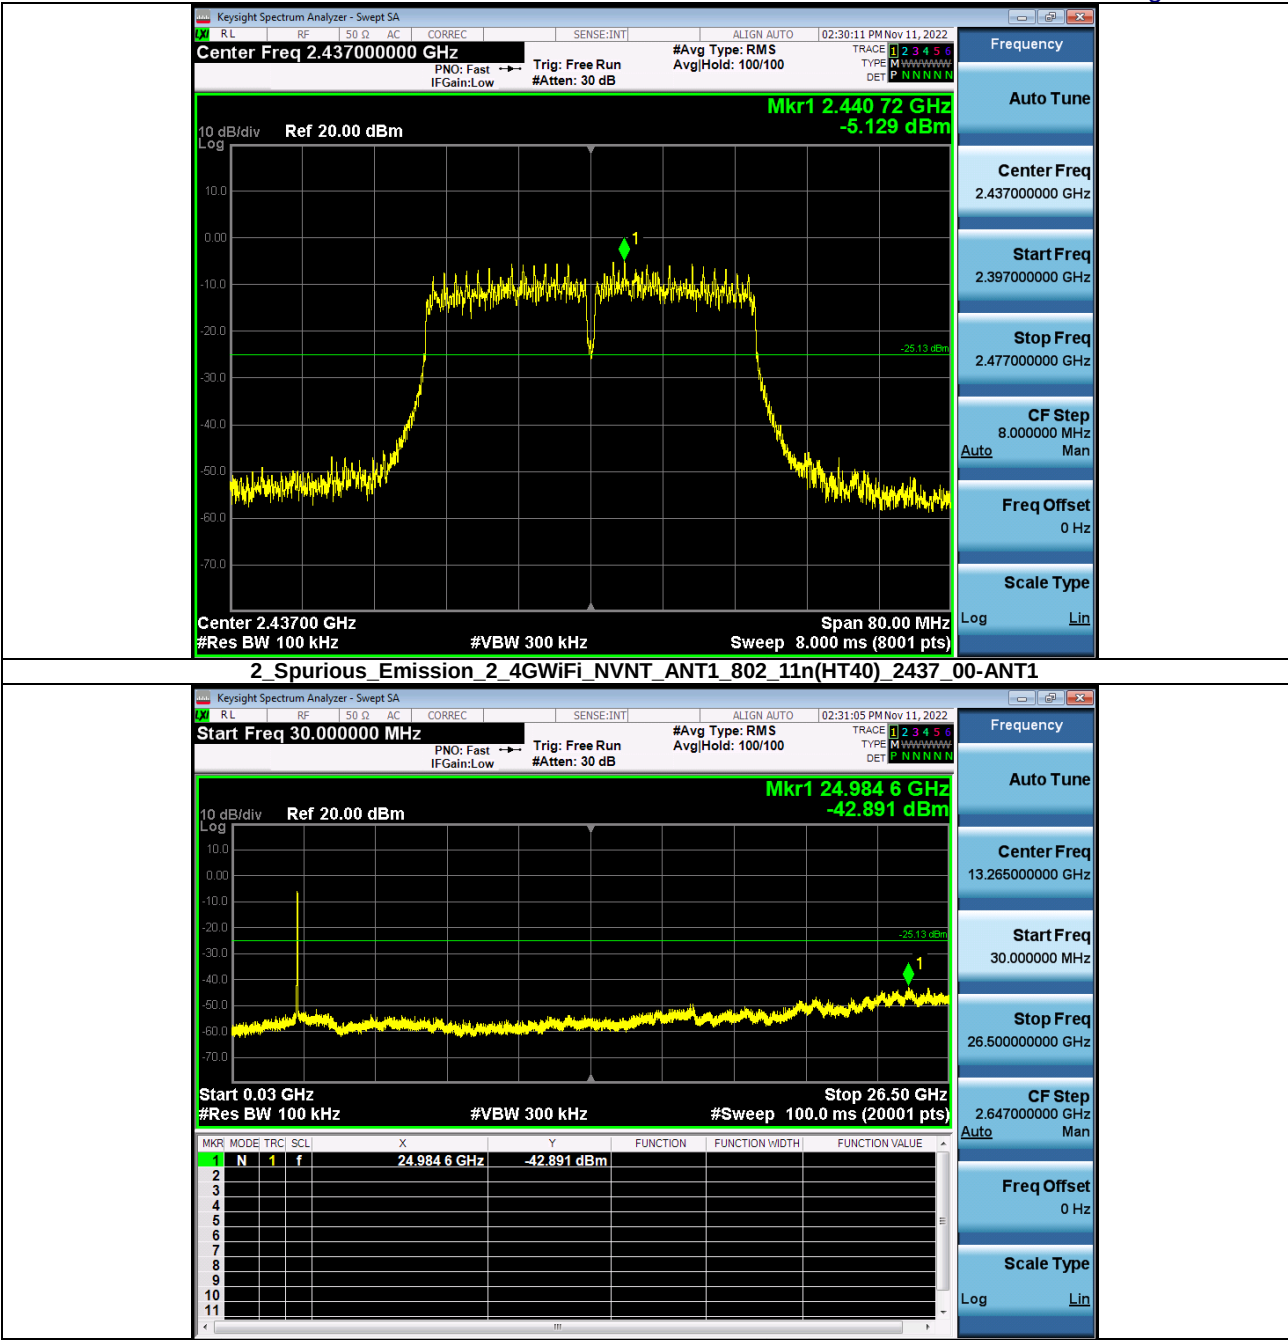


1_ Reference Level 2_4GWiFi_2452_00-ANT1




12. TEST SETUP PHOTO

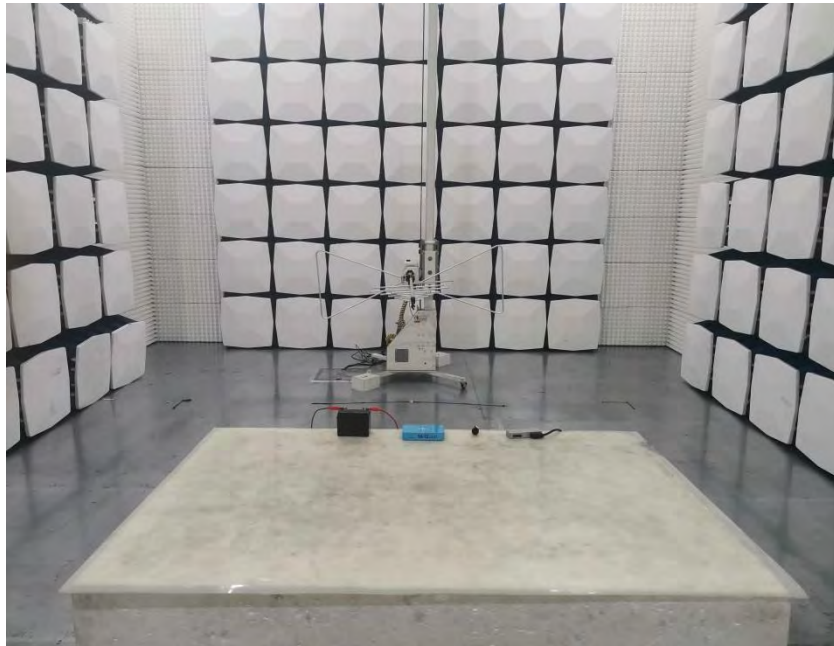


13. EUT CONSTRUCTIONAL DETAILS




External photos



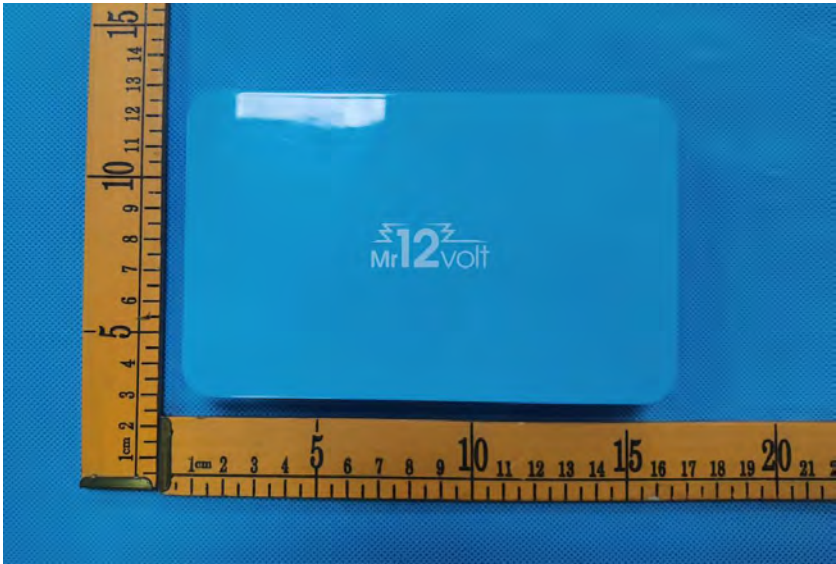


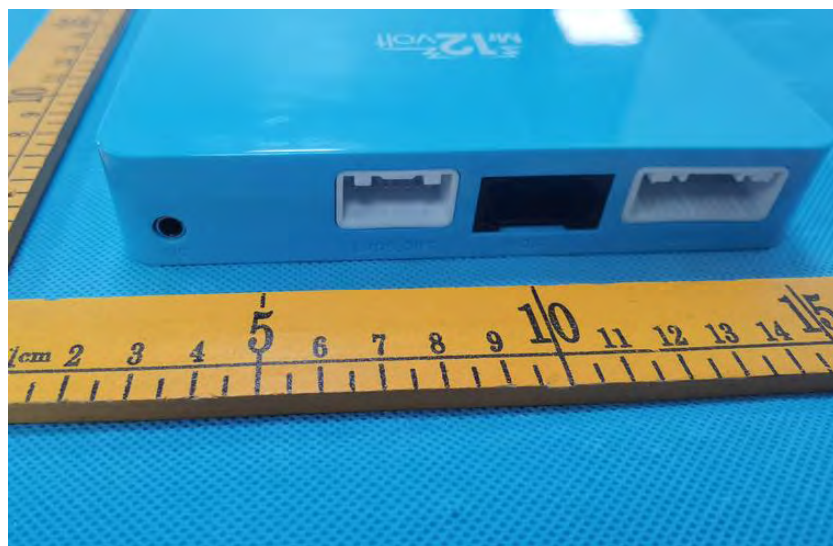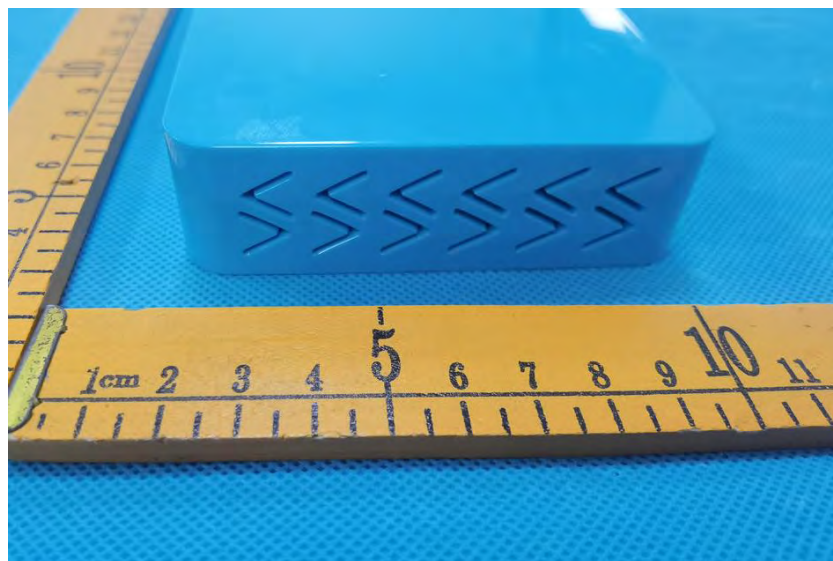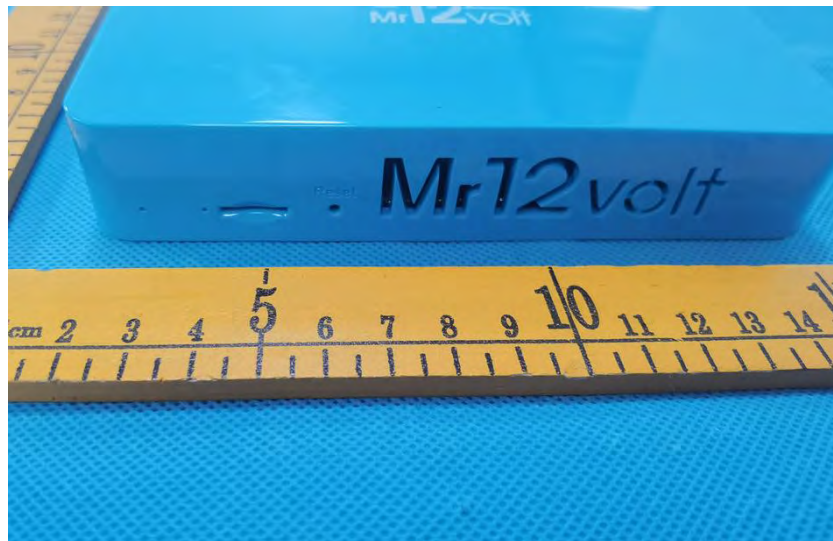


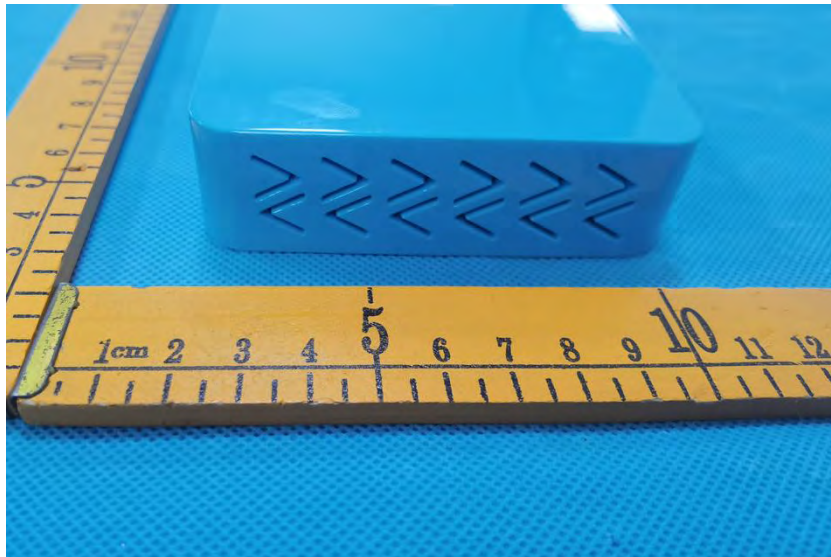

Internal photos

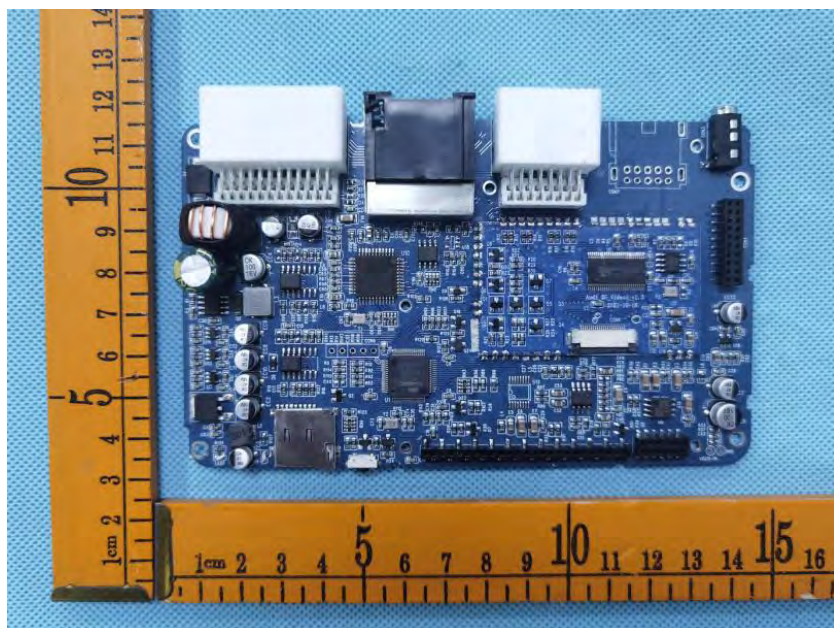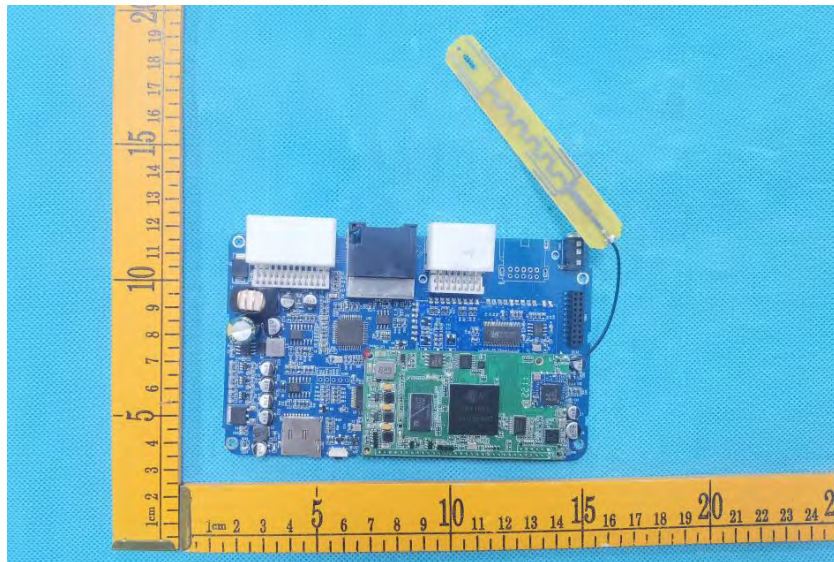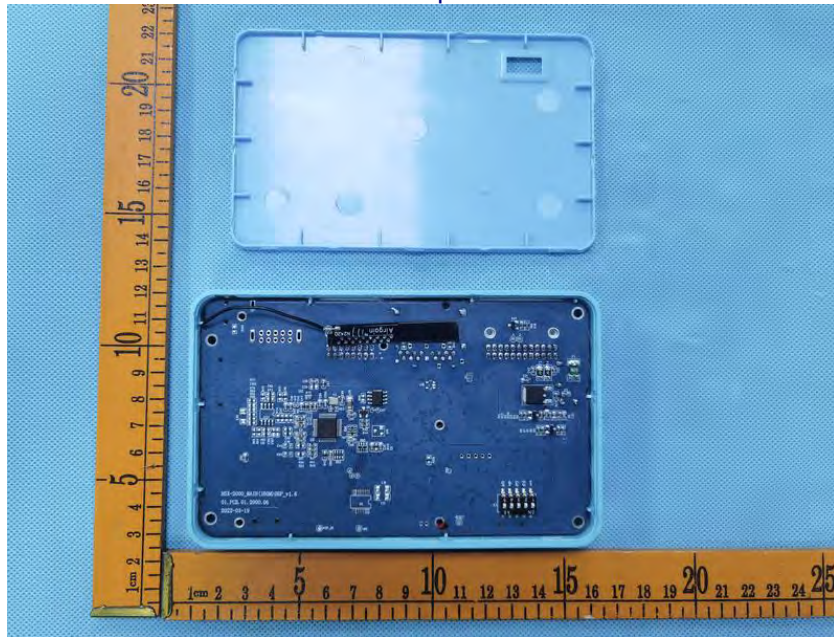

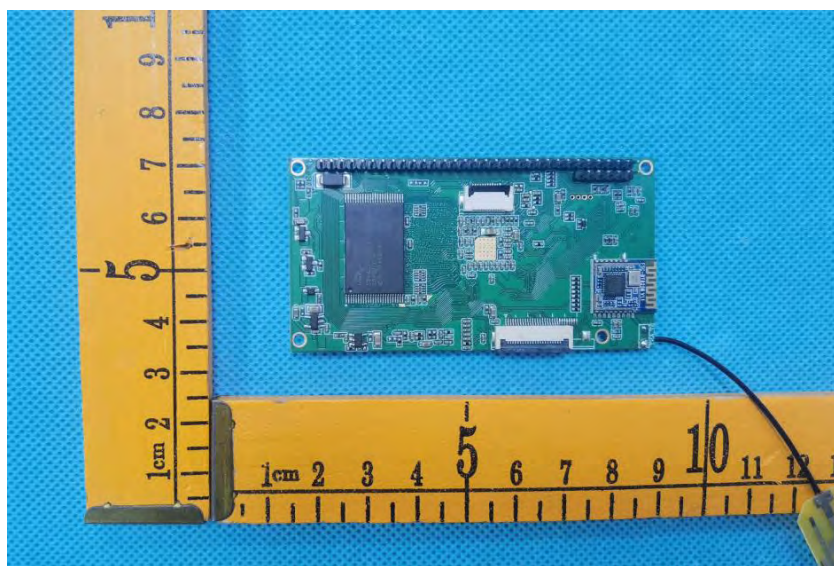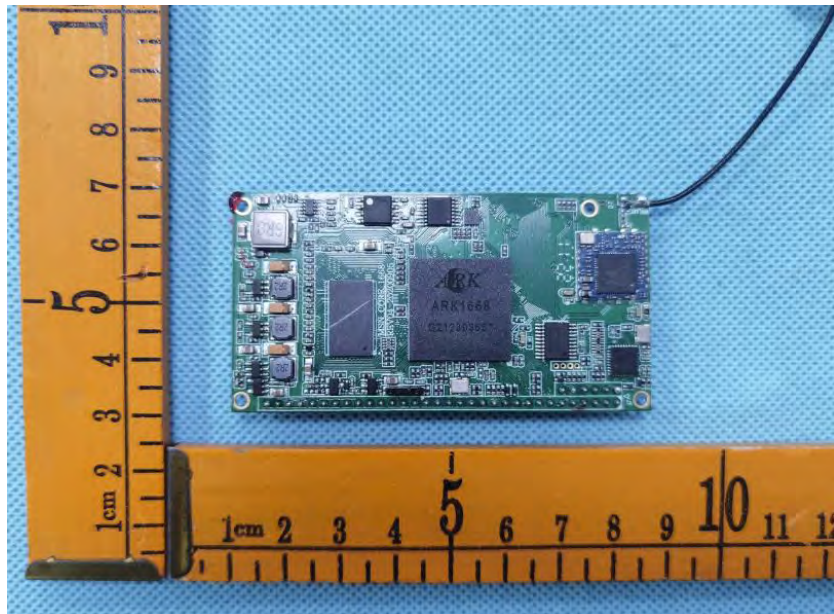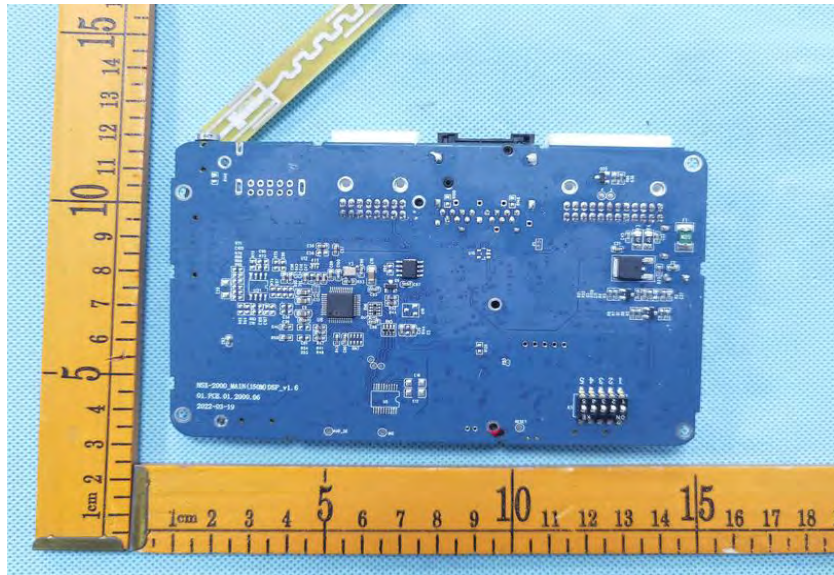

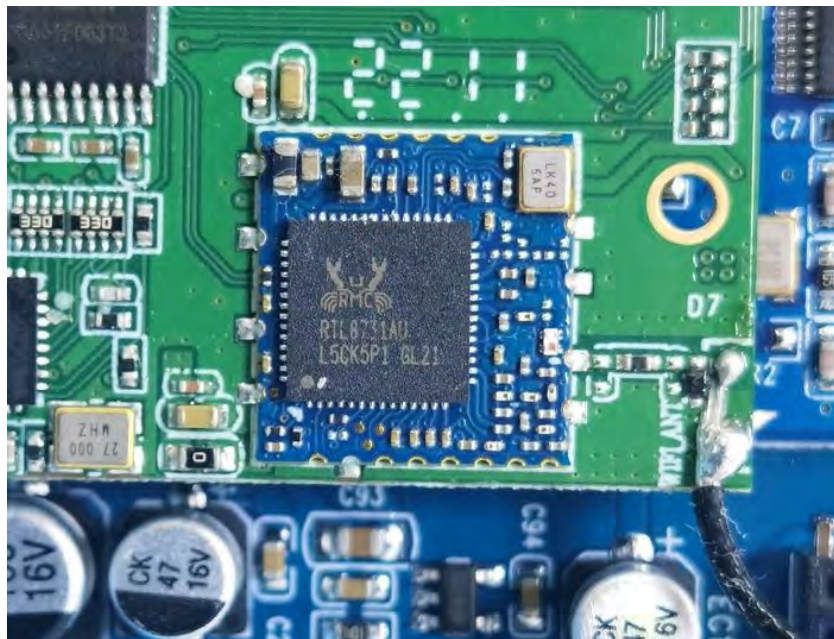

***** END OF REPORT *****