Occupied Bandwidth	
Channel	10MHz Bandwidth QPSK
Lowest	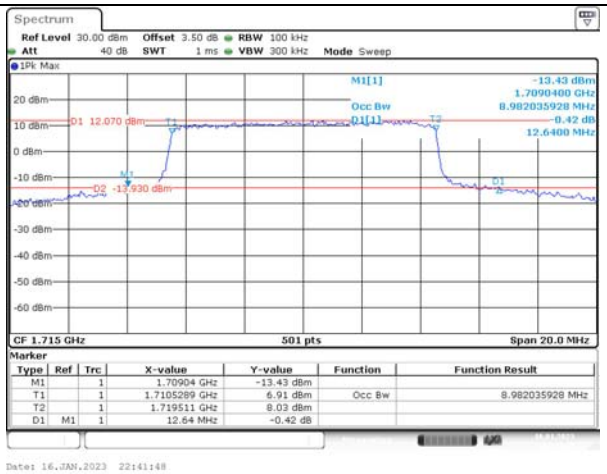
Middle	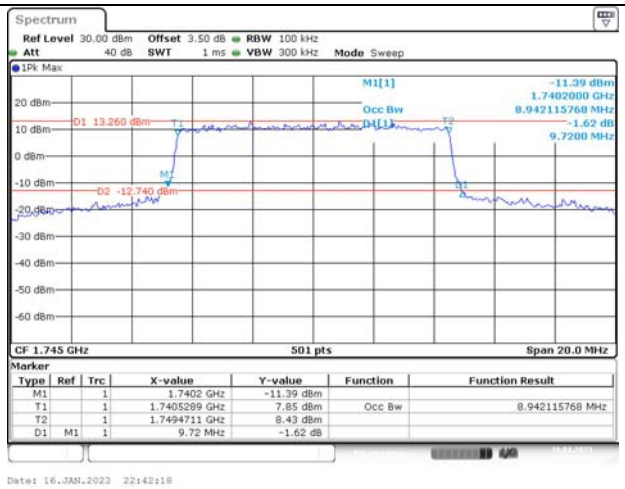
Highest	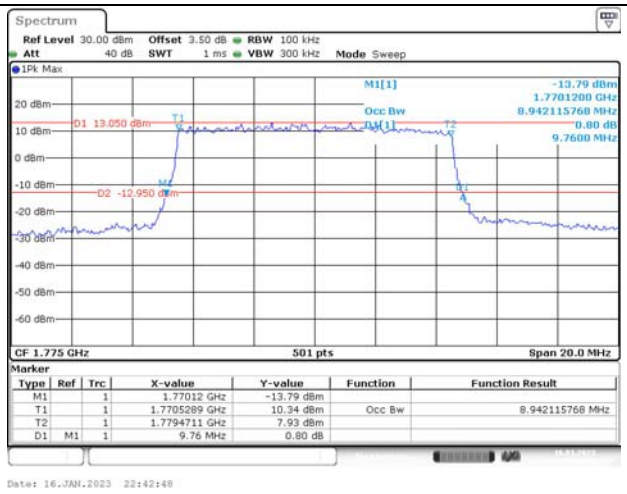

Occupied Bandwidth	
Channel	15MHz Bandwidth QPSK
Lowest	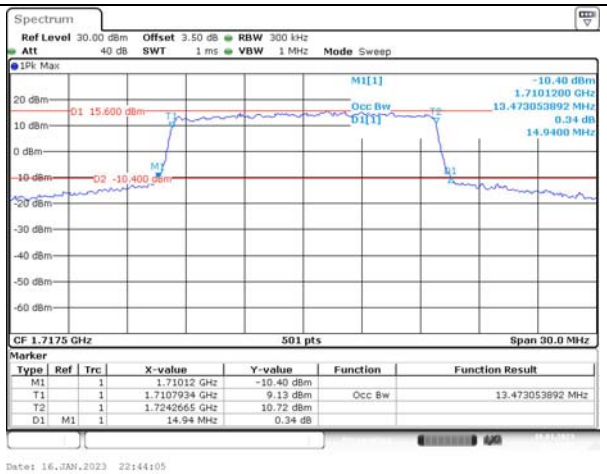
Middle	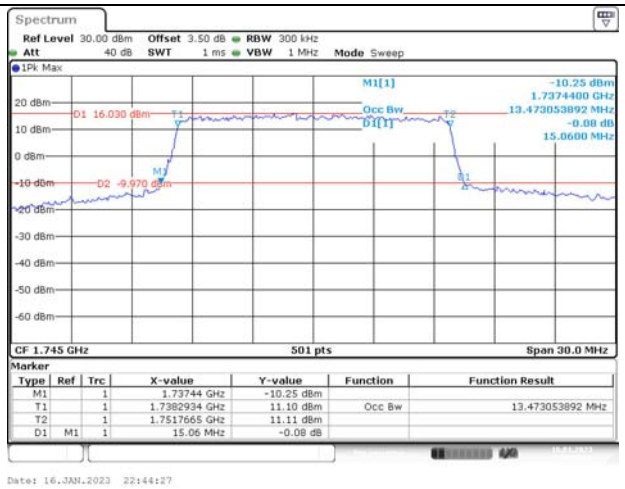
Highest	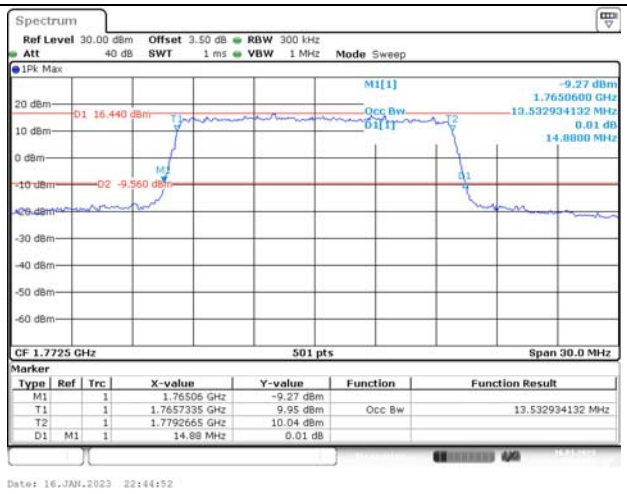

Occupied Bandwidth	
Channel	20MHz Bandwidth QPSK
Lowest	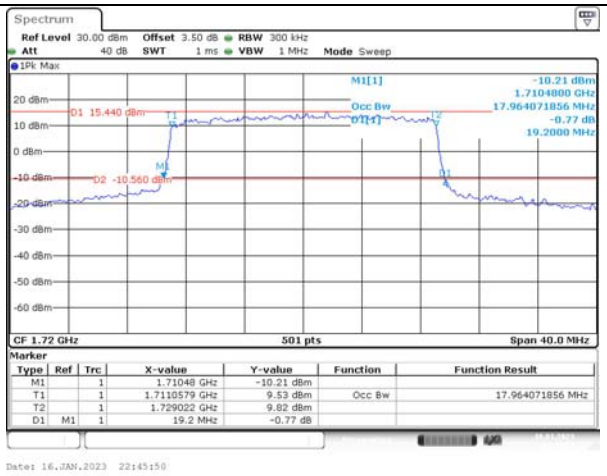
Middle	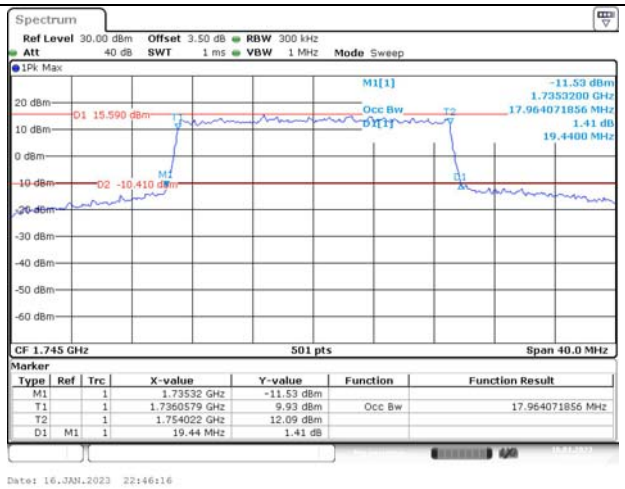
Highest	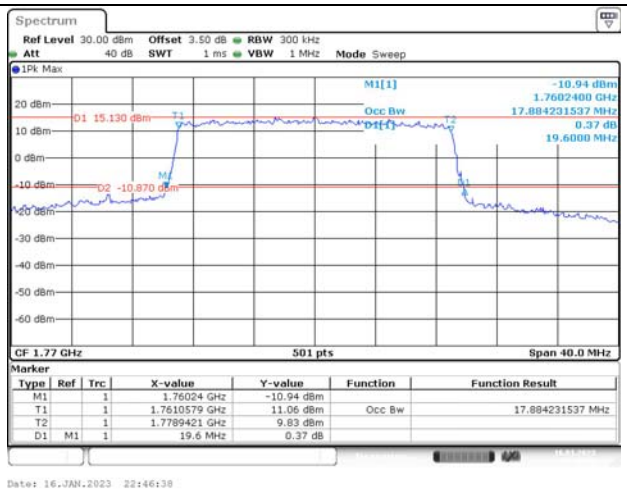

Spurious Emissions at Antenna Terminal		
Channel	**1.4MHz Bandwidth QPSK**	
Lowest	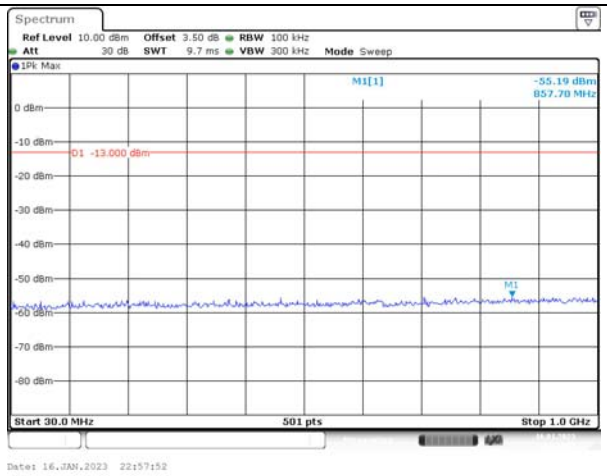	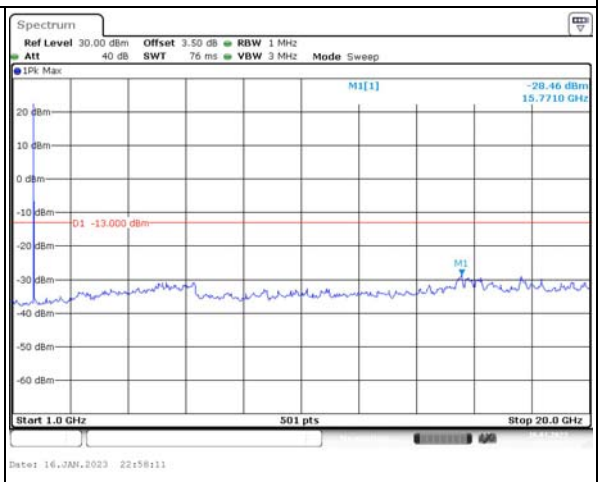
Middle	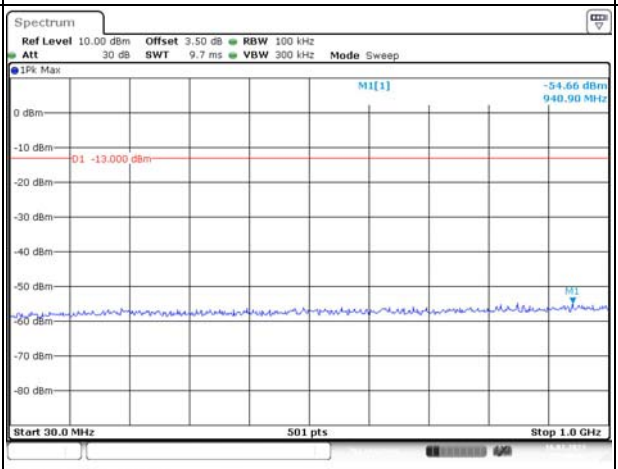	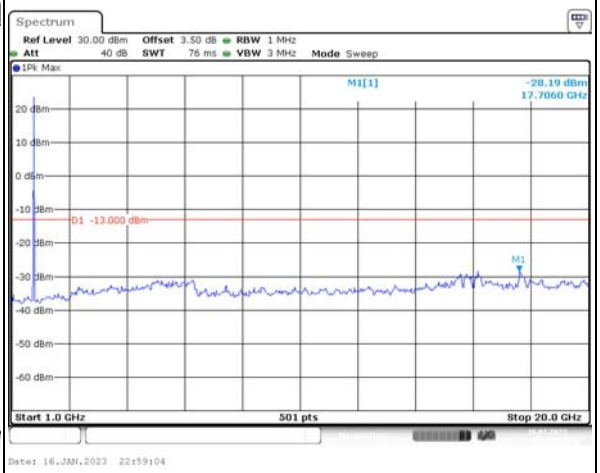
Highest	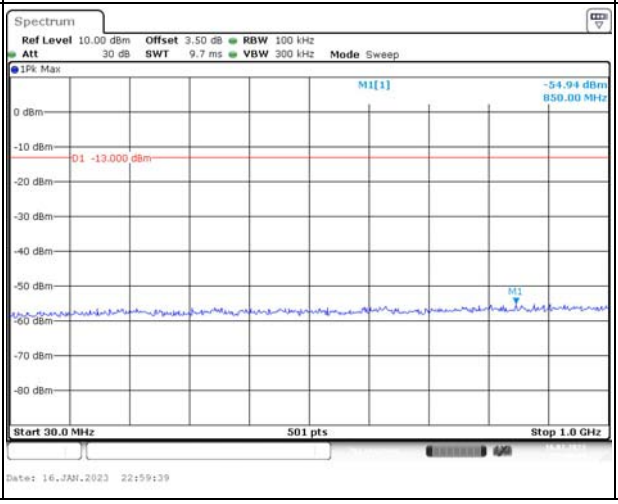	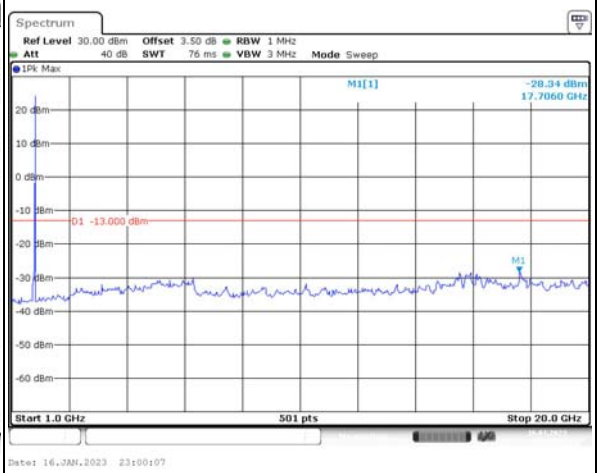

Spurious Emissions at Antenna Terminal		
Channel	**3MHz Bandwidth QPSK**	
Lowest	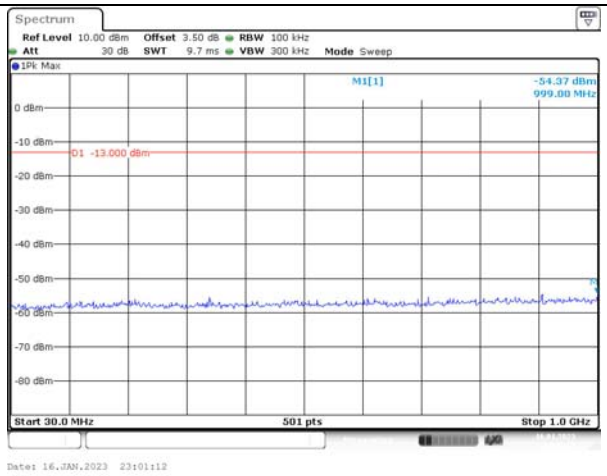	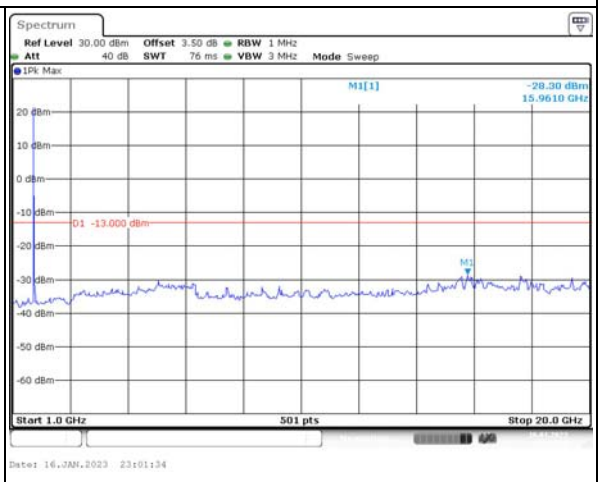
Middle	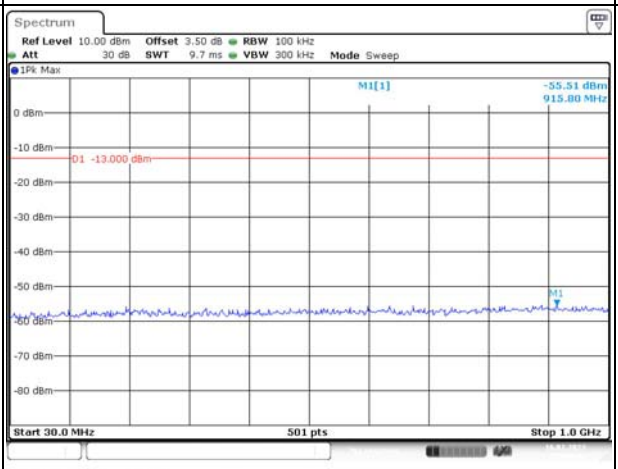	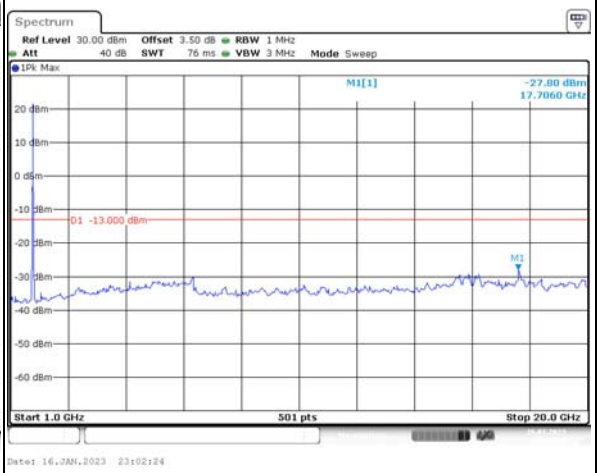
Highest	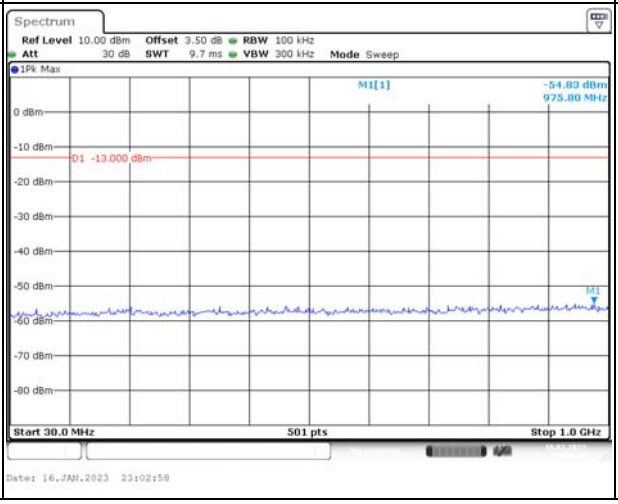	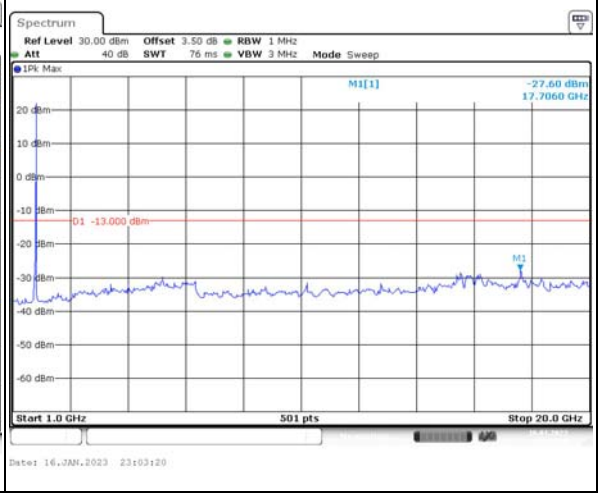

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	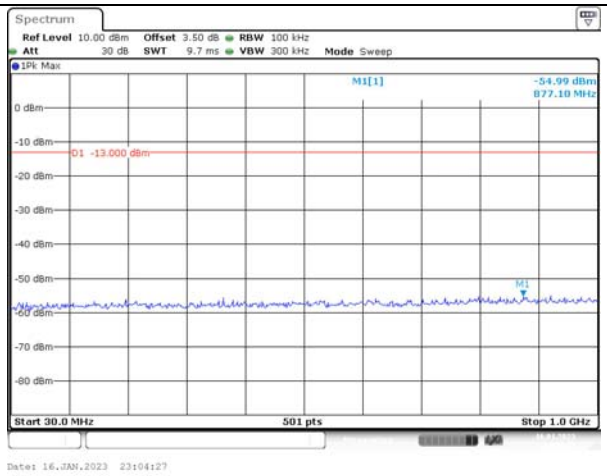	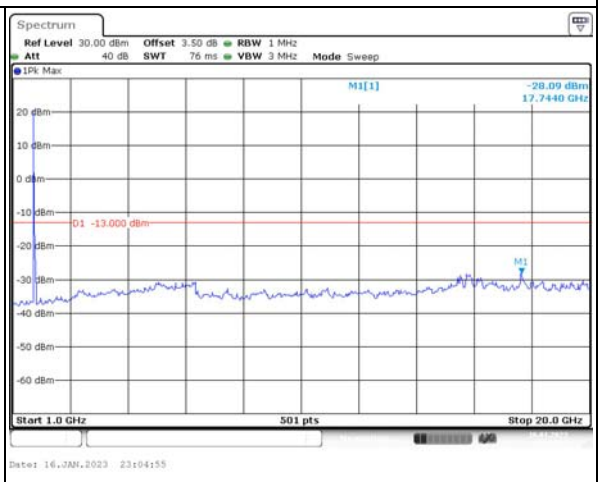
Middle	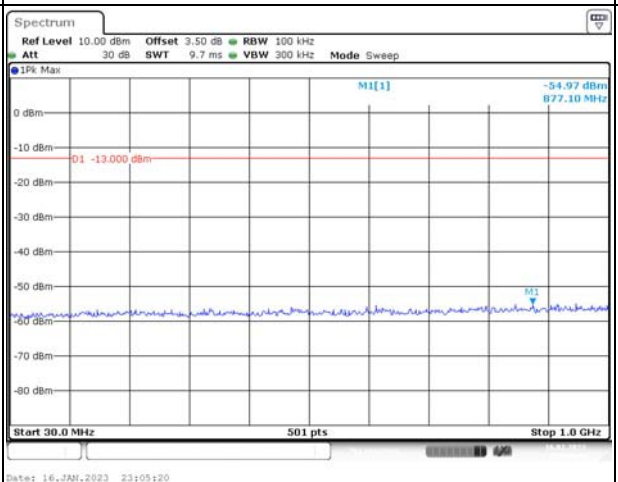	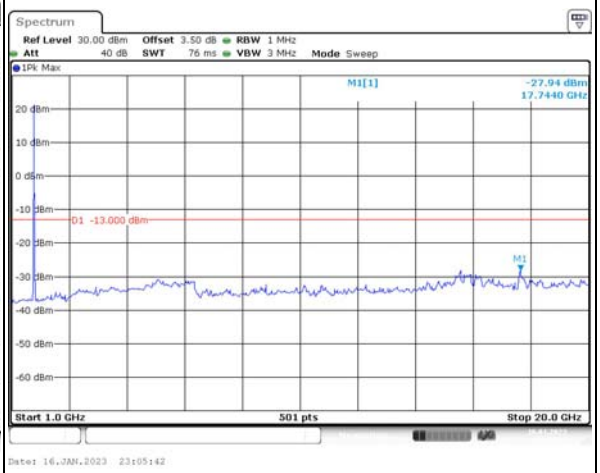
Highest	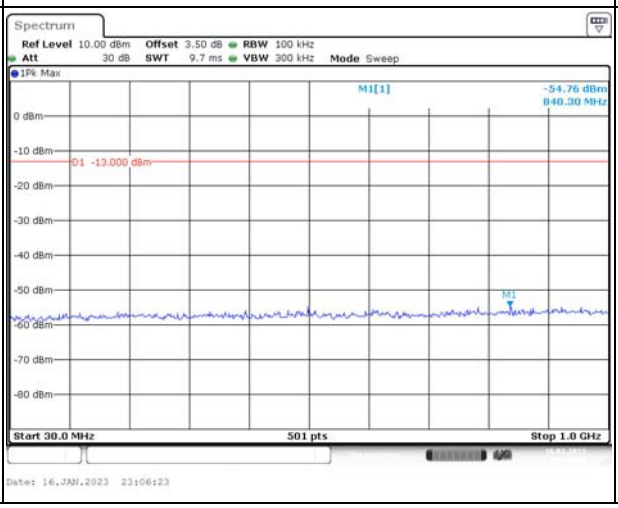	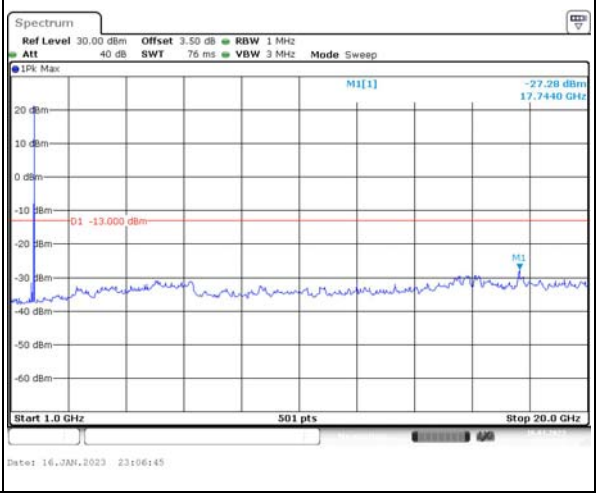

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	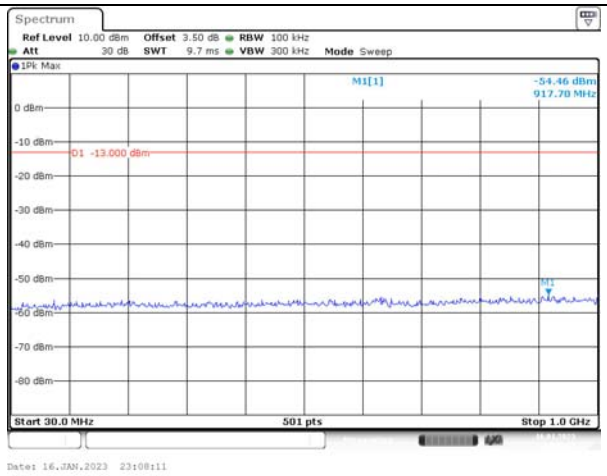	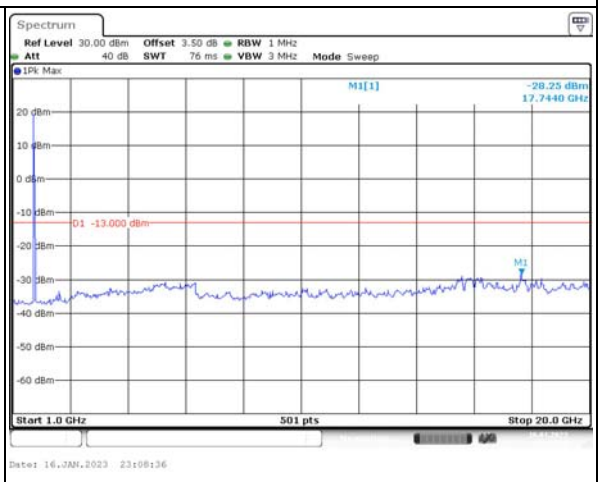
Middle	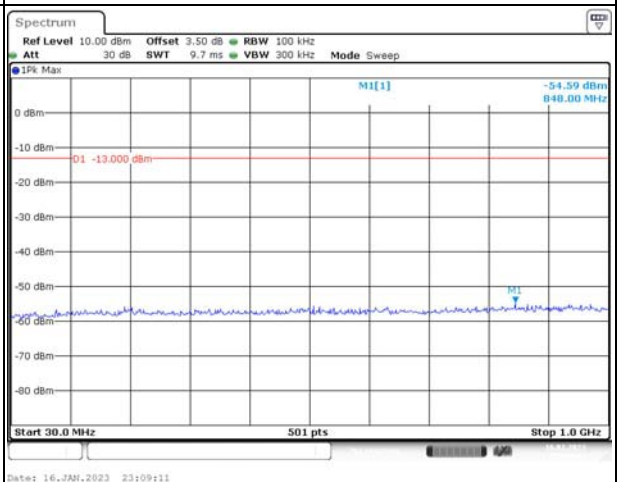	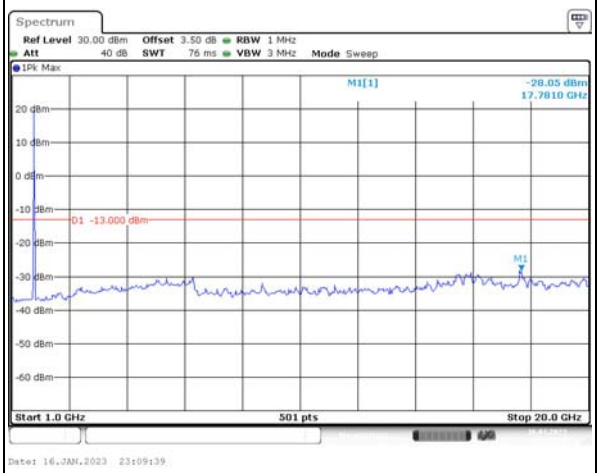
Highest	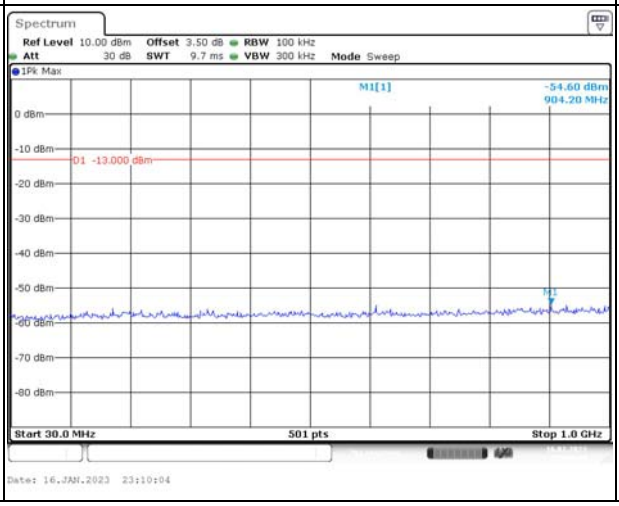	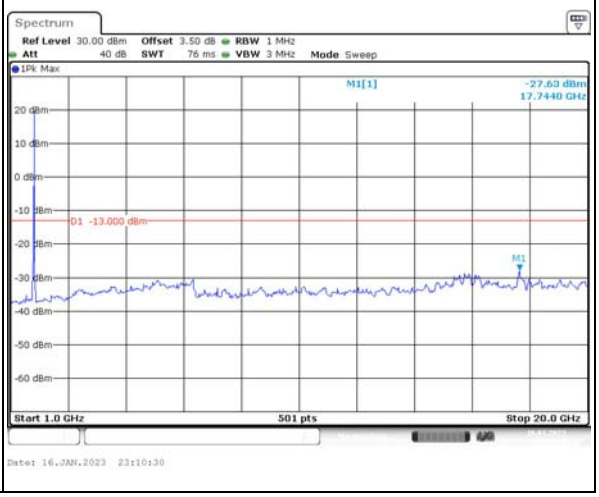

Spurious Emissions at Antenna Terminal		
Channel	**15MHz Bandwidth QPSK**	
Lowest	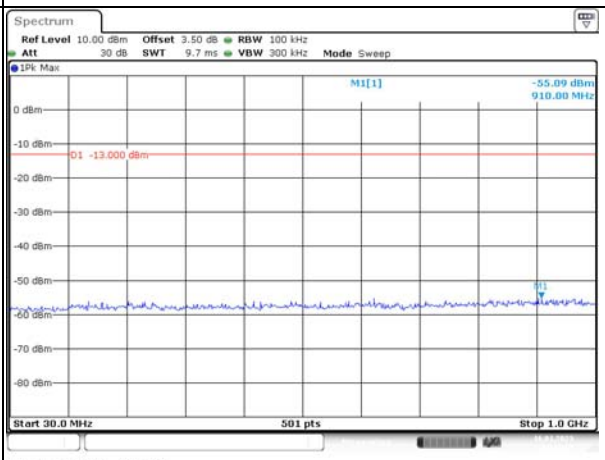	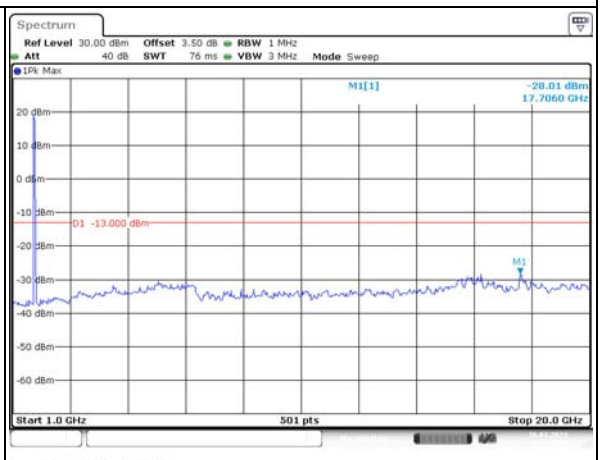
Middle	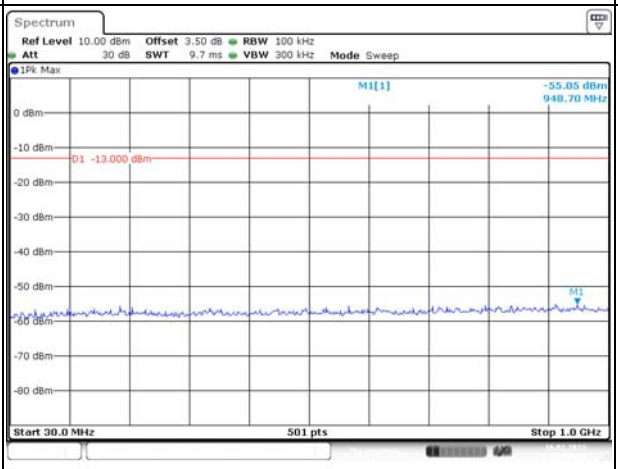	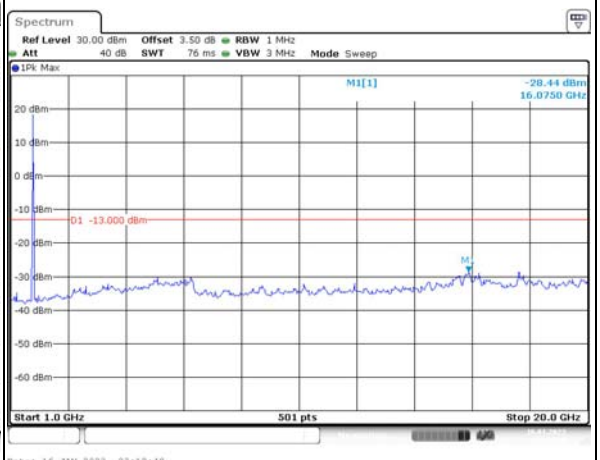
Highest	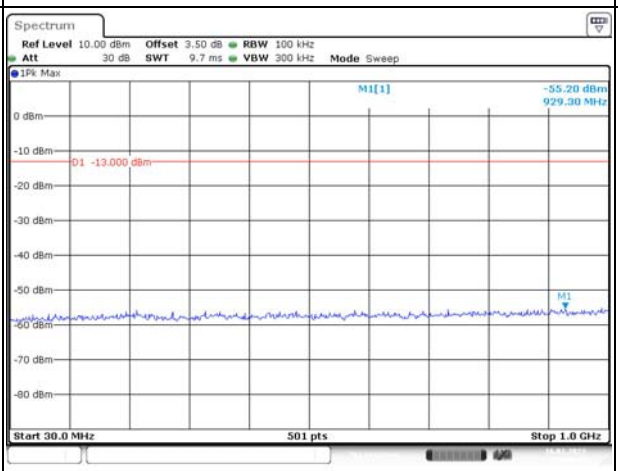	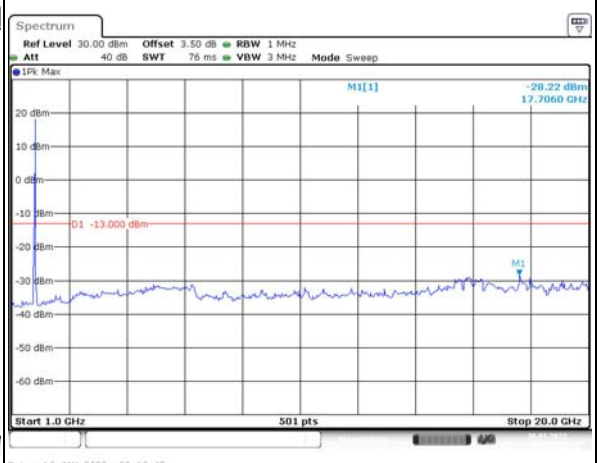

Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	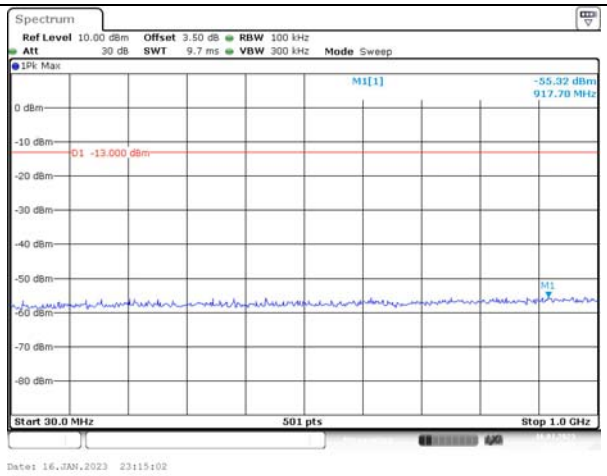	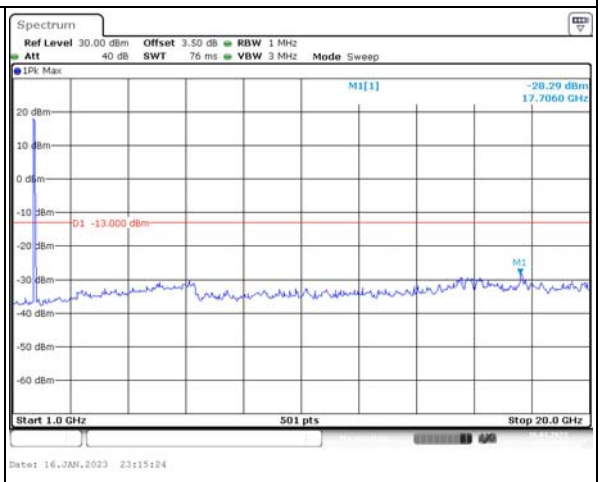
Middle	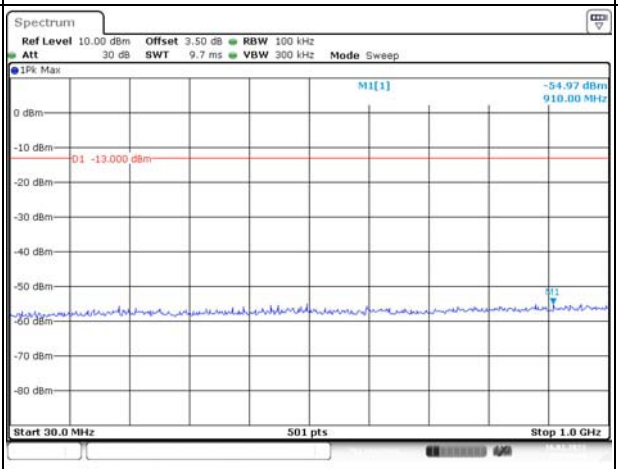	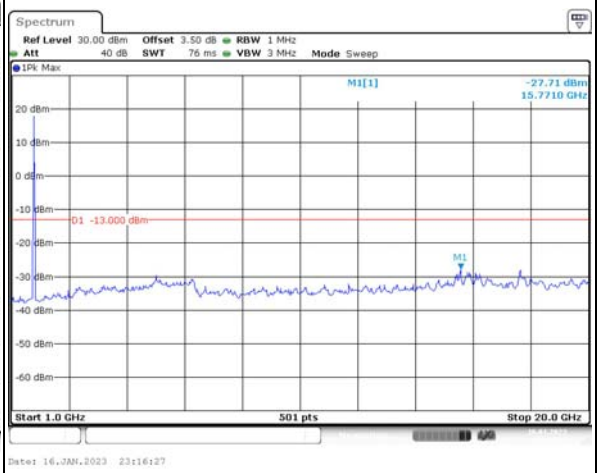
Highest	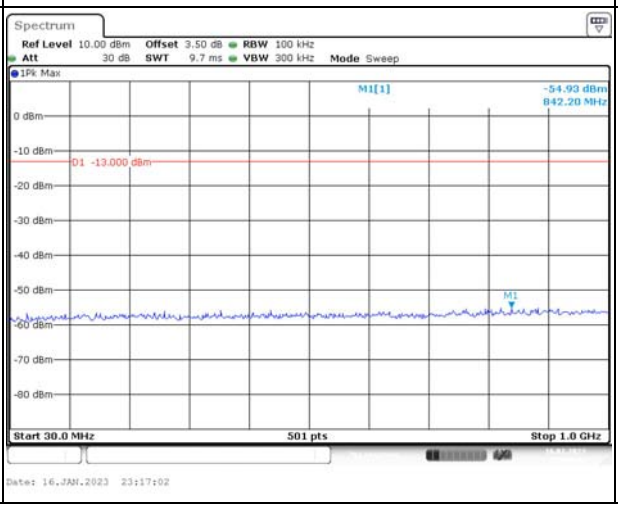	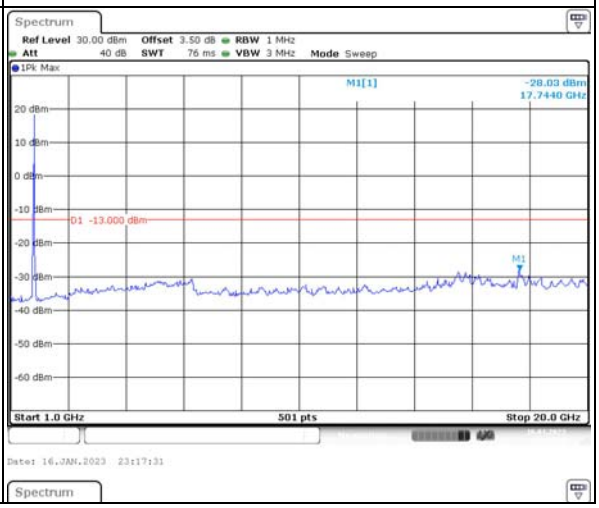

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz	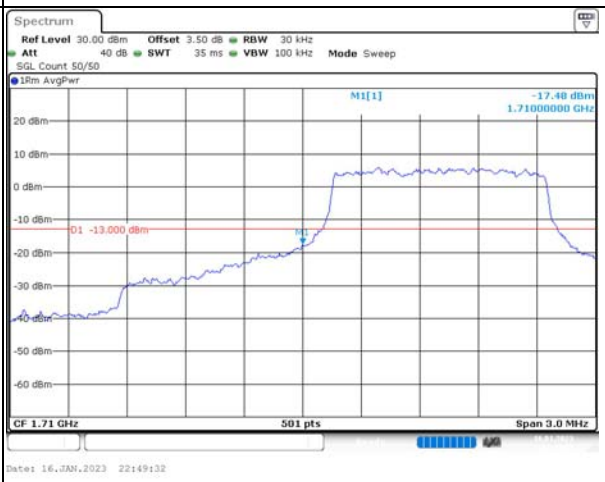	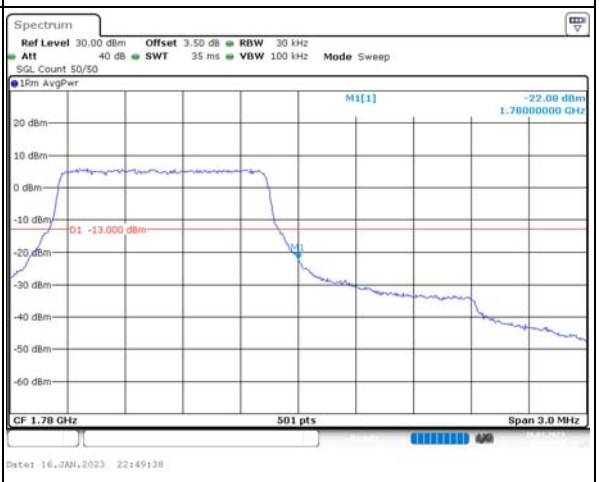
QPSK 3MHz	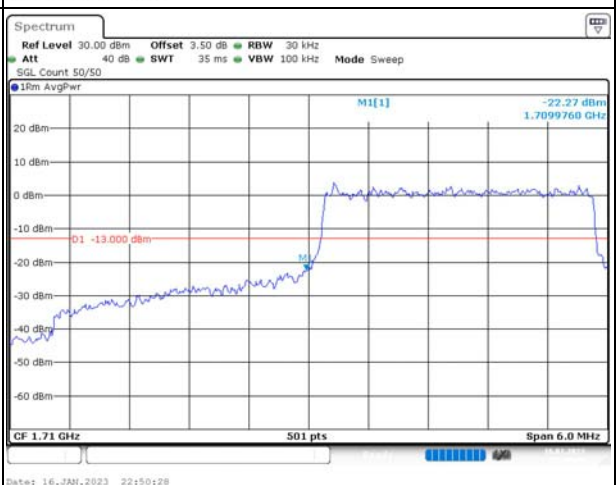	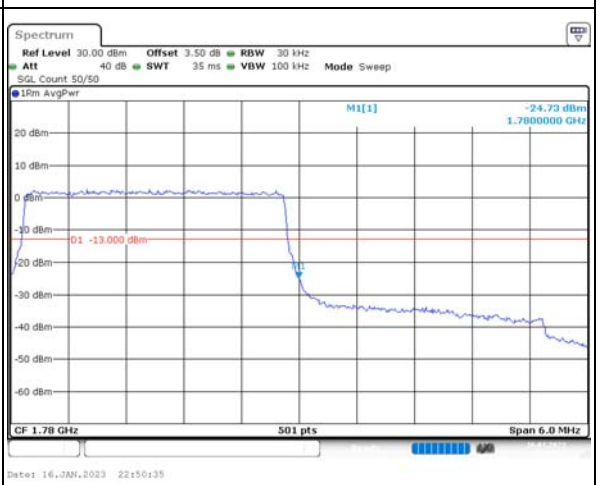
QPSK 5MHz	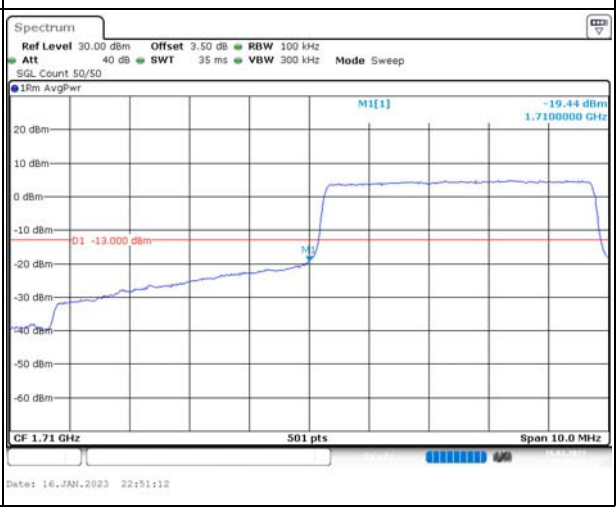	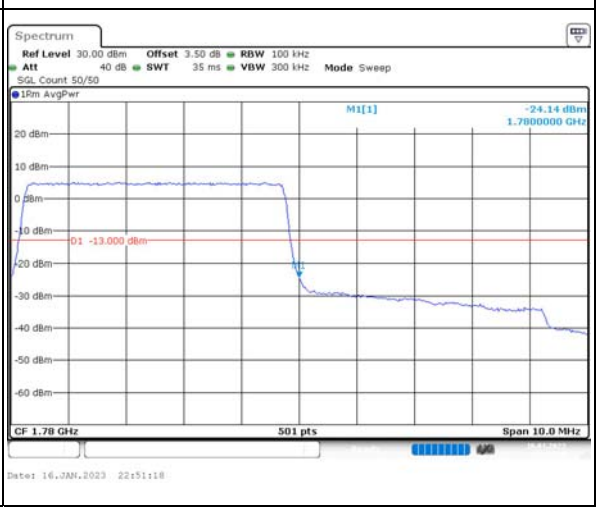

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	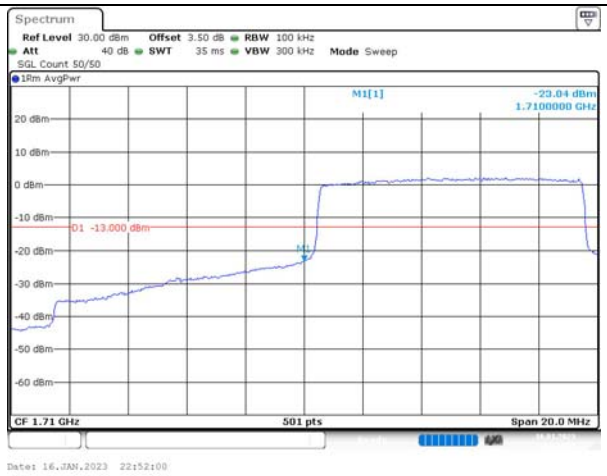	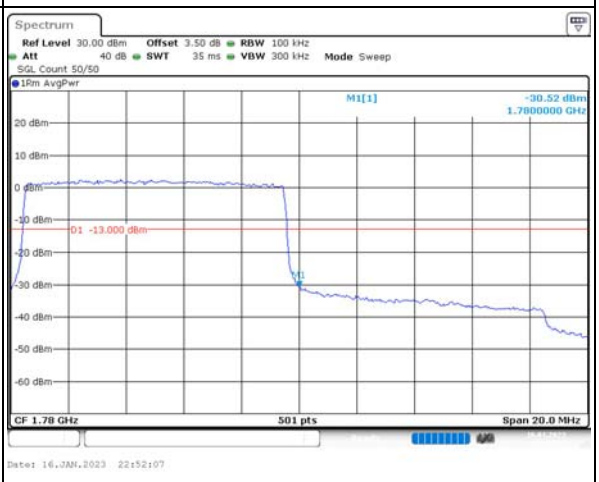
QPSK 15MHz	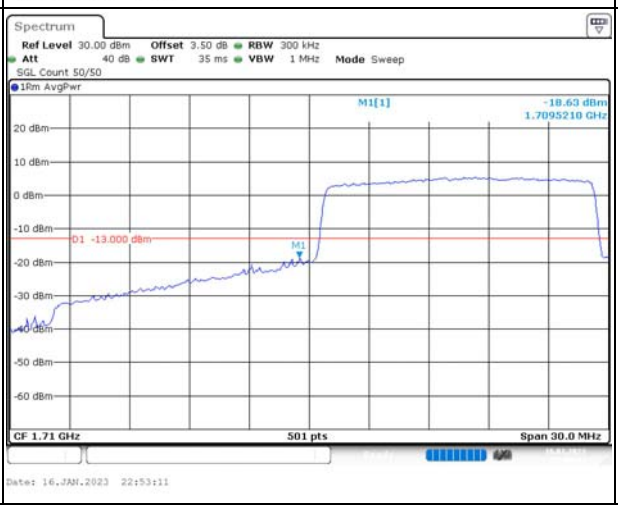	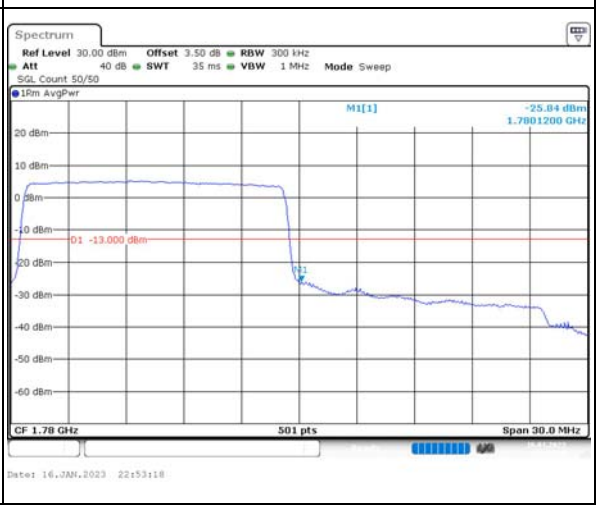
QPSK 20MHz		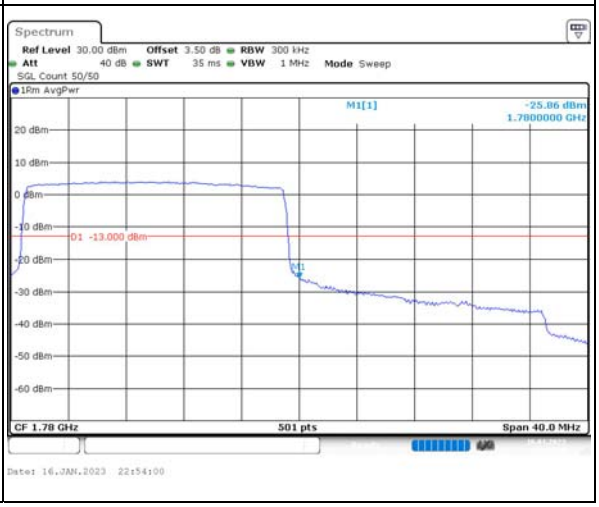

4.10 Radiated Spurious Emissions

Serial Number:	1WJB-1	Test Date:	2023/1/14~2023/2/4
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Mack Huang, Carl Xue	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	22.5~24.3	Relative Humidity: (%)	61~65	ATM Pressure: (kPa)	100.4~101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022/07/17	2023/07/16
Agilent	Signal Generator	E8247C	MY43321352	2022/04/01	2023/03/31
PASTERNACK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
PASTERNACK	Horn Antenna	PE9852/2F-20	112001	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
PASTERNACK	Horn Antenna	PE9850/2F-20	072001	2021/02/05	2024/02/04
PASTERNACK	Horn Antenna	PE9850/2F-20	072002	2021/02/05	2024/02/04
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022/07/17	2023/07/16

**** Statement of Traceability:*** *China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:
Please refer to the below table and plots.
Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.26 figure 5, the worst orientation was photographed and it`s data was recorded.

LTE Bands:
(The Worst modulation and bandwidth was below)

LTE Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1850.7 MHz								
170.19	H	35.97	-76.08	0.00	0.24	-76.32	-13.00	63.32
32.06	V	35.65	-46.34	-25.35	0.10	-71.79	-13.00	58.79
3701.400	H	35.12	-62.19	10.60	1.25	-52.84	-13.00	39.84
3701.400	V	34.78	-62.51	10.60	1.25	-53.16	-13.00	40.16
5552.100	H	37.47	-55.80	11.44	1.49	-45.85	-13.00	32.85
5552.100	V	36.68	-56.42	11.44	1.49	-46.47	-13.00	33.47
QPSK,Frequency:1880 MHz								
176.88	H	35.40	-76.95	0.00	0.25	-77.20	-13.00	64.20
31.73	V	37.07	-44.59	-25.50	0.10	-70.19	-13.00	57.19
3760.000	H	38.02	-58.39	10.66	1.24	-48.97	-13.00	35.97
3760.000	V	38.96	-57.33	10.66	1.24	-47.91	-13.00	34.91
5640.000	H	34.83	-58.62	11.33	1.54	-48.83	-13.00	35.83
5640.000	V	34.43	-58.90	11.33	1.54	-49.11	-13.00	36.11
QPSK,Frequency:1909.3 MHz								
168.41	H	36.71	-75.26	0.00	0.24	-75.50	-13.00	62.50
42.75	V	36.18	-57.20	-22.77	0.12	-80.09	-13.00	67.09
3818.600	H	40.24	-55.62	10.72	1.29	-46.19	-13.00	33.19
3818.600	V	41.72	-53.99	10.72	1.29	-44.56	-13.00	31.56
5727.900	H	35.65	-57.83	11.23	1.59	-48.19	-13.00	35.19
5727.900	V	35.12	-58.24	11.23	1.59	-48.60	-13.00	35.60

LTE Band 4 (30MHz-18GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1710.7 MHz								
168.41	H	35.45	-76.52	0.00	0.24	-76.76	-13.00	63.76
31.95	V	35.79	-46.09	-25.40	0.10	-71.59	-13.00	58.59
3421.400	H	36.02	-61.74	10.37	1.17	-52.54	-13.00	39.54
3421.400	V	35.27	-62.46	10.37	1.17	-53.26	-13.00	40.26
5132.100	H	35.11	-58.46	11.28	1.47	-48.65	-13.00	35.65
5132.100	V	34.72	-58.74	11.28	1.47	-48.93	-13.00	35.93
QPSK,Frequency:1732.5 MHz								
170.19	H	36.06	-75.99	0.00	0.24	-76.23	-13.00	63.23
42.30	V	35.44	-57.36	-23.36	0.12	-80.84	-13.00	67.84
3465.000	H	35.46	-62.35	10.39	1.15	-53.11	-13.00	40.11
3465.000	V	35.62	-62.15	10.39	1.15	-52.91	-13.00	39.91
5197.500	H	34.28	-59.85	11.32	1.44	-49.97	-13.00	36.97
5197.500	V	36.11	-57.87	11.32	1.44	-47.99	-13.00	34.99
QPSK,Frequency:1754.3MHz								
168.44	H	36.36	-75.62	0.00	0.24	-75.86	-13.00	62.86
31.84	V	36.54	-45.23	-25.45	0.10	-70.78	-13.00	57.78
3508.600	H	36.37	-61.45	10.41	1.19	-52.23	-13.00	39.23
3508.600	V	35.85	-61.91	10.41	1.19	-52.69	-13.00	39.69
5262.900	H	35.46	-58.24	11.36	1.47	-48.35	-13.00	35.35
5262.900	V	35.01	-58.46	11.36	1.47	-48.57	-13.00	35.57

LTE Band 5(30MHz-9GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 824.7 MHz								
729.45	H	21.08	-51.65	0.00	0.53	-52.18	-13.00	39.18
724.35	V	20.88	-48.51	0.00	0.51	-49.02	-13.00	36.02
1649.400	H	47.25	-57.08	8.68	0.80	-49.20	-13.00	36.20
1649.400	V	42.81	-61.60	8.68	0.80	-53.72	-13.00	40.72
2474.100	H	34.56	-66.22	9.38	1.00	-57.84	-13.00	44.84
2474.100	V	35.23	-65.50	9.38	1.00	-57.12	-13.00	44.12
3298.800	H	35.11	-61.57	10.32	1.15	-52.40	-13.00	39.40
3298.800	V	34.07	-62.37	10.32	1.15	-53.20	-13.00	40.20
QPSK, Frequency: 836.5 MHz								
719.30	H	21.59	-51.34	0.00	0.49	-51.83	-13.00	38.83
726.89	V	20.65	-48.68	0.00	0.52	-49.20	-13.00	36.20
1673.000	H	35.81	-68.50	8.71	0.85	-60.64	-13.00	47.64
1673.000	V	41.34	-63.07	8.71	0.85	-55.21	-13.00	42.21
2509.500	H	35.17	-65.44	9.42	1.01	-57.03	-13.00	44.03
2509.500	V	35.00	-65.62	9.42	1.01	-57.21	-13.00	44.21
3346.000	H	34.65	-62.51	10.34	1.16	-53.33	-13.00	40.33
3346.000	V	34.39	-62.63	10.34	1.16	-53.45	-13.00	40.45
QPSK, Frequency: 848.3 MHz								
726.89	H	21.60	-51.18	0.00	0.52	-51.70	-13.00	38.70
714.27	V	20.77	-48.84	0.00	0.50	-49.34	-13.00	36.34
1696.600	H	49.46	-54.83	8.74	0.89	-46.98	-13.00	33.98
1696.600	V	42.72	-61.70	8.74	0.89	-53.85	-13.00	40.85
2544.900	H	34.23	-66.11	9.47	1.01	-57.65	-13.00	44.65
2544.900	V	35.02	-65.28	9.47	1.01	-56.82	-13.00	43.82
3393.200	H	34.39	-63.28	10.36	1.19	-54.11	-13.00	41.11
3393.200	V	34.22	-63.41	10.36	1.19	-54.24	-13.00	41.24

LTE Band 7 (30MHz-26.5GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2502.5 MHz								
180.01	H	35.22	-77.27	0.00	0.25	-77.52	-25.00	52.52
31.39	V	35.53	-45.79	-25.66	0.10	-71.55	-25.00	46.55
5005.000	H	36.66	-56.30	11.20	1.47	-46.57	-25.00	21.57
5005.000	V	34.78	-58.04	11.20	1.47	-48.31	-25.00	23.31
7507.500	H	35.12	-54.67	10.90	1.95	-45.72	-25.00	20.72
7507.500	V	35.56	-54.73	10.90	1.95	-45.78	-25.00	20.78
QPSK, Frequency:2535 MHz								
171.40	H	35.41	-76.70	0.00	0.24	-76.94	-25.00	51.94
31.51	V	36.12	-45.32	-25.61	0.10	-71.03	-25.00	46.03
5070.000	H	34.25	-58.94	11.24	1.47	-49.17	-25.00	24.17
5070.000	V	35.39	-57.70	11.24	1.47	-47.93	-25.00	22.93
7605.000	H	36.14	-53.33	10.88	2.01	-44.46	-25.00	19.46
7605.000	V	35.23	-54.96	10.88	2.01	-46.09	-25.00	21.09
QPSK, Frequency: 2567.5 MHz								
170.19	H	35.10	-76.95	0.00	0.24	-77.19	-25.00	52.19
42.15	V	35.65	-56.96	-23.56	0.12	-80.64	-25.00	55.64
5135.000	H	35.52	-58.08	11.28	1.47	-48.27	-25.00	23.27
5135.000	V	36.25	-57.24	11.28	1.47	-47.43	-25.00	22.43
7702.500	H	34.77	-54.75	10.86	1.97	-45.86	-25.00	20.86
7702.500	V	35.68	-54.50	10.86	1.97	-45.61	-25.00	20.61

LTE Band 12 (30MHz-8GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 699.7 MHz								
575.93	H	20.62	-53.71	0.00	0.46	-54.17	-13.00	41.17
624.26	V	20.46	-50.83	0.00	0.48	-51.31	-13.00	38.31
1399.400	H	38.12	-65.58	8.22	0.71	-58.07	-13.00	45.07
1399.400	V	41.00	-62.75	8.22	0.71	-55.24	-13.00	42.24
2099.100	H	35.11	-66.77	9.16	0.91	-58.52	-13.00	45.52
2099.100	V	34.27	-67.56	9.16	0.91	-59.31	-13.00	46.31
2798.800	H	36.74	-63.19	9.88	1.04	-54.35	-13.00	41.35
2798.800	V	40.84	-58.96	9.88	1.04	-50.12	-13.00	37.12
3498.500	H	51.29	-46.56	10.40	1.18	-37.34	-13.00	24.34
3498.500	V	56.47	-41.32	10.40	1.18	-32.10	-13.00	19.10
QPSK, Frequency:707.5 MHz								
550.29	H	20.85	-53.99	0.00	0.47	-54.46	-13.00	41.46
630.85	V	21.20	-49.97	0.00	0.49	-50.46	-13.00	37.46
1415.000	H	44.55	-59.12	8.26	0.72	-51.58	-13.00	38.58
1415.000	V	41.47	-62.25	8.26	0.72	-54.71	-13.00	41.71
2122.500	H	35.07	-66.92	9.17	0.92	-58.67	-13.00	45.67
2122.500	V	35.13	-66.84	9.17	0.92	-58.59	-13.00	45.59
2830.000	H	40.34	-59.46	9.93	1.06	-50.59	-13.00	37.59
2830.000	V	42.24	-57.49	9.93	1.06	-48.62	-13.00	35.62
3537.500	H	46.25	-51.49	10.44	1.21	-42.26	-13.00	29.26
3537.500	V	42.77	-54.88	10.44	1.21	-45.65	-13.00	32.65
QPSK, Frequency: 715.3 MHz								
762.22	H	20.63	-51.43	0.00	0.52	-51.95	-13.00	38.95
626.45	V	20.93	-50.32	0.00	0.48	-50.80	-13.00	37.80
1430.600	H	47.38	-56.25	8.31	0.73	-48.67	-13.00	35.67
1430.600	V	40.53	-63.16	8.31	0.73	-55.58	-13.00	42.58
2145.900	H	35.80	-66.30	9.19	0.93	-58.04	-13.00	45.04
2145.900	V	35.62	-66.49	9.19	0.93	-58.23	-13.00	45.23
2861.200	H	43.95	-55.70	9.98	1.07	-46.79	-13.00	33.79
2861.200	V	46.63	-53.04	9.98	1.07	-44.13	-13.00	31.13
3576.500	H	55.54	-42.08	10.48	1.23	-32.83	-13.00	19.83
3576.500	V	57.49	-40.01	10.48	1.23	-30.76	-13.00	17.76

LTE Band 13:(30MHz-8GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK, Frequency: 779.5 MHz								
728.29	H	20.54	-52.21	0.00	0.52	-52.73	-13.00	39.73
720.67	V	21.55	-47.92	0.00	0.49	-48.41	-13.00	35.41
1559.000	H	36.12	-67.87	8.57	0.80	-60.10	-40.00	20.10
1559.000	V	35.22	-68.83	8.57	0.80	-61.06	-40.00	21.06
2338.500	H	35.28	-66.31	9.30	0.97	-57.98	-13.00	44.98
2338.500	V	34.07	-67.29	9.30	0.97	-58.96	-13.00	45.96
3118.000	H	35.27	-62.22	10.25	1.13	-53.10	-13.00	40.10
3118.000	V	34.16	-63.19	10.25	1.13	-54.07	-13.00	41.07
5MHz QPSK, Frequency: 784.5 MHz								
710.65	H	20.75	-52.35	0.00	0.52	-52.87	-13.00	39.87
720.67	V	21.04	-48.43	0.00	0.49	-48.92	-13.00	35.92
1569.000	H	35.12	-68.96	8.58	0.81	-61.19	-40.00	21.19
1569.000	V	35.74	-68.39	8.58	0.81	-60.62	-40.00	20.62
2353.500	H	34.33	-67.12	9.31	0.97	-58.78	-13.00	45.78
2353.500	V	35.06	-66.16	9.31	0.97	-57.82	-13.00	44.82
3138.000	H	33.89	-63.51	10.26	1.14	-54.39	-13.00	41.39
3138.000	V	34.24	-62.99	10.26	1.14	-53.87	-13.00	40.87

LTE Band 17 (30MHz-8GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 706.5 MHz								
613.42	H	20.64	-53.15	0.00	0.48	-53.63	-13.00	40.63
522.12	V	21.18	-50.43	0.00	0.41	-50.84	-13.00	37.84
1413.000	H	43.78	-59.89	8.26	0.72	-52.35	-13.00	39.35
1413.000	V	39.95	-63.77	8.26	0.72	-56.23	-13.00	43.23
2119.500	H	35.47	-66.50	9.17	0.92	-58.25	-13.00	45.25
2119.500	V	36.11	-65.84	9.17	0.92	-57.59	-13.00	44.59
2826.000	H	35.78	-64.03	9.92	1.06	-55.17	-13.00	42.17
2826.000	V	35.23	-64.51	9.92	1.06	-55.65	-13.00	42.65
3532.500	H	46.44	-51.31	10.43	1.21	-42.09	-13.00	29.09
3532.500	V	47.95	-49.72	10.43	1.21	-40.50	-13.00	27.50
QPSK, Frequency:710 MHz								
588.16	H	20.72	-53.37	0.00	0.47	-53.84	-13.00	40.84
571.91	V	20.93	-50.76	0.00	0.46	-51.22	-13.00	38.22
1420.000	H	41.74	-61.92	8.28	0.73	-54.37	-13.00	41.37
1420.000	V	38.11	-65.60	8.28	0.73	-58.05	-13.00	45.05
2130.000	H	35.02	-67.00	9.18	0.92	-58.74	-13.00	45.74
2130.000	V	36.13	-65.88	9.18	0.92	-57.62	-13.00	44.62
2840.000	H	35.55	-64.20	9.94	1.06	-55.32	-13.00	42.32
2840.000	V	35.27	-64.44	9.94	1.06	-55.56	-13.00	42.56
3550.000	H	44.97	-52.73	10.45	1.22	-43.50	-13.00	30.50
3550.000	V	40.27	-57.33	10.45	1.22	-48.10	-13.00	35.10
QPSK, Frequency: 713.5 MHz								
617.73	H	21.11	-52.65	0.00	0.49	-53.14	-13.00	40.14
624.26	V	20.76	-50.53	0.00	0.48	-51.01	-13.00	38.01
1427.000	H	43.19	-60.45	8.30	0.73	-52.88	-13.00	39.88
1427.000	V	39.54	-64.15	8.30	0.73	-56.58	-13.00	43.58
2140.500	H	35.23	-66.84	9.18	0.93	-58.59	-13.00	45.59
2140.500	V	35.55	-66.53	9.18	0.93	-58.28	-13.00	45.28
2854.000	H	37.47	-62.22	9.97	1.07	-53.32	-13.00	40.32
2854.000	V	39.15	-60.53	9.97	1.07	-51.63	-13.00	38.63
3567.500	H	48.28	-49.37	10.47	1.23	-40.13	-13.00	27.13
3567.500	V	47.81	-49.72	10.47	1.23	-40.48	-13.00	27.48

LTE Band 41(30MHz-27GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2557.5 MHz								
169.59	H	35.39	-76.64	0.00	0.24	-76.88	-25.00	51.88
31.95	V	36.27	-45.61	-25.40	0.10	-71.11	-25.00	46.11
5115.000	H	35.46	-57.97	11.27	1.51	-48.21	-25.00	23.21
5115.000	V	34.28	-59.05	11.27	1.51	-49.29	-25.00	24.29
7672.500	H	36.11	-53.40	10.87	2.03	-44.56	-25.00	19.56
7672.500	V	35.74	-54.45	10.87	2.03	-45.61	-25.00	20.61
QPSK, Frequency: 2605 MHz								
171.38	H	35.16	-76.95	0.00	0.24	-77.19	-25.00	52.19
31.84	V	35.83	-45.94	-25.45	0.10	-71.49	-25.00	46.49
5210.000	H	35.55	-58.53	11.33	1.45	-48.65	-25.00	23.65
5210.000	V	35.78	-58.14	11.33	1.45	-48.26	-25.00	23.26
7815.000	H	36.13	-53.27	10.84	1.99	-44.42	-25.00	19.42
7815.000	V	34.28	-55.51	10.84	1.99	-46.66	-25.00	21.66
QPSK, Frequency: 2652.5 MHz								
167.82	H	35.69	-76.26	0.00	0.24	-76.50	-25.00	51.50
42.75	V	36.20	-57.18	-22.77	0.12	-80.07	-25.00	55.07
5305.000	H	36.11	-57.33	11.38	1.46	-47.41	-25.00	22.41
5305.000	V	35.28	-57.90	11.38	1.46	-47.98	-25.00	22.98
7957.500	H	35.36	-53.06	10.81	2.09	-44.34	-25.00	19.34
7957.500	V	34.06	-54.81	10.81	2.09	-46.09	-25.00	21.09

LTE Band 66(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1710.7 MHz								
170.79	H	34.65	-77.43	0.00	0.24	-77.67	-13.00	64.67
31.84	V	36.48	-45.29	-25.45	0.10	-70.84	-13.00	57.84
3421.400	H	36.11	-61.65	10.37	1.17	-52.45	-13.00	39.45
3421.400	V	34.65	-63.08	10.37	1.17	-53.88	-13.00	40.88
5132.100	H	35.23	-58.34	11.28	1.47	-48.53	-13.00	35.53
5132.100	V	35.02	-58.44	11.28	1.47	-48.63	-13.00	35.63
QPSK, Frequency:1745 MHz								
164.90	H	34.41	-77.41	0.00	0.24	-77.65	-13.00	64.65
31.51	V	35.83	-45.61	-25.61	0.10	-71.32	-13.00	58.32
3490.000	H	34.63	-63.21	10.40	1.17	-53.98	-13.00	40.98
3490.000	V	35.22	-62.56	10.40	1.17	-53.33	-13.00	40.33
5235.000	H	33.78	-60.12	11.34	1.46	-50.24	-13.00	37.24
5235.000	V	35.29	-58.42	11.34	1.46	-48.54	-13.00	35.54
QPSK, Frequency: 1779.3 MHz								
168.41	H	35.69	-76.28	0.00	0.24	-76.52	-13.00	63.52
31.84	V	36.07	-45.70	-25.45	0.10	-71.25	-13.00	58.25
3558.600	H	38.25	-59.42	10.46	1.22	-50.18	-13.00	37.18
3558.600	V	39.02	-58.55	10.46	1.22	-49.31	-13.00	36.31
5337.900	H	35.46	-58.01	11.40	1.47	-48.08	-13.00	35.08
5337.900	V	36.05	-57.28	11.40	1.47	-47.35	-13.00	34.35

Note:
1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
3) Margin = Limit-Absolute Level

==== END OF REPORT =====