

AT7020 Series

Multilayer Chip Antenna

Features

- ❖ Monolithic SMD with small, low-profile and light-weight type.
- ❖ Wide bandwidth

Applications

- ❖ 2.4GHz WLAN, Home RF, Bluetooth Modules, etc.



Specifications

Part Number	Operating Frequency (MHz)	Peak Gain (dBi typ.)	Average Gain (dBi typ.)	VSWR	Impedance
AT7020-E3R0HBA_	2400~2500	1.3dBi (XZ-V)	-0.5dBi (XZ-V)	2 max.	50 Ω


Q'ty/Reel (pcs) : 1,000 pcs
 Operating Temperature Range : -40 ~ +85 °C
 Storage Temperature Range : -40 ~ +85 °C
 Storage Period : 12 months max.
 Power Capacity : 2W max.

Part Number

AT **7020** - **E** **3R0** **HBA** **□** **□**
 ① ② ③ ④ ⑤ ⑥ ⑦


① Type	AT : Antenna	② Dimensions (L × W)	7.0× 2.0 mm
③ Material Code	E	④ Initial center frequency	3R0=3000MHz
⑤ Specification Code	HBA	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	=lead-containing /LF=lead-free		

Terminal Configuration

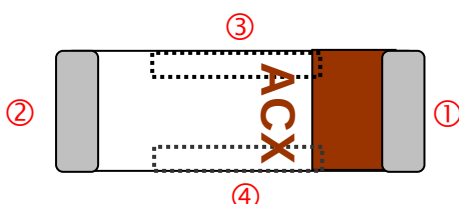


No.	Terminal Name	No.	Terminal Name
①	Feeding Point	③	NC
②	NC	④	NC

Dimnsions and Recommended PC Board Pattern

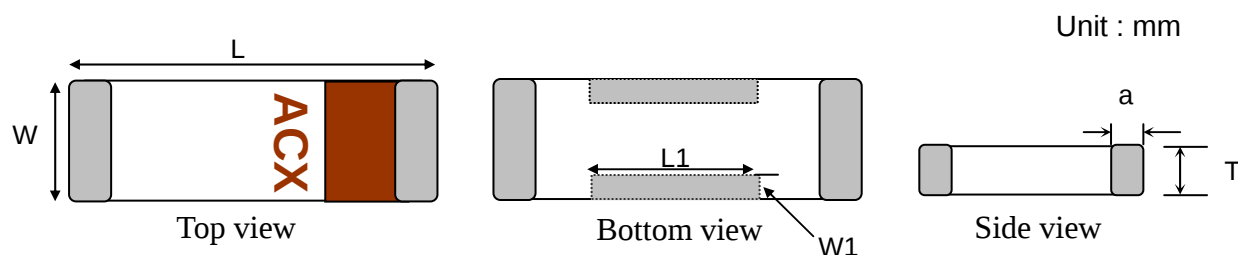

Mark	L	W	L1	W1	T	a
Dimensions	7.0±0.2	2.0±0.2	2.6±0.2	0.5±0.2	2.0+ 0.1/-0.2	0.5±0.3

❖With Matching Circuits (Unit in mm)

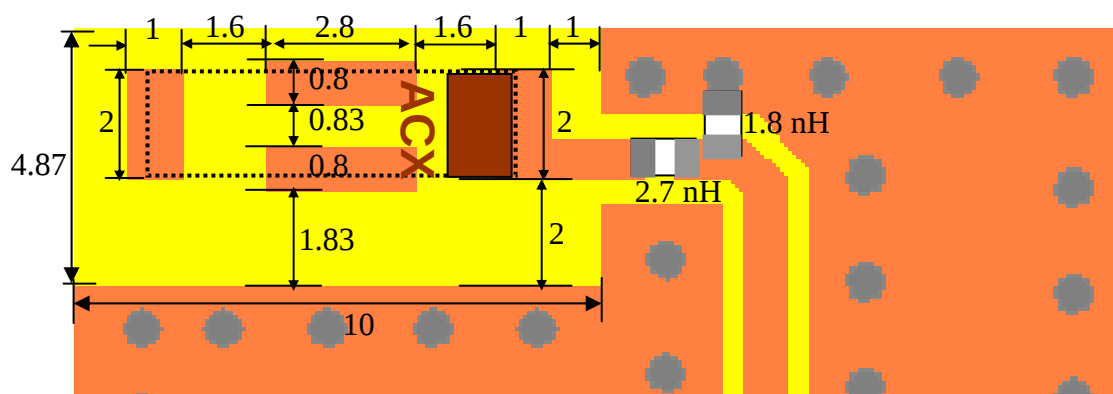


(Matching circuit and component values will be different, depending on PCB layout)


*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Typical Electrical Characteristics (T=25°C)

❖ Test Board (Unit in mm)

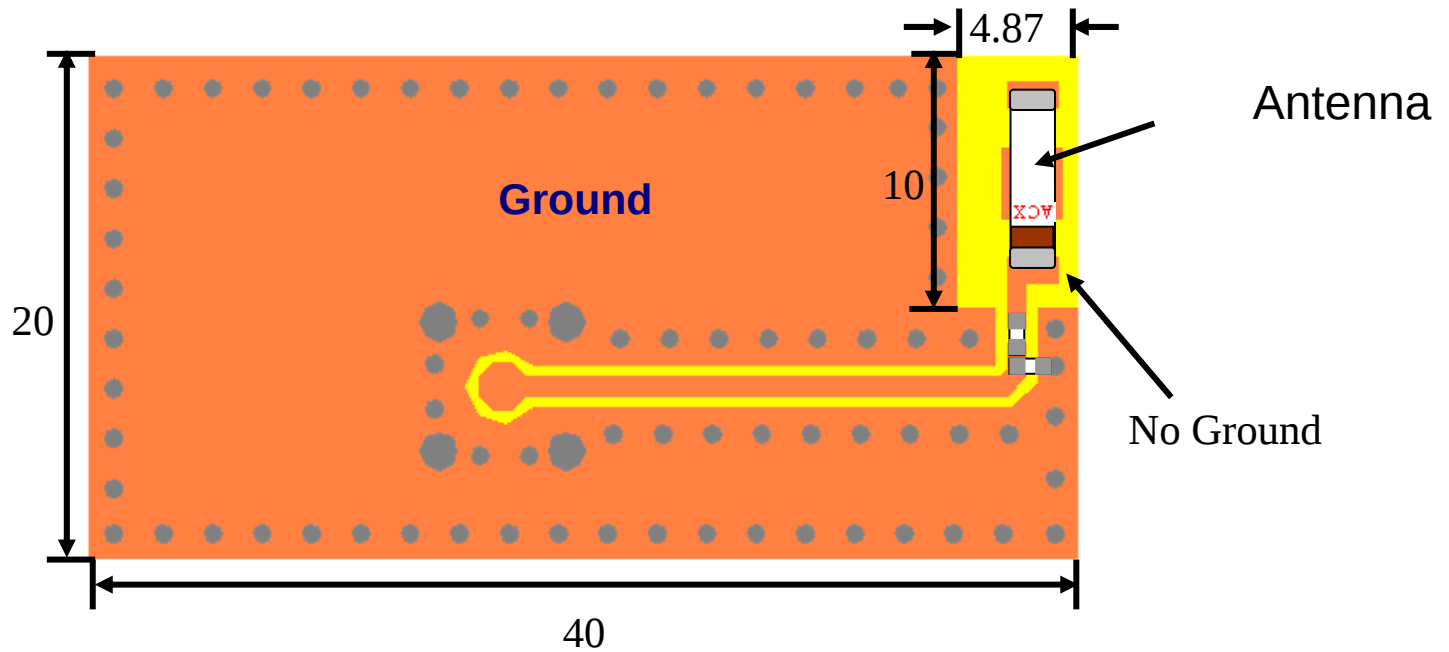


❖ Return Loss/With Matching Circuits

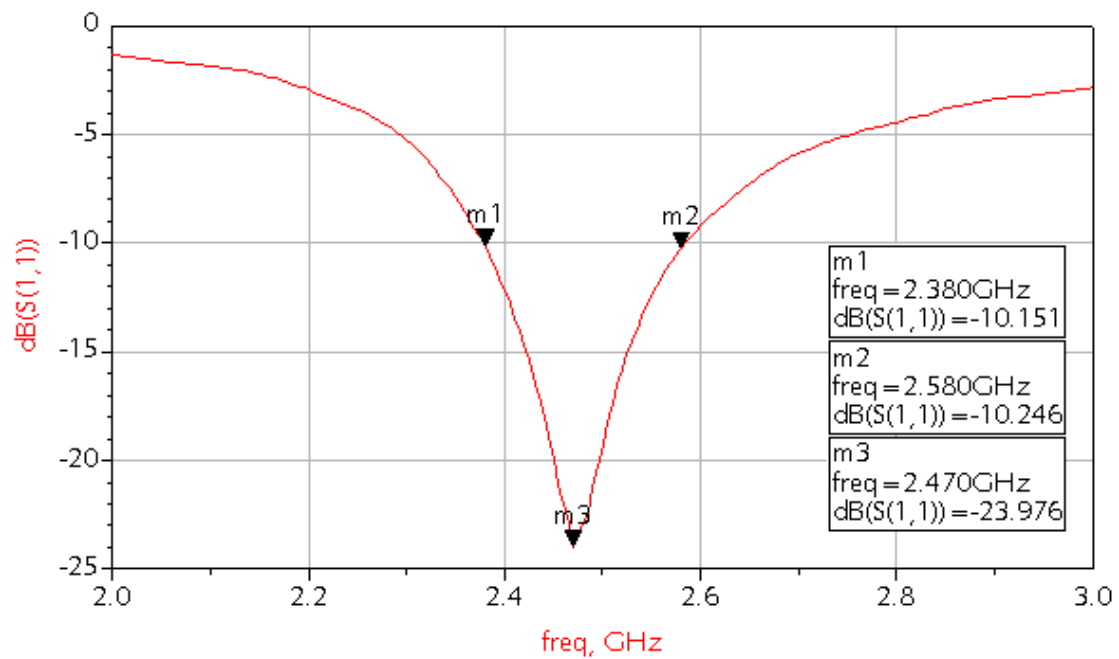


❖ Radiation Patterns


XY-V/XY-H

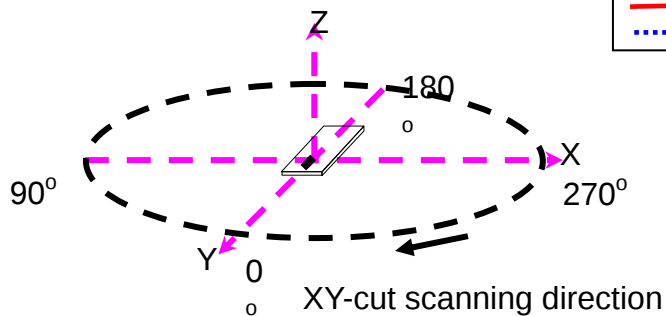


XY cut @2.45GHz
— Vertical
..... Horizontal

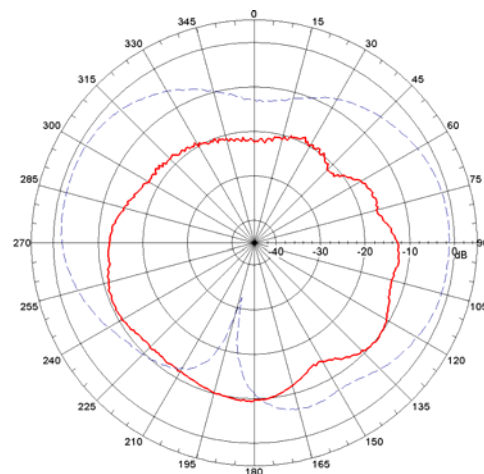


XZ-V/XZ-H

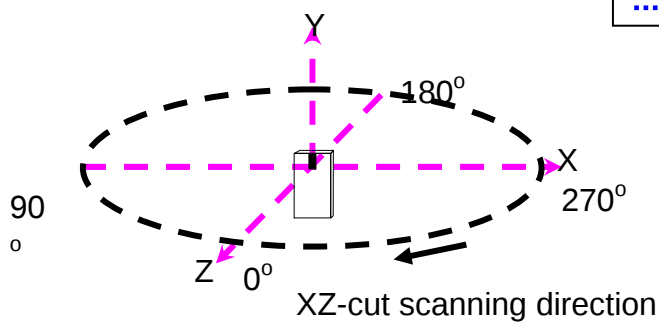


XZ cut @2.45GHz
— Vertical
..... Horizontal

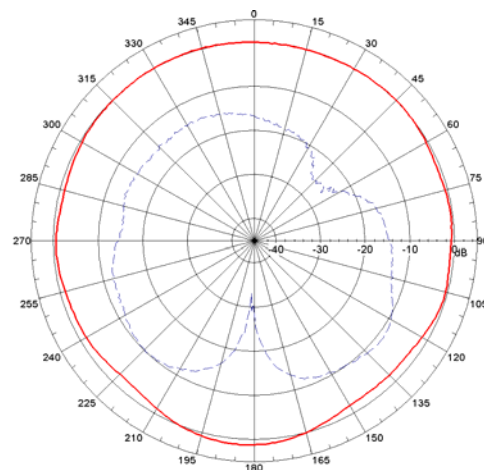

YZ-V/YZ-H

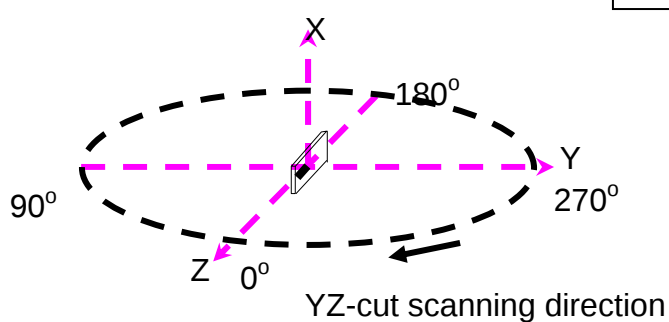


YZ cut @2.45GHz
— Vertical
..... Horizontal

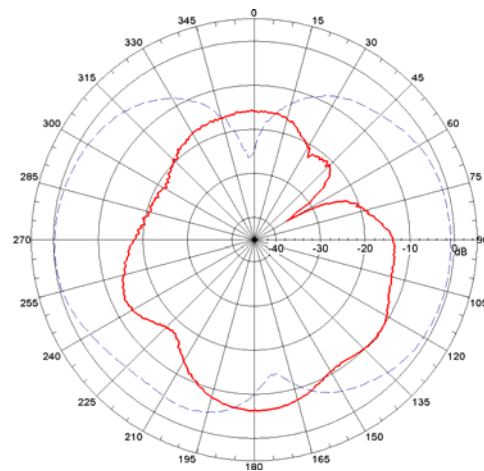


AT7020-E3R0HBA on mobile phone layout

❖ Evaluation board (Unit in mm)

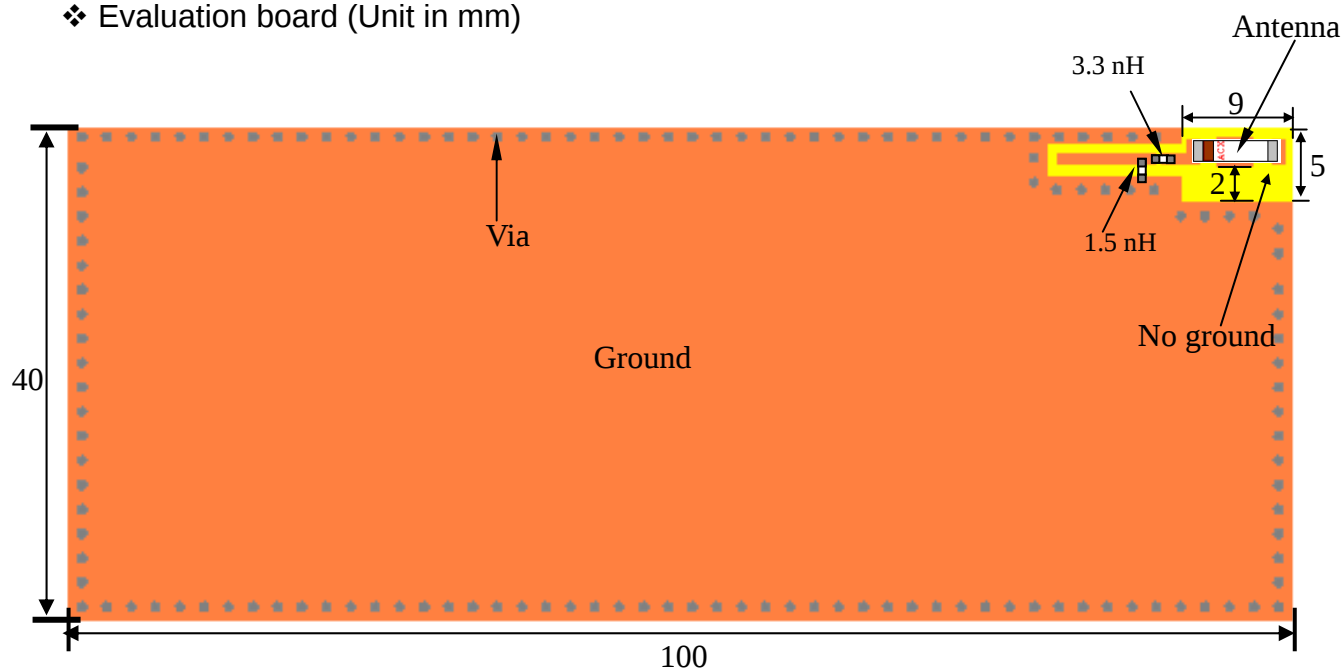


❖ Return Loss/With Matching Circuits

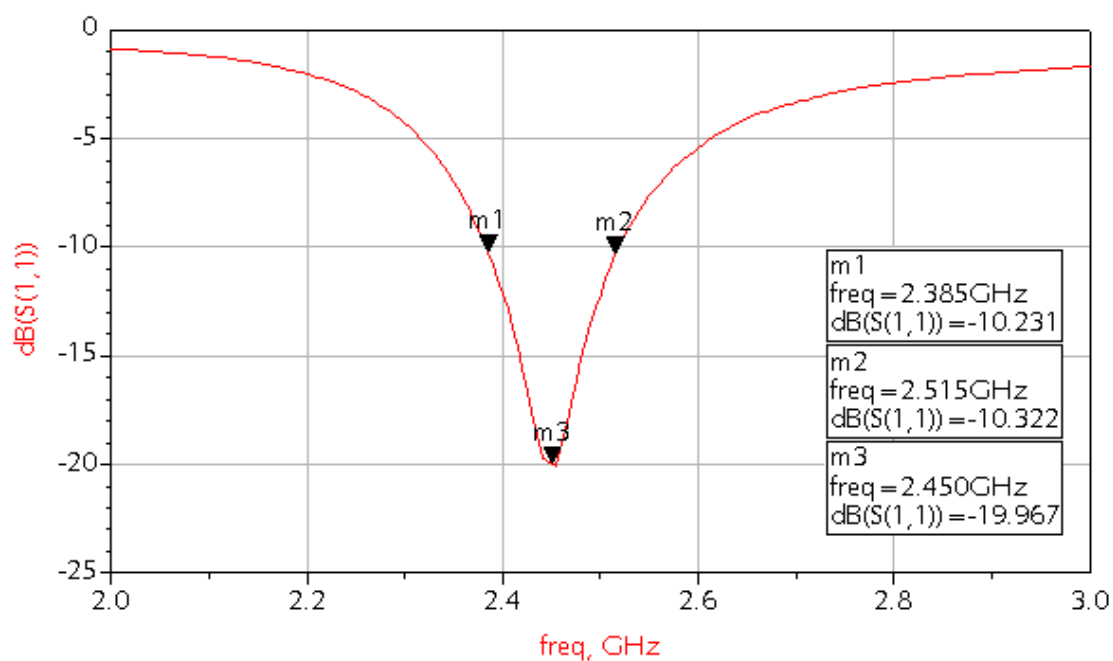


❖ Radiation Patterns


XY-V/XY-H

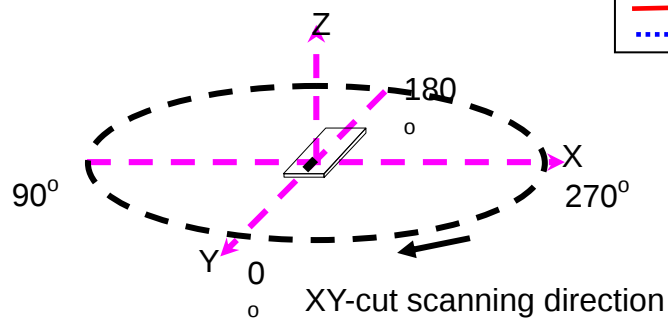


XY cut @2.45GHz
— Vertical
..... Horizontal

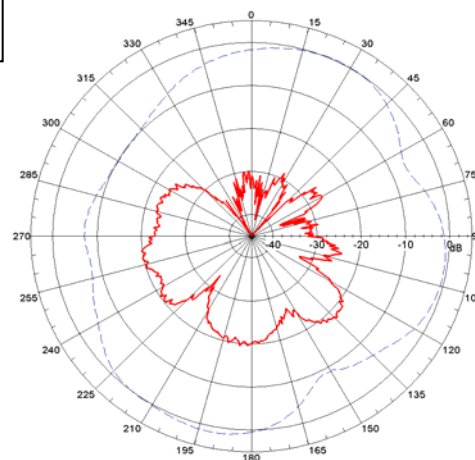


XZ-V/XZ-H

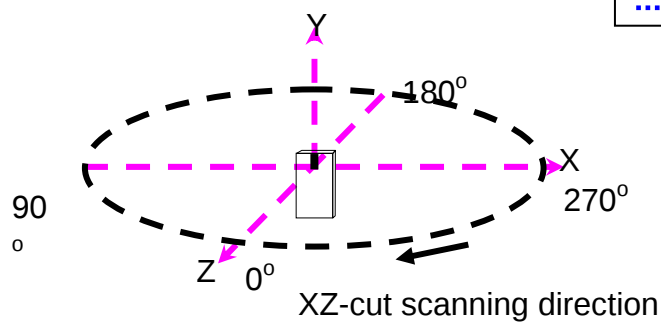


XZ cut @2.45GHz
— Vertical
..... Horizontal

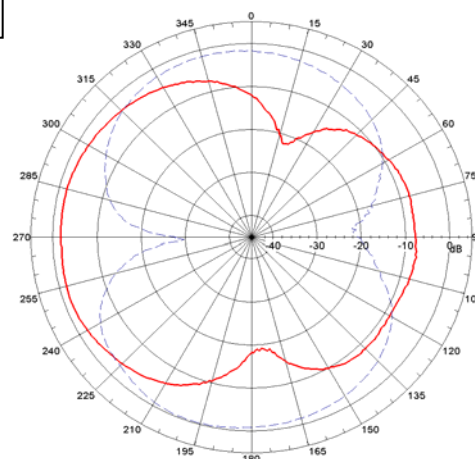

YZ-V/YZ-H

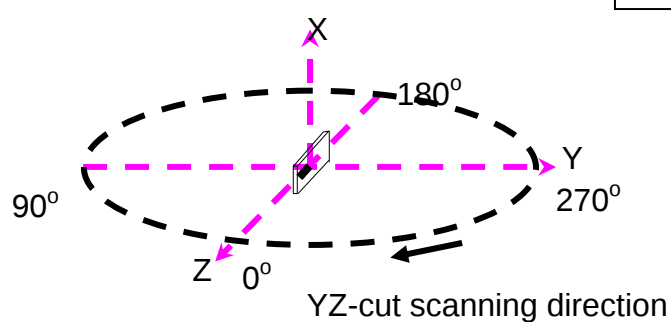


YZ cut @2.45GHz
— Vertical
..... Horizontal

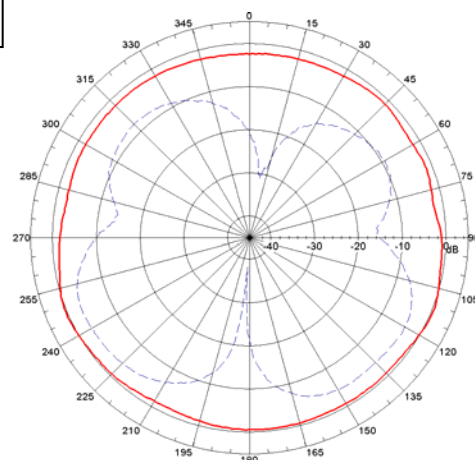



Taping Specifications

❖Tape & Reel Dimensions (Unit: mm) vs. Quantity (pcs)

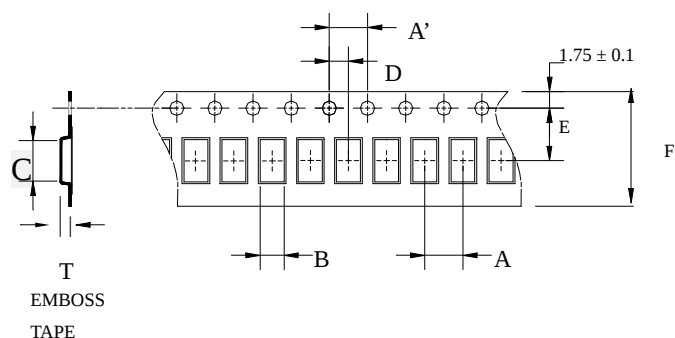

Type	A	A'	B	C	D	E	F	T	Quantity/per reel	Tape material
AT7020	4.0±0.1	4.0±0.1	2.3±0.1	7.3±0.1	2.0±0.05	5.5±0.1	12.0±0.1	2.20±0.1	1,000pcs	Plastic (Embossed)


❖Reel Dimensions (Unit: mm)

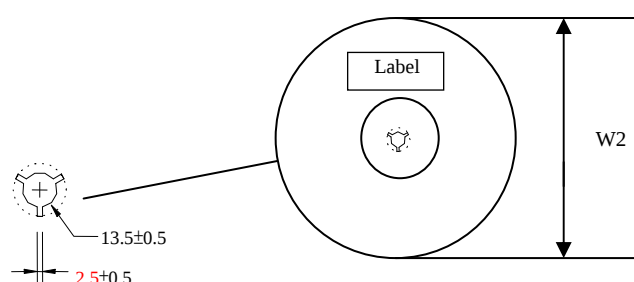


Label: Customer's Name,
ACX P/N, Q'ty, Date,
ACX Corp.

Type	W2	W3	W4	W5
AT5020	178±1	60±0.5	1.485±0.5	13±0.5

❖Leader and Trailer Tape

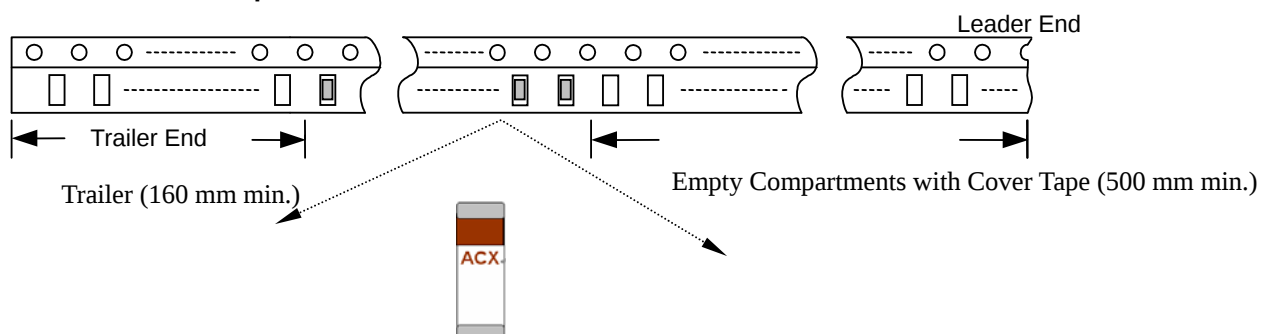

❖ Peel-off Force

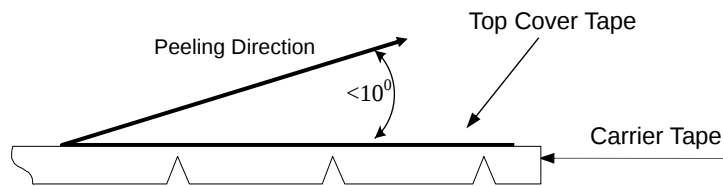

Peel-off force should be in the range of 0.2 – 1.20 N at a peel-off speed of 300 ± 10 mm/min .


❖ Storage Conditions

- (1) Temperature: 5 ~35°C , relative humidity (RH): 45~75%.
- (2) Non-corrosive environment

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Mechanical & Environmental Characteristics

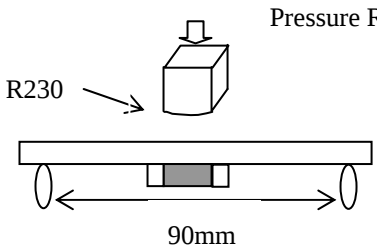Item	Requirements	Procedure
Solderability	- No apparent damage - More than 95% of the terminal electrode shall be covered with new solder	- Preheat: $120 \pm 5^{\circ}\text{C}$ - Solder: $245 \pm 5^{\circ}\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	1kg minimum	- Solder specimen onto test jig. - Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction
Deflection (Substrate Bending)	No apparent damage	- Solder specimen onto test jig (FR4, 0.8mm) using the recommend soldering profile. - Apply a bending force of 1mm deflection 
Heat/Humidity Resistance	- No apparent damage - Fulfill the electrical specification after test	- Temperature: $85 \pm 2^{\circ}\text{C}$ - Humidity: 90% ~ 95% RH - Duration: 1000 ± 48hrs - Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	- No apparent damage - Fulfill the electrical specification after test	- One cycle/step 1 : $125 \pm 5^{\circ}\text{C}$ for 30 min step 2 : $-40 \pm 5^{\circ}\text{C}$ for 30 min - No of cycles : 100 - Recovery: 1-2 hrs
Low Temperature Resistance	- No apparent damage - Fulfill the electrical specification after test	- Temperature: $-40 \pm 5^{\circ}\text{C}$ - Duration: 500 ± 24hrs - Recovery: 1-2hrs

Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

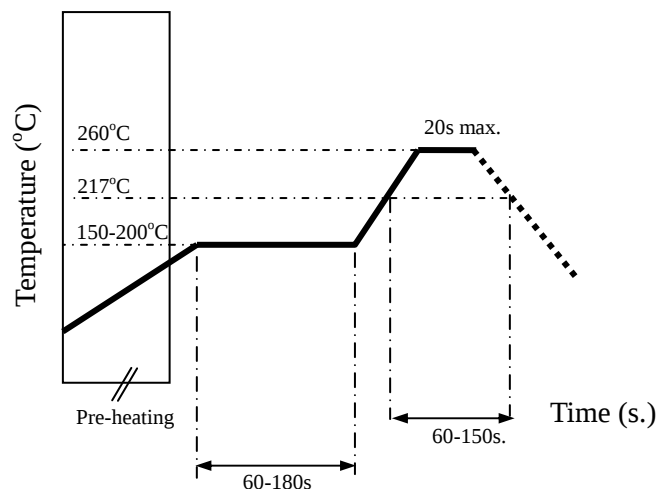

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>